


Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Vertical
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:50		

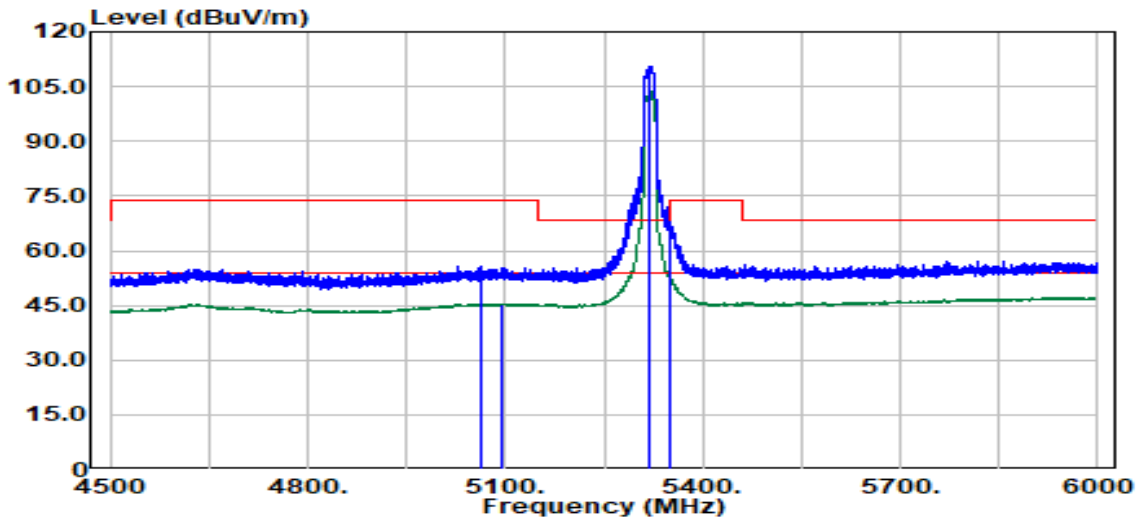


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5064.97	Peak	42.11	13.69	55.80	74.00	-18.20
5093.45	Average	31.71	13.74	45.45	54.00	-8.55
5320.00	Peak	96.35	14.06	110.41	--	--
5320.00	Average	89.47	14.06	103.53	--	--
5350.08	Peak	54.18	13.92	68.10	74.00	-5.90
5350.33	Average	38.75	13.92	52.67	54.00	-1.33

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Horizontal
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:50		

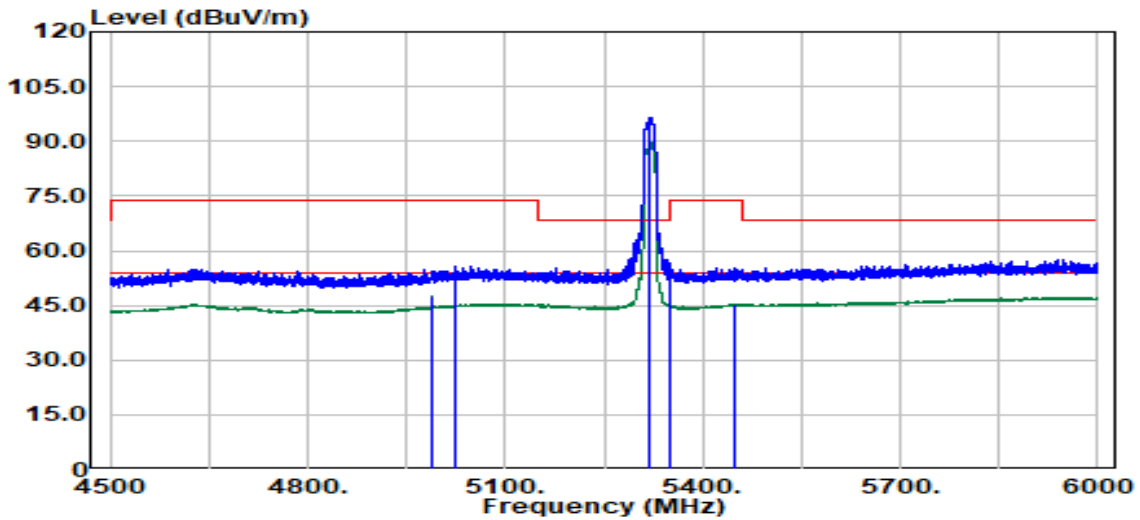


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4988.26	Average	34.27	13.23	47.50	54.00	-6.50
5025.49	Peak	42.39	13.49	55.88	74.00	-18.12
5320.00	Peak	82.48	14.06	96.54	--	--
5320.00	Average	75.57	14.06	89.63	--	--
5350.33	Peak	42.68	13.92	56.60	74.00	-17.40
5447.78	Average	30.83	14.40	45.23	54.00	-8.77

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:58		

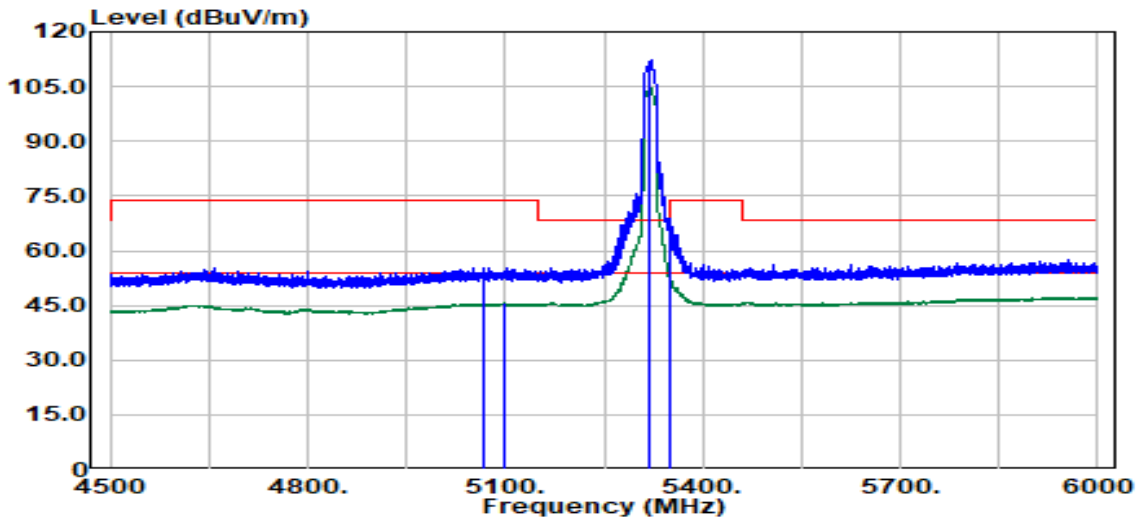


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5067.22	Peak	41.64	13.69	55.33	74.00	-18.67
5096.95	Average	31.80	13.74	45.54	54.00	-8.46
5320.00	Peak	98.17	14.06	112.23	--	--
5320.00	Average	90.71	14.06	104.77	--	--
5350.08	Average	38.30	13.92	52.22	54.00	-1.78
5351.07	Peak	53.43	13.92	67.35	74.00	-6.65

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n20/Band2
 Frequency :5320 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :58

Test Date :2024-07-16
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

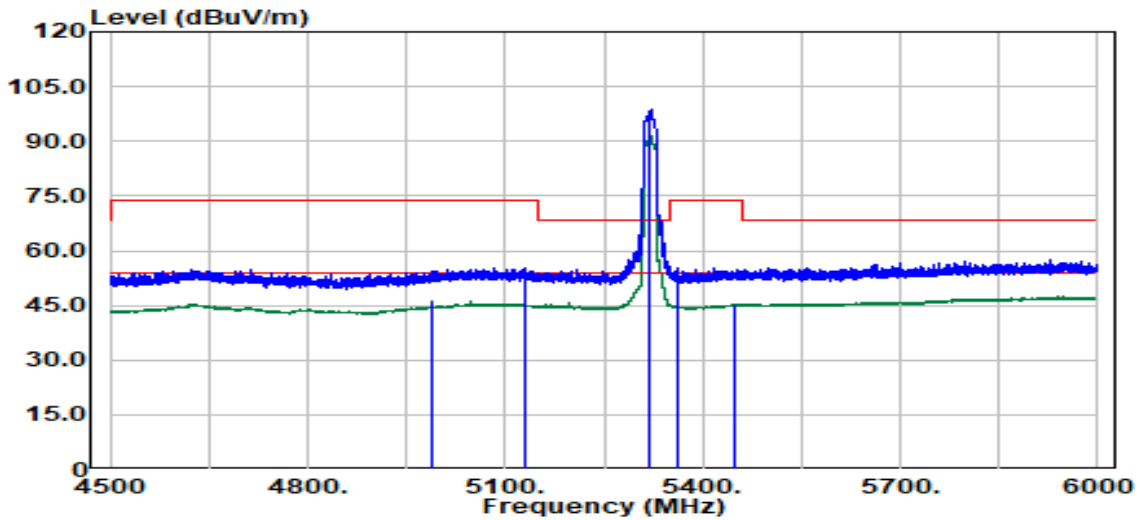


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4988.33	Average	33.06	13.23	46.29	54.00	-7.71
5130.61	Peak	41.41	13.74	55.14	74.00	-18.86
5320.00	Peak	84.62	14.06	98.68	--	--
5320.00	Average	77.25	14.06	91.31	--	--
5360.14	Peak	41.52	13.94	55.46	74.00	-18.54
5448.41	Average	30.75	14.40	45.15	54.00	-8.85

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.6/57
Frequency	:5310 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:56		

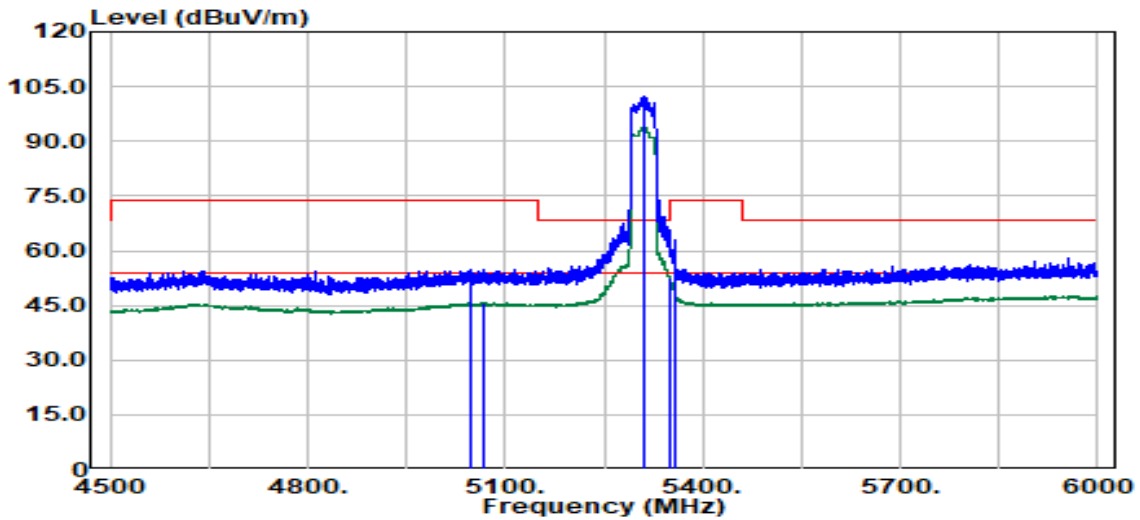


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5047.34	Peak	41.25	13.64	54.89	74.00	-19.11
5067.35	Average	32.04	13.69	45.73	54.00	-8.27
5310.00	Peak	88.42	14.11	102.53	--	--
5310.00	Average	79.92	14.11	94.03	--	--
5350.89	Average	38.43	13.92	52.34	54.00	-1.66
5357.14	Peak	49.08	13.93	63.01	74.00	-10.99

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.6/57
Frequency	:5310 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:56		

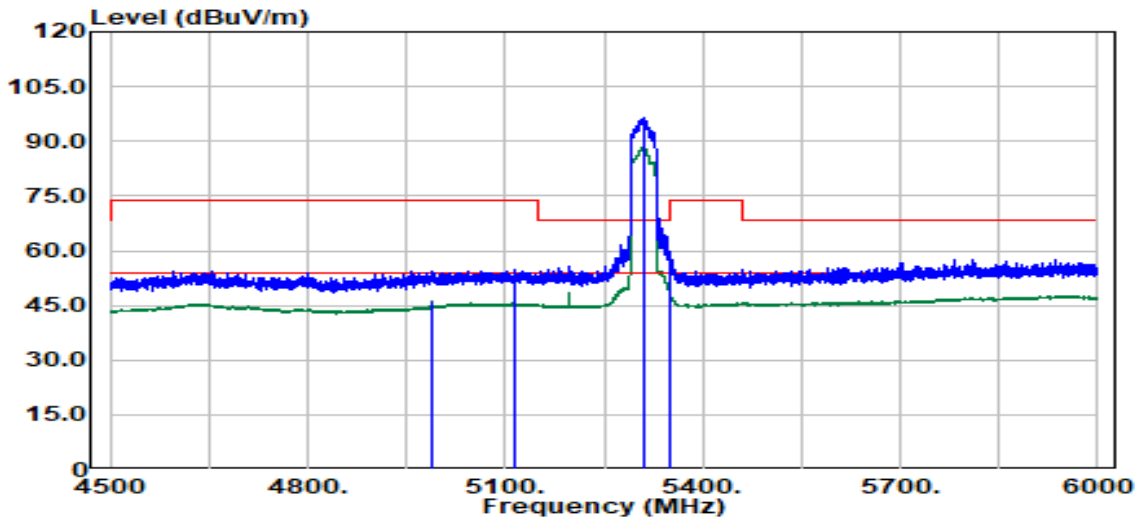


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4988.08	Average	33.07	13.23	46.30	54.00	-7.70
5113.60	Peak	40.84	13.74	54.58	74.00	-19.42
5310.00	Peak	82.16	14.11	96.27	--	--
5310.00	Average	74.16	14.11	88.27	--	--
5349.89	Peak	45.95	13.92	59.87	68.20	-8.33
5349.89	Average	34.22	13.92	48.13	54.00	-5.87

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.6/57
Frequency	:5290 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:42		

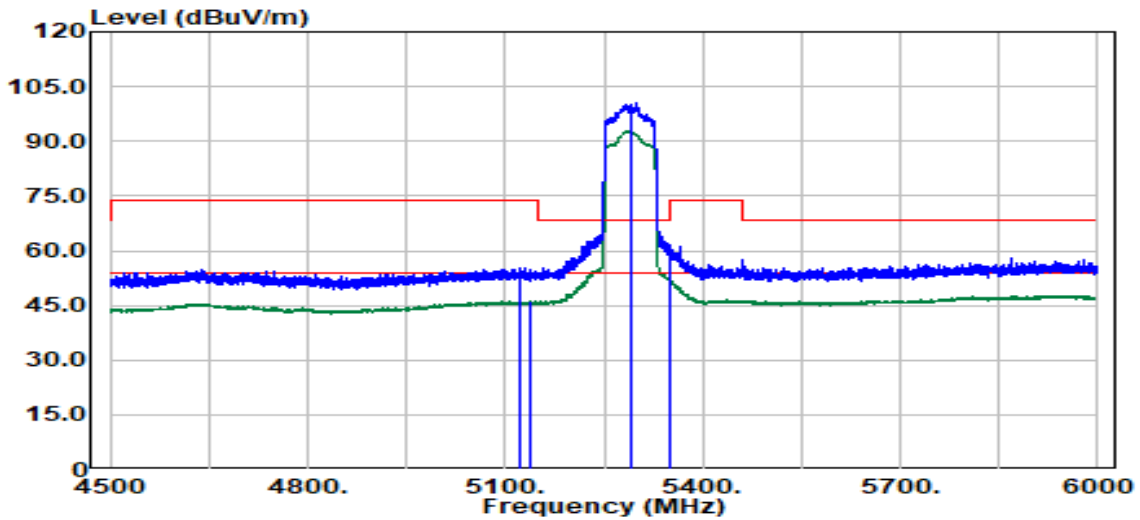


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5123.19	Peak	41.72	13.74	55.46	74.00	-18.54
5137.43	Average	32.47	13.73	46.20	54.00	-7.80
5290.00	Peak	86.21	14.11	100.32	--	--
5290.00	Average	78.74	14.11	92.86	--	--
5350.58	Average	38.28	13.92	52.20	54.00	-1.80
5352.07	Peak	47.72	13.92	61.64	74.00	-12.36

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.6/57
Frequency	:5290 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:42		

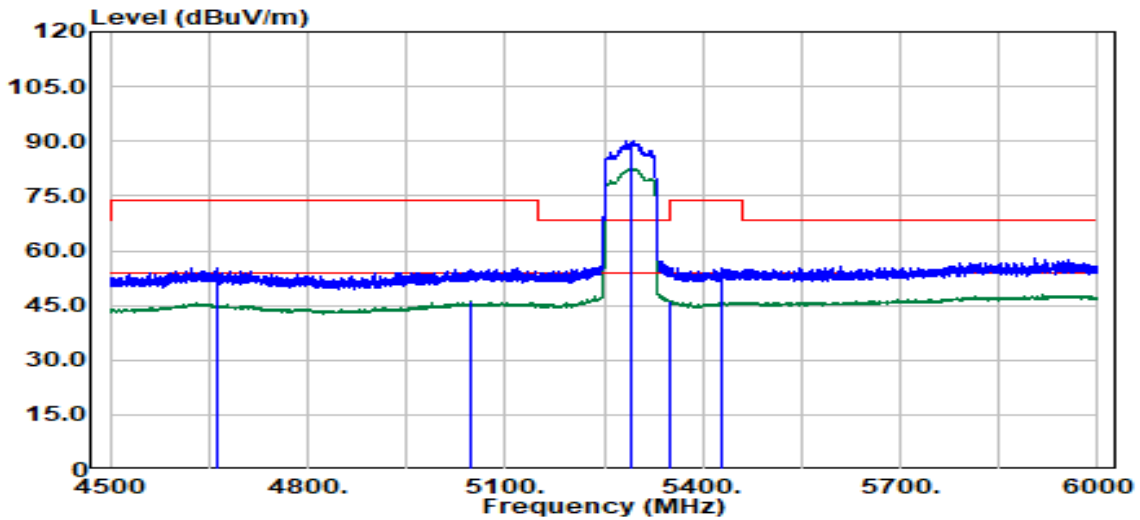


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
4664.28	Peak	42.63	12.59	55.22	74.00	-18.78
5049.34	Average	32.67	13.66	46.32	54.00	-7.68
5290.00	Peak	75.93	14.11	90.04	--	--
5290.00	Average	68.76	14.11	82.87	--	--
5350.64	Average	32.28	13.92	46.20	54.00	-7.80
5429.66	Peak	41.11	14.26	55.37	74.00	-18.63

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:32		

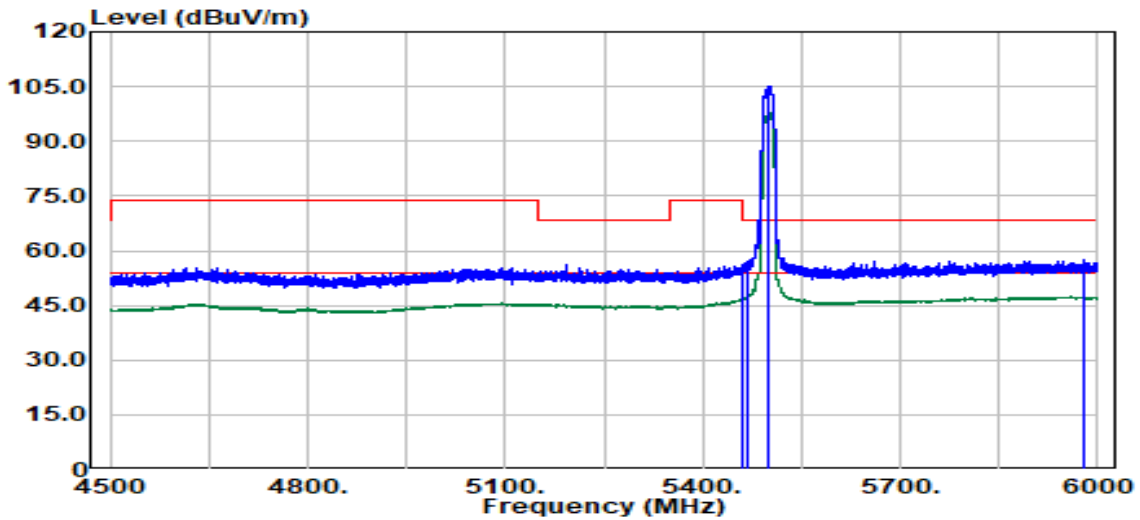


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5458.41	Average	32.34	14.39	46.73	54.00	-7.27
5458.91	Peak	41.67	14.39	56.06	74.00	-17.94
5468.91	Peak	42.55	14.36	56.91	68.20	-11.29
5500.00	Peak	90.81	14.27	105.08	--	--
5500.00	Average	83.68	14.27	97.95	--	--
5977.00	Peak	41.38	16.12	57.51	68.20	-10.69

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11a/Band3
 Frequency :5500 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :32

Test Date :2024-07-16
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

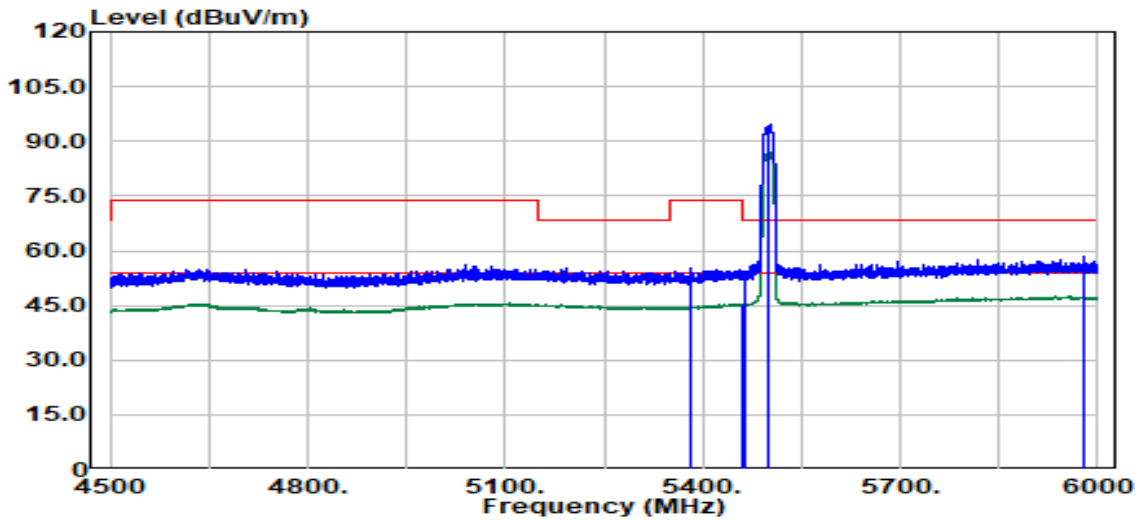


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5383.15	Peak	41.14	14.00	55.14	74.00	-18.86
5458.91	Average	31.04	14.39	45.43	54.00	-8.57
5463.16	Peak	40.14	14.38	54.52	68.20	-13.68
5500.00	Peak	80.16	14.27	94.43	--	--
5500.00	Average	72.99	14.27	87.26	--	--
5979.75	Peak	42.27	16.12	58.39	68.20	-9.81

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:42		

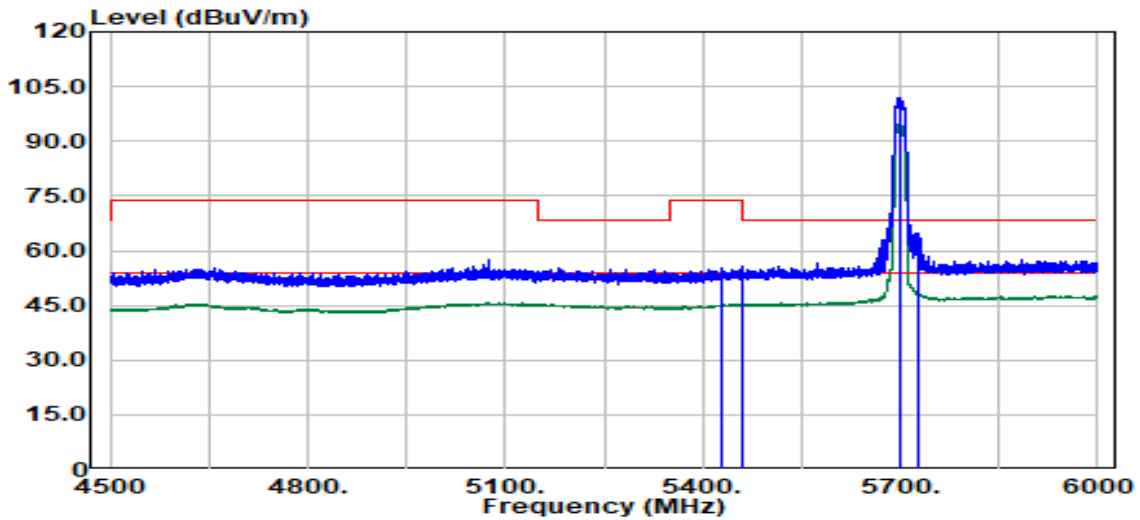


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5430.54	Peak	40.87	14.27	55.14	74.00	-18.86
5460.00	Average	30.85	14.39	45.24	54.00	-8.76
5460.77	Peak	41.41	14.38	55.79	68.20	-12.41
5700.00	Peak	86.27	15.63	101.90	--	--
5700.00	Average	79.15	15.63	94.78	--	--
5726.39	Peak	48.74	15.79	64.54	68.20	-3.66

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Horizontal
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:42		

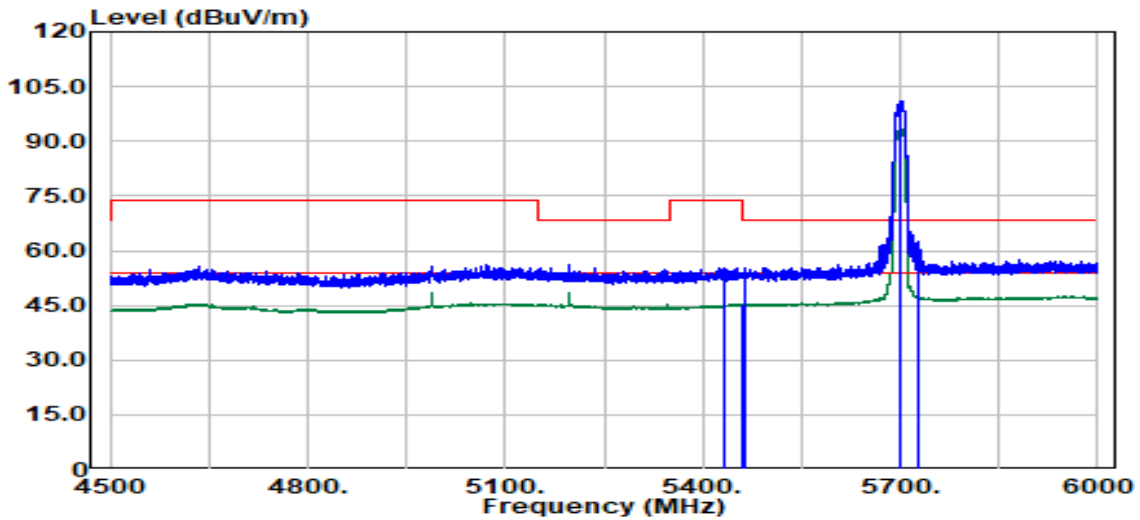


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5432.03	Peak	41.02	14.28	55.30	74.00	-18.70
5460.00	Average	30.97	14.39	45.35	54.00	-8.65
5464.27	Peak	40.71	14.37	55.08	68.20	-13.12
5700.00	Peak	85.22	15.63	100.85	--	--
5700.00	Average	78.20	15.63	93.83	--	--
5725.64	Peak	46.64	15.79	62.43	68.20	-5.77

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:34		

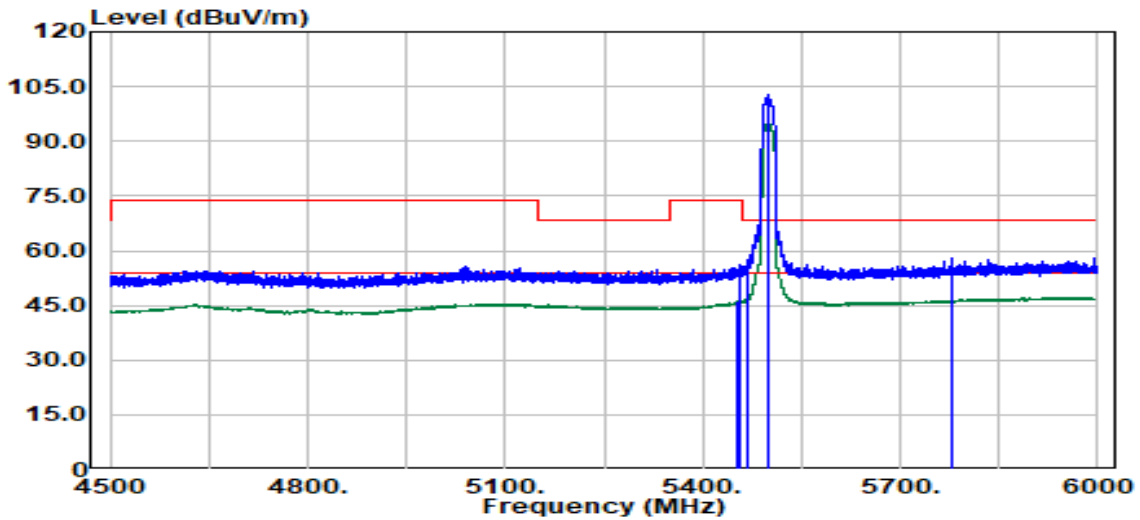


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5452.91	Average	31.63	14.41	46.03	54.00	-7.97
5454.91	Peak	41.55	14.40	55.95	74.00	-18.05
5468.16	Peak	42.97	14.36	57.34	68.20	-10.86
5500.00	Peak	88.73	14.27	103.00	--	--
5500.00	Average	80.80	14.27	95.07	--	--
5777.21	Peak	41.79	16.04	57.83	68.20	-10.37

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n20/Band3
 Frequency :5500 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :34

Test Date :2024-07-16
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

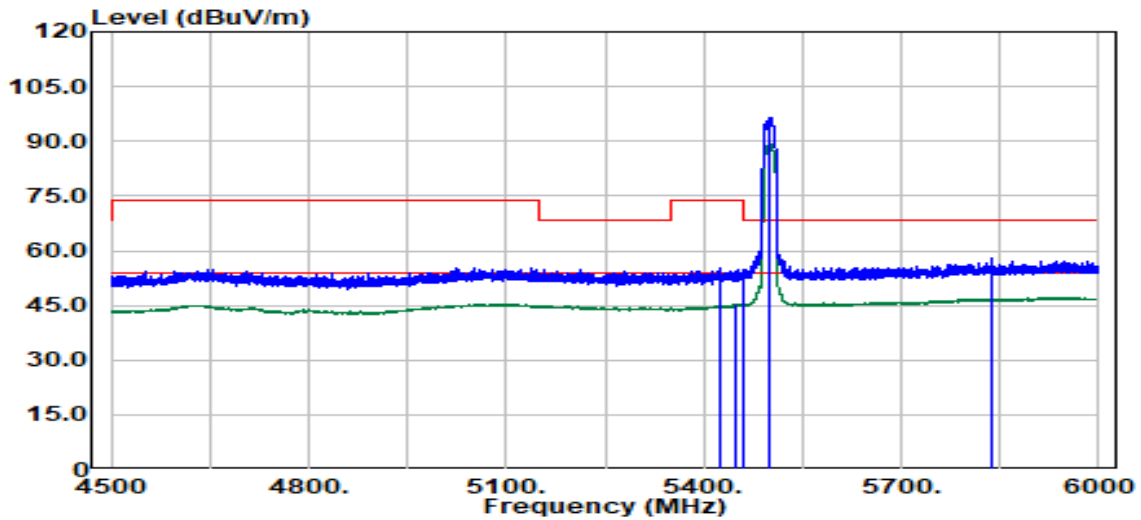


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5425.15	Peak	40.90	14.23	55.13	74.00	-18.87
5447.41	Average	30.79	14.40	45.18	54.00	-8.82
5460.91	Peak	40.61	14.38	54.99	68.20	-13.21
5500.00	Peak	82.22	14.27	96.49	--	--
5500.00	Average	75.20	14.27	89.47	--	--
5838.22	Peak	42.08	15.99	58.06	68.20	-10.14

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:57		

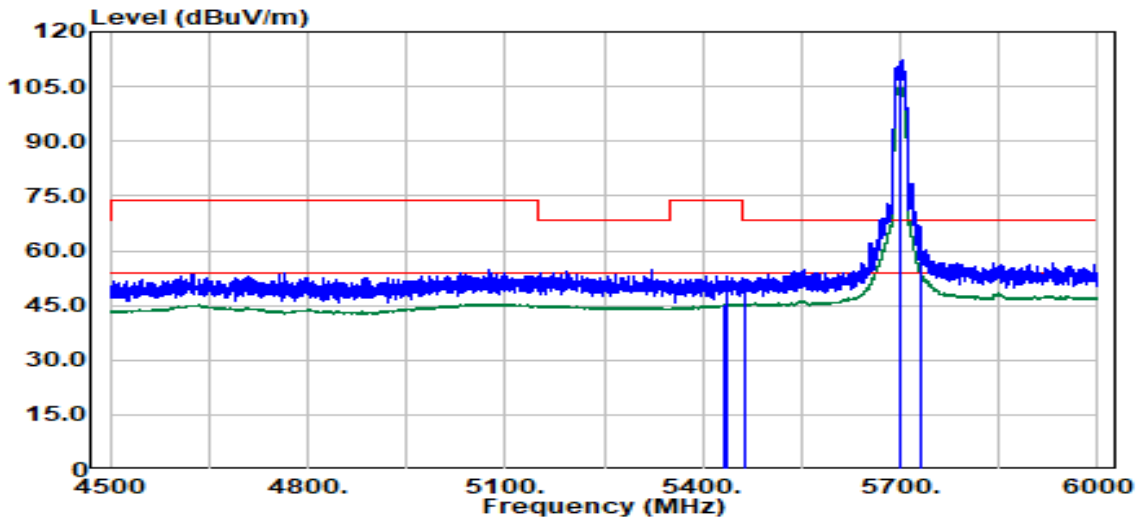


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5432.53	Average	30.95	14.28	45.23	54.00	-8.77
5435.53	Peak	38.69	14.31	53.00	74.00	-21.00
5464.52	Peak	37.90	14.37	52.27	68.20	-15.93
5700.00	Peak	96.53	15.63	112.16	--	--
5700.00	Average	89.60	15.63	105.23	--	--
5732.56	Peak	51.00	15.83	66.83	68.20	-1.37

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n20/Band3
 Frequency :5700 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :57

Test Date :2024-07-16
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

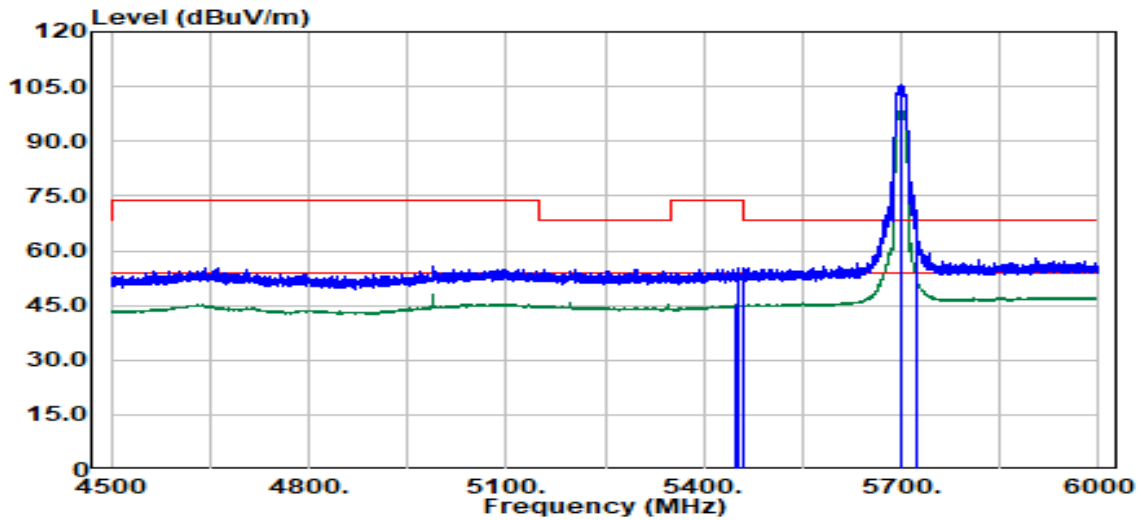


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5447.41	Average	30.76	14.40	45.16	54.00	-8.84
5452.41	Peak	40.90	14.41	55.31	74.00	-18.69
5461.66	Peak	40.97	14.38	55.35	68.20	-12.85
5700.00	Peak	89.96	15.63	105.59	--	--
5700.00	Average	83.07	15.63	98.70	--	--
5725.20	Peak	48.33	15.79	64.12	68.20	-4.08

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5510 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:48		

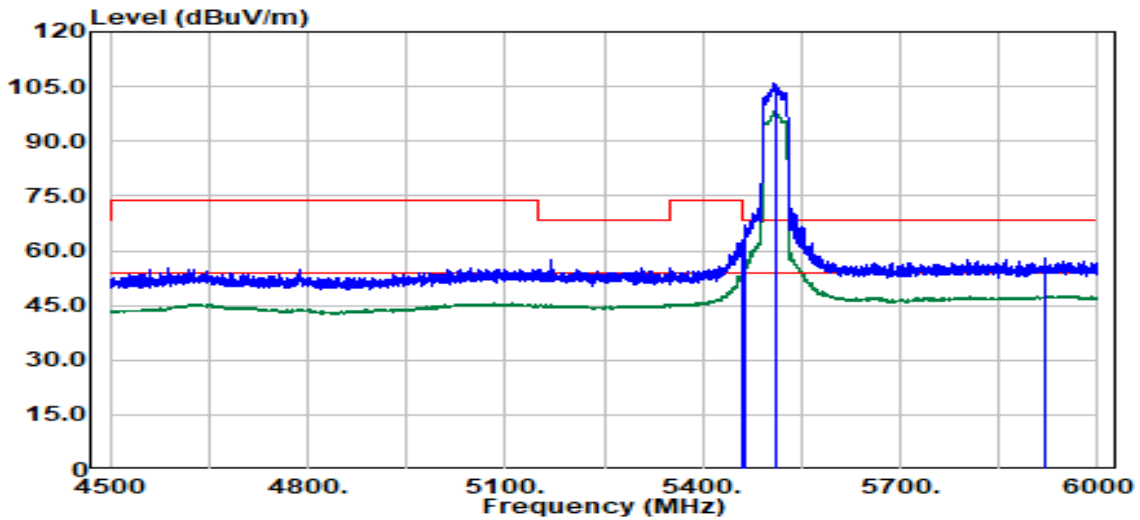


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5459.41	Peak	55.28	7.58	62.86	74.00	-11.14
5459.66	Average	45.19	7.58	52.77	54.00	-1.23
5465.41	Peak	59.37	7.56	66.93	68.20	-1.27
5510.00	Peak	98.38	7.49	105.87	--	--
5510.00	Average	90.61	7.49	98.10	--	--
5918.99	Peak	49.23	8.87	58.10	68.20	-10.10

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :48

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

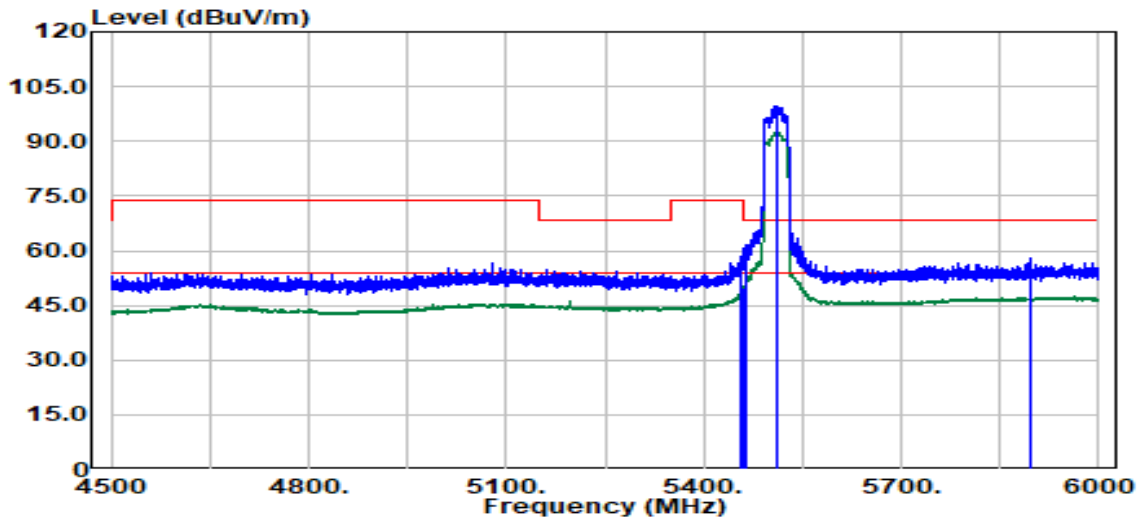


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level d μ V	Factor dB	Actual FS d μ V/m	Limit d μ V/m	Margin dB
5456.66	Peak	50.73	7.59	58.32	74.00	-15.68
5459.91	Average	42.25	7.58	49.83	54.00	-4.17
5464.91	Peak	53.92	7.57	61.49	68.20	-6.71
5510.00	Peak	92.15	7.49	99.63	--	--
5510.00	Average	85.24	7.49	92.73	--	--
5897.73	Peak	49.26	8.79	58.05	68.20	-10.15

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5670 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:63		

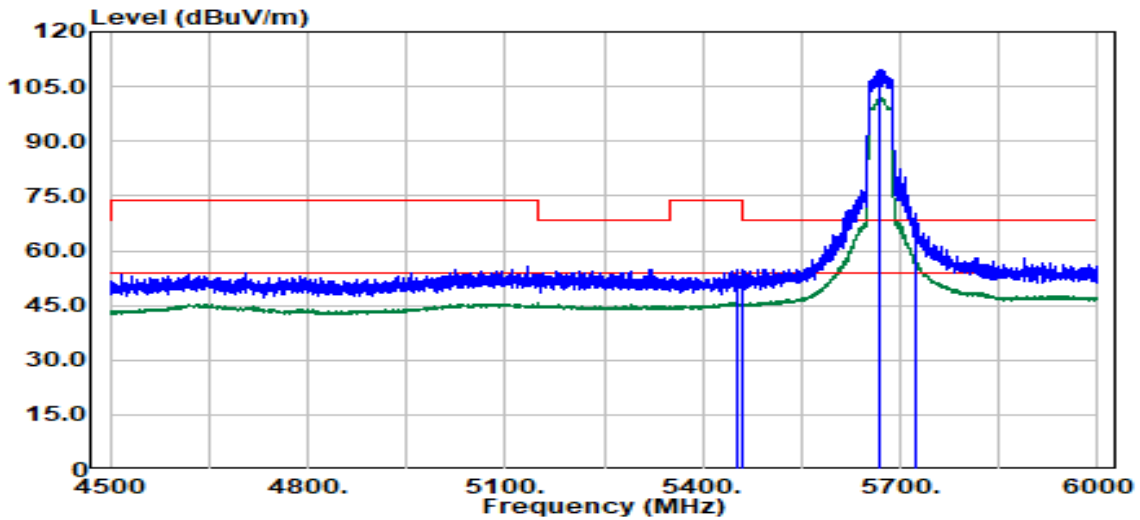


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5452.91	Average	38.11	7.60	45.71	54.00	-8.29
5453.91	Peak	47.15	7.60	54.75	74.00	-19.25
5460.41	Peak	47.34	7.58	54.92	68.20	-13.28
5670.00	Peak	101.15	8.37	109.52	--	--
5670.00	Average	93.73	8.37	102.10	--	--
5724.95	Peak	58.17	8.75	66.92	68.20	-1.28

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band3
 Frequency :5670 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :63

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

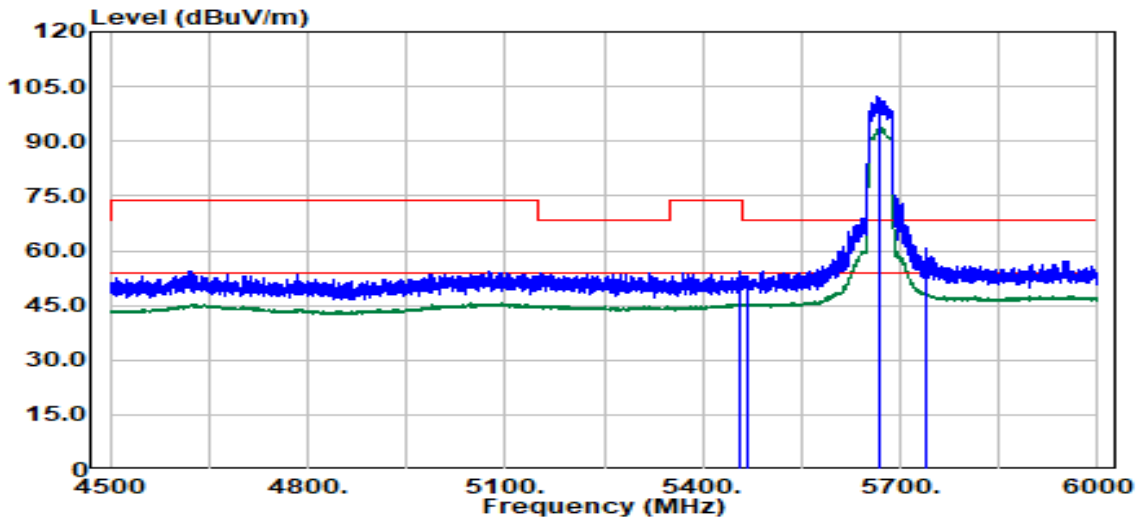


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5454.66	Peak	46.55	7.60	54.15	74.00	-19.85
5455.66	Average	37.78	7.59	45.37	54.00	-8.63
5466.91	Peak	45.54	7.56	53.10	68.20	-15.10
5670.00	Peak	94.07	8.37	102.44	--	--
5670.00	Average	85.44	8.37	93.81	--	--
5738.21	Peak	52.06	8.82	60.88	68.20	-7.32

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5530 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:30		

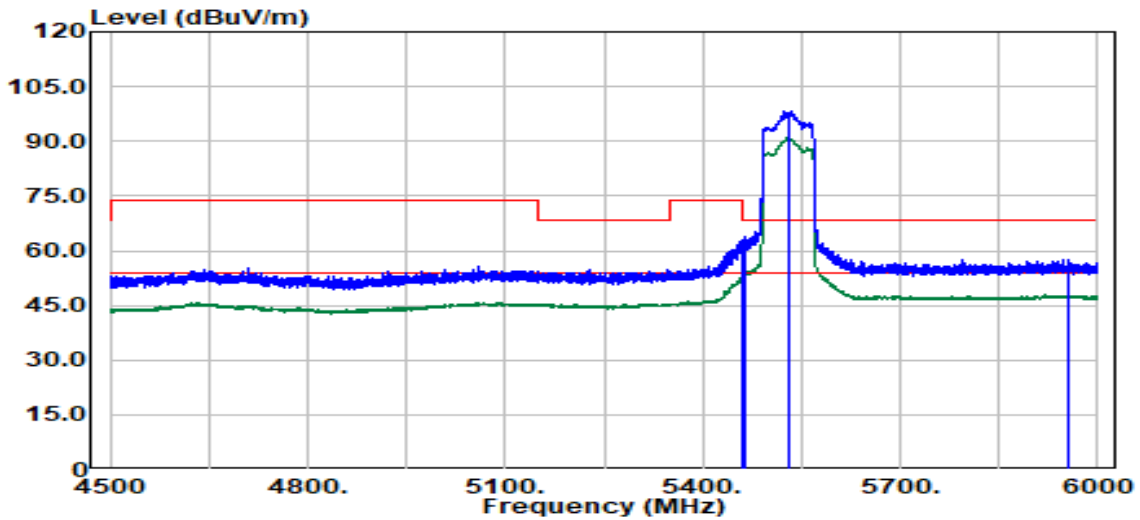


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5460.00	Peak	48.03	14.39	62.42	68.20	-5.78
5460.00	Average	38.63	14.39	53.02	54.00	-0.98
5465.02	Peak	49.26	14.37	63.64	68.20	-4.56
5530.00	Peak	84.08	14.38	98.45	--	--
5530.00	Average	76.50	14.38	90.88	--	--
5954.52	Peak	41.40	16.16	57.56	68.20	-10.64

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11ac80/Band3
 Frequency :5530 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :30

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

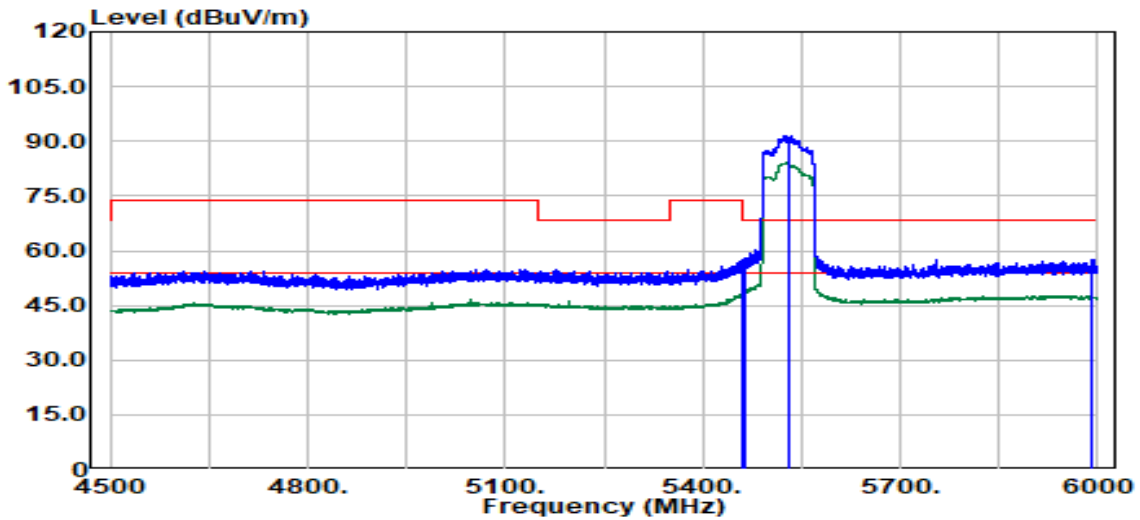


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5458.91	Average	33.84	14.39	48.23	54.00	-5.77
5459.91	Peak	43.14	14.39	57.53	74.00	-16.47
5465.91	Peak	43.76	14.37	58.13	68.20	-10.07
5530.00	Peak	77.15	14.38	91.53	--	--
5530.00	Average	69.71	14.38	84.09	--	--
5992.50	Peak	41.41	16.10	57.52	68.20	-10.68

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5610 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:65		

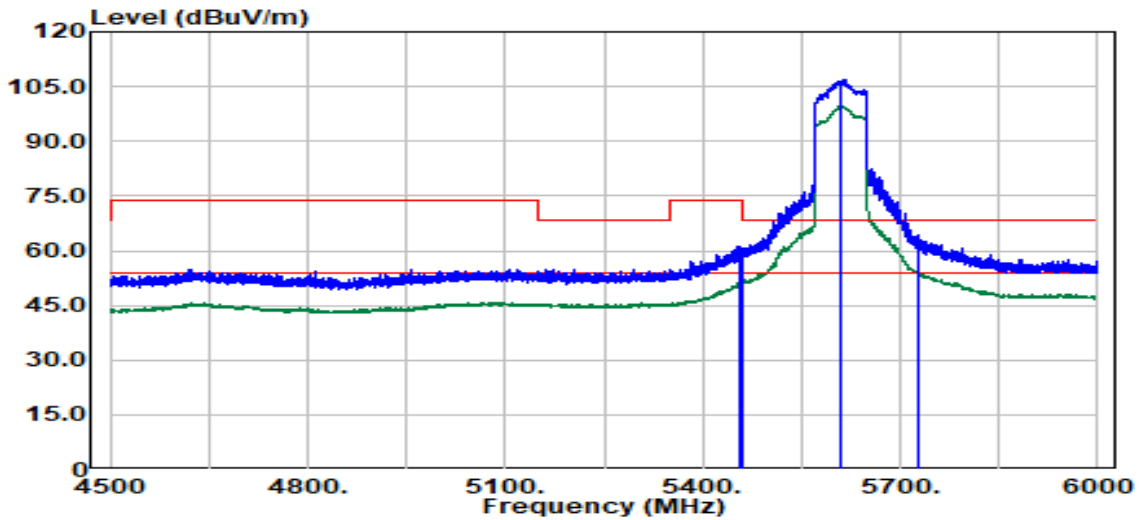


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5454.77	Average	36.81	14.40	51.21	54.00	-2.79
5455.52	Peak	46.64	14.40	61.04	74.00	-12.96
5462.02	Peak	46.32	14.38	60.70	68.20	-7.50
5610.00	Peak	91.89	14.77	106.66	--	--
5610.00	Average	85.05	14.77	99.82	--	--
5728.14	Peak	48.34	15.80	64.15	68.20	-4.05

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11ac80/Band3
 Frequency :5610 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :65

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

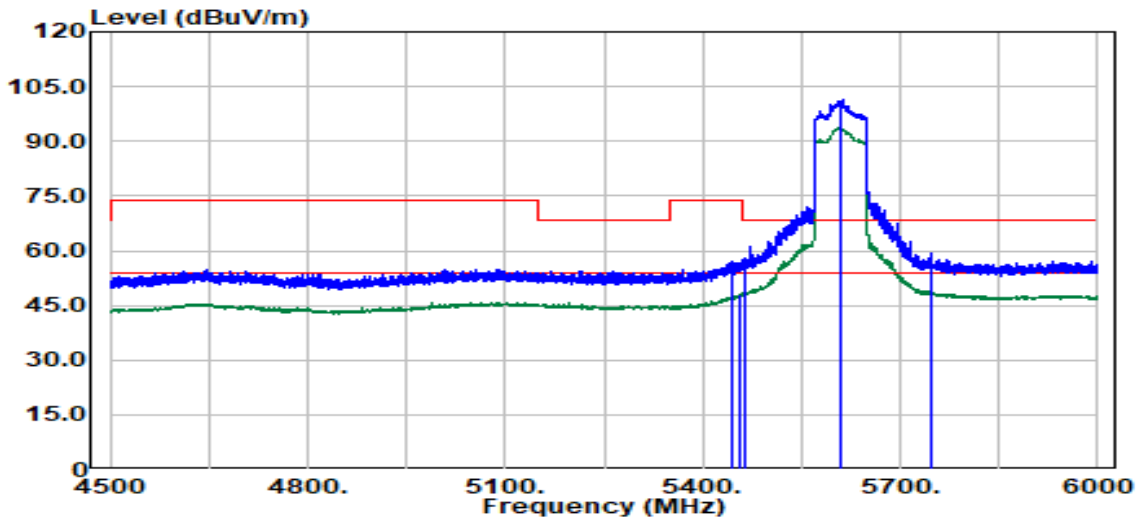


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5444.16	Peak	42.60	14.37	56.97	74.00	-17.03
5454.66	Average	33.54	14.40	47.94	54.00	-6.06
5465.16	Peak	43.59	14.37	57.96	68.20	-10.24
5610.00	Peak	86.75	14.77	101.52	--	--
5610.00	Average	78.88	14.77	93.65	--	--
5747.46	Peak	43.23	15.92	59.16	68.20	-9.04

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:74		

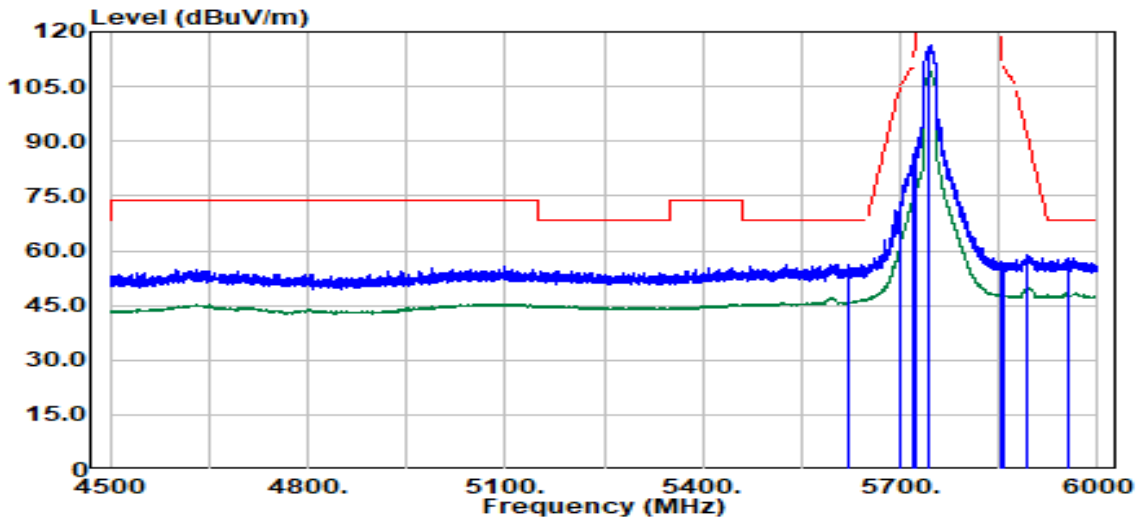


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5620.69	Peak	41.39	14.87	56.27	68.20	-11.93
5699.70	Peak	56.95	15.63	72.58	104.98	-32.40
5719.95	Peak	68.52	15.75	84.28	110.79	-26.51
5723.20	Peak	72.48	15.77	88.26	118.11	-29.85
5745.00	Peak	100.53	15.91	116.44	--	--
5745.00	Average	93.18	15.91	109.09	--	--
5853.48	Peak	41.22	15.94	57.16	114.27	-57.11
5856.98	Peak	40.86	15.94	56.80	110.25	-53.45
5892.98	Peak	42.72	15.92	58.64	91.86	-33.21
5954.99	Peak	41.77	16.16	57.92	68.20	-10.28

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11a/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :74

Test Date :2024-07-16
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

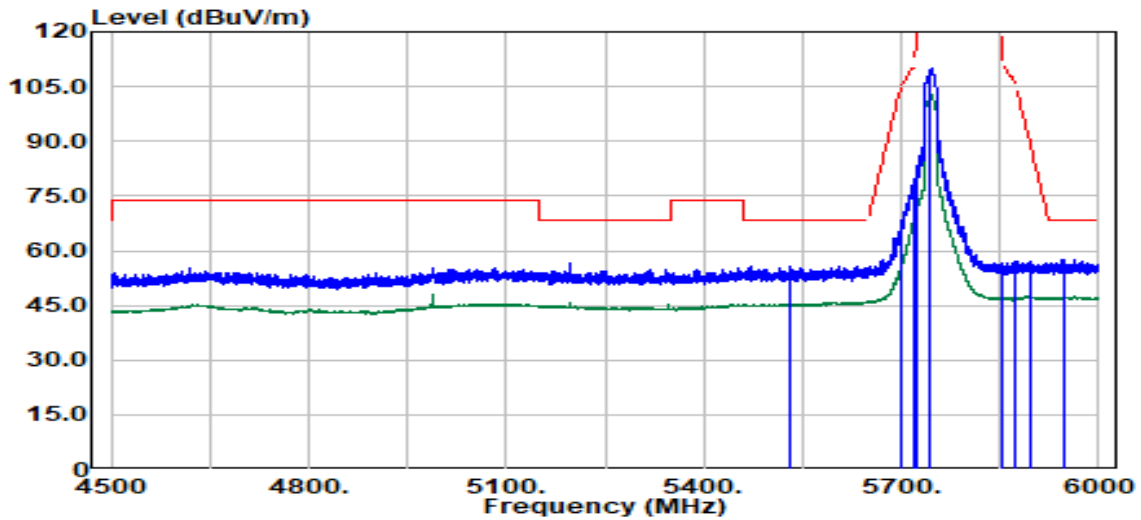


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5531.42	Peak	41.38	14.38	55.76	68.20	-12.44
5699.95	Peak	52.74	15.63	68.37	105.16	-36.79
5719.95	Peak	62.82	15.75	78.57	110.79	-32.22
5723.70	Peak	67.39	15.78	83.16	119.25	-36.08
5745.00	Peak	94.12	15.91	110.03	--	--
5745.00	Average	86.72	15.91	102.63	--	--
5851.48	Peak	40.60	15.94	56.54	118.84	-62.29
5872.98	Peak	40.94	15.93	56.87	105.77	-48.89
5895.23	Peak	41.08	15.92	57.00	90.19	-33.19
5948.99	Peak	41.54	16.16	57.70	68.20	-10.50

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:76		

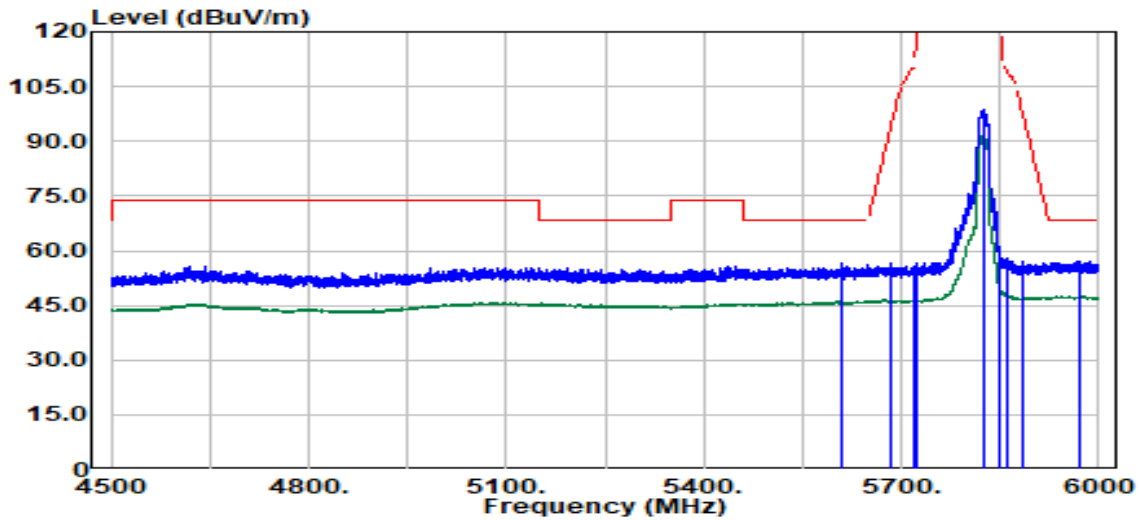


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5607.69	Peak	41.94	14.75	56.69	68.20	-11.51
5682.95	Peak	41.25	15.47	56.72	92.62	-35.90
5718.20	Peak	40.07	15.74	55.81	110.30	-54.49
5724.45	Peak	40.72	15.78	56.50	120.96	-64.46
5825.00	Peak	82.70	16.03	98.73	--	--
5825.00	Average	75.49	16.03	91.52	--	--
5850.23	Peak	42.13	15.94	58.07	121.69	-63.61
5860.48	Peak	41.96	15.94	57.90	109.26	-51.37
5884.48	Peak	41.06	15.93	56.99	98.16	-41.17
5972.25	Peak	41.01	16.13	57.14	68.20	-11.06

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11a/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :76

Test Date :2024-07-16
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

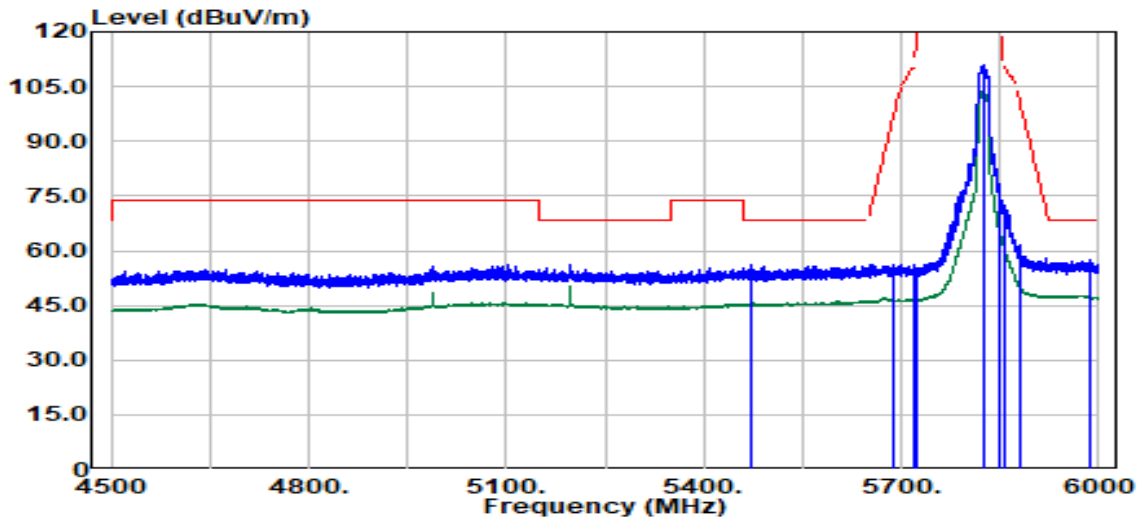


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5472.91	Peak	41.61	14.35	55.96	68.20	-12.24
5688.70	Peak	40.72	15.53	56.25	96.86	-40.62
5718.70	Peak	40.53	15.75	56.28	110.44	-54.16
5724.20	Peak	39.56	15.78	55.35	120.39	-65.04
5825.00	Peak	94.87	16.03	110.91	--	--
5825.00	Average	87.74	16.03	103.77	--	--
5850.98	Peak	59.51	15.94	75.45	119.98	-44.52
5855.98	Peak	56.30	15.94	72.25	110.53	-38.28
5879.98	Peak	45.76	15.93	61.69	101.50	-39.82
5986.25	Peak	41.28	16.11	57.39	68.20	-10.81

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:76		

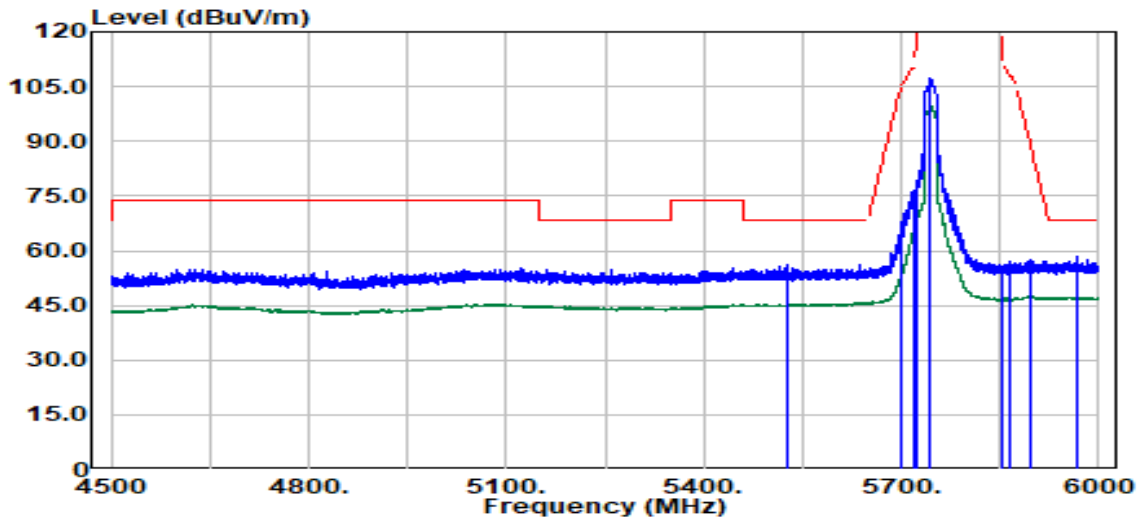


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5526.67	Peak	41.96	14.37	56.33	68.20	-11.87
5699.45	Peak	49.92	15.63	65.54	104.79	-39.25
5719.70	Peak	60.93	15.75	76.69	110.72	-34.03
5724.95	Peak	63.29	15.78	79.08	122.10	-43.02
5745.00	Peak	91.25	15.91	107.16	--	--
5745.00	Average	83.85	15.91	99.76	--	--
5852.98	Peak	39.89	15.94	55.83	115.41	-59.58
5865.48	Peak	41.16	15.94	57.09	107.86	-50.77
5896.48	Peak	41.75	15.92	57.67	89.26	-31.59
5965.49	Peak	42.33	16.14	58.48	68.20	-9.72

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :76

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

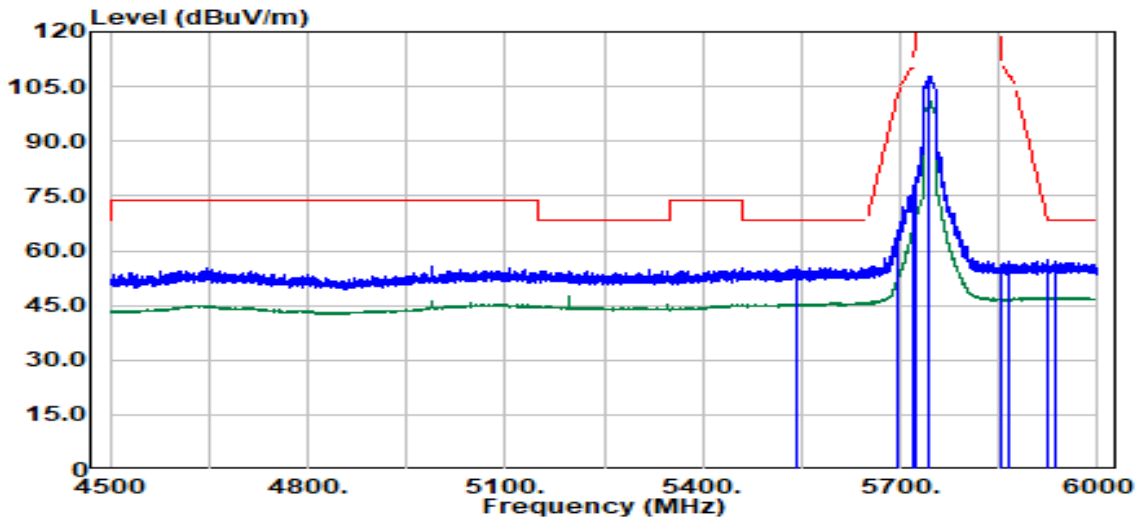


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5542.67	Peak	41.37	14.42	55.80	68.20	-12.40
5697.20	Peak	50.24	15.60	65.84	103.14	-37.30
5719.95	Peak	61.93	15.75	77.69	110.79	-33.10
5724.45	Peak	63.77	15.78	79.55	120.96	-41.40
5745.00	Peak	91.79	15.91	107.70	--	--
5745.00	Average	84.93	15.91	100.84	--	--
5853.48	Peak	40.21	15.94	56.15	114.27	-58.12
5865.23	Peak	40.91	15.94	56.85	107.93	-51.08
5923.99	Peak	41.34	16.04	57.38	68.95	-11.57
5937.49	Peak	40.89	16.10	56.99	68.20	-11.21

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:79		

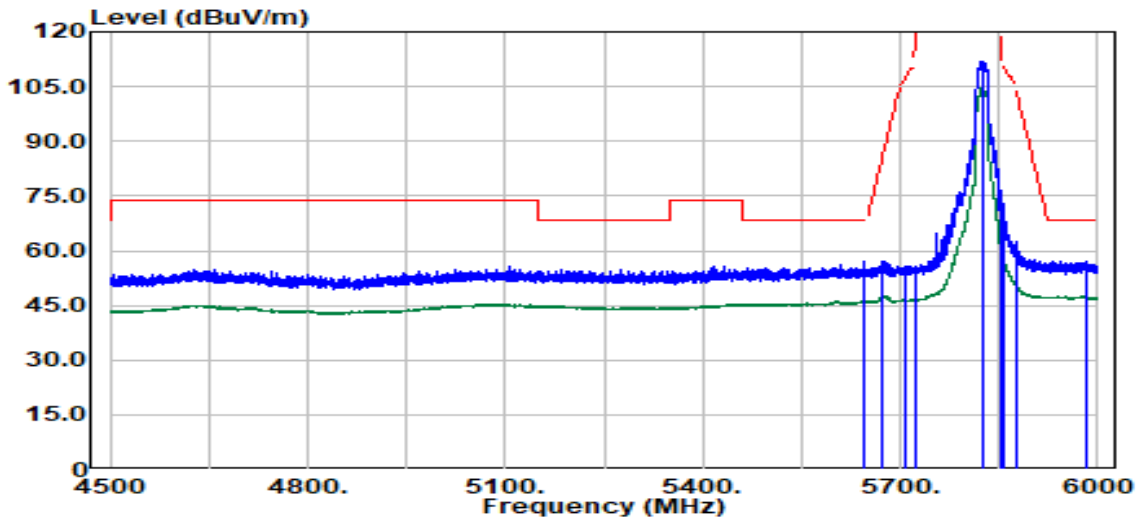


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5645.94	Peak	41.88	15.12	57.00	68.20	-11.20
5672.70	Peak	41.56	15.38	56.93	85.03	-28.10
5709.20	Peak	40.02	15.69	55.71	107.78	-52.07
5723.20	Peak	39.75	15.77	55.52	118.11	-62.58
5825.00	Peak	95.83	16.03	111.86	--	--
5825.00	Average	88.59	16.03	104.62	--	--
5851.23	Peak	60.81	15.94	76.75	119.41	-42.66
5856.23	Peak	56.84	15.94	72.78	110.46	-37.68
5875.48	Peak	46.35	15.93	62.28	104.84	-42.56
5982.50	Peak	40.96	16.12	57.07	68.20	-11.13

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n20/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :79

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

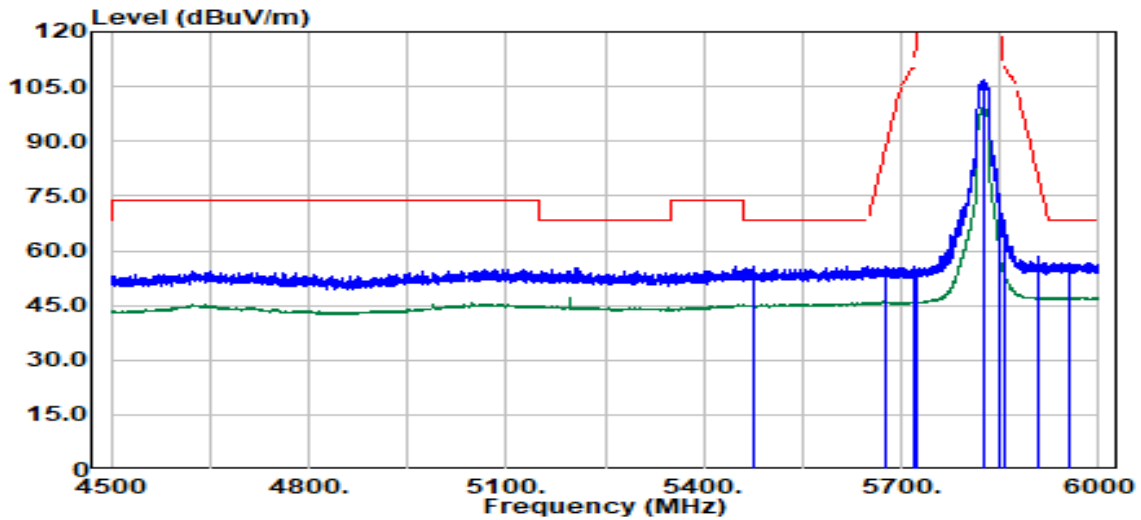


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5475.66	Peak	41.28	14.34	55.62	68.20	-12.58
5675.20	Peak	40.12	15.40	55.52	86.89	-31.37
5718.70	Peak	39.80	15.75	55.55	110.44	-54.89
5722.45	Peak	39.19	15.77	54.96	116.40	-61.44
5825.00	Peak	90.83	16.03	106.86	--	--
5825.00	Average	83.60	16.03	99.63	--	--
5850.00	Peak	55.73	15.95	71.67	122.20	-50.53
5856.48	Peak	52.31	15.94	68.25	110.39	-42.13
5909.74	Peak	42.29	15.97	58.25	79.46	-21.21
5956.74	Peak	40.52	16.15	56.67	68.20	-11.53

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11n40/Band4	Temp./Humi.	:24.6/57
Frequency	:5755 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:76		

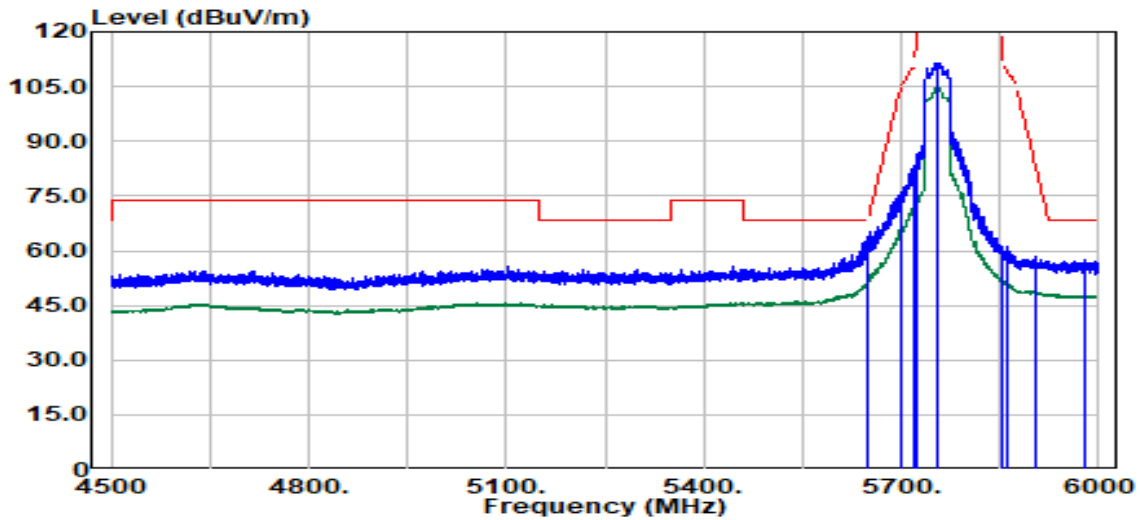


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5646.94	Peak	48.82	15.13	63.95	68.20	-4.25
5699.45	Peak	59.79	15.63	75.41	104.79	-29.38
5717.70	Peak	67.64	15.74	83.38	110.16	-26.78
5724.20	Peak	70.67	15.78	86.45	120.39	-33.93
5755.00	Peak	95.66	15.96	111.62	--	--
5755.00	Average	88.65	15.96	104.60	--	--
5852.73	Peak	45.33	15.94	61.28	115.98	-54.71
5859.73	Peak	45.17	15.94	61.11	109.47	-48.36
5902.73	Peak	42.47	15.93	58.40	84.64	-26.24
5979.25	Peak	41.18	16.12	57.30	68.20	-10.90

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :76

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber :966A

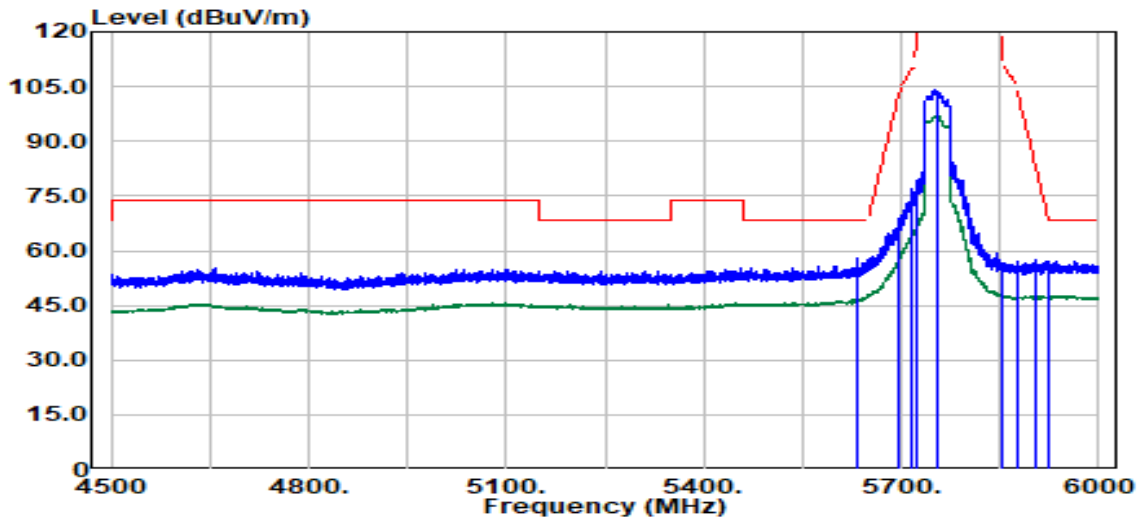


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5631.94	Peak	42.96	14.99	57.95	68.20	-10.25
5697.95	Peak	53.31	15.61	68.92	103.69	-34.77
5716.45	Peak	61.06	15.73	76.80	109.81	-33.01
5722.20	Peak	63.44	15.77	79.21	115.83	-36.62
5755.00	Peak	88.09	15.96	104.05	--	--
5755.00	Average	81.22	15.96	97.18	--	--
5853.73	Peak	40.53	15.94	56.48	113.70	-57.23
5874.98	Peak	41.28	15.93	57.21	105.21	-48.00
5903.98	Peak	41.67	15.94	57.60	83.71	-26.11
5925.74	Peak	40.91	16.05	56.96	68.20	-11.24

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11n40/Band4	Temp./Humi.	:24.6/57
Frequency	:5795 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:77		

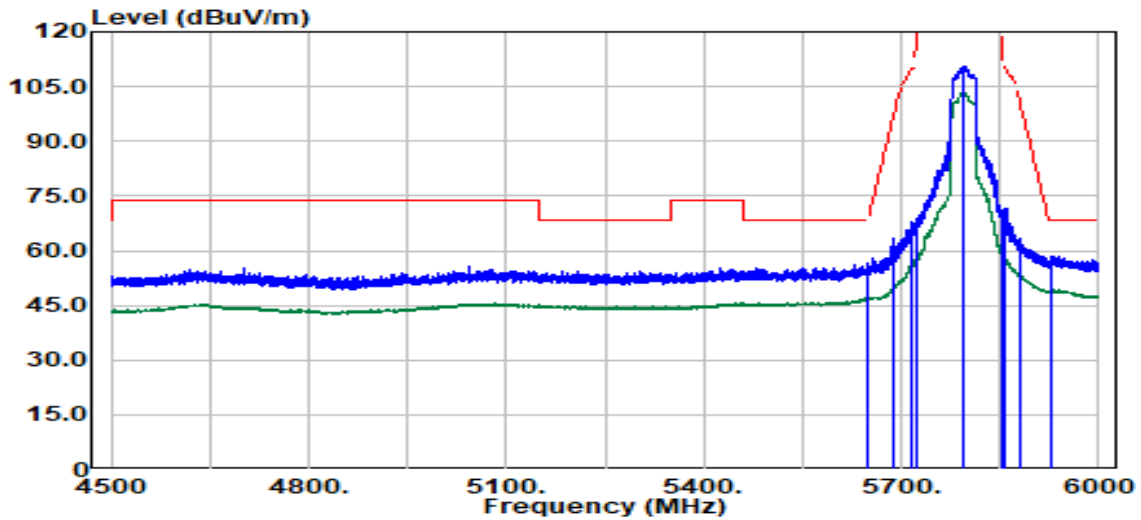


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5646.94	Peak	41.48	15.13	56.62	68.20	-11.58
5687.20	Peak	47.91	15.51	63.42	95.76	-32.34
5713.95	Peak	52.24	15.72	67.95	109.11	-41.16
5724.95	Peak	52.32	15.78	68.10	122.10	-53.99
5795.00	Peak	94.33	16.10	110.43	--	--
5795.00	Average	87.18	16.10	103.28	--	--
5852.48	Peak	55.36	15.94	71.30	116.55	-45.25
5857.48	Peak	55.73	15.94	71.67	110.11	-38.43
5879.23	Peak	47.47	15.93	63.40	102.06	-38.66
5926.24	Peak	42.27	16.05	58.32	68.20	-9.88

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :77

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

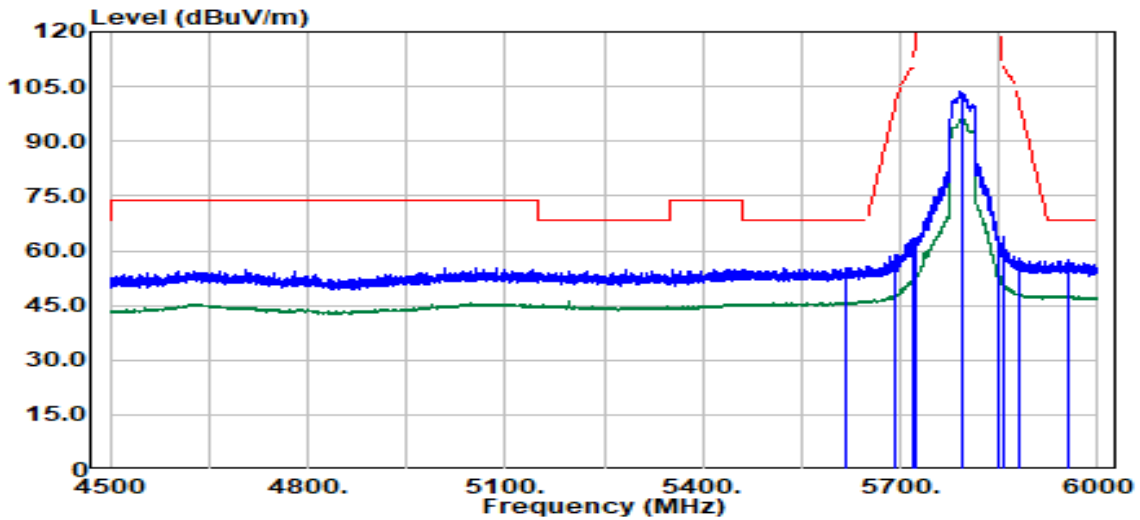


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5617.69	Peak	40.41	14.85	55.26	68.20	-12.94
5692.70	Peak	43.34	15.56	58.90	99.82	-40.91
5718.95	Peak	47.45	15.75	63.20	110.51	-47.31
5723.70	Peak	47.73	15.78	63.51	119.25	-55.73
5795.00	Peak	87.78	16.10	103.88	--	--
5795.00	Average	79.98	16.10	96.08	--	--
5850.00	Peak	47.52	15.95	63.46	122.20	-58.74
5855.48	Peak	47.77	15.94	63.71	110.67	-46.95
5880.98	Peak	42.02	15.93	57.95	100.76	-42.81
5956.99	Peak	41.46	16.15	57.61	68.20	-10.59

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band4	Temp./Humi.	:24.6/57
Frequency	:5775 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:67		

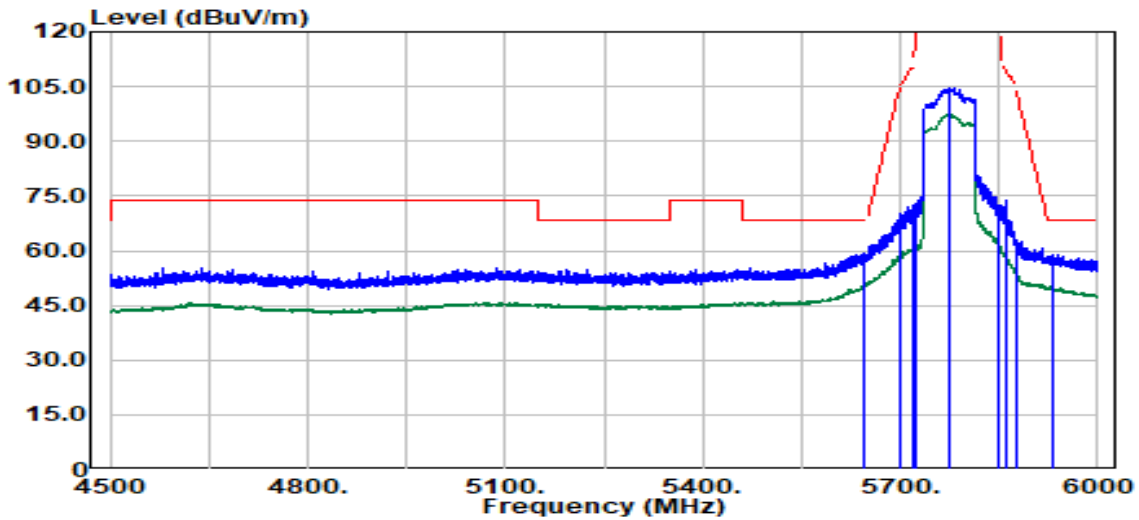


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5646.44	Peak	44.07	15.13	59.20	68.20	-9.00
5699.20	Peak	54.45	15.62	70.07	104.61	-34.54
5719.70	Peak	56.58	15.75	72.34	110.72	-38.38
5722.70	Peak	57.13	15.77	72.90	116.97	-44.07
5775.00	Peak	88.38	16.03	104.41	--	--
5775.00	Average	81.66	16.03	97.69	--	--
5850.73	Peak	55.03	15.94	70.98	120.55	-49.57
5860.23	Peak	57.79	15.94	73.73	109.33	-35.61
5875.73	Peak	47.19	15.93	63.12	104.66	-41.54
5931.99	Peak	42.83	16.08	58.91	68.20	-9.29

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11ac80/Band4
 Frequency :5775 MHz
 Operation Mode :Bandedge
 EUT Pol :E1
 Setting :67

Test Date :2024-07-17
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

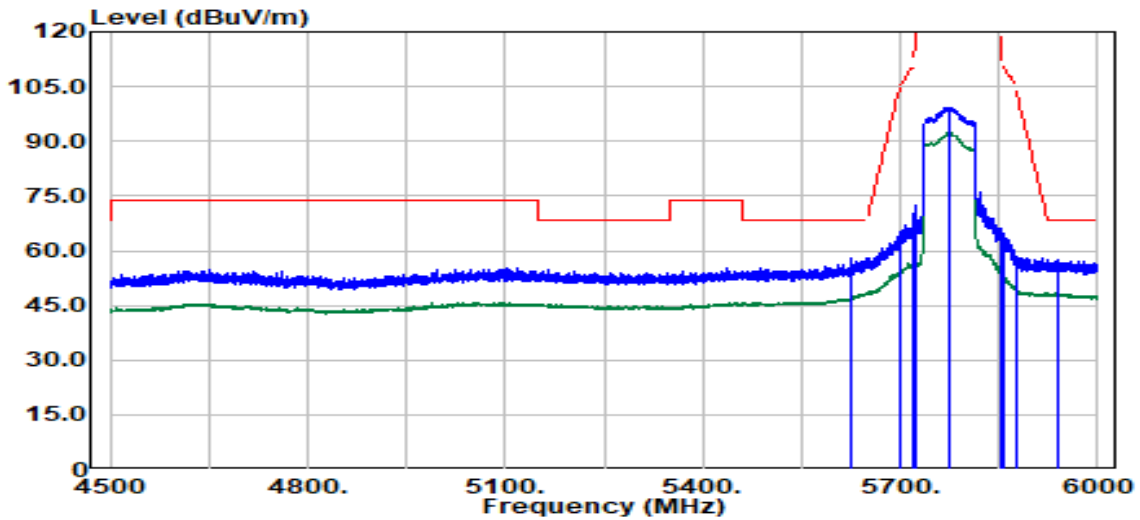


Trace: 1

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5625.69	Peak	43.03	14.92	57.95	68.20	-10.25
5698.95	Peak	49.48	15.62	65.10	104.43	-39.33
5719.20	Peak	54.23	15.75	69.97	110.58	-40.60
5724.20	Peak	56.62	15.78	72.40	120.39	-47.99
5775.00	Peak	83.23	16.03	99.26	--	--
5775.00	Average	76.23	16.03	92.26	--	--
5852.23	Peak	50.01	15.94	65.95	117.12	-51.17
5855.73	Peak	48.71	15.94	64.65	110.60	-45.95
5876.48	Peak	42.70	15.93	58.63	104.10	-45.47
5940.49	Peak	41.53	16.12	57.65	68.20	-10.55

Report No.: TMWK2407002220KR

TX Test Data

Project No.	:TM-2407000112P	Test Date	:2024-07-30
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.6/57
Frequency	:5190 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:		

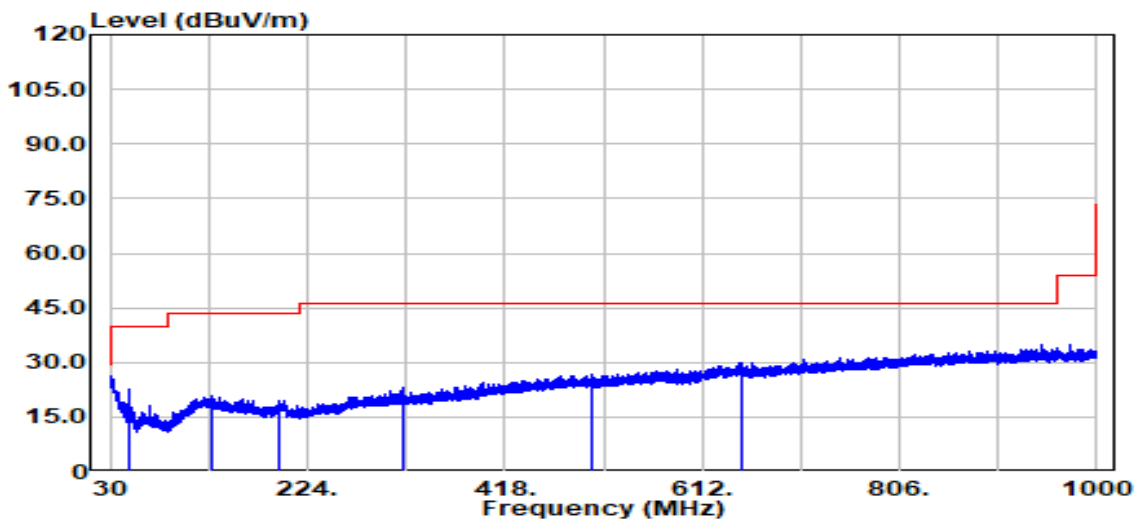


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
49.10	Peak	37.90	-15.13	22.77	40.00	-17.23
129.60	Peak	29.83	-9.14	20.69	43.50	-22.81
196.90	Peak	29.54	-9.96	19.58	43.50	-23.92
317.40	Peak	31.02	-8.06	22.96	46.00	-23.04
503.60	Peak	29.89	-3.33	26.56	46.00	-19.44
650.90	Peak	30.37	-0.42	29.96	46.00	-16.04

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band1
 Frequency :5190 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :


Test Date :2024-07-30
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

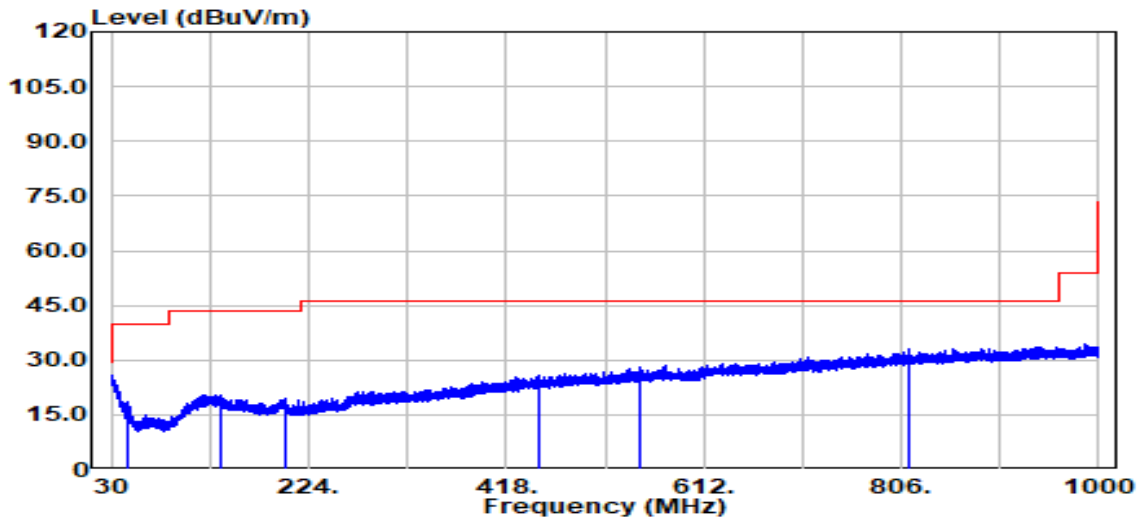

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
46.80	Peak	32.76	-14.30	18.45	40.00	-21.55
138.70	Peak	30.34	-9.81	20.53	43.50	-22.97
200.90	Peak	29.20	-9.92	19.28	43.50	-24.22
450.00	Peak	30.21	-4.30	25.91	46.00	-20.09
550.10	Peak	30.66	-2.52	28.14	46.00	-17.86
814.10	Peak	30.67	2.27	32.94	46.00	-13.06

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/57
Frequency	:5180 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:49		

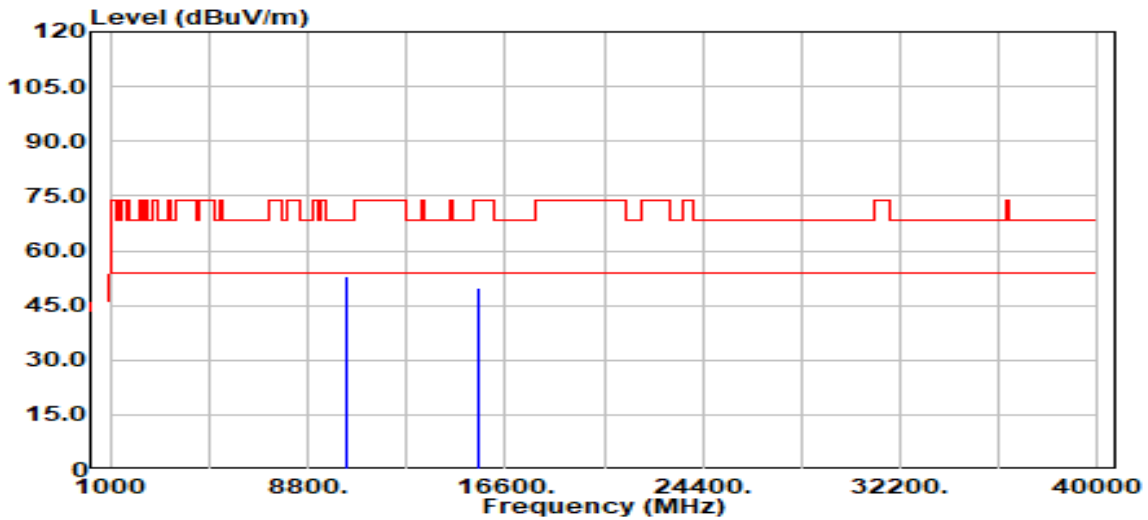

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10360.00	Peak	40.22	12.85	53.07	68.20	-15.13
15540.00	Peak	35.06	14.87	49.94	74.00	-24.06
15540.00	Average	26.63	14.87	41.50	54.00	-12.50

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/57
Frequency	:5180 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:49		

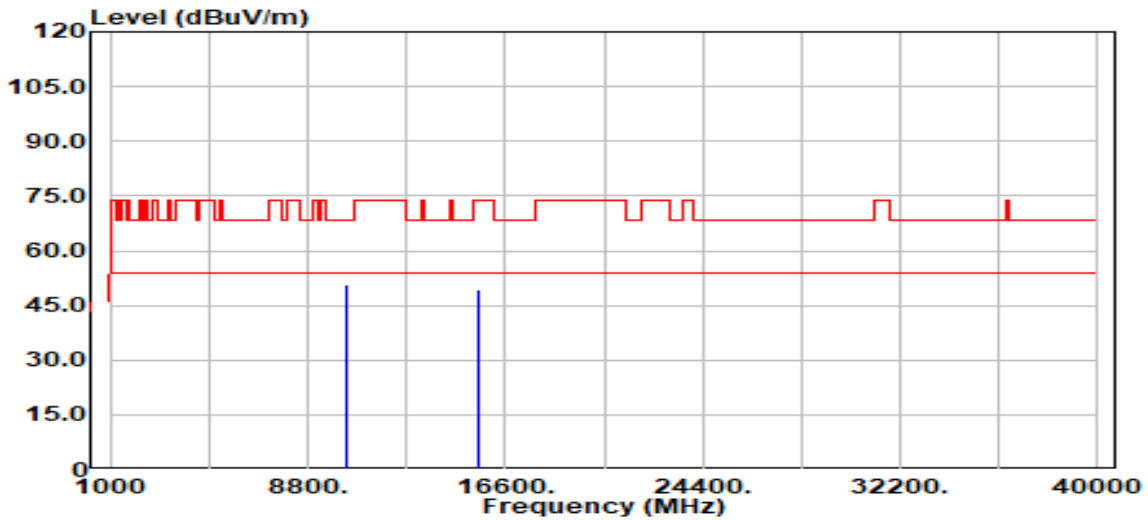

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10360.00	Peak	37.81	12.85	50.65	68.20	-17.55
15540.00	Peak	34.59	14.87	49.46	74.00	-24.54
15540.00	Average	26.71	14.87	41.58	54.00	-12.42

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/57
Frequency	:5220 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

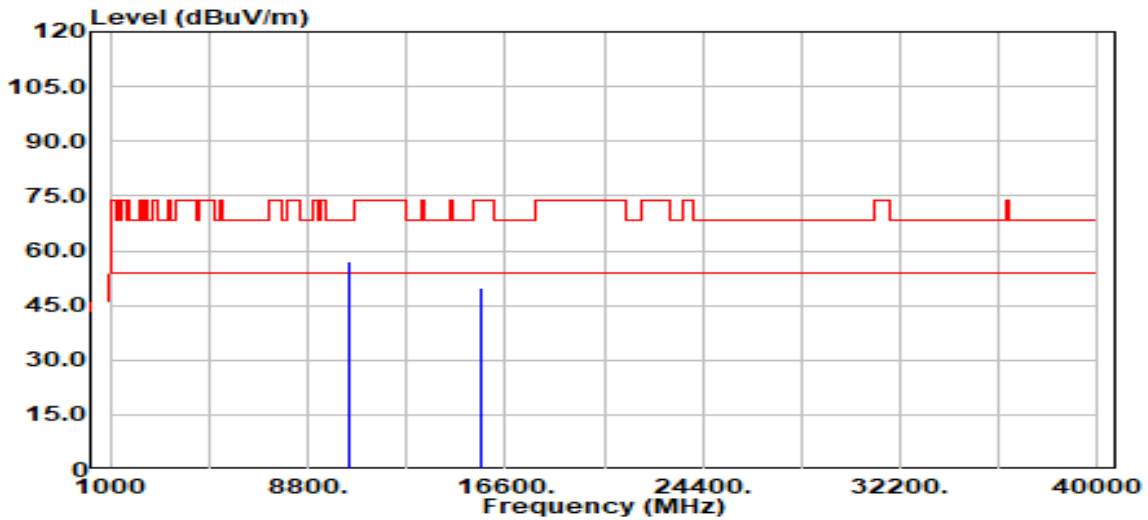

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10440.00	Peak	44.37	12.85	57.22	68.20	-10.98
15660.00	Peak	34.30	15.46	49.76	74.00	-24.24
15660.00	Average	26.47	15.46	41.93	54.00	-12.07

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/57
Frequency	:5220 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

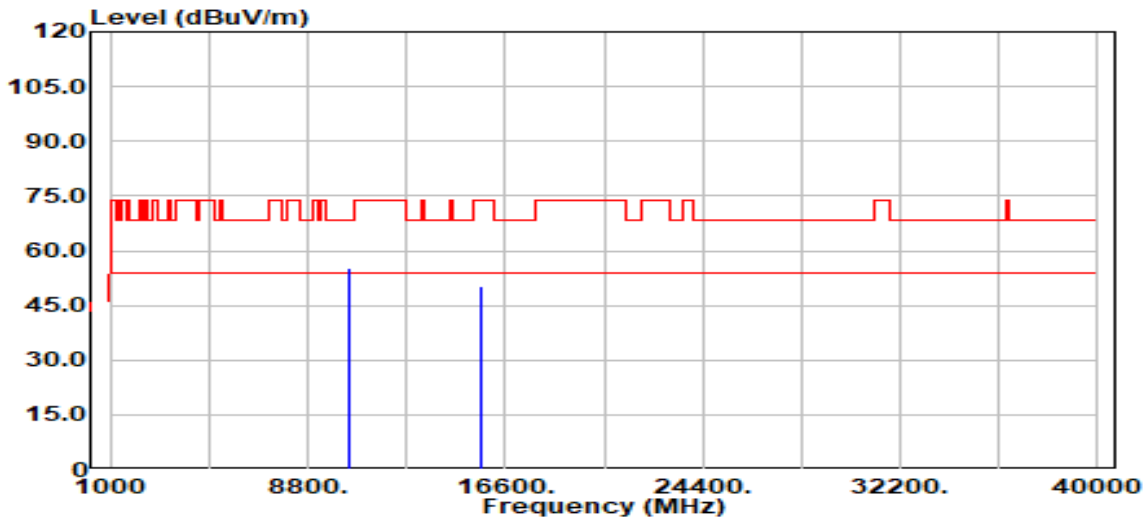

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10440.00	Peak	42.32	12.85	55.17	68.20	-13.03
15660.00	Peak	35.03	15.46	50.49	74.00	-23.51
15660.00	Average	28.39	15.46	43.85	54.00	-10.15

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/57
Frequency	:5240 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

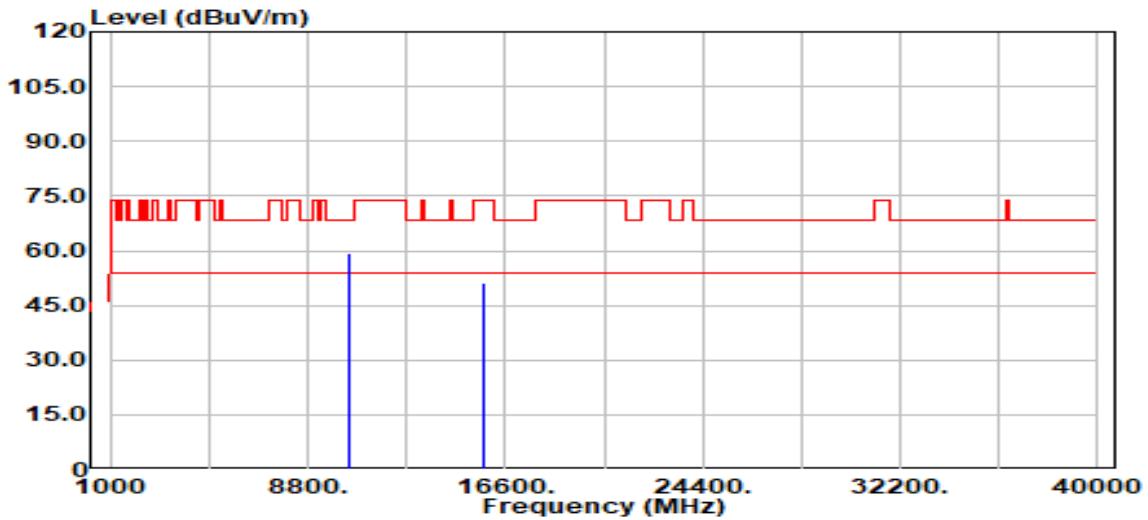

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10480.00	Peak	46.55	12.72	59.27	68.20	-8.93
15720.00	Peak	35.26	15.73	50.98	74.00	-23.02
15720.00	Average	29.01	15.73	44.74	54.00	-9.26

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band1	Temp./Humi.	:24.6/57
Frequency	:5240 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

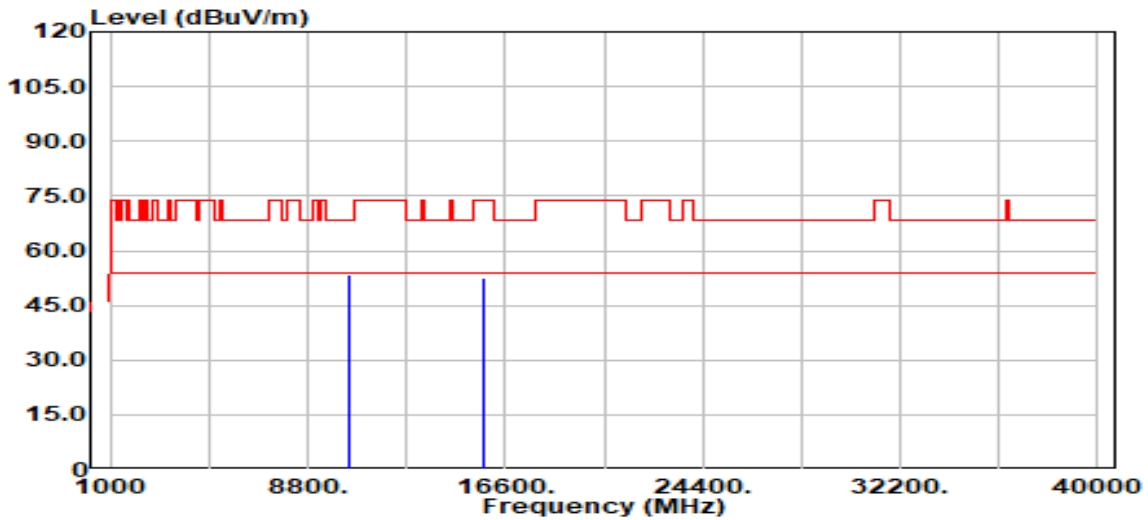

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10480.00	Peak	40.55	12.72	53.27	68.20	-14.93
15720.00	Peak	36.68	15.73	52.40	74.00	-21.60
15720.00	Average	28.28	15.73	44.00	54.00	-10.00

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.6/57
Frequency	:5180 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:54		

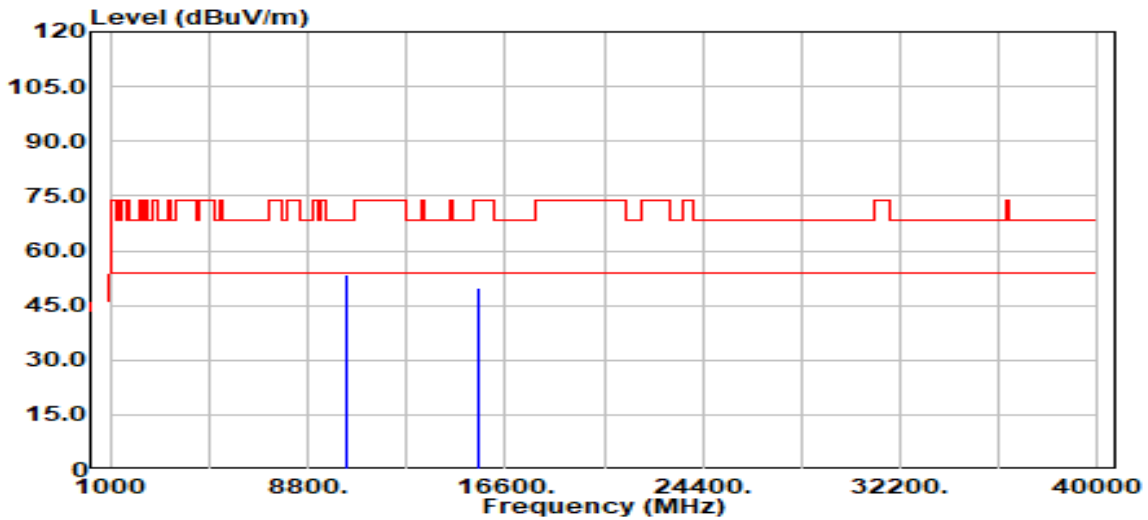

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10360.00	Peak	40.36	12.85	53.21	68.20	-14.99
15540.00	Peak	34.99	14.87	49.86	74.00	-24.14
15540.00	Average	26.78	14.87	41.66	54.00	-12.34

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.6/57
Frequency	:5180 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:54		

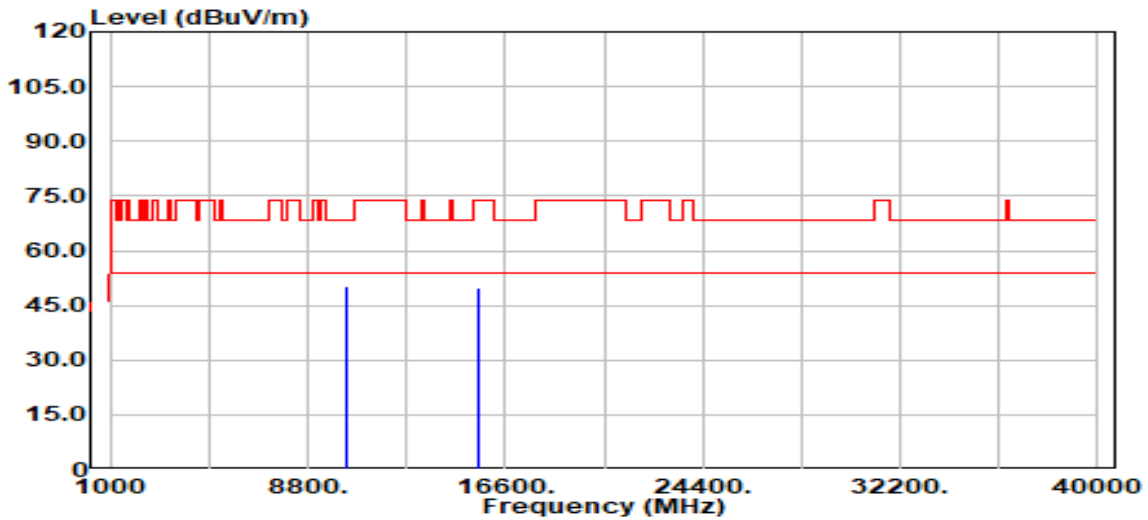

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10360.00	Peak	37.55	12.85	50.39	68.20	-17.81
15540.00	Peak	34.77	14.87	49.64	74.00	-24.36
15540.00	Average	27.05	14.87	41.92	54.00	-12.08

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.6/57
Frequency	:5220 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

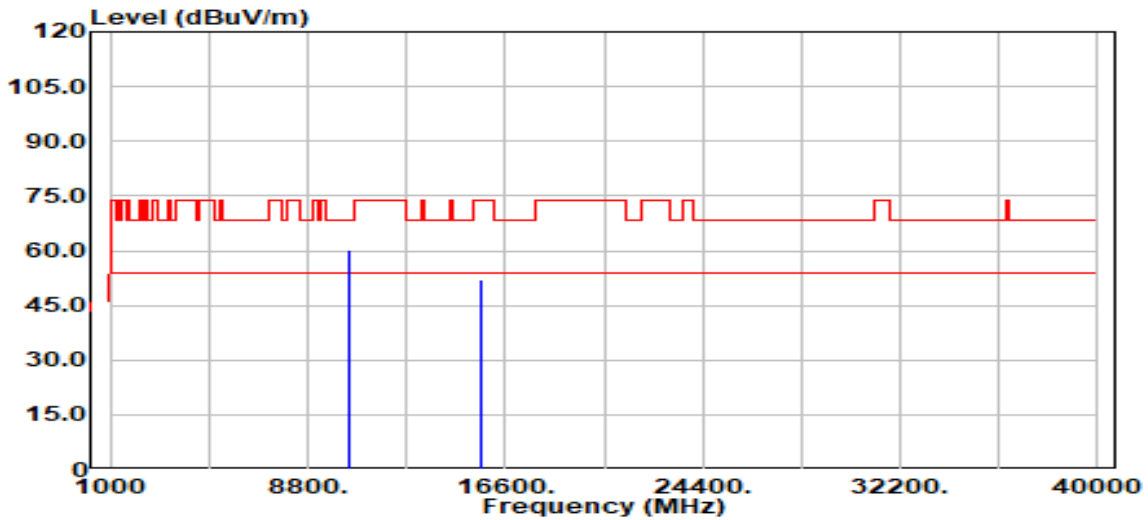

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10440.00	Peak	47.56	12.85	60.41	68.20	-7.79
15660.00	Peak	36.42	15.46	51.88	74.00	-22.12
15660.00	Average	30.29	15.46	45.75	54.00	-8.25

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.6/57
Frequency	:5220 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

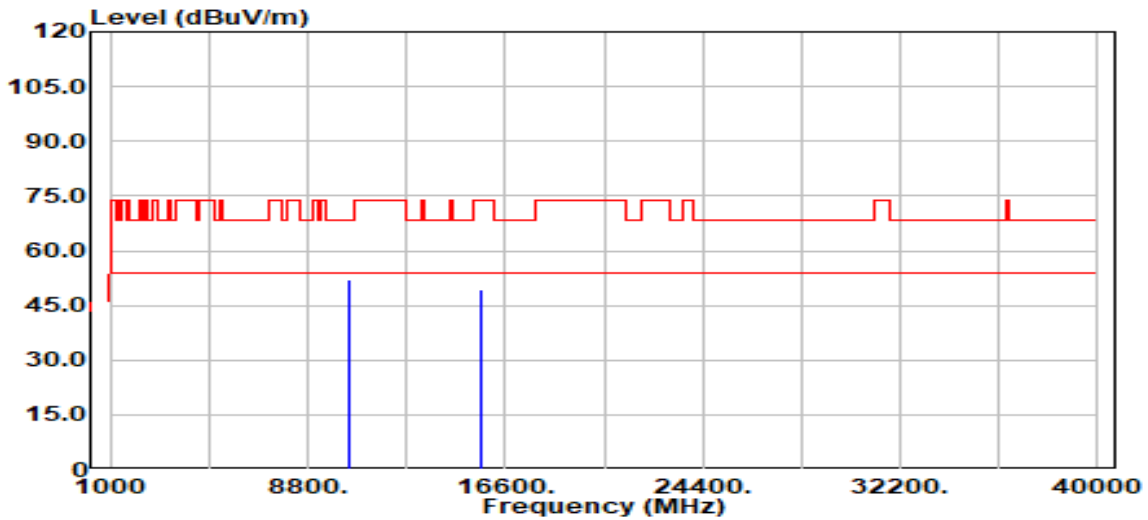

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10440.00	Peak	39.11	12.85	51.96	68.20	-16.24
15660.00	Peak	33.78	15.46	49.24	74.00	-24.76
15660.00	Average	27.01	15.46	42.47	54.00	-11.53

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.6/57
Frequency	:5240 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

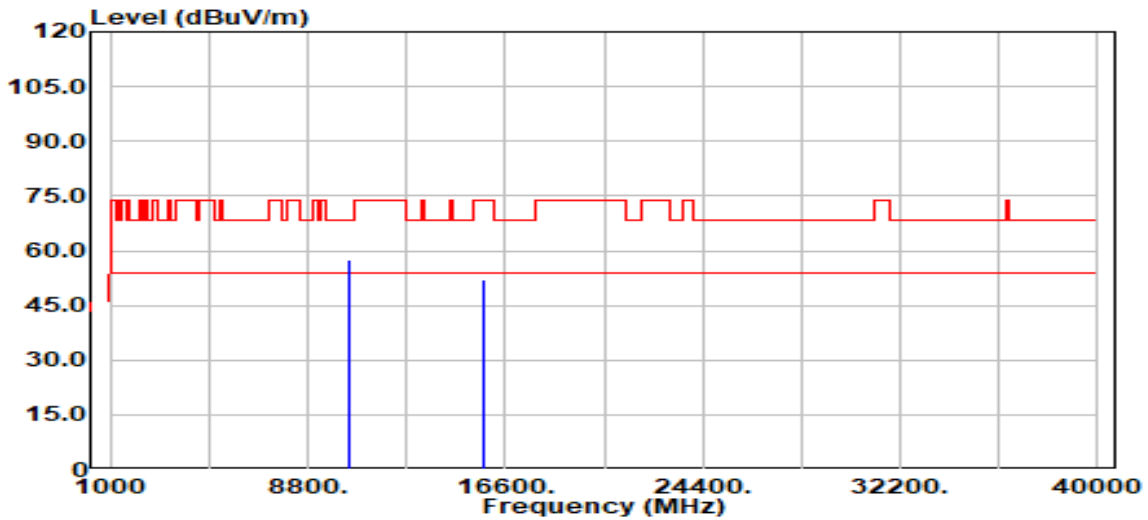

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10480.00	Peak	44.74	12.72	57.46	68.20	-10.74
15720.00	Peak	36.17	15.73	51.90	74.00	-22.10
15720.00	Average	28.07	15.73	43.79	54.00	-10.21

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band1	Temp./Humi.	:24.6/57
Frequency	:5240 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

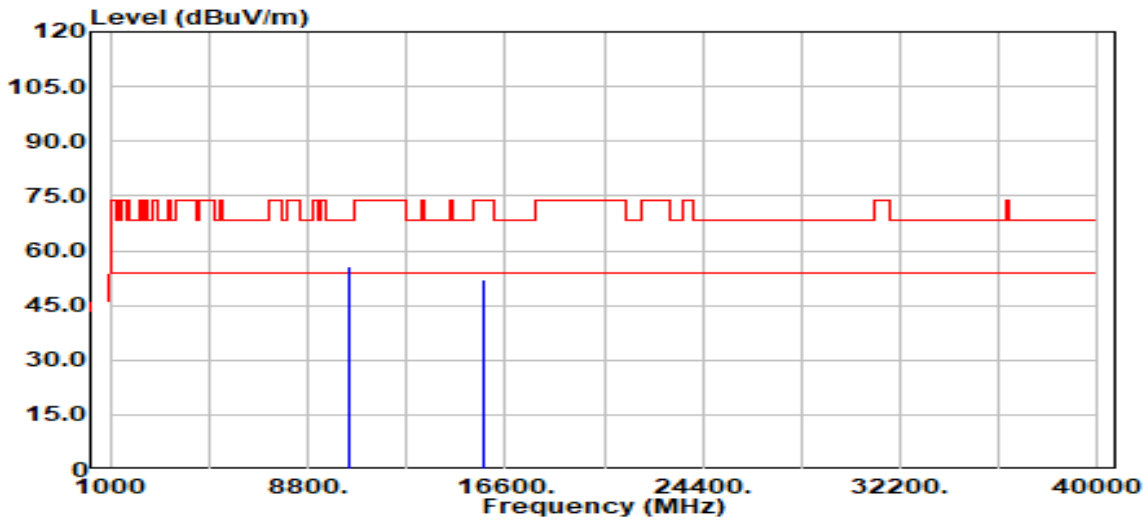

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10480.00	Peak	42.86	12.72	55.58	68.20	-12.62
15720.00	Peak	36.38	15.73	52.11	74.00	-21.89
15720.00	Average	28.37	15.73	44.10	54.00	-9.90

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.6/57
Frequency	:5190 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:46		

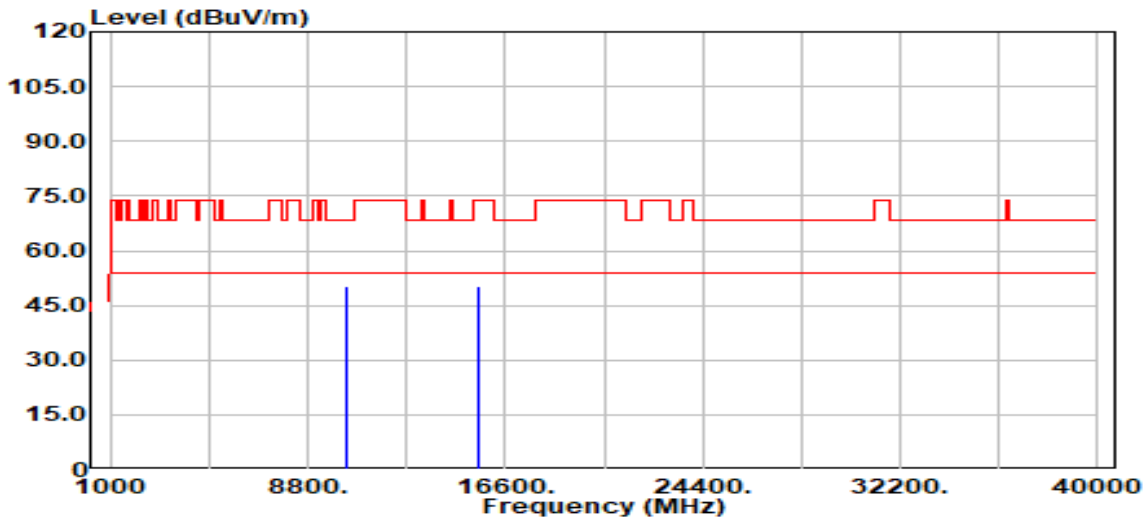

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10380.00	Peak	37.13	12.91	50.04	68.20	-18.16
15570.00	Peak	35.19	15.12	50.31	74.00	-23.69
15570.00	Average	26.19	15.12	41.31	54.00	-12.69

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.6/57
Frequency	:5190 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:46		

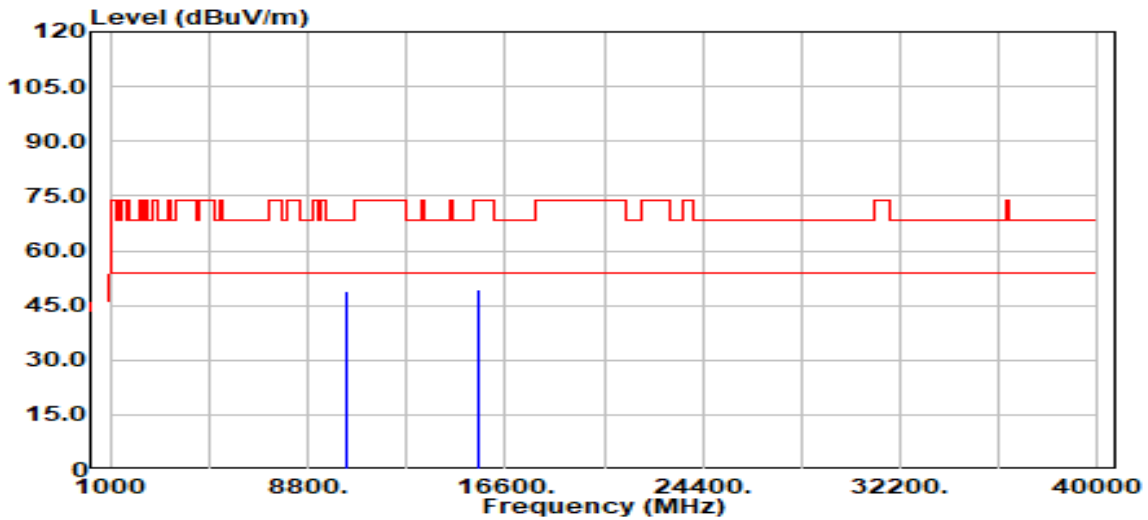

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10380.00	Peak	36.15	12.91	49.07	68.20	-19.13
15570.00	Peak	34.07	15.12	49.19	74.00	-24.81
15570.00	Average	26.03	15.12	41.15	54.00	-12.85

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.6/57
Frequency	:5230 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

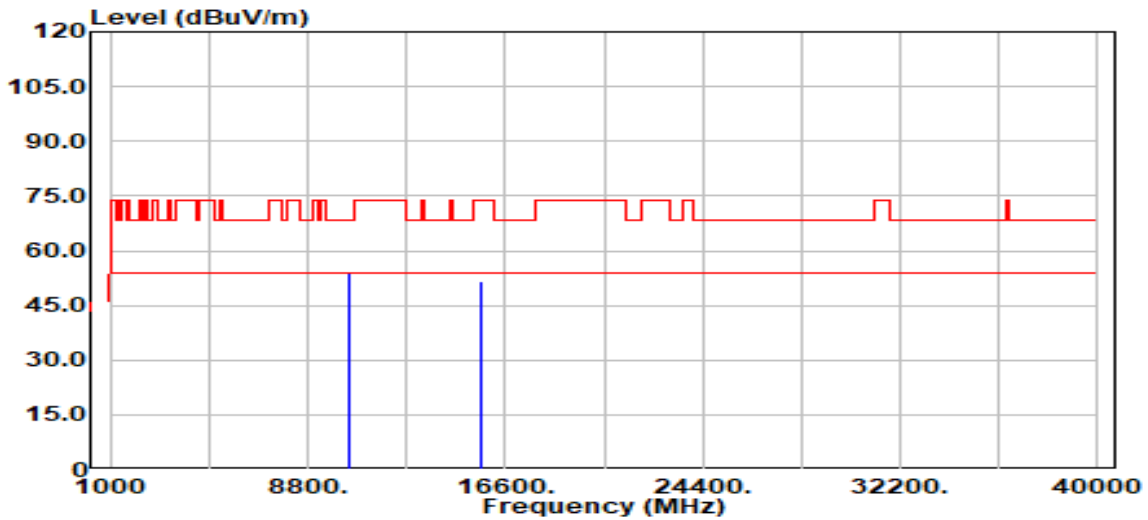

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10460.00	Peak	40.90	12.78	53.68	68.20	-14.52
15690.00	Peak	36.42	15.42	51.84	74.00	-22.16
15690.00	Average	27.82	15.42	43.24	54.00	-10.76

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n40/Band1	Temp./Humi.	:24.6/57
Frequency	:5230 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

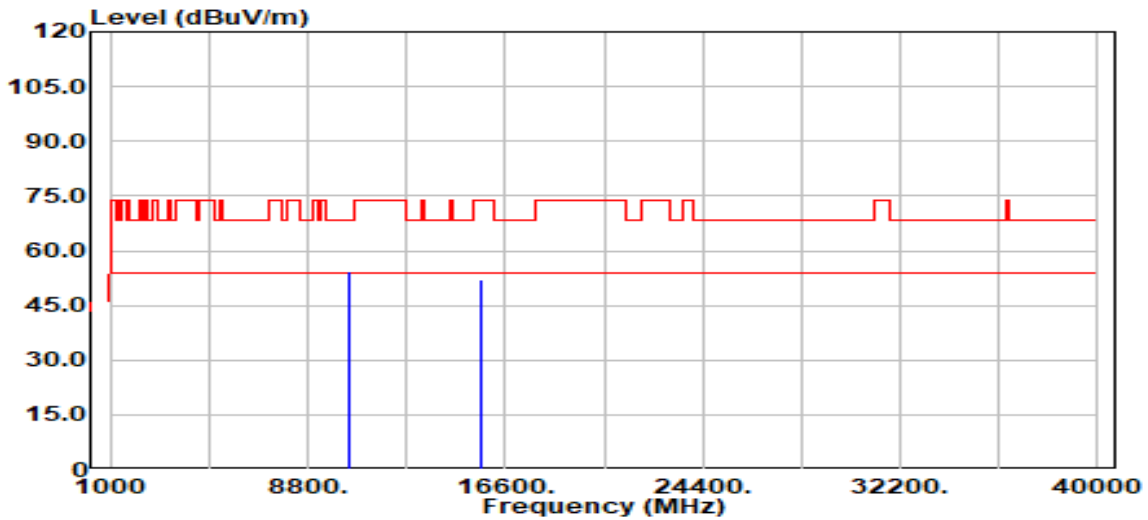

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10460.00	Peak	41.56	12.78	54.34	68.20	-13.86
15690.00	Peak	36.48	15.42	51.89	74.00	-22.11
15690.00	Average	27.96	15.42	43.38	54.00	-10.62

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.6/57
Frequency	:5210 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:41		

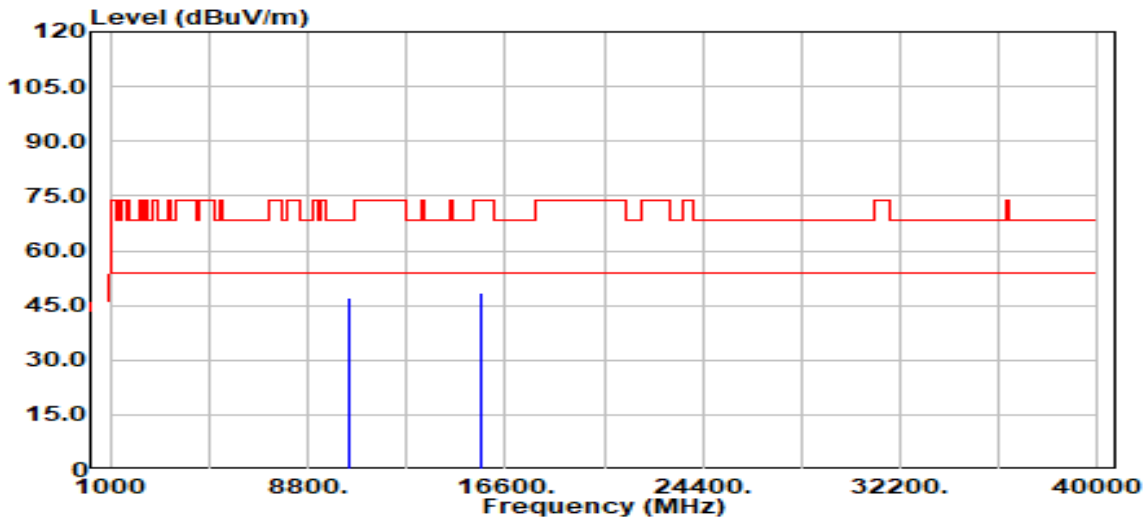

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10420.00	Peak	34.27	12.91	47.18	68.20	-21.02
15630.00	Peak	33.19	15.41	48.60	74.00	-25.40
15630.00	Average	25.86	15.41	41.27	54.00	-12.73

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band1	Temp./Humi.	:24.6/57
Frequency	:5210 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:41		

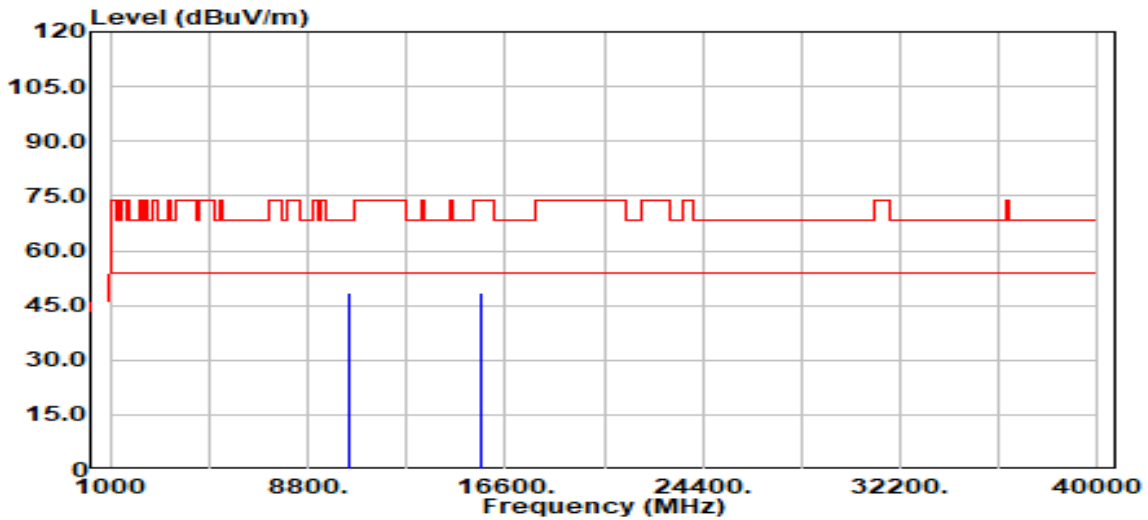

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10420.00	Peak	35.58	12.91	48.49	68.20	-19.71
15630.00	Peak	33.08	15.41	48.49	74.00	-25.51
15630.00	Average	25.83	15.41	41.25	54.00	-12.75

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-30
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:H	Test Chamber	: 966A
Setting	:		

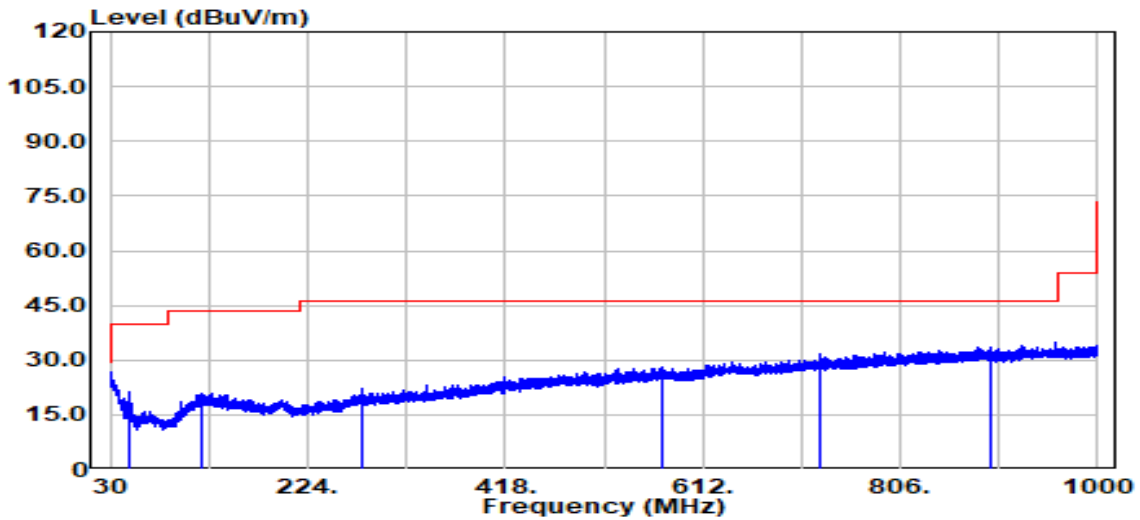


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
49.00	Peak	36.43	-15.10	21.33	40.00	-18.67
119.20	Peak	30.23	-9.32	20.91	43.50	-22.59
277.00	Peak	30.83	-8.71	22.12	46.00	-23.88
573.40	Peak	30.26	-1.99	28.26	46.00	-17.74
728.10	Peak	31.01	0.78	31.79	46.00	-14.21
894.70	Peak	30.50	3.04	33.55	46.00	-12.45

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11a/Band2
 Frequency :5320 MHz
 Operation Mode :TX
 EUT Pol :H
 Setting :


Test Date :2024-07-30
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

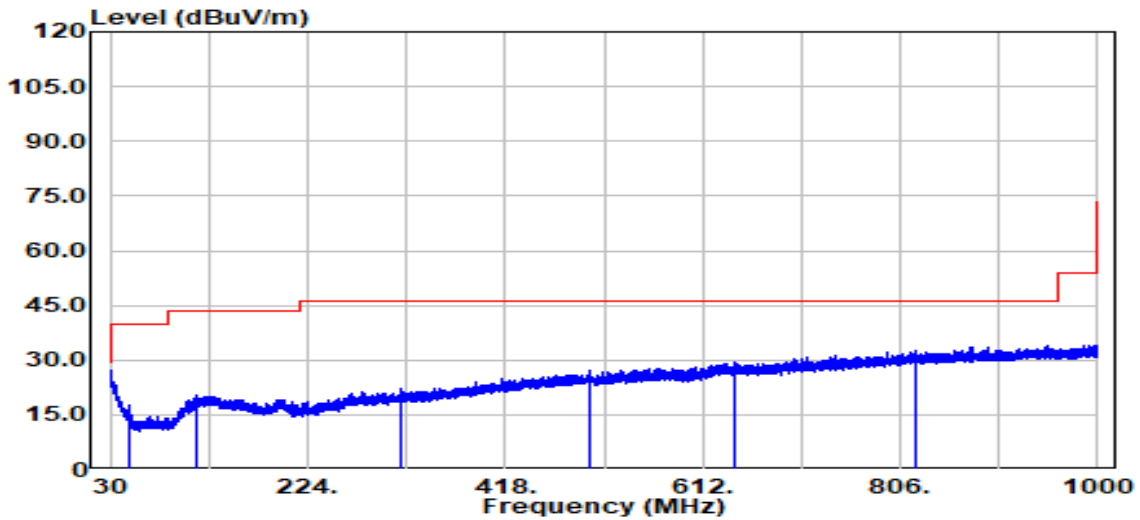

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
49.10	Peak	32.86	-15.13	17.73	40.00	-22.27
115.20	Peak	29.90	-9.69	20.21	43.50	-23.29
315.00	Peak	30.30	-8.03	22.27	46.00	-23.73
499.80	Peak	30.50	-3.31	27.19	46.00	-18.81
643.20	Peak	29.71	-0.34	29.37	46.00	-16.63
821.90	Peak	30.14	2.50	32.64	46.00	-13.36

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

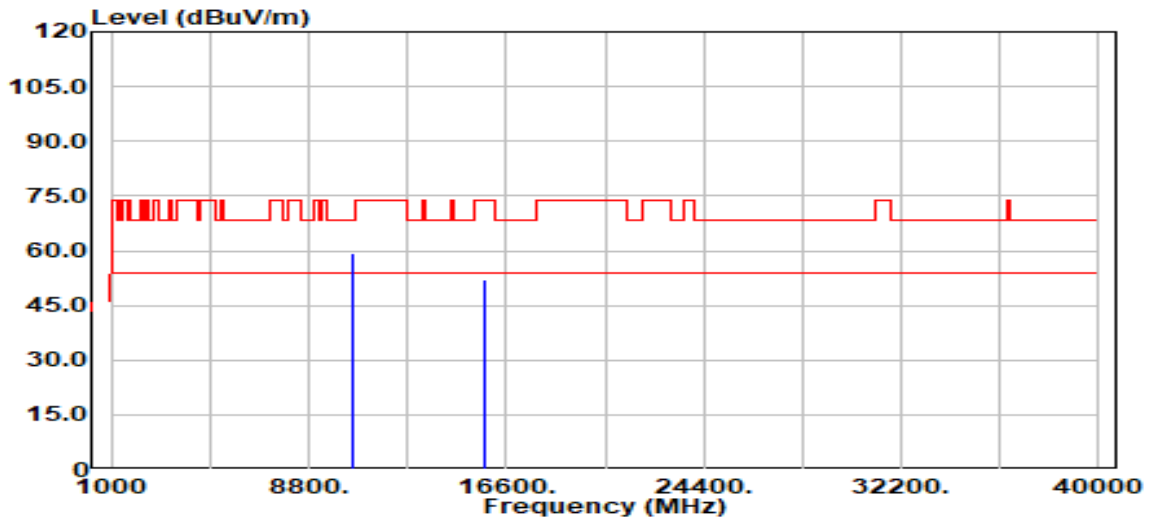

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10520.00	Peak	46.76	12.78	59.54	68.20	-8.66
15780.00	Peak	36.10	16.08	52.17	74.00	-21.83
15780.00	Average	29.00	16.08	45.08	54.00	-8.92

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

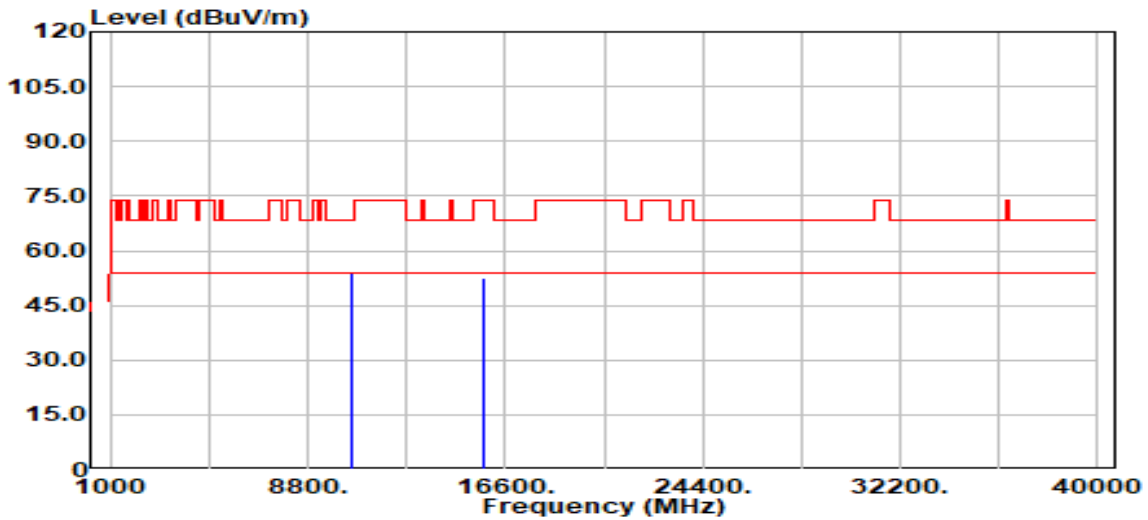

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10520.00	Peak	41.21	12.78	54.00	68.20	-14.20
15780.00	Peak	36.24	16.08	52.31	74.00	-21.69
15780.00	Average	28.39	16.08	44.46	54.00	-9.54

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5300 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

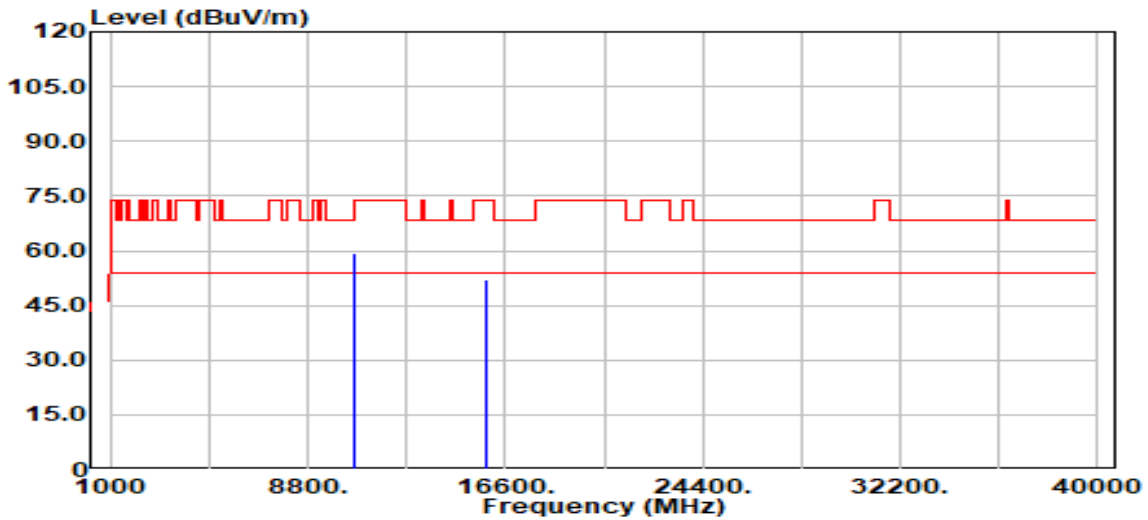

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10600.00	Peak	46.26	12.96	59.22	68.20	-8.98
15900.00	Peak	36.03	16.19	52.22	74.00	-21.78
15900.00	Average	28.82	16.19	45.01	54.00	-8.99

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5300 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

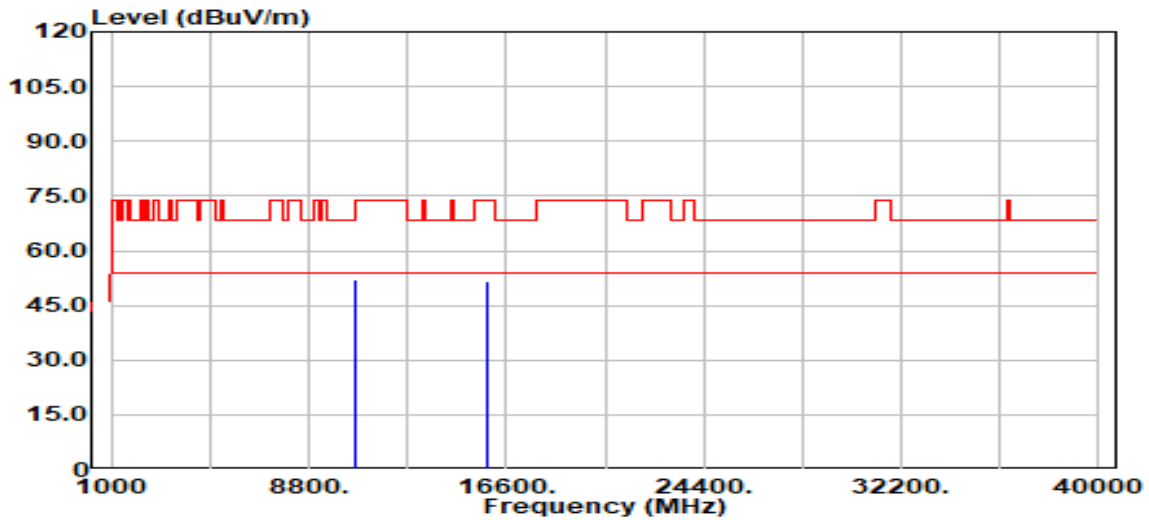

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10600.00	Peak	38.97	12.96	51.93	68.20	-16.27
15900.00	Peak	35.53	16.19	51.72	74.00	-22.28
15900.00	Average	28.24	16.19	44.43	54.00	-9.57

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:50		

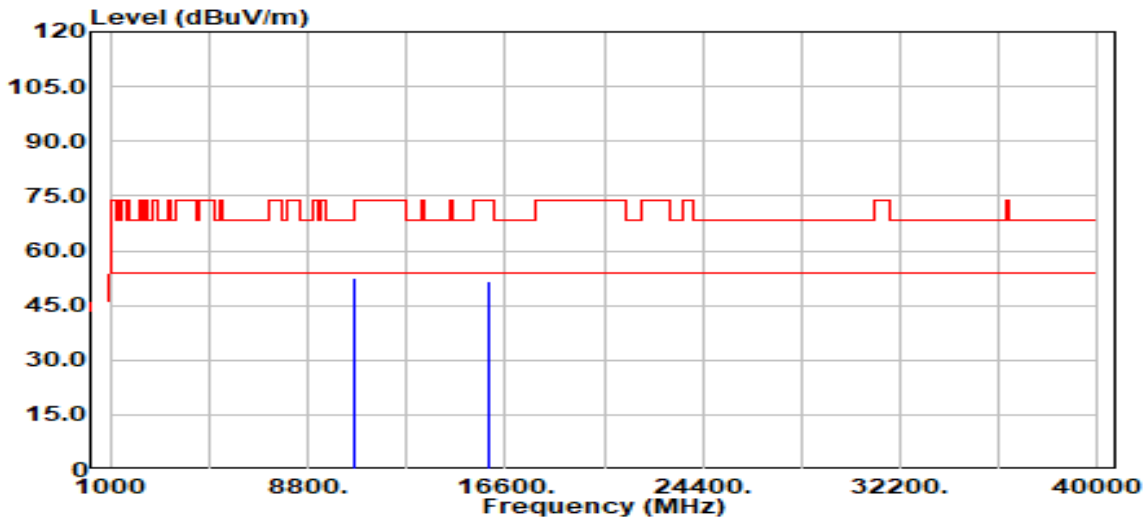

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10640.00	Peak	39.46	13.04	52.50	74.00	-21.50
10640.00	Average	35.26	13.04	48.30	54.00	-5.70
15960.00	Peak	34.41	17.41	51.82	74.00	-22.18
15960.00	Average	26.78	17.41	44.19	54.00	-9.81

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:50		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10640.00	Peak	35.28	13.04	48.32	74.00	-25.68
10640.00	Average	29.06	13.04	42.11	54.00	-11.89
15960.00	Peak	34.20	17.41	51.61	74.00	-22.39
15960.00	Average	26.71	17.41	44.12	54.00	-9.88

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

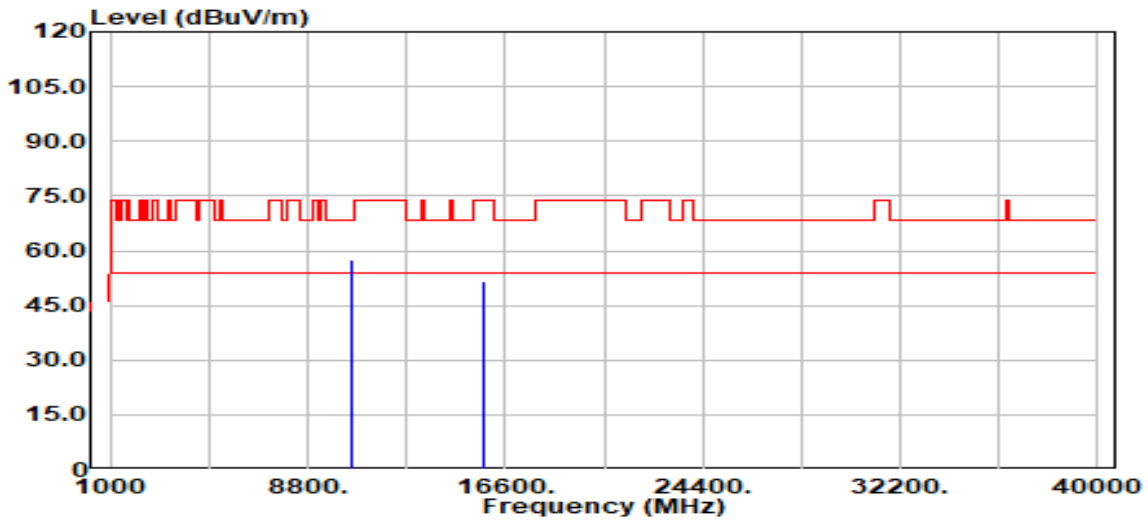

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10520.00	Peak	44.53	12.78	57.31	68.20	-10.89
15780.00	Peak	35.67	16.08	51.74	74.00	-22.26
15780.00	Average	28.70	16.08	44.78	54.00	-9.22

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

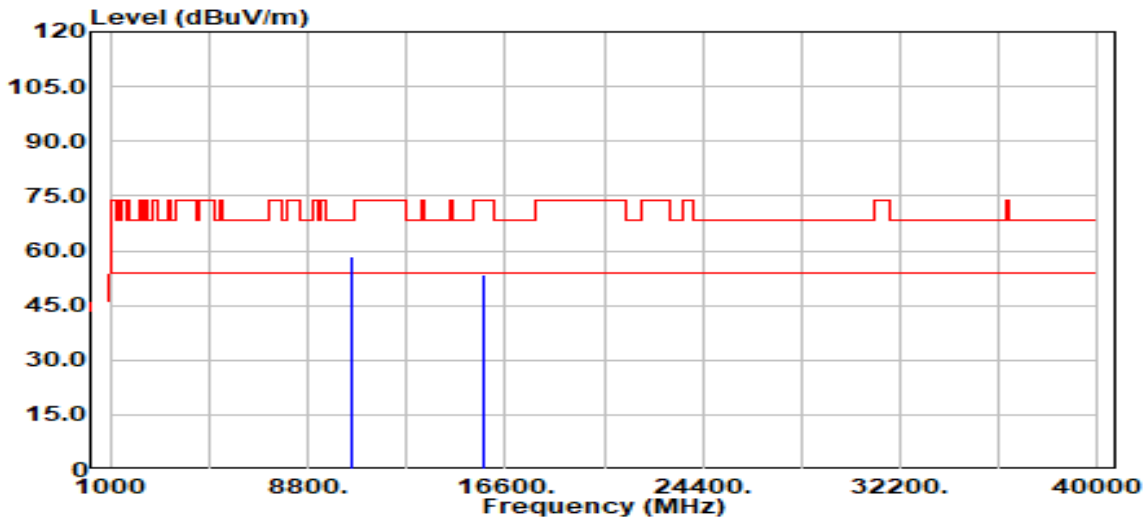

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10520.00	Peak	45.56	12.78	58.34	68.20	-9.86
15780.00	Peak	37.46	16.08	53.54	74.00	-20.46
15780.00	Average	28.75	16.08	44.82	54.00	-9.18

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5300 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

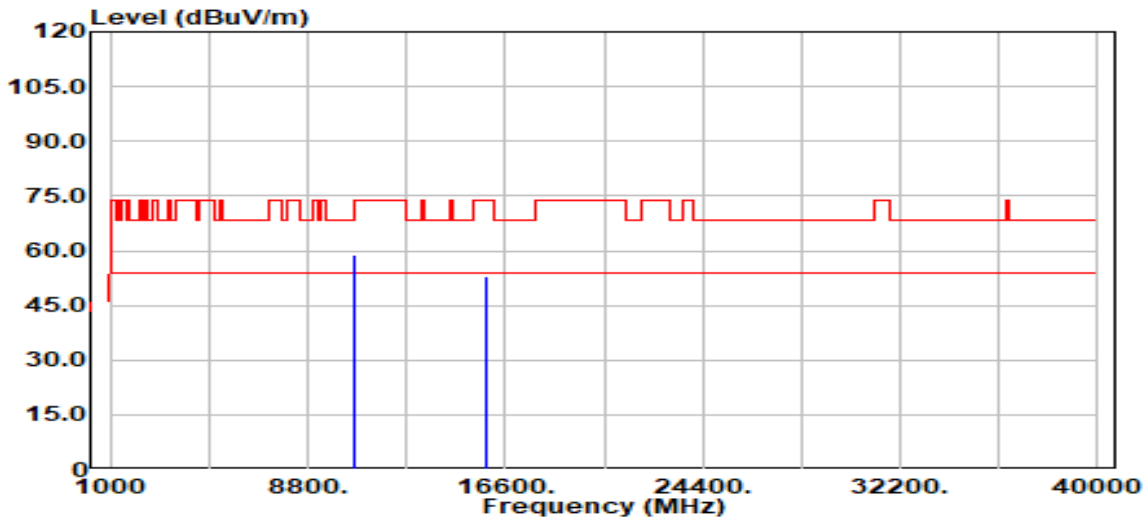

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10600.00	Peak	45.83	12.96	58.79	68.20	-9.41
15900.00	Peak	36.81	16.19	53.00	74.00	-21.00
15900.00	Average	30.05	16.19	46.24	54.00	-7.76

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5300 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:73		

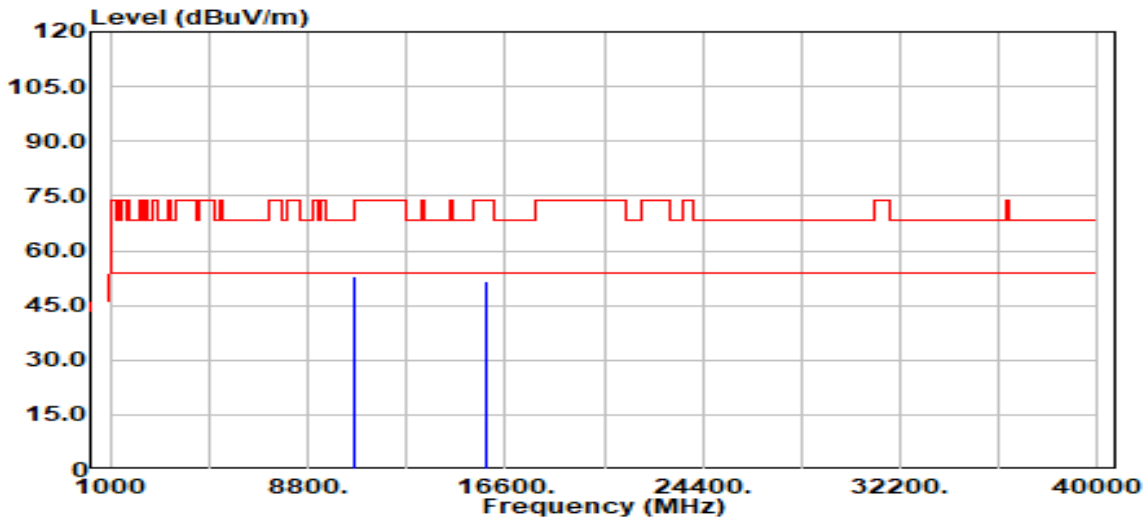

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10600.00	Peak	39.89	12.96	52.85	68.20	-15.35
15900.00	Peak	35.32	16.19	51.51	74.00	-22.49
15900.00	Average	27.65	16.19	43.84	54.00	-10.16

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:58		

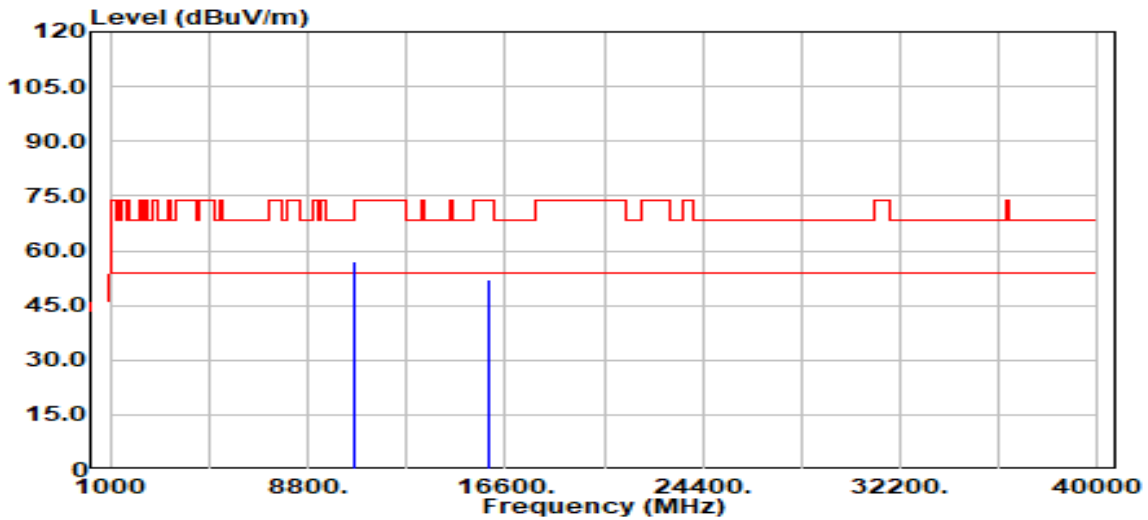

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10640.00	Peak	44.09	13.04	57.13	74.00	-16.87
10640.00	Average	37.41	13.04	50.45	54.00	-3.55
15960.00	Peak	34.83	17.41	52.23	74.00	-21.77
15960.00	Average	27.14	17.41	44.55	54.00	-9.45

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:58		

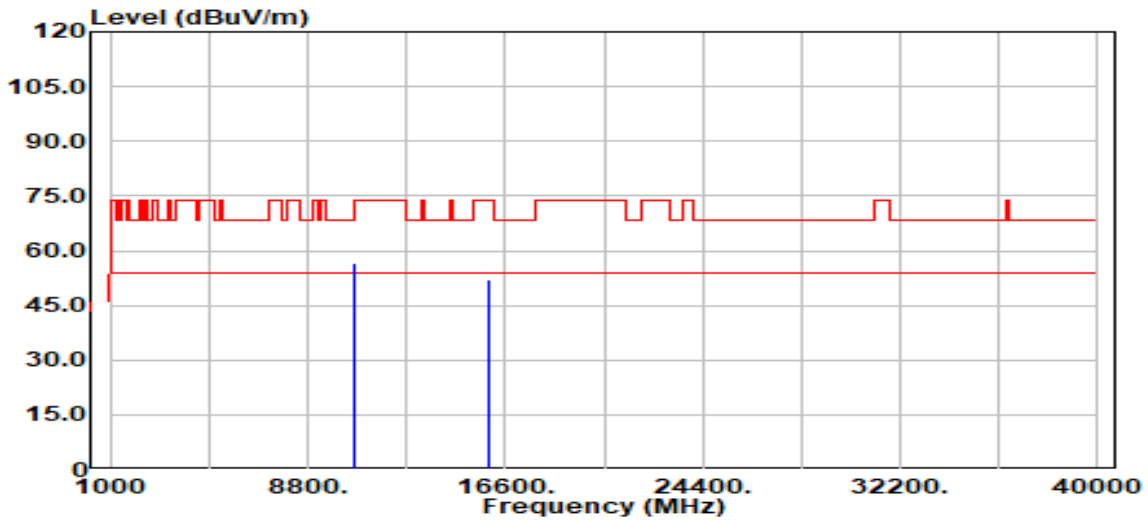

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10640.00	Peak	43.71	13.04	56.75	74.00	-17.25
10640.00	Average	33.05	13.04	46.09	54.00	-7.91
15960.00	Peak	34.54	17.41	51.95	74.00	-22.05
15960.00	Average	27.18	17.41	44.59	54.00	-9.41

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-20
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.6/57
Frequency	:5270 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:74		

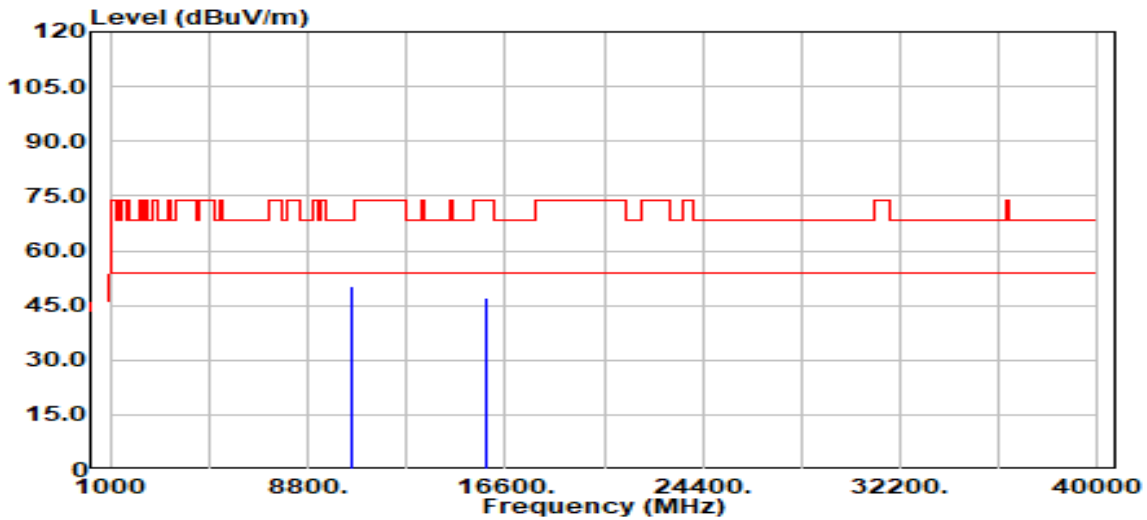


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10540.00	Peak	37.48	12.90	50.39	68.20	-17.81
15810.00	Peak	31.06	15.96	47.02	74.00	-26.98
15810.00	Average	22.67	15.96	38.63	54.00	-15.37

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band2
 Frequency :5270 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :74


Test Date :2024-07-20
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

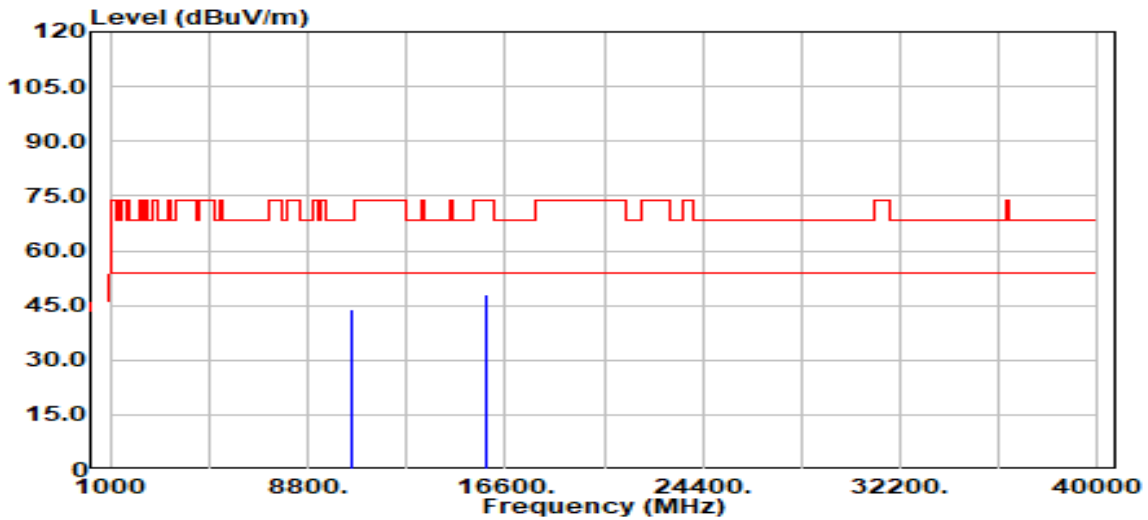

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10540.00	Peak	30.93	12.90	43.83	68.20	-24.37
15810.00	Peak	32.06	15.96	48.02	74.00	-25.98
15810.00	Average	22.87	15.96	38.83	54.00	-15.17

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-20
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.6/57
Frequency	:5310 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:56		

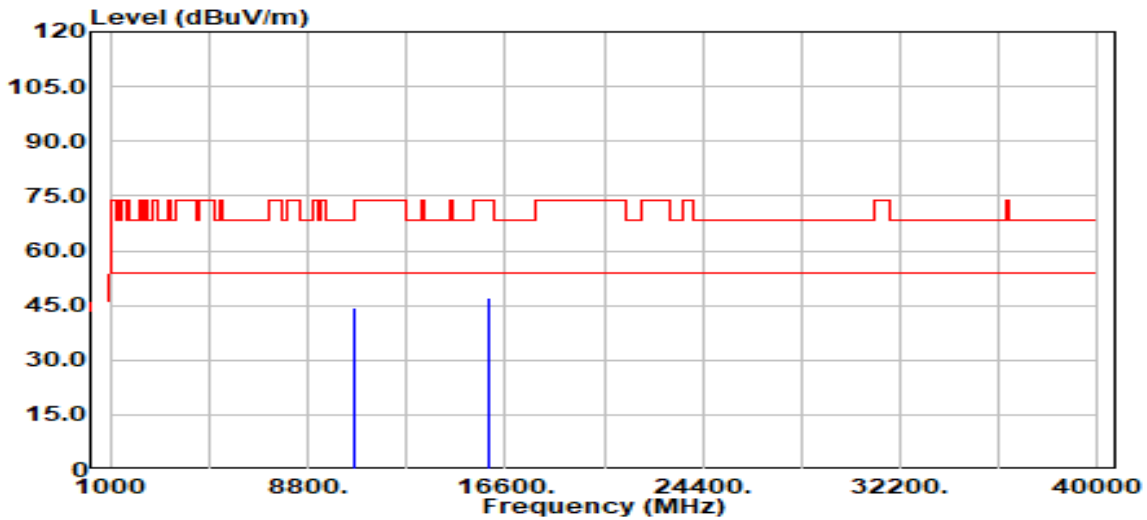


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10620.00	Peak	31.40	13.00	44.40	74.00	-29.60
10620.00	Average	27.34	13.00	40.34	54.00	-13.66
15930.00	Peak	30.13	16.94	47.07	74.00	-26.93
15930.00	Average	22.49	16.94	39.44	54.00	-14.56

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band2
 Frequency :5310 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :56


Test Date :2024-07-20
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

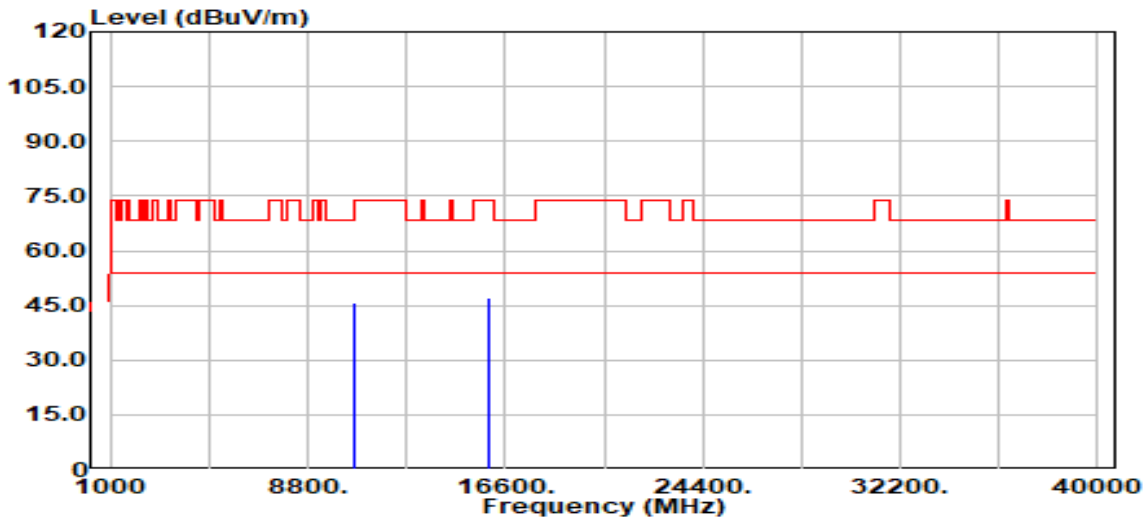

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10620.00	Peak	32.62	13.00	45.62	74.00	-28.38
10620.00	Average	24.08	13.00	37.08	54.00	-16.92
15930.00	Peak	30.03	16.94	46.98	74.00	-27.02
15930.00	Average	22.48	16.94	39.42	54.00	-14.58

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.6/57
Frequency	:5290 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:42		

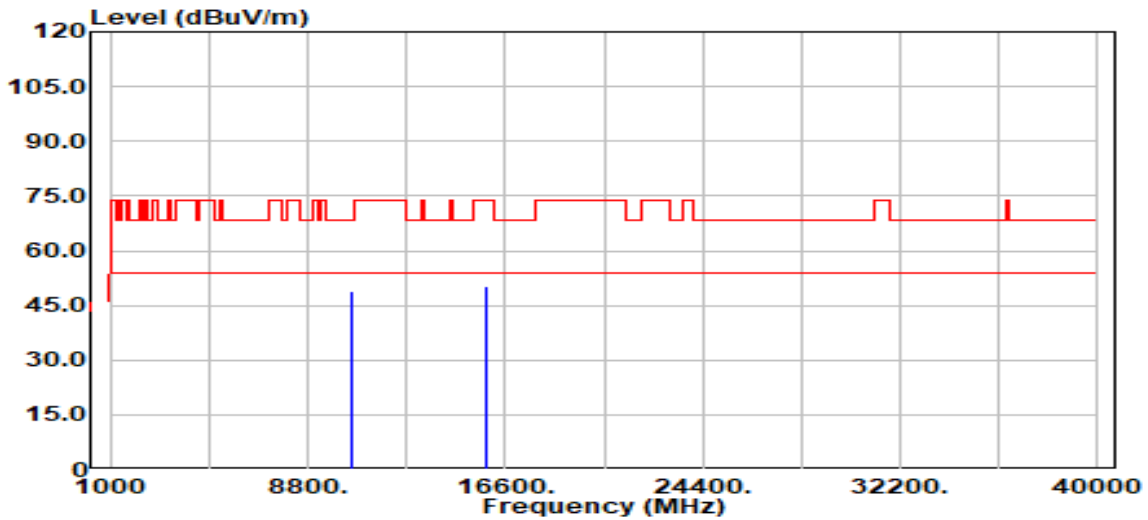

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10580.00	Peak	36.04	12.96	49.01	68.20	-19.19
15870.00	Peak	34.42	16.00	50.42	74.00	-23.58
15870.00	Average	26.32	16.00	42.32	54.00	-11.68

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.6/57
Frequency	:5290 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:42		

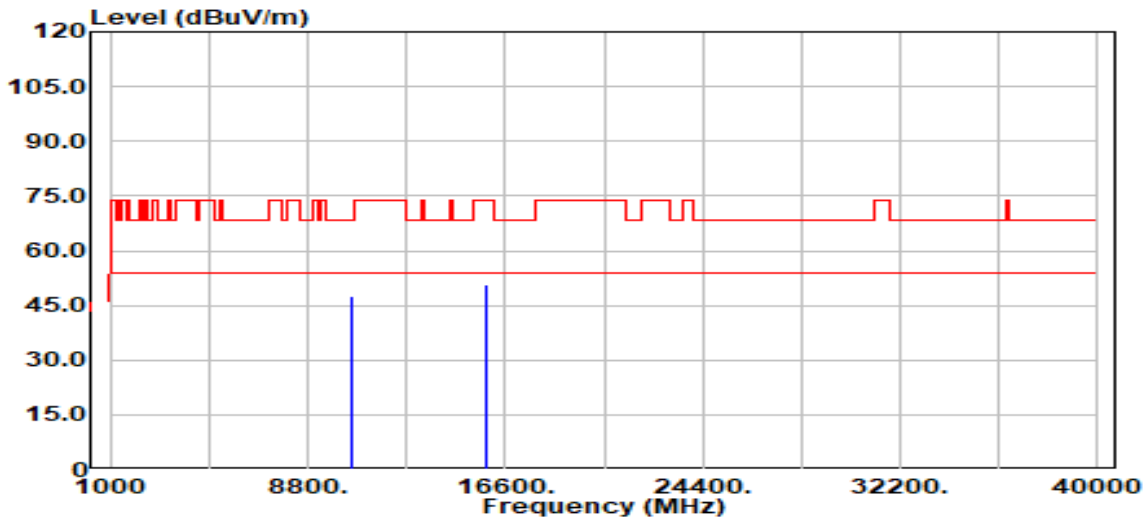

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
10580.00	Peak	34.46	12.96	47.42	68.20	-20.78
15870.00	Peak	34.88	16.00	50.88	74.00	-23.12
15870.00	Average	26.53	16.00	42.53	54.00	-11.47

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-30
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5530 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:H	Test Chamber	: 966A
Setting	:		

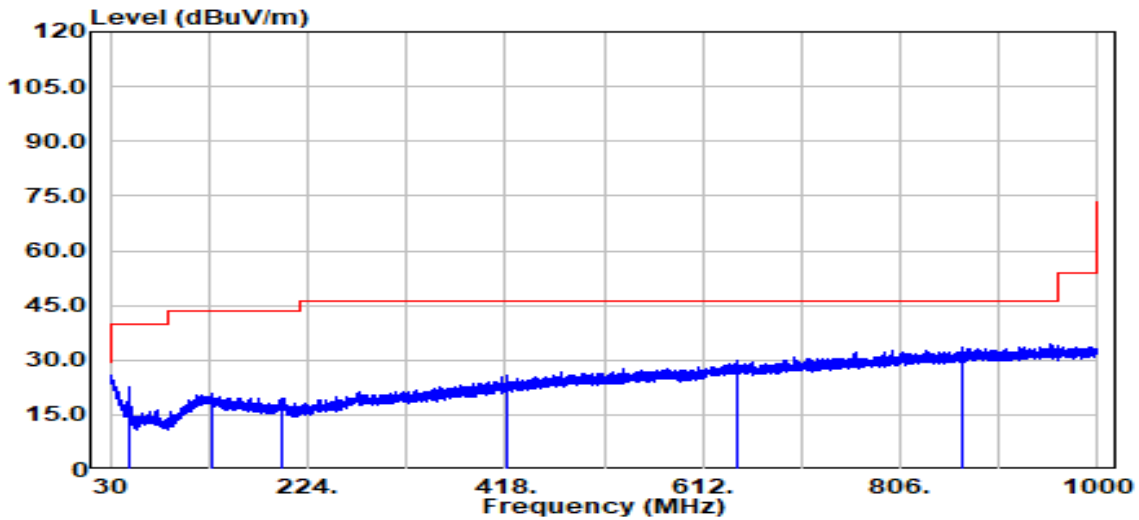


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
49.30	Peak	37.90	-15.18	22.71	40.00	-17.29
128.90	Peak	30.14	-9.19	20.95	43.50	-22.55
198.20	Peak	29.15	-9.79	19.35	43.50	-24.15
419.20	Peak	30.74	-5.11	25.63	46.00	-20.37
646.50	Peak	30.20	-0.34	29.86	46.00	-16.14
866.00	Peak	30.69	2.95	33.64	46.00	-12.36

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11ac80/Band3
 Frequency :5530 MHz
 Operation Mode :TX
 EUT Pol :H
 Setting :


Test Date :2024-07-30
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

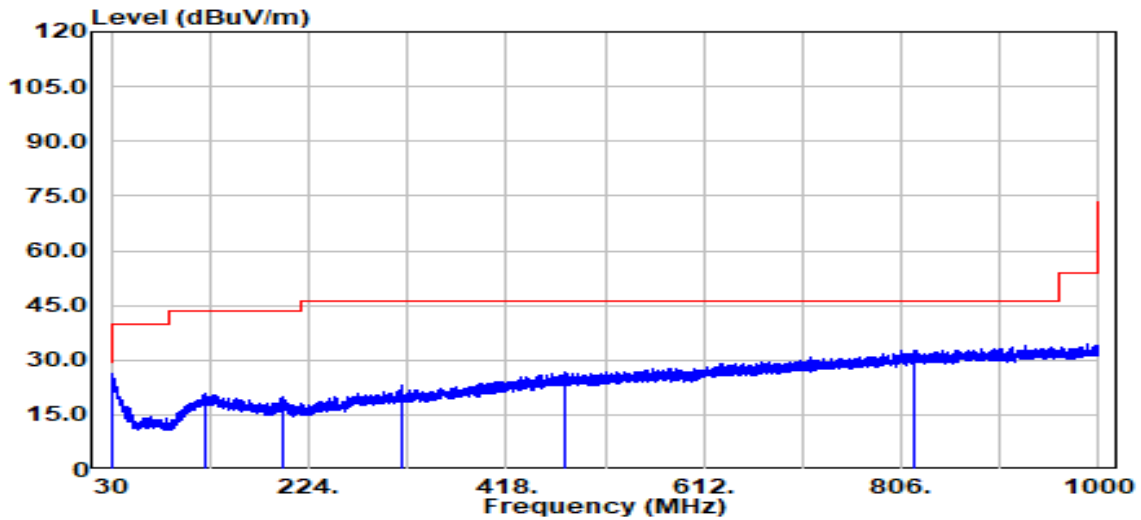

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
31.10	Peak	28.93	-3.36	25.57	40.00	-14.43
123.30	Peak	29.90	-9.13	20.77	43.50	-22.73
198.70	Peak	29.59	-9.69	19.89	43.50	-23.61
315.00	Peak	31.30	-8.03	23.27	46.00	-22.73
474.40	Peak	30.17	-3.57	26.60	46.00	-19.40
818.70	Peak	30.31	2.44	32.75	46.00	-13.25

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:32		

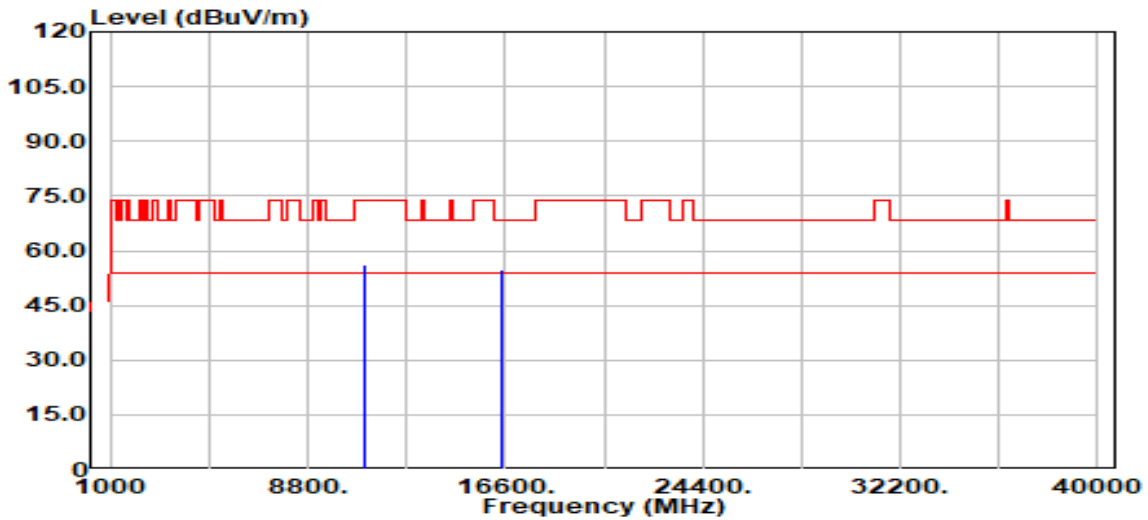

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11000.00	Peak	42.57	13.59	56.16	74.00	-17.84
11000.00	Average	34.73	13.59	48.32	54.00	-5.68
16500.00	Peak	33.72	21.16	54.88	68.20	-13.32

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:32		

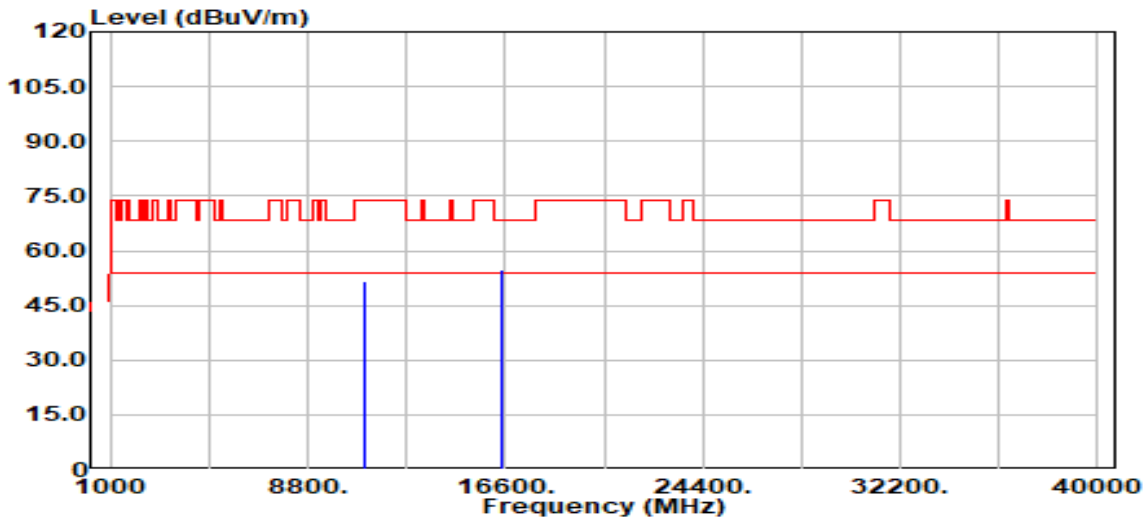

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11000.00	Peak	38.18	13.59	51.77	74.00	-22.23
11000.00	Average	31.04	13.59	44.63	54.00	-9.37
16500.00	Peak	33.42	21.16	54.58	68.20	-13.62

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:44		

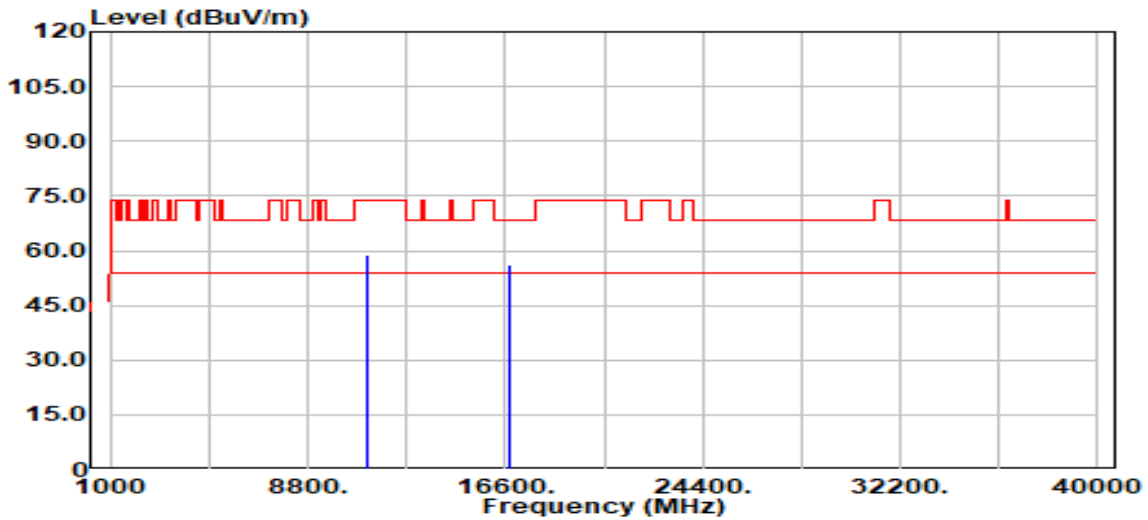

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11160.00	Peak	45.12	13.61	58.73	74.00	-15.27
11160.00	Average	37.01	13.61	50.62	54.00	-3.38
16740.00	Peak	33.52	22.60	56.12	68.20	-12.08

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:44		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11160.00	Peak	35.48	13.61	49.10	74.00	-24.90
11160.00	Average	27.48	13.61	41.10	54.00	-12.90
16740.00	Peak	34.05	22.60	56.65	68.20	-11.55

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:42		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11400.00	Peak	36.50	13.81	50.31	74.00	-23.69
11400.00	Average	29.48	13.81	43.29	54.00	-10.71
17100.00	Peak	32.08	27.61	59.69	68.20	-8.51

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:42		

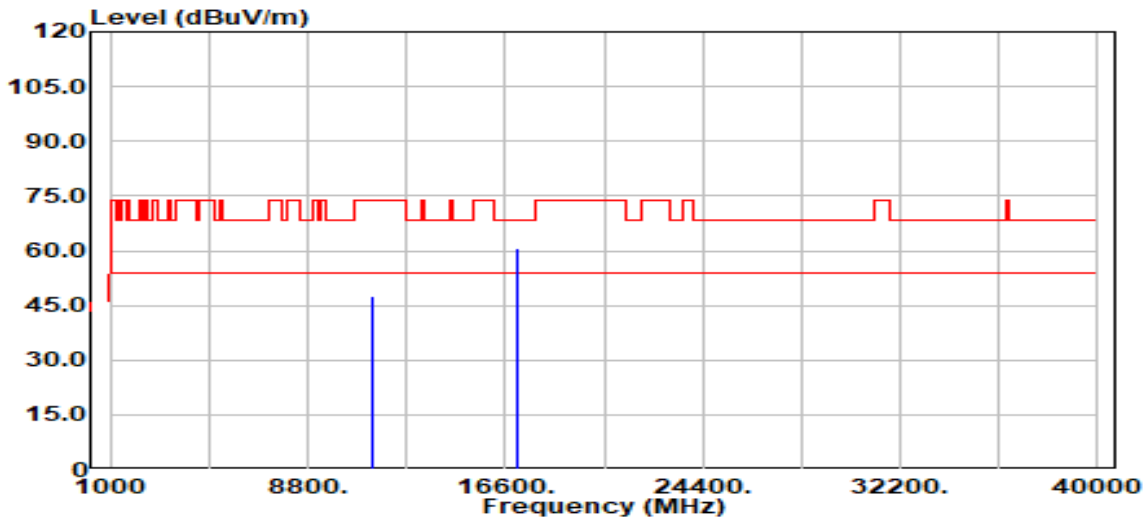

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11400.00	Peak	33.96	13.81	47.77	74.00	-26.23
11400.00	Average	26.98	13.81	40.79	54.00	-13.21
17100.00	Peak	33.00	27.61	60.61	68.20	-7.59

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:34		

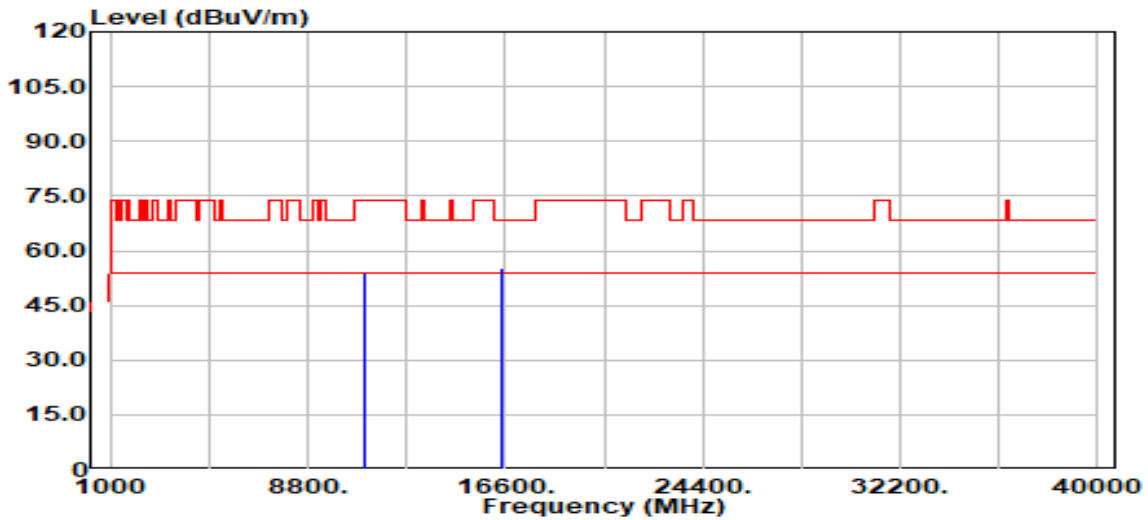

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11000.00	Peak	40.12	13.59	53.71	74.00	-20.29
11000.00	Average	37.15	13.59	50.74	54.00	-3.26
16500.00	Peak	33.98	21.16	55.14	68.20	-13.06

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:34		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11000.00	Peak	40.91	13.59	54.50	74.00	-19.50
11000.00	Average	32.65	13.59	46.24	54.00	-7.76
16500.00	Peak	33.74	21.16	54.90	68.20	-13.30

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:59		

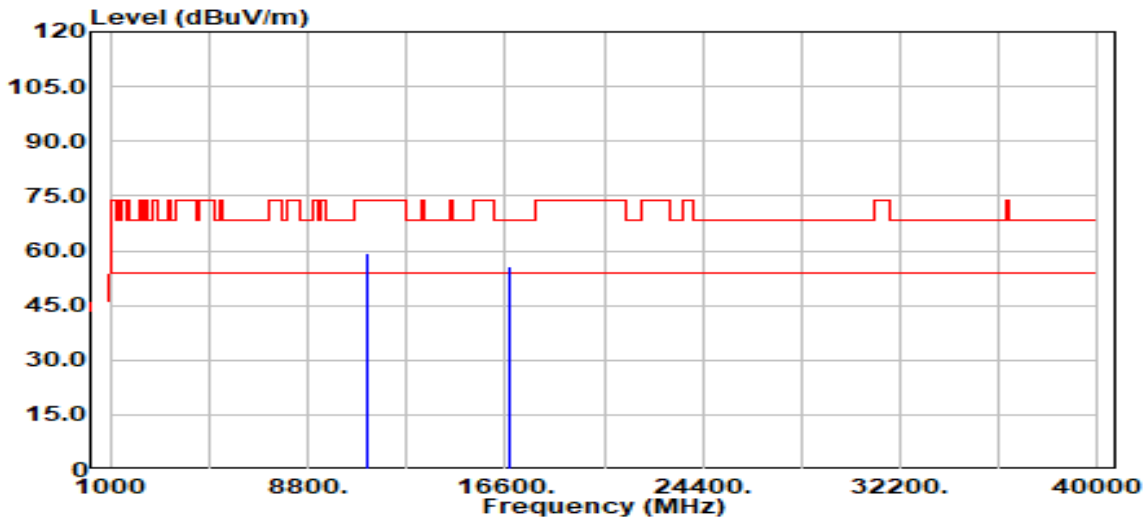

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11160.00	Peak	45.68	13.61	59.29	74.00	-14.71
11160.00	Average	37.35	13.61	50.96	54.00	-3.04
16740.00	Peak	32.97	22.60	55.58	68.20	-12.62

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:59		

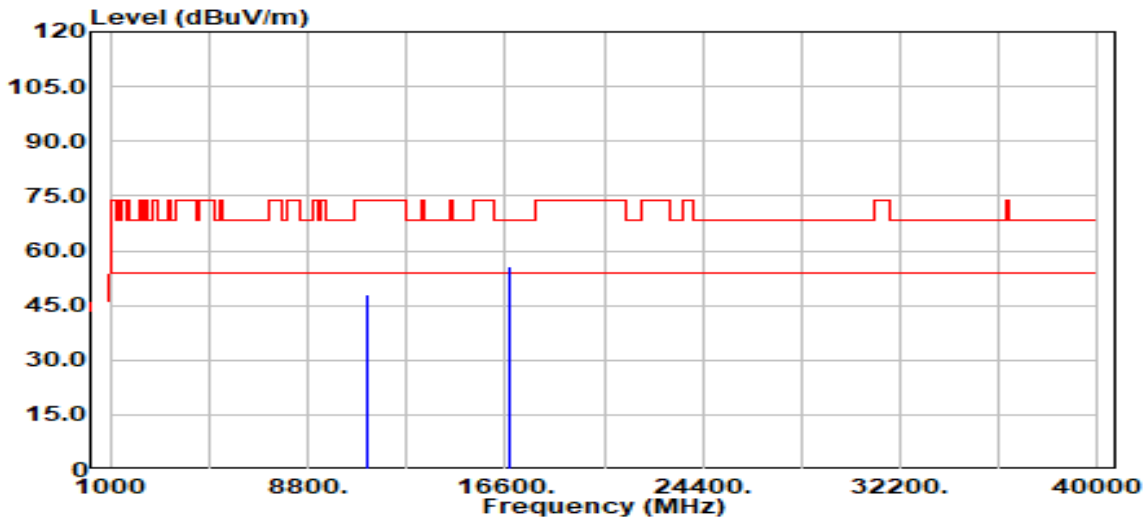

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11160.00	Peak	34.38	13.61	47.99	74.00	-26.01
11160.00	Average	30.72	13.61	44.33	54.00	-9.67
16740.00	Peak	32.96	22.60	55.56	68.20	-12.64

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:57		

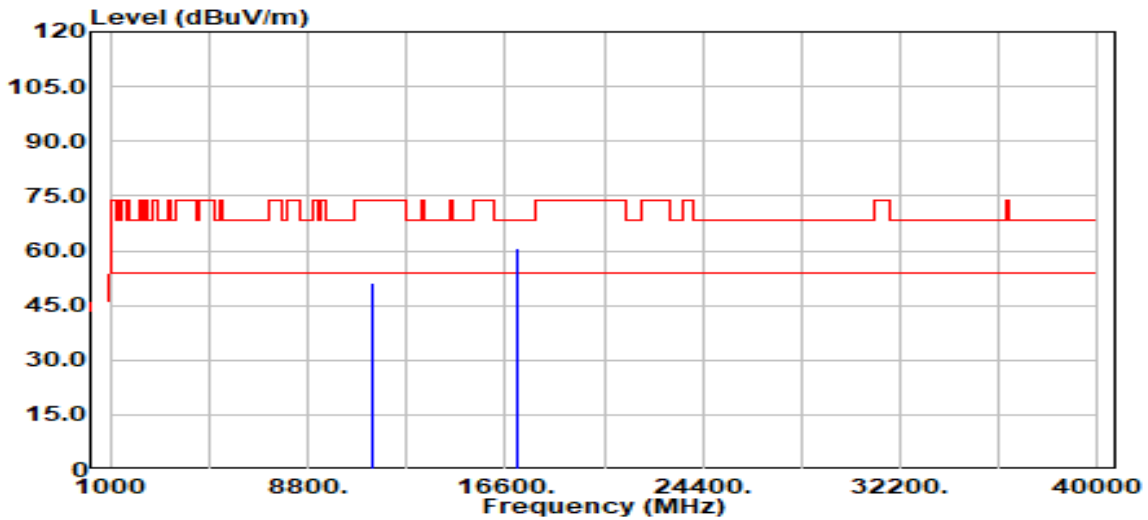

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11400.00	Peak	37.29	13.81	51.10	74.00	-22.90
11400.00	Average	36.69	13.81	50.50	54.00	-3.50
17100.00	Peak	33.11	27.61	60.72	68.20	-7.48

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:57		

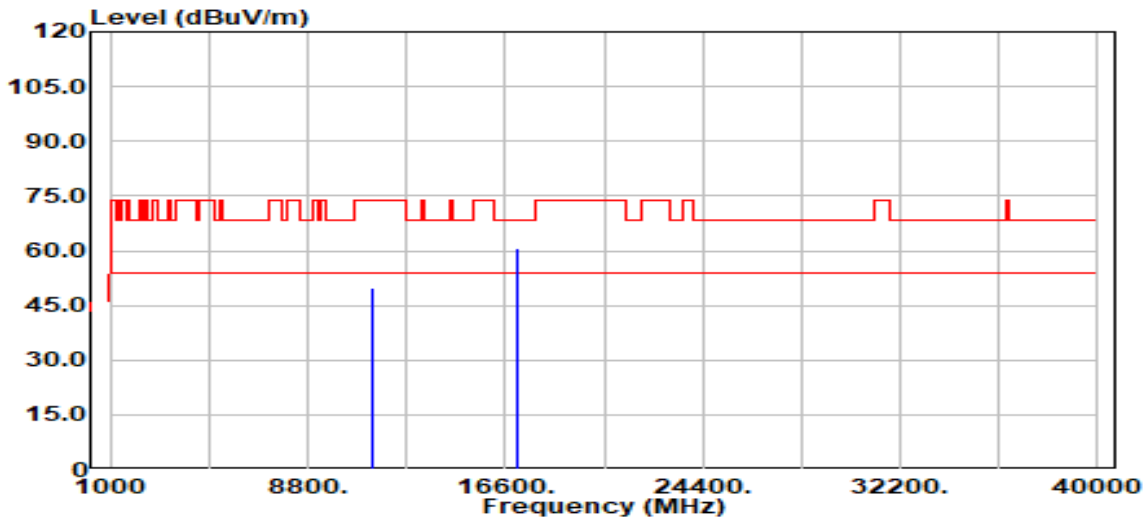

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11400.00	Peak	35.89	13.81	49.70	74.00	-24.30
11400.00	Average	30.14	13.81	43.95	54.00	-10.05
17100.00	Peak	32.87	27.61	60.48	68.20	-7.72

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-20
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5510 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:48		

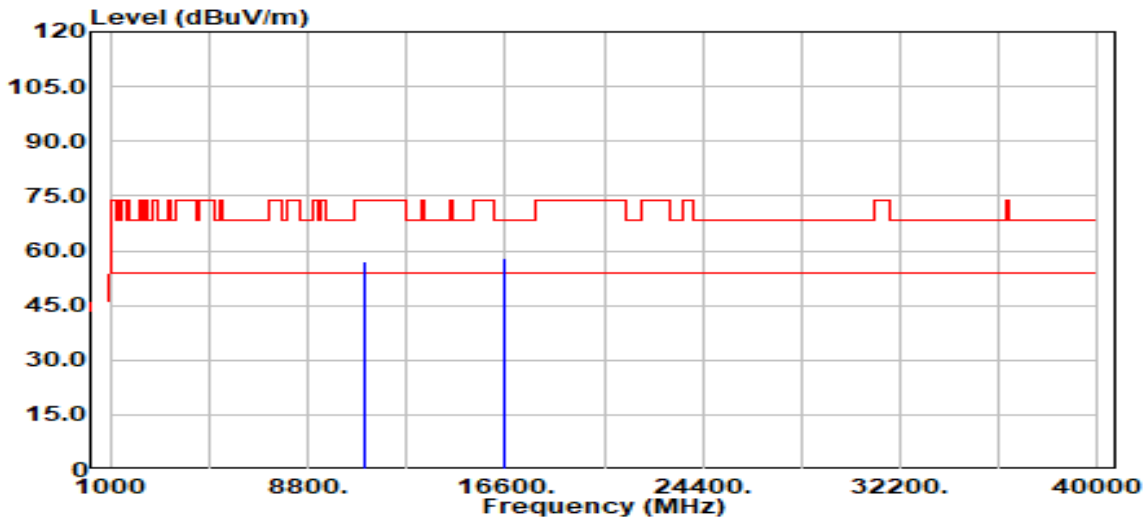

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11020.00	Peak	43.17	13.75	56.92	74.00	-17.08
11020.00	Average	35.34	13.75	49.09	54.00	-4.92
16530.00	Peak	36.99	20.98	57.97	68.20	-10.23

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :48


Test Date :2024-07-20
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11020.00	Peak	38.40	13.75	52.15	74.00	-21.85
11020.00	Average	30.23	13.75	43.98	54.00	-10.03
16530.00	Peak	35.52	20.98	56.50	68.20	-11.70

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-20
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5550 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:70		

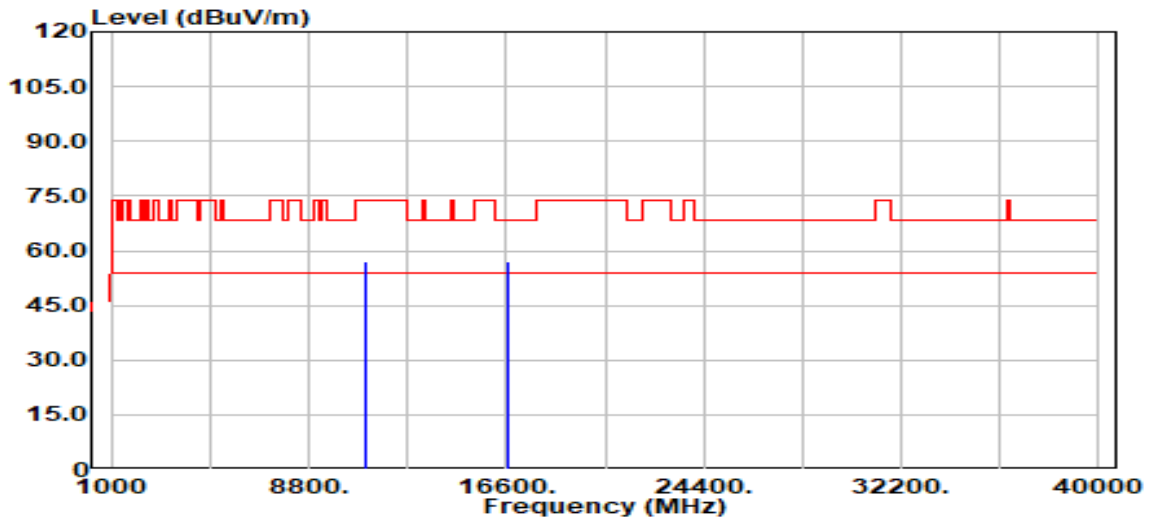


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11100.00	Peak	42.98	13.93	56.91	74.00	-17.09
11100.00	Average	36.44	13.93	50.37	54.00	-3.63
16650.00	Peak	35.53	21.52	57.05	68.20	-11.15

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band3
 Frequency :5550 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :70

Test Date :2024-07-20
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

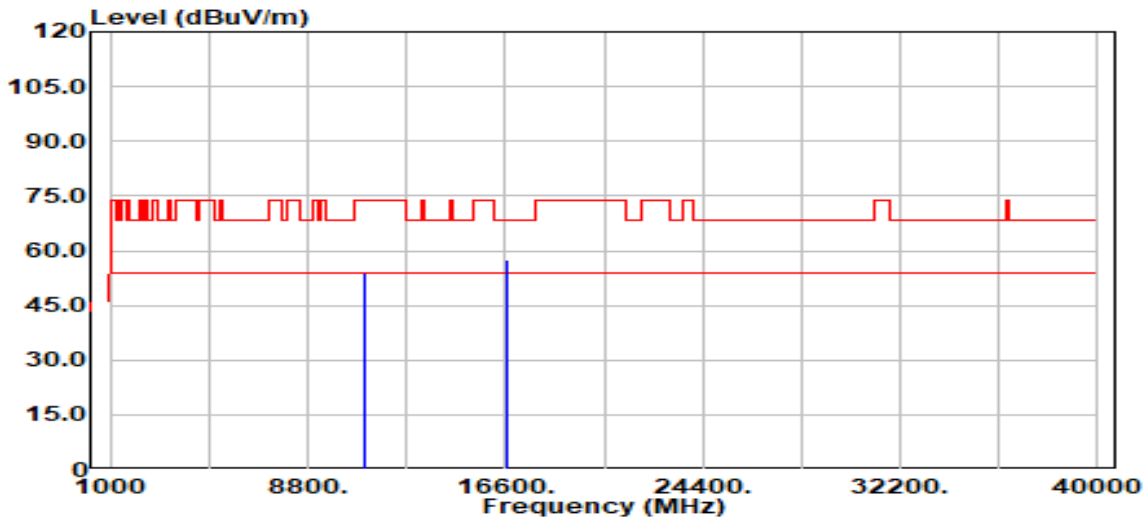

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11100.00	Peak	40.02	13.93	53.95	74.00	-20.05
11100.00	Average	32.16	13.93	46.09	54.00	-7.91
16650.00	Peak	35.97	21.52	57.49	68.20	-10.71

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-20
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5670 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:63		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11340.00	Peak	40.54	13.87	54.41	74.00	-19.59
11340.00	Average	32.24	13.87	46.11	54.00	-7.89
17010.00	Peak	34.37	26.82	61.19	68.20	-7.01

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band3
 Frequency :5670 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :63


Test Date :2024-07-20
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

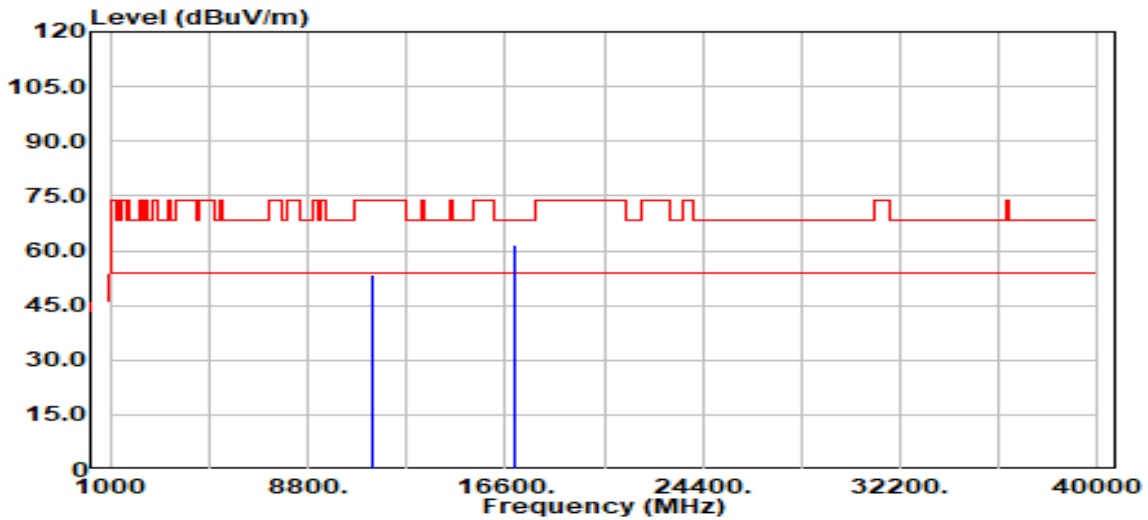

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11340.00	Peak	39.48	13.87	53.35	74.00	-20.65
11340.00	Average	29.74	13.87	43.61	54.00	-10.39
17010.00	Peak	34.95	26.82	61.78	68.20	-6.42

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5530 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:30		

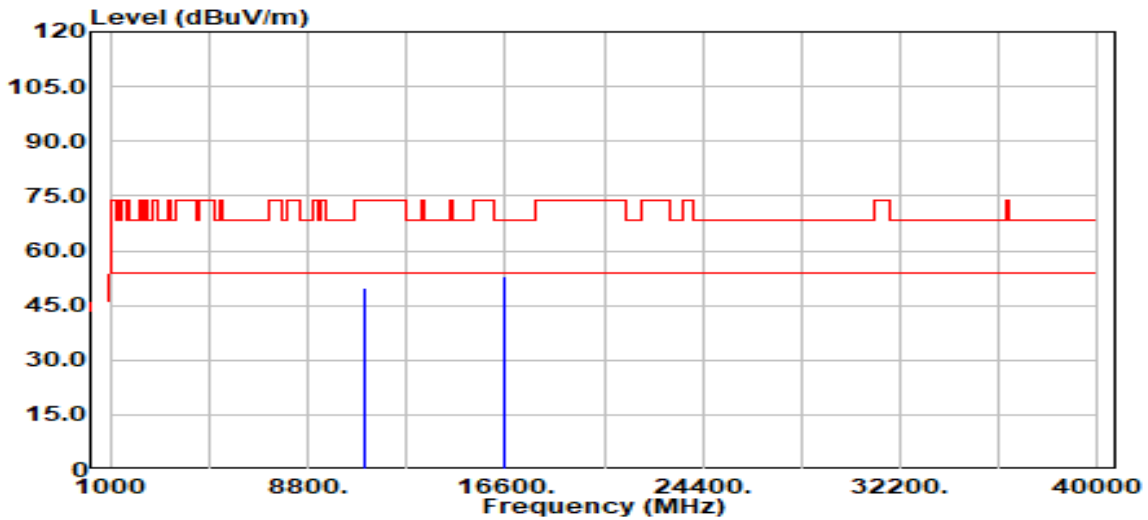

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11060.00	Peak	36.05	13.97	50.02	74.00	-23.98
11060.00	Average	29.05	13.97	43.02	54.00	-10.98
16590.00	Peak	31.66	21.10	52.76	68.20	-15.44

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5530 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:30		

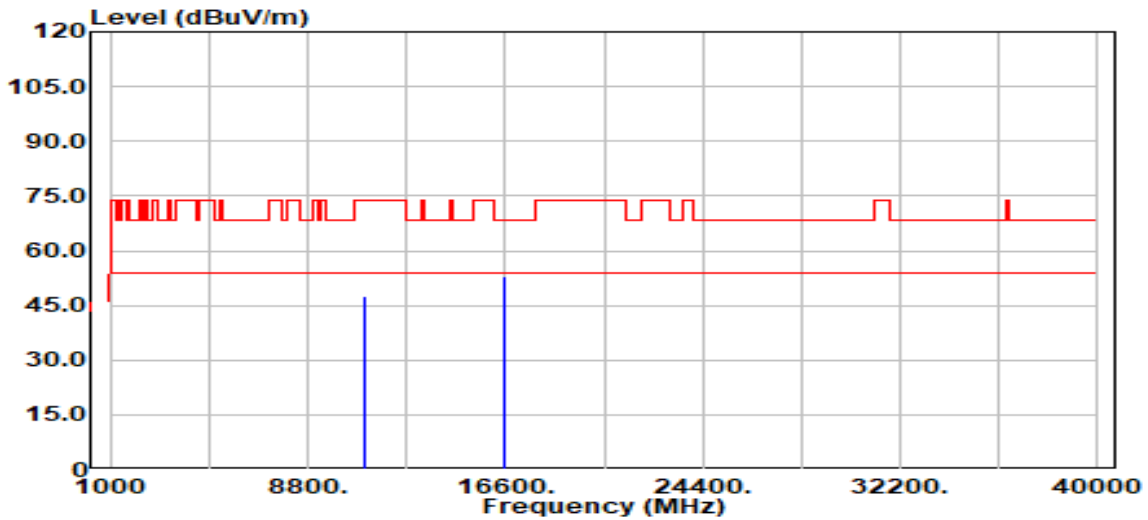

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11060.00	Peak	33.76	13.97	47.73	74.00	-26.27
11060.00	Average	26.37	13.97	40.35	54.00	-13.65
16590.00	Peak	31.73	21.10	52.83	68.20	-15.37

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5610 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:65		

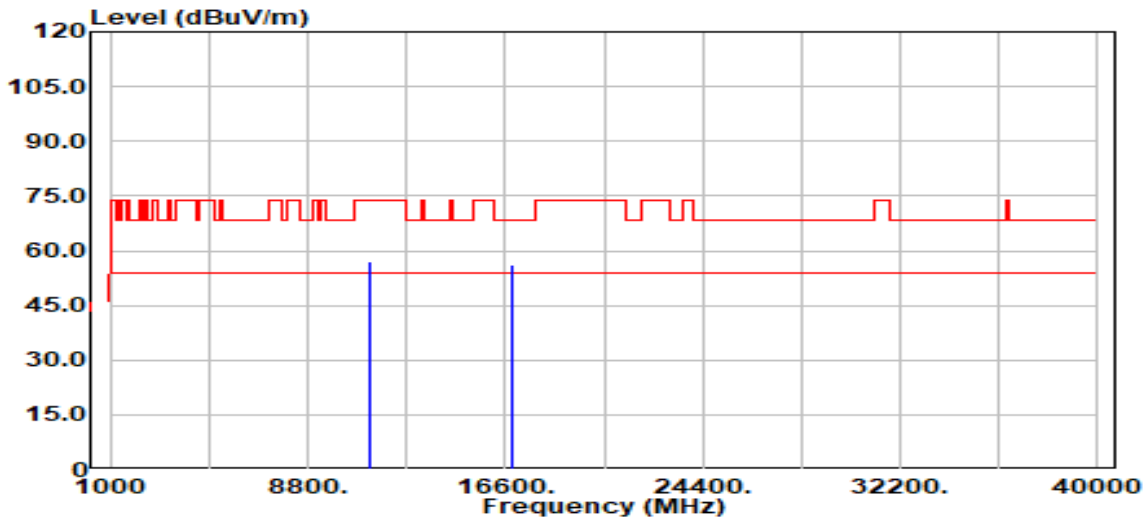

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11220.00	Peak	43.05	13.87	56.92	74.00	-17.08
11220.00	Average	34.65	13.87	48.53	54.00	-5.47
16830.00	Peak	32.02	24.12	56.14	68.20	-12.06

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5610 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:65		

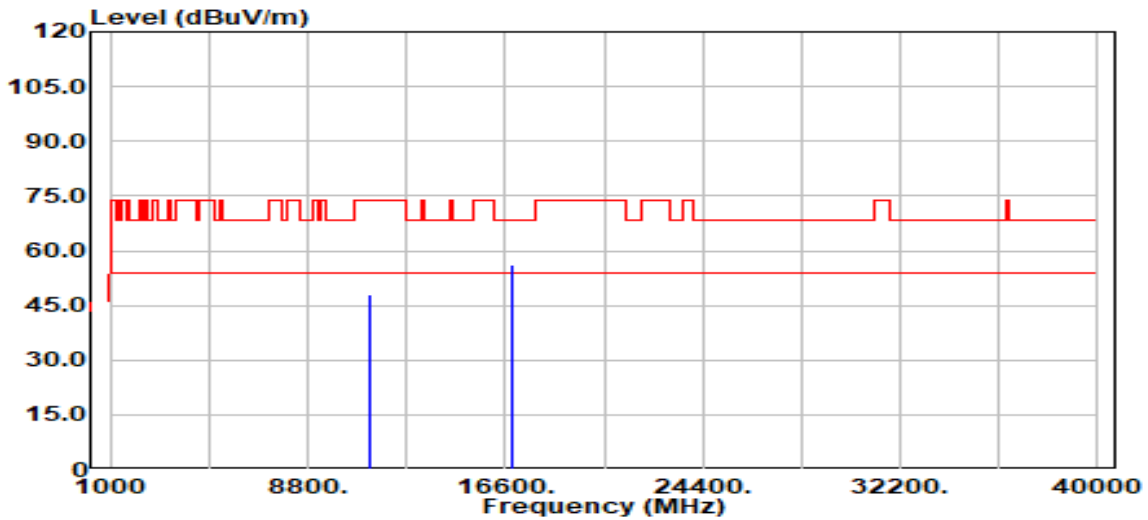

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11220.00	Peak	34.20	13.87	48.07	74.00	-25.93
11220.00	Average	29.82	13.87	43.69	54.00	-10.31
16830.00	Peak	31.95	24.12	56.06	68.20	-12.14

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-30
Operation Band	:802.11n40/Band4	Temp./Humi.	:24.6/57
Frequency	:5755 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:H	Test Chamber	: 966A
Setting	:		

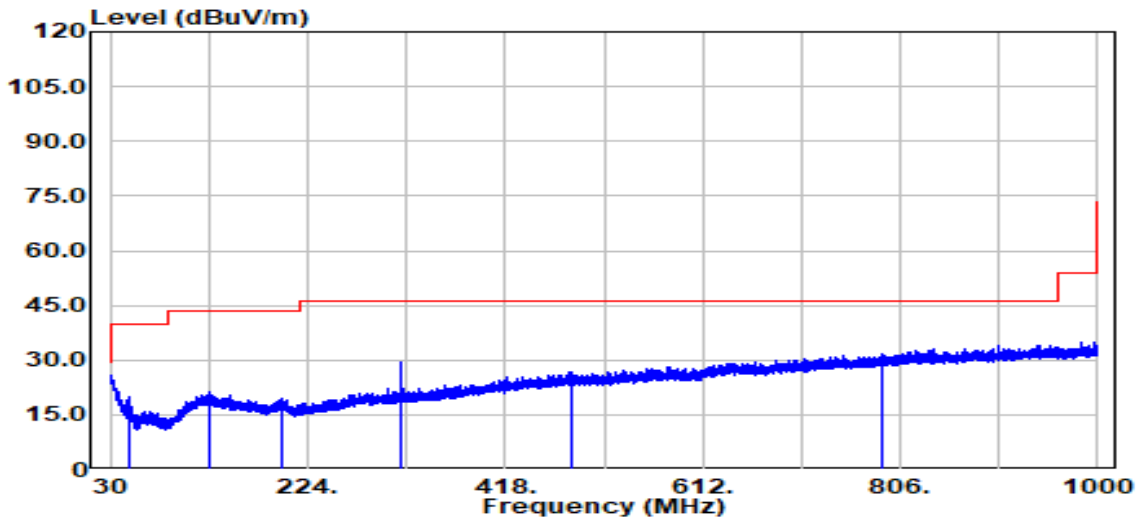


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
49.10	Peak	35.06	-15.13	19.94	40.00	-20.06
126.50	Peak	30.46	-9.01	21.45	43.50	-22.05
198.60	Peak	29.06	-9.71	19.35	43.50	-24.15
315.00	Peak	37.30	-8.03	29.27	46.00	-16.73
483.70	Peak	30.26	-3.43	26.83	46.00	-19.17
788.50	Peak	29.80	1.72	31.52	46.00	-14.48

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :TX
 EUT Pol :H
 Setting :


Test Date :2024-07-30
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray Li
 Test Chamber : 966A

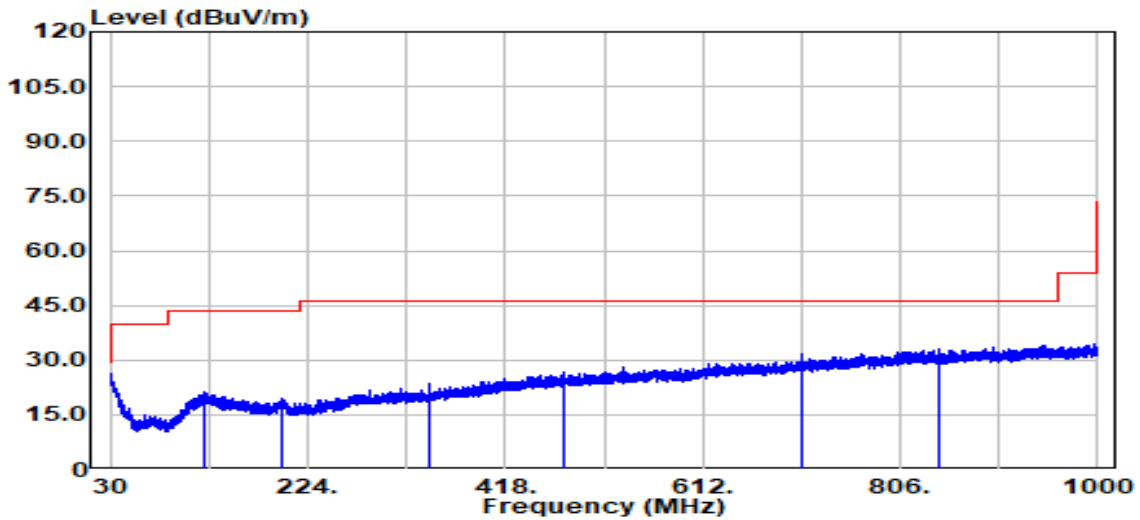

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
121.80	Peak	30.51	-9.09	21.42	43.50	-22.08
198.70	Peak	29.09	-9.69	19.40	43.50	-24.10
342.50	Peak	31.17	-7.63	23.54	46.00	-22.46
474.90	Peak	30.44	-3.56	26.88	46.00	-19.12
708.60	Peak	31.07	0.46	31.54	46.00	-14.46
843.30	Peak	30.48	2.47	32.95	46.00	-13.05

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:74		

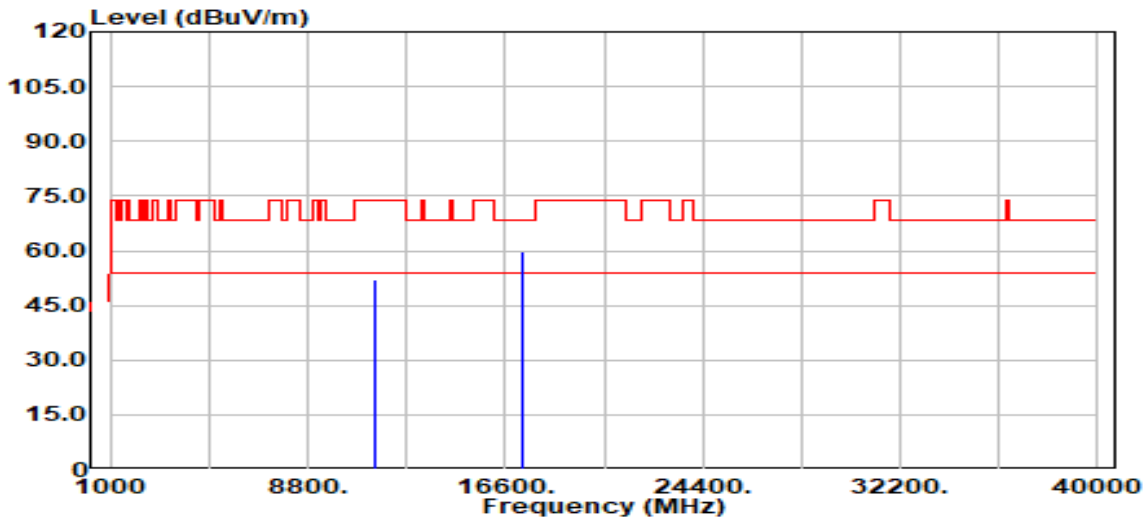

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11490.00	Peak	38.23	13.67	51.90	74.00	-22.10
11490.00	Average	35.43	13.67	49.09	54.00	-4.91
17235.00	Peak	31.68	28.05	59.73	68.20	-8.47

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:74		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11490.00	Peak	38.09	13.67	51.76	74.00	-22.24
11490.00	Average	32.16	13.67	45.83	54.00	-8.17
17235.00	Peak	31.88	28.05	59.93	68.20	-8.27

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:74		

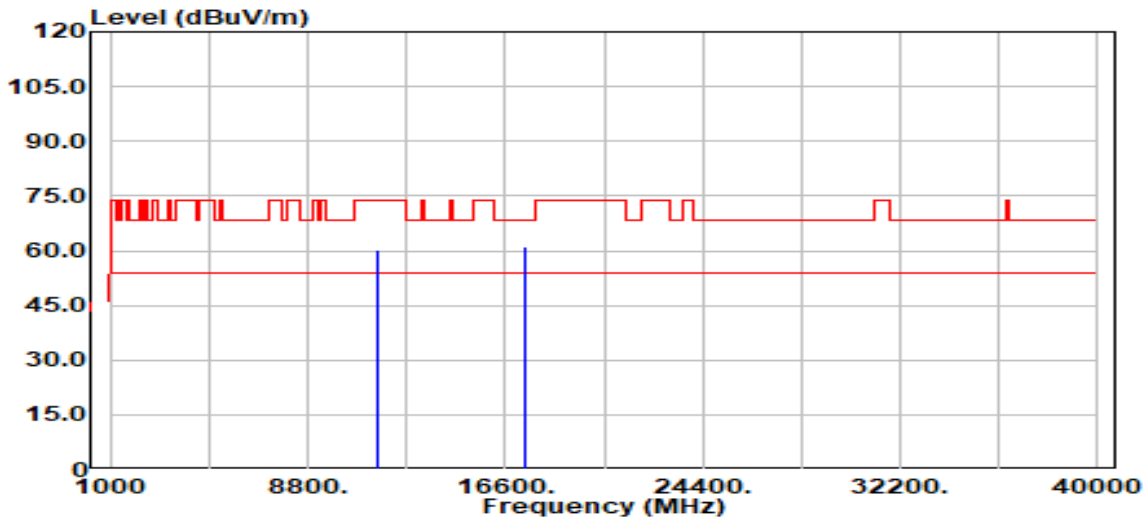

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11570.00	Peak	46.54	13.89	60.43	74.00	-13.57
11570.00	Average	37.05	13.89	50.94	54.00	-3.06
17355.00	Peak	33.90	27.33	61.23	68.20	-6.97

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:74		

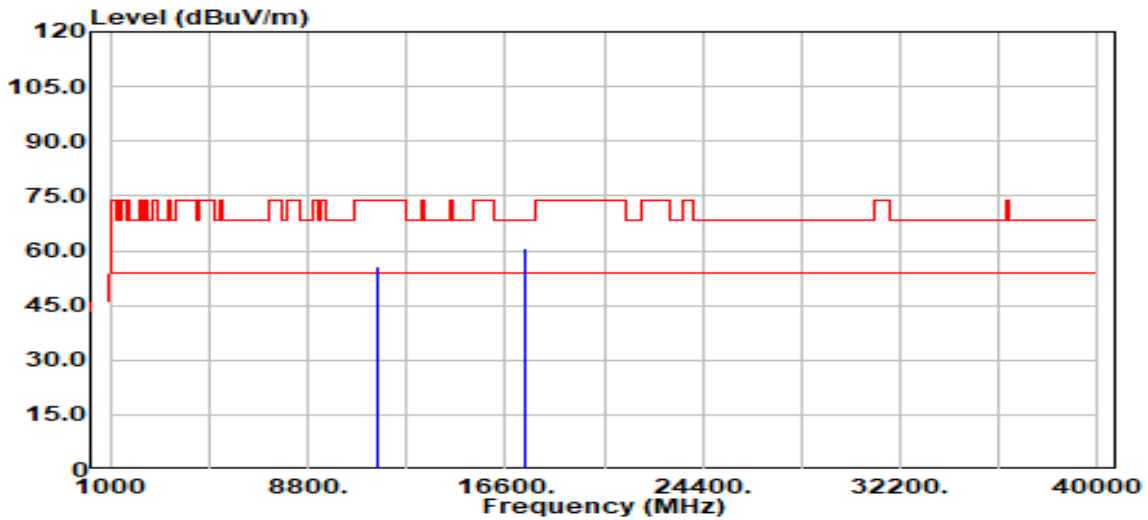

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11570.00	Peak	41.59	13.89	55.48	74.00	-18.52
11570.00	Average	31.80	13.89	45.69	54.00	-8.31
17355.00	Peak	33.32	27.33	60.65	68.20	-7.55

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:76		

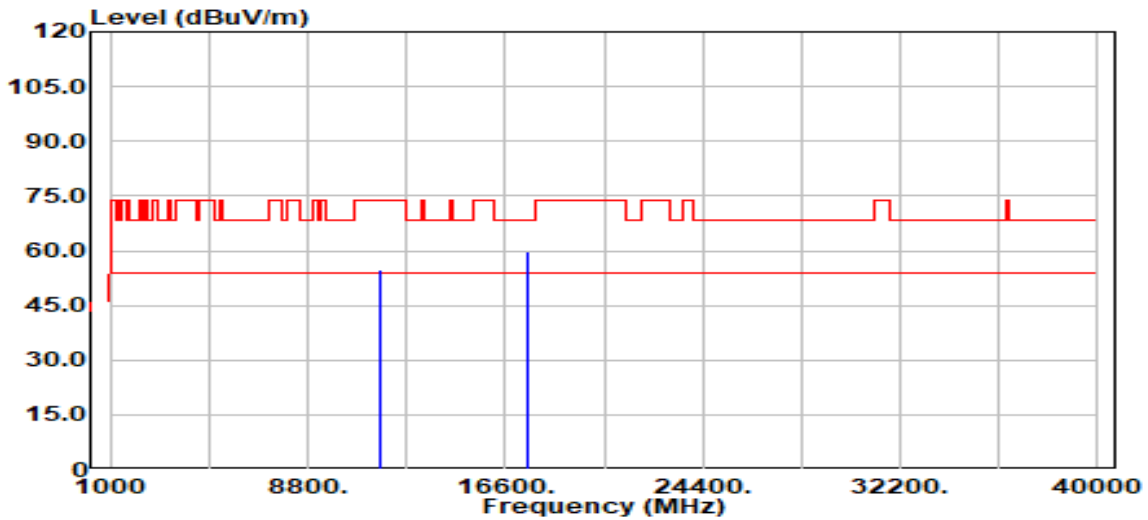

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11650.00	Peak	40.98	14.03	55.00	74.00	-19.00
11650.00	Average	36.82	14.03	50.84	54.00	-3.16
17475.00	Peak	32.66	27.18	59.84	68.20	-8.36

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-16
Operation Band	:802.11a/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:76		

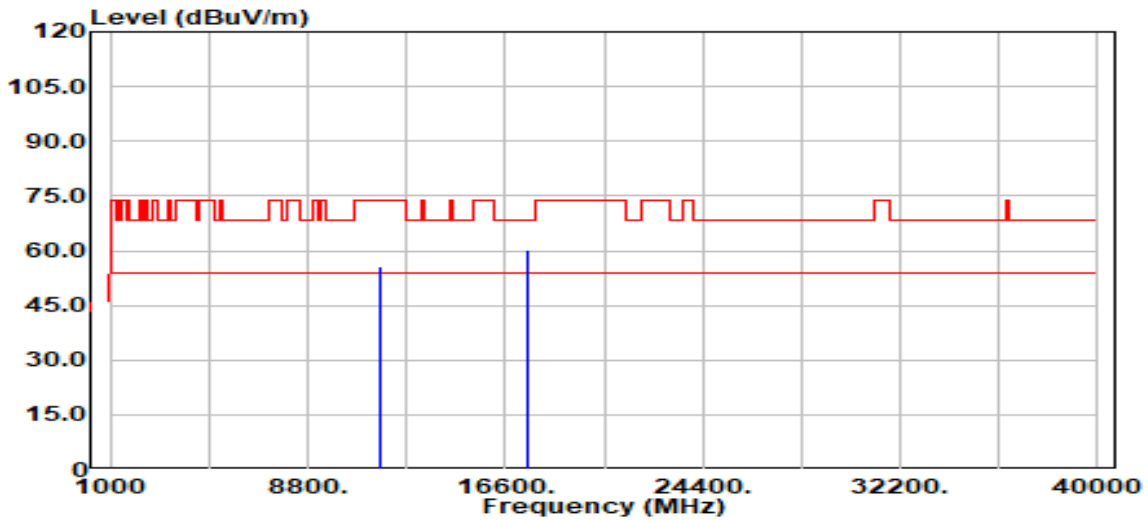

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11650.00	Peak	41.76	14.03	55.78	74.00	-18.22
11650.00	Average	34.43	14.03	48.46	54.00	-5.54
17475.00	Peak	33.18	27.18	60.36	68.20	-7.84

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:76		

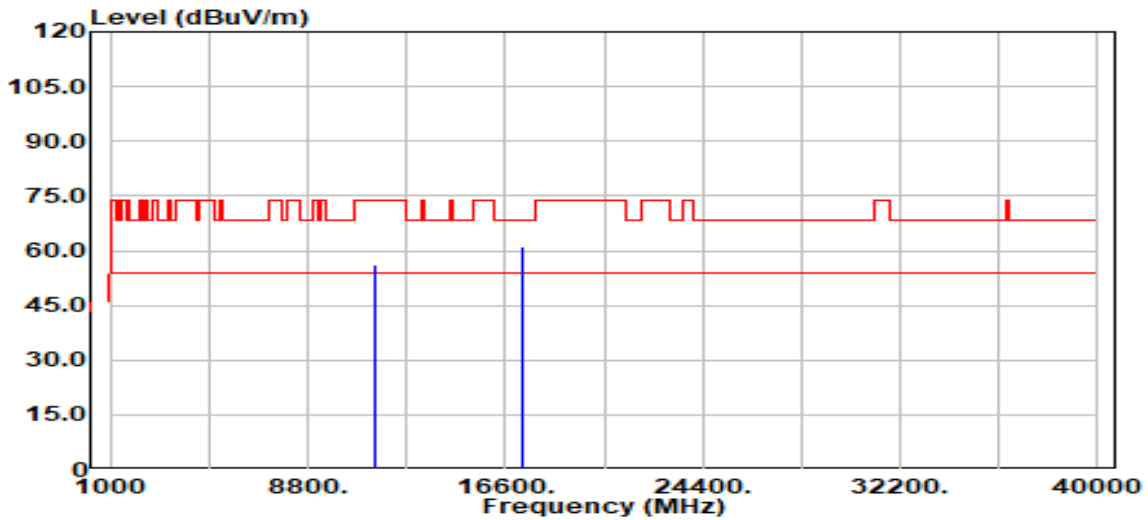

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11490.00	Peak	42.28	13.67	55.95	74.00	-18.05
11490.00	Average	35.17	13.67	48.84	54.00	-5.16
17235.00	Peak	33.30	28.05	61.35	68.20	-6.85

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:76		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11490.00	Peak	38.44	13.67	52.11	74.00	-21.89
11490.00	Average	32.00	13.67	45.67	54.00	-8.33
17235.00	Peak	33.41	28.05	61.46	68.20	-6.74

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:65		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11570.00	Peak	44.07	13.89	57.96	74.00	-16.04
11570.00	Average	37.09	13.89	50.99	54.00	-3.01
17355.00	Peak	33.50	27.33	60.83	68.20	-7.37

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n20/Band4
 Frequency :5785 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :65


Test Date :2024-07-18
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11570.00	Peak	39.39	13.89	53.29	74.00	-20.71
11570.00	Average	32.06	13.89	45.96	54.00	-8.04
17355.00	Peak	33.90	27.33	61.23	68.20	-6.97

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:63		

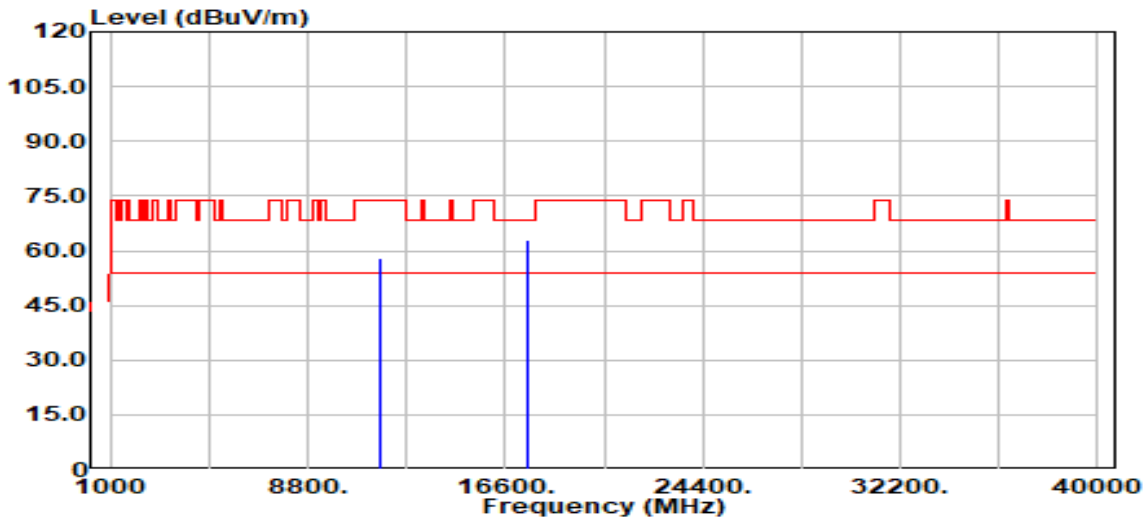

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11650.00	Peak	43.82	14.03	57.85	74.00	-16.15
11650.00	Average	36.87	14.03	50.89	54.00	-3.11
17475.00	Peak	35.88	27.18	63.06	68.20	-5.14

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-18
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:63		

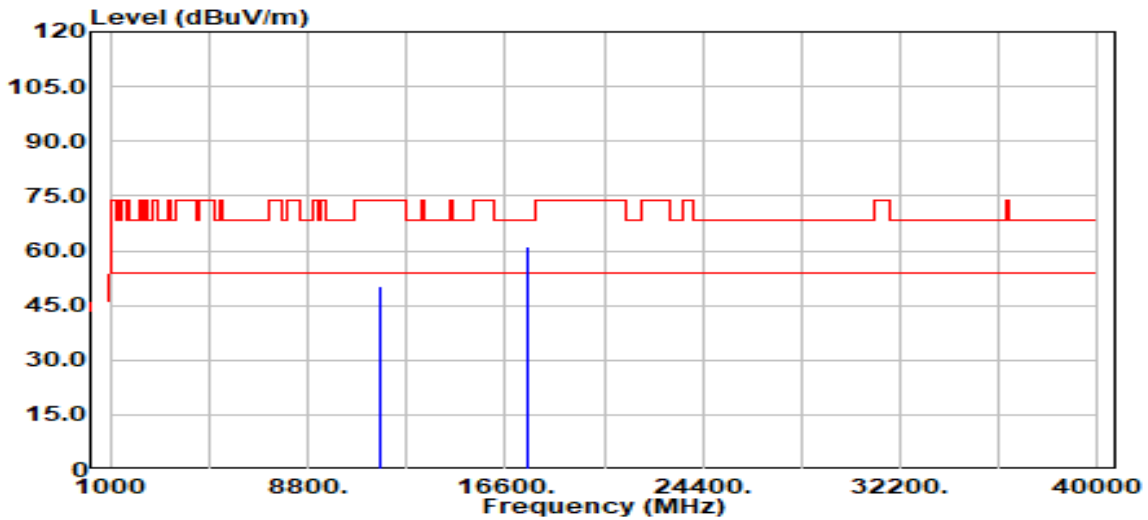

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11650.00	Peak	36.01	14.03	50.04	74.00	-23.96
11650.00	Average	27.99	14.03	42.01	54.00	-11.99
17475.00	Peak	34.10	27.18	61.28	68.20	-6.92

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-20
Operation Band	:802.11n40/Band4	Temp./Humi.	:24.6/57
Frequency	:5755 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:76		

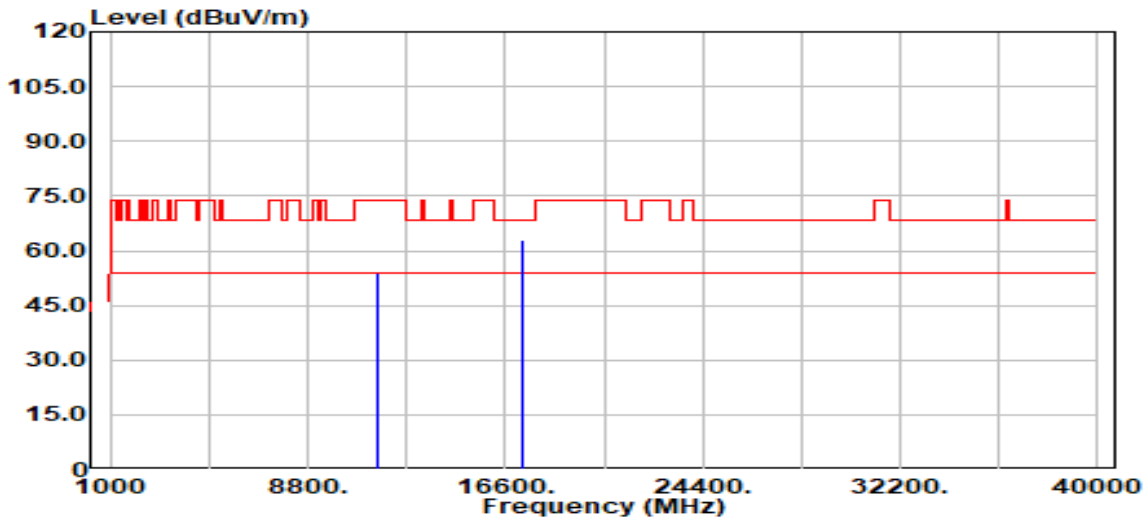


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11510.00	Peak	40.04	13.77	53.81	74.00	-20.19
11510.00	Average	33.76	13.77	47.53	54.00	-6.47
17265.00	Peak	34.95	27.89	62.84	68.20	-5.36

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :76

Test Date :2024-07-20
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

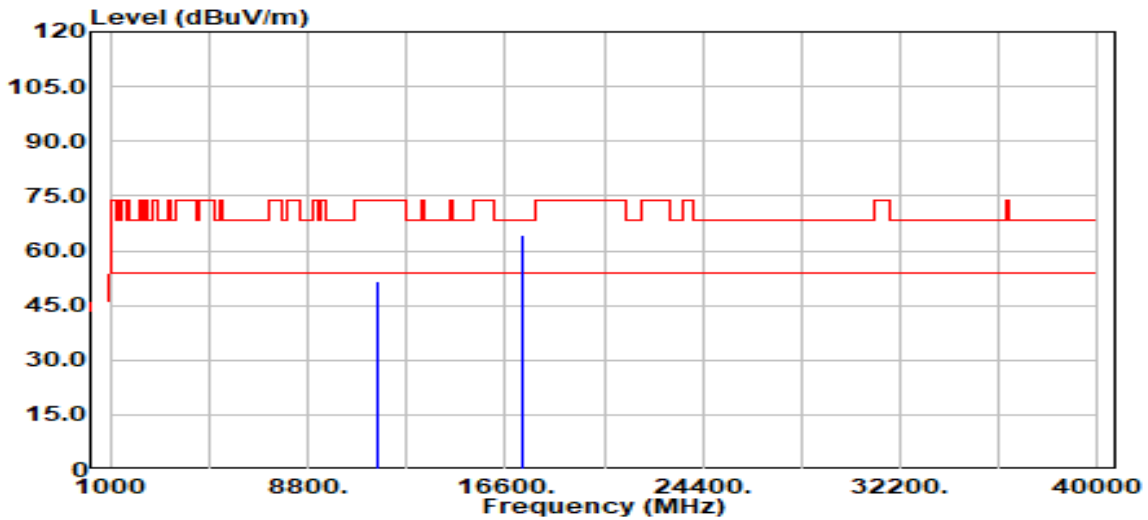

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11510.00	Peak	37.92	13.77	51.69	74.00	-22.31
11510.00	Average	31.35	13.77	45.12	54.00	-8.88
17265.00	Peak	36.22	27.89	64.11	68.20	-4.09

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-20
Operation Band	:802.11n40/Band4	Temp./Humi.	:24.6/57
Frequency	:5795 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E1	Test Chamber	: 966A
Setting	:77		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11590.00	Peak	40.59	13.82	54.41	74.00	-19.59
11590.00	Average	34.83	13.82	48.65	54.00	-5.35
17385.00	Peak	35.98	27.26	63.24	68.20	-4.96

Report No.: TMWK2407002220KR

Project No. :TM-2407000112P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :77

Test Date :2024-07-20
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony Chao
 Test Chamber : 966A

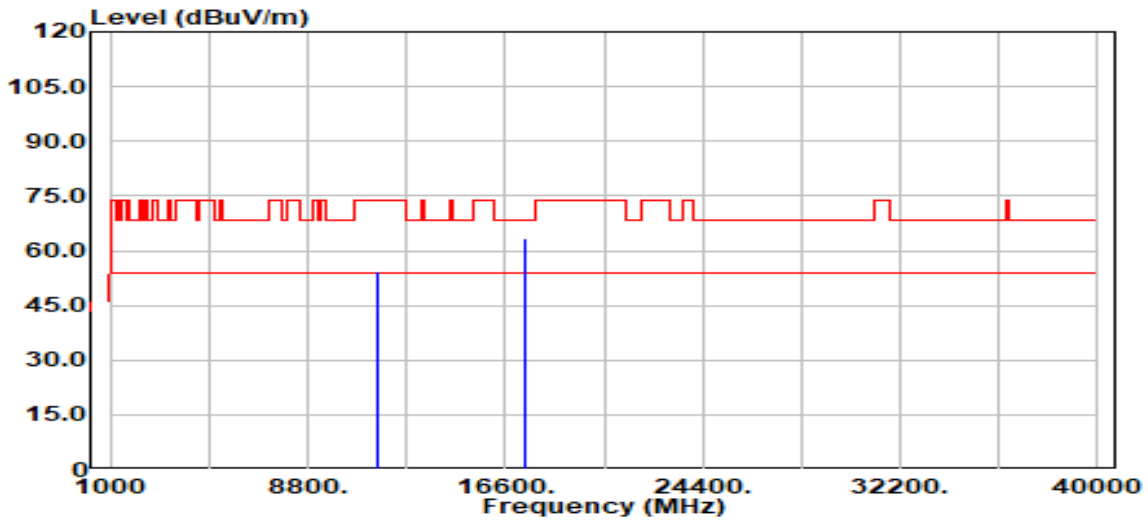

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11590.00	Peak	40.40	13.82	54.22	74.00	-19.78
11590.00	Average	31.47	13.82	45.29	54.00	-8.71
17385.00	Peak	36.02	27.26	63.29	68.20	-4.91

Report No.: TMWK2407002220KR


Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band4	Temp./Humi.	:24.6/57
Frequency	:5775 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:67		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11550.00	Peak	37.93	13.97	51.90	74.00	-22.10
11550.00	Average	30.07	13.97	44.04	54.00	-9.96
17325.00	Peak	32.05	27.42	59.47	68.20	-8.73

Report No.: TMWK2407002220KR

Project No.	:TM-2407000112P	Test Date	:2024-07-17
Operation Band	:802.11ac80/Band4	Temp./Humi.	:24.6/57
Frequency	:5775 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E1	Test Chamber	: 966A
Setting	:67		

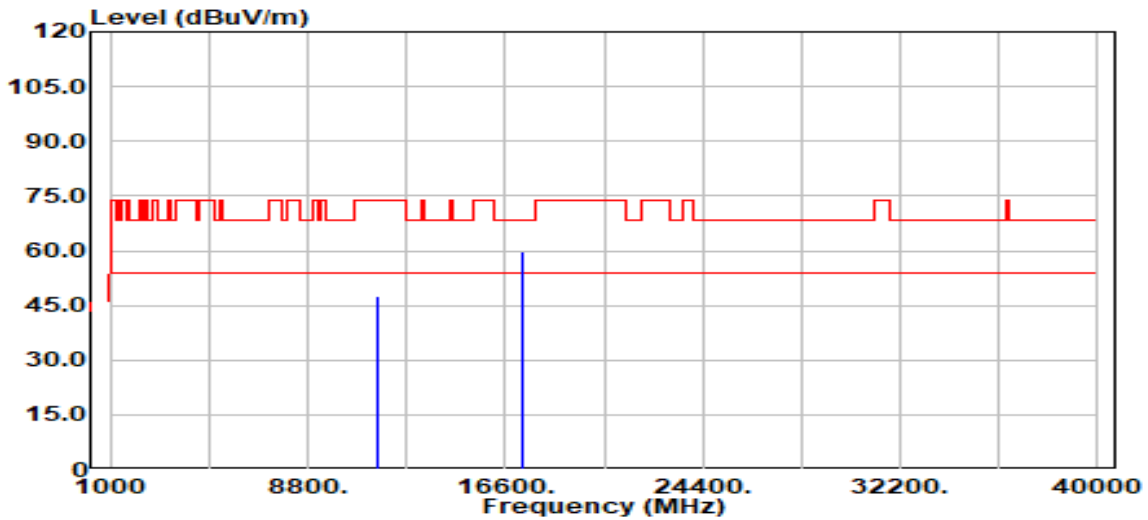

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11550.00	Peak	33.69	13.97	47.66	74.00	-26.34
11550.00	Average	26.48	13.97	40.45	54.00	-13.55
17325.00	Peak	32.40	27.42	59.82	68.20	-8.38