

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
**Report No.:** RFBERD-WTW-P21100651A-1  
**FCC ID:** COF-WMBACBM25  
**Product:** 802.11a/b/g/n/ac + BT 4.1 Module  
**Brand:** USI  
**Model No.:** WM-BAC-BM-25-FF3  
**Series Model:** WM-BAC-BM-25, WM-BAC-BM-25\_FF2  
**Received Date:** 2023/4/14  
**Test Date:** 2023/5/10 ~ 2023/5/23  
**Issued Date:** 2023/6/16

**Applicant:** Universal Global Scientific Industrial Co., Ltd.

**Address:** 141, Lane 351, Sec. 1, Taiping Road., Tsautuen, Nantou 542007, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

**FCC Registration /** 788550 / TW0003

**Designation Number:**

**Approved by:**

Jeremy Lin

Jeremy Lin / Project Engineer

**Date:**

2023/6/16

This test report consists of 24 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Gina Liu / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate.....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Supplementary Information .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description.....	6
3.2 Antenna Description of EUT .....	6
3.3 Channel List.....	7
3.4 Test Mode Applicability and Tested Channel Detail.....	7
3.5 Duty Cycle of Test Signal.....	7
<b>4 Test Instruments .....</b>	<b>9</b>
4.1 RF Output Power.....	9
4.2 Unwanted Emissions below 1 GHz .....	9
4.3 Unwanted Emissions above 1 GHz.....	10
<b>5 Limits of Test Items.....</b>	<b>11</b>
5.1 RF Output Power.....	11
5.2 Unwanted Emissions below 1 GHz .....	11
5.3 Unwanted Emissions above 1 GHz.....	11
<b>6 Test Arrangements.....</b>	<b>12</b>
6.1 RF Output Power.....	12
6.1.1 Test Setup .....	12
6.1.2 Test Procedure.....	12
6.2 Unwanted Emissions below 1 GHz .....	13
6.2.1 Test Setup .....	13
6.2.2 Test Procedure.....	14
6.3 Unwanted Emissions above 1 GHz.....	15
6.3.1 Test Setup .....	15
6.3.2 Test Procedure.....	15
<b>7 Test Results of Test Item .....</b>	<b>16</b>
7.1 RF Output Power.....	16
7.2 Unwanted Emissions below 1 GHz .....	17
7.3 Unwanted Emissions above 1 GHz.....	19
<b>8 Pictures of Test Arrangements .....</b>	<b>23</b>
<b>9 Information of the Testing Laboratories .....</b>	<b>24</b>

## Release Control Record

Issue No.	Description	Date Issued
RFBERD-WTW-P21100651A-1	Original Release	2023/6/16

## 1 Certificate

**Product:** 802.11a/b/g/n/ac + BT 4.1 Module

**Brand:** USI

**Test Model:** WM-BAC-BM-25-FF3

**Series Model:** WM-BAC-BM-25, WM-BAC-BM-25\_FF2

**Sample Status:** Engineering Sample

**Applicant:** Universal Global Scientific Industrial Co., Ltd.

**Test Date:** 2023/5/10 ~ 2023/5/23

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Measurement procedure:** ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	N/A	Refer to Note
15.247(a)(2)	6 dB Bandwidth	N/A	Refer to Note
15.247(d)	Conducted Out of Band Emissions	N/A	Refer to Note
15.207	AC Power Conducted Emissions	N/A	Refer to Note
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -4.4 dB at 76.56 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -8.3 dB at 2487.69 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Notes:

- Only test item of Radiated Emissions and Maximum Peak Output Power were performed for this report. Other testing data please refer to original report no.: RF190103E03-3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 1 GHz	2.95 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	802.11a/b/g/n/ac + BT 4.1 Module
Brand	USI
Test Model	WM-BAC-BM-25-FF3
Series Model	WM-BAC-BM-25, WM-BAC-BM-25_FF2
Status of EUT	Engineering Sample
Power Supply Rating	3.6 Vdc (host equipment)
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	Up to 1 Mbps
Operating Frequency	2.402 GHz ~ 2.48 GHz
Number of Channel	40
Output Power	5.333 mW (7.27 dBm)

Note:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report to BV CPS report no. RF190103E03-3 and RFBERD-WTW-P21100651-1. The difference compared with original report is listed as below, only test item of Radiated Emissions and Maximum Peak Output Power were performed for this report.
  - Added one Model Name: WM-BAC-BM-25-FF3
  - Change Ant. Matching , power reduce
2. All models are listed as below.

Brand	Model	Difference
USI	WM-BAC-BM-25	All models are electrically identical, different model names are for marketing purpose.
	WM-BAC-BM-25_FF2	
	WM-BAC-BM-25-FF3	

3. There are WLAN and Bluetooth technology used for the EUT.
4. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	Bluetooth
2	WLAN 5GHz	Bluetooth

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

#### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Brand	Model	Antenna Net Gain(dBi)	Frequency range (GHz)	Antenna Type	Connector Type
YANGO	ANT3216A063R2455A	1.59	2.4~2.4835	Ceramic Chip Antenna	none
		2.23	5.15~5.85		

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

### 3.3 Channel List

40 channels are provided for BT-LE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480


### 3.4 Test Mode Applicability and Tested Channel Detail

<b>Pre-Scan:</b>	EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan in these ways and find the worst case as a representative test condition.
<b>Worst Case:</b>	The worst case was found when positioned on Y-axis.

Test Item	Tested Channel	Modulation	Data Rate
Output power	0, 19, 39	GFSK	1Mb/s
RE Below 1GHz	19	GFSK	1Mb/s
RE Above 1GHz	0, 19, 39	GFSK	1Mb/s

### 3.5 Duty Cycle of Test Signal


Duty Cycle =  $394 \text{ us} / 624 \text{ us} \times 100\% = 63.1\%$

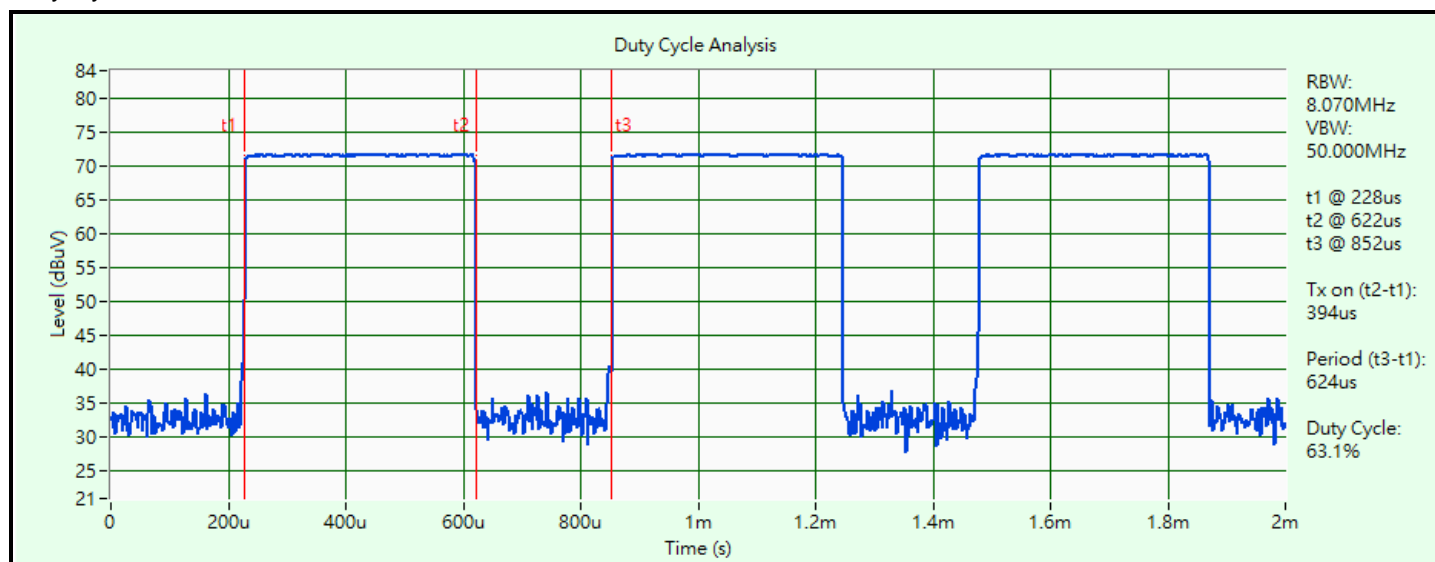

### 3.6 Test Program Used and Operation Descriptions

Controlling software Terminal Ver 3.18.3 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

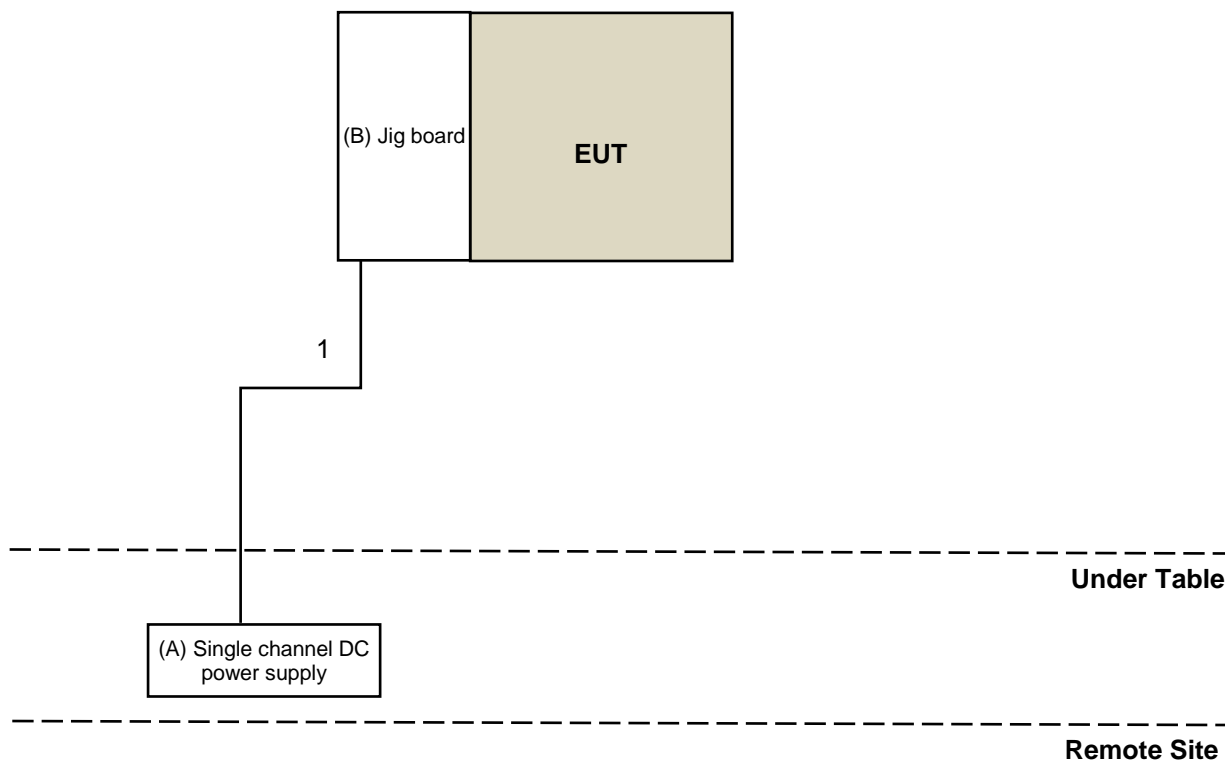

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Single channel DC power supply	JIN YIH Technology	SP3051	SP30512113422	N/A	Provided by Lab
B	Jig board	N/A	N/A	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.8	N	0	Provided by Lab



## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004/MY55190007/MY55210005	2022/7/13	2023/7/12

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/5/23

### 4.2 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-472	2022/10/21	2023/10/20
EXA Signal Analyzer Agilent	N9010A	MY52220207	2023/1/3	2024/1/2
Loop Antenna Electro-Metrics	EM-6879	269	2022/9/19	2023/9/18
Loop Antenna TESEQ	HLA 6121	45745	2022/7/27	2023/7/26
MXE EMI Receiver KEYSIGHT	N9038A	MY55420137	2023/5/3	2024/5/2
Preamplifier EMCI	EMC 330H	980112	2022/10/1	2023/9/30
	EMC001340	980201	2022/9/23	2023/9/22
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2023/1/7	2024/1/6
RF Coaxial Cable WORKEN	8D-FB	Cable-Ch10-01	2022/10/1	2023/9/30
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2023/5/10

#### 4.3 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	7	N/A	N/A
EXA Signal Analyzer Agilent	N9010A	MY52220207	2023/1/3	2024/1/2
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	2022/11/13	2023/11/12
	BBHA 9170	148	2022/11/13	2023/11/12
MXE EMI Receiver KEYSIGHT	N9038A	MY55420137	2023/5/3	2024/5/2
Notch Filter MICRO-TRONICS	BRM17690	004	2023/1/11	2024/1/10
	BRM50716	060	2023/1/11	2024/1/10
Preamplifier EMCI	EMC 012645	980115	2022/10/1	2023/9/30
	EMC 184045	980116	2022/10/1	2023/9/30
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2022/7/9	2023/7/8
	EMC102-KM-KM-3000	150929	2022/7/9	2023/7/8
	EMC104-SM-SM- 8000+3000	171005	2022/10/1	2023/9/30
RF Coaxial Cable HUBER SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	2022/10/1	2023/9/30
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2023/5/10

## 5 Limits of Test Items

### 5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 5.2 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

### 5.3 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup

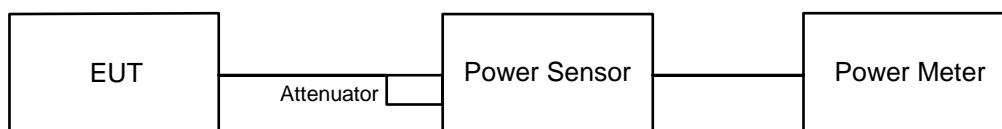

#### 6.1.2 Test Procedure

##### Peak Power:

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.


##### Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.


## 6.2 Unwanted Emissions below 1 GHz

### 6.2.1 Test Setup

#### For Radiated emission below 30 MHz

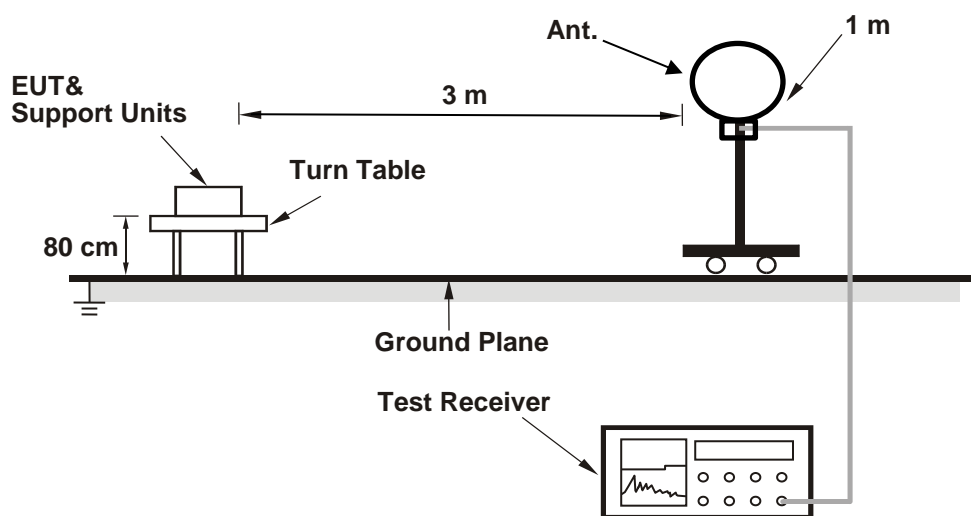

#### For Radiated emission above 30 MHz

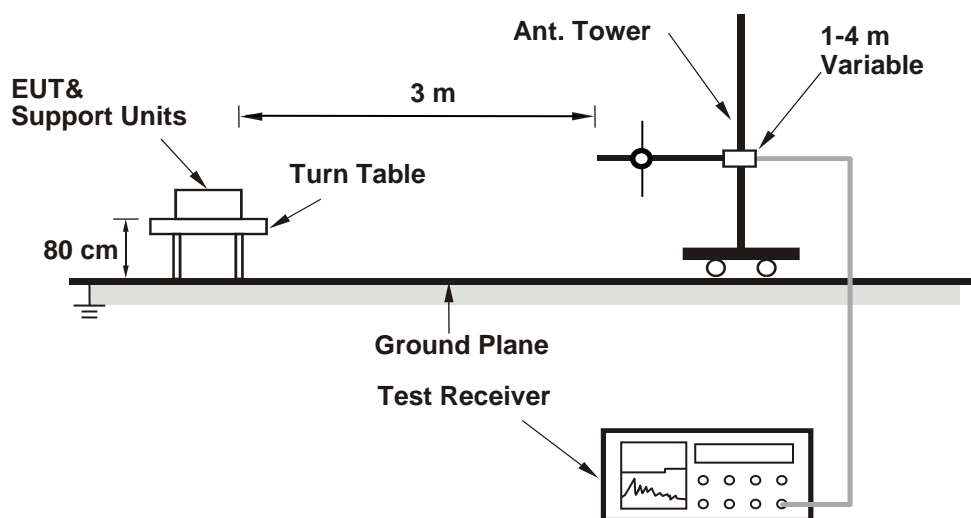

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.2.2 Test Procedure

### For Radiated emission below 30 MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
- All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 6.3 Unwanted Emissions above 1 GHz

### 6.3.1 Test Setup

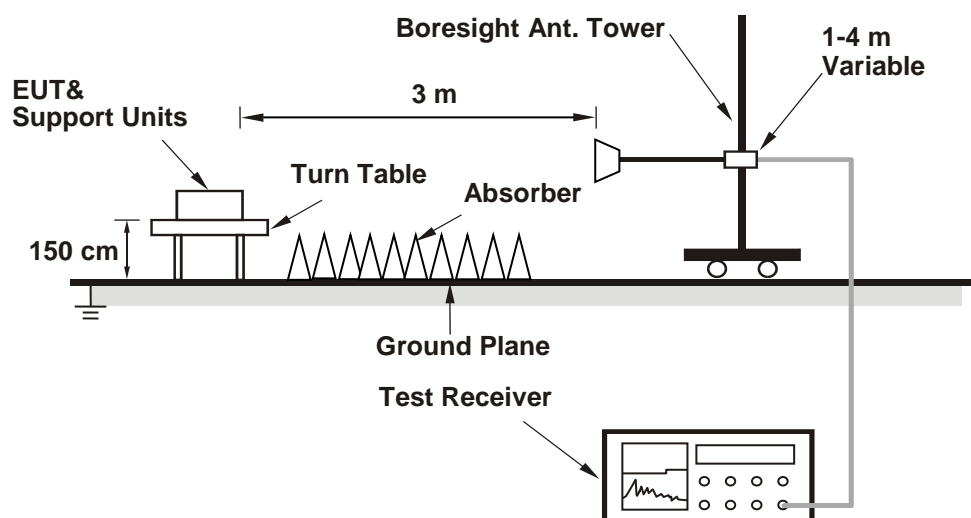

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.3.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 RF Output Power

Input Power:	3.6 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Ivan Tseng
--------------	---------	---------------------------	--------------	------------	------------

#### For Peak Power

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	5.035	7.02	30	Pass
19	2440	5.333	7.27	30	Pass
39	2480	4.732	6.75	30	Pass

Note: The antenna gain is 1.59 dBi < 6 dBi, so the output power limit shall not be reduced.

#### For Average Power

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	4.909	6.91
19	2440	5.212	7.17
39	2480	4.613	6.64




## 7.2 Unwanted Emissions below 1 GHz

RF Mode	BT-LE 1M	Channel	CH 19 : 2440 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.3°C, 65.2% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.58	32.0 QP	40.0	-8.0	1.00 H	73	44.4	-12.4
2	76.56	35.6 QP	40.0	-4.4	2.00 H	245	51.6	-16.0
3	180.35	32.0 QP	43.5	-11.5	2.00 H	272	46.1	-14.1
4	289.96	27.6 QP	46.0	-18.4	1.00 H	201	39.6	-12.0
5	586.78	27.3 QP	46.0	-18.7	1.50 H	105	33.0	-5.7
6	911.73	32.5 QP	46.0	-13.5	1.00 H	275	33.4	-0.9

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

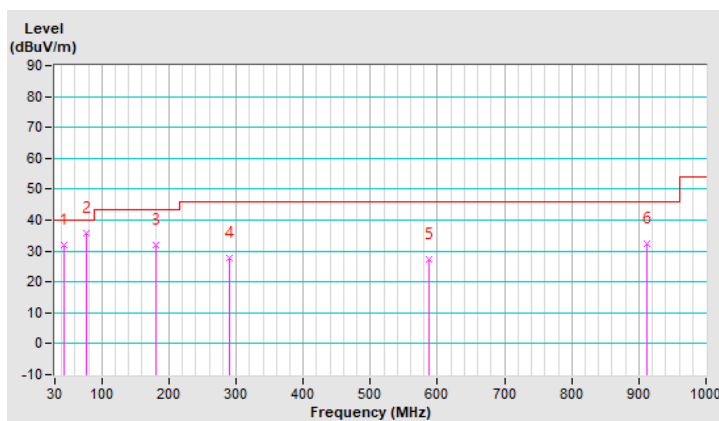


RF Mode	BT-LE 1M	Channel	CH 19 : 2440 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.3°C, 65.2% RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.85	35.1 QP	40.0	-4.9	1.00 V	148	48.0	-12.9
2	66.86	35.2 QP	40.0	-4.8	1.50 V	12	49.0	-13.8
3	141.55	27.7 QP	43.5	-15.8	2.00 V	358	40.3	-12.6
4	464.56	24.9 QP	46.0	-21.1	2.00 V	45	32.6	-7.7
5	634.31	27.5 QP	46.0	-18.5	1.50 V	2	32.1	-4.6
6	937.92	32.1 QP	46.0	-13.9	2.00 V	54	32.7	-0.6

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

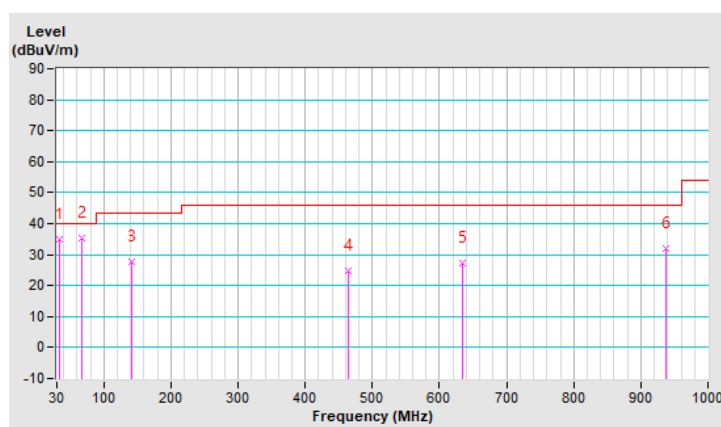

### 7.3 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.7°C, 67.2% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.2 PK	74.0	-20.8	3.01 H	41	55.7	-2.5
2	2390.00	42.9 AV	54.0	-11.1	3.01 H	41	45.4	-2.5
3	*2402.00	92.1 PK			3.01 H	41	58.0	34.1
4	*2402.00	91.2 AV			3.01 H	41	57.1	34.1
5	4804.00	51.5 PK	74.0	-22.5	3.21 H	164	55.5	-4.0
6	4804.00	42.2 AV	54.0	-11.8	3.21 H	164	46.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.2 PK	74.0	-20.8	1.73 V	339	55.7	-2.5
2	2390.00	42.8 AV	54.0	-11.2	1.73 V	339	45.3	-2.5
3	*2402.00	98.2 PK			1.73 V	339	64.1	34.1
4	*2402.00	97.6 AV			1.73 V	339	63.5	34.1
5	4804.00	51.8 PK	74.0	-22.2	2.63 V	174	55.8	-4.0
6	4804.00	41.8 AV	54.0	-12.2	2.63 V	174	45.8	-4.0

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.7°C, 67.2% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	95.7 PK			3.29 H	28	61.4	34.3
2	*2440.00	94.7 AV			3.29 H	28	60.4	34.3
3	4880.00	50.3 PK	74.0	-23.7	2.15 H	13	54.5	-4.2
4	4880.00	40.4 AV	54.0	-13.6	2.15 H	13	44.6	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	101.9 PK			1.78 V	338	67.6	34.3
2	*2440.00	101.0 AV			1.78 V	338	66.7	34.3
3	4880.00	51.2 PK	74.0	-22.8	2.03 V	185	55.4	-4.2
4	4880.00	41.1 AV	54.0	-12.9	2.03 V	185	45.3	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 39 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22.7°C, 67.2% RH
<b>Tested By</b>	Vincent Chen		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	95.3 PK			1.31 H	343	60.9	34.4
2	*2480.00	94.4 AV			1.31 H	343	60.0	34.4
3	2483.50	54.6 PK	74.0	-19.4	1.31 H	343	56.5	-1.9
4	2483.50	43.7 AV	54.0	-10.3	1.31 H	343	45.6	-1.9
5	4960.00	50.0 PK	74.0	-24.0	2.24 H	138	54.3	-4.3
6	4960.00	40.3 AV	54.0	-13.7	2.24 H	138	44.6	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	104.0 PK			1.77 V	336	69.6	34.4
2	*2480.00	103.2 AV			1.77 V	336	68.8	34.4
3	2487.69	55.3 PK	74.0	-18.7	1.77 V	336	57.2	-1.9
4	<b>2487.69</b>	<b>45.7 AV</b>	<b>54.0</b>	<b>-8.3</b>	<b>1.77 V</b>	<b>336</b>	<b>47.6</b>	<b>-1.9</b>
5	4960.00	51.0 PK	74.0	-23.0	2.31 V	141	55.3	-4.3
6	4960.00	40.9 AV	54.0	-13.1	2.31 V	141	45.2	-4.3

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

## Plot of Band Edge


BT-LE 1M Channel 0

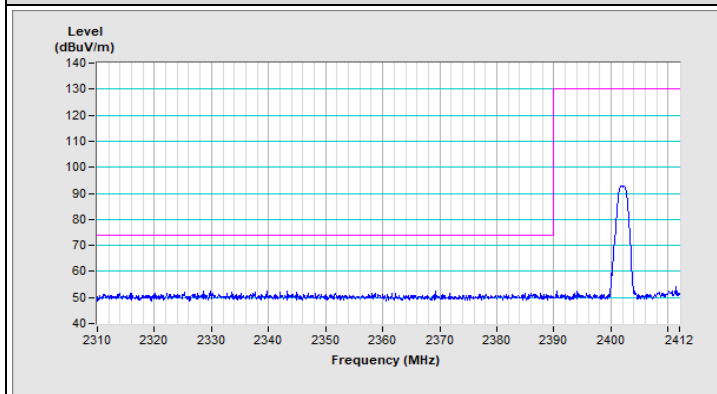


Horizontal (Peak)

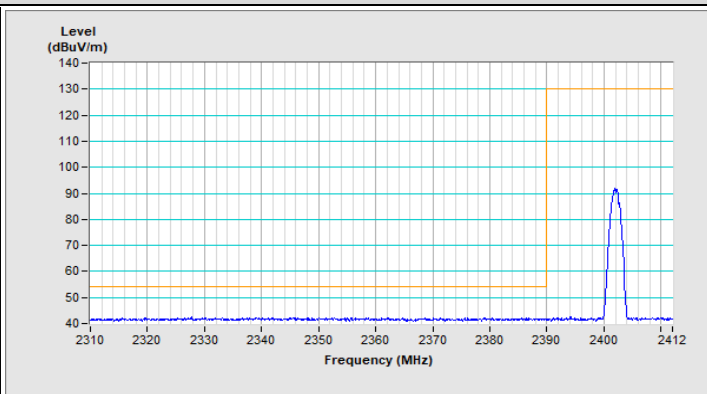

Horizontal (Average)

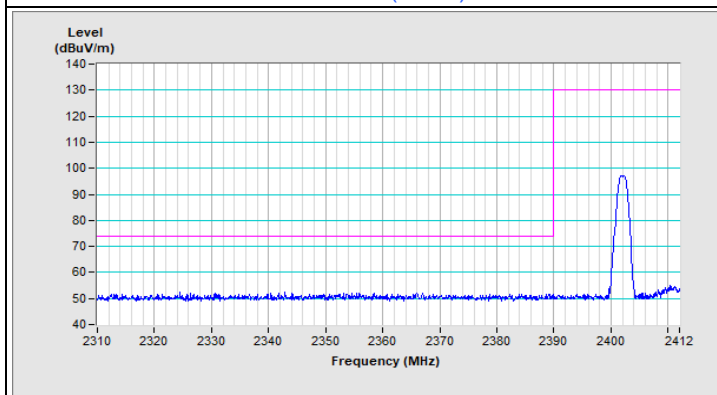


Vertical (Peak)

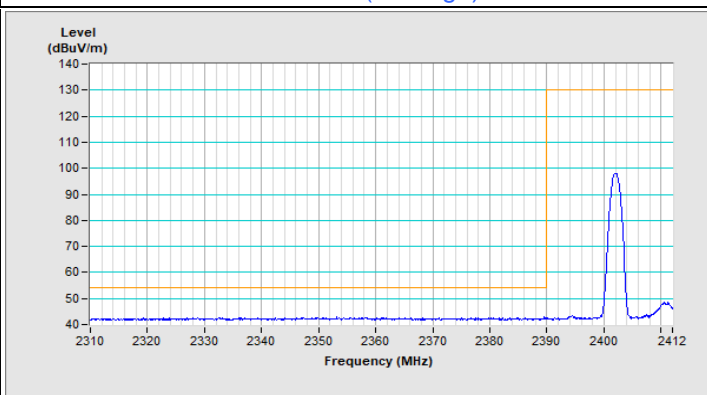


Vertical (Average)


BT-LE 1M Channel 39

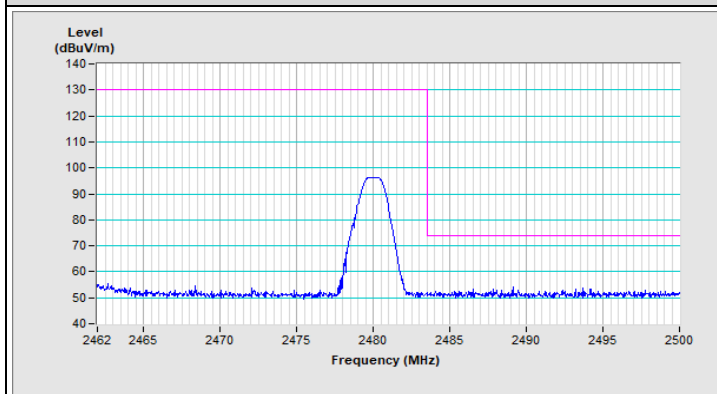


Horizontal (Peak)

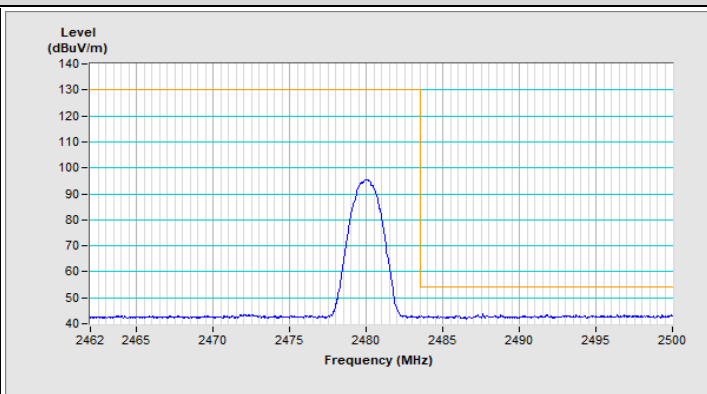

Horizontal (Average)

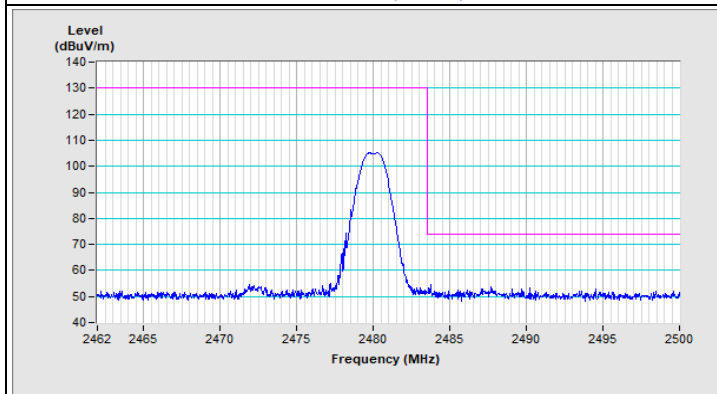

Vertical (Peak)

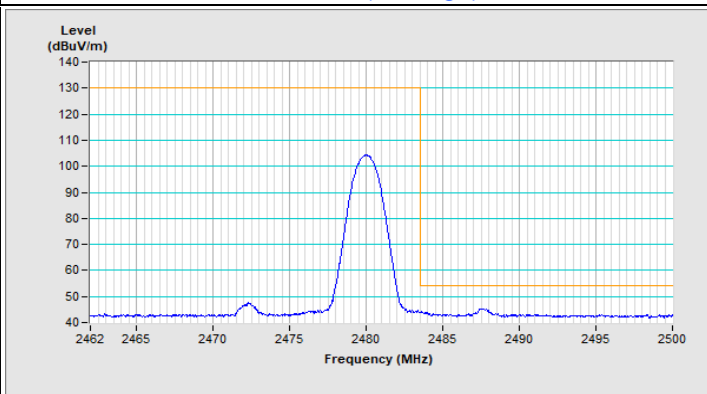

Vertical (Average)

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---