

FCC Test Report

FCC ID : COFHOOKREV3
Equipment : 802.11b/g/n + BT 5.0 IOT Module
Brand Name : USI
Model Name : HOOK-REV3.0
Applicant : Universal Global Scientific Industrial Co., Ltd
141, Lane 351, Sec. 1, Taiping Road., Tsaotuen, Nantou
54261, Taiwan
Manufacturer : Universal Global Scientific Industrial Co., Ltd
141, Lane 351, Sec. 1, Taiping Road., Tsaotuen, Nantou
54261, Taiwan
Standard : 47 CFR FCC Part 15.247

The product was received on Nov. 15, 2018, and testing was started from Jan. 24, 2019 and completed on Jan. 25, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

1.1 Information.....5

1.2 Testing Applied Standards7

1.3 Testing Location Information7

1.4 Measurement Uncertainty7

2 TEST CONFIGURATION OF EUT.....8

2.1 Test Condition8

2.2 Test Channel Mode8

2.3 The Worst Case Measurement Configuration.....9

2.4 Support Equipment.....10

2.5 Test Setup Diagram11

3 TRANSMITTER TEST RESULT12

3.1 AC Power-line Conducted Emissions12

3.2 20dB Bandwidth and Carrier Frequency Separation.....14

3.3 Maximum Conducted Output Power15

3.4 Number of Hopping Frequencies and Hopping Bandedge16

3.5 Time of Occupancy (Dwell Time)17

3.6 Emissions in Non-restricted Frequency Bands18

3.7 Emissions in Restricted Frequency Bands.....19

4 TEST EQUIPMENT AND CALIBRATION DATA.....22

APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS

APPENDIX B. TEST RESULTS OF 20DB BANDWIDTH AND CARRIER FREQUENCY SEPARATION

APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER

APPENDIX D. TEST RESULTS OF NUMBER OF HOPPING FREQUENCIES AND HOPPING BANDEDGE

APPENDIX E. TEST RESULTS OF TIME OF OCCUPANCY (DWELL TIME)

APPENDIX F. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

APPENDIX G. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS

APPENDIX H. TEST PHOTOS

PHOTOGRAPHS OF EUT V01



History of this test report

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|---------------|
| FR8N1407AD | 01 | Initial issue of report | Mar. 29, 2019 |
| FR8N1407AD | 02 | Add conduction | Apr. 01, 2019 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Summary of Test Result

| Report Clause | Ref. Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|------------------|--|--------------------|---------------------------------|
| 1.1.2 | 15.203 | Antenna Requirement | PASS | FCC 15.203 |
| 3.1 | 15.207 | AC Power-line Conducted Emissions | PASS | FCC 15.207 |
| 3.2 | 15.247(a) | 20dB Bandwidth | PASS | 15.247(a) |
| 3.2 | 15.247(a) | Carrier Frequency Separation | PASS | 15.247(a) |
| 3.3 | 15.247(b) | Maximum Conducted Output Power | PASS | 15.247(b) |
| 3.4 | 15.247(a) | Number of Hopping Frequencies and Hopping Bandedge | PASS | 15.247(a) |
| 3.5 | 15.247(a) | Time of Occupancy (Dwell Time) | PASS | 15.247(a) |
| 3.6 | 15.247(d) | Emissions in Non-restricted Frequency Bands | PASS | 15.247(d) |
| 3.7 | 15.247(d) | Emissions in Restricted Frequency Bands | PASS | Restricted Bands: FCC 15.209 |

| |
|--|
| Declaration of Conformity: |
| The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. |
| Comments and explanations: |
| None |

Reviewed by: Sam Tsai

Report Producer: Debby Hung

1 General Description

1.1 Information

1.1.1 RF General Information

| Frequency Range (MHz) | Bluetooth Version | Ch. Frequency (MHz) | Channel Number |
|-----------------------|-------------------|---------------------|----------------|
| 2400-2483.5 | BR / EDR | 2402-2480 | 0-78 [79] |

| Band | Mode | BWch (MHz) | Nant |
|---------------|---------------|------------|------|
| 2.4-2.4835GHz | BT-BR(1Mbps) | 1 | 1TX |
| 2.4-2.4835GHz | BT-EDR(2Mbps) | 1 | 1TX |
| 2.4-2.4835GHz | BT-EDR(3Mbps) | 1 | 1TX |

Note:

- ◆ Bluetooth BR uses a GFSK (1Mbps).
- ◆ Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).
- ◆ Bluetooth BR/EDR uses as a system using FHSS modulation.
- ◆ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

| Ant. | Brand | Model Name | Antenna Type | Connector |
|------|-------|----------------|------------------|--------------|
| 1 | Linx | ANT-2.4-CW-RAH | Monopole Antenna | Reversed-SMA |

| Ant. | Port | Gain (dBi) | |
|------|------|------------|------|
| | | 2.4G | BT |
| 1 | 1 | -2.4 | -2.4 |

For 2.4 GHz function:

For IEEE 802.11b/g/n mode (1TX/1RX)

Ant. 1 (port 1) could transmit/receive simultaneously.

For Bluetooth function:

For Bluetooth mode (1TX/1RX)

Ant. 1 (port 1) could transmit/receive simultaneously.



1.1.3 EUT Information

| Operational Condition | |
|-------------------------------------|---|
| EUT Power Type | DC Power Source |
| EUT Function | <input checked="" type="checkbox"/> Point-to-multipoint <input type="checkbox"/> Point-to-point |
| Type of EUT | |
| <input checked="" type="checkbox"/> | Stand-alone |
| <input type="checkbox"/> | Combined (EUT where the radio part is fully integrated within another device) |
| | Combined Equipment - Brand Name / Model No.: ... |
| <input type="checkbox"/> | Plug-in radio (EUT intended for a variety of host systems) |
| | Host System - Brand Name / Model No.: ... |
| <input type="checkbox"/> | Other: |

1.1.4 Mode Test Duty Cycle

| Mode | DC | DCF(dB) | T(s) | VBW(Hz) ≥ 1/T |
|---------------|-------|---------|--------|---------------|
| BT-BR(1Mbps) | 0.774 | 1.113 | 2.944m | 1k |
| BT-EDR(2Mbps) | 0.785 | 1.051 | 2.89m | 1k |
| BT-EDR(3Mbps) | 0.783 | 1.062 | 2.892m | 1k |

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ KDB 558074 D01 v05r01
- ◆ ANSI C63.10-2013

1.3 Testing Location Information

| Testing Location | | |
|--|--------|--|
| <input checked="" type="checkbox"/> | HWA YA | ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973 |
| Test site Designation No. TW1190 with FCC. | | |
| <input type="checkbox"/> | JHUBEI | ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.) TEL : 886-3-656-9065 FAX : 886-3-656-9085 |
| Test site Designation No. TW0006 with FCC. | | |

| Test Condition | Test Site No. | Test Engineer | Test Environment | Test Date |
|----------------|---------------|---------------|------------------|-------------|
| AC Conduction | CO04-HY | Lego | 23°C / 54% | 25/Jan/2019 |
| RF Conducted | TH01-HY | Clara | 22.5°C / 65% | 24/Jan/2019 |
| Radiated | 03CH09-HY | Kevin | 20.4°C / 47% | 24/Jan/2019 |

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Test Items | Uncertainty | Remark |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz) | 3.54 dB | Confidence levels of 95% |
| Radiated Emission (9kHz ~ 30MHz) | 1.6 dB | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 4.3 dB | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz) | 3.9 dB | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 3.5 dB | Confidence levels of 95% |
| Conducted Emission | 1.3 dB | Confidence levels of 95% |
| Temperature | 0.7 °C | Confidence levels of 95% |
| Humidity | 4 % | Confidence levels of 95% |

2 Test Configuration of EUT

2.1 Test Condition

| Condition Item | Abbreviation/Remark | Remark |
|----------------|---------------------|--------|
| RF Conducted | Abbreviation | Remark |
| TnomVnom | Tnom | 20°C |
| - | Vnom | 3.8V |

2.2 Test Channel Mode


| Test Software | cmd |
|---------------|-----|
| | |

| Mode | Power Setting |
|---------------|---------------|
| BT-BR(1Mbps) | - |
| 2402MHz | 0 |
| 2441MHz | 0 |
| 2480MHz | 0 |
| BT-EDR(2Mbps) | - |
| 2402MHz | 0 |
| 2441MHz | 0 |
| 2480MHz | 0 |
| BT-EDR(3Mbps) | - |
| 2402MHz | 0 |
| 2441MHz | 0 |
| 2480MHz | 0 |

2.3 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | AC power-line conducted emissions |
| Condition | AC power-line conducted measurement for line and neutral |
| Operating Mode | CTX |
| 1 | DC mode |

| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | 20dB Bandwidth Carrier Frequency Separation Maximum Conducted Output Power Number of Hopping Frequencies Hopping Bandedge Time of Occupancy (Dwell Time) Emissions in Non-restricted Frequency Bands |
| Test Condition | Conducted measurement at transmit chains |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Emissions in Restricted Frequency Bands |
| Test Condition | Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| Operating Mode < 1GHz | CTX |
| 1 | DC mode |
| Operating Mode > 1GHz | CTX |
| Orthogonal Planes of EUT | Z Plane |
| |  |
| Worst Planes of EUT | V |

2.4 Support Equipment

| Support Equipment – AC Conduction | | | | |
|-----------------------------------|-----------------|------------|------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| 1 | DC power supply | GW | GPS-3030DD | - |
| 2 | Test Fixture | - | - | - |
| 3 | Antenna | - | - | - |

Note.Support equipment No.3 was provided by customer.



| Support Equipment – RF Conducted | | | | |
|----------------------------------|-----------------|------------|---------------|--------------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| 1 | PC | ASUS | D302MT | - |
| 2 | Monitor | DELL | VCDTS21553-3P | R35737 / DOC |
| 3 | DC Power Supply | GW | GPS-3030DD | - |
| 4 | Test Fixture | - | - | - |

Note.Support equipment No.1 was provided by customer.

| Support Equipment – Radiated Emission | | | | |
|---------------------------------------|-----------------|------------|------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| 1 | DC Power Supply | GW | GPS-3030DD | - |
| 2 | Test Fixture | - | - | - |
| 3 | Antenna | - | - | - |

Note.Support equipment No.3 was provided by customer.

2.5 Test Setup Diagram

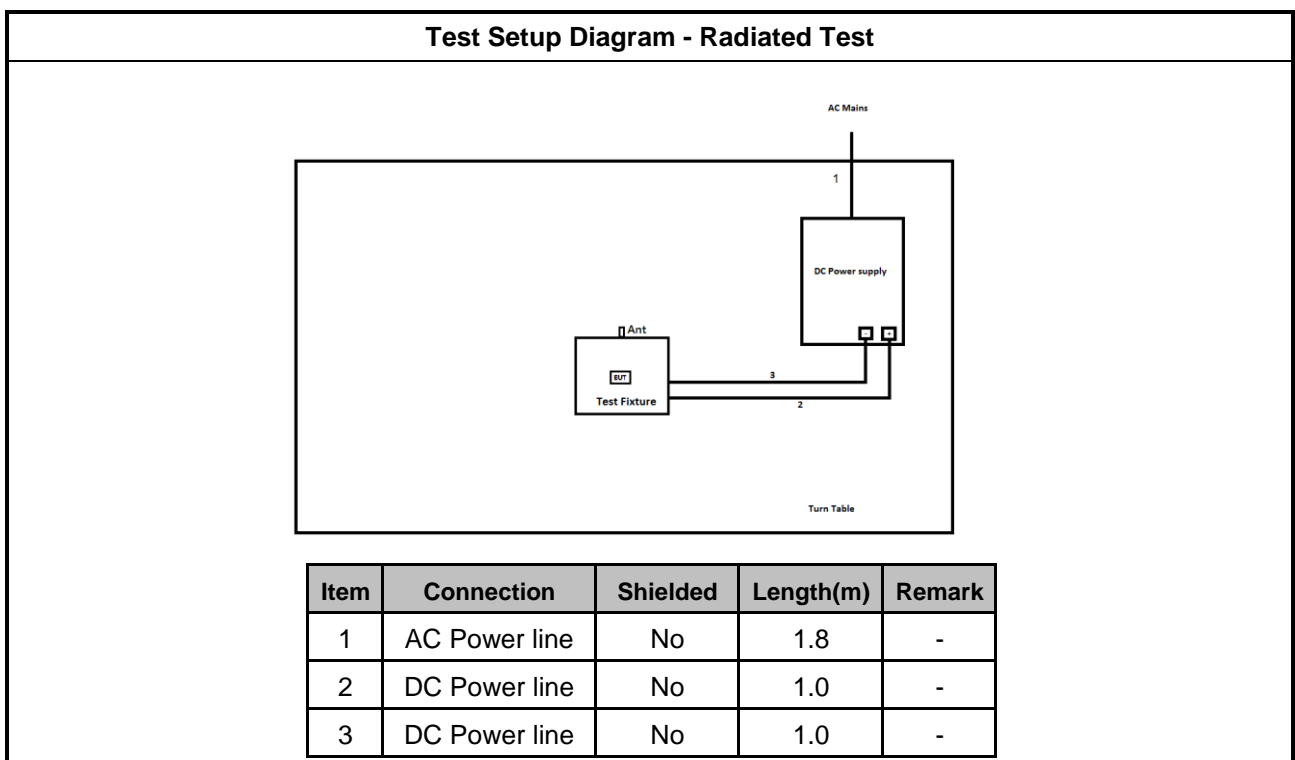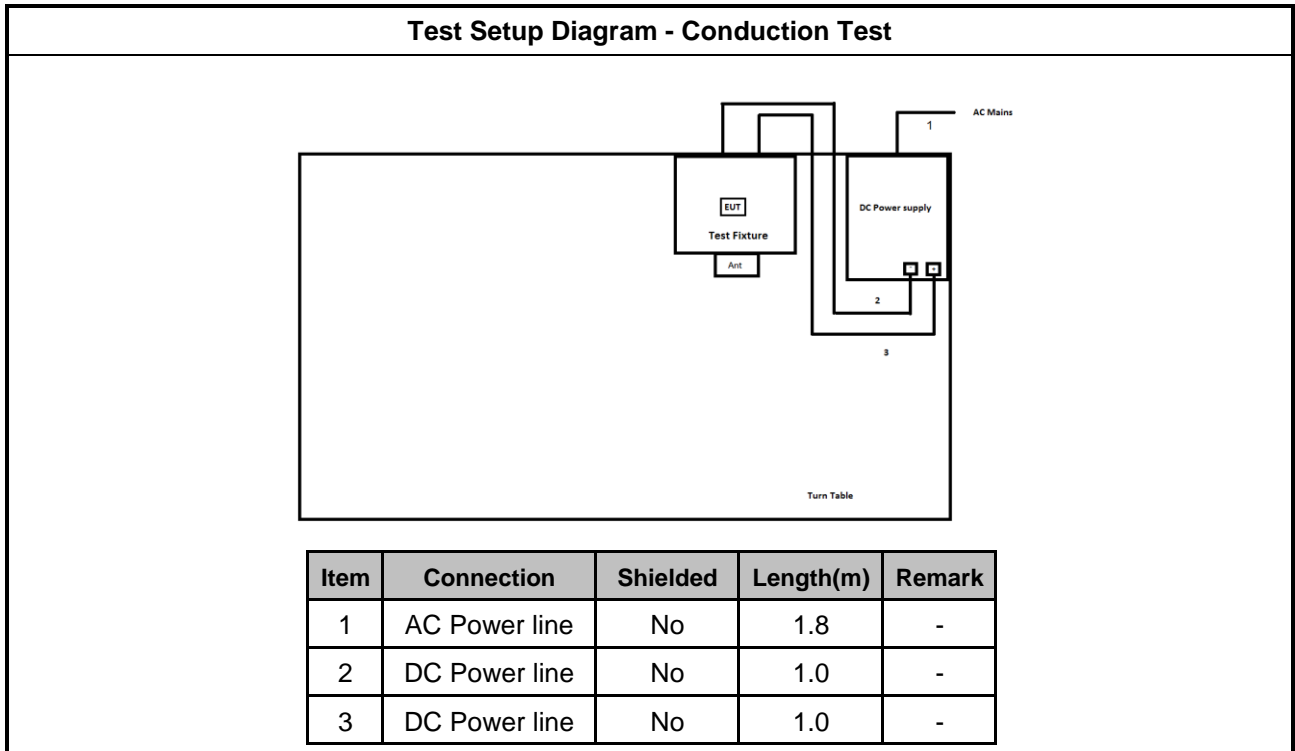

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit | | |
|---|------------|-----------|
| Frequency Emission (MHz) | Quasi-Peak | Average |
| 0.15-0.5 | 66 - 56 * | 56 - 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

| Test Method |
|--|
| <input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

3.1.4 Test Setup

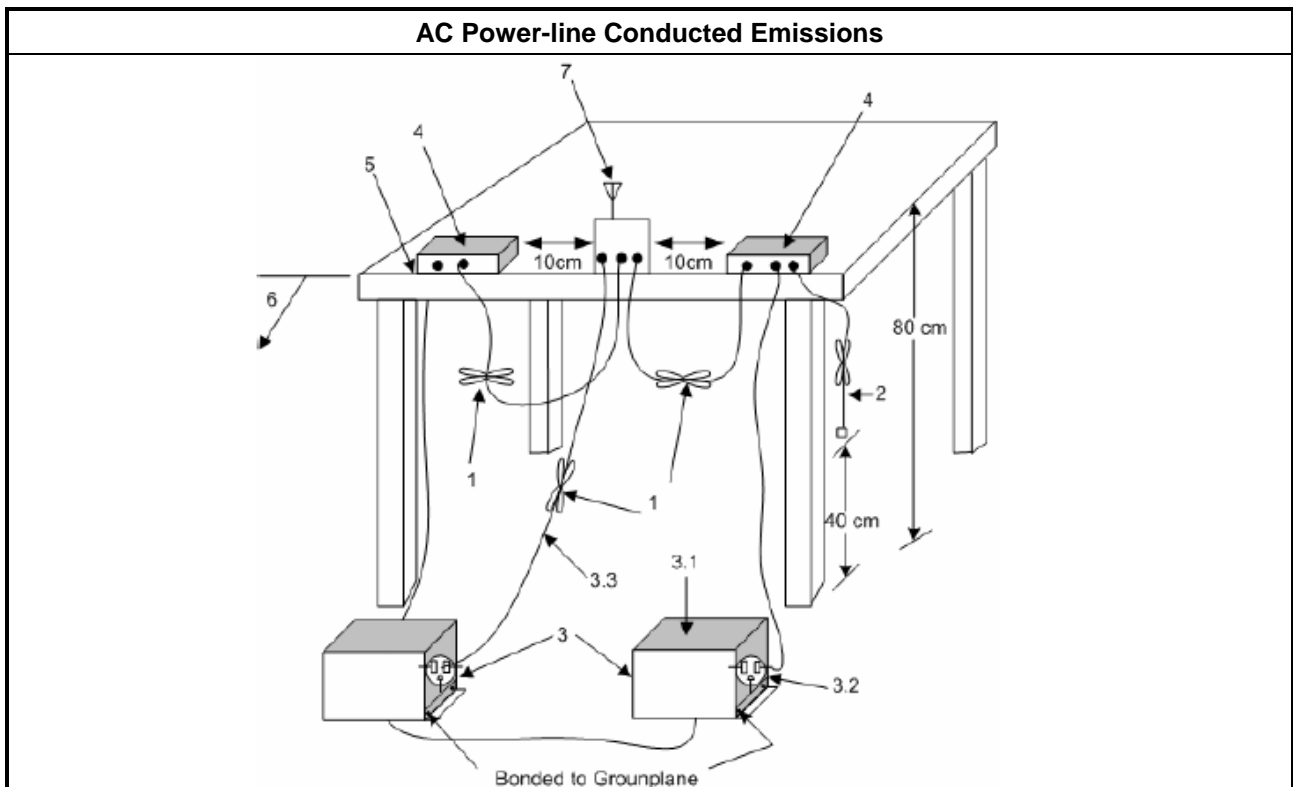



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 20dB Bandwidth and Carrier Frequency Separation

3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

| 20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems | |
|---|--|
| <ul style="list-style-type: none"> ▪ 2400-2483.5 MHz Band: | |
| | <ul style="list-style-type: none"> ▪ $N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz). |
| | <ul style="list-style-type: none"> ▪ $75 > N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth 2/3,25 kHz). |
| N: Number of Hopping Frequencies; ChS: Hopping Channel Separation | |


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

| Test Method |
|---|
| <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10-2013, clause 6.9.2 for 20 dB bandwidth measurement. |
| <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10-2013, clause 7.8.2 for carrier frequency separation measurement. |

3.2.4 Test Setup

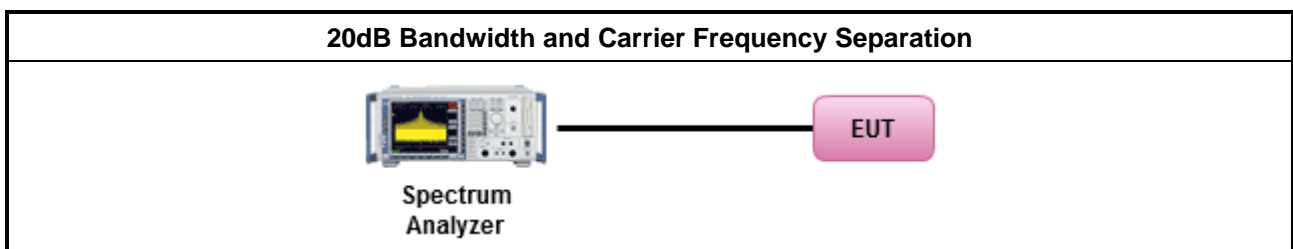

3.2.5 Test Result of 20dB Bandwidth

Refer as Appendix B

3.2.6 Test Result of Carrier Frequency Separation

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

| Maximum Conducted Output Power Limit | |
|---|---|
| <ul style="list-style-type: none"> ▪ 2400-2483.5 MHz Band: | |
| | <ul style="list-style-type: none"> ▪ $N \geq 75$; Power 30dBm; EIRP 36dBm |
| | <ul style="list-style-type: none"> ▪ $75 > N \geq 15$; Power 21dBm; EIRP 27dBm |
| N: Number of Hopping Frequencies | |


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

| Test Method |
|---|
| <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10-2013, clause 7.8.5 for output power measurement. |

3.3.4 Test Setup

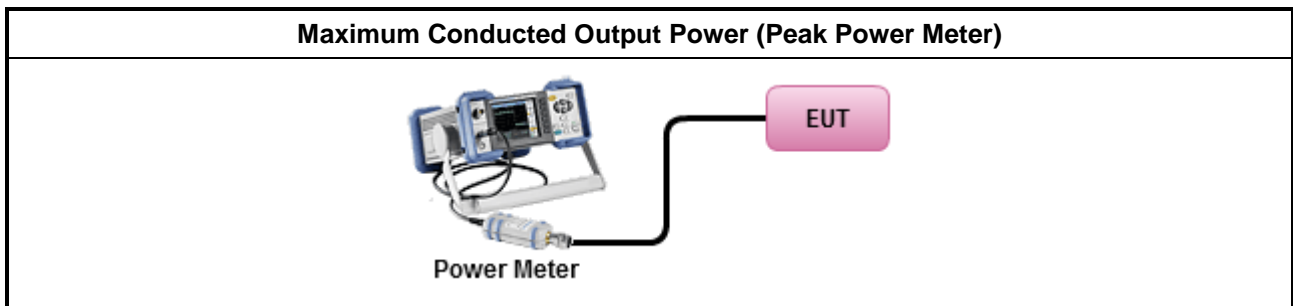

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Number of Hopping Frequencies and Hopping Bandedge

3.4.1 Number of Hopping Frequencies Limit

| Number of Hopping Frequencies Limit | |
|--|--|
| <ul style="list-style-type: none"> 2400-2483.5 MHz Band: | |
| | <ul style="list-style-type: none"> $N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz). |
| | <ul style="list-style-type: none"> $75 > N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth 2/3,25 kHz). |
| N: Number of Hopping Frequencies; ChS : Hopping Channel Separation | |

3.4.2 Hopping Bandedge Limit

Refer clause 3.6.1 and clause 3.7.1


3.4.3 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.4 Test Procedures

| Test Method |
|--|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.3 for number of hopping frequencies measurement. |
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.6 for hopping frequencies Bandedge measurement. |

3.4.5 Test Setup

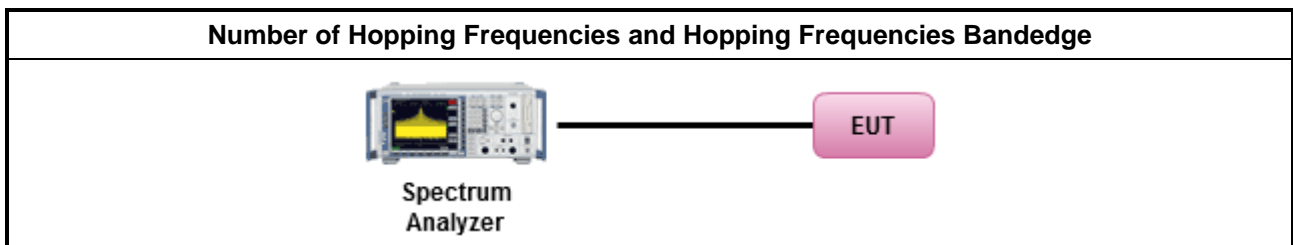

3.4.6 Test Result of Number of Hopping Frequencies

Refer as Appendix D

3.4.7 Test Result of Number of Hopping Frequencies Bandedge

Refer as Appendix D

3.5 Time of Occupancy (Dwell Time)

3.5.1 Time of Occupancy (Dwell Time) Limit

| Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems | |
|---|--|
| <ul style="list-style-type: none"> 2400-2483.5 MHz Band: | |
| | <ul style="list-style-type: none"> $N \geq 75$; 0.4s in $N \times 0.4$ period |
| | <ul style="list-style-type: none"> $75 > N \geq 15$; 0.4s in $N \times 0.4$ period |
| N: Number of Hopping Frequencies | |


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

| Test Method | |
|--|--|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.4 for dwell time measurement. | |
| <ul style="list-style-type: none"> Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle. | |
| | <ul style="list-style-type: none"> The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel. |

3.5.4 Test Setup

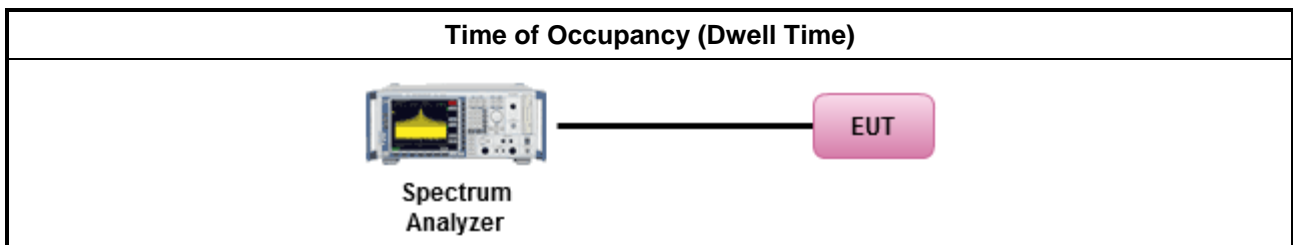

3.5.5 Test Result of Time of Occupancy (Dwell Time)

Refer as Appendix E

3.6 Emissions in Non-restricted Frequency Bands

3.6.1 Emissions in Non-restricted Frequency Bands Limit

| Un-restricted Band Emissions Limit | |
|---|------------|
| RF output power procedure | Limit (dB) |
| Peak output power procedure | 20 |
| Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. | |


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

| Test Method |
|---|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.8 for unwanted emissions into non-restricted bands. |

3.6.4 Test Setup

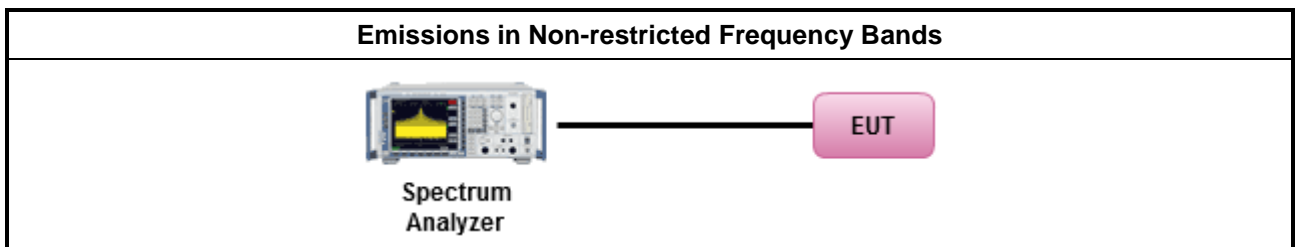

3.6.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix F

3.7 Emissions in Restricted Frequency Bands

3.7.1 Emissions in Restricted Frequency Bands Limit

| Restricted Band Emissions Limit | | | |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 |
| 1.705~30.0 | 30 | 29 | 30 |
| 30~88 | 100 | 40 | 3 |
| 88~216 | 150 | 43.5 | 3 |
| 216~960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.7.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

| Test Method | |
|-------------|--|
| | <ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [hopping duty factor]. |
| | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10; clause 6.9.2.2 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. |
| | <ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.1 QP value. ▪ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak. ▪ Refer as ANSI C63.10, clause 4.1.4.2.4 average value of hopping pulsed emissions. |

3.7.4 Test Setup

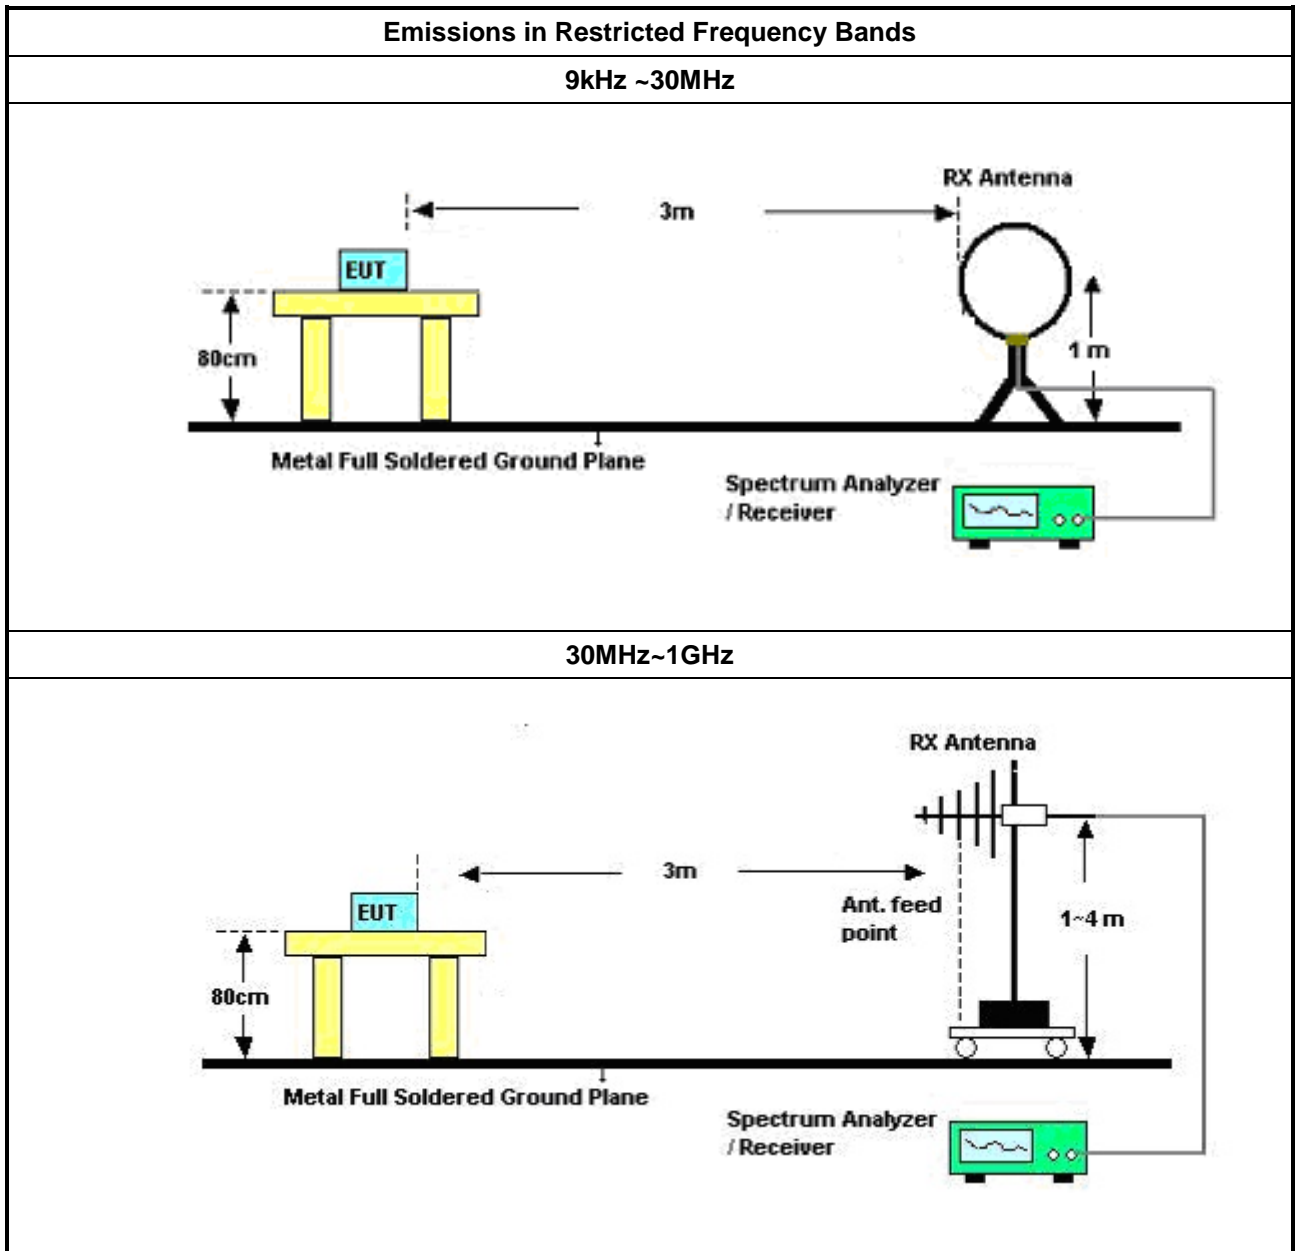

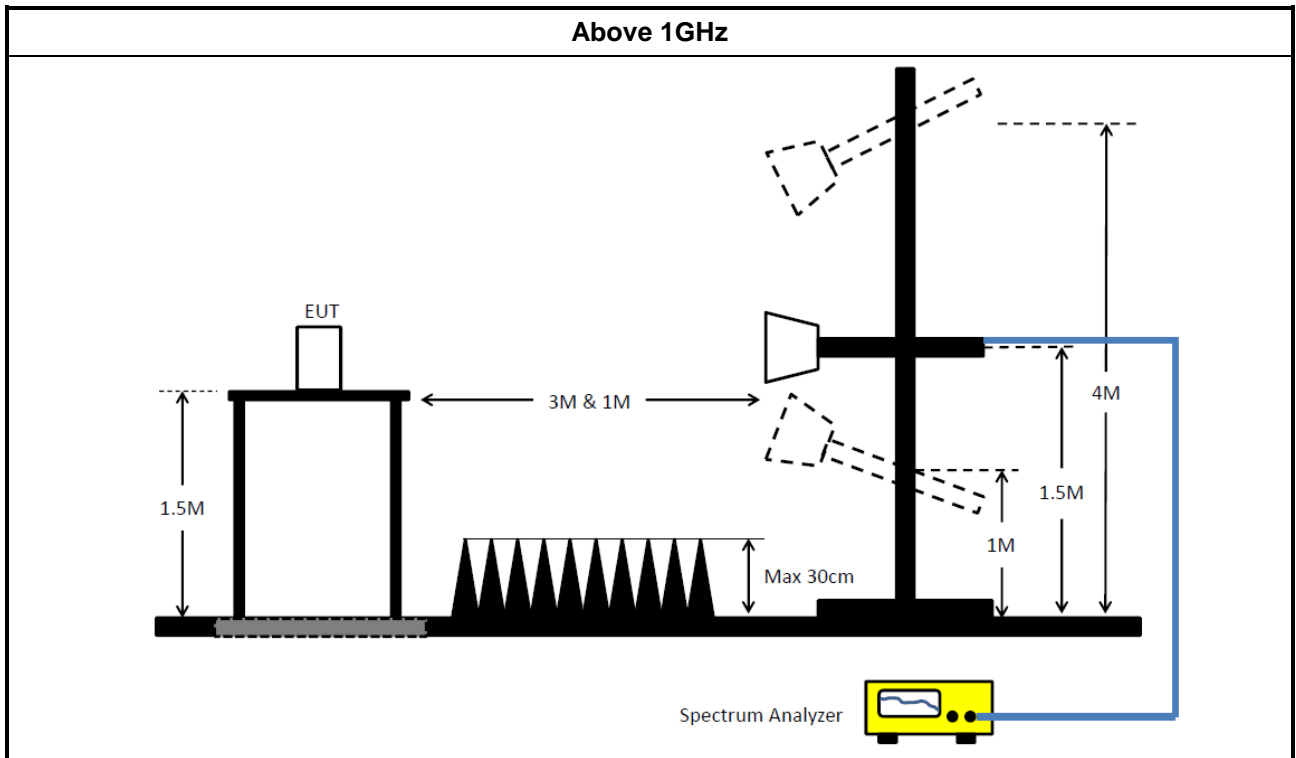

3.7.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.7.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix G



4 Test Equipment and Calibration Data

Instrument for Conducted Test

| Instrument | Manufacturer | Model No. | Serial No. | Spec. | Calibration Date | Calibration Due Date |
|------------------|--------------|--------------|------------|-----------------|------------------|----------------------|
| Signal Analyzer | R&S | FSV40 | 101500 | 10Hz ~ 40GHz | 18/Jul/2018 | 17/Jul/2019 |
| Power Sensor | Anritsu | MA2411B | 1339407 | 300MHz ~ 40GHz | 17/Nov/2018 | 16/Nov/2019 |
| Power Meter | Anritsu | ML2495A | 1517010 | 300MHz ~ 40GHz | 17/Nov/2018 | 16/Nov/2019 |
| RF Cable-0.5m | HUBER+SUHNER | SUCOFLEX_104 | MY12585/4 | 30MHz ~ 26.5GHz | 26/Jan/2018 | 25/Jan/2019 |
| RF Cable-0.2m | HUBER+SUHNER | SUCOFLEX_104 | MY10710/4 | 30MHz ~ 26.5GHz | 26/Jan/2018 | 25/Jan/2019 |
| RF Cable-0.2m | HUBER+SUHNER | SUCOFLEX_104 | MY10709/4 | 30MHz ~ 26.5GHz | 26/Jan/2018 | 25/Jan/2019 |
| Signal Generator | R&S | SMB100A | 175727 | 100kHz~40GHz | 26/Oct/2018 | 25/Oct/2019 |



Instrument for Radiated Test

| Instrument | Manufacturer | Model No. | Serial No. | Spec. | Calibration Date | Calibration Due Date |
|----------------------------------|--------------|-----------------------|----------------------|----------------|------------------|----------------------|
| 3m Semi Anechoic Chamber | TDK | SAC-3M | 03CH09-HY | 30MHz ~ 1GHz | 23/Apr/2018 | 22/Apr/2019 |
| 3m Semi Anechoic Chamber | TDK | SAC-3M | 03CH09-HY | 1GHz ~ 18GHz | 14/Jun/2018 | 13/Jun/2019 |
| Microwave Preamplifier | Agilent | 8449B | 3008A02096 | 1GHz ~ 26.5GHz | 10/May/2018 | 09/May/2019 |
| Amplifier | EMC | EMC9135 | 980232 | 9KHz~1GHz | 27/Apr/2018 | 26/Apr/2019 |
| EMI Test Receiver | R&S | ESR3 | 102052 | 9kHz ~ 3.6GHz | 10/Apr/2018 | 09/Apr/2019 |
| EXA Signal Analyzer | KEYSIGHT | N9010A | MY54200885 | 10Hz ~ 44GHz | 31/Jul/2018 | 30/Jul/2019 |
| Bilog Antenna & 5dB Attenuator | TESEQ & MTJ | CBL6111D & MTJ6102-05 | 35418 / 3 | 30MHz~1GHz | 02/Oct/2018 | 03/Oct/2019 |
| Double Ridged Guide Horn Antenna | SCHWARZBEC K | BBHA 9120 D | BBHA9120 D 1534 | 1GHz~18GHz | 30/Apr/2018 | 29/Apr/2019 |
| Broadband Horn Antenna | SCHWARZBEC K | BBHA 9170 | BBHA9170614 | 18GHz~40GHz | 09/Feb/2018 | 08/Feb/2019 |
| Preamplifier | MITEQ | TTA1840-35-HG | 1864481 | 18GHz ~ 40GHz | 24/Aug/2018 | 23/Aug/2019 |
| Loop Antenna | TESEQ | HLA 6120 | 31244 | 9k-30MHz | 29/Mar/2018 | 28/Mar/2019 |
| RF Cable-R03m | Jye Bao | RG142 | CB031 | 9kHz ~ 1GHz | 01/Feb/2018 | 31/Jan/2019 |
| RF Cable-high | HUBER+SUHNER | SUCOFLEX104 | SN 556626/4 + 556627 | 1GHz ~ 40GHz | 14/Mar/2018 | 13/Mar/2019 |
| RF Cable-high | SUHNER | SUCOFLEX104 | MY34918/4 | 1GHz ~ 40GHz | 02/Feb/2018 | 01/Feb/2019 |

Instrument for AC Conduction

| Instrument | Manufacturer | Model No. | Serial No. | Spec. | Calibration Date | Calibration Due Date |
|--------------------------------|--------------|-------------|------------|---------------------|------------------|----------------------|
| EMC Receiver | R&S | ESR | 102051 | 9KHz ~ 3.6GHz | 03/May/2018 | 02/May/2019 |
| LISN | R&S | ENV216 | 101295 | 9kHz ~ 30MHz | 08/Nov/2018 | 07/Nov/2019 |
| RF Cable-CON | MTJ | RG142 | CB002-CO | 9kHz ~ 200MHz | 17/Sep/2018 | 16/Sep/2019 |
| AC POWER | APC | AFC-11005G | F310050055 | 47Hz~63Hz 5~300V | NCR | NCR |
| Impuls Begrenzer Pulse Limiter | SCHWARZBEC K | VTSD 9561-F | 9561-F041 | 9 kHz ~ 30 MHz | 12/Oct/2018 | 11/Oct/2019 |

NCR : Non-Calibration Require




AC Power-line Conducted Emissions Result


| | | | |
|--------------------|------------|-------------|---------|
| Operating Mode | 1 | Power Phase | Neutral |
| Operating Function | DC mode_TX | | |

DC Conduction

25/01/2019

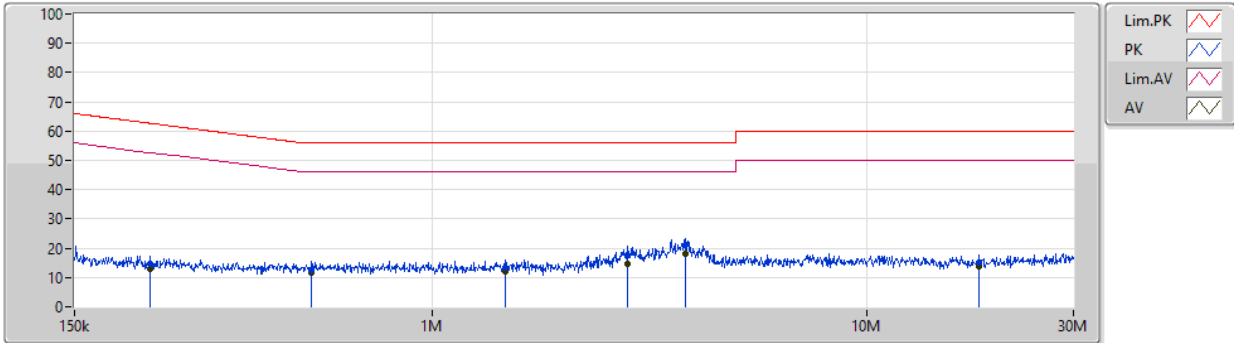

| Type | Freq (Hz) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Factor (dB) | Condition | Comment | Raw (dBuV) | LISN (dB) | CL (dB) | AT (dB) |
|------|-----------|--------------|--------------|-------------|-------------|-----------|---------|------------|-----------|---------|---------|
| QP | 224.49k | 14.48 | 62.65 | -48.17 | 19.47 | Neutral | - | -4.99 | 9.59 | 0.01 | 9.87 |
| AV | 224.49k | 12.95 | 52.65 | -39.70 | 19.47 | Neutral | - | -6.52 | 9.59 | 0.01 | 9.87 |
| QP | 527.486k | 12.45 | 56.00 | -43.55 | 19.48 | Neutral | - | -7.03 | 9.59 | 0.01 | 9.88 |
| AV | 527.486k | 11.57 | 46.00 | -34.43 | 19.48 | Neutral | - | -7.91 | 9.59 | 0.01 | 9.88 |
| QP | 1.477M | 13.40 | 56.00 | -42.60 | 19.52 | Neutral | - | -6.12 | 9.60 | 0.03 | 9.89 |
| AV | 1.477M | 12.21 | 46.00 | -33.79 | 19.52 | Neutral | - | -7.31 | 9.60 | 0.03 | 9.89 |
| QP | 2.81M | 17.83 | 56.00 | -38.17 | 19.54 | Neutral | - | -1.71 | 9.61 | 0.04 | 9.89 |
| AV | 2.81M | 14.82 | 46.00 | -31.18 | 19.54 | Neutral | - | -4.72 | 9.61 | 0.04 | 9.89 |
| QP | 3.821M | 21.30 | 56.00 | -34.70 | 19.54 | Neutral | - | 1.76 | 9.61 | 0.04 | 9.89 |
| AV | 3.821M | 18.19 | 46.00 | -27.81 | 19.54 | Neutral | "Worst" | -1.35 | 9.61 | 0.04 | 9.89 |
| QP | 18.198M | 14.96 | 60.00 | -45.04 | 19.68 | Neutral | - | -4.72 | 9.68 | 0.10 | 9.90 |
| AV | 18.198M | 13.67 | 50.00 | -36.33 | 19.68 | Neutral | - | -6.01 | 9.68 | 0.10 | 9.90 |

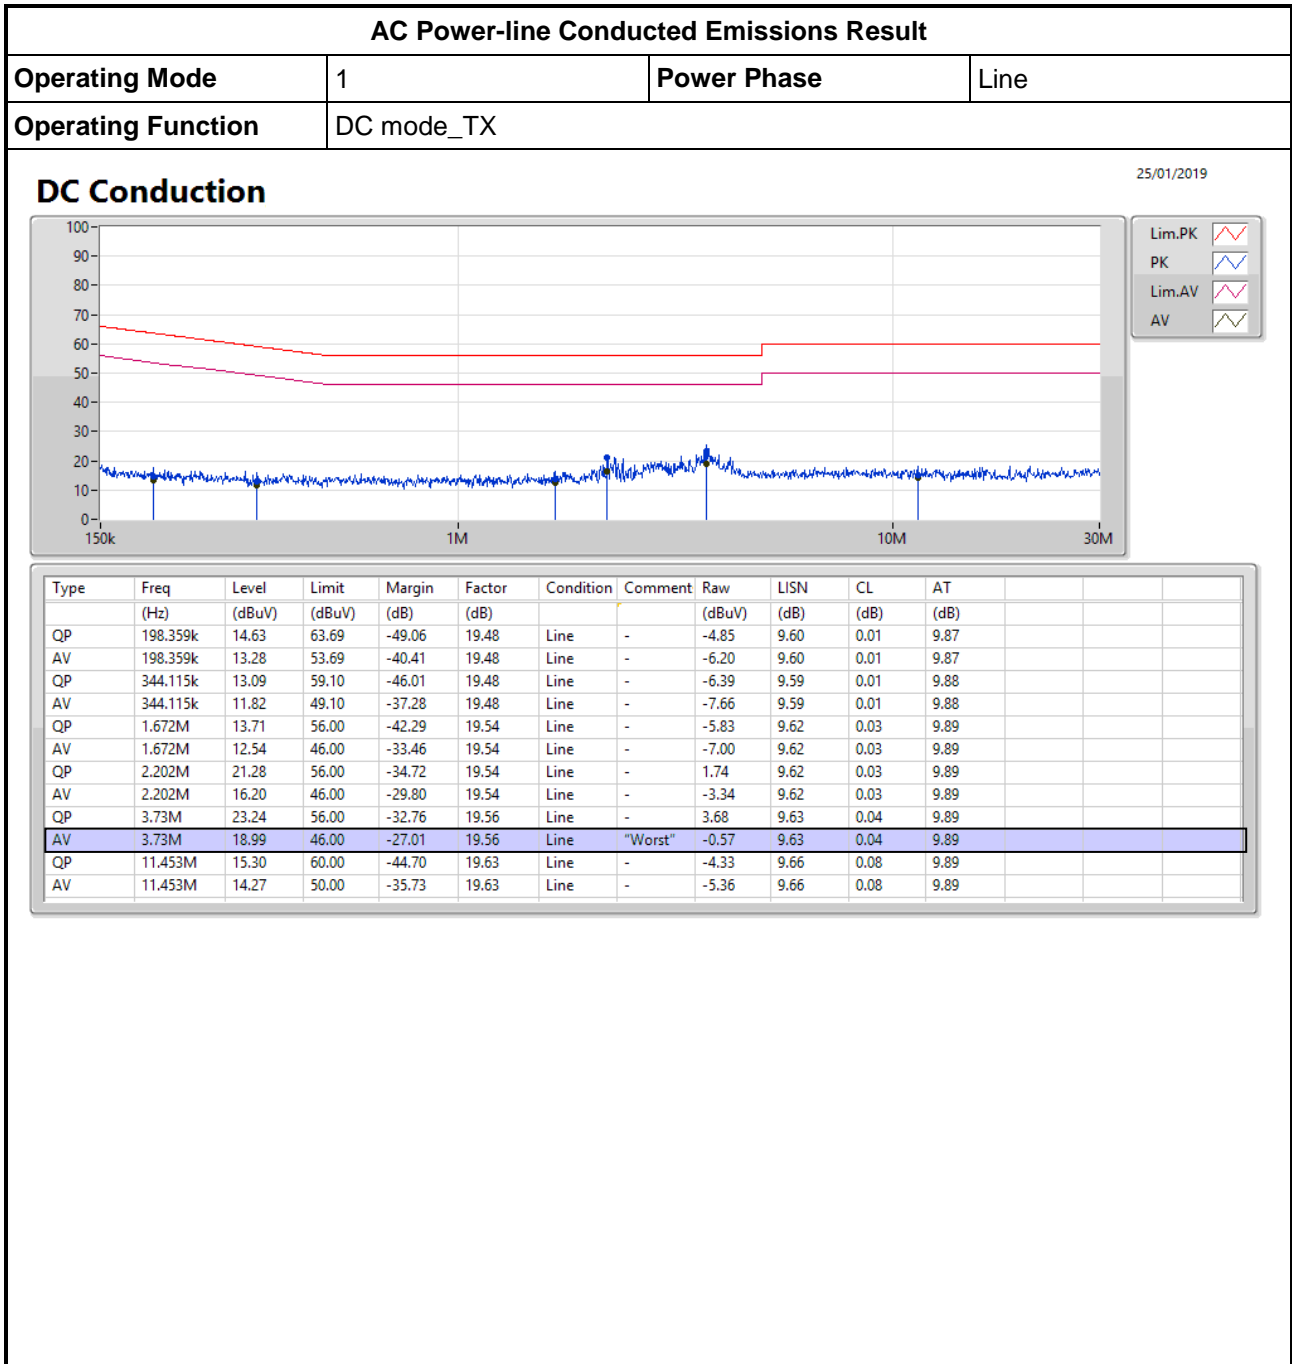



Summary


| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|---------------|------------------|-----------------|----------|------------------|-----------------|
| 2.4-2.4835GHz | - | - | - | - | - |
| BT-BR(1Mbps) | 1.006M | 939.53k | 940KF1D | 921.25k | 933.283k |
| BT-EDR(2Mbps) | 1.335M | 1.226M | 1M23G1D | 1.315M | 1.222M |
| BT-EDR(3Mbps) | 1.29M | 1.219M | 1M22G1D | 1.28M | 1.218M |

Max-N dB = Maximum 20dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 20dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) |
|---------------|--------|---------------|---------------------|--------------------|
| BT-BR(1Mbps) | - | - | - | - |
| 2402MHz | Pass | Inf | 921.25k | 933.283k |
| 2441MHz | Pass | Inf | 1.006M | 939.53k |
| 2480MHz | Pass | Inf | 991.25k | 935.782k |
| BT-EDR(2Mbps) | - | - | - | - |
| 2402MHz | Pass | Inf | 1.318M | 1.226M |
| 2441MHz | Pass | Inf | 1.335M | 1.223M |
| 2480MHz | Pass | Inf | 1.315M | 1.222M |
| BT-EDR(3Mbps) | - | - | - | - |
| 2402MHz | Pass | Inf | 1.285M | 1.219M |
| 2441MHz | Pass | Inf | 1.29M | 1.218M |
| 2480MHz | Pass | Inf | 1.28M | 1.219M |

Port X-N dB = Port X 20dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

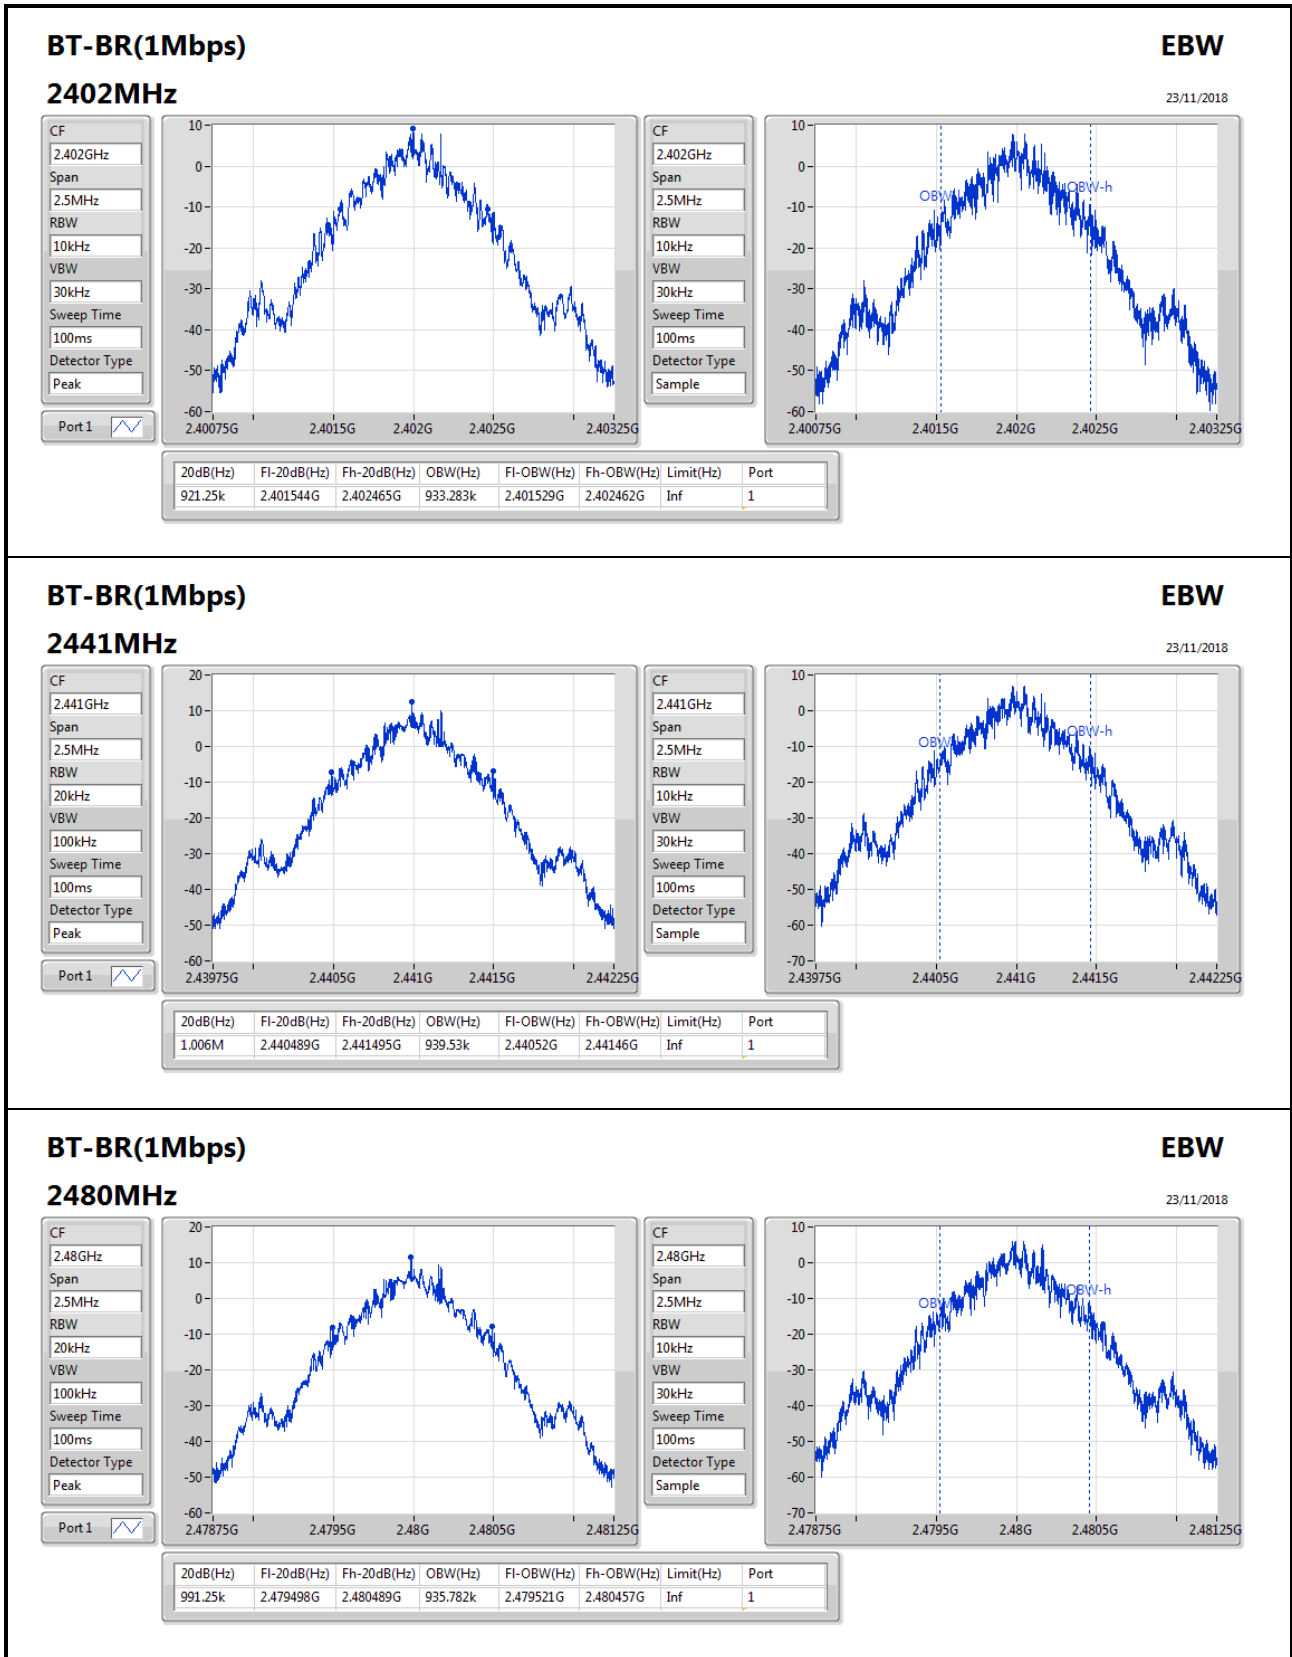
BT-BR(1Mbps)
EBW


23/11/2018


2480MHz

CF: 2.48GHz
Span: 2.5MHz
RBW: 20kHz
VBW: 100kHz
Sweep Time: 100ms
Detector Type: Peak

CF: 2.48GHz
Span: 2.5MHz
RBW: 10kHz
VBW: 30kHz
Sweep Time: 100ms
Detector Type: Sample

| 20dB(Hz) | Fl-20dB(Hz) | Fh-20dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|----------|------------|------------|-----------|------|
| 991.25k | 2.479498G | 2.480489G | 935.782k | 2.479521G | 2.480457G | Inf | 1 |

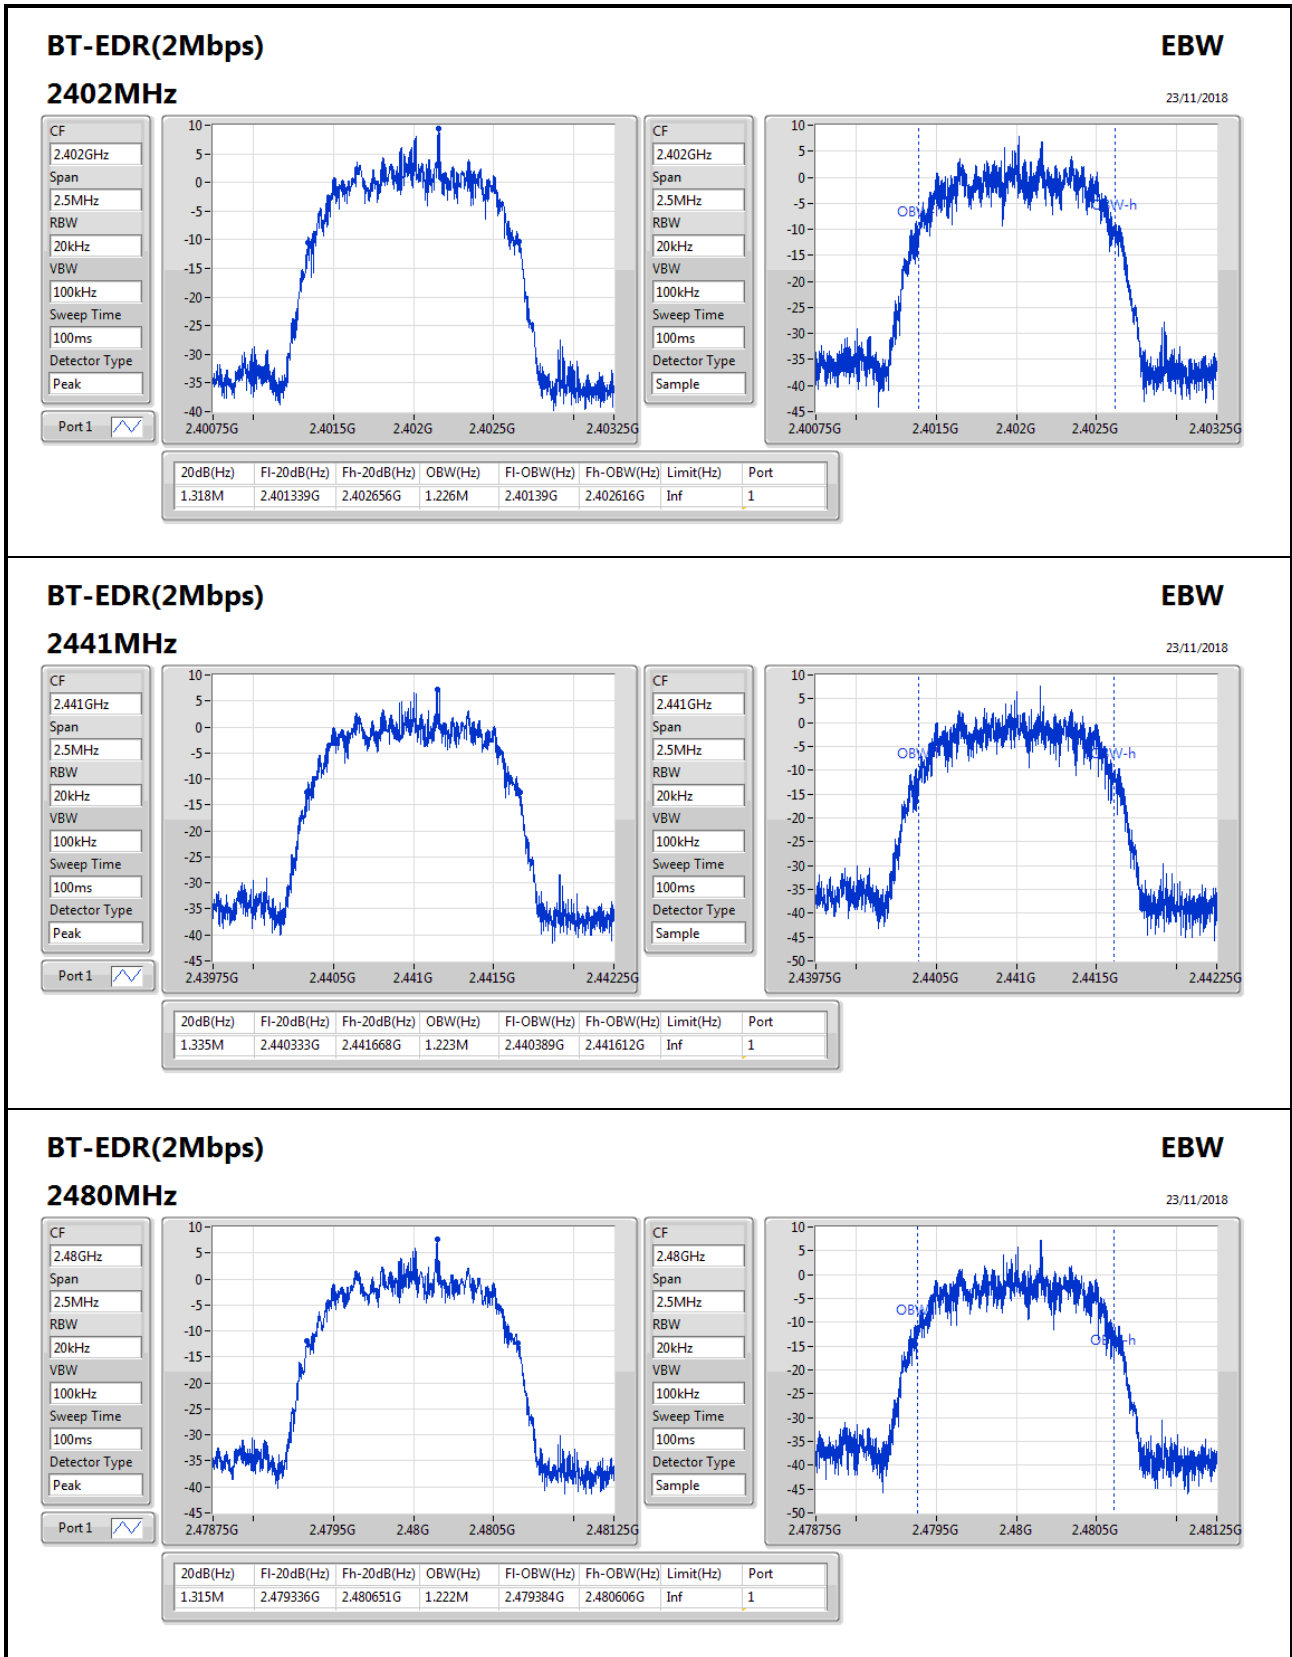

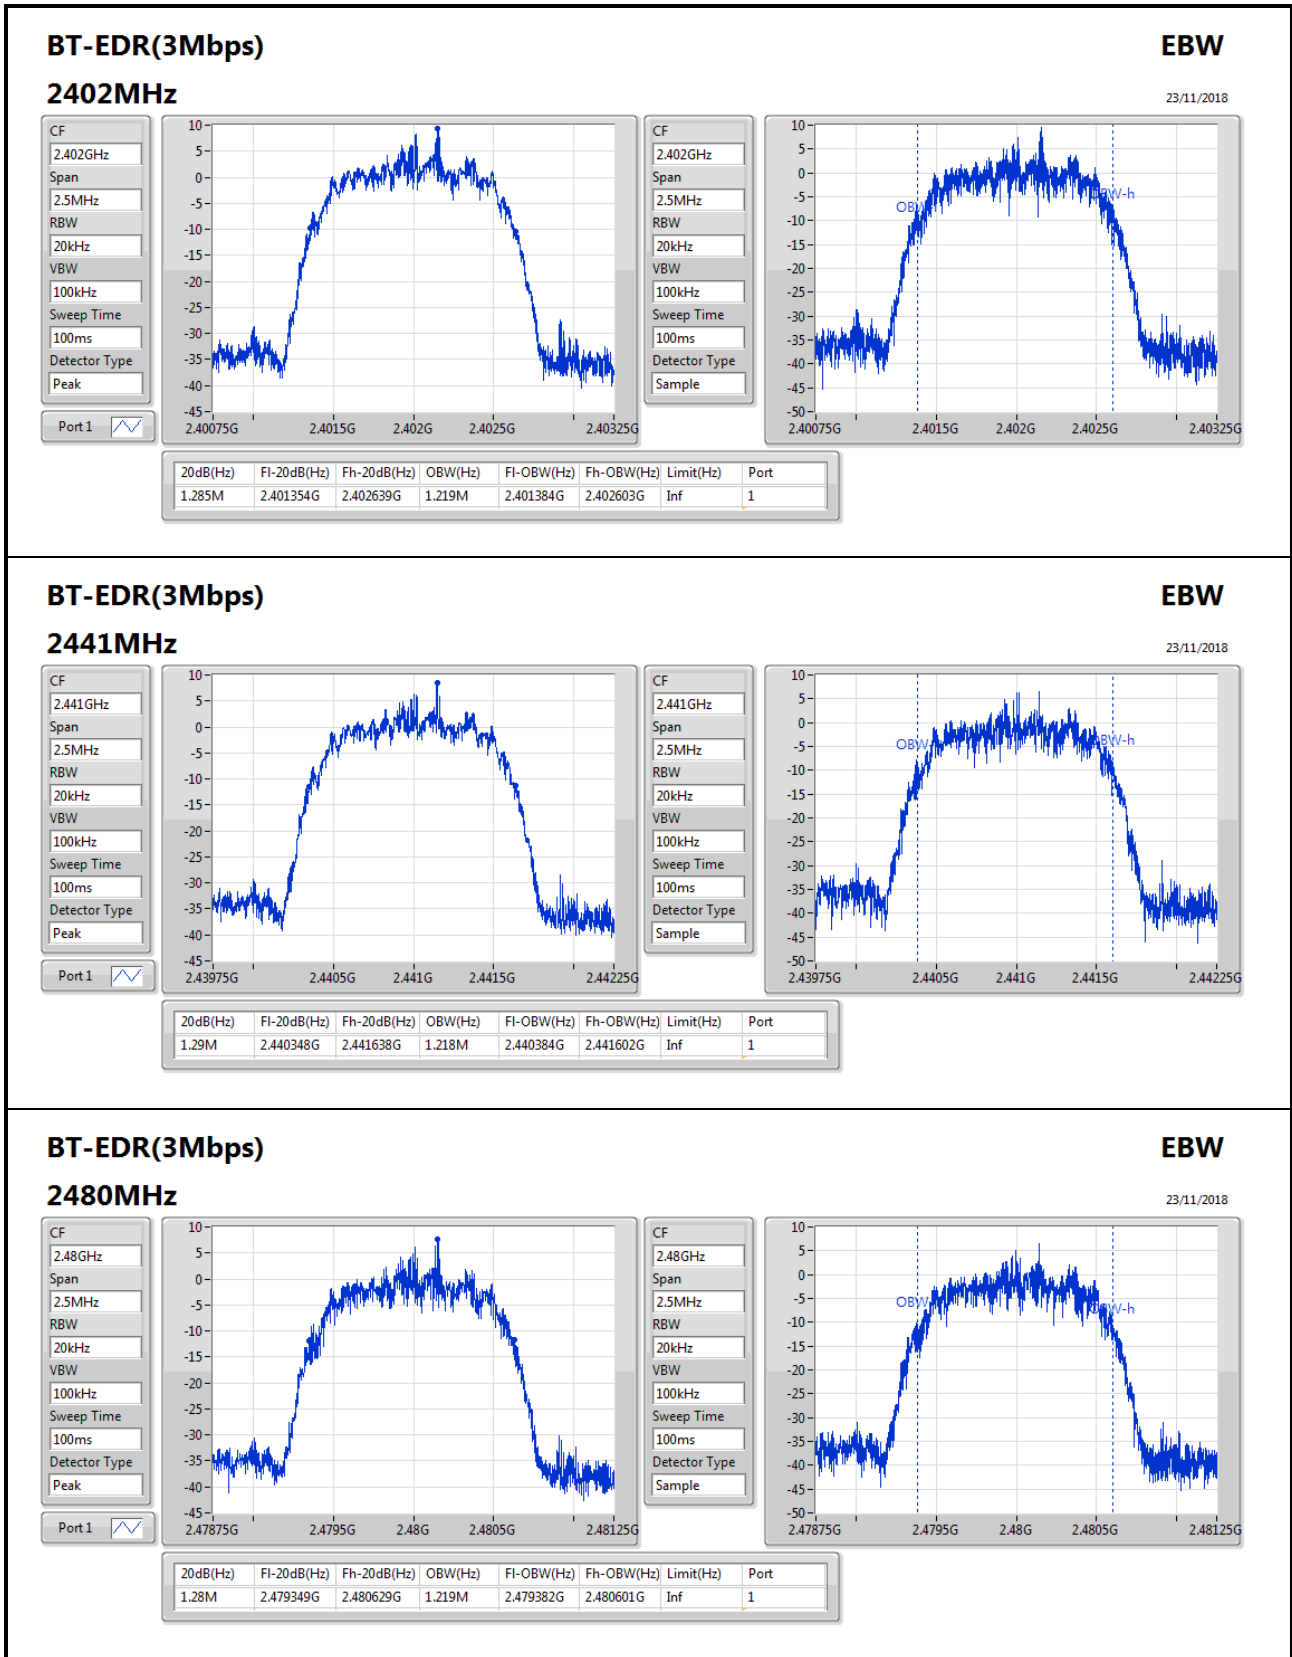





Summary


| Mode | Max-Space (Hz) | Min-Space (Hz) |
|---------------|-------------------|-------------------|
| 2.4-2.4835GHz | - | - |
| BT-BR(1Mbps) | 1.002M | 1.0005M |
| BT-EDR(2Mbps) | 1.002M | 999k |
| BT-EDR(3Mbps) | 1.0035M | 1.0005M |

Result

| Mode | Result | Fl (Hz) | Fh (Hz) | Ch.Space (Hz) | Limit (Hz) |
|---------------|--------|------------|------------|------------------|---------------|
| BT-BR(1Mbps) | - | - | - | - | - |
| 2402MHz | Pass | 2.401993G | 2.402994G | 1.0005M | 613.5525k |
| 2441MHz | Pass | 2.44099G | 2.441992G | 1.002M | 669.996k |
| 2480MHz | Pass | 2.478989G | 2.479989G | 1.0005M | 660.1725k |
| BT-EDR(2Mbps) | - | - | - | - | - |
| 2402MHz | Pass | 2.402157G | 2.403156G | 999k | 877.788k |
| 2441MHz | Pass | 2.441154G | 2.442154G | 1.0005M | 889.11k |
| 2480MHz | Pass | 2.479151G | 2.480153G | 1.002M | 875.79k |
| BT-EDR(3Mbps) | - | - | - | - | - |
| 2402MHz | Pass | 2.402154G | 2.403157G | 1.0035M | 855.81k |
| 2441MHz | Pass | 2.441151G | 2.442151G | 1.0005M | 859.14k |
| 2480MHz | Pass | 2.479146G | 2.48015G | 1.0035M | 852.48k |

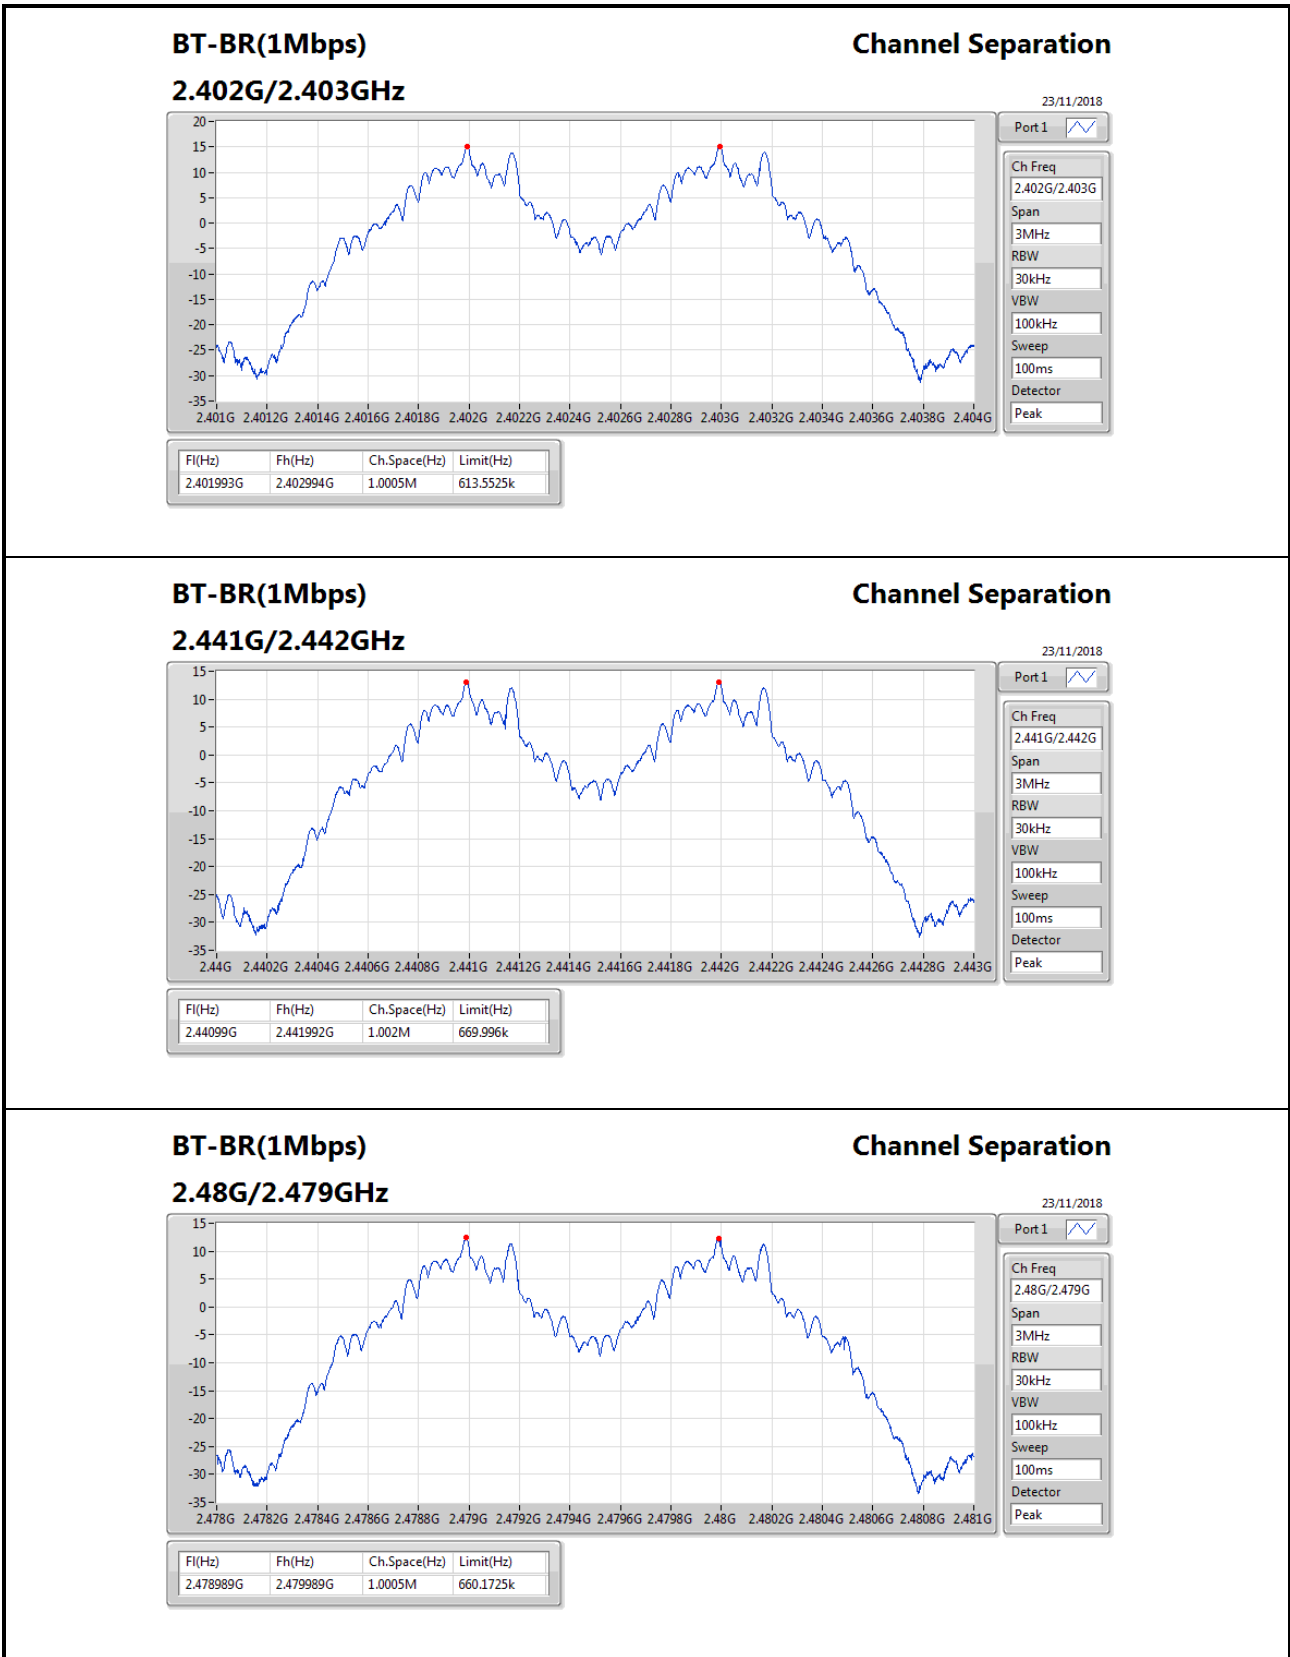

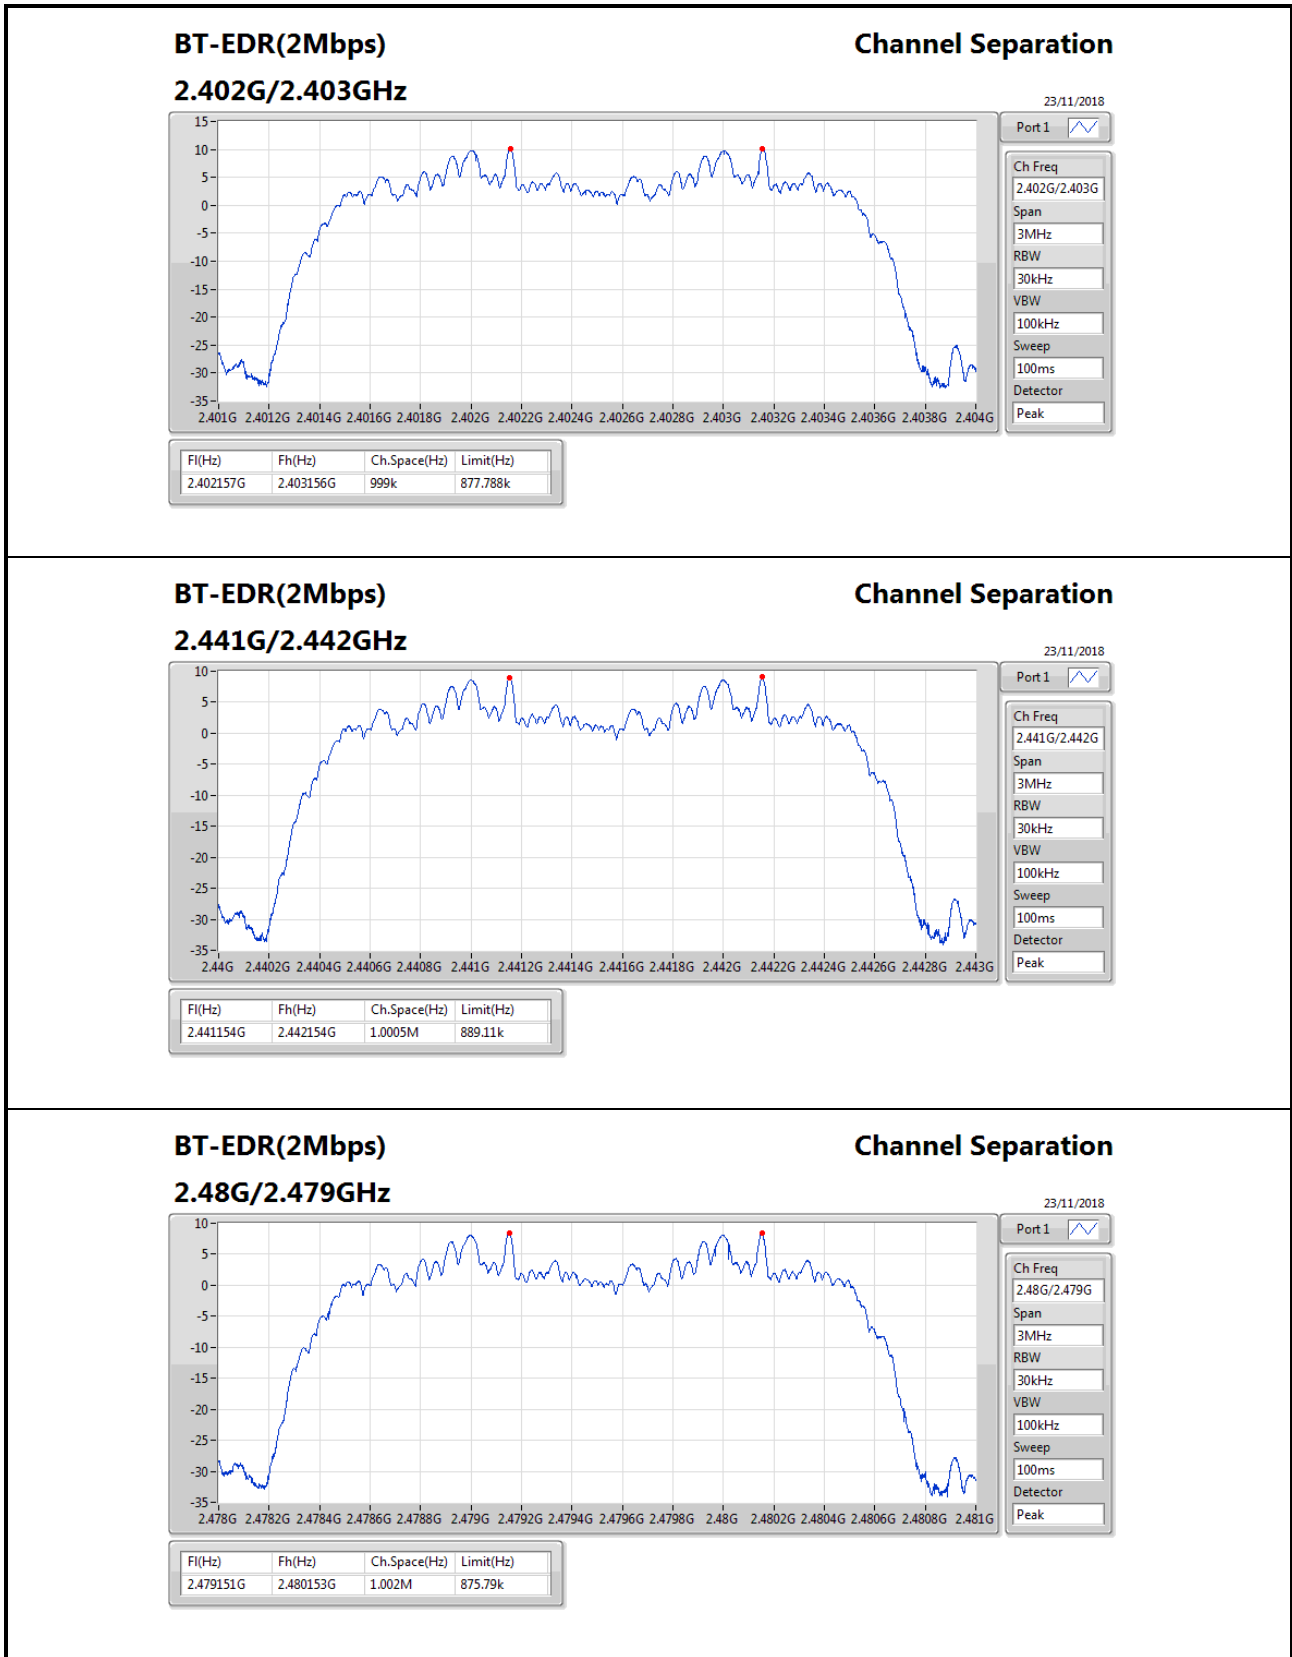

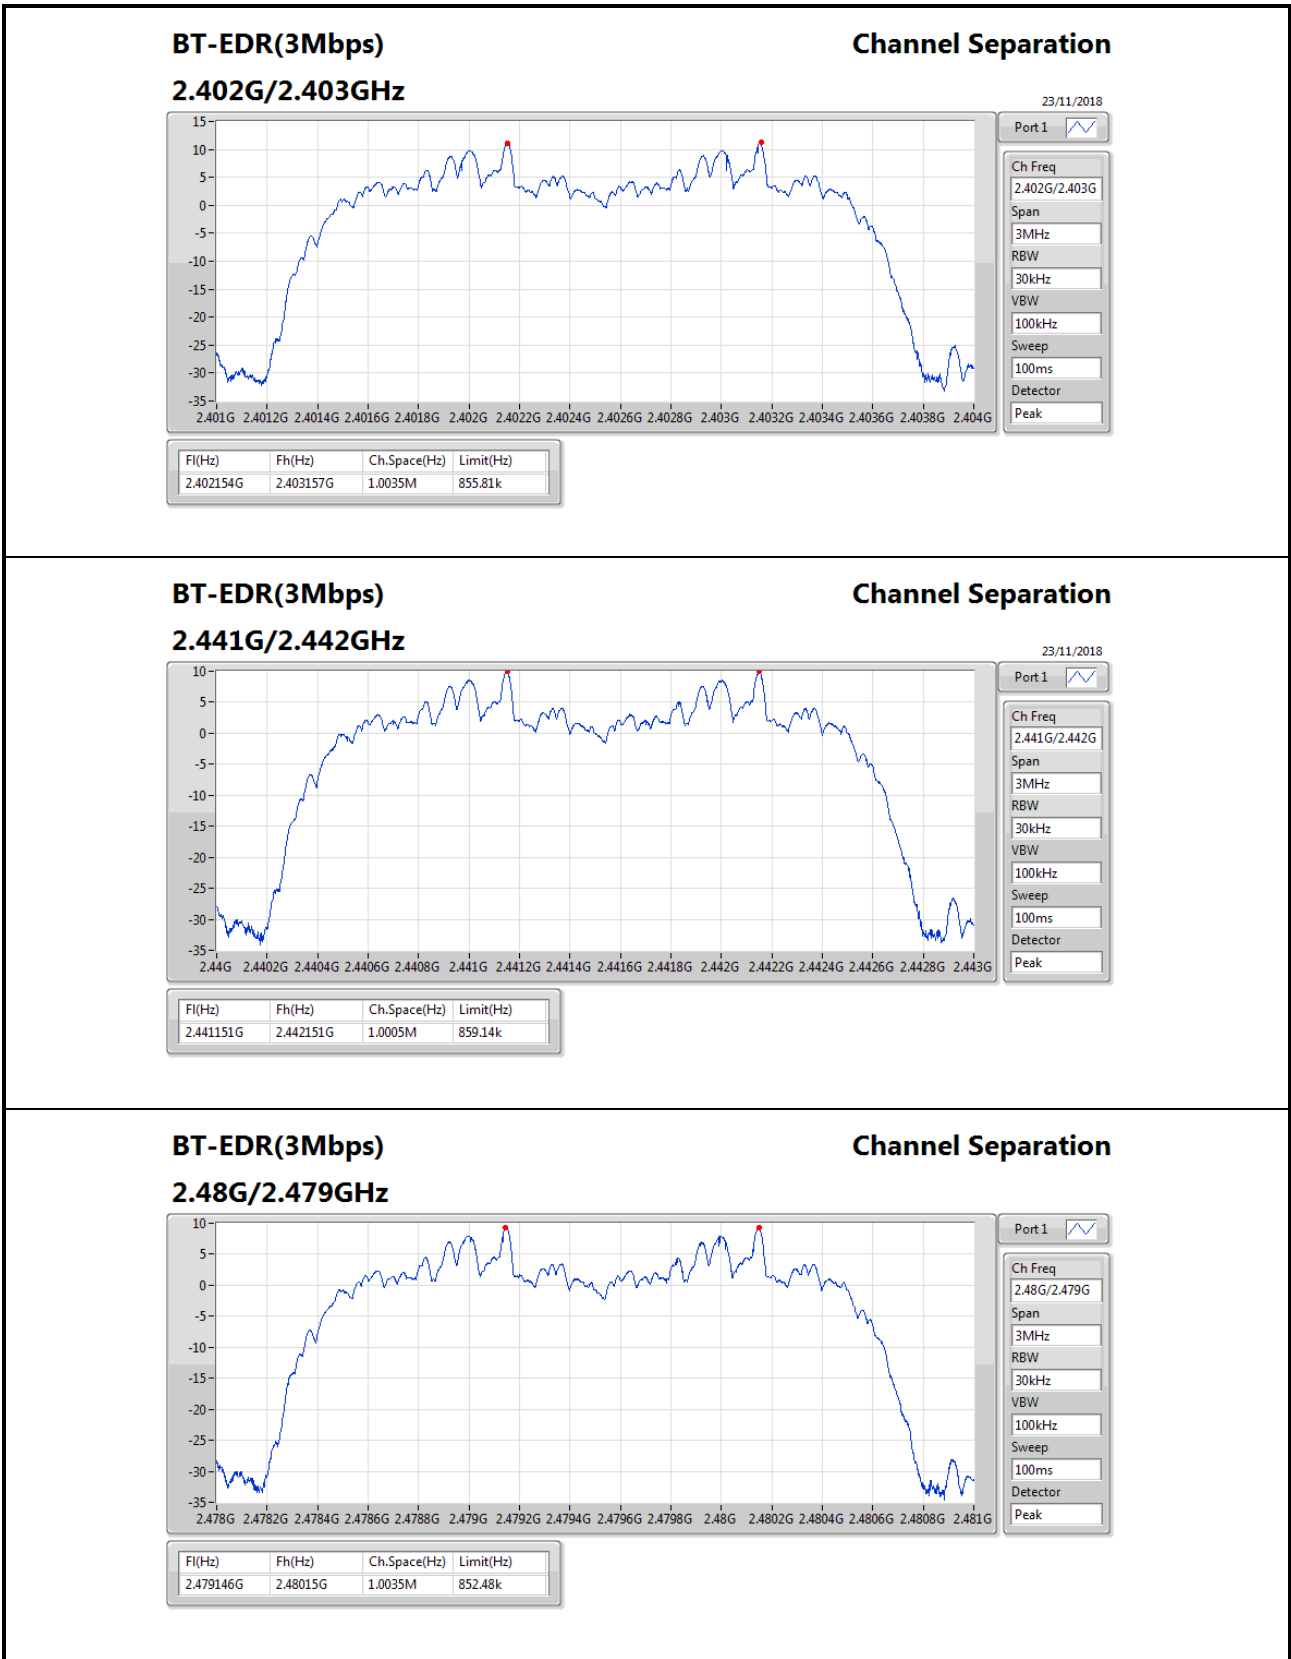



Summary

| Mode | Power (dBm) | Power (W) |
|---------------|-------------|-----------|
| 2.4-2.4835GHz | - | - |
| BT-BR(1Mbps) | 15.70 | 0.03715 |
| BT-EDR(2Mbps) | 15.12 | 0.03251 |
| BT-EDR(3Mbps) | 15.33 | 0.03412 |

Result

| Mode | Result | Gain (dBi) | Power (dBm) | Power Limit (dBm) |
|------------------|--------|------------|-------------|-------------------|
| BT-BR(1Mbps) | - | - | - | - |
| 2402MHz_TnomVnom | Pass | -2.40 | 15.70 | 30.00 |
| 2441MHz_TnomVnom | Pass | -2.40 | 13.63 | 30.00 |
| 2480MHz_TnomVnom | Pass | -2.40 | 13.95 | 30.00 |
| BT-EDR(2Mbps) | - | - | - | - |
| 2402MHz_TnomVnom | Pass | -2.40 | 15.12 | 30.00 |
| 2441MHz_TnomVnom | Pass | -2.40 | 14.74 | 30.00 |
| 2480MHz_TnomVnom | Pass | -2.40 | 14.36 | 30.00 |
| BT-EDR(3Mbps) | - | - | - | - |
| 2402MHz_TnomVnom | Pass | -2.40 | 15.33 | 30.00 |
| 2441MHz_TnomVnom | Pass | -2.40 | 14.95 | 30.00 |
| 2480MHz_TnomVnom | Pass | -2.40 | 14.60 | 30.00 |



Summary

| Mode | Power (dBm) | Power (W) |
|---------------|----------------|--------------|
| 2.4-2.4835GHz | - | - |
| BT-BR(1Mbps) | 15.55 | 0.03589 |
| BT-EDR(2Mbps) | 12.39 | 0.01734 |
| BT-EDR(3Mbps) | 12.36 | 0.01722 |

Result

| Mode | Result | Gain (dBi) | Power (dBm) | Power Limit (dBm) |
|------------------|--------|---------------|----------------|----------------------|
| BT-BR(1Mbps) | - | - | - | - |
| 2402MHz_TnomVnom | Pass | -2.40 | 15.55 | 30.00 |
| 2441MHz_TnomVnom | Pass | -2.40 | 13.45 | 30.00 |
| 2480MHz_TnomVnom | Pass | -2.40 | 13.79 | 30.00 |
| BT-EDR(2Mbps) | - | - | - | - |
| 2402MHz_TnomVnom | Pass | -2.40 | 12.39 | 30.00 |
| 2441MHz_TnomVnom | Pass | -2.40 | 12.05 | 30.00 |
| 2480MHz_TnomVnom | Pass | -2.40 | 11.77 | 30.00 |
| BT-EDR(3Mbps) | - | - | - | - |
| 2402MHz_TnomVnom | Pass | -2.40 | 12.36 | 30.00 |
| 2441MHz_TnomVnom | Pass | -2.40 | 12.12 | 30.00 |
| 2480MHz_TnomVnom | Pass | -2.40 | 11.77 | 30.00 |









Summary




| Mode | Max-Hop No |
|---------------|------------|
| 2.4-2.4835GHz | - |
| BT-BR(1Mbps) | 79 |
| BT-EDR(2Mbps) | 79 |
| BT-EDR(3Mbps) | 79 |

Result

| Mode | Result | Hopping No | Limit |
|---------------|--------|------------|-------|
| BT-BR(1Mbps) | - | - | - |
| 2441MHz | Pass | 79 | 15 |
| BT-EDR(2Mbps) | - | - | - |
| 2441MHz | Pass | 79 | 15 |
| BT-EDR(3Mbps) | - | - | - |
| 2441MHz | Pass | 79 | 15 |

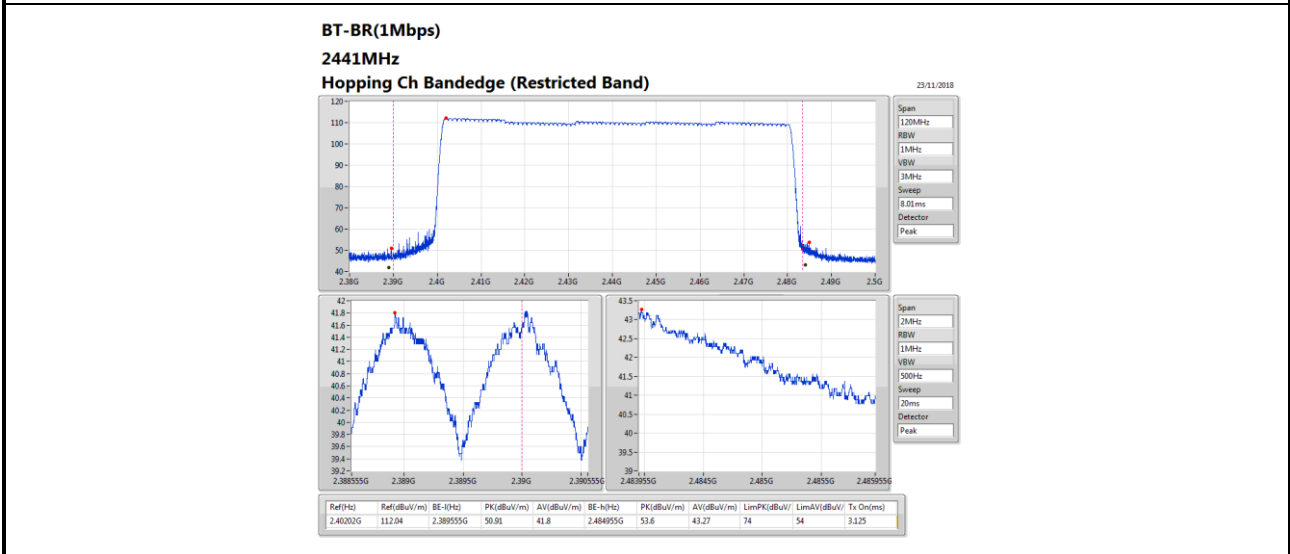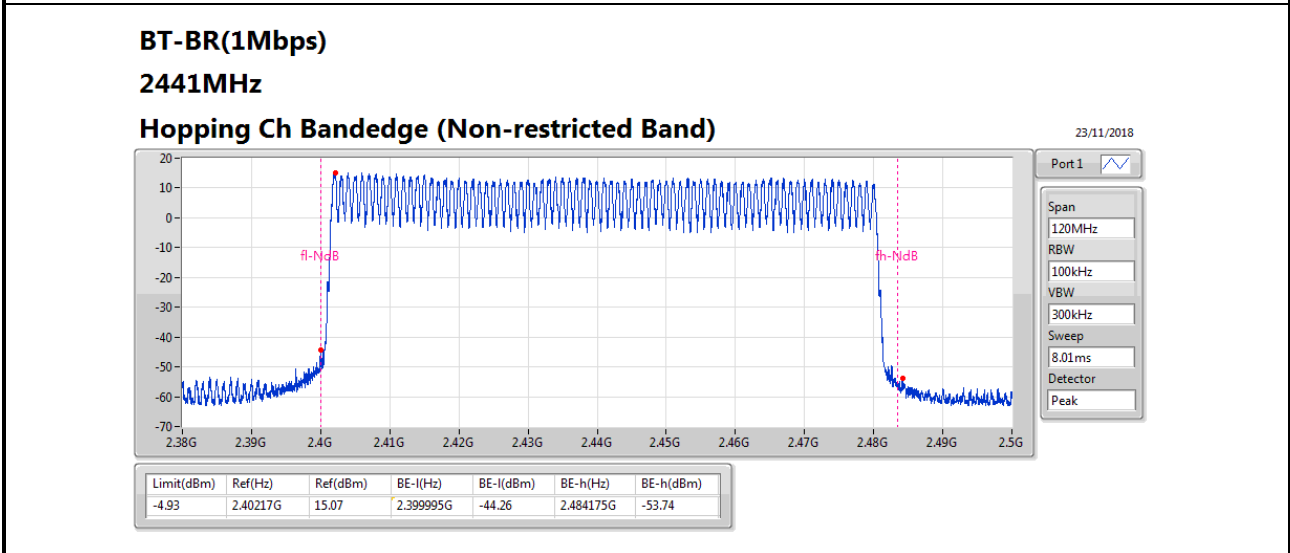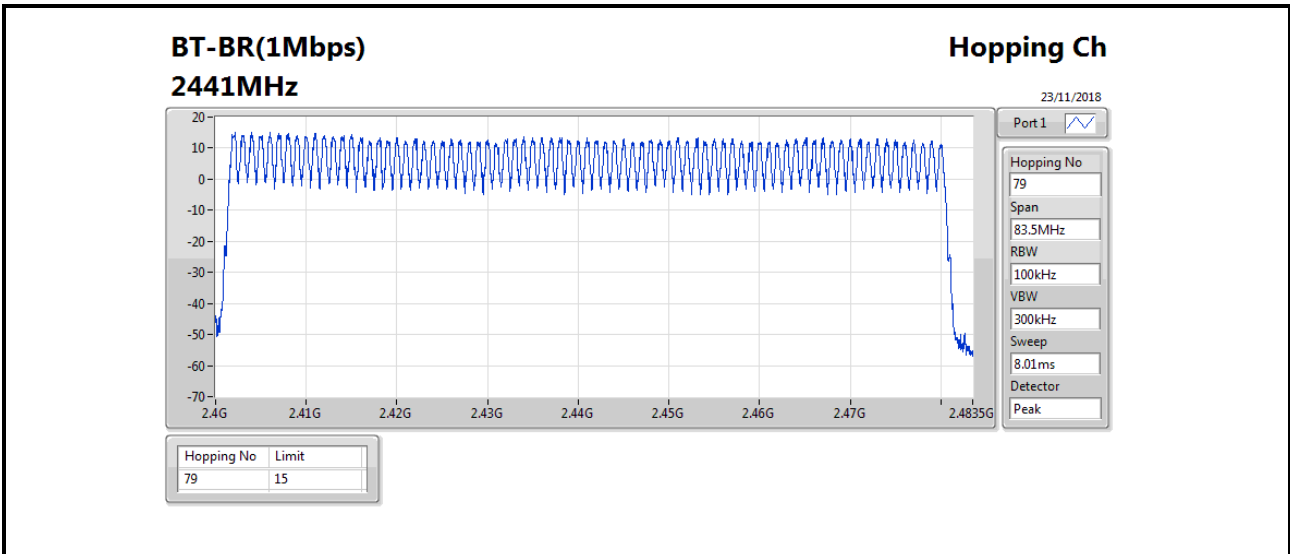

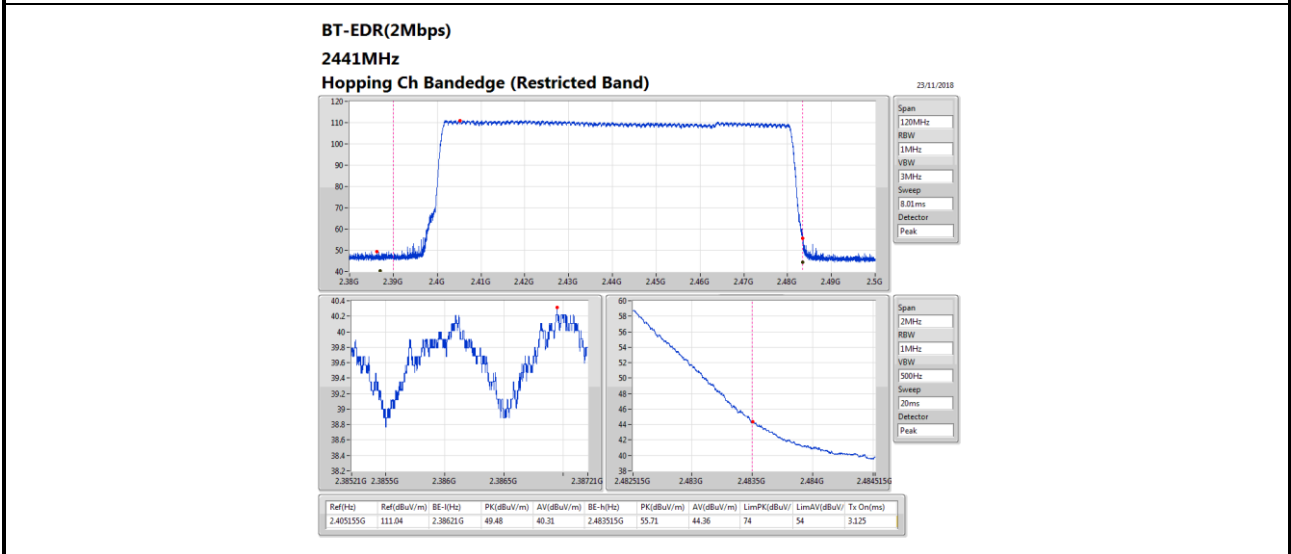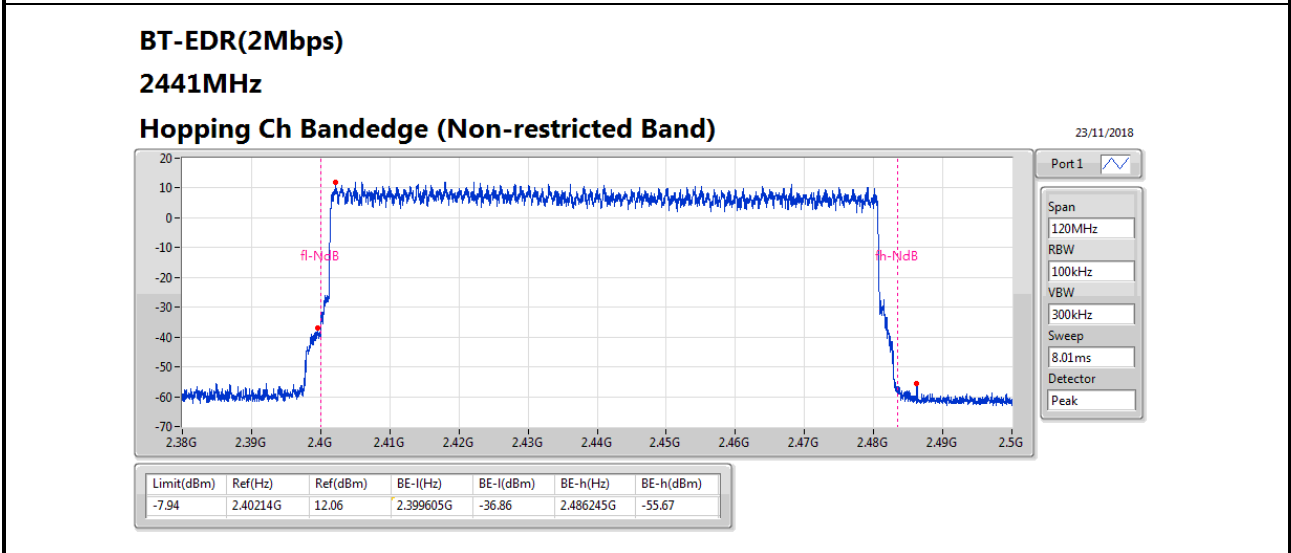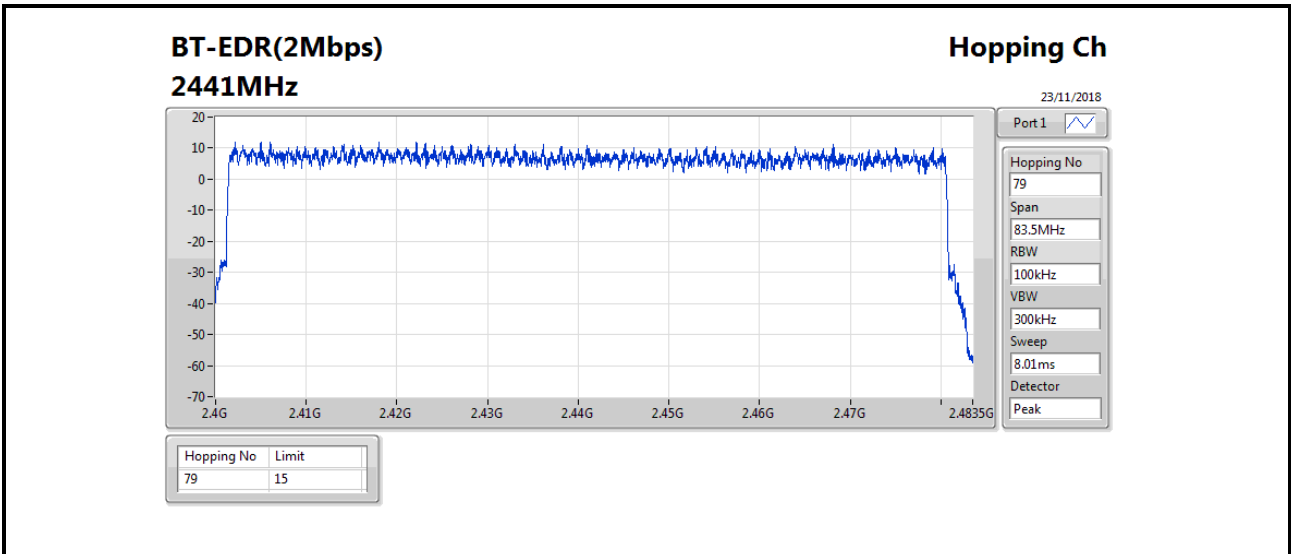

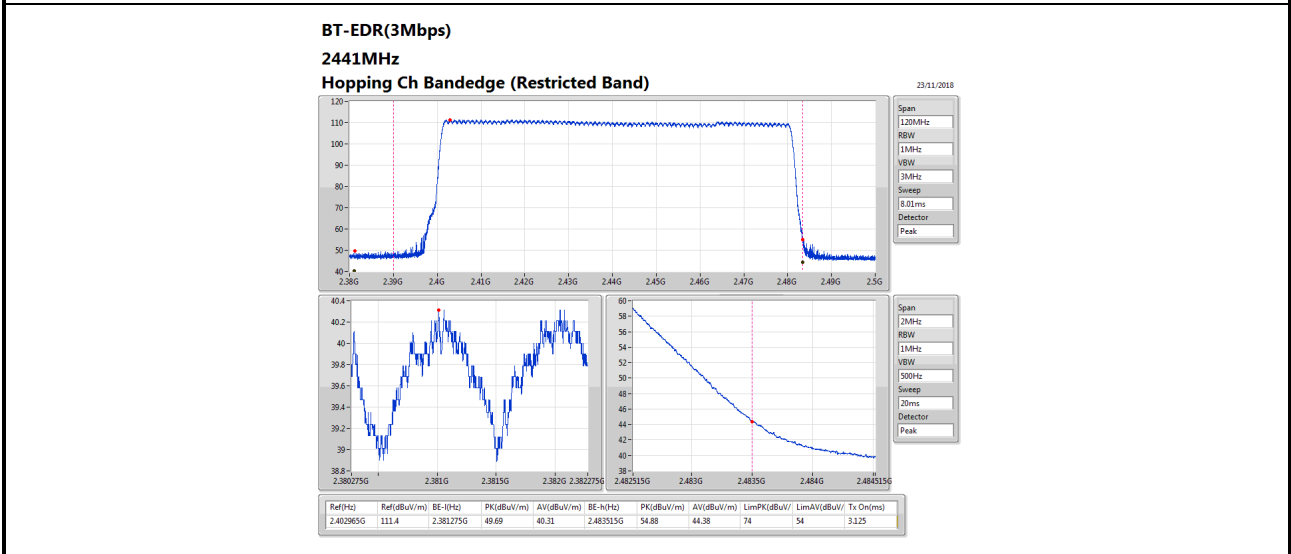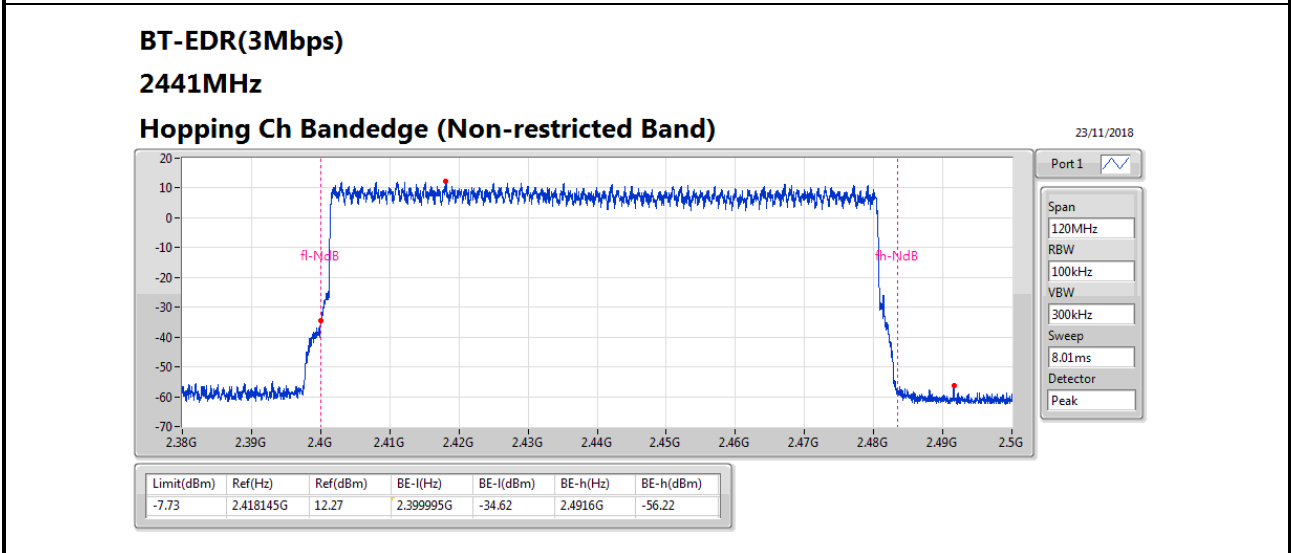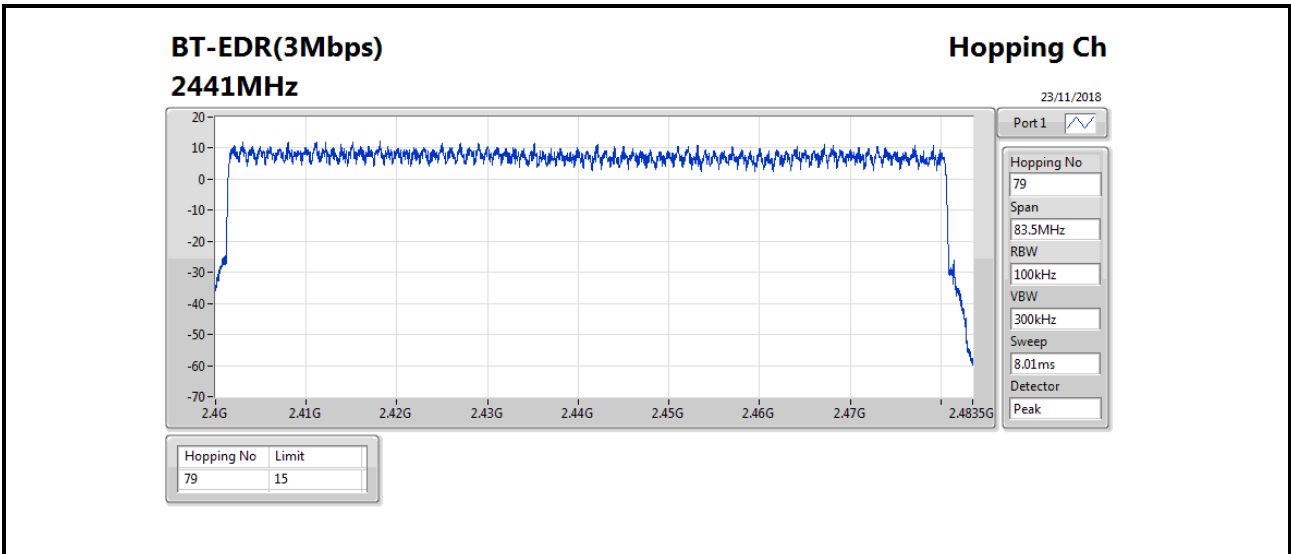




Summary

| Mode | Max-Dwell (s) |
|---------------|--------------------------|
| 2.4-2.4835GHz | - |
| BT-BR(1Mbps) | 314.3634m |
| BT-EDR(2Mbps) | 308.5004m |
| BT-EDR(3Mbps) | 308.7136m |

Result

| Mode | Result | Period (s) | Dwell (s) | Limit (s) | Tx On (s) |
|---------------|---------------|-----------------------|----------------------|----------------------|----------------------|
| BT-BR(1Mbps) | - | - | - | - | - |
| 2441MHz | Pass | 31.6 | 314.3634m | 400m | 2.949m |
| BT-EDR(2Mbps) | - | - | - | - | - |
| 2441MHz | Pass | 31.6 | 308.5004m | 400m | 2.894m |
| BT-EDR(3Mbps) | - | - | - | - | - |
| 2441MHz | Pass | 31.6 | 308.7136m | 400m | 2.896m |

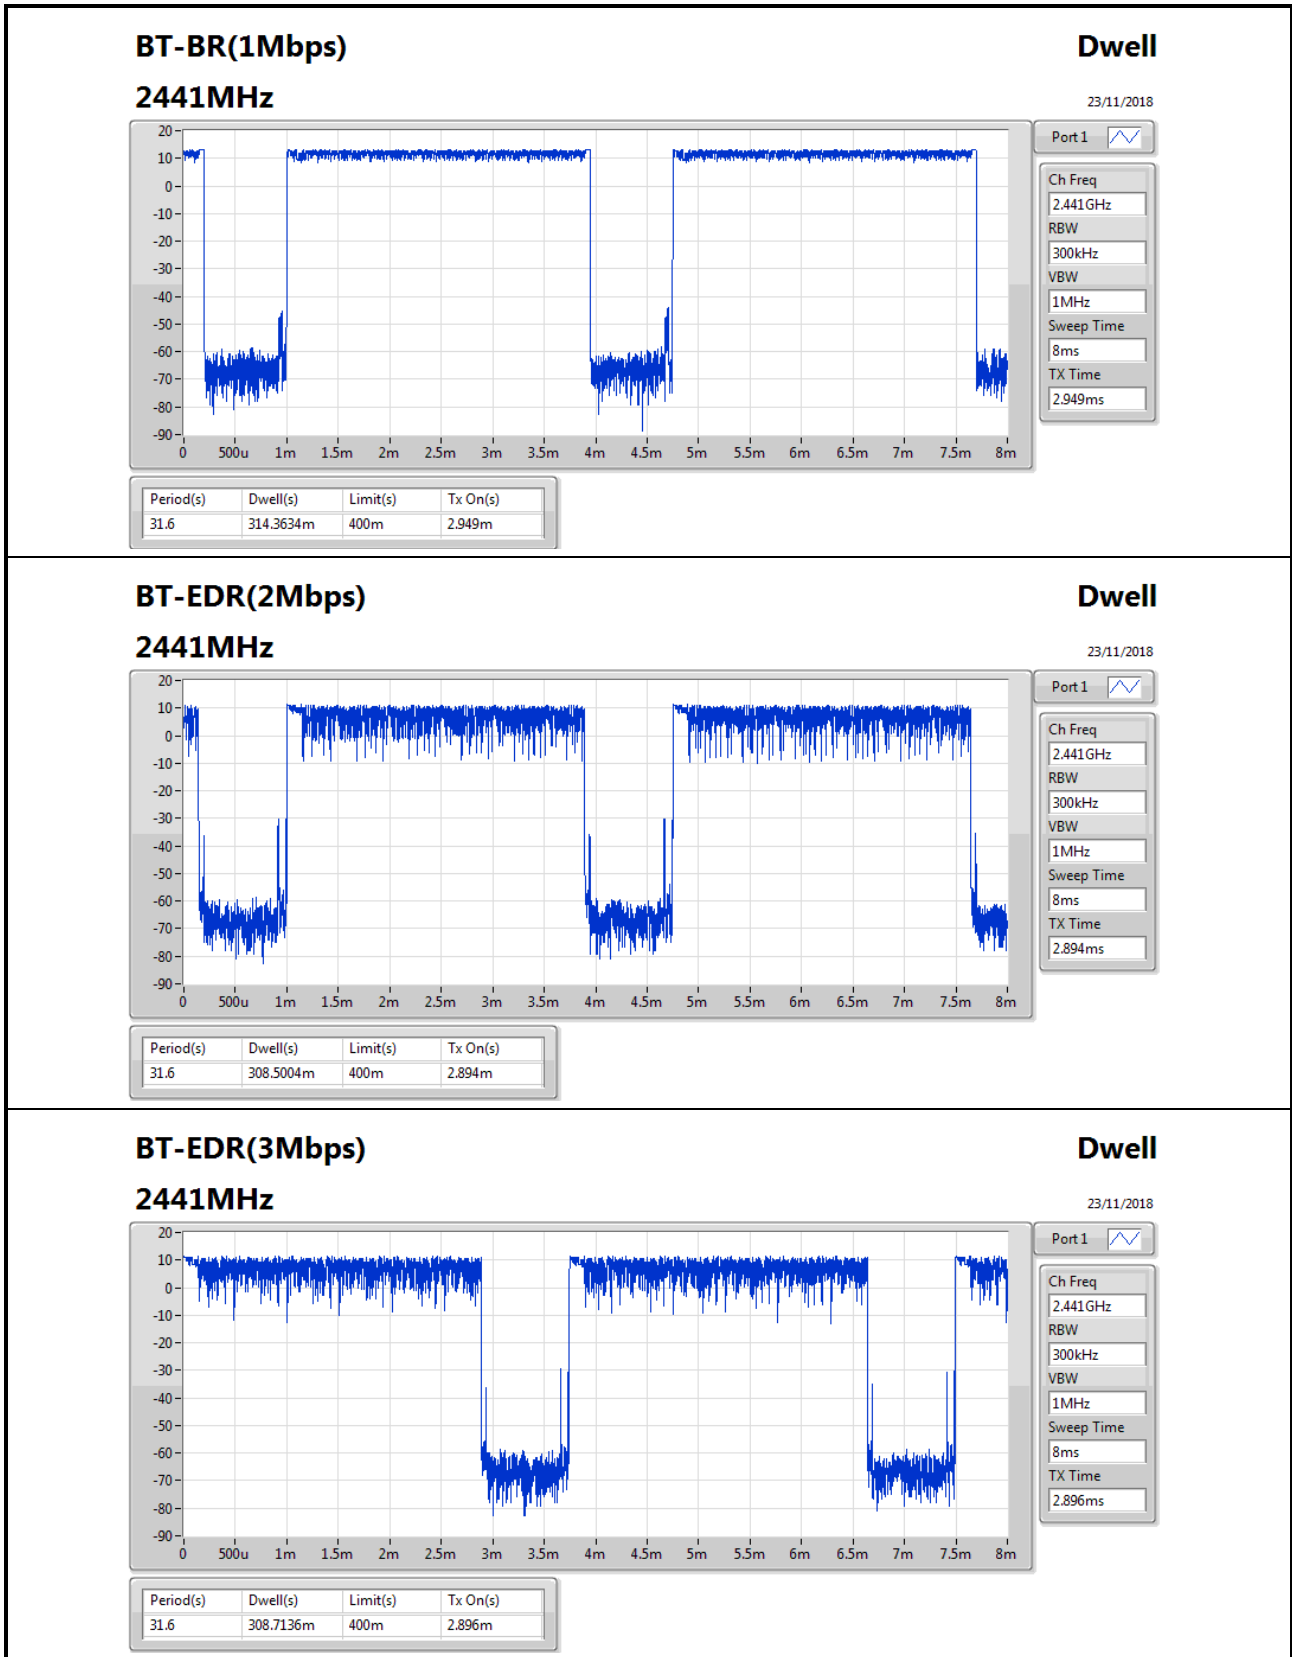





Summary


| Mode | Result | Ref (Hz) | Ref (dBm) | Limit (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Port |
|---------------|--------|----------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|------|
| 2.4-2.4835GHz | - | - | - | - | - | - | - | - | - | - | - | - | - |
| BT-BR(1Mbps) | Pass | 2.40213G | 13.35 | -6.65 | 2.3977G | -53.56 | 2.39999G | -42.94 | 2.48386G | -65.07 | 7.2051G | -42.94 | 1 |
| BT-EDR(2Mbps) | Pass | 2.40184G | 9.74 | -10.26 | 2.398G | -43.55 | 2.4G | -34.17 | 2.48512G | -64.74 | 17.18184G | -53.62 | 1 |
| BT-EDR(3Mbps) | Pass | 2.40192G | 10.60 | -9.40 | 2.398G | -50.45 | 2.39995G | -34.29 | 2.48375G | -65.00 | 7.2051G | -52.01 | 1 |

Result

| Mode | Result | Ref (Hz) | Ref (dBm) | Limit (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Port |
|---------------|--------|----------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|------|
| BT-BR(1Mbps) | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | 2.40213G | 13.35 | -6.65 | 2.3977G | -53.56 | 2.39999G | -42.94 | 2.48386G | -65.07 | 7.2051G | -42.94 | 1 |
| 2441MHz | Pass | 2.441G | 12.45 | -7.55 | 2.39326G | -63.98 | 2.39944G | -63.92 | 2.48528G | -64.14 | 15.32721G | -52.85 | 1 |
| 2480MHz | Pass | 2.48016G | 11.63 | -8.37 | 2.30062G | -66.65 | 2.39966G | -65.18 | 2.48359G | -51.87 | 16.39383G | -53.31 | 1 |
| BT-EDR(2Mbps) | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | 2.40184G | 9.74 | -10.26 | 2.398G | -43.55 | 2.4G | -34.17 | 2.48512G | -64.74 | 17.18184G | -53.62 | 1 |
| 2441MHz | Pass | 2.44117G | 10.96 | -9.04 | 2.3095G | -63.32 | 2.39891G | -59.58 | 2.48364G | -63.64 | 15.29906G | -52.88 | 1 |
| 2480MHz | Pass | 2.48016G | 10.33 | -9.67 | 2.39415G | -63.89 | 2.39909G | -57.36 | 2.4837G | -54.69 | 16.77095G | -53.83 | 1 |
| BT-EDR(3Mbps) | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | 2.40192G | 10.60 | -9.40 | 2.398G | -50.45 | 2.39995G | -34.29 | 2.48375G | -65.00 | 7.2051G | -52.01 | 1 |
| 2441MHz | Pass | 2.44096G | 10.01 | -9.99 | 2.39001G | -65.00 | 2.39888G | -58.95 | 2.48507G | -64.64 | 16.3882G | -54.48 | 1 |
| 2480MHz | Pass | 2.47999G | 8.87 | -11.13 | 2.39208G | -62.38 | 2.39917G | -56.65 | 2.48353G | -54.07 | 17.15651G | -54.18 | 1 |

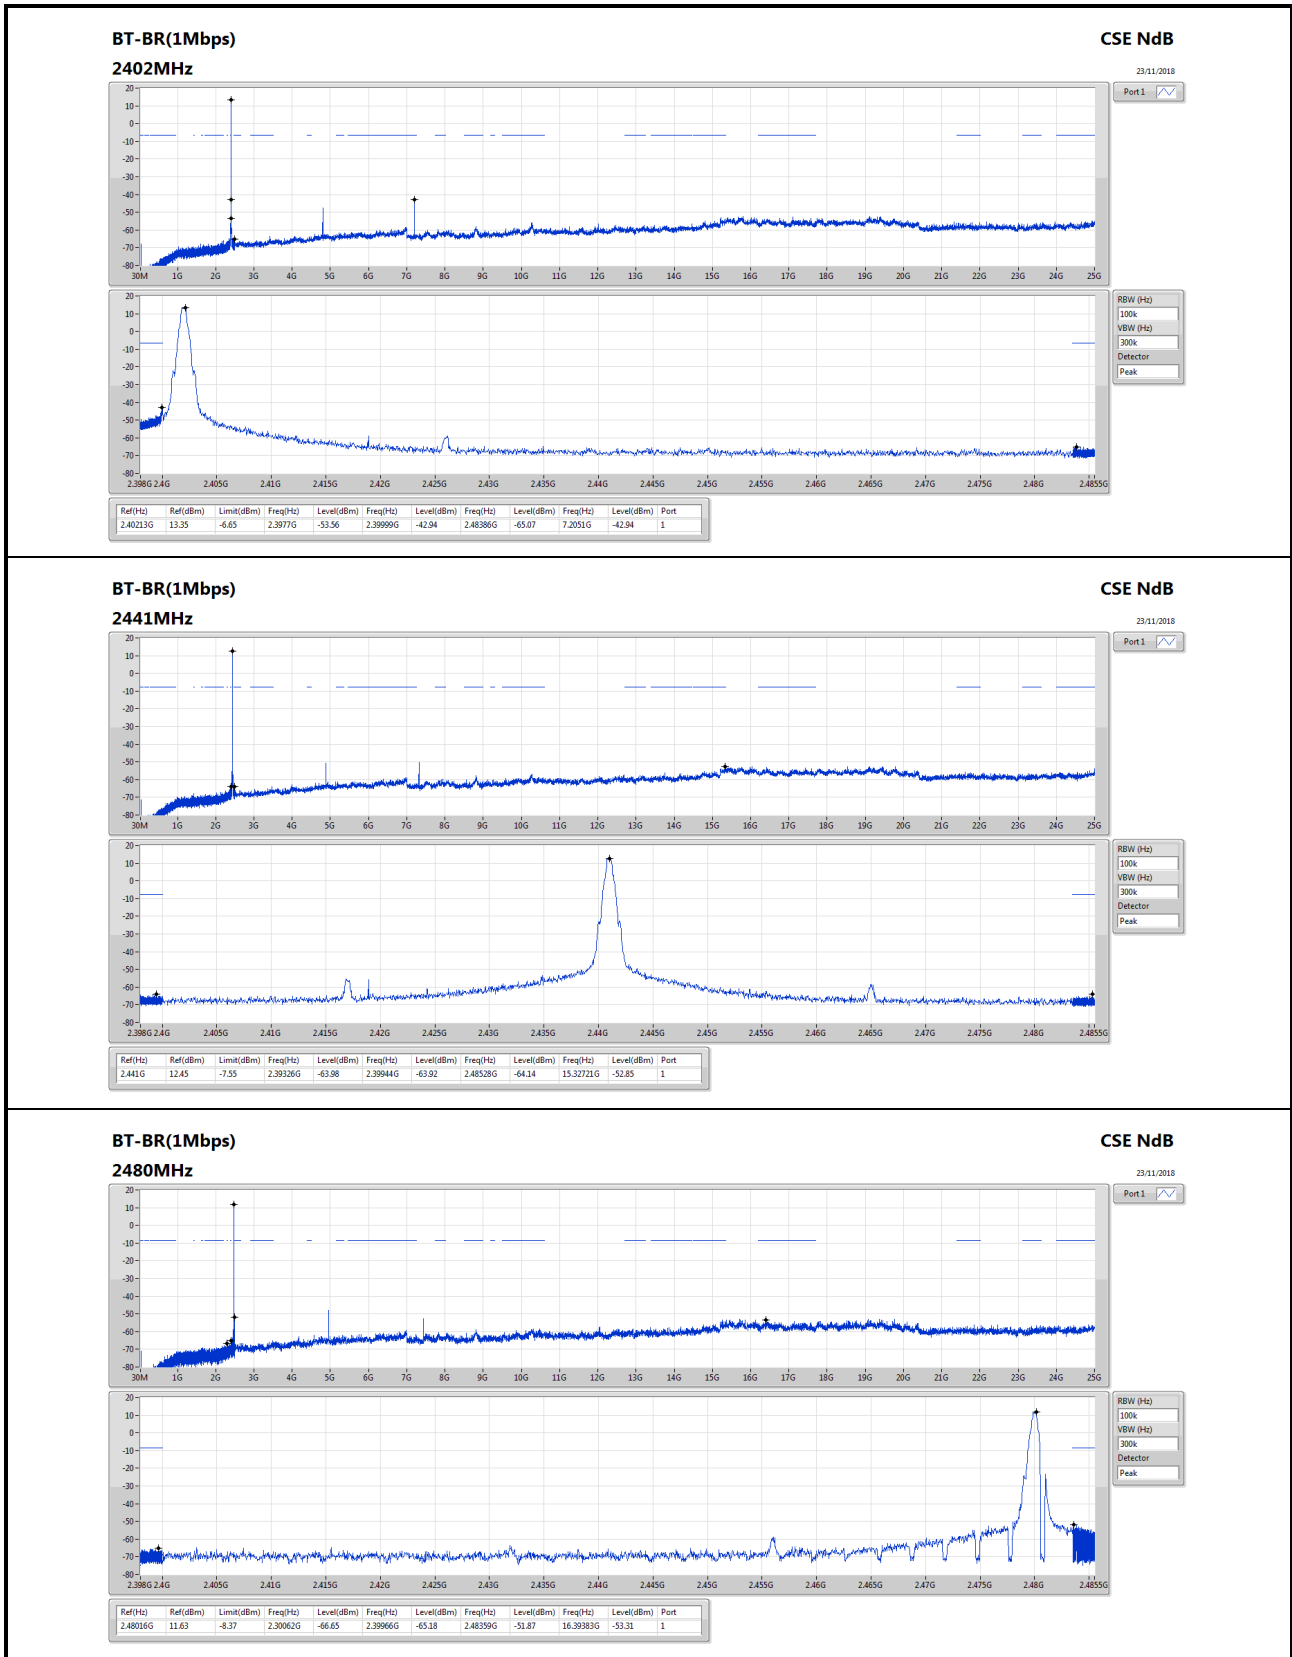

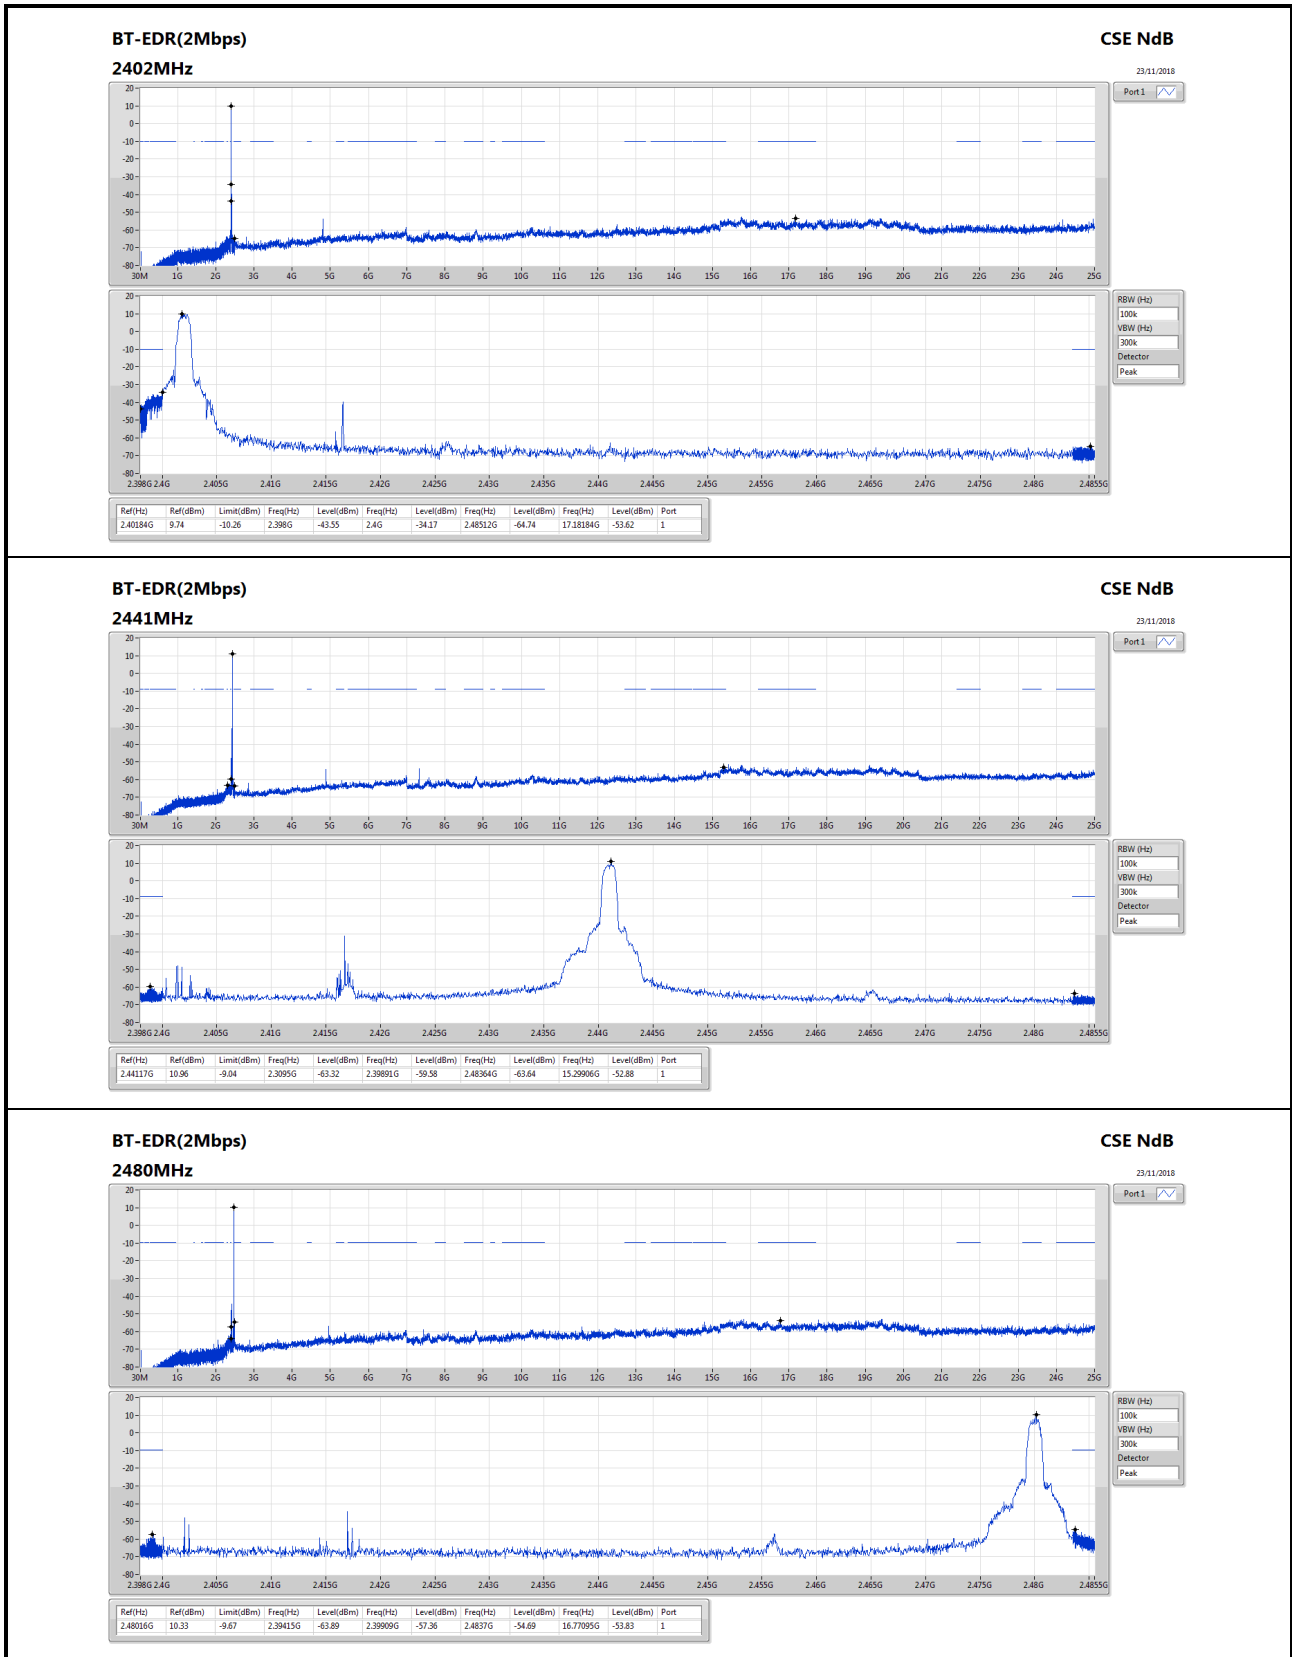

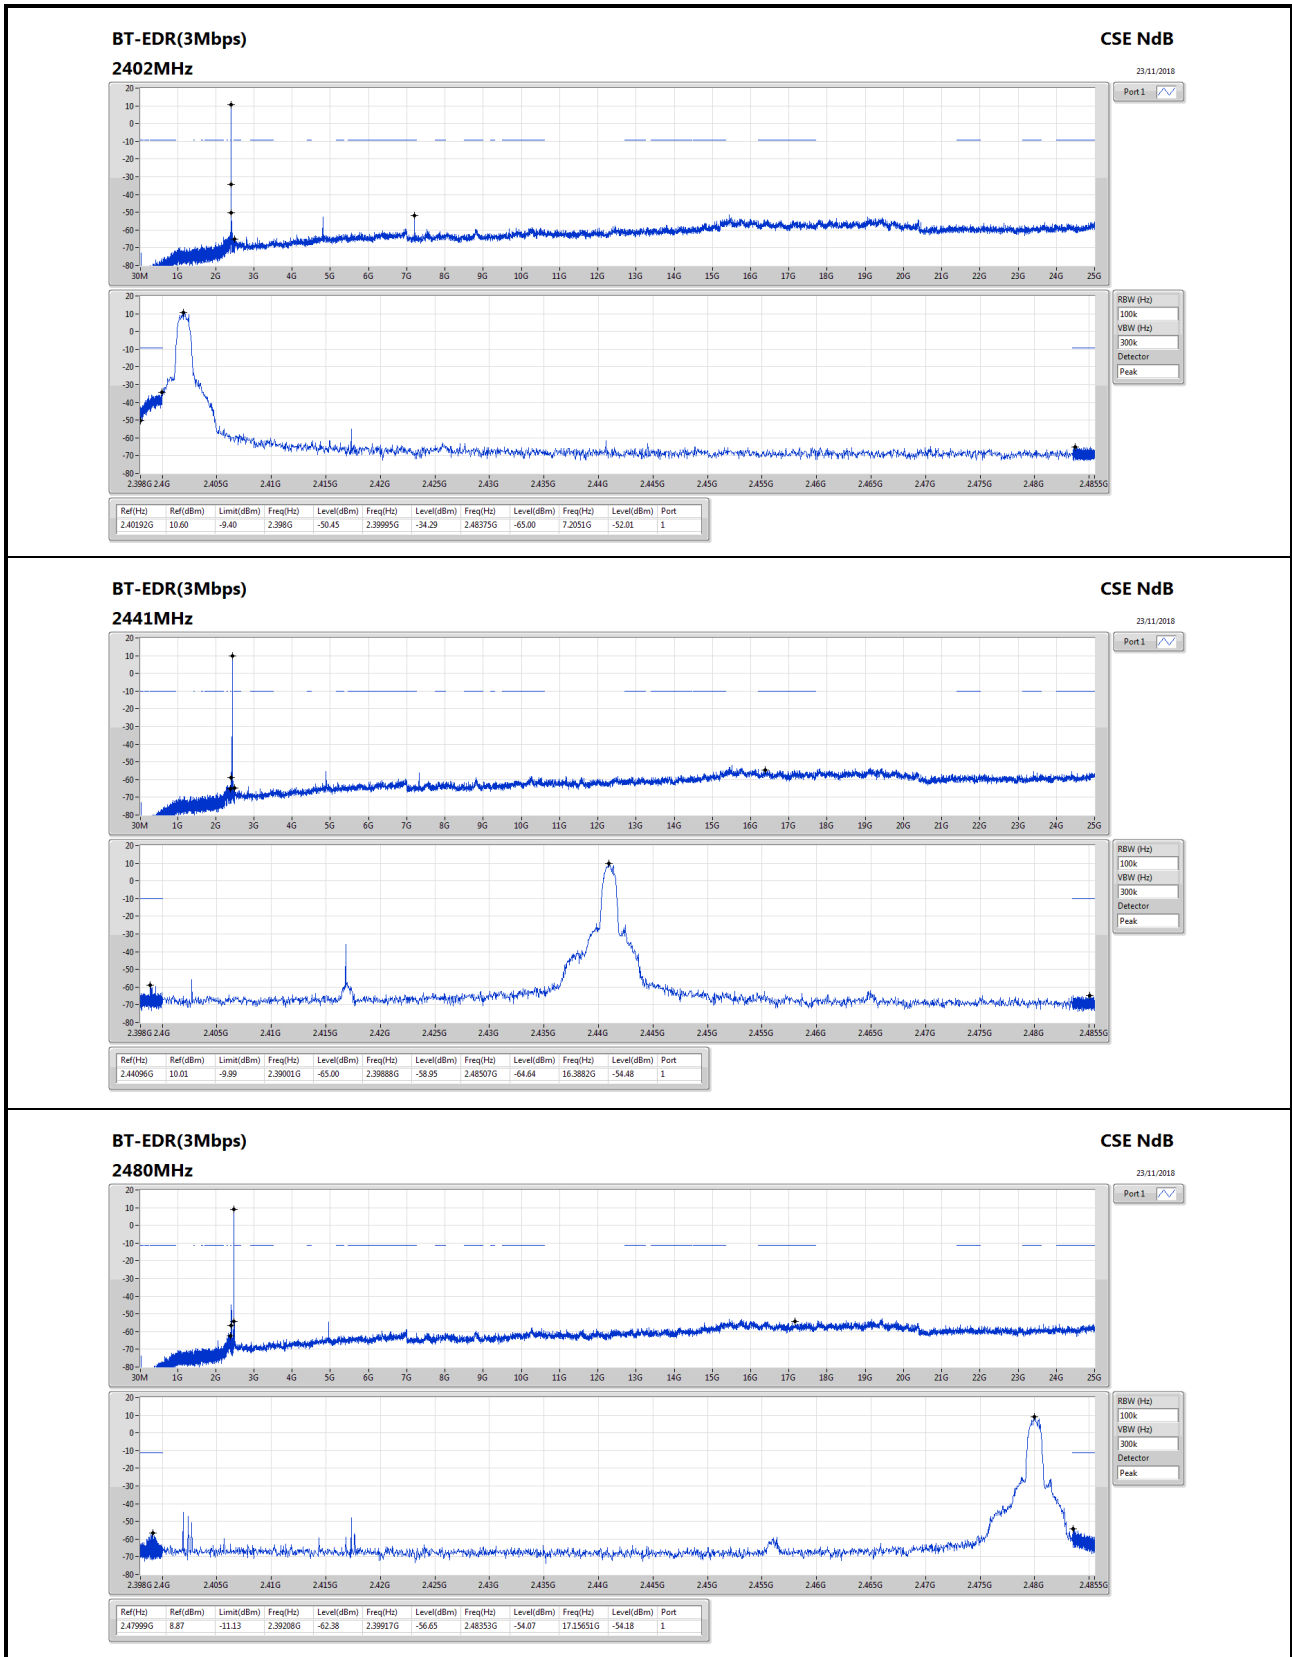



Summary

| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|---------------|--------|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| 2.4-2.4835GHz | - | - | - | - | - | - | - | - | - | - | - | - |
| BT-BR(1Mbps) | Pass | PK | 30M | 22.16 | 40.00 | -17.84 | -13.40 | 3 | Vertical | 360 | 3.00 | - |



Result


| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|--------------|--------|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| BT-BR(1Mbps) | - | - | - | - | - | - | - | - | - | - | - | - |
| 2441MHz | Pass | PK | 30M | 22.16 | 40.00 | -17.84 | -13.40 | 3 | Vertical | 360 | 3.00 | - |
| 2441MHz | Pass | PK | 55.22M | 21.46 | 40.00 | -18.54 | -25.17 | 3 | Vertical | 360 | 3.00 | - |
| 2441MHz | Pass | PK | 249.22M | 16.17 | 46.00 | -29.83 | -17.26 | 3 | Vertical | 360 | 3.00 | - |
| 2441MHz | Pass | PK | 377.26M | 17.82 | 46.00 | -28.18 | -14.79 | 3 | Vertical | 360 | 3.00 | - |
| 2441MHz | Pass | PK | 509.18M | 22.50 | 46.00 | -23.50 | -12.12 | 3 | Vertical | 360 | 3.00 | - |
| 2441MHz | Pass | PK | 596.48M | 22.95 | 46.00 | -23.05 | -10.91 | 3 | Vertical | 360 | 3.00 | - |
| 2441MHz | Pass | PK | 30M | 19.75 | 40.00 | -20.25 | -13.40 | 3 | Horizontal | 0 | 3.00 | - |
| 2441MHz | Pass | PK | 132.82M | 13.46 | 43.50 | -30.04 | -19.19 | 3 | Horizontal | 0 | 3.00 | - |
| 2441MHz | Pass | PK | 262.8M | 16.36 | 46.00 | -29.64 | -15.85 | 3 | Horizontal | 0 | 3.00 | - |
| 2441MHz | Pass | PK | 396.66M | 18.46 | 46.00 | -27.54 | -14.16 | 3 | Horizontal | 0 | 3.00 | - |
| 2441MHz | Pass | PK | 485.9M | 20.20 | 46.00 | -25.80 | -12.30 | 3 | Horizontal | 0 | 3.00 | - |
| 2441MHz | Pass | PK | 584.84M | 21.83 | 46.00 | -24.17 | -10.99 | 3 | Horizontal | 0 | 3.00 | - |



BT-BR(1Mbps)

23/01/2019

2441MHz_DC Power Supply

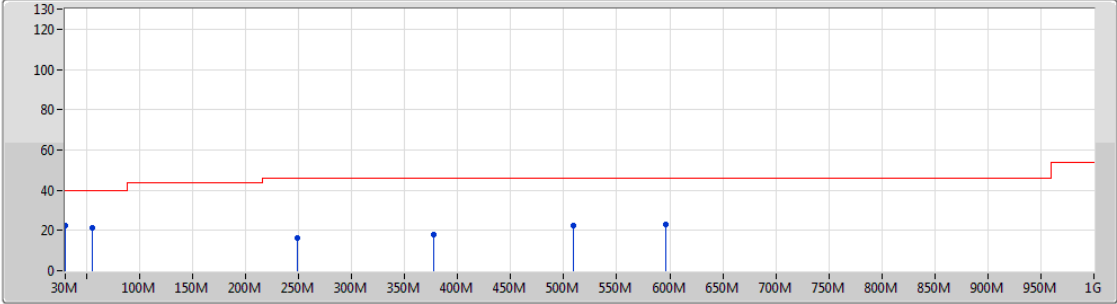

Lim.PK
 PK
 Lim.AV
 AV


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| PK | 30M | 22.16 | 40.00 | -17.84 | -13.40 | 3 | Vertical | 360 | 3.00 | - |
| PK | 55.22M | 21.46 | 40.00 | -18.54 | -25.17 | 3 | Vertical | 360 | 3.00 | - |
| PK | 249.22M | 16.17 | 46.00 | -29.83 | -17.26 | 3 | Vertical | 360 | 3.00 | - |
| PK | 377.26M | 17.82 | 46.00 | -28.18 | -14.79 | 3 | Vertical | 360 | 3.00 | - |
| PK | 509.18M | 22.50 | 46.00 | -23.50 | -12.12 | 3 | Vertical | 360 | 3.00 | - |
| PK | 596.48M | 22.95 | 46.00 | -23.05 | -10.91 | 3 | Vertical | 360 | 3.00 | - |



BT-BR(1Mbps)

23/01/2019

2441MHz_DC Power Supply

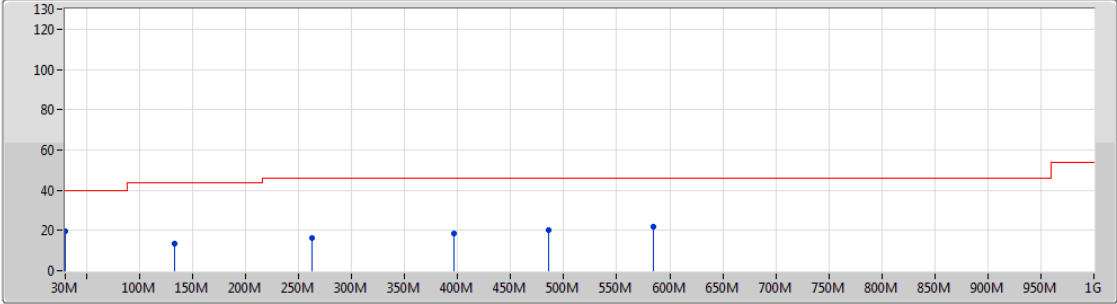

Lim.PK
 PK
 Lim.AV
 AV

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| PK | 30M | 19.75 | 40.00 | -20.25 | -13.40 | 3 | Horizontal | 0 | 3.00 | - |
| PK | 132.82M | 13.46 | 43.50 | -30.04 | -19.19 | 3 | Horizontal | 0 | 3.00 | - |
| PK | 262.8M | 16.36 | 46.00 | -29.64 | -15.85 | 3 | Horizontal | 0 | 3.00 | - |
| PK | 396.66M | 18.46 | 46.00 | -27.54 | -14.16 | 3 | Horizontal | 0 | 3.00 | - |
| PK | 485.9M | 20.20 | 46.00 | -25.80 | -12.30 | 3 | Horizontal | 0 | 3.00 | - |
| PK | 584.84M | 21.83 | 46.00 | -24.17 | -10.99 | 3 | Horizontal | 0 | 3.00 | - |



Summary

| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------------------|--------|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| 2.4-2.4835GHz | - | - | - | - | - | - | - | - | - | - | - | - |
| BT-BR(1Mbps) | Pass | AV | 2.4948G | 44.51 | 54.00 | -9.49 | 31.16 | 3 | Vertical | 225 | 1.62 | - |
| BT-2EDR_Nss1_1TX | Pass | AV | 2.4835G | 44.47 | 54.00 | -9.53 | 31.11 | 3 | Vertical | 208 | 2.99 | - |
| BT-3EDR_Nss1_1TX | Pass | AV | 2.484G | 44.19 | 54.00 | -9.81 | 31.12 | 3 | Vertical | 200 | 2.99 | - |



Result

| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------------------|--------|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| BT-BR(1Mbps) | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | AV | 2.352G | 43.53 | 54.00 | -10.47 | 30.65 | 3 | Vertical | 217 | 2.21 | - |
| 2402MHz | Pass | AV | 2.402G | 108.15 | Inf | -Inf | 30.82 | 3 | Vertical | 217 | 2.21 | - |
| 2402MHz | Pass | PK | 2.3524G | 55.86 | 74.00 | -18.14 | 30.65 | 3 | Vertical | 217 | 2.21 | - |
| 2402MHz | Pass | PK | 2.402G | 108.67 | Inf | -Inf | 30.82 | 3 | Vertical | 217 | 2.21 | - |
| 2402MHz | Pass | AV | 2.352G | 43.35 | 54.00 | -10.65 | 30.65 | 3 | Horizontal | 227 | 1.06 | - |
| 2402MHz | Pass | AV | 2.402G | 101.34 | Inf | -Inf | 30.82 | 3 | Horizontal | 227 | 1.06 | - |
| 2402MHz | Pass | PK | 2.36G | 55.76 | 74.00 | -18.24 | 30.67 | 3 | Horizontal | 227 | 1.06 | - |
| 2402MHz | Pass | PK | 2.4018G | 101.90 | Inf | -Inf | 30.82 | 3 | Horizontal | 227 | 1.06 | - |
| 2402MHz | Pass | AV | 4.80436G | 31.77 | 54.00 | -22.23 | 2.08 | 3 | Vertical | 232 | 1.01 | - |
| 2402MHz | Pass | PK | 4.7983G | 44.40 | 74.00 | -29.60 | 2.07 | 3 | Vertical | 232 | 1.01 | - |
| 2402MHz | Pass | AV | 4.79836G | 31.85 | 54.00 | -22.15 | 2.07 | 3 | Horizontal | 205 | 1.50 | - |
| 2402MHz | Pass | PK | 4.7959G | 49.46 | 74.00 | -24.54 | 2.06 | 3 | Horizontal | 205 | 1.50 | - |
| 2441MHz | Pass | AV | 2.3746G | 43.07 | 54.00 | -10.93 | 30.72 | 3 | Vertical | 358 | 1.30 | - |
| 2441MHz | Pass | AV | 2.441G | 102.02 | Inf | -Inf | 30.95 | 3 | Vertical | 358 | 1.30 | - |
| 2441MHz | Pass | AV | 2.497G | 43.88 | 54.00 | -10.12 | 31.16 | 3 | Vertical | 358 | 1.30 | - |
| 2441MHz | Pass | PK | 2.3606G | 55.22 | 74.00 | -18.78 | 30.67 | 3 | Vertical | 358 | 1.30 | - |
| 2441MHz | Pass | PK | 2.441G | 102.47 | Inf | -Inf | 30.95 | 3 | Vertical | 358 | 1.30 | - |
| 2441MHz | Pass | PK | 2.499G | 55.60 | 74.00 | -18.40 | 31.17 | 3 | Vertical | 358 | 1.30 | - |
| 2441MHz | Pass | AV | 2.367G | 42.90 | 54.00 | -11.10 | 30.70 | 3 | Horizontal | 224 | 1.04 | - |
| 2441MHz | Pass | AV | 2.441G | 98.34 | Inf | -Inf | 30.95 | 3 | Horizontal | 224 | 1.04 | - |
| 2441MHz | Pass | AV | 2.4866G | 43.69 | 54.00 | -10.31 | 31.12 | 3 | Horizontal | 224 | 1.04 | - |
| 2441MHz | Pass | PK | 2.3666G | 55.52 | 74.00 | -18.48 | 30.70 | 3 | Horizontal | 224 | 1.04 | - |
| 2441MHz | Pass | PK | 2.441G | 98.81 | Inf | -Inf | 30.95 | 3 | Horizontal | 224 | 1.04 | - |
| 2441MHz | Pass | PK | 2.4986G | 56.02 | 74.00 | -17.98 | 31.17 | 3 | Horizontal | 224 | 1.04 | - |
| 2441MHz | Pass | AV | 4.88212G | 31.62 | 54.00 | -22.38 | 2.27 | 3 | Vertical | 192 | 1.00 | - |
| 2441MHz | Pass | PK | 4.8931G | 43.89 | 74.00 | -30.11 | 2.31 | 3 | Vertical | 192 | 1.00 | - |
| 2441MHz | Pass | AV | 4.89016G | 31.22 | 54.00 | -22.78 | 2.29 | 3 | Horizontal | 211 | 2.46 | - |
| 2441MHz | Pass | PK | 4.88728G | 43.94 | 74.00 | -30.06 | 2.29 | 3 | Horizontal | 211 | 2.46 | - |
| 2480MHz | Pass | AV | 2.48G | 103.77 | Inf | -Inf | 31.09 | 3 | Vertical | 225 | 1.62 | - |
| 2480MHz | Pass | AV | 2.4948G | 44.51 | 54.00 | -9.49 | 31.16 | 3 | Vertical | 225 | 1.62 | - |
| 2480MHz | Pass | PK | 2.48G | 104.25 | Inf | -Inf | 31.09 | 3 | Vertical | 225 | 1.62 | - |
| 2480MHz | Pass | PK | 2.494G | 56.02 | 74.00 | -17.98 | 31.15 | 3 | Vertical | 225 | 1.62 | - |
| 2480MHz | Pass | AV | 2.48G | 98.14 | Inf | -Inf | 31.09 | 3 | Horizontal | 155 | 1.50 | - |
| 2480MHz | Pass | AV | 2.4892G | 43.97 | 54.00 | -10.03 | 31.13 | 3 | Horizontal | 155 | 1.50 | - |
| 2480MHz | Pass | PK | 2.48G | 98.70 | Inf | -Inf | 31.09 | 3 | Horizontal | 155 | 1.50 | - |
| 2480MHz | Pass | PK | 2.4954G | 57.24 | 74.00 | -16.76 | 31.16 | 3 | Horizontal | 155 | 1.50 | - |
| 2480MHz | Pass | AV | 4.95964G | 31.58 | 54.00 | -22.42 | 2.47 | 3 | Vertical | 187 | 1.50 | - |
| 2480MHz | Pass | PK | 4.9648G | 43.75 | 74.00 | -30.25 | 2.48 | 3 | Vertical | 187 | 1.50 | - |
| 2480MHz | Pass | AV | 4.9732G | 30.85 | 54.00 | -23.15 | 2.50 | 3 | Horizontal | 344 | 1.50 | - |
| 2480MHz | Pass | PK | 4.95118G | 43.45 | 74.00 | -30.55 | 2.45 | 3 | Horizontal | 344 | 1.50 | - |
| BT-2EDR_Nss1_1TX | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | AV | 2.369G | 43.06 | 54.00 | -10.94 | 30.70 | 3 | Vertical | 352 | 1.50 | - |
| 2402MHz | Pass | AV | 2.402G | 99.56 | Inf | -Inf | 30.82 | 3 | Vertical | 352 | 1.50 | - |
| 2402MHz | Pass | PK | 2.3878G | 55.67 | 74.00 | -18.33 | 30.77 | 3 | Vertical | 352 | 1.50 | - |
| 2402MHz | Pass | PK | 2.4022G | 103.22 | Inf | -Inf | 30.82 | 3 | Vertical | 352 | 1.50 | - |
| 2402MHz | Pass | AV | 2.384G | 42.91 | 54.00 | -11.09 | 30.76 | 3 | Horizontal | 222 | 1.28 | - |
| 2402MHz | Pass | AV | 2.402G | 95.46 | Inf | -Inf | 30.82 | 3 | Horizontal | 222 | 1.28 | - |



RSE TX above 1GHz Result

Appendix G.2

| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------------------|--------|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| 2402MHz | Pass | PK | 2.3656G | 56.36 | 74.00 | -17.64 | 30.69 | 3 | Horizontal | 222 | 1.28 | - |
| 2402MHz | Pass | PK | 2.4022G | 99.21 | Inf | -Inf | 30.82 | 3 | Horizontal | 222 | 1.28 | - |
| 2441MHz | Pass | AV | 2.351G | 43.07 | 54.00 | -10.93 | 30.64 | 3 | Vertical | 355 | 1.29 | - |
| 2441MHz | Pass | AV | 2.441G | 98.40 | Inf | -Inf | 30.95 | 3 | Vertical | 355 | 1.29 | - |
| 2441MHz | Pass | AV | 2.4998G | 43.68 | 54.00 | -10.32 | 31.17 | 3 | Vertical | 355 | 1.29 | - |
| 2441MHz | Pass | PK | 2.3454G | 55.82 | 74.00 | -18.18 | 30.62 | 3 | Vertical | 355 | 1.29 | - |
| 2441MHz | Pass | PK | 2.441G | 102.12 | Inf | -Inf | 30.95 | 3 | Vertical | 355 | 1.29 | - |
| 2441MHz | Pass | PK | 2.4946G | 56.23 | 74.00 | -17.77 | 31.15 | 3 | Vertical | 355 | 1.29 | - |
| 2441MHz | Pass | AV | 2.3738G | 42.97 | 54.00 | -11.03 | 30.72 | 3 | Horizontal | 219 | 1.05 | - |
| 2441MHz | Pass | AV | 2.441G | 95.34 | Inf | -Inf | 30.95 | 3 | Horizontal | 219 | 1.05 | - |
| 2441MHz | Pass | AV | 2.4862G | 43.73 | 54.00 | -10.27 | 31.12 | 3 | Horizontal | 219 | 1.05 | - |
| 2441MHz | Pass | PK | 2.389G | 55.46 | 74.00 | -18.54 | 30.77 | 3 | Horizontal | 219 | 1.05 | - |
| 2441MHz | Pass | PK | 2.441G | 98.99 | Inf | -Inf | 30.95 | 3 | Horizontal | 219 | 1.05 | - |
| 2441MHz | Pass | PK | 2.4906G | 55.62 | 74.00 | -18.38 | 31.13 | 3 | Horizontal | 219 | 1.05 | - |
| 2480MHz | Pass | AV | 2.48G | 101.94 | Inf | -Inf | 31.09 | 3 | Vertical | 208 | 2.99 | - |
| 2480MHz | Pass | AV | 2.4835G | 44.47 | 54.00 | -9.53 | 31.11 | 3 | Vertical | 208 | 2.99 | - |
| 2480MHz | Pass | PK | 2.4802G | 105.61 | Inf | -Inf | 31.09 | 3 | Vertical | 208 | 2.99 | - |
| 2480MHz | Pass | PK | 2.49G | 56.59 | 74.00 | -17.41 | 31.13 | 3 | Vertical | 208 | 2.99 | - |
| 2480MHz | Pass | AV | 2.48G | 93.88 | Inf | -Inf | 31.09 | 3 | Horizontal | 151 | 1.49 | - |
| 2480MHz | Pass | AV | 2.4848G | 43.84 | 54.00 | -10.16 | 31.12 | 3 | Horizontal | 151 | 1.49 | - |
| 2480MHz | Pass | PK | 2.4802G | 97.59 | Inf | -Inf | 31.09 | 3 | Horizontal | 151 | 1.49 | - |
| 2480MHz | Pass | PK | 2.4846G | 56.03 | 74.00 | -17.97 | 31.12 | 3 | Horizontal | 151 | 1.49 | - |
| BT-3EDR_Nss1_1TX | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | AV | 2.3668G | 43.01 | 54.00 | -10.99 | 30.70 | 3 | Vertical | 348 | 1.50 | - |
| 2402MHz | Pass | AV | 2.402G | 99.82 | Inf | -Inf | 30.82 | 3 | Vertical | 348 | 1.50 | - |
| 2402MHz | Pass | PK | 2.3846G | 56.90 | 74.00 | -17.10 | 30.76 | 3 | Vertical | 348 | 1.50 | - |
| 2402MHz | Pass | PK | 2.402G | 103.68 | Inf | -Inf | 30.82 | 3 | Vertical | 348 | 1.50 | - |
| 2402MHz | Pass | AV | 2.3862G | 43.07 | 54.00 | -10.93 | 30.76 | 3 | Horizontal | 216 | 1.28 | - |
| 2402MHz | Pass | AV | 2.402G | 95.93 | Inf | -Inf | 30.82 | 3 | Horizontal | 216 | 1.28 | - |
| 2402MHz | Pass | PK | 2.3776G | 55.59 | 74.00 | -18.41 | 30.73 | 3 | Horizontal | 216 | 1.28 | - |
| 2402MHz | Pass | PK | 2.402G | 99.74 | Inf | -Inf | 30.82 | 3 | Horizontal | 216 | 1.28 | - |
| 2441MHz | Pass | AV | 2.3674G | 42.95 | 54.00 | -11.05 | 30.70 | 3 | Vertical | 348 | 1.50 | - |
| 2441MHz | Pass | AV | 2.441G | 98.12 | Inf | -Inf | 30.95 | 3 | Vertical | 348 | 1.50 | - |
| 2441MHz | Pass | AV | 2.499G | 43.72 | 54.00 | -10.28 | 31.17 | 3 | Vertical | 348 | 1.50 | - |
| 2441MHz | Pass | PK | 2.383G | 55.94 | 74.00 | -18.06 | 30.75 | 3 | Vertical | 348 | 1.50 | - |
| 2441MHz | Pass | PK | 2.441G | 101.97 | Inf | -Inf | 30.95 | 3 | Vertical | 348 | 1.50 | - |
| 2441MHz | Pass | PK | 2.4986G | 56.04 | 74.00 | -17.96 | 31.17 | 3 | Vertical | 348 | 1.50 | - |
| 2441MHz | Pass | AV | 2.385G | 42.97 | 54.00 | -11.03 | 30.76 | 3 | Horizontal | 212 | 1.04 | - |
| 2441MHz | Pass | AV | 2.441G | 95.25 | Inf | -Inf | 30.95 | 3 | Horizontal | 212 | 1.04 | - |
| 2441MHz | Pass | AV | 2.499G | 43.70 | 54.00 | -10.30 | 31.17 | 3 | Horizontal | 212 | 1.04 | - |
| 2441MHz | Pass | PK | 2.3626G | 55.27 | 74.00 | -18.73 | 30.68 | 3 | Horizontal | 212 | 1.04 | - |
| 2441MHz | Pass | PK | 2.441G | 99.07 | Inf | -Inf | 30.95 | 3 | Horizontal | 212 | 1.04 | - |
| 2441MHz | Pass | PK | 2.4934G | 55.24 | 74.00 | -18.76 | 31.14 | 3 | Horizontal | 212 | 1.04 | - |
| 2480MHz | Pass | AV | 2.48G | 101.92 | Inf | -Inf | 31.09 | 3 | Vertical | 200 | 2.99 | - |
| 2480MHz | Pass | AV | 2.484G | 44.19 | 54.00 | -9.81 | 31.12 | 3 | Vertical | 200 | 2.99 | - |
| 2480MHz | Pass | PK | 2.48G | 105.60 | Inf | -Inf | 31.09 | 3 | Vertical | 200 | 2.99 | - |
| 2480MHz | Pass | PK | 2.4842G | 56.34 | 74.00 | -17.66 | 31.12 | 3 | Vertical | 200 | 2.99 | - |
| 2480MHz | Pass | AV | 2.48G | 94.06 | Inf | -Inf | 31.09 | 3 | Horizontal | 143 | 1.50 | - |
| 2480MHz | Pass | AV | 2.4958G | 44.04 | 54.00 | -9.96 | 31.16 | 3 | Horizontal | 143 | 1.50 | - |



RSE TX above 1GHz Result

Appendix G.2


| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|---------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|----------|
| 2480MHz | Pass | PK | 2.48G | 97.83 | Inf | -Inf | 31.09 | 3 | Horizontal | 143 | 1.50 | - |
| 2480MHz | Pass | PK | 2.4962G | 56.11 | 74.00 | -17.89 | 31.16 | 3 | Horizontal | 143 | 1.50 | - |



BT-BR(1Mbps)

22/01/2019

2402MHz_TX

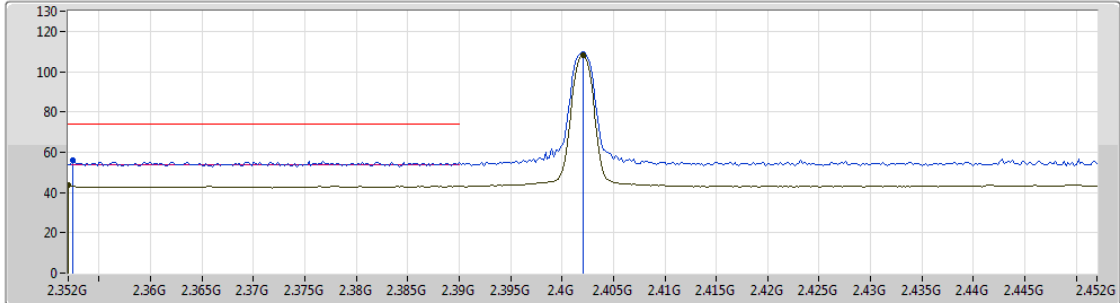


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 2.352G | 43.53 | 54.00 | -10.47 | 30.65 | 3 | Vertical | 217 | 2.21 | - |
| AV | 2.402G | 108.15 | Inf | -Inf | 30.82 | 3 | Vertical | 217 | 2.21 | - |
| PK | 2.3524G | 55.86 | 74.00 | -18.14 | 30.65 | 3 | Vertical | 217 | 2.21 | - |
| PK | 2.402G | 108.67 | Inf | -Inf | 30.82 | 3 | Vertical | 217 | 2.21 | - |

BT-BR(1Mbps)

22/01/2019

2402MHz_TX

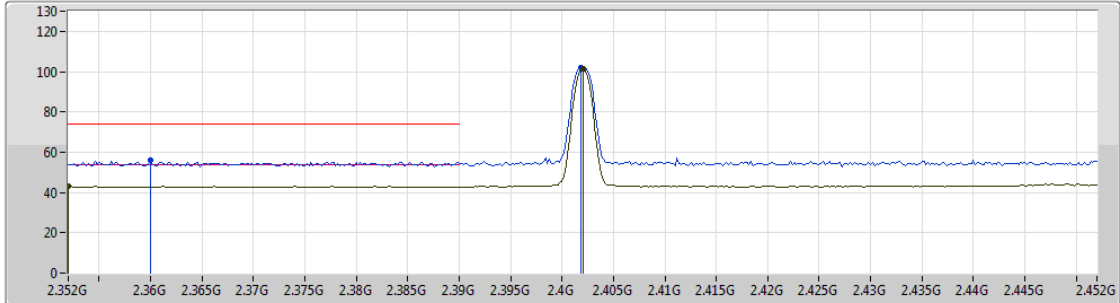


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 2.352G | 43.35 | 54.00 | -10.65 | 30.65 | 3 | Horizontal | 227 | 1.06 | - |
| AV | 2.402G | 101.34 | Inf | -Inf | 30.82 | 3 | Horizontal | 227 | 1.06 | - |
| PK | 2.36G | 55.76 | 74.00 | -18.24 | 30.67 | 3 | Horizontal | 227 | 1.06 | - |
| PK | 2.4018G | 101.90 | Inf | -Inf | 30.82 | 3 | Horizontal | 227 | 1.06 | - |



BT-BR(1Mbps)

22/01/2019

2402MHz_TX

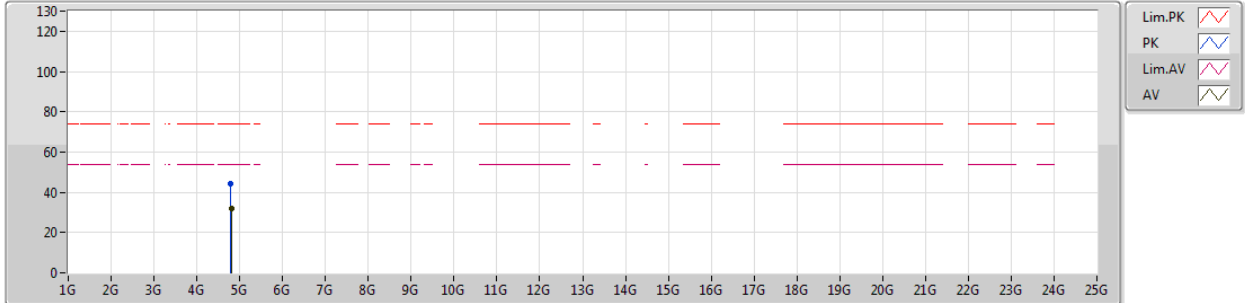


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 4.80436G | 31.77 | 54.00 | -22.23 | 2.08 | 3 | Vertical | 232 | 1.01 | - |
| PK | 4.7983G | 44.40 | 74.00 | -29.60 | 2.07 | 3 | Vertical | 232 | 1.01 | - |

BT-BR(1Mbps)

22/01/2019

2402MHz_TX

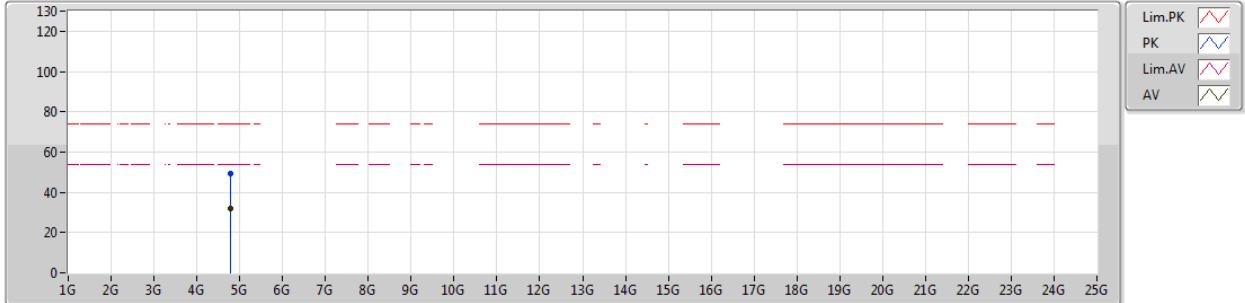




| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 4.79836G | 31.85 | 54.00 | -22.15 | 2.07 | 3 | Horizontal | 205 | 1.50 | - |
| PK | 4.7959G | 49.46 | 74.00 | -24.54 | 2.06 | 3 | Horizontal | 205 | 1.50 | - |

BT-BR(1Mbps)

2441MHz_TX

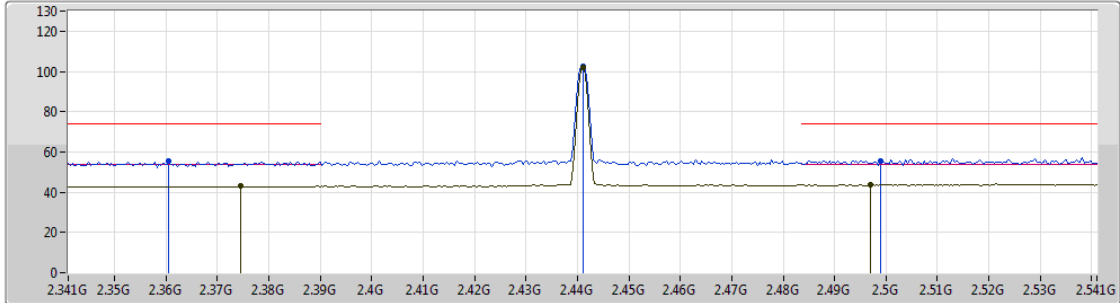22/01/2019




Lim.PK 
 PK 
 Lim.AV 
 AV 

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|----------|
| AV | 2.3746G | 43.07 | 54.00 | -10.93 | 30.72 | 3 | Vertical | 358 | 1.30 | - |
| AV | 2.441G | 102.02 | Inf | -Inf | 30.95 | 3 | Vertical | 358 | 1.30 | - |
| AV | 2.497G | 43.88 | 54.00 | -10.12 | 31.16 | 3 | Vertical | 358 | 1.30 | - |
| PK | 2.3606G | 55.22 | 74.00 | -18.78 | 30.67 | 3 | Vertical | 358 | 1.30 | - |
| PK | 2.441G | 102.47 | Inf | -Inf | 30.95 | 3 | Vertical | 358 | 1.30 | - |
| PK | 2.499G | 55.60 | 74.00 | -18.40 | 31.17 | 3 | Vertical | 358 | 1.30 | - |

BT-BR(1Mbps)

22/01/2019

2441MHz_TX

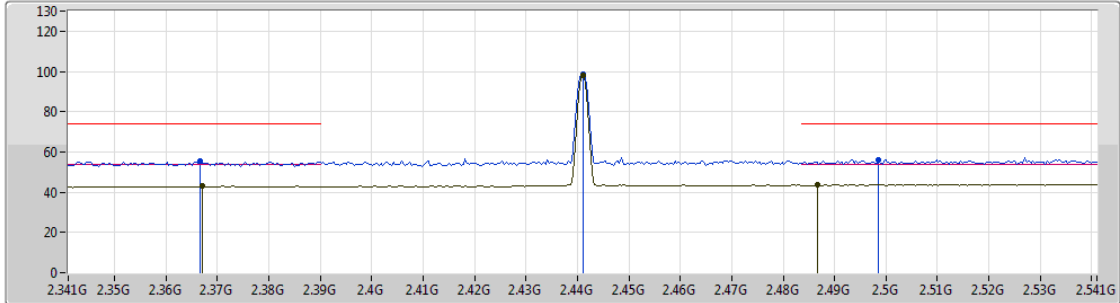


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|----------|
| AV | 2.367G | 42.90 | 54.00 | -11.10 | 30.70 | 3 | Horizontal | 224 | 1.04 | - |
| AV | 2.441G | 98.34 | Inf | -Inf | 30.95 | 3 | Horizontal | 224 | 1.04 | - |
| AV | 2.4866G | 43.69 | 54.00 | -10.31 | 31.12 | 3 | Horizontal | 224 | 1.04 | - |
| PK | 2.3666G | 55.52 | 74.00 | -18.48 | 30.70 | 3 | Horizontal | 224 | 1.04 | - |
| PK | 2.441G | 98.81 | Inf | -Inf | 30.95 | 3 | Horizontal | 224 | 1.04 | - |
| PK | 2.4986G | 56.02 | 74.00 | -17.98 | 31.17 | 3 | Horizontal | 224 | 1.04 | - |



BT-BR(1Mbps)

22/01/2019

2441MHz_TX

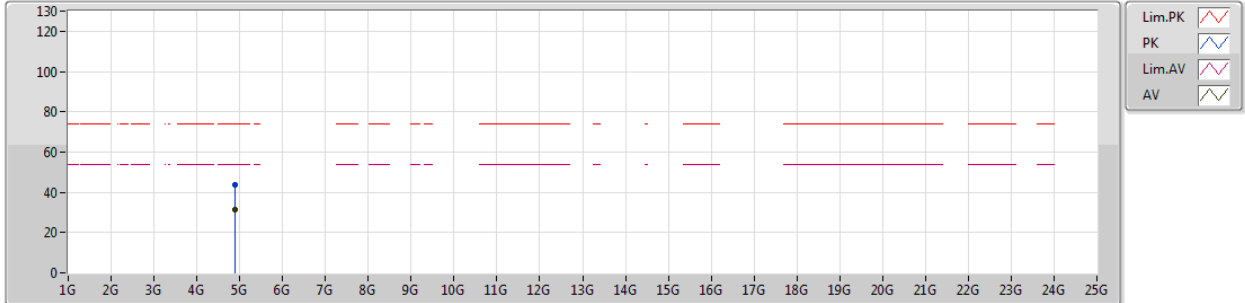


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 4.88212G | 31.62 | 54.00 | -22.38 | 2.27 | 3 | Vertical | 192 | 1.00 | - |
| PK | 4.8931G | 43.89 | 74.00 | -30.11 | 2.31 | 3 | Vertical | 192 | 1.00 | - |



BT-BR(1Mbps)

22/01/2019

2441MHz_TX

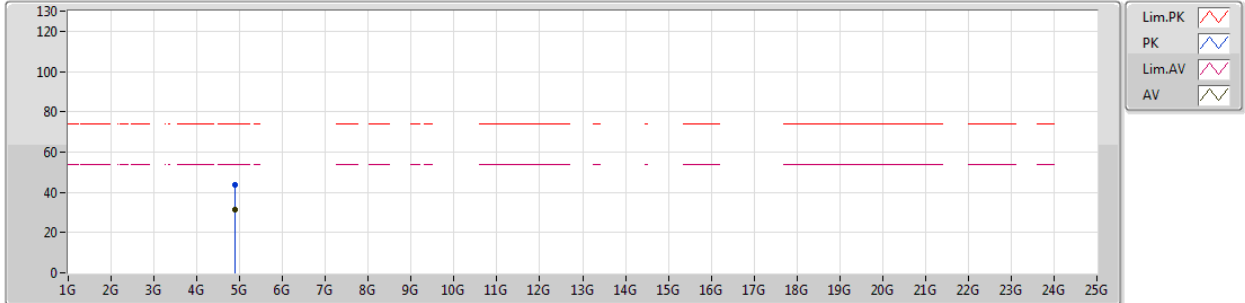


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 4.89016G | 31.22 | 54.00 | -22.78 | 2.29 | 3 | Horizontal | 211 | 2.46 | - |
| PK | 4.88728G | 43.94 | 74.00 | -30.06 | 2.29 | 3 | Horizontal | 211 | 2.46 | - |

BT-BR(1Mbps)

22/01/2019

2480MHz_TX

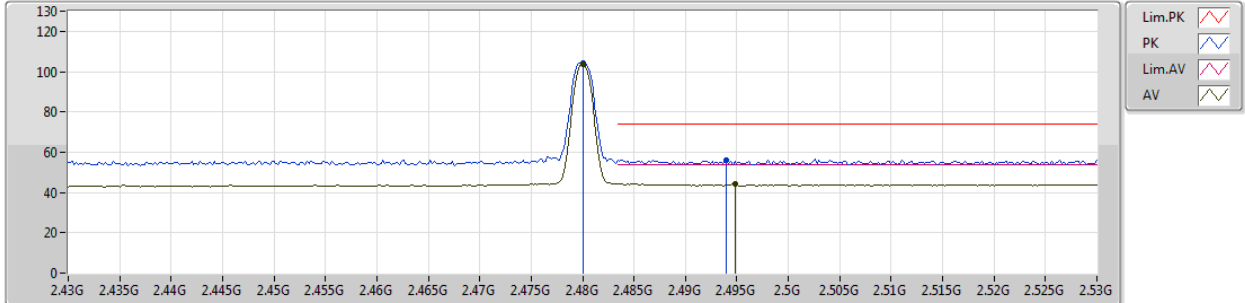


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 2.48G | 103.77 | Inf | -Inf | 31.09 | 3 | Vertical | 225 | 1.62 | - |
| AV | 2.4948G | 44.51 | 54.00 | -9.49 | 31.16 | 3 | Vertical | 225 | 1.62 | - |
| PK | 2.48G | 104.25 | Inf | -Inf | 31.09 | 3 | Vertical | 225 | 1.62 | - |
| PK | 2.494G | 56.02 | 74.00 | -17.98 | 31.15 | 3 | Vertical | 225 | 1.62 | - |

BT-BR(1Mbps)

2480MHz_TX

22/01/2019

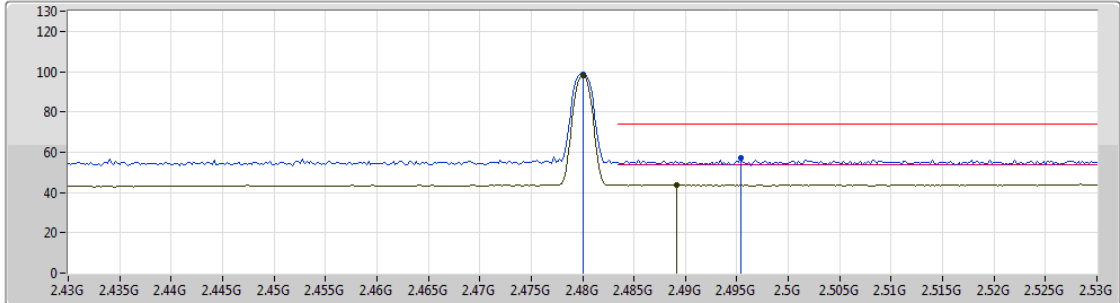


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 2.48G | 98.14 | Inf | -Inf | 31.09 | 3 | Horizontal | 155 | 1.50 | - |
| AV | 2.4892G | 43.97 | 54.00 | -10.03 | 31.13 | 3 | Horizontal | 155 | 1.50 | - |
| PK | 2.48G | 98.70 | Inf | -Inf | 31.09 | 3 | Horizontal | 155 | 1.50 | - |
| PK | 2.4954G | 57.24 | 74.00 | -16.76 | 31.16 | 3 | Horizontal | 155 | 1.50 | - |

BT-BR(1Mbps)

22/01/2019

2480MHz_TX

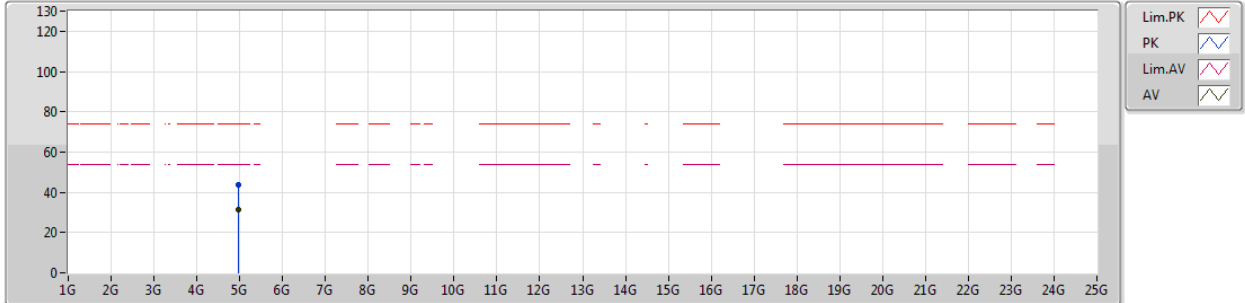


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 4.95964G | 31.58 | 54.00 | -22.42 | 2.47 | 3 | Vertical | 187 | 1.50 | - |
| PK | 4.9648G | 43.75 | 74.00 | -30.25 | 2.48 | 3 | Vertical | 187 | 1.50 | - |



BT-BR(1Mbps)

22/01/2019

2480MHz_TX

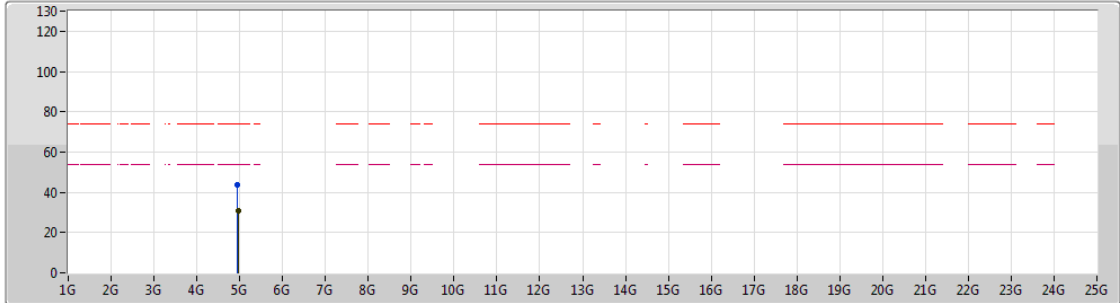


Lim.PK
 PK
 Lim.AV
 AV





| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 4.9732G | 30.85 | 54.00 | -23.15 | 2.50 | 3 | Horizontal | 344 | 1.50 | - |
| PK | 4.95118G | 43.45 | 74.00 | -30.55 | 2.45 | 3 | Horizontal | 344 | 1.50 | - |

BT-2EDR_Nss1_1TX

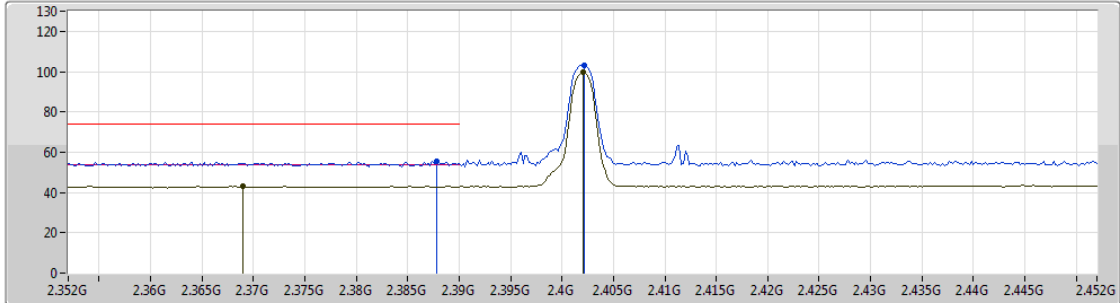22/01/2019

2402MHz_TX




Lim.PK 
 PK 
 Lim.AV 
 AV 

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 2.369G | 43.06 | 54.00 | -10.94 | 30.70 | 3 | Vertical | 352 | 1.50 | - |
| AV | 2.402G | 99.56 | Inf | -Inf | 30.82 | 3 | Vertical | 352 | 1.50 | - |
| PK | 2.3878G | 55.67 | 74.00 | -18.33 | 30.77 | 3 | Vertical | 352 | 1.50 | - |
| PK | 2.4022G | 103.22 | Inf | -Inf | 30.82 | 3 | Vertical | 352 | 1.50 | - |

BT-2EDR_Nss1_1TX

22/01/2019

2402MHz_TX

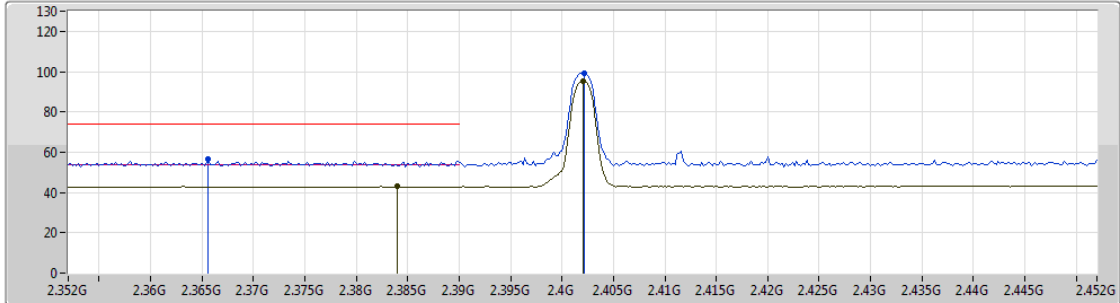


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 2.384G | 42.91 | 54.00 | -11.09 | 30.76 | 3 | Horizontal | 222 | 1.28 | - |
| AV | 2.402G | 95.46 | Inf | -Inf | 30.82 | 3 | Horizontal | 222 | 1.28 | - |
| PK | 2.3656G | 56.36 | 74.00 | -17.64 | 30.69 | 3 | Horizontal | 222 | 1.28 | - |
| PK | 2.4022G | 99.21 | Inf | -Inf | 30.82 | 3 | Horizontal | 222 | 1.28 | - |

BT-2EDR_Nss1_1TX

22/01/2019

2441MHz_TX

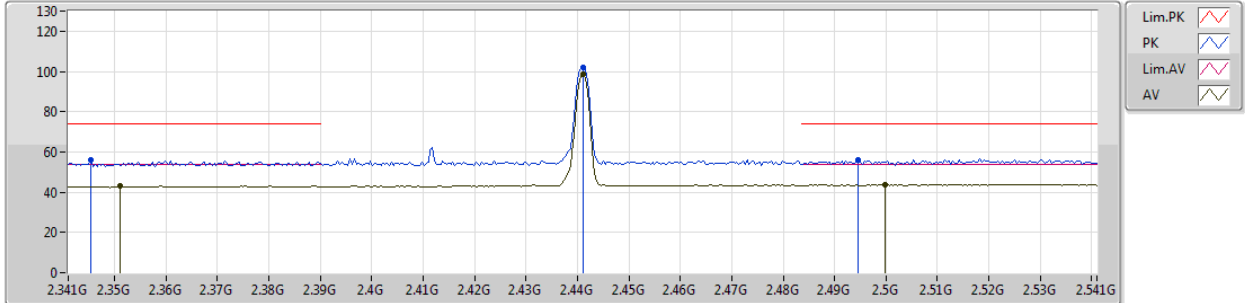






| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|----------|
| AV | 2.351G | 43.07 | 54.00 | -10.93 | 30.64 | 3 | Vertical | 355 | 1.29 | - |
| AV | 2.441G | 98.40 | Inf | -Inf | 30.95 | 3 | Vertical | 355 | 1.29 | - |
| AV | 2.4998G | 43.68 | 54.00 | -10.32 | 31.17 | 3 | Vertical | 355 | 1.29 | - |
| PK | 2.3454G | 55.82 | 74.00 | -18.18 | 30.62 | 3 | Vertical | 355 | 1.29 | - |
| PK | 2.441G | 102.12 | Inf | -Inf | 30.95 | 3 | Vertical | 355 | 1.29 | - |
| PK | 2.4946G | 56.23 | 74.00 | -17.77 | 31.15 | 3 | Vertical | 355 | 1.29 | - |

BT-2EDR_Nss1_1TX

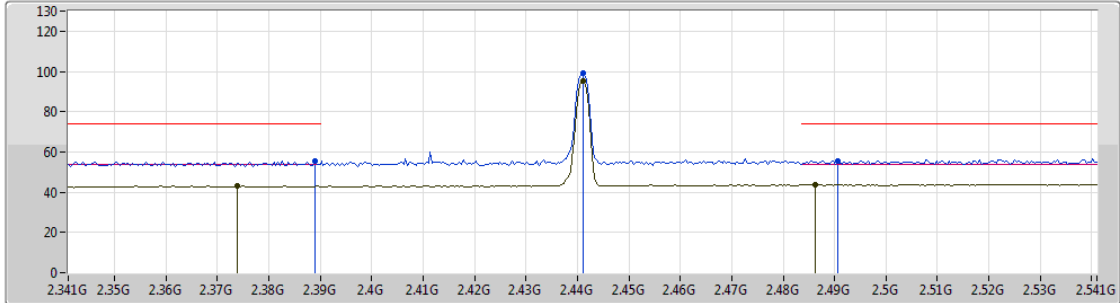22/01/2019

2441MHz_TX




Lim.PK 
 PK 
 Lim.AV 
 AV 

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|----------|
| AV | 2.3738G | 42.97 | 54.00 | -11.03 | 30.72 | 3 | Horizontal | 219 | 1.05 | - |
| AV | 2.441G | 95.34 | Inf | -Inf | 30.95 | 3 | Horizontal | 219 | 1.05 | - |
| AV | 2.4862G | 43.73 | 54.00 | -10.27 | 31.12 | 3 | Horizontal | 219 | 1.05 | - |
| PK | 2.389G | 55.46 | 74.00 | -18.54 | 30.77 | 3 | Horizontal | 219 | 1.05 | - |
| PK | 2.441G | 98.99 | Inf | -Inf | 30.95 | 3 | Horizontal | 219 | 1.05 | - |
| PK | 2.4906G | 55.62 | 74.00 | -18.38 | 31.13 | 3 | Horizontal | 219 | 1.05 | - |

BT-2EDR_Nss1_1TX

22/01/2019

2480MHz_TX

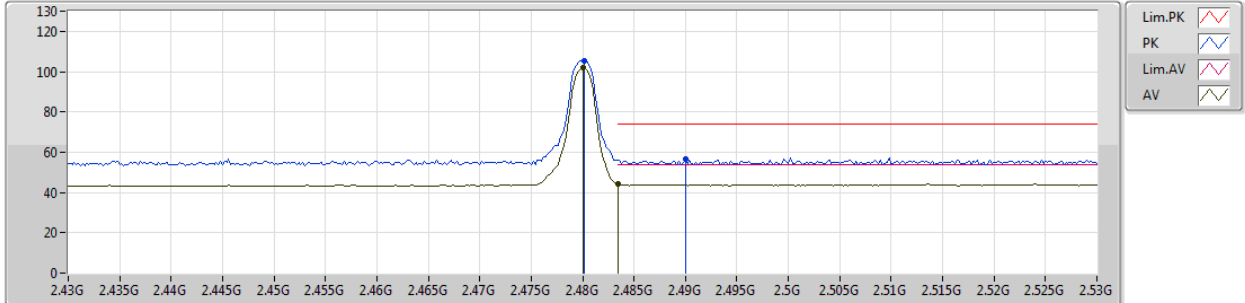


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 2.48G | 101.94 | Inf | -Inf | 31.09 | 3 | Vertical | 208 | 2.99 | - |
| AV | 2.4835G | 44.47 | 54.00 | -9.53 | 31.11 | 3 | Vertical | 208 | 2.99 | - |
| PK | 2.4802G | 105.61 | Inf | -Inf | 31.09 | 3 | Vertical | 208 | 2.99 | - |
| PK | 2.49G | 56.59 | 74.00 | -17.41 | 31.13 | 3 | Vertical | 208 | 2.99 | - |

BT-2EDR_Nss1_1TX

22/01/2019

2480MHz_TX

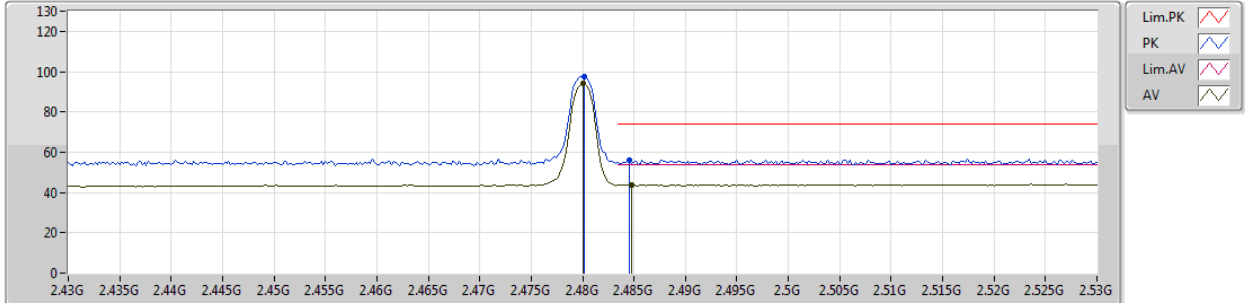






| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 2.48G | 93.88 | Inf | -Inf | 31.09 | 3 | Horizontal | 151 | 1.49 | - |
| AV | 2.4848G | 43.84 | 54.00 | -10.16 | 31.12 | 3 | Horizontal | 151 | 1.49 | - |
| PK | 2.4802G | 97.59 | Inf | -Inf | 31.09 | 3 | Horizontal | 151 | 1.49 | - |
| PK | 2.4846G | 56.03 | 74.00 | -17.97 | 31.12 | 3 | Horizontal | 151 | 1.49 | - |

BT-3EDR_Nss1_1TX

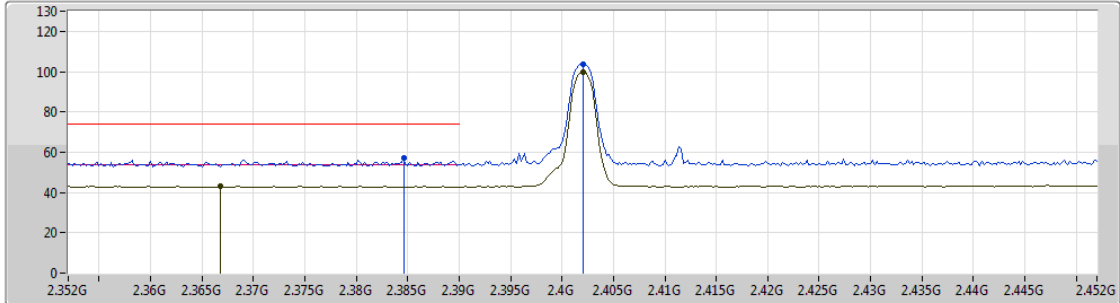23/01/2019

2402MHz_TX




Lim.PK 
 PK 
 Lim.AV 
 AV 

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 2.3668G | 43.01 | 54.00 | -10.99 | 30.70 | 3 | Vertical | 348 | 1.50 | - |
| AV | 2.402G | 99.82 | Inf | -Inf | 30.82 | 3 | Vertical | 348 | 1.50 | - |
| PK | 2.3846G | 56.90 | 74.00 | -17.10 | 30.76 | 3 | Vertical | 348 | 1.50 | - |
| PK | 2.402G | 103.68 | Inf | -Inf | 30.82 | 3 | Vertical | 348 | 1.50 | - |

BT-3EDR_Nss1_1TX

23/01/2019

2402MHz_TX

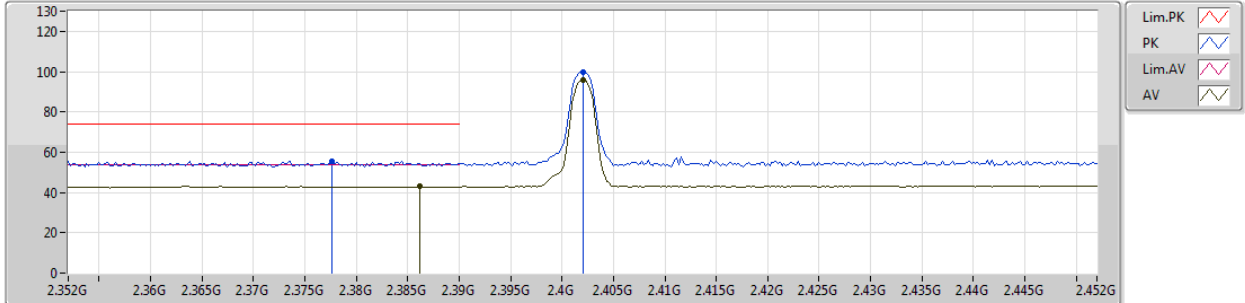


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 2.3862G | 43.07 | 54.00 | -10.93 | 30.76 | 3 | Horizontal | 216 | 1.28 | - |
| AV | 2.402G | 95.93 | Inf | -Inf | 30.82 | 3 | Horizontal | 216 | 1.28 | - |
| PK | 2.3776G | 55.59 | 74.00 | -18.41 | 30.73 | 3 | Horizontal | 216 | 1.28 | - |
| PK | 2.402G | 99.74 | Inf | -Inf | 30.82 | 3 | Horizontal | 216 | 1.28 | - |



BT-3EDR_Nss1_1TX

23/01/2019

2441MHz_TX

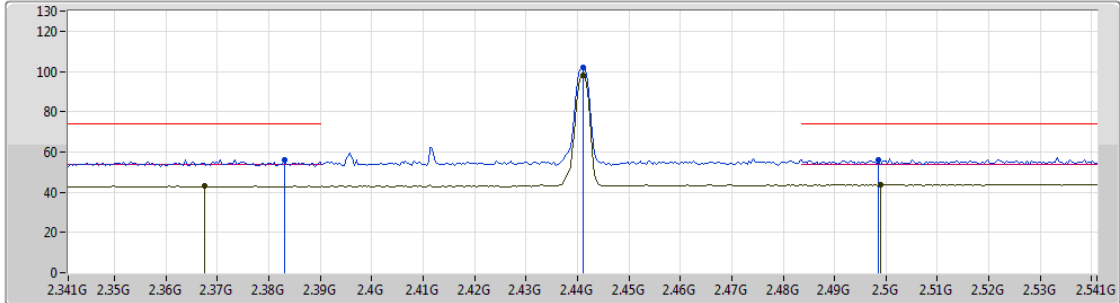


Lim.PK
 PK
 Lim.AV
 AV

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|----------|
| AV | 2.3674G | 42.95 | 54.00 | -11.05 | 30.70 | 3 | Vertical | 348 | 1.50 | - |
| AV | 2.441G | 98.12 | Inf | -Inf | 30.95 | 3 | Vertical | 348 | 1.50 | - |
| AV | 2.499G | 43.72 | 54.00 | -10.28 | 31.17 | 3 | Vertical | 348 | 1.50 | - |
| PK | 2.383G | 55.94 | 74.00 | -18.06 | 30.75 | 3 | Vertical | 348 | 1.50 | - |
| PK | 2.441G | 101.97 | Inf | -Inf | 30.95 | 3 | Vertical | 348 | 1.50 | - |
| PK | 2.4986G | 56.04 | 74.00 | -17.96 | 31.17 | 3 | Vertical | 348 | 1.50 | - |

BT-3EDR_Nss1_1TX

23/01/2019

2441MHz_TX

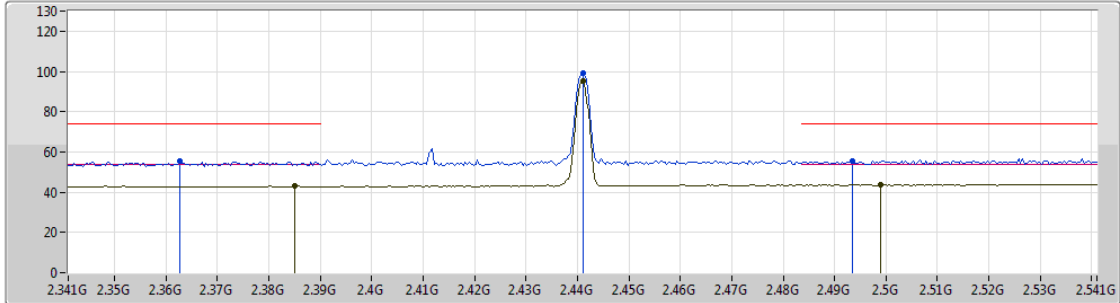


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|----------|
| AV | 2.385G | 42.97 | 54.00 | -11.03 | 30.76 | 3 | Horizontal | 212 | 1.04 | - |
| AV | 2.441G | 95.25 | Inf | -Inf | 30.95 | 3 | Horizontal | 212 | 1.04 | - |
| AV | 2.499G | 43.70 | 54.00 | -10.30 | 31.17 | 3 | Horizontal | 212 | 1.04 | - |
| PK | 2.3626G | 55.27 | 74.00 | -18.73 | 30.68 | 3 | Horizontal | 212 | 1.04 | - |
| PK | 2.441G | 99.07 | Inf | -Inf | 30.95 | 3 | Horizontal | 212 | 1.04 | - |
| PK | 2.4934G | 55.24 | 74.00 | -18.76 | 31.14 | 3 | Horizontal | 212 | 1.04 | - |

BT-3EDR_Nss1_1TX

23/01/2019

2480MHz_TX

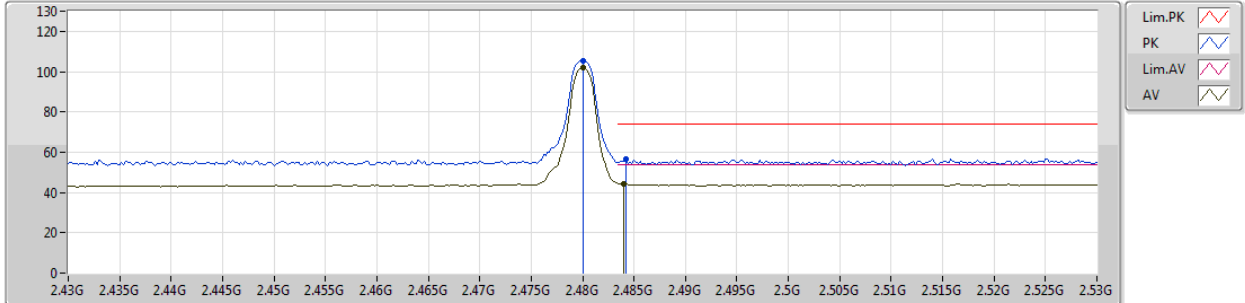


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|----------|
| AV | 2.48G | 101.92 | Inf | -Inf | 31.09 | 3 | Vertical | 200 | 2.99 | - |
| AV | 2.484G | 44.19 | 54.00 | -9.81 | 31.12 | 3 | Vertical | 200 | 2.99 | - |
| PK | 2.48G | 105.60 | Inf | -Inf | 31.09 | 3 | Vertical | 200 | 2.99 | - |
| PK | 2.4842G | 56.34 | 74.00 | -17.66 | 31.12 | 3 | Vertical | 200 | 2.99 | - |

BT-3EDR_Nss1_1TX

23/01/2019

2480MHz_TX

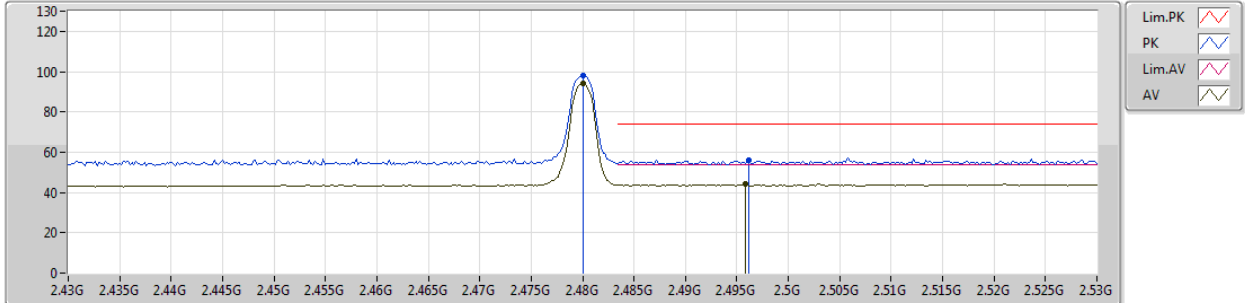

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|----------|
| AV | 2.48G | 94.06 | Inf | -Inf | 31.09 | 3 | Horizontal | 143 | 1.50 | - |
| AV | 2.4958G | 44.04 | 54.00 | -9.96 | 31.16 | 3 | Horizontal | 143 | 1.50 | - |
| PK | 2.48G | 97.83 | Inf | -Inf | 31.09 | 3 | Horizontal | 143 | 1.50 | - |
| PK | 2.4962G | 56.11 | 74.00 | -17.89 | 31.16 | 3 | Horizontal | 143 | 1.50 | - |