


ENGINEERING TEST REPORT



NOIRE510
Model: NOIRE510W
FCC ID: COL-NOIRE510W

Applicant:

NBS Payment Solutions Inc.
703 Evans Ave., Suite 400
Toronto, Ontario
Canada M9C 5E9

In Accordance With

Federal Communications Commission (FCC)
Part 15, Subpart C
Unlicensed Low Power Transmitter Operating in the Band 13.110-14.010 MHz

UltraTech's File No.: MIS-093F15C225

This Test report is Issued under the Authority of
Tri M. Luu
Vice President of Engineering
UltraTech Group of Labs

Date: July 24, 2012

Report Prepared by: Dan Huynh

Tested by: Wei Wu

Issued Date: July 24, 2012

Test Dates: July 12-23, 2012

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com

FCC

91038



1309



Approved Test Facility

46390-2049



NvLap Lab Code 200093-0



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION..... 1

1.1. SCOPE 1

1.2. RELATED SUBMITTAL(S)/GRANT(S) 1

1.3. NORMATIVE REFERENCES 1

EXHIBIT 2. PERFORMANCE ASSESSMENT..... 2

2.1. CLIENT INFORMATION 2

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION 2

2.3. EUT'S TECHNICAL SPECIFICATIONS..... 3

2.4. LIST OF EUT'S PORTS..... 3

2.5. ANCILLARY EQUIPMENT 3

2.6. TEST SETUP..... 4

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS..... 5

3.1. CLIMATE TEST CONDITIONS..... 5

3.2. OPEPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS..... 5

EXHIBIT 4. SUMMARY OF TEST RESULTS..... 6

4.1. LOCATION OF TESTS 6

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS 6

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES..... 6

EXHIBIT 5. TEST DATA 7

5.1. EMISSION BANDWIDTH [§15.215(c)]..... 7

5.2. FIELD STRENGTH OF EMISSIONS WITHIN & OUTSIDE THE PERMITTED BAND 13.110-14.010 MHz
[47 CFR 15.225 (a) to (d)]..... 9

5.3. FREQUENCY STABILITY [47 CFR 15.225(e)] 13

5.4. POWER LINE CONDUCTED EMISSIONS [47 CFR 15.107(a) & 15.207] 14

EXHIBIT 6. TEST EQUIPMENT LIST 17

EXHIBIT 7. MEASUREMENT UNCERTAINTY 18

7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY 18

7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY 18

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Part 15, Subpart C, Section 15.225 - Operation within the band 13.110 - 14.010 MHz.
Title:	Code of Federal Regulations (CFR), Title 47 Telecommunication, Part 15, Subpart C - Intentional Radiators
Purpose of Test:	Equipment Certification for Devices in Section 15.225 - Operation within the Band 13.110 - 14.010 MHz.
Test Procedures:	American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
Environmental Classification:	Commercial, industrial or business environment

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

1.3. NORMATIVE REFERENCES

Publication	Year	Title
47 CFR Parts 0-19	2011	Code of Federal Regulations (CFR), Title 47 – Telecommunication
ANSI C63.4	2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
CISPR 22 & EN 55022	2008-09, Edition 6.0 2006	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	NBS Payment Solutions Inc.
Address:	703 Evans Ave., Suite 400 Toronto, ON Canada M9C 5E9
Contact Person:	Mr. Eric Babbitt Phone #: 416-621-7410 x567 Fax #: 416-621-2450 Email Address: ebabbitt@nbsps.com

MANUFACTURER	
Name:	NBS Payment Solutions Inc.
Address:	703 Evans Ave., Suite 400 Toronto, ON Canada M9C 5E9
Contact Person:	Mr. Eric Babbitt Phone #: 416-621-7410 x567 Fax #: 416-621-2450 Email Address: ebabbitt@nbsps.com

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	NBS Payment Solutions Inc.
Product Name:	NOIRE510
Model Name or Number:	NOIRE510W
Serial Number:	Test sample
Type of Equipment:	Low Power Communication Device Transmitter
Input Power Supply Type:	Lithium Battery 3.7V/2600mAh or AC adapter 9 VDC/3.33A
Primary User Functions of EUT:	Point of Sale credit/debit financial transactions

2.3. EUT’S TECHNICAL SPECIFICATIONS

Transmitter	
Equipment Type:	Portable
Intended Operating Environment:	Commercial, light industry & heavy industry
Power Supply Requirement:	Lithium Battery 3.7V/2600mAh or AC adapter 9 VDC/3.33A
Field Strength:	53.04 dBµV/m at 10 m
Operating Frequency Range:	13.56 MHz
RF Output Impedance:	50 Ω
20 dB Bandwidth:	21.04 kHz
Modulation Type:	ASK
Oscillator Frequencies:	13.56 MHz
Antenna Connector Type:	Integral

2.4. LIST OF EUT’S PORTS

Port Number	EUT’s Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	*USB Port	1	Mini USB Type B	Shielded
2	*Serial RS232 Port	1	Hirose MQ172-3PA	Shielded
3	Power Input	1	Hirose: MQ172X-4PA	1m, Non-shielded

* Not used in normal operation.


2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	AC/DC Power Adapter
Brand name:	FSP Group Inc.
Model Name or Number:	FSP030-DGAA2
Connected to EUT’s Port:	Power Port

2.6. TEST SETUP

POWER LINE CONDUCTED EMISSION

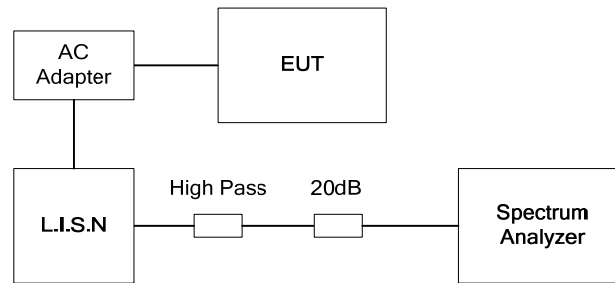

RADIATED EMISSION

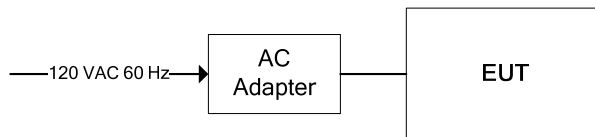


EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21 to 23 °C
Humidity:	45 to 58%
Pressure:	102 kPa
Power Input Source:	AC adapter 9 VDC/3.33A

3.2. OPEPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	The EUT was configured for continuous transmission for the duration of testing.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT was tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment.

Transmitter Test Signals:	
Frequency:	13.56 MHz
Transmitter Wanted Output Test Signals:	
▪ RF Power Output (measured maximum output power):	53.04 dBµV/m at 10 m
▪ Normal Test Modulation:	ASK
▪ Modulating signal source:	Internal

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2014-04-04.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Regulations	Test Requirements	Compliance (Yes/No)
15.203 & 15.204	The transmitter shall use a transmitting antenna that is an integral part of the device	Yes
15.215(c)	Emission Bandwidth	Yes
15.225(a) – (d)	Field Strength of Emissions Inside and Outside the Permitted Band 13.110 - 14.010 MHz	Yes
15.225(e)	Frequency Stability	Yes
15.107 & 15.207	Class B - Power Line Conducted Emissions	Yes

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

EXHIBIT 5. TEST DATA

5.1. EMISSION BANDWIDTH [§15.215(c)]

5.1.1. Limits

The 20 dB bandwidth of the emission shall be contained within the band 13.110–14.010 MHz.


5.1.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001 and ANSI C63.4 for measurement methods


5.1.3. Test Data

Test Frequency (MHz)	Occupied Bandwidth (kHz)	
	20 dB BW	99 % BW
13.56	21.04	426.85

Plot 5.1.3.1. 20 dB Emission Bandwidth, 13.56 MHz

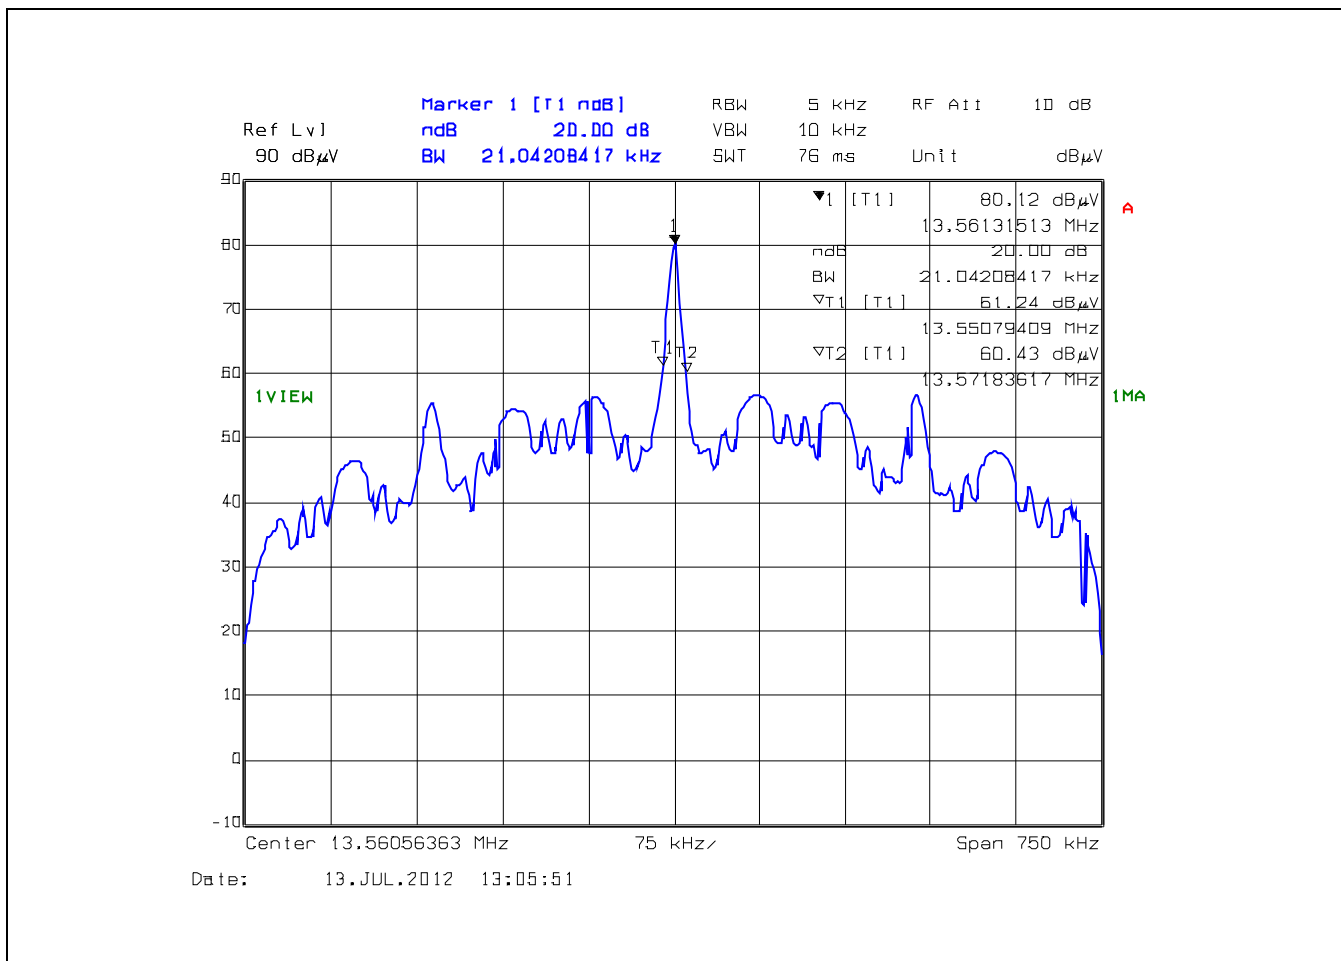

Plot 5.1.3.2. 99% Occupied Bandwidth, 13.56 MHz

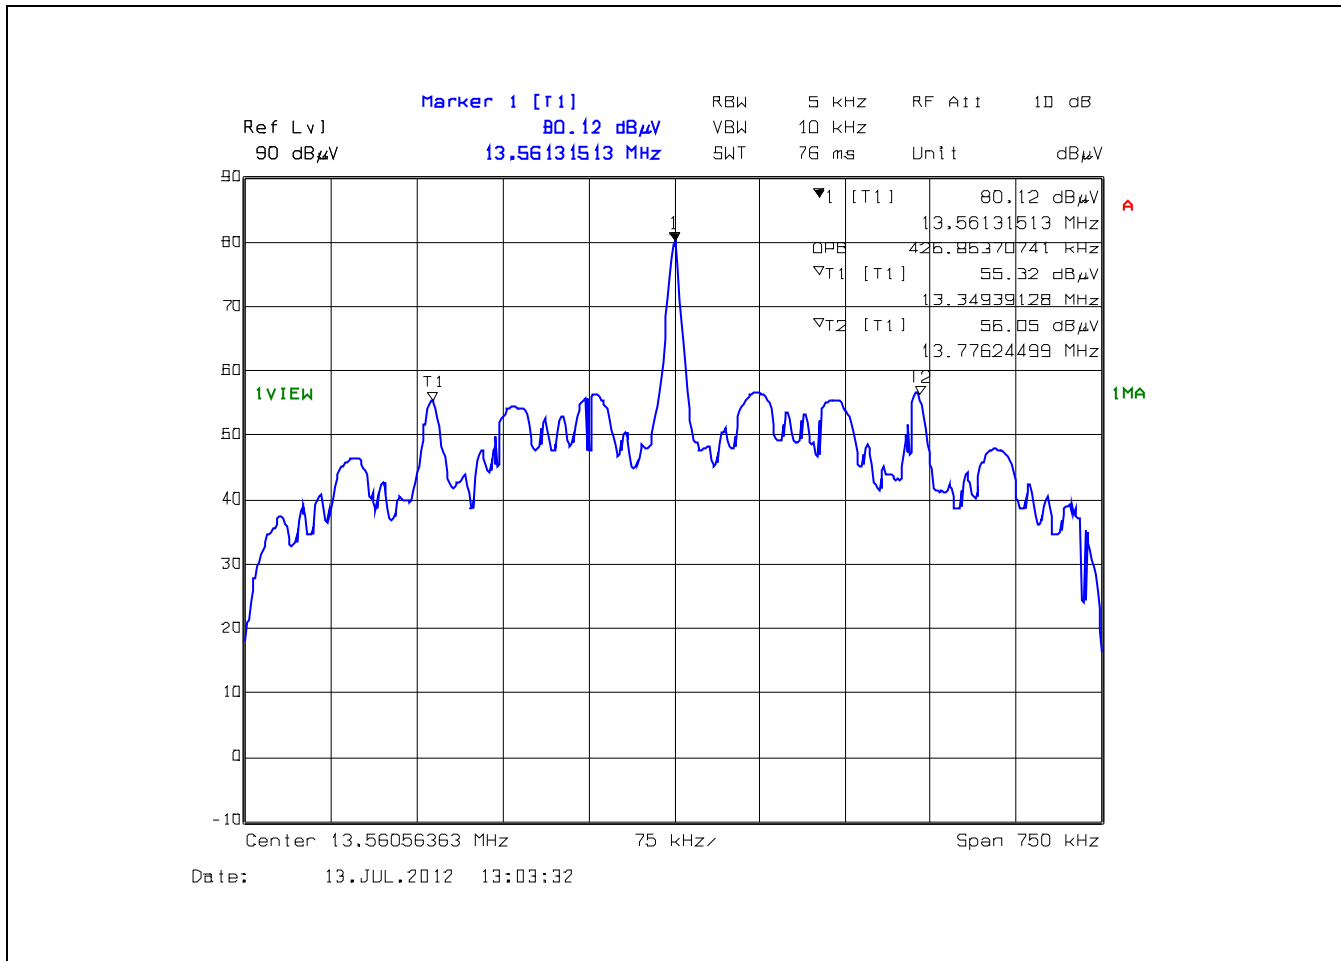

5.2. FIELD STRENGTH OF EMISSIONS WITHIN & OUTSIDE THE PERMITTED BAND 13.110-14.010 MHz [47 CFR 15.225 (a) to (d)]

5.2.1. Limits

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110 – 14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

47 CFR 15.209(a) – Radiated Emission Limits; general requirements

Frequency (MHz)	Field Strength Limits (microvolts/m)	Distance (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

5.2.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001 and ANSI C63.4 for measurement methods

5.2.3. Test Data

Remarks:

- Radiated spurious emissions measurements were performed at a measuring distance of 10 m (for frequencies below 30 MHz) and 3 m (for frequencies at or above 30 MHz), from 10 kHz – 10th harmonic of the fundamental or the range applicable to the digital device, whichever is the higher frequency range and all spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- For frequencies below 30 MHz, the results measured at 10 m distance shall be extrapolated to the specified distance using an extrapolation factor of 40 dB/decade for determining compliance.

5.2.3.1. Field Strength of Emissions Within the Permitted Band at 10 m

Frequency (MHz)	Measured Field Strength @ 10 m (dBµV/m)	Detector Used (Peak/QP)	Antenna Plane (H/V)	Field Strength Extrapolated Value (dBµV/m)	§ 15.225 Field Strength Limits (dBµV/m)	Margin (dB)
13.56	53.04	Peak	V	34.0	84.0	-50.0
13.56	39.32	Peak	H	20.2	84.0	-63.8

5.2.3.2. Field Strength of Emissions Outside the Permitted Band Below 30 MHz at 10 m

Frequency (MHz)	Measured Field Strength @ 10 m (dBµV/m)	Detector Used (Peak/QP)	Antenna Plane (H/V)	Field Strength Extrapolated Value (dBµV/m)	§ 15.209 Field Strength Limits (dBµV/m)	Margin (dB)
All spurious emissions are more than 20 dB below the specified limit.						

5.2.3.3. Field Strength of Emissions Outside the Permitted Band at or Above 30 MHz at 3 m

Frequency (MHz)	Measured Field Strength @ 3 m (dBµV/m)	Detector Used (Peak/QP)	Antenna Plane (H/V)	§ 15.209 Field Strength Limits (dBµV/m)	Margin (dB)
31.70	31.80	Peak	H	40.0	-8.2
40.56	34.13	QP	V	40.0	-5.9
40.56	24.75	Peak	H	40.0	-15.3
54.24	26.65	Peak	V	40.0	-13.4
81.36	29.58	Peak	V	40.0	-10.4
108.48	29.71	Peak	V	43.5	-13.8
118.80	26.81	Peak	V	43.5	-16.7
129.00	25.18	Peak	V	43.5	-18.3
135.60	29.32	Peak	V	43.5	-14.2
135.60	27.32	Peak	H	43.5	-16.2
163.00	30.28	Peak	V	43.5	-13.2
163.00	30.99	Peak	H	43.5	-12.5
190.20	30.43	Peak	V	43.5	-13.1
190.20	29.07	Peak	H	43.5	-14.4

Frequency (MHz)	Measured Field Strength @ 3 m (dBµV/m)	Detector Used (Peak/QP)	Antenna Plane (H/V)	§ 15.209 Field Strength Limits (dBµV/m)	Margin (dB)
218.00	31.55	Peak	V	46.0	-14.5
218.00	29.31	Peak	H	46.0	-16.7
245.00	37.43	Peak	V	46.0	-8.6
245.00	38.74	Peak	H	46.0	-7.3
266.80	27.40	Peak	V	46.0	-18.6
272.00	31.57	Peak	V	46.0	-14.4
272.00	33.10	Peak	H	46.0	-12.9
299.00	34.61	Peak	V	46.0	-11.4
299.00	40.54	QP	H	46.0	-5.5
320.00	27.62	Peak	V	46.0	-18.4
326.00	35.08	Peak	V	46.0	-10.9
326.00	37.24	Peak	H	46.0	-8.8
353.00	35.47	Peak	V	46.0	-10.5
353.00	35.28	Peak	H	46.0	-10.7
380.80	36.68	Peak	V	46.0	-9.3
380.80	36.81	Peak	H	46.0	-9.2
407.80	33.34	Peak	V	46.0	-12.7
407.80	33.47	Peak	H	46.0	-12.5
434.80	38.09	Peak	V	46.0	-7.9
434.80	32.43	Peak	H	46.0	-13.6
461.80	35.41	Peak	V	46.0	-10.6
461.80	29.00	Peak	H	46.0	-17.0
488.80	35.00	Peak	V	46.0	-11.0
516.30	30.18	Peak	V	46.0	-15.8
530.00	31.84	Peak	V	46.0	-14.2
530.00	31.89	Peak	H	46.0	-14.1
542.50	31.69	Peak	V	46.0	-14.3
542.50	27.08	Peak	H	46.0	-18.9
566.30	29.30	Peak	V	46.0	-16.7
583.80	30.63	Peak	H	46.0	-15.4
597.50	35.52	Peak	V	46.0	-10.5
597.50	38.22	Peak	H	46.0	-7.8
611.30	33.48	Peak	H	46.0	-12.5
625.00	35.16	Peak	V	46.0	-10.8
625.00	40.28	QP	H	46.0	-5.7
637.50	33.57	Peak	H	46.0	-12.4

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MIS-093F15C225
 July 24, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Frequency (MHz)	Measured Field Strength @ 3 m (dBµV/m)	Detector Used (Peak/QP)	Antenna Plane (H/V)	§ 15.209 Field Strength Limits (dBµV/m)	Margin (dB)
651.30	31.20	Peak	V	46.0	-14.8
651.30	35.91	Peak	H	46.0	-10.1
665.00	32.63	Peak	H	46.0	-13.4
678.80	31.40	Peak	V	46.0	-14.6
678.80	34.31	Peak	H	46.0	-11.7
706.30	30.64	Peak	V	46.0	-15.4
706.30	36.37	Peak	H	46.0	-9.6
718.80	32.48	Peak	H	46.0	-13.5
732.50	30.72	Peak	V	46.0	-15.3
732.50	34.62	Peak	H	46.0	-11.4
746.30	30.67	Peak	H	46.0	-15.3
760.00	33.70	Peak	H	46.0	-12.3
773.80	30.84	Peak	V	46.0	-15.2
773.80	33.37	Peak	H	46.0	-12.6
787.50	30.86	Peak	V	46.0	-15.1
787.50	35.44	Peak	H	46.0	-10.6
800.00	33.13	Peak	V	46.0	-12.9
800.00	35.47	Peak	H	46.0	-10.5
813.80	32.60	Peak	V	46.0	-13.4
813.80	37.01	Peak	H	46.0	-9.0
827.50	32.90	Peak	H	46.0	-13.1
841.30	35.46	Peak	H	46.0	-10.5
855.00	33.26	Peak	H	46.0	-12.7
895.00	33.55	Peak	H	46.0	-12.5
922.50	32.82	Peak	H	46.0	-13.2
948.80	33.52	Peak	V	46.0	-12.5
948.80	32.98	Peak	H	46.0	-13.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MIS-093F15C225
 July 24, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.3. FREQUENCY STABILITY [47 CFR 15.225(e)]

5.3.1. Limits

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.3.2. Method of Measurements

ANSI C63.4.

5.3.3. Test Data

Frequency Band:	13.56 MHz
Center Frequency:	13.56 MHz
Frequency Tolerance Limit:	$\pm 0.01\%$ (± 1356 Hz)
Max. Frequency Tolerance Measured:	± 66 Hz
Input Voltage Rating:	3.6 Vdc nominal (battery)

Ambient Temperature (°C)	Frequency Drift (Hz)		
	Supply Voltage (Nominal) 3.6 VDC	Supply Voltage (85 % of Nominal) 3.06 VDC	Supply Voltage (115% of Nominal) 4.14 VDC
-20	+44	N/A	N/A
-10	+66	N/A	N/A
0	+44	N/A	N/A
10	+22	N/A	N/A
20	0	0	0
30	-44	N/A	N/A
40	-66	N/A	N/A
50	-66	N/A	N/A

5.4. POWER LINE CONDUCTED EMISSIONS [47 CFR 15.107(a) & 15.207]

5.4.1. Limits

The equipment shall meet the limits of the following table:

Frequency of emission (MHz)	Class B Conducted Limits (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50


* Decreases linearly with logarithm of the frequency

5.4.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001 and ANSI C63.4 for measurement methods

5.4.3. Test Data

Plot 5.4.3.1. Power Line Conducted Emissions, Voltage: 120 VAC, Line Tested: Hot

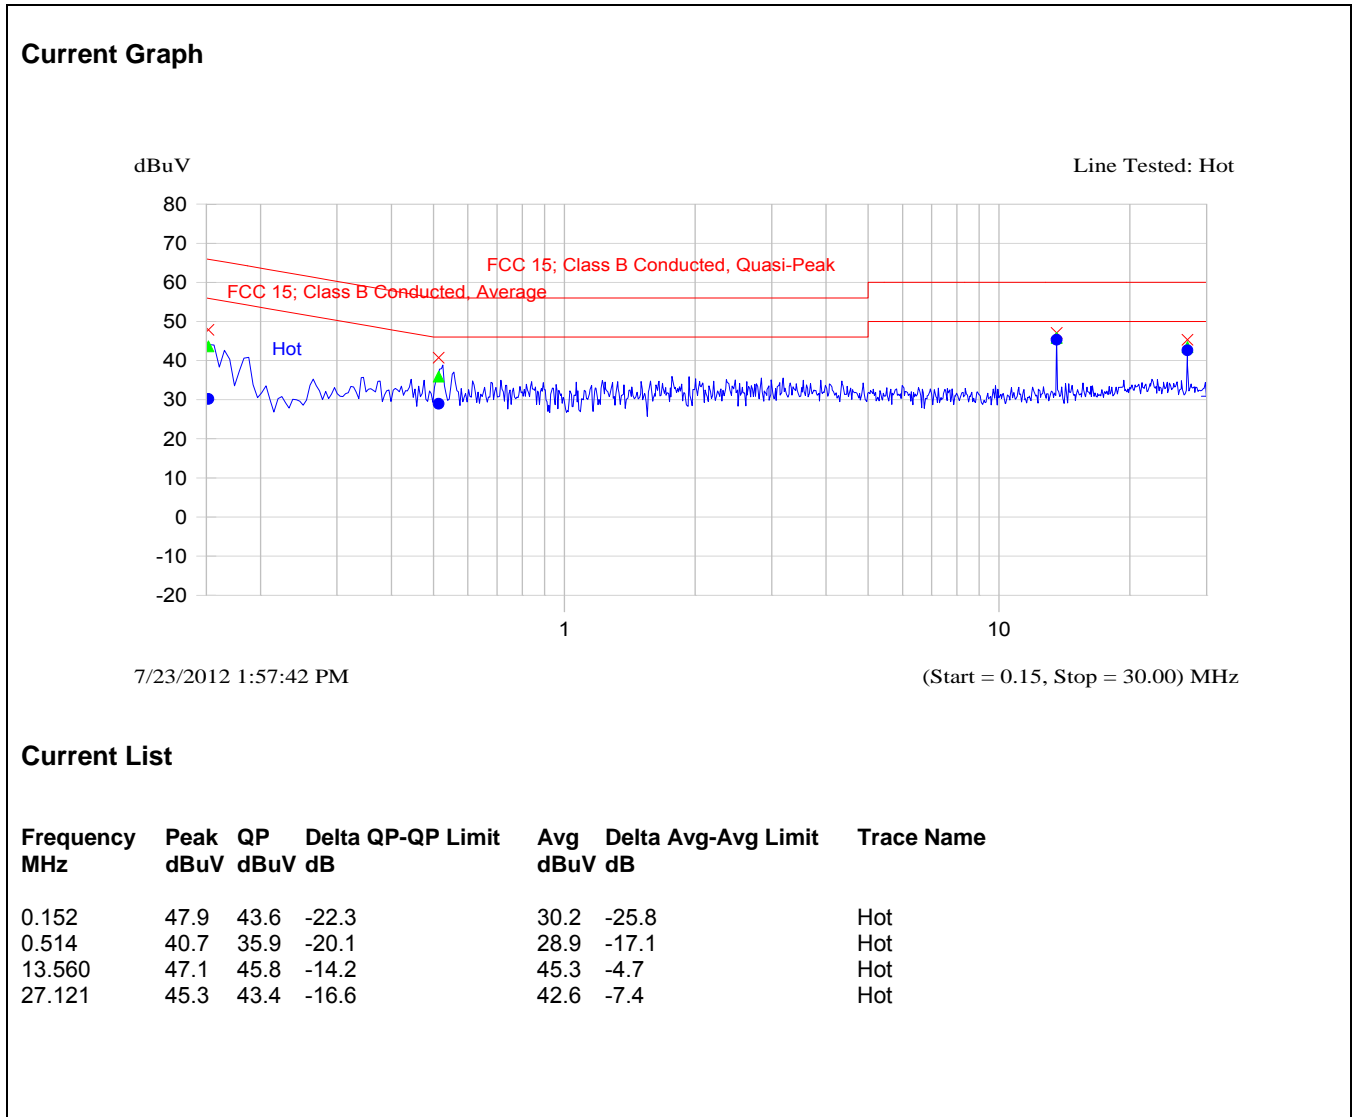

Plot 5.4.3.2. Power Line Conducted Emissions, Voltage: 120 VAC, Line Tested: Neutral

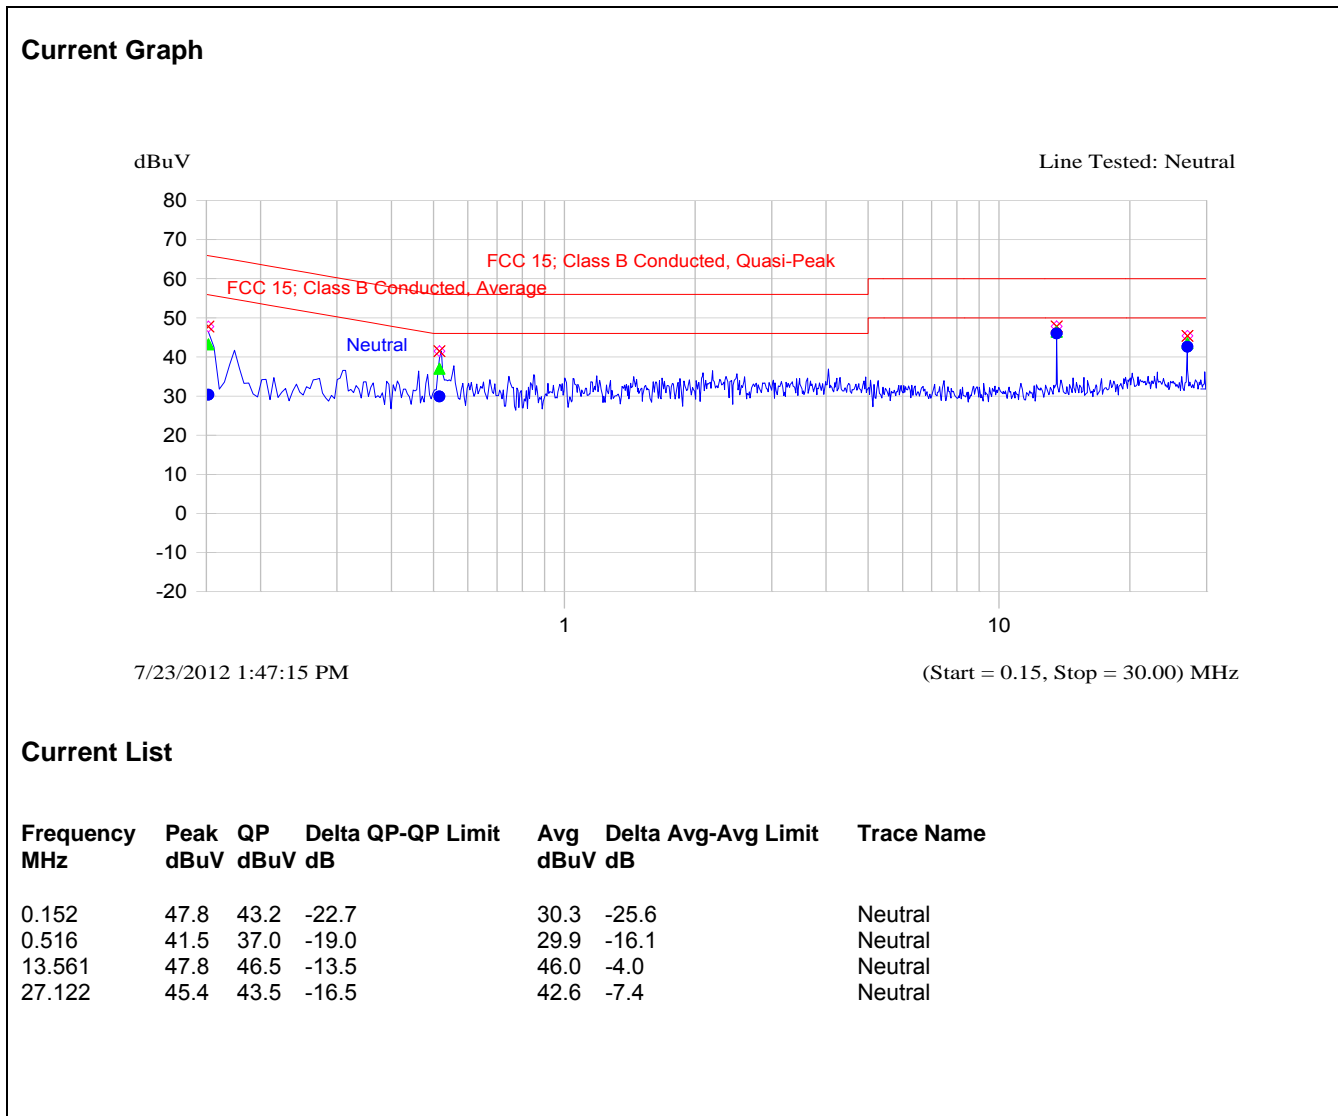


EXHIBIT 6. TEST EQUIPMENT LIST

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Cal. Due Date
Spectrum Analyzer	R/S	FSEK	834157/005	9 kHz - 40 GHz	28 Jul 2012
High Pass Filter	Mini Circuit	SHP 25	--	Cut off 25 MHz	Cal. on use.
RF Synthesized signal Generator	HP	8648C	3343U00391	100K-3200M Hz AM/ FM/ PM	14 Dec 2012
Power supply	Tenma	72-7295	490300297	1-40V DC 5A	Cal. on use.
Preamplifier	Hewlett Packard	8447D	2944A07673	0.1 – 1300 MHz	09 May 2013
Biconical Antenna	R/S	HUF-Z2	893-229/014	20 – 200 MHz	09 Feb 2013
Loop Antenna	EMCO	6502	9104-2611	10 kHz – 30 MHz	26 Aug 2012
Environmental Chamber	Envirotronics	SSH32C	11994847-S-11059	-60 - 177 degree C	06 Aug 2012
Spectrum Analyzer	Hewlett Packard	HP 8593EM	3710A00223	9 kHz – 22 GHz	11 May 2013
Transient Limiter	Pasternack	PE7010-20	N/A	DC - 2 GHz	09 Jan 2013
LISN	Schwarzbeck	NSLK 8127	8127276	10 kHz – 30 MHz	24 Apr 2013

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: MIS-093F15C225
July 24, 2012

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

	Line Conducted Emission Measurement Uncertainty (150 kHz – 30 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.57	± 1.8
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.14	± 3.6

7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.15	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.30	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.78	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.87	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.75	Under consideration