

APPLICATION CERTIFICATION
On Behalf of
SHENZHEN AOB ELECTRONICS CO., LTD

Mini Speaker
Model No.: ES-52040 BT

FCC ID: COMES52040BT

Prepared for : SHENZHEN AOB ELECTRONICS CO., LTD
Address : Bldg A4, Third Industry Area, Huang Ma Bu Village,
Xixiang Town, Bao An District, Shenzhen, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20120730
Date of Test : April 19-27, 2012
Date of Report : April 27, 2012

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Special Accessory and Auxiliary Equipment	5
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty.....	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. 20DB BANDWIDTH TEST.....	10
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement	10
5.4. Operating Condition of EUT	10
5.5. Test Procedure	11
5.6. Test Result	11
6. CARRIER FREQUENCY SEPARATION TEST.....	15
6.1. Block Diagram of Test Setup.....	15
6.2. The Requirement For Section 15.247(a)(1).....	15
6.3. EUT Configuration on Measurement	15
6.4. Operating Condition of EUT	15
6.5. Test Procedure	16
6.6. Test Result	16
7. NUMBER OF HOPPING FREQUENCY TEST	20
7.1. Block Diagram of Test Setup.....	20
7.2. The Requirement For Section 15.247(a)(1)(iii).....	20
7.3. EUT Configuration on Measurement	20
7.4. Operating Condition of EUT	20
7.5. Test Procedure	21
7.6. Test Result	21
8. DWELL TIME TEST	23
8.1. Block Diagram of Test Setup.....	23
8.2. The Requirement For Section 15.247(a)(1)(iii).....	23
8.3. EUT Configuration on Measurement	23
8.4. Operating Condition of EUT	23
8.5. Test Procedure	24
8.6. Test Result	24
9. MAXIMUM PEAK OUTPUT POWER TEST	28
9.1. Block Diagram of Test Setup.....	28
9.2. The Requirement For Section 15.247(b)(1).....	28
9.3. EUT Configuration on Measurement	28
9.4. Operating Condition of EUT	28

9.5.	Test Procedure	29
9.6.	Test Result	29
10.	BAND EDGE COMPLIANCE TEST	33
10.1.	Block Diagram of Test Setup.....	33
10.2.	The Requirement For Section 15.247(d)	33
10.3.	EUT Configuration on Measurement	33
10.4.	Operating Condition of EUT	34
10.5.	Test Procedure	34
10.6.	Test Result	35
11.	RADIATED SPURIOUS EMISSION TEST	46
11.1.	Block Diagram of Test Setup.....	46
11.2.	The Limit For Section 15.247(d)	47
11.3.	Restricted bands of operation	47
11.4.	Configuration of EUT on Measurement	48
11.5.	Operating Condition of EUT	48
11.6.	Test Procedure	48
11.7.	The Field Strength of Radiation Emission Measurement Results	49
12.	CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	70
12.1.	Block Diagram of Test Setup.....	70
12.2.	The Requirement For Section 15.247(d)	70
12.3.	EUT Configuration on Measurement	70
12.4.	Operating Condition of EUT	71
12.5.	Test Procedure	71
12.6.	Test Result	71
13.	AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	75
13.1.	Block Diagram of Test Setup.....	75
13.2.	The Emission Limit	75
13.3.	Configuration of EUT on Measurement	76
13.4.	Operating Condition of EUT	76
13.5.	Test Procedure	76
13.6.	Power Line Conducted Emission Measurement Results	77
14.	ANTENNA REQUIREMENT.....	80
14.1.	The Requirement	80
14.2.	Antenna Construction	80

Test Report Certification

Applicant : SHENZHEN AOB ELECTRONICS CO., LTD
 Manufacturer : SHENZHEN AOB ELECTRONICS CO., LTD
 EUT Description : Mini Speaker
 (A) MODEL NO.: ES-52040 BT
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: DC 3.7V

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247 ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : April 19-27, 2012

Prepared by : APPLE
 (Engineer)

Approved & Authorized Signer : Heimle
 (Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Mini Speaker
Model Number	:	ES-52040 BT
Frequency Band	:	2402MHz-2480MHz
Number of Channels	:	79
Antenna Gain		0dBi
Power Supply	:	DC 3.7V
Applicant	:	SHENZHEN AOB ELECTRONICS CO., LTD
Address	:	Bldg A4, Third Industry Area, Huang Ma Bu Village, Xixiang Town, Bao An District, Shenzhen, China
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD
Address	:	Bldg A4, Third Industry Area, Huang Ma Bu Village, Xixiang Town, Bao An District, Shenzhen, China
Date of sample received	:	April 19, 2012
Date of Test	:	April 19-27, 2012

1.2. Special Accessory and Auxiliary Equipment

Notebook PC	:	Manufacturer: LENOVO
		M/N: 4290-RT8
		S/N: R9-FW93G 11/08

1.3. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode


The mode is used: Transmitting mode
Low Channel: 2402MHz
Middle Channel: 2441MHz
High Channel: 2480MHz
Hopping
Charging

3.2.Configuration and peripherals



Setup: Transmitting mode

(EUT: Mini Speaker)



Setup: Charging mode


(EUT: Mini Speaker)

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 20DB BANDWIDTH TEST

5.1. Block Diagram of Test Setup



(EUT: Mini Speaker)

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. Mini Speaker (EUT)

Model Number	:	ES-52040 BT
Serial Number	:	N/A
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX(Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 30kHz and VBW to 100kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.6. Test Result

PASS.

Date of Test:	<u>April 21, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Apple</u>

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.958	N/A
Middle	2441	0.960	N/A
High	2480	0.969.	N/A


Note: N/A: 1) The 20 dB bandwidth of the hopping channel is not limit.


2) The data of 20 dB bandwidth of the hopping channel is limit of carrier frequencies separated

The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is [Agilent](#)




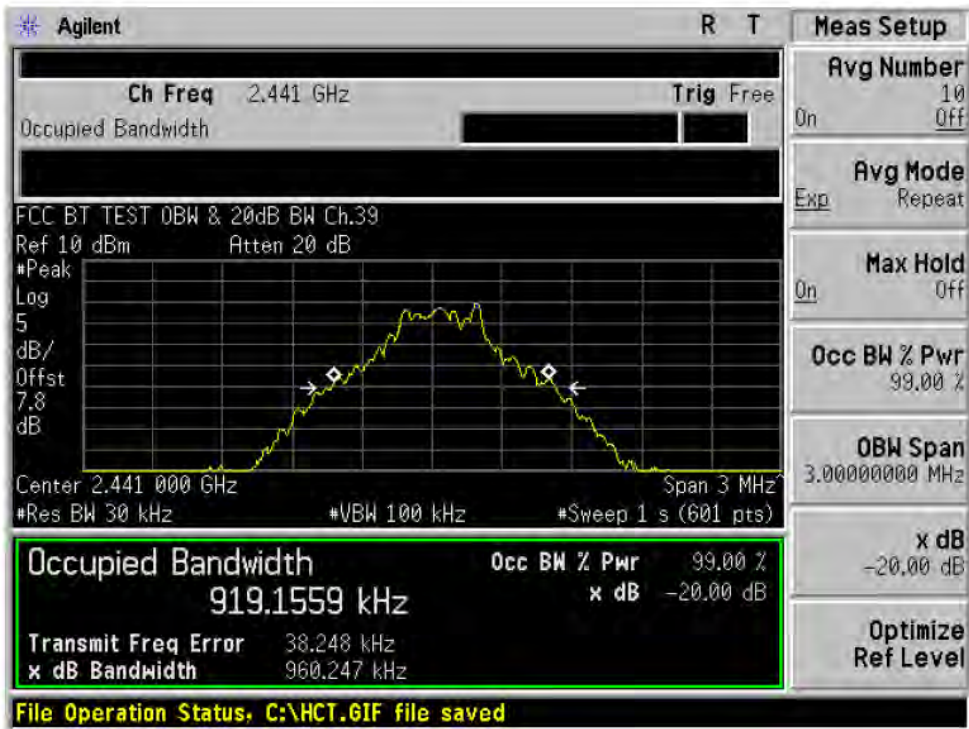

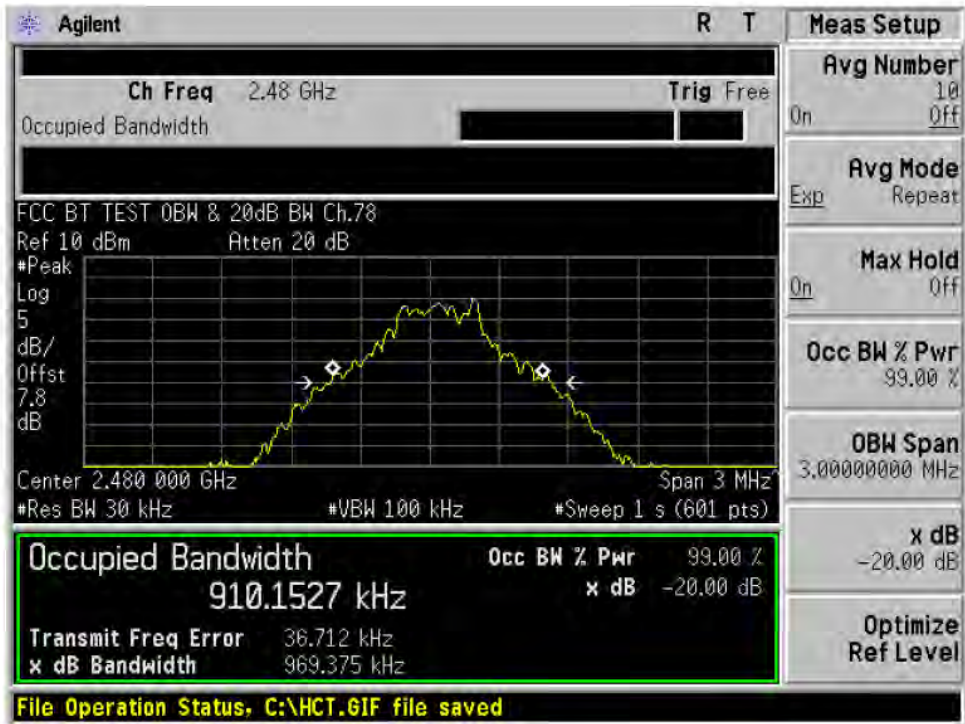

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Block Diagram of Test Setup



(EUT: Mini Speaker)

6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. Mini Speaker (EUT)

Model Number	:	ES-52040 BT
Serial Number	:	N/A
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz. Adjust Span to 3 MHz.

6.5.3. Set the adjacent channel of the EUT maxhold another trace.

6.5.4. Measurement the channel separation

6.6. Test Result


PASS.

Date of Test:	<u>April 21, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>Hopping</u>	Test Engineer:	<u>Apple</u>

Channel	Channel Frequency (MHz)	Channel separation (MHz)	Limit
Low	2402	1.008	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)
Middle	2441	1.002	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)
High	2480	1.002	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)


The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is R/S

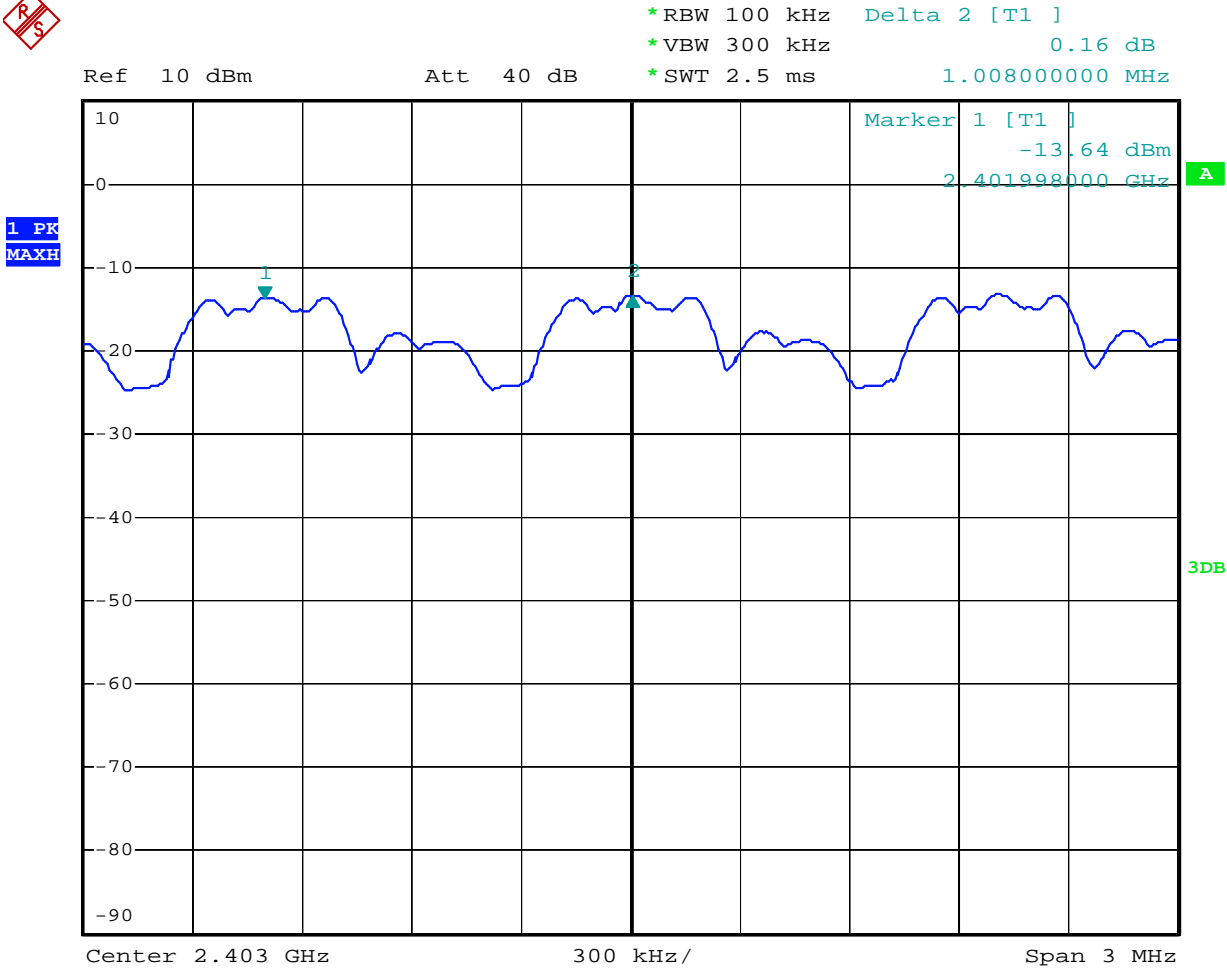




1 PK
MAXH

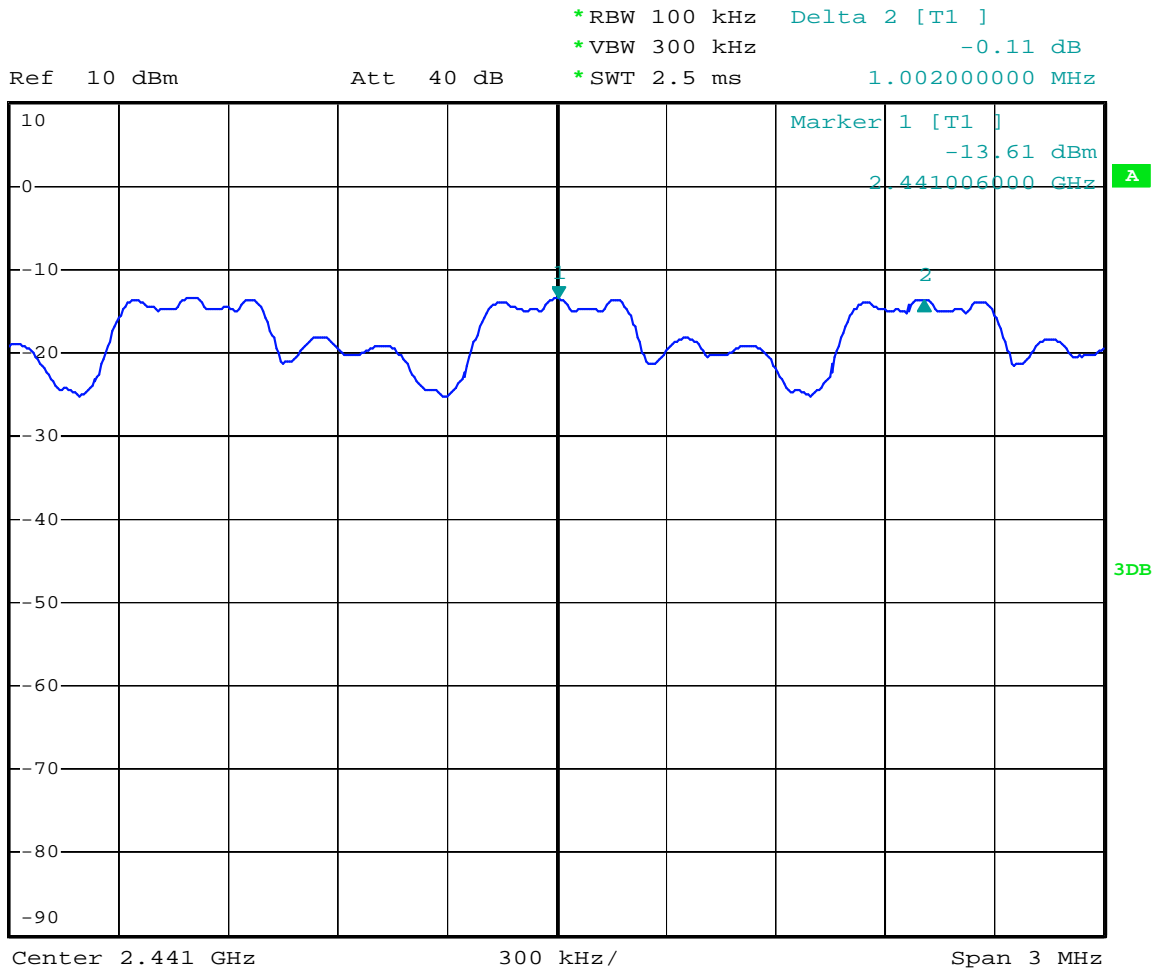




1 PK
MAXH

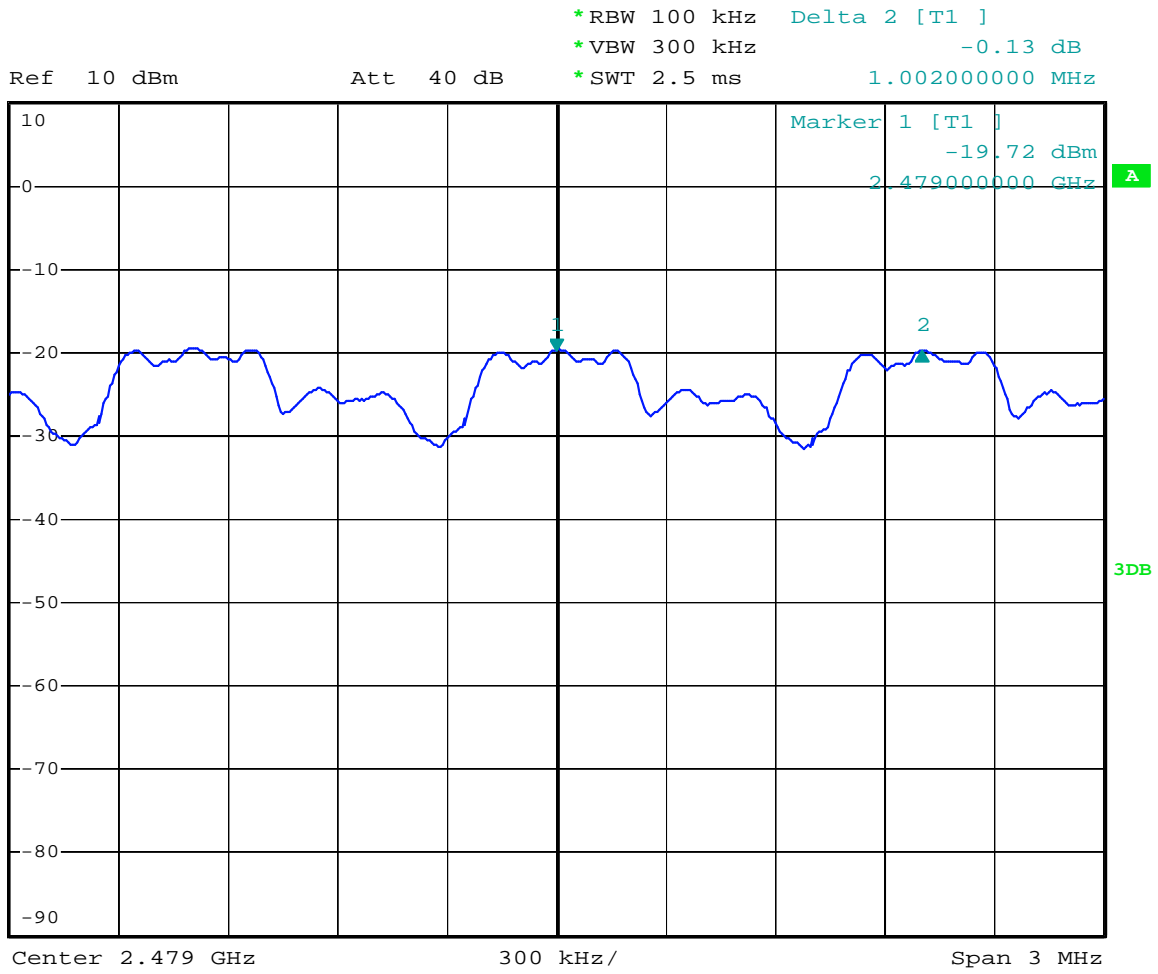

7. NUMBER OF HOPPING FREQUENCY TEST

7.1. Block Diagram of Test Setup



(EUT: Mini Speaker)

7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. Mini Speaker (EUT)

Model Number	:	ES-52040 BT
Serial Number	:	N/A
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set the spectrum analyzer as Span=41MHz, RBW=300kHz, VBW=300kHz.

7.5.3. Max hold, view and count how many channel in the band.

7.6. Test Result



PASS.

Date of Test:	<u>April 21, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>Hopping</u>	Test Engineer:	<u>Apple</u>

Total number of hopping channel	Measurement result (CH)	Limit (CH)
	79	>15


The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is Agilent

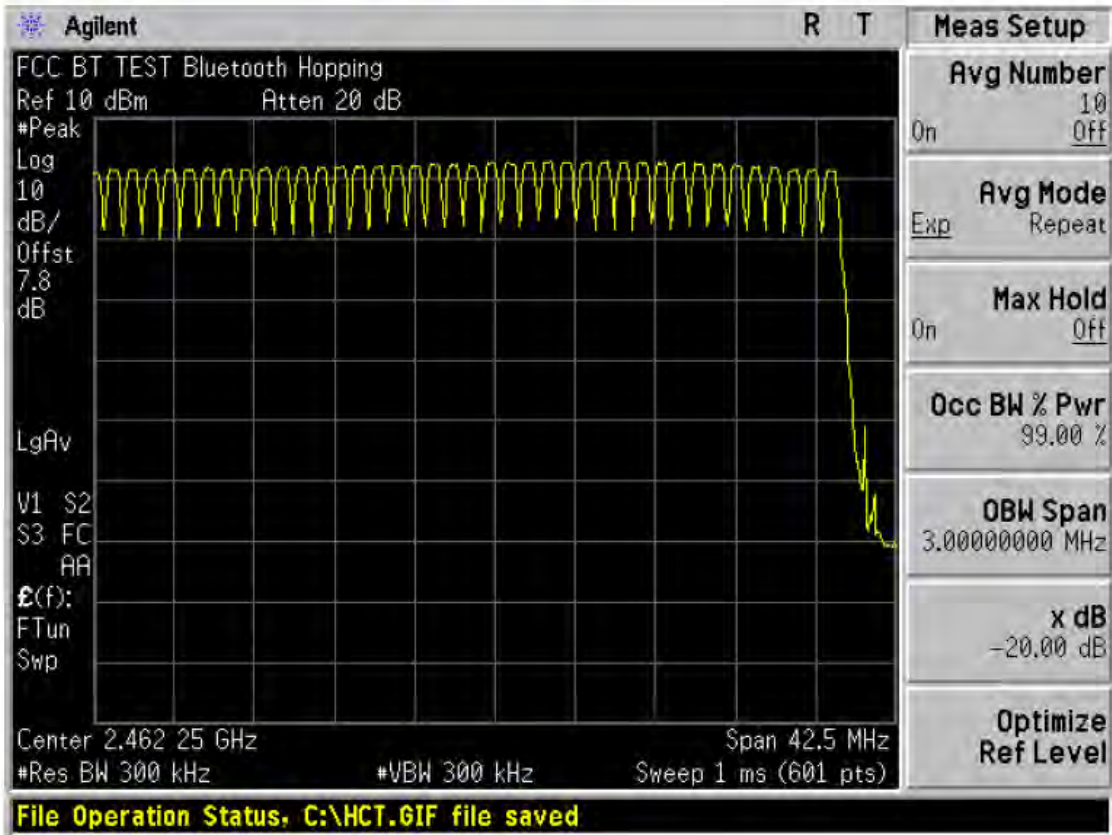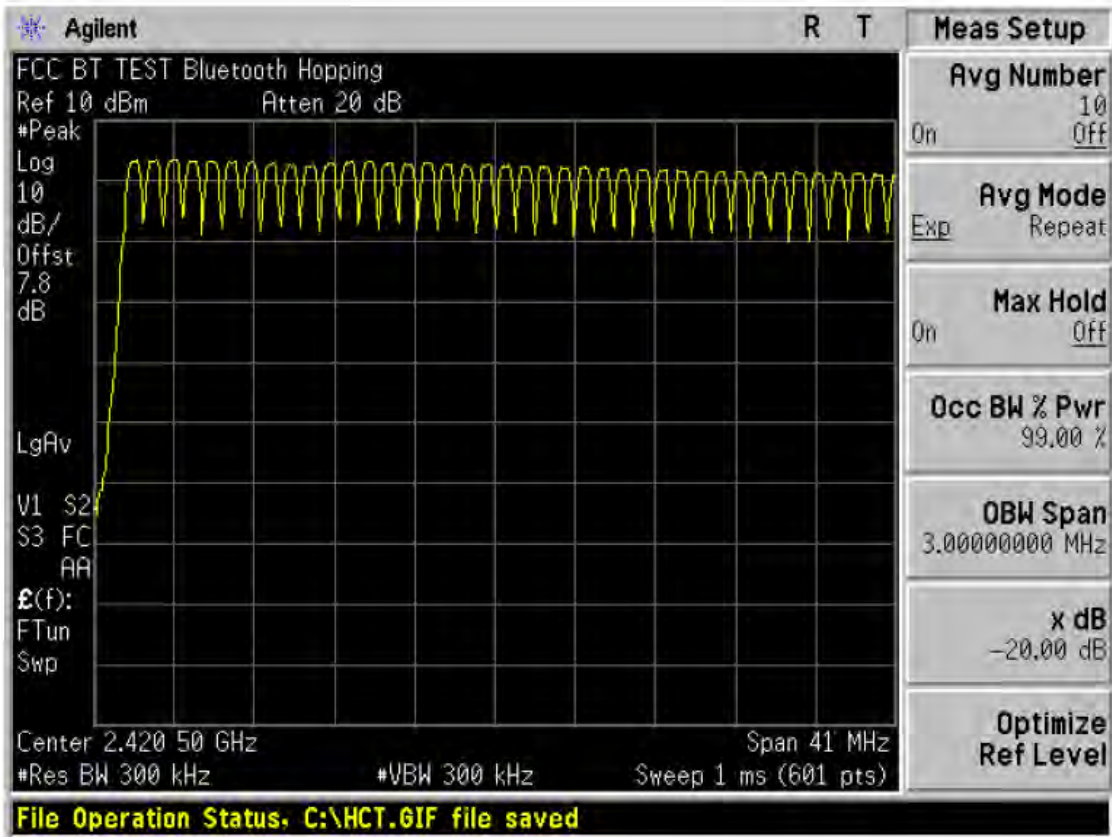

8. DWELL TIME TEST

8.1. Block Diagram of Test Setup



(EUT: Mini Speaker)

8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. Mini Speaker (EUT)

Model Number	:	ES-52040 BT
Serial Number	:	N/A
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Set center frequency of spectrum analyzer = operating frequency.

8.5.3. Set the spectrum analyzer as RBW=100kHz, VBW=300kHz, Span=0Hz, Adjust Sweep=1s. Get the burst (in 1s.).

8.5.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=2ms. Get the pulse time.

8.5.5. Repeat above procedures until all frequency measured were complete.

8.6. Test Result

PASS.

Date of Test:	<u>April 21, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>Hopping</u>	Test Engineer:	<u>Apple</u>



A period transmit time = $0.4 \times 79 = 31.6$



Dwell time = pulse time \times burst (in 1 sec.) $\times 31.6$



Channel	Channel Frequency (MHz)	Pulse Time (ms)	Burst (in 1 sec.)	Dwell Time (ms)	Limit (ms)
Low	2402	0.528	10	166.8	400
Middle	2441	0.528	10	166.8	400
High	2480	0.532	10	168.1	400

The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is R/S

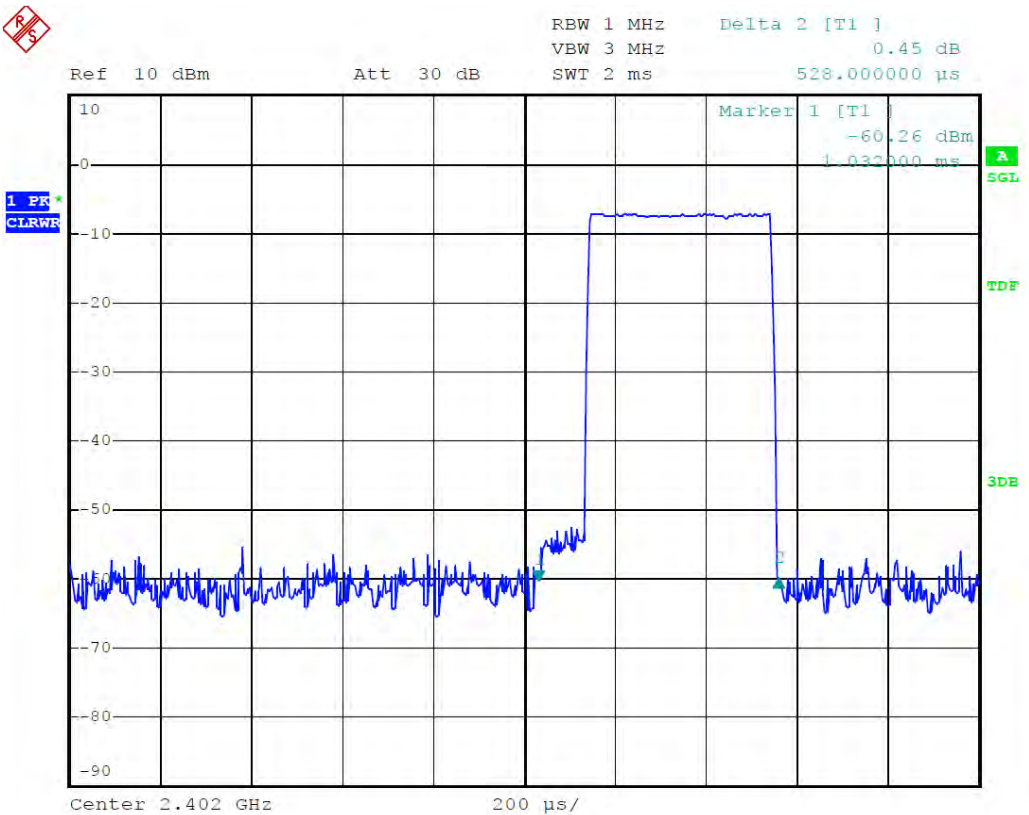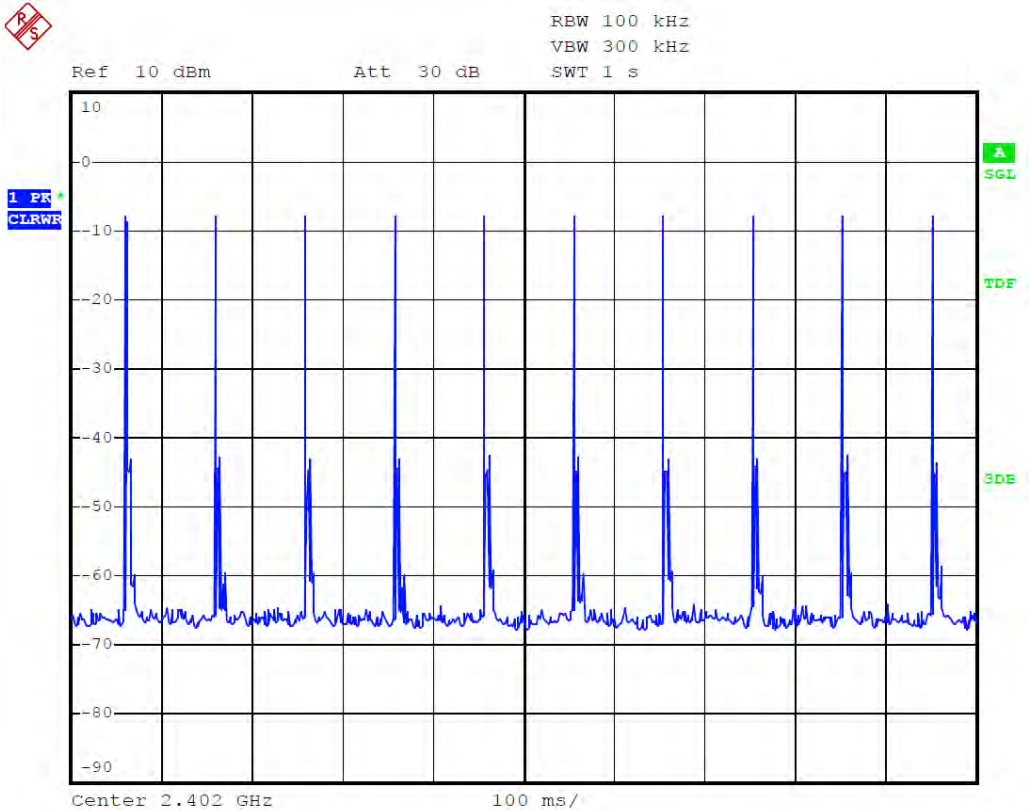


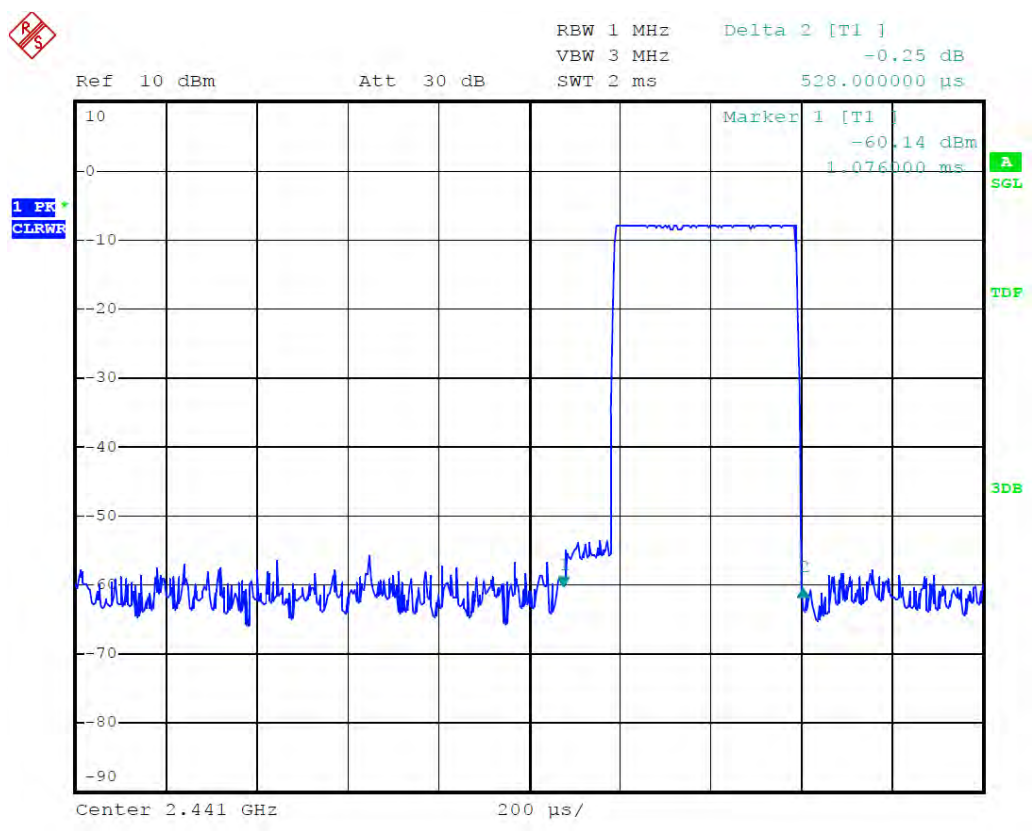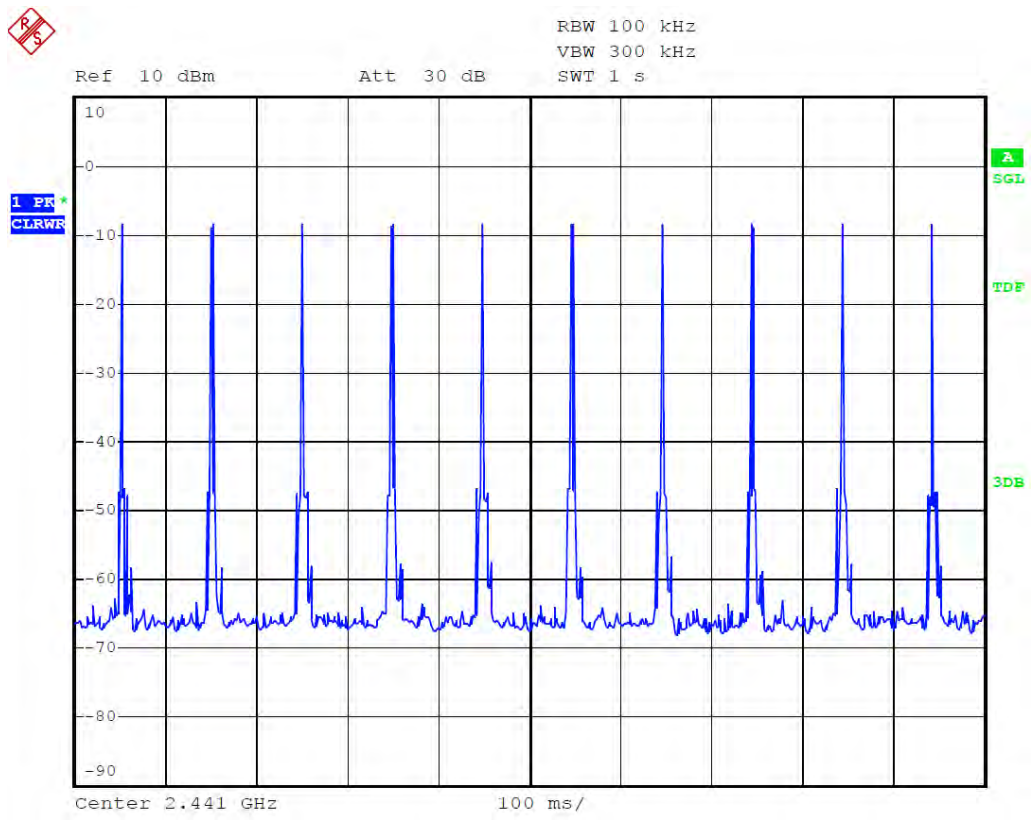

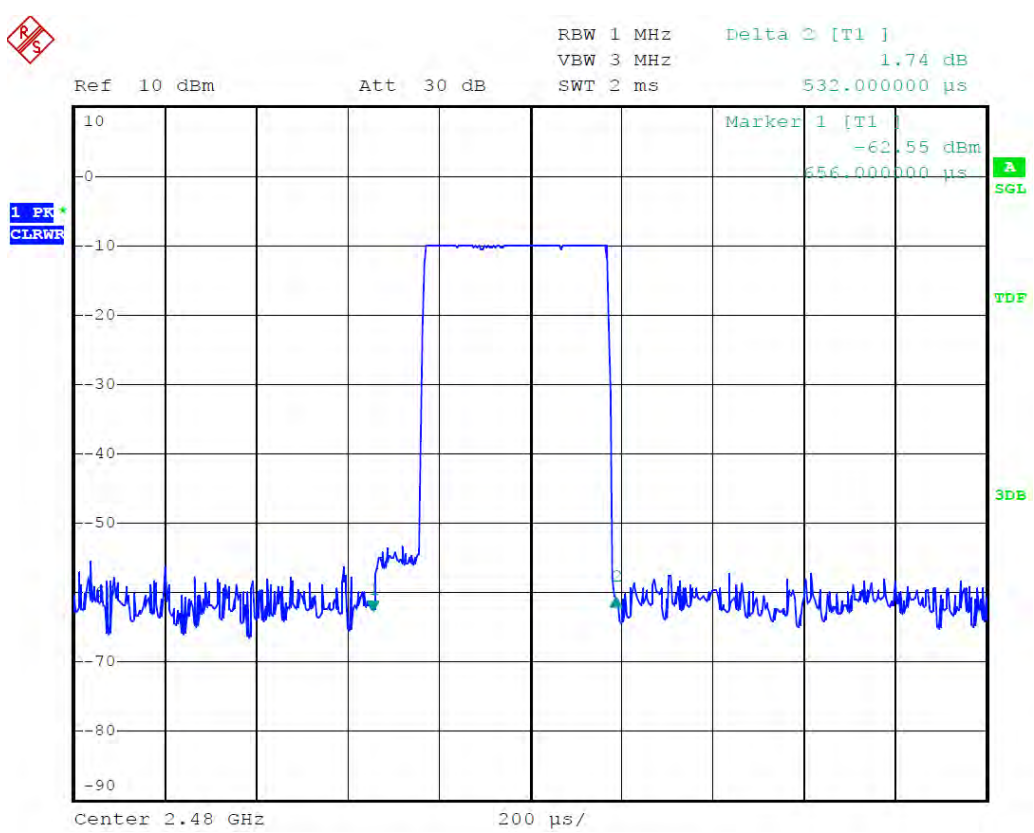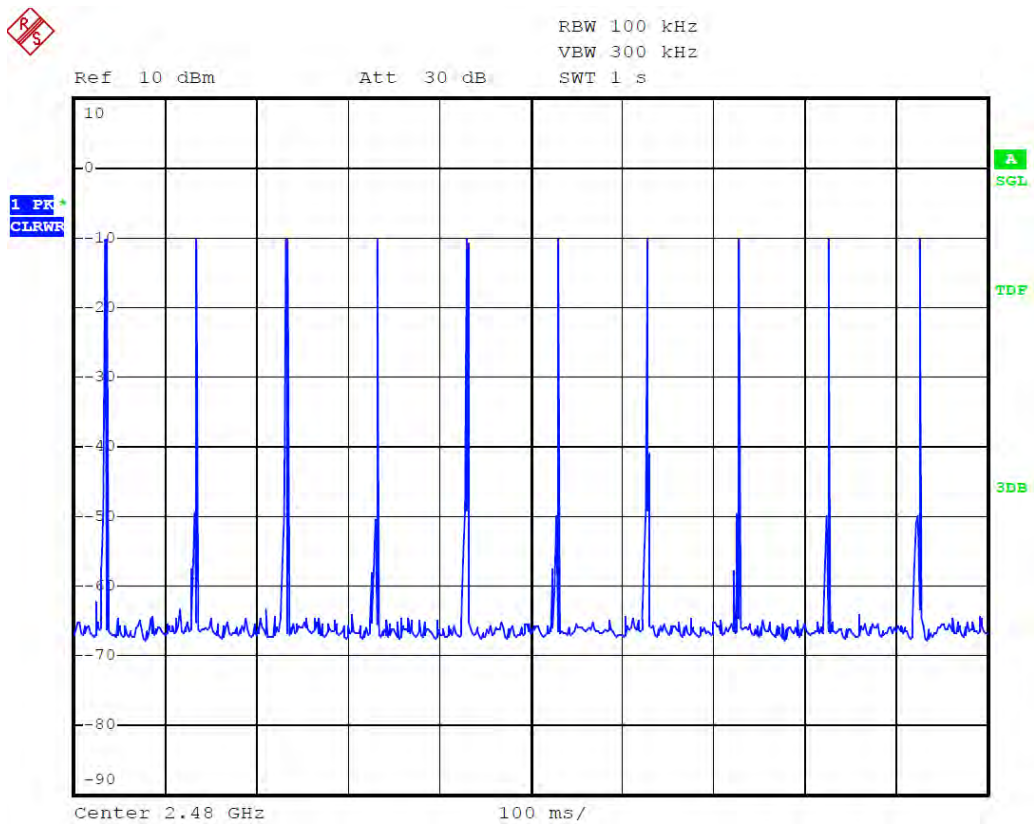

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1. Block Diagram of Test Setup



(EUT: Mini Speaker)

9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.3.1. Mini Speaker (EUT)

Model Number	:	ES-52040 BT
Serial Number	:	N/A
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.

9.5.3. Measurement the maximum peak output power.

9.6. Test Result


PASS.


Date of Test:	<u>April 21, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Apple</u>


Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2402	3.40	2.188	30 dBm / 1 W
Middle	2441	1.15	1.303	30 dBm / 1 W
High	2480	1.43	1.390	30 dBm / 1 W

The spectrum analyzer plots are attached as below.

"Spectrum analyzer" is [Agilent](#)

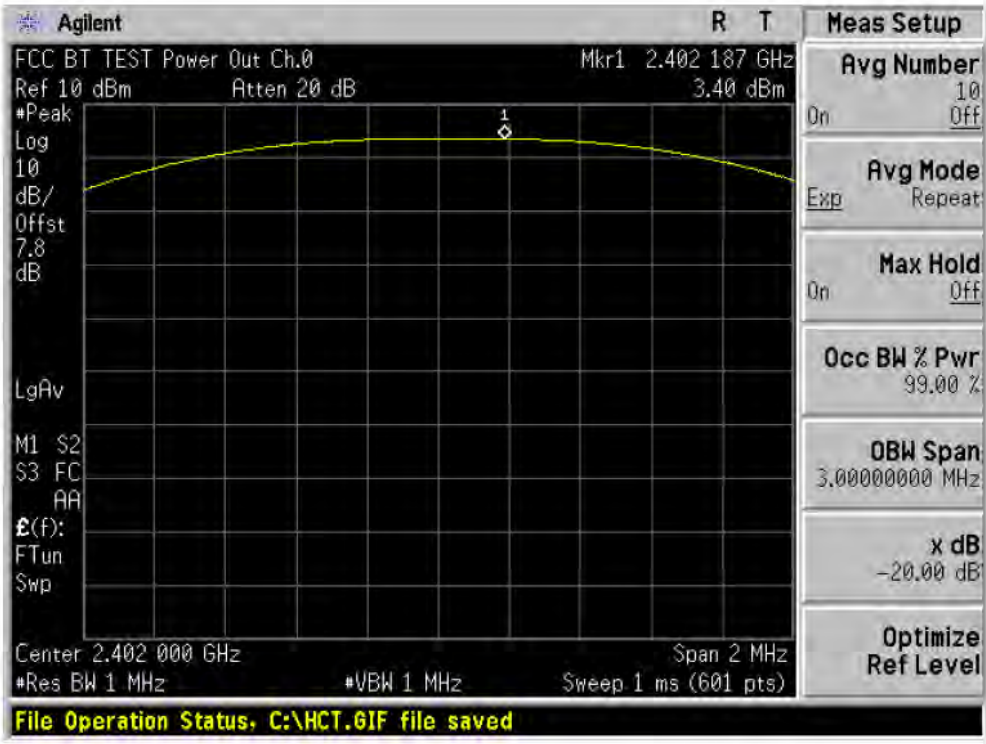


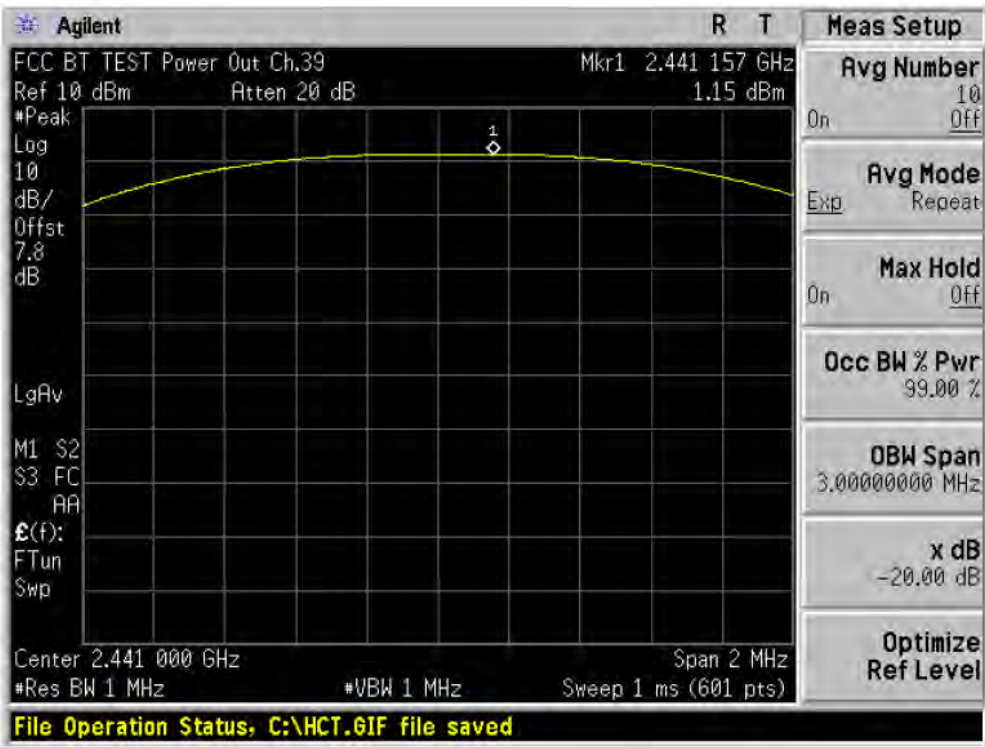

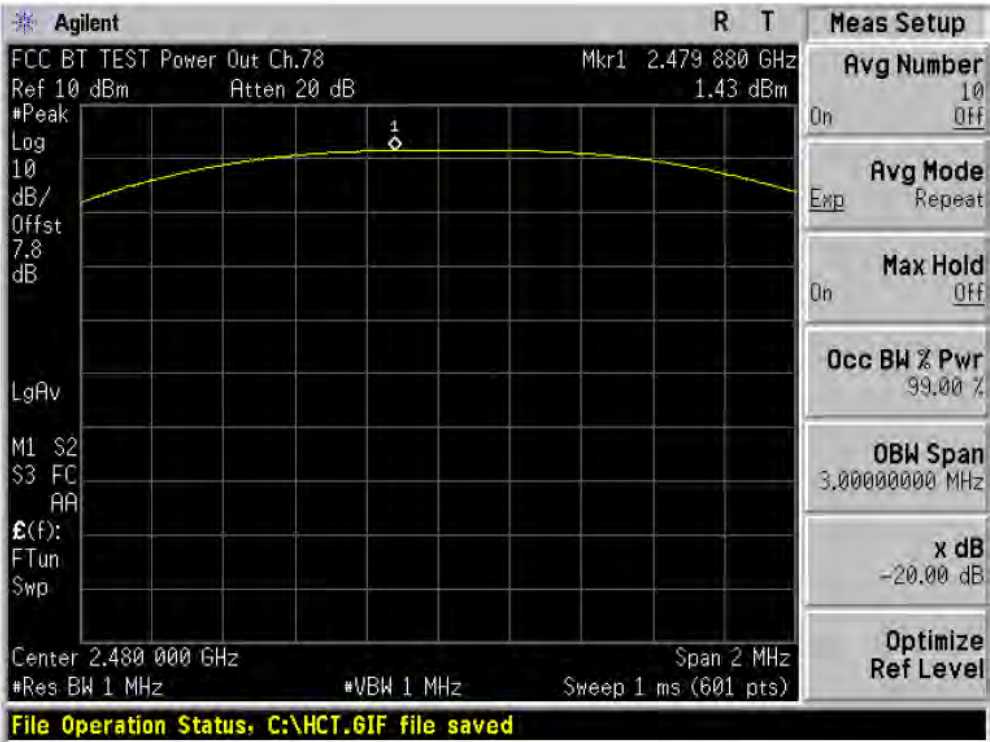

10.BAND EDGE COMPLIANCE TEST

10.1.Block Diagram of Test Setup



(EUT: Mini Speaker)

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1.Mini Speaker (EUT)

Model Number	:	ES-52040 BT
Serial Number	:	N/A
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD

10.4. Operating Condition of EUT

10.4.1. Setup the EUT and simulator as shown as Section 10.1.

10.4.2. Turn on the power of all equipment.

10.4.3. Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

10.5. Test Procedure

Conducted Band Edge:

10.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

10.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

10.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

10.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

10.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

10.5.7. The band edges was measured and recorded.

10.6.Test Result

Pass

Date of Test:	<u>April 21, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX (Hopping off)</u>	Test Engineer:	<u>Apple</u>

Conducted test


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	37.41	> 20dBc
2480	42.53	> 20dBc


Date of Test:	<u>April 21, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX (Hopping on)</u>	Test Engineer:	<u>Apple</u>

Conducted test

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	38.63	> 20dBc
2480	43.41	> 20dBc


"Spectrum analyzer" is R/S

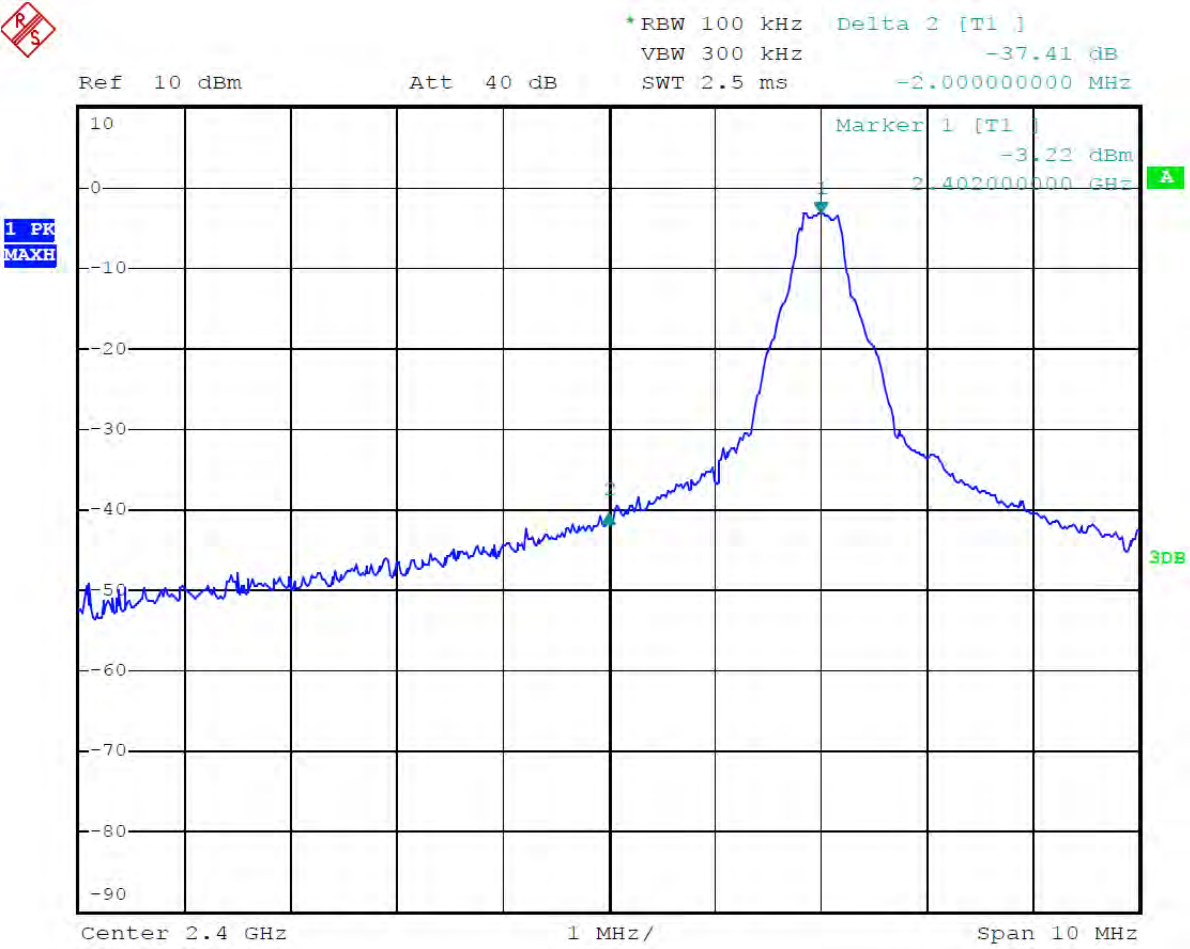


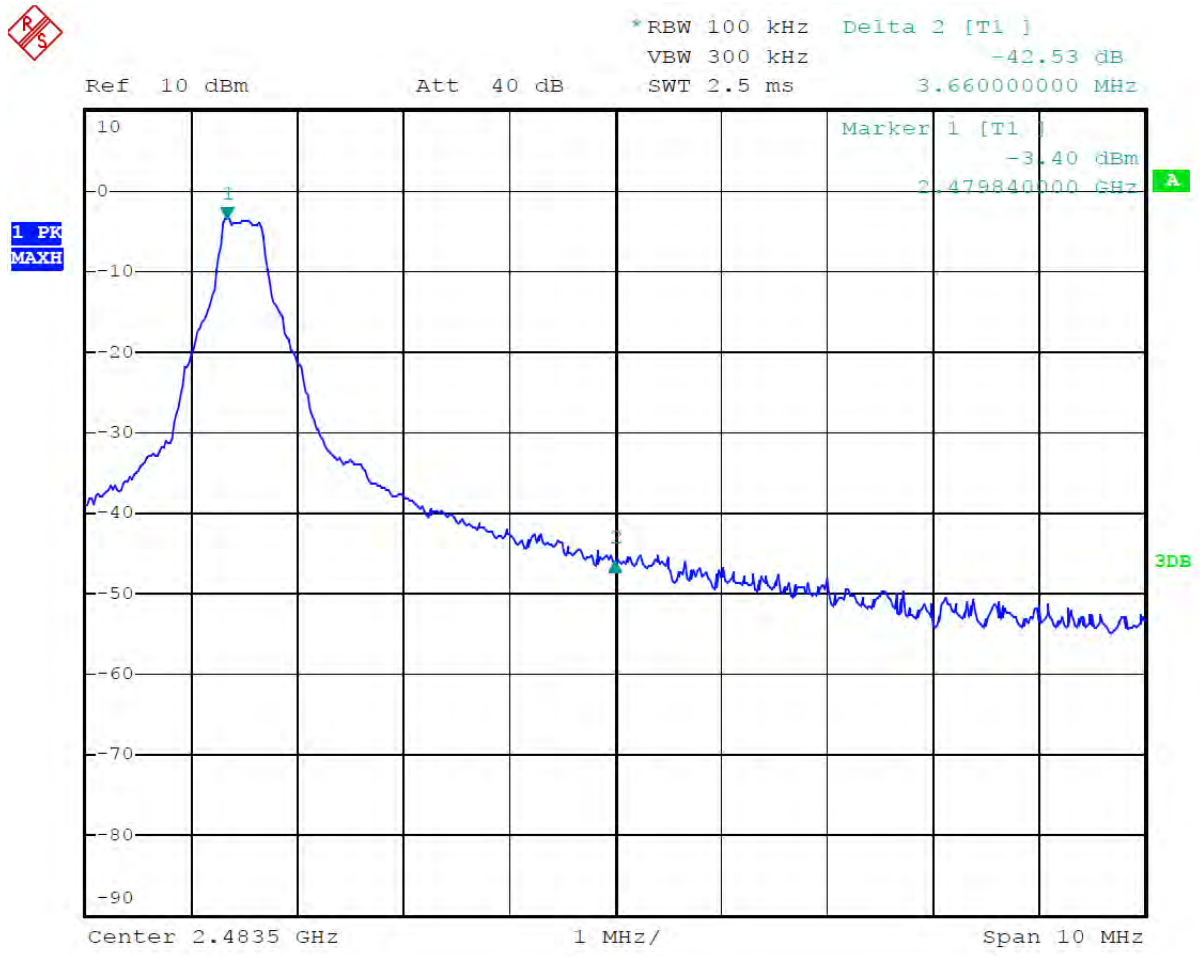



1 PK
MAXH

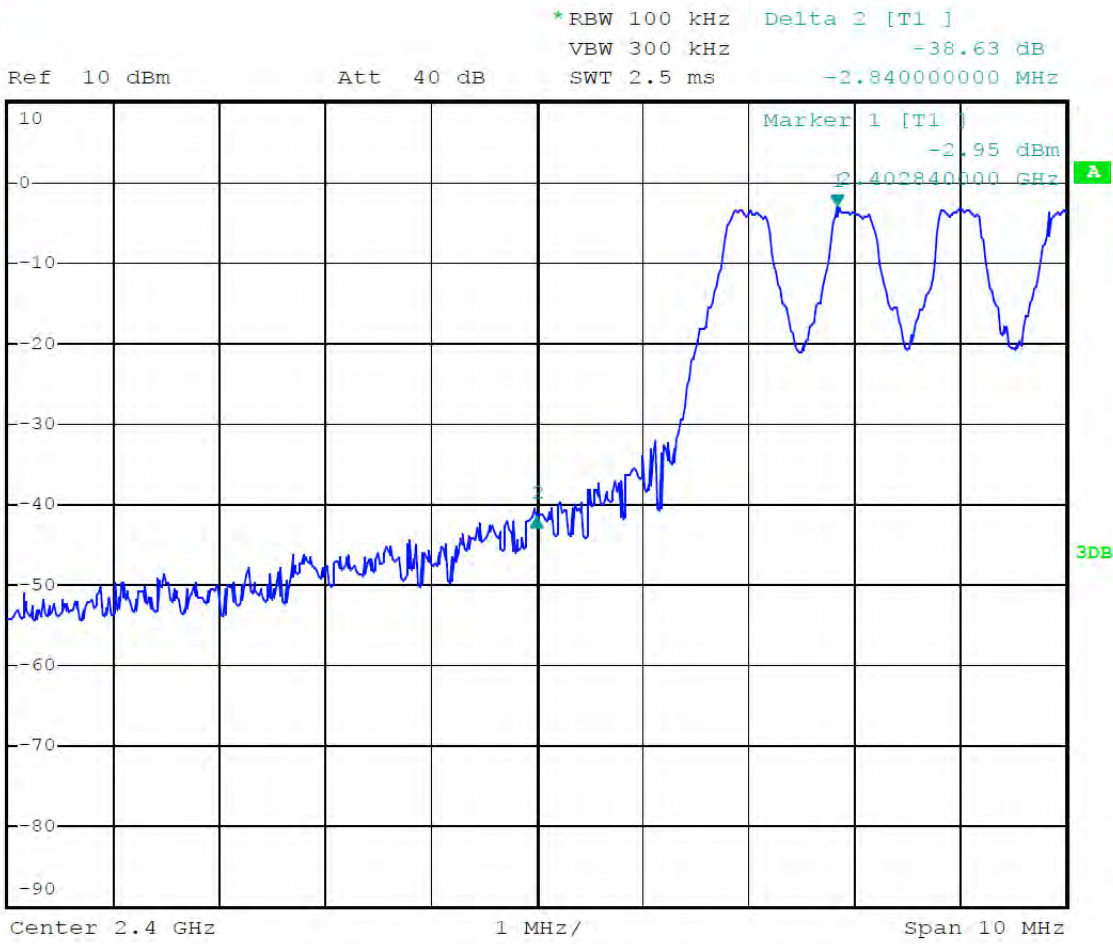

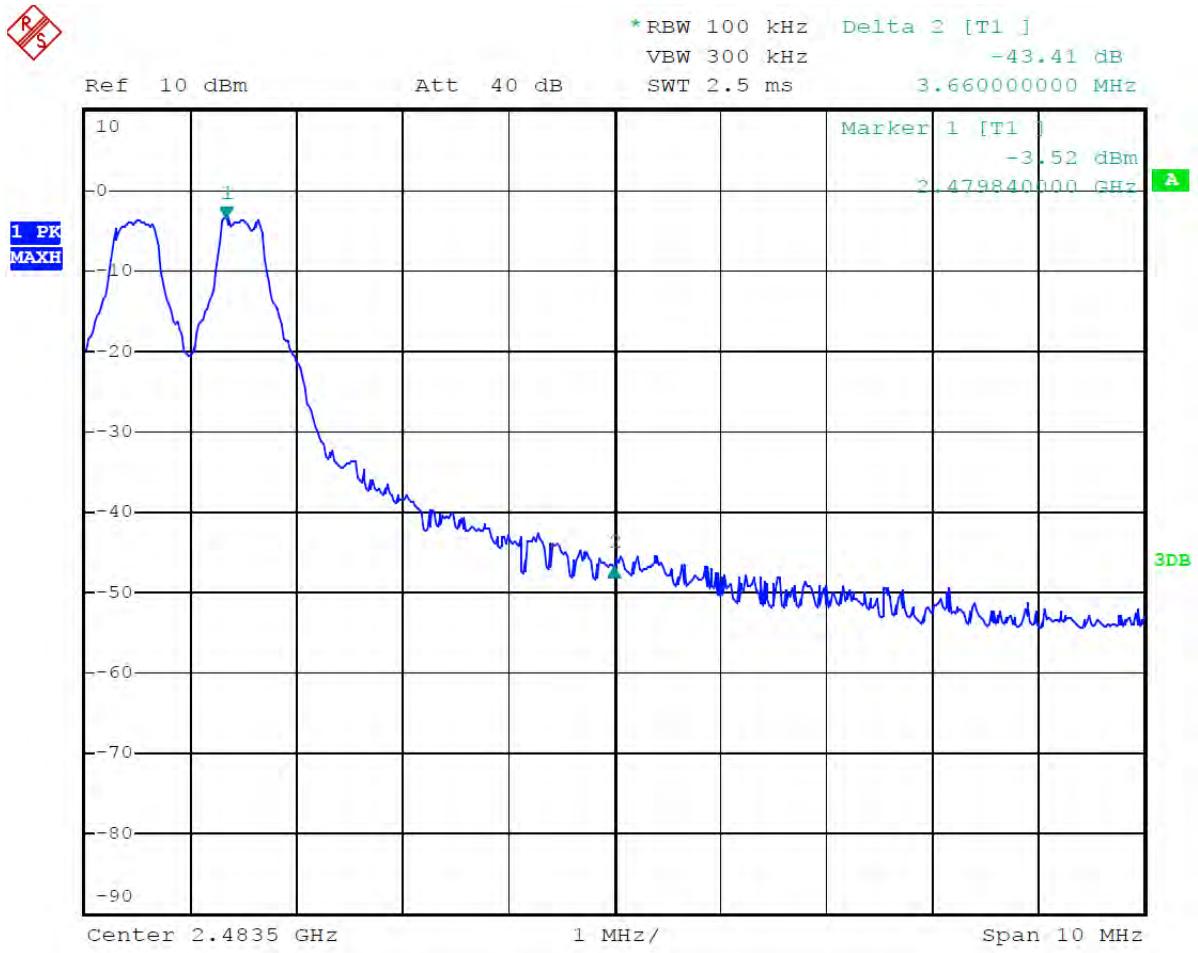

Radiated Band Edge Result

Date of Test:	<u>April 24, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX (2402MHz)</u>	Test Engineer:	<u>Kai</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

3. Display the measurement of peak values.

Date of Test:	<u>April 24, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>DC 3.7V</u>
Test Mode:	<u>TX (2480MHz)</u>	Test Engineer:	<u>Kai</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: RTTE #601

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Mini Speaker

Mode: TX 2402MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012/02/24

Time: 6/38/47

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

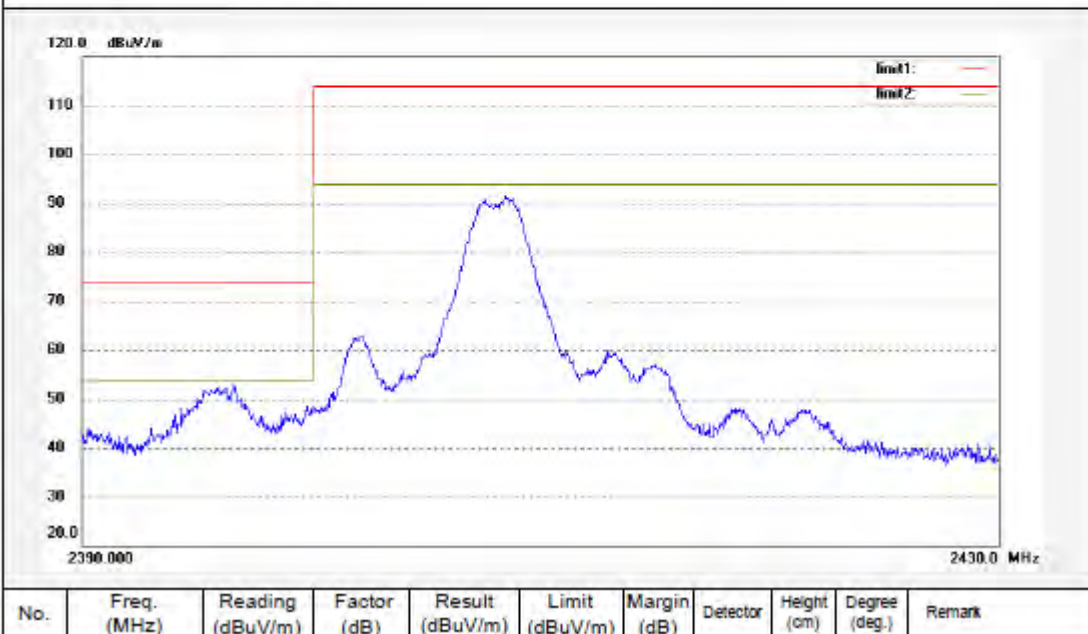


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #600

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Mini Speaker

Mode: TX 2402MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 6/36/51

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

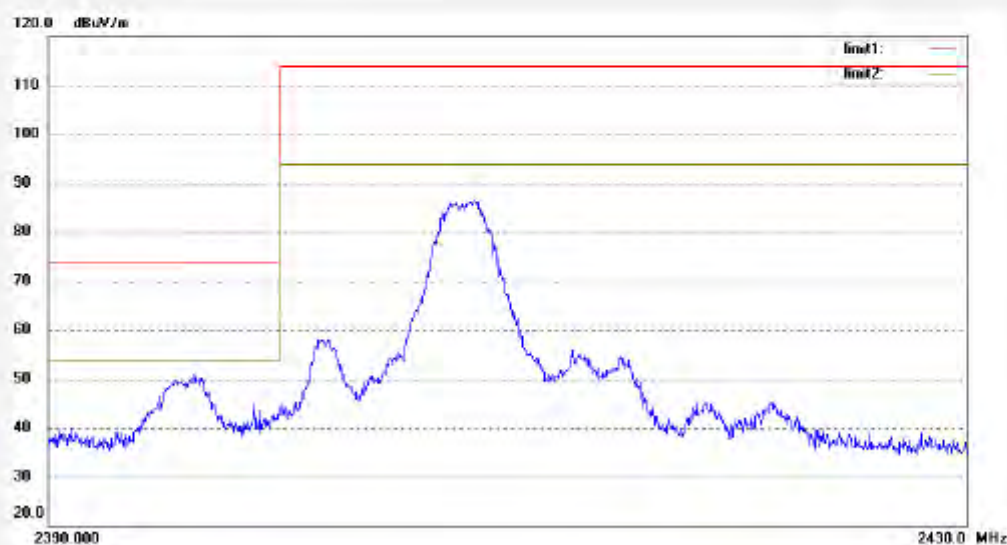

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #802	Polarization: Horizontal
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2012/02/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 8/40/43
EUT: Mini Speaker	Engineer Signature: Apple
Mode: TX 2480MHz	Distance:
Model: ES-52040BT	
Manufacturer: AOB	

Note: Report No.:ATE20120730



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #803

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Wireless Bluetooth Keyboard

Mode: Mini Speaker

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 8/43/14

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

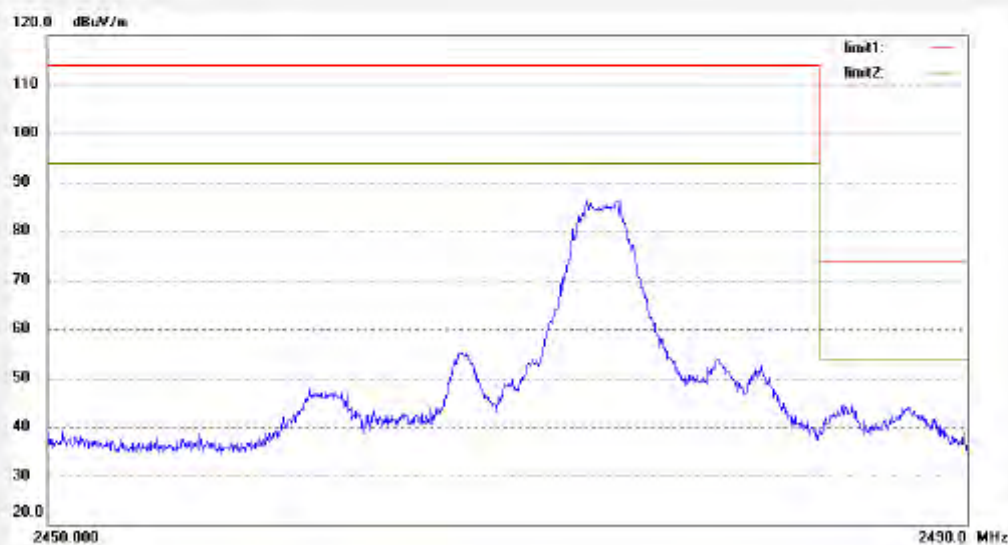

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

11.RADIATED SPURIOUS EMISSION TEST

11.1.Block Diagram of Test Setup


11.1.1.Block diagram of connection between the EUT and simulators



Setup: Transmitting mode

(EUT: Mini Speaker)

11.1.2.Semi-Anechoic Chamber Test Setup Diagram

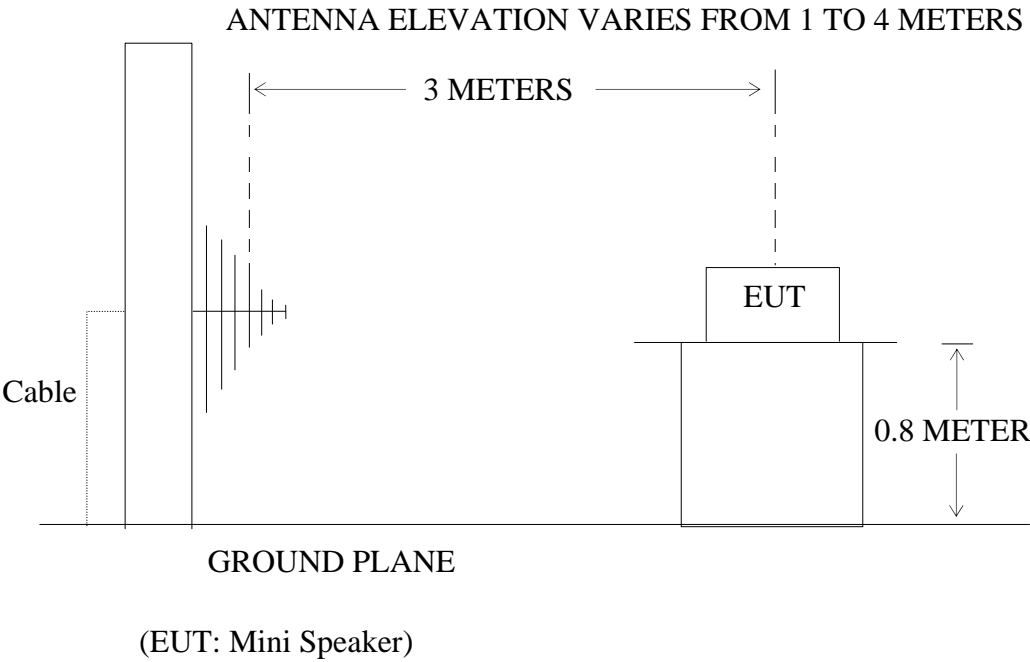

11.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.Restricted bands of operation

11.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

11.4.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.1.Mini Speaker (EUT)

Model Number : ES-52040 BT
 Serial Number : N/A
 Manufacturer : SHENZHEN AOB ELECTRONICS CO., LTD

11.5.Operating Condition of EUT

11.5.1.Setup the EUT and simulator as shown as Section 11.1.

11.5.2.Turn on the power of all equipment.

11.5.3.Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

11.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

11.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	April 24, 2012	Temperature:	25°C
EUT:	Mini Speaker	Humidity:	50%
Model No.:	ES-52040 BT	Power Supply:	DC 3.7V
Test Mode:	TX (2402MHz)	Test Engineer:	Apple

Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2402.000	90.54	95.30	-7.44	83.10	87.86	-	-	-	-	Vertical
*4814.020	45.63	49.99	-0.23	45.40	49.76	54	74	-8.6	-24.24	Vertical
2402.012	90.04	94.49	-7.44	82.60	87.05	-	-	-	-	Horizontal
*4814.000	50.83	53.09	-0.23	50.60	52.86	54	74	-3.40	-21.14	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test: April 24, 2012

Temperature: 25°C

EUT: Mini Speaker

Humidity: 50%

Model No.: ES-52040 BT

Power Supply: DC 3.7V

Test Mode: TX (2441MHz)

Test Engineer: Apple

Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2441.000	83.66	85.94	-7.36	76.30	78.58	-	-	-	-	Vertical
*4884.000	43.67	47.05	0.13	43.80	47.18	54	74	-10.20	-26.82	Vertical
2441.000	83.26	86.34	-7.36	75.90	78.98	-	-	-	-	Horizontal
*4884.000	42.47	46.60	0.13	42.60	46.73	54	74	-11.40	-27.27	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test: April 24, 2012

Temperature: 25°C

EUT: Mini Speaker

Humidity: 50%

Model No.: ES-52040 BT

Power Supply: DC 3.7V

Test Mode: TX (2480MHz)

Test Engineer: Apple

Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2480.000	83.37	86.36	-7.37	76.00	78.99	-	-	-	-	Vertical
*4954.000	46.93	51.79	0.47	47.40	52.26	54	74	-6.60	-21.74	
2480.000	84.07	86.49	-7.37	76.70	79.12	-	-	-	-	Horizontal
*4954.000	47.83	51.13	0.47	48.30	51.60	54	74	-5.70	-22.40	

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 968 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #5868

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2012/02/24

Temp.(C)/Hum.(%) 25 C / 50 %

Time: 15:01:24

EUT: Mini Speaker

Engineer Signature: Apple


Mode: TX 2402MHz

Distance:

Model: ES-52040BT

Manufacturer: AOB

Note: Report No.:ATE20120730

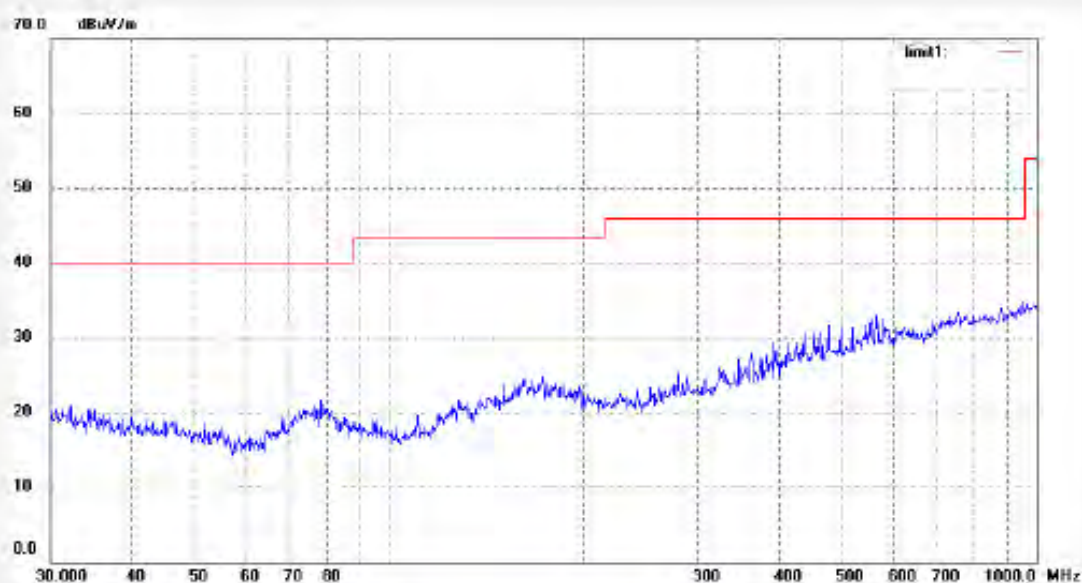

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #5869

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2402MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 15:05:27

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

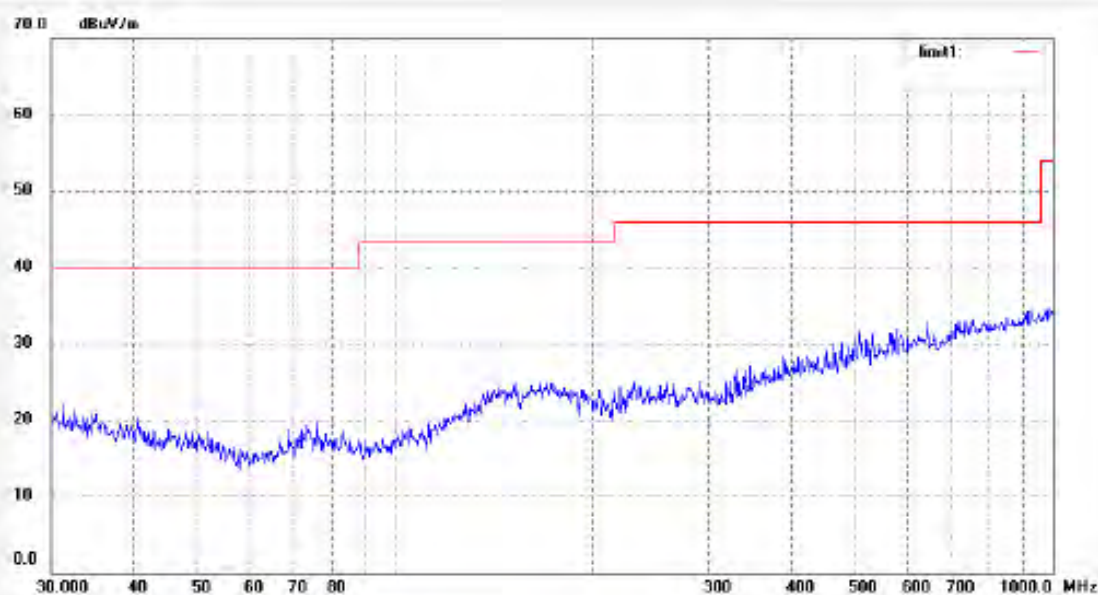

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #579

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 2012/02/24

Temp.(C)/Hum.(%) 24 C / 48 %

Time: 4:44:18

EUT: Mini Speaker

Engineer Signature: Apple


Mode: TX 2402MHz

Distance:

Model: ES-52040BT

Manufacturer: AOB

Note: Report No.: ATE20120730

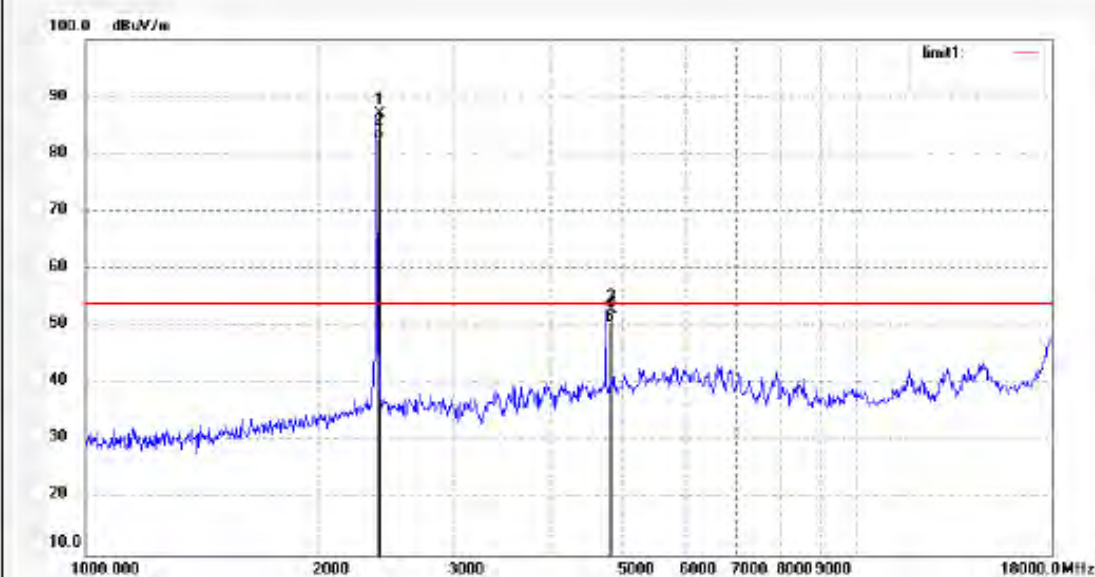

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	84.49	-7.44	87.05	--	--	peak			
2	2402.000	90.04	-7.44	82.60	--	--	AVG			
3	4814.000	53.09	-0.23	52.86	74.00	-21.1	peak			
4	4814.000	50.83	-0.23	50.60	54.00	-3.4	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber

Tel:+86-0755-28503290

Fax:+86-0755-28503396

Job No.: RTTE #578

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Mini Speaker

Mode: TX 2402MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 4:34:50

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

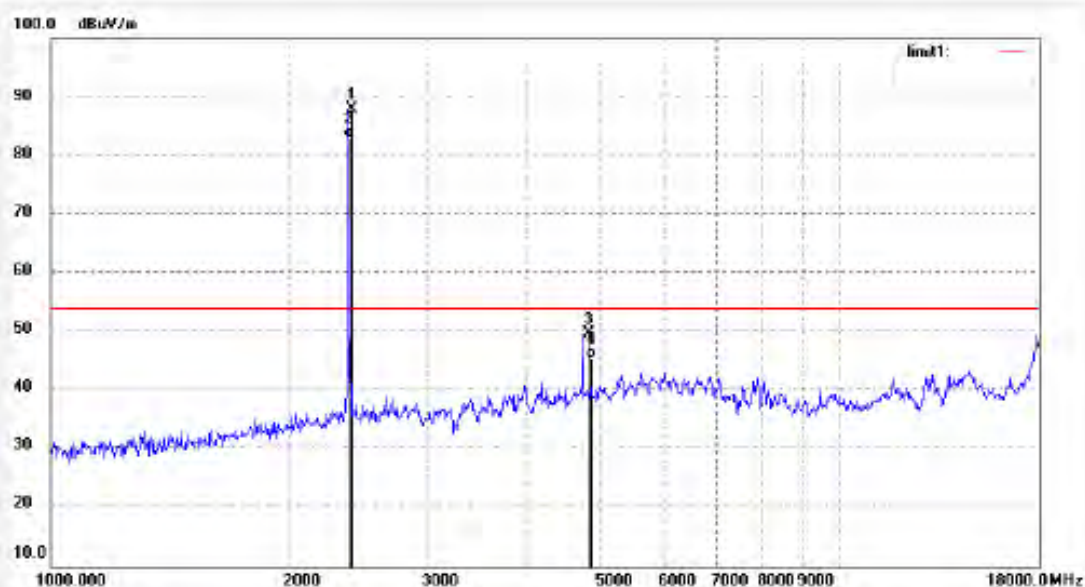

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	95.30	-7.44	87.86	--	--	peak			
2	2402.000	90.54	-7.44	83.10	--	--	AVG			
3	4814.000	49.99	-0.23	49.76	74.00	-24.2	peak			
4	4814.000	45.63	-0.23	45.40	54.00	-8.6	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: RTTE #5916

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2402MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012/02/24

Time: 11:52:09

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

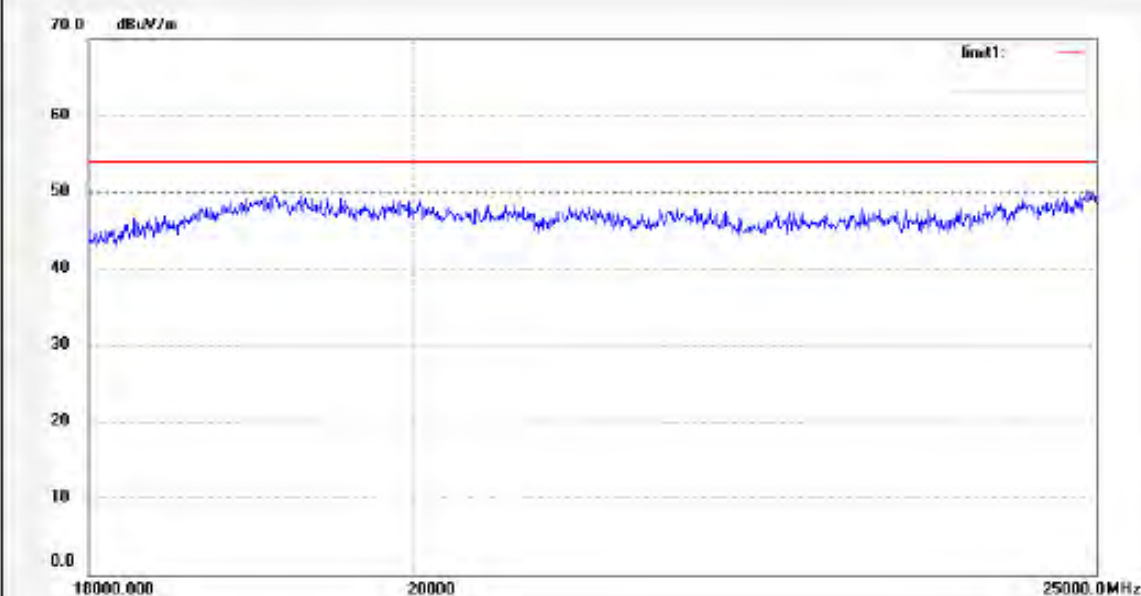

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 986 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #5917

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2402MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 11:56:43

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

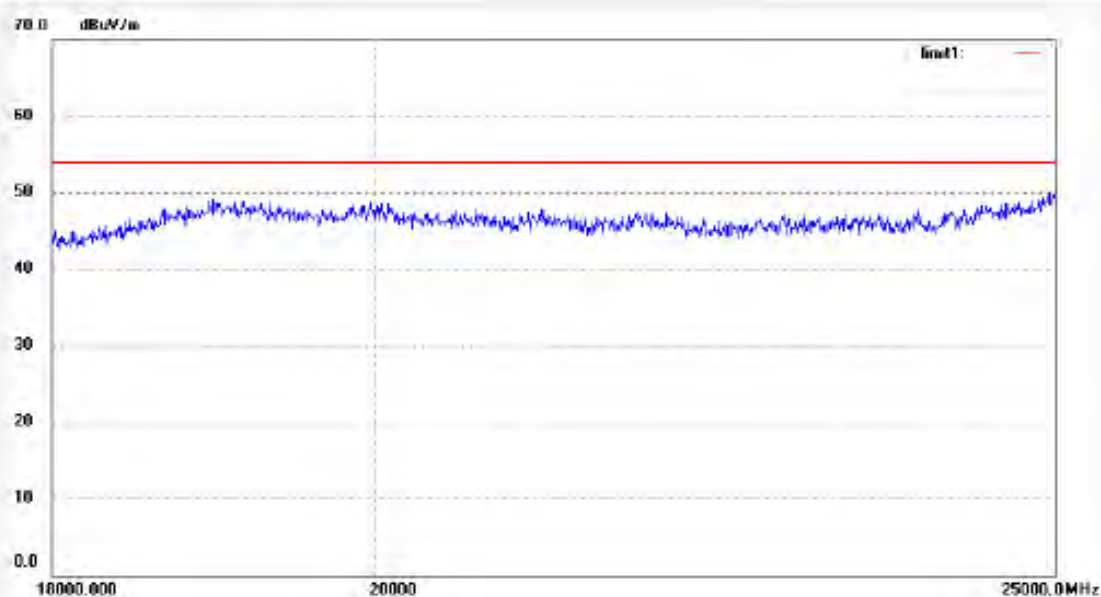

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-28503290

Fax:+86-0755-28503396

Job No.: RTTE #5871

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2441MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012/02/24

Time: 15:14:30

Engineer Signature: Apple

Distance:

Note: Report No.:ATE20120730

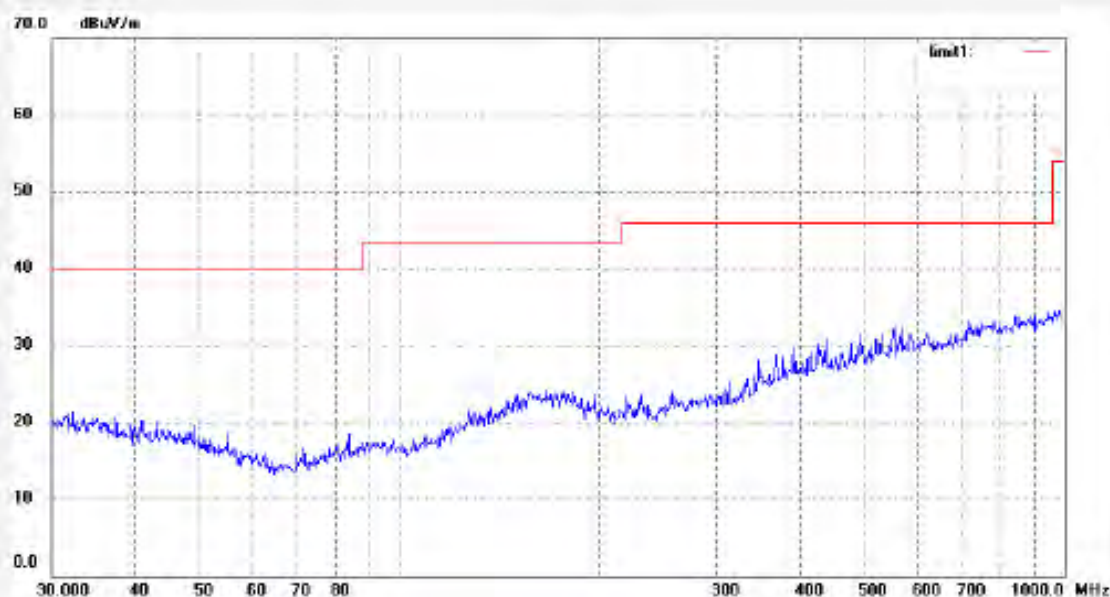

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: RTTE #5868

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2441MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 15:01:24

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

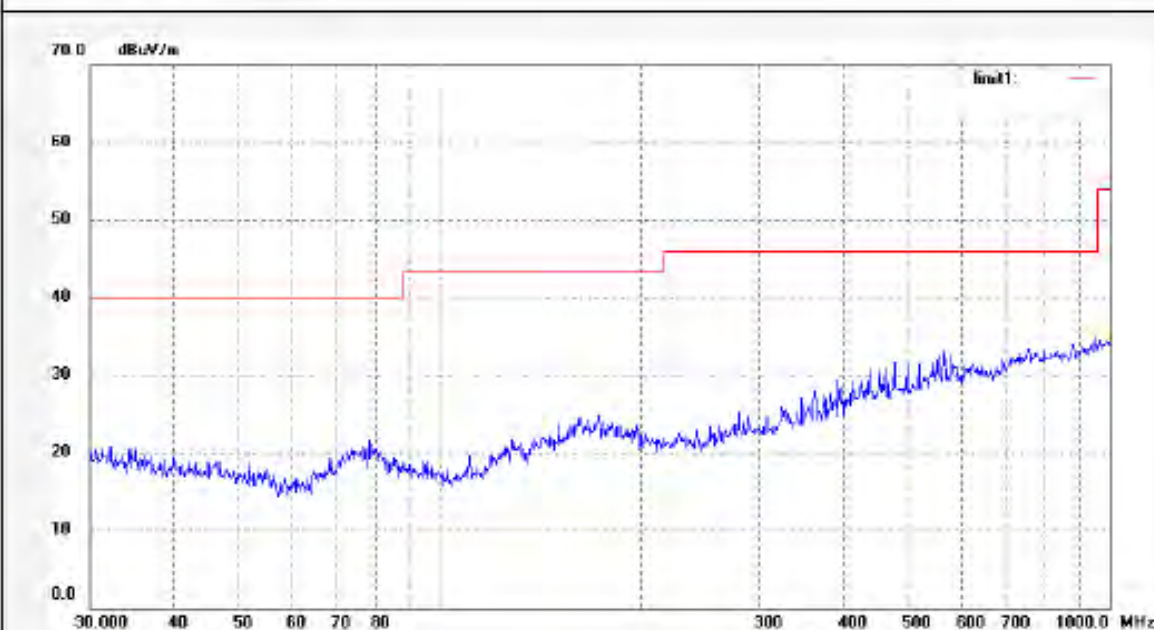

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #580

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Mini Speaker

Mode: TX 2441MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012/02/24

Time: 4:50:55

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

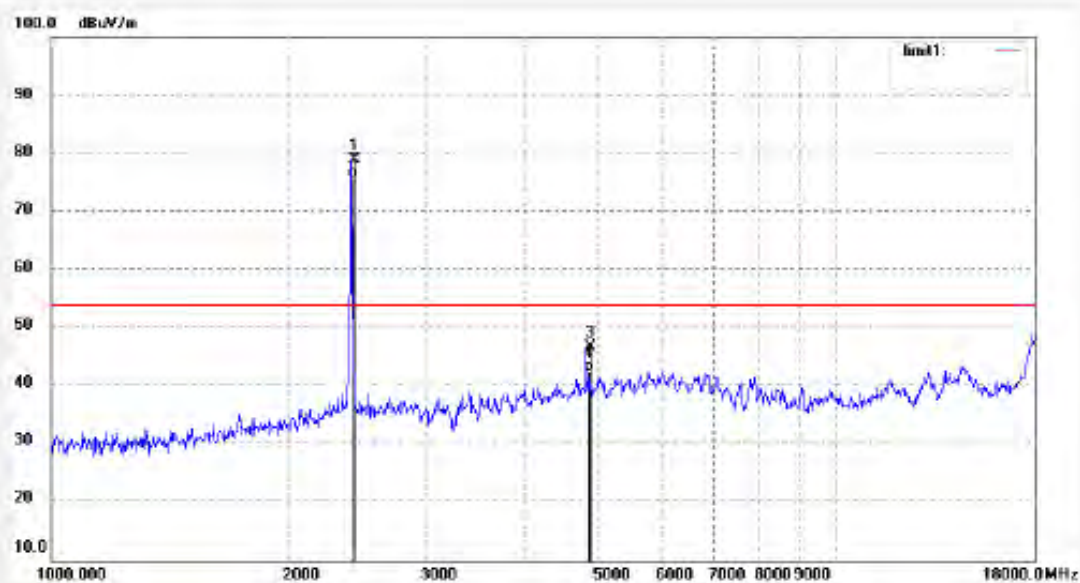

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	86.34	-7.36	78.98	--	--	peak			
2	2441.000	83.26	-7.36	75.90	--	--	AVG			
3	4884.000	46.60	0.13	46.73	74.00	-27.3	peak			
4	4884.000	42.47	0.13	42.60	54.00	-11.4	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #581

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Mini Speaker

Mode: TX 2441MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 4:58:15

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

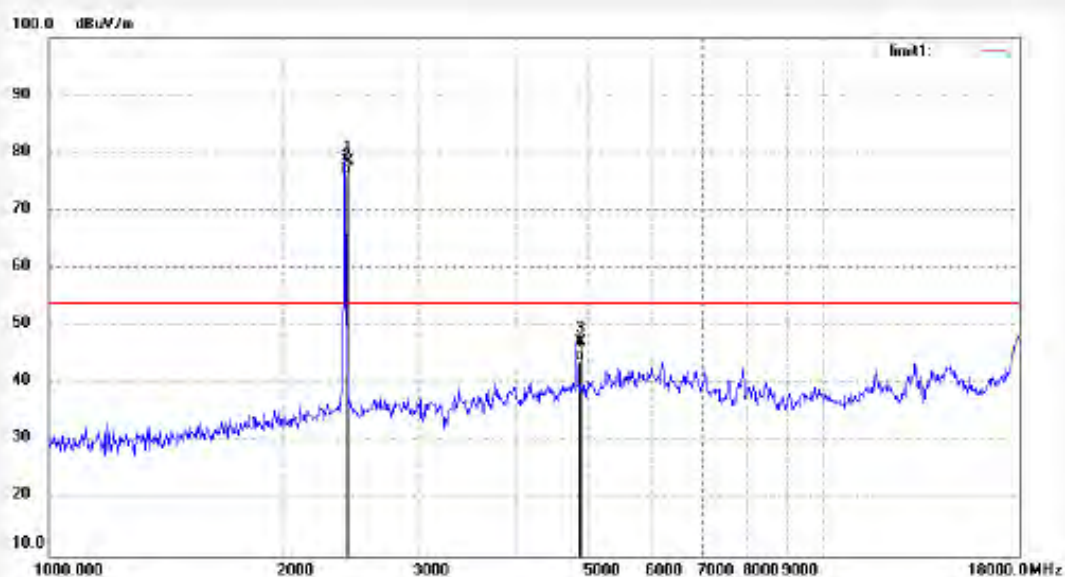

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	85.94	-7.36	78.58	--	--	peak			
2	2441.000	83.66	-7.36	76.30	--	--	AVG			
3	4884.000	47.05	0.13	47.18	74.00	-26.8	peak			
4	4884.000	43.67	0.13	43.80	54.00	-10.2	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #5919

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2441MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012/02/24

Time: 12:05:30

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

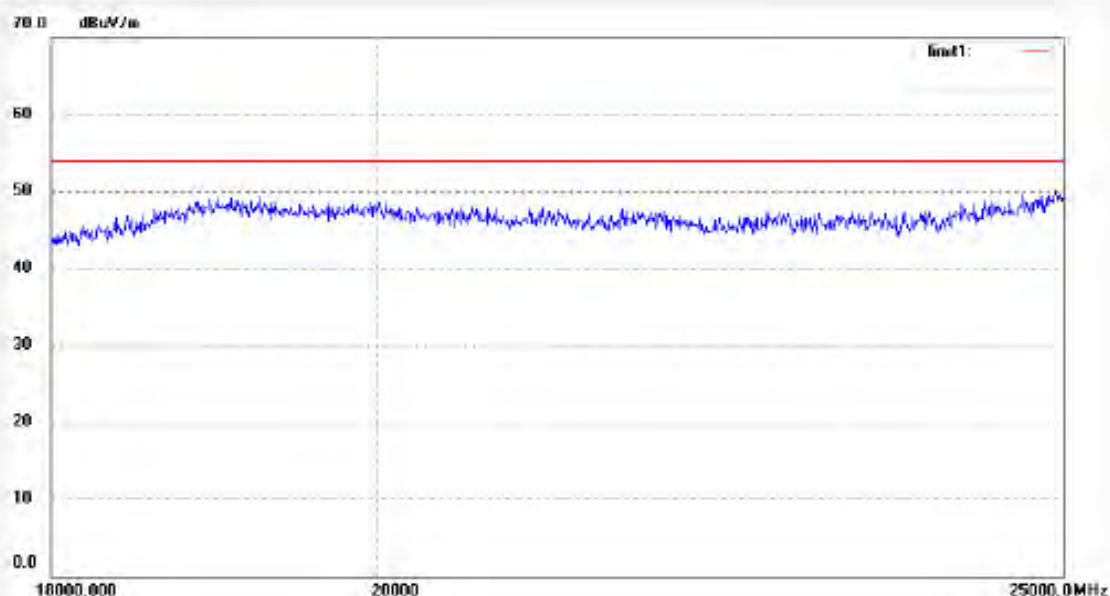

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 066 chamber

Tel:+86-0755-28503290

Fax:+86-0755-28503396

Job No.: RTTE #5918

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2441MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 12:01:19

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

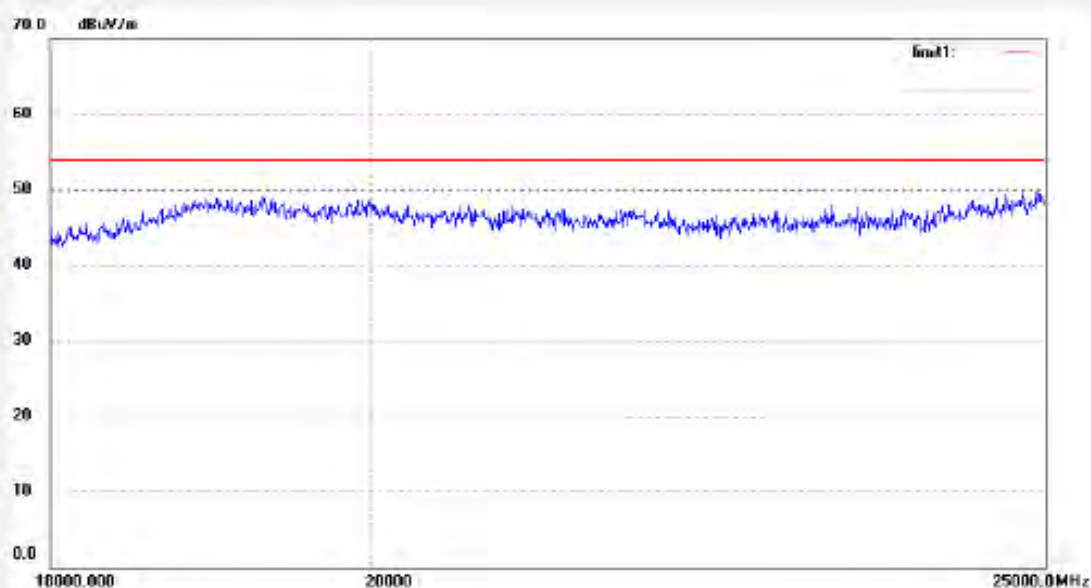

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: RTTE #5872

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2480MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012/02/24

Time: 15:19:41

Engineer Signature: Apple

Distance:

Note: Report No.:ATE20120730

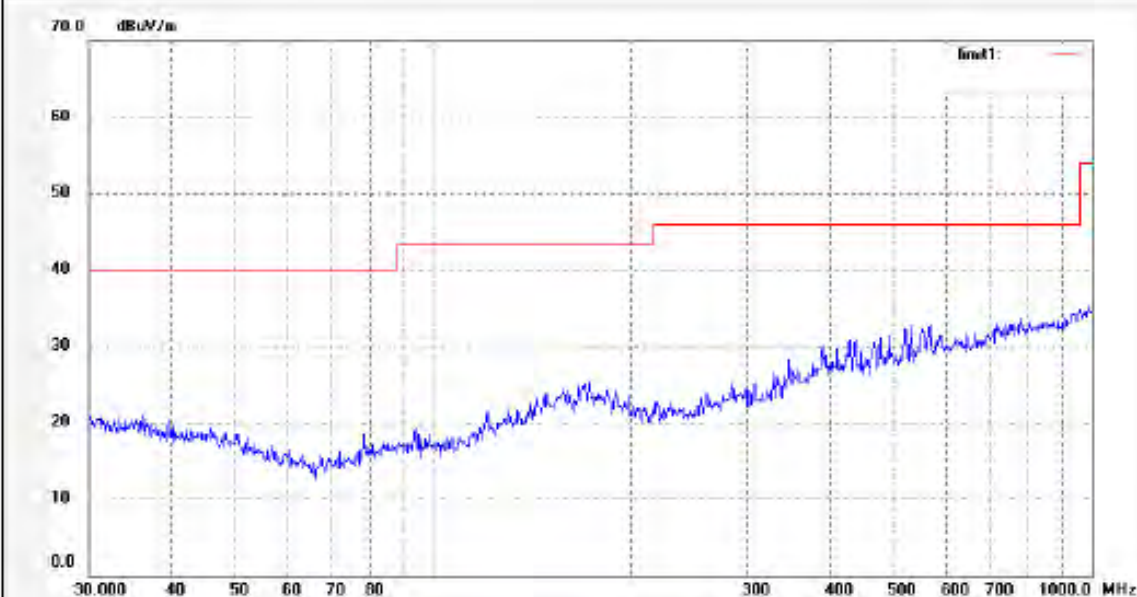

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #5873

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2480MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 15:23:50

Engineer Signature: Apple

Distance:

Note: Report No.:ATE20120730

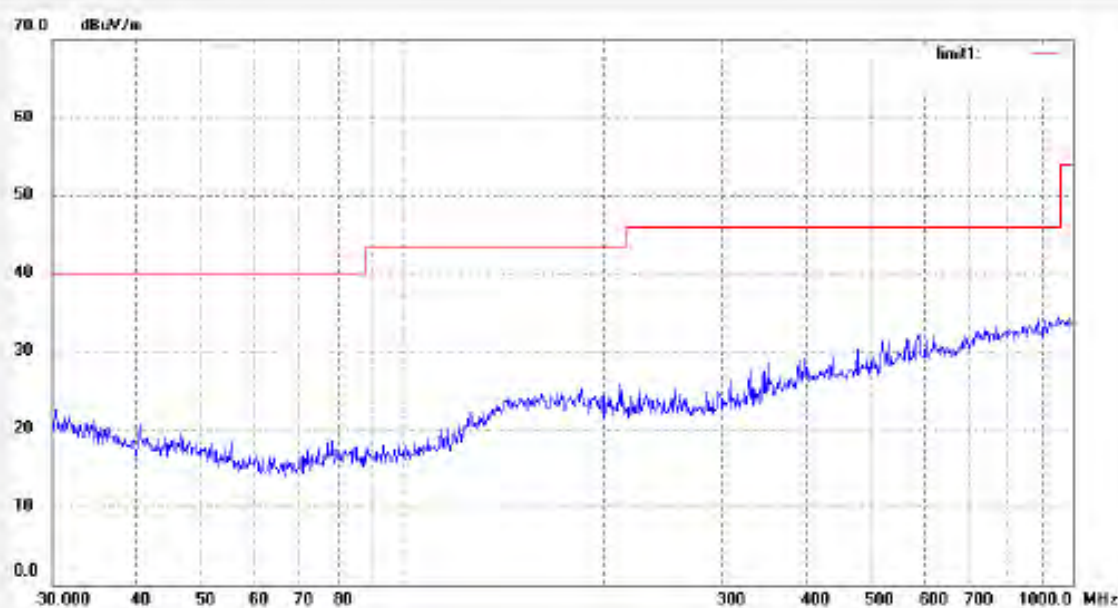

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 968 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: RTTE #583

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Mini Speaker

Mode: TX 2480MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012/02/24

Time: 5:17:29

Engineer Signature: Apple

Distance:

Note: Report No.: ATE20120730

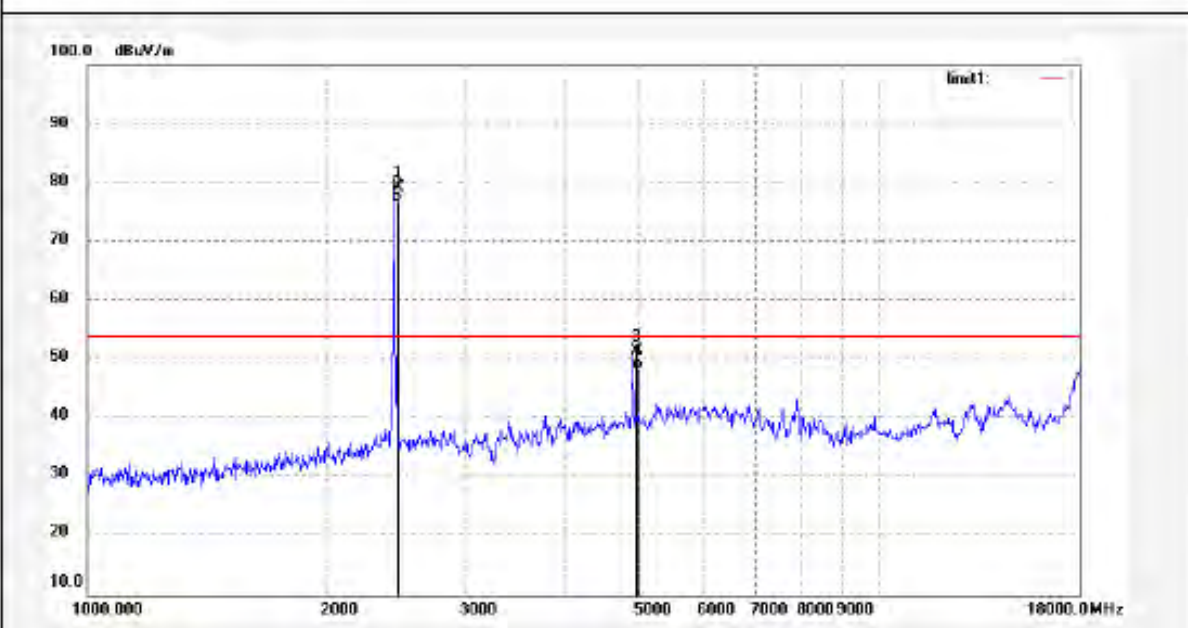

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	86.49	-7.37	79.12	--	--	peak			
2	2480.000	84.07	-7.37	76.70	--	--	AVG			
3	4954.000	51.13	0.47	51.60	74.00	-22.4	peak			
4	4954.000	47.83	0.47	48.30	54.00	-5.7	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #582

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Mini Speaker

Mode: TX 2480MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 5:10:05

Engineer Signature: Apple

Distance:

Note: Report No.:ATE20120730

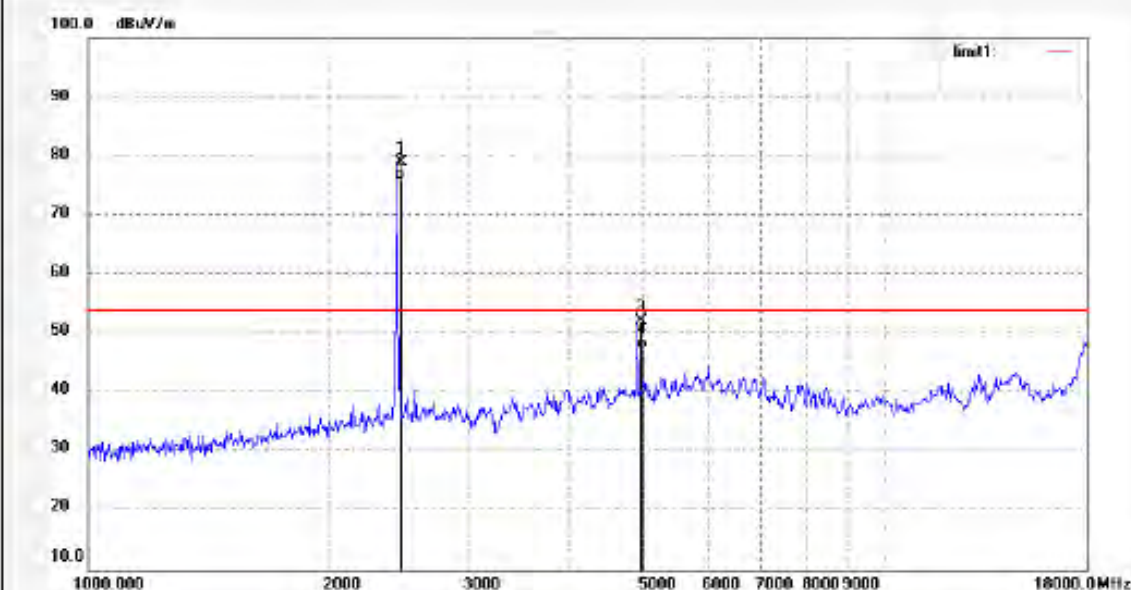

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	86.36	-7.37	78.99	--	--	peak			
2	2480.000	83.37	-7.37	76.00	--	--	AVG			
3	4954.000	51.79	0.47	52.26	74.00	-21.7	peak			
4	4954.000	46.93	0.47	47.40	54.00	-6.6	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RTTE #5920

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2480MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012/02/24

Time: 12:10:41

Engineer Signature: Apple

Distance:

Note: Report No.:ATE20120730

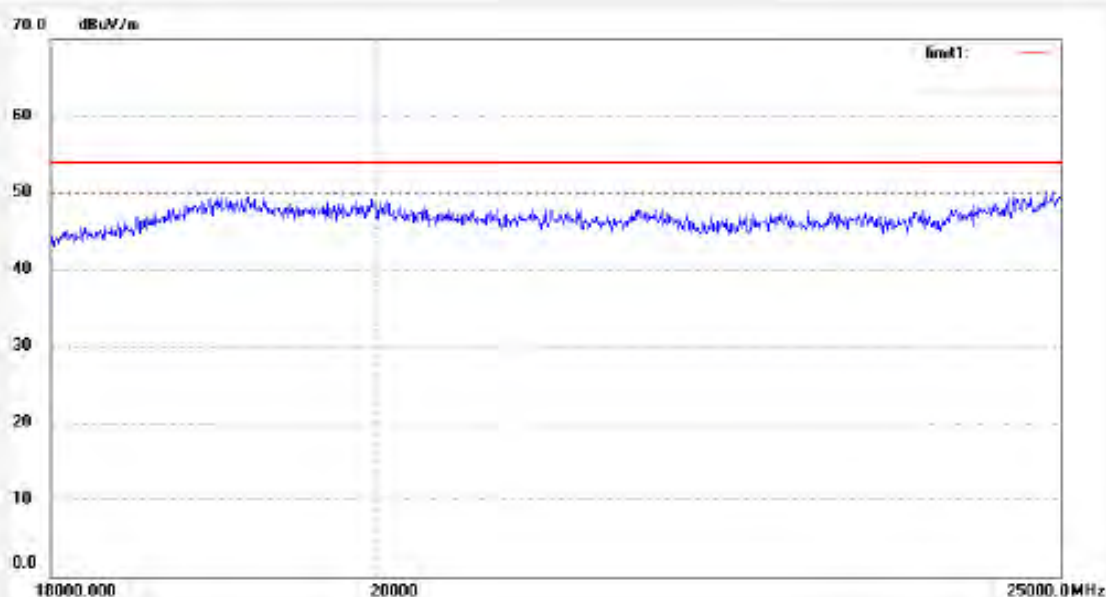

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 988 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: RTTE #5921

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Mini Speaker

Mode: TX 2480MHz

Model: ES-52040BT

Manufacturer: AOB

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012/02/24

Time: 12:15:08

Engineer Signature: Apple

Distance:


Note: Report No.:ATE20120730

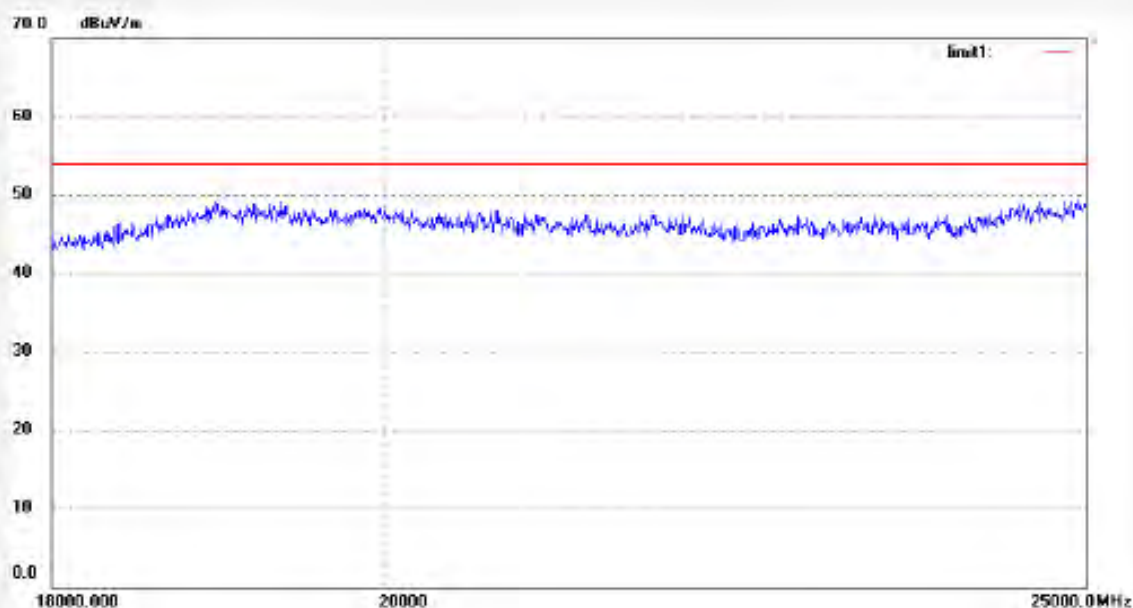

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

12.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

12.1.Block Diagram of Test Setup



(EUT: Mini Speaker)

12.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

12.3.EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

12.3.1.Mini Speaker (EUT)

Model Number	:	ES-52040 BT
Serial Number	:	N/A
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD

12.4.Operating Condition of EUT

12.4.1.Setup the EUT and simulator as shown as Section 12.1.

12.4.2.Turn on the power of all equipment.

12.4.3.Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, 2480MHz TX frequency to transmit.

12.5.Test Procedure

12.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

12.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz


12.5.3.The Conducted Spurious Emission was measured and recorded.

12.6.Test Result


Pass.

The spectrum analyzer plots are attached as below.


"Spectrum analyzer" is [Agilent](#)
TX 2402GHz (30MHz-25GHz)

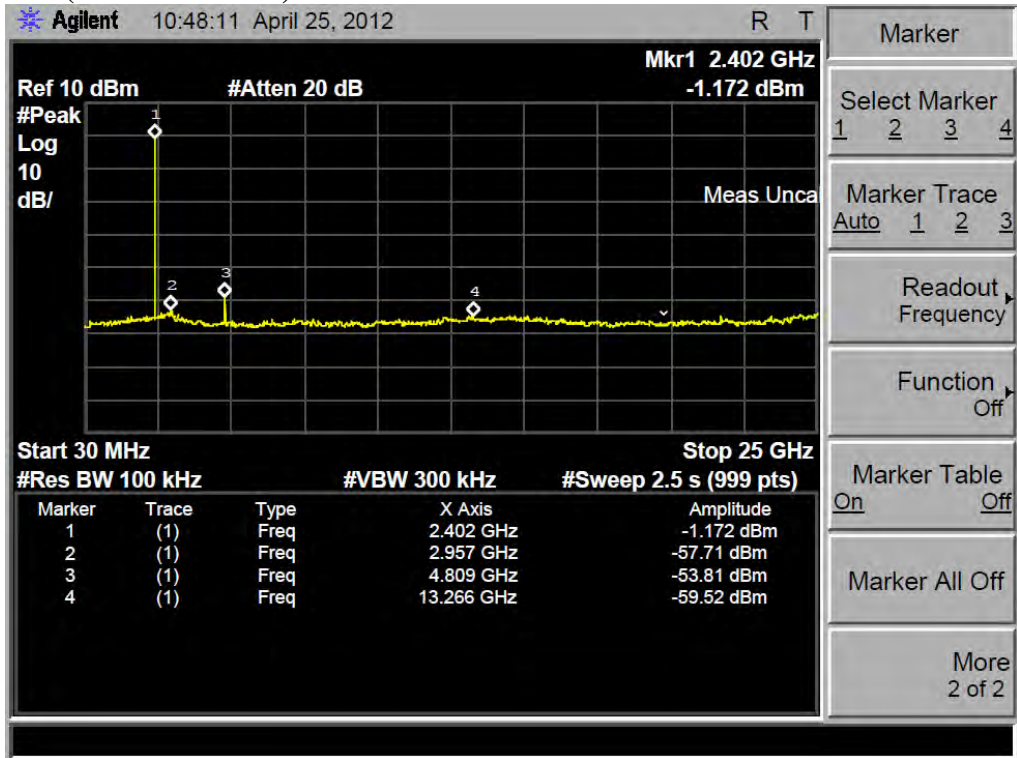

TX 2441GHz (30MHz-25GHz)

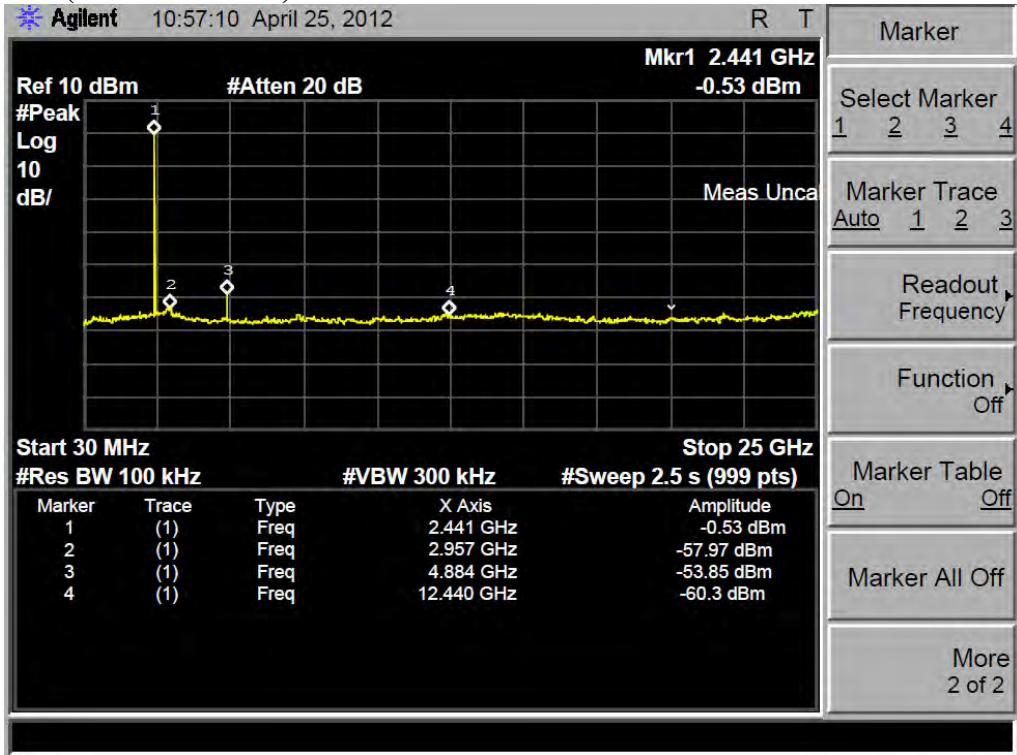

TX 2480GHz (30MHz-1GHz)

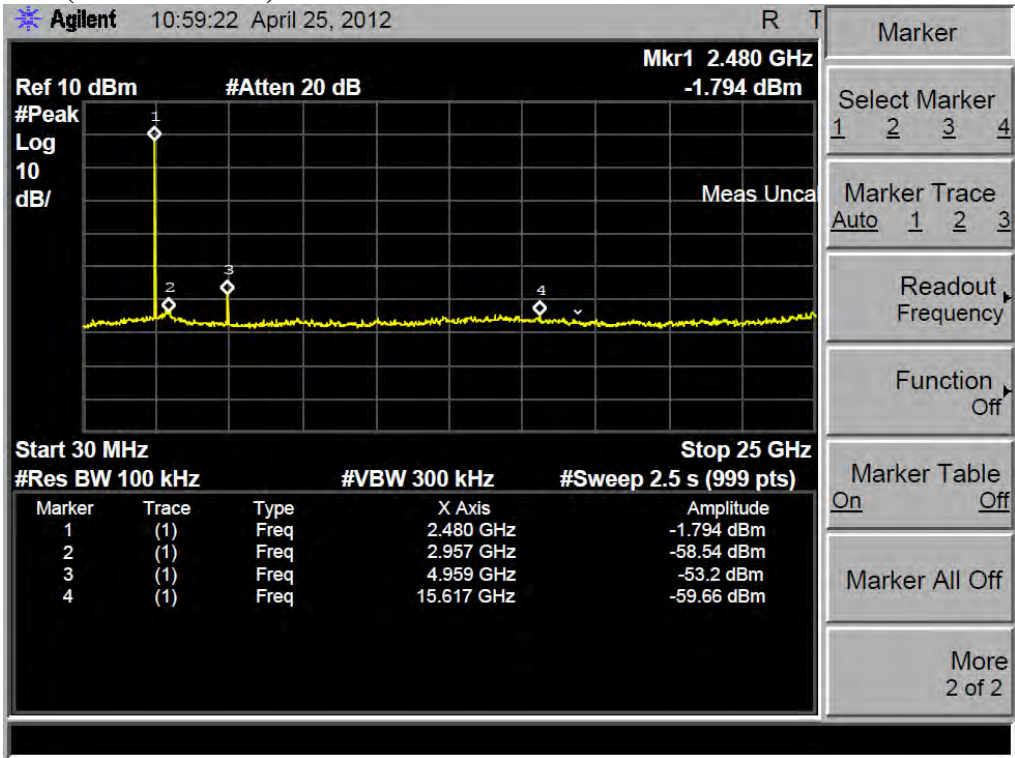


13.AC POWER LINE CONDUCTED EMISSION FOR FCC PART

15 SECTION 15.207(A)


13.1.Block Diagram of Test Setup

13.1.1.Block diagram of connection between the EUT and simulators



(EUT: Mini Speaker)

13.1.2.Shielding Room Test Setup Diagram

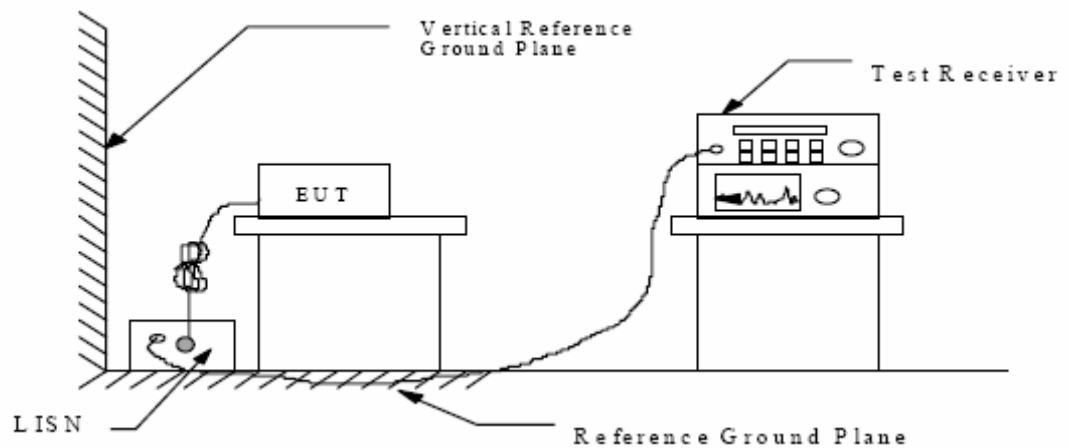

(EUT: Mini Speaker)

13.2.The Emission Limit

13.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

13.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

13.3.1.Mini Speaker (EUT)

Model Number	:	ES-52040 BT
Serial Number	:	N/A
Manufacturer	:	SHENZHEN AOB ELECTRONICS CO., LTD

13.4.Operating Condition of EUT

13.4.1.Setup the EUT and simulator as shown as Section 13.1.

13.4.2.Turn on the power of all equipment.

13.4.3.Let the EUT work in (Charging) mode measure it.

13.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

13.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	<u>April 23, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mini Speaker</u>	Humidity:	<u>50%</u>
Model No.:	<u>ES-52040 BT</u>	Power Supply:	<u>AC 120V/ 60Hz</u>
Test Mode:	<u>Charging</u>	Test Engineer:	<u>Apple</u>

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.183870	45.90	64.3	18.4	QP	Neutral
0.578211	40.50	56	15.5	QP	
3.944592	43.60	56	12.4	QP	
12.454071	42.00	60	18.0	QP	
0.203980	38.20	53.4	15.2	AV	
0.408557	36.30	47.7	11.4	AV	
4.289533	36.10	46	9.9	AV	
12.256783	46.10	50	3.9	AV	
0.185344	45.80	64.2	18.4	QP	Live
0.575907	39.50	56	16.5	QP	
4.221581	49.70	56	6.3	QP	
12.654535	46.70	60	13.3	QP	
0.203980	38.40	53.4	15.0	AV	
0.406930	36.30	47.7	11.4	AV	
2.923975	33.50	46	12.5	AV	
12.654535	44.60	50	5.4	AV	


Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.

ACCURATE TECHNOLOGY CO., LTD**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Mini Speaker M/N:ES-52040BT
 Manufacturer: AOB
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: Kai
 Test Specification: N 120V/60Hz
 Comment: Mains port
 Start of Test: Report NO.:ATE20120730

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

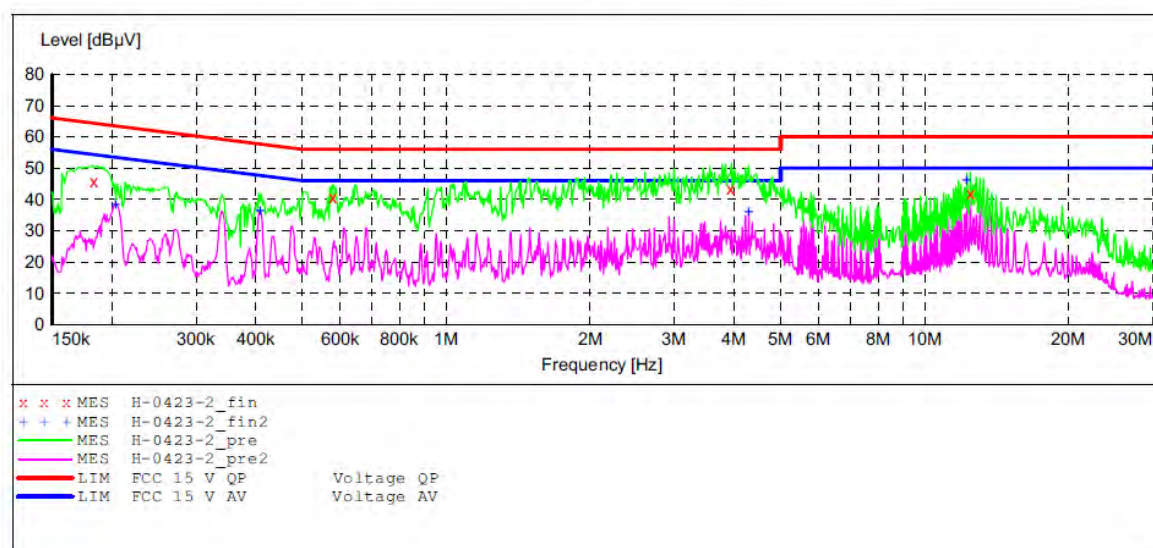**MEASUREMENT RESULT: "H-0423-2_fin"**

04/23/2012 8:48AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.183870	45.90	11.2	64	18.4	QP	N	GND
0.578211	40.50	12.0	56	15.5	QP	N	GND
3.944592	43.60	11.5	56	12.4	QP	N	GND
12.454071	42.00	11.2	60	18.0	QP	N	GND

MEASUREMENT RESULT: "H-0423-2_fin2"

04/23/2012 8:48AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.203980	38.20	11.3	53	15.2	AV	N	GND
0.408557	36.30	11.8	48	11.4	AV	N	GND
4.289533	36.10	11.5	46	9.9	AV	N	GND
12.256783	46.10	11.2	50	3.9	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Mini Speaker M/N:ES-52040BT
 Manufacturer: AOB
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: Kai
 Test Specification: L 120V/60Hz
 Comment: Mains port
 Start of Test: Report NO.:ATE20120730

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

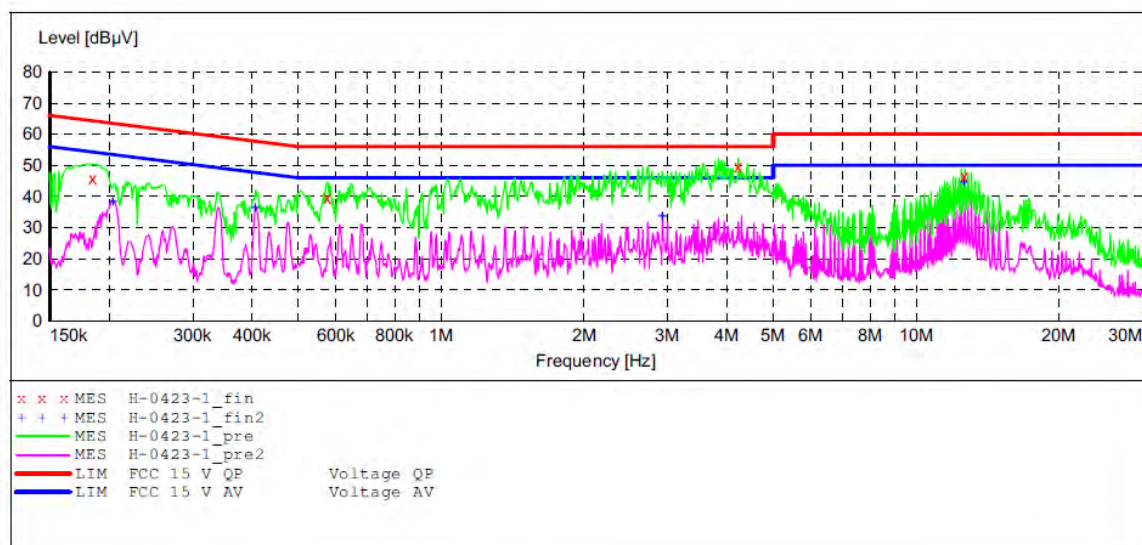**MEASUREMENT RESULT: "H-0423-1_fin"**

04/23/2012 8:40AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.185344	45.80	11.2	64	18.4	QP	L1	GND
0.575907	39.50	12.0	56	16.5	QP	L1	GND
4.221581	49.70	11.5	56	6.3	QP	L1	GND
12.654535	46.70	11.2	60	13.3	QP	L1	GND

MEASUREMENT RESULT: "H-0423-1_fin2"

04/23/2012 8:40AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.203980	38.40	11.3	53	15.0	AV	L1	GND
0.406930	36.30	11.8	48	11.4	AV	L1	GND
2.923975	33.50	11.6	46	12.5	AV	L1	GND
12.654535	44.60	11.2	50	5.4	AV	L1	GND


14.ANTENNA REQUIREMENT

14.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

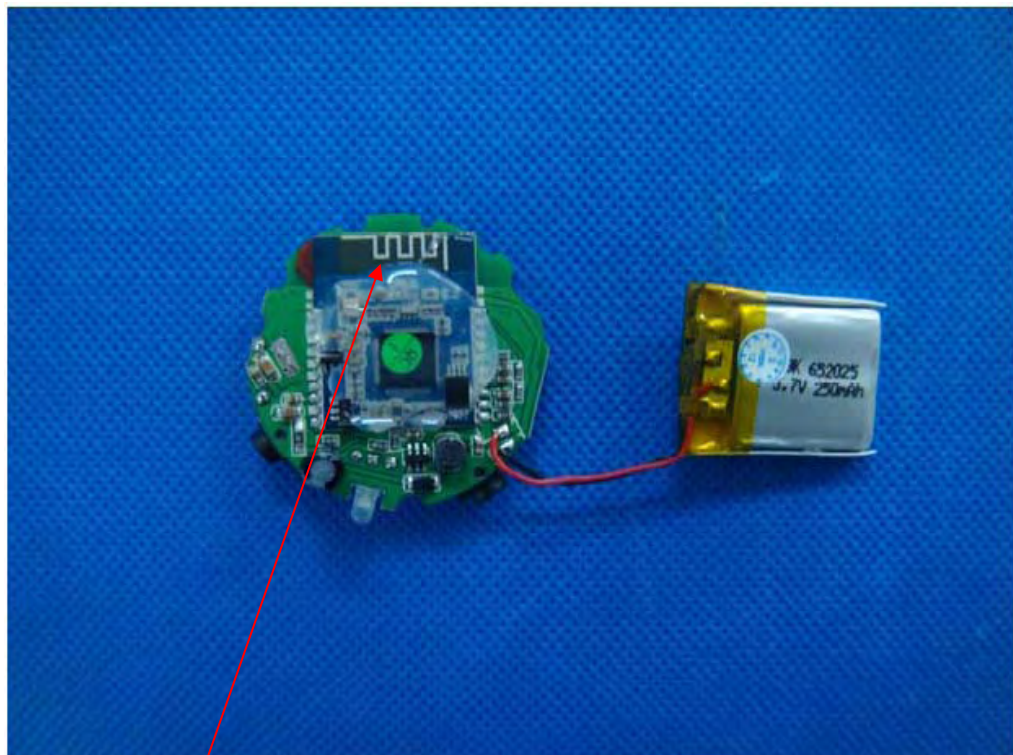

Antenna