

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	7-inch Rugged Tablet		
Brand Name:	Pioneerpos		
Marketing Name:	DASH 7" Robust Tablet PC		
Model No.:	DASH7E1		
Model Difference:	N/A		
FCC ID:	CPOD7E1-LTE		
Report No.:	ER/2015/40089		
Issue Date:	Jul. 09, 2015		
FCC Rule Part:	§15.225		
Prepared for:	Pioneer POS Solution, Inc. 238 Benton Ct., City of Industry, CA 91789		
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803		
BIC-MRA Bacing Laboratory 0513	Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



VERIFICATION OF COMPLIANCE

Applicant:	Pioneer POS Solution, Inc.		
	238 Benton Ct., City of Industry, CA 91789		
Product Name:	7-inch Rugged Tablet		
Brand Name:	Pioneerpos		
Marketing Name:	DASH 7" Robust Tablet PC		
Model No.:	DASH7E1		
Model Difference:	N/A		
FCC ID:	CPOD7E1-LTE		
File Number:	ER/2015/40089		
Date of test:	Apr. 02, 2015 ~ Jul. 03, 2015		
Date of EUT Received:	Apr. 02, 2015		

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits. The test results of this report relate only to the tested sample identified in this report.

Test By:	Marcus Tseng	Date:	Jul. 09, 2015
Prepared By:	Marcus Tseng / Engineer Tiffany Kap	Date:	Jul. 09, 2015
	Tiffany Kao / Clerk	_	
Approved By	Sim Chang	Date:	Jul. 09, 2015

Jim Chang / Asst. Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

Report Number	Revision	Description	Issue Date
ER/2015/40089 Rev.00		Initial creation of document	Jul. 09, 2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



Table of Contents

1		GENERAL INFORMATION	6
	1.1	PRODUCT DESCRIPTION	6
	1.2	PRODUCT FEATURE OF EQUIPMENT UNDER TEST	7
	1.3	TEST METHODOLOGY OF APPLIED STANDARDS	8
	1.4	TEST FACILITY	8
	1.5	SPECIAL ACCESSORIES	8
	1.6	EQUIPMENT MODIFICATIONS	8
2		SYSTEM TEST CONFIGURATION	9
	2.1	EUT CONFIGURATION	9
	2.2	EUT Exercise	9
-	2.3	TEST PROCEDURE	9
	2.4	MEASUREMENT RESULTS EXPLANATION EXAMPLE	9
-	2.5	CONFIGURATION OF TESTED SYSTEM	
3		SUMMARY OF TEST RESULTS	11
4		DESCRIPTION OF TEST MODES	12
4	4.1	THE WORST TEST MODES AND CHANNEL DETAILS	12
5		MEASUREMENT UNCERTAINTY	13
6		CONDUCTED EMISSION TEST	14
(5.1	STANDARD APPLICABLE:	
(5.2	Measurement Equipment Used:	14
(5.3	EUT SETUP:	14
(5.4	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
(5.5	Measurement Procedure:	15
(5.6	MEASUREMENT RESULT:	
7		RADIATED TEST ITEMS	18
,	7.1	Measurement Procedure	
,	7.2	TEST SET-UP	
,	7.3	Measurement Equipment Used	
,	7.4	FIELD STRENGTH CALCULATION	
,	7.5	FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT	
,	7.6	RADIATED EMISSION MEASUREMENT	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



8	FR	EQUENCY STABILITY	34
8	.1	STANDARD APPLICABLE	.34
8	.2	MEASUREMENT PROCEDURE	.34
8	.3	TEST SET-UP	.34
8	.4	MEASUREMENT EQUIPMENT USED	.35
8	.5	MEASUREMENT RESULTS	.35
9	20	DB OCCUPIED BANDWIDTH MEASUREMENT	37
9	.1	STANDARD APPLICABLE:	.37
9	.2	LIMIT:	.37
9	.3	TEST SET-UP	.37
9	.4	MEASUREMENT PROCEDURE	.37
9	.5	MEASUREMENT EQUIPMENT USED	.37
9	.6	20dB Bandwidth Measurement Result	.38
10	AN	TENNA REQUIREMENT	39
1	0.1.	STANDARD APPLICABLE	
1	0.2.	ANTENNA CONNECTED CONSTRUCTION	.39
PH	ото	GRAPHS OF SET UP	40
PH	ото	GRAPHS OF EUT	43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



GENERAL INFORMATION 1

1.1 **Product Description**

General:

Product Name:	7-inch Rugged Tablet			
Brand Name:	Pioneerpo	Pioneerpos		
Marketing Name:	DASH 7"	Robust Tablet PC		
Model No.:	DASH7E1			
Model Difference:	N/A			
Product SW/HW version:	20150128	20150128 / A0.3_0_0		
Radio SW/HW version:	N/A			
Test SW Version:	N/A			
RF power setting in TEST SW:	N/A			
	7.4Vdc from Rechargeable Li-ion Battery or 12V from AC/DC Adapter			
Power Supply:	Battery: Model No.: J1067, Supplier: JHT			
	Adapter: Model No.: LTE-24E-S2-2, Supplier: Li Tone Electronics Co., Ltd			

NFC:

Operating Frequency:	13.56MHz	
Transmit Power:	< 123.90dBuV/m at 3m.	
Number of Channels:	1	
Antenna Type:	Loop Antenna	
Modulation Type:	ASK, BPSK	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



1.2 **Product Feature of Equipment Under Test**

The equipment under Test (Hereafter Called: EUT) is 7" Rugged Tablet supporting, GPRS / WCDMA / CDMA / LTE,

Wi-Fi 802.11abgn, Bluetooth with GPS and NFC features, and below is details of information.

Product Feature			
Product Name:	7-inch Rugged Tablet		
Brand Name:	Pioneerpos		
Marketing Name:	DASH 7" Robust Tablet PC		
Model No.:	DASH7E1		
Model Difference:	N/A		
FCC ID	CPOD7E1-LTE		
GPRS Operating Band(s)	GPRS 850/1900MHz		
GPRS / EGPRS Multi Slot Class	GPRS Class 10 / Class 12		
CDMA / EVDO	BC0 / BC1 / BC10		
WCDMA Operating Band(s)	FDD Band II / IV / V		
WCDMA Rel. Version	Rel.8		
LTE Operating Band(s)	FCC Band 2 / 4 / 5 / 13 / 17 / 25		
LTE Rel. Version	Rel.9		
Wi-Fi Specification	802.11a/b/g/n		
Bluetooth Version	V4.0 dual mode +EDR		
NFC Specification	NFC		

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.3 **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.225

ANSI C63.10:2009

All test items have been performed and record as per the above standards.

The composite system (digital device) is compliance with FCC Subpart B is authorized under the certification procedure.

Test Facility 1.4

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan. (TAF code 0513)

FCC Registration Numbers are: 990257

Canada Registration Number: 4620A-5.

1.5 **Special Accessories**

There is no special accessory used while test was conducted.

1.6 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SYSTEM TEST CONFIGURATION 2

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

EUT Exercise 2.2

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Measurement Results Explanation Example 2.4

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Configuration of Tested System 2.5

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration




Fig. 2-2 AC Power Line Conducted Emission




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated in the instant of the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§ 15.207	AC Power Line Conducted	
915.207	Emission	Compliant
§15.225 (a)-(d)	Radiated Emission	Compliant
015 000	Radiated Emission Limits,	Compliant
§15.209	general requirement	Compliant
§15.225 (e)	Frequency Stability	Compliant
§ 2.1049		
§15.215 (c)	20 dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



DESCRIPTION OF TEST MODES 4

The Worst Test Modes and Channel Details 4.1

- 1. The EUT stay in continuous transmitting mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST						
MODE	IODEAVAILABLETESTEDCHANNELCHANNEL					
NFC	1	1	ASK			
	FREQUENCY STABILITY					
MODE	MODE AVAILABLE TESTED CHANNEL CHANNEL					
NFC	1	1	ASK			
	20dB BANDWIDTH					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION			
NFC	1	1	ASK			

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for NFC Transmitter for channel the worst case H position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 51.33 Hz
20 dB OCCUPIED BANDWIDTH	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC=+/- 0.13%, AC=+/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

binds of the mark of the stated in the instant of the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable:

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Enorman		nits
Frequency range	UD((uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100760	05/04/2014	05/03/2015			
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/15/2015	05/14/2016			
LISN	FCC	FCC-LISN-50/250- 25-2-01	04034	03/13/2015	03/12/2016			
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2014	11/25/2015			


6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留如天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In advisued and offenders may be prosecuted to the fullest extent of the law.



Test SET-UP (Block Diagram of Configuration) 6.4

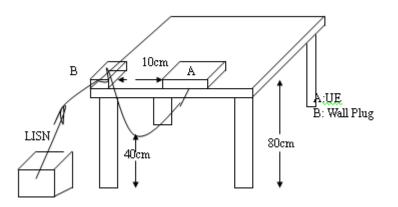

6.5 **Measurement Procedure:**

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Measurement Result: 6.6

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



AC POWER LINE CONDUCTED EMISSION TEST DATA

ration Mode:	-		·	-	<i>c</i> o <i>i</i>	Test Da	-	pr. 22, 20
perature:	24	H	umidity:	66	5%	Test By	: M	larcus
						Phase:	L	1
07 0 d			Di			Y.		24 °C
Site Conduc	tionRoom Class B Conducti	an(OB)	Phase		L1 20V/60Hz		mperature: 2 midity: 66%	24 C
Mode: Opera		on(QP)	Power		2017/00/12		many. 00%	
	ter:LTE24E-S2-2							
Hote. Adap	101.ET 2242-02-2							
			ConductedE			_		
File:40		Data:#2		Date	2015/4/22	Time : 14	F 07:25:42	
80.0 dB	u∨			_				1
				_				1
					- 1	FCC Class B Con	Juction(QP)	
100				_				
2				_	F	CC Class B Cond	uction(AVG)	-
1					_			
40*	* ·	2				c		-
V	In. M	5				and the Martine		
1	11. M	MM M	W. MURMA	Marian	manapal	where we are	harl	1
	VM	W MY	AN WALL	161				
	W	W 9	Mark 1				'n	
							2	
				_	5		30.0	
0.0		0.5	()()())					
0.0	Bearing	0.5	(MHz)		5		30.0	
0.150	Reading req. Level	Correct Measure		Over	5		30.0	
0.150 No. Mk. F		Correct Measure	sure- ent Limit	Over d8	Detector	Comment	30.0	
0.150 No. Mk. F	req. Level	Correct Mea Factor me	sure- ent Limit uV dBuV			Comment	30.0	
0.150 No. Mk. F	Freq. Level MHz dBuV	Correct Mean Factor mean dB dB	sure- ent Limit uV dBuV 89 66.00	dB	Detector	Comment	30.0	
0.150 No. Mk. F 1 0 2 0	Freq. Level MHz dBuV 0.1500 40.84	Correct Mean Factor me dB dB 0.05 40.	sure- ent Limit uV dBuV 89 66.00 75 64.58	dB -25.11	Detector peak	Comment	30.0	
0.150 No. Mk. F 1 0 2 0 3 0	Freq. Level MHz dBuV 0.1500 40.84 0.1780 46.69	Correct Mean Factor me dB dB 0.05 40. 0.06 46.	sure- ent Limit uv dBuv 89 66.00 75 64.58 57 63.53	dB -25.11 -17.83	Detector peak peak	Comment	30.0	
0.150 No. Mk. F 1 0 2 0 3 0 4 * 0	Freq. Level MHz dBuV 0.1500 40.84 0.1780 46.69 0.2020 40.51	Correct Factor Mean me dB dB 0.05 40. 0.06 46. 0.06 40.	sure- ent Limit uV dBUV 89 66.00 75 64.58 57 63.53 87 56.00	d8 -25.11 -17.83 -22.96	Detector peak peak peak	Comment		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



24 10

66%

Temperature:

Humidity:


Operation Mode:	Operation mode			Test Date:	Apr. 22, 2015
Temperature:	24	Humidity:	66 %	Test By:	Marcus
			•	Phase:	Ν

Phase:

N

Power: AC 120V/60Hz

Site ConductionRoom Limit: FCC Class B Conduction(QP) Mode: Operation Note: Adapter:LTE24E-S2-2

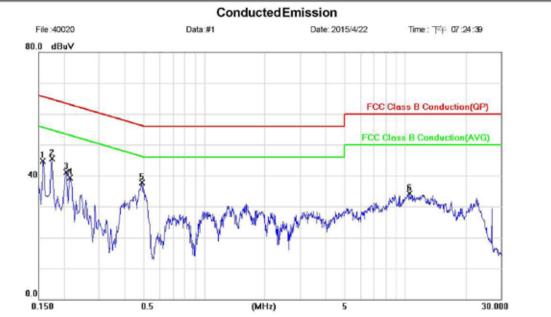

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.1580	44.67	0.05	44.72	65.57	-20.85	peak		
2	0.1740	45.55	0.05	45.60	64.77	-19.17	peak		
3	0.2060	41.01	0.06	41.07	63.37	-22.30	peak		
4	0.2140	39.17	0.06	39.23	63.05	-23.82	peak		
5 *	0.4900	37.61	0.07	37.68	56.17	-18.49	peak		
6	10.5420	33.70	0.35	34.05	60.00	-25.95	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




RADIATED TEST ITEMS 7

7.1 **Measurement Procedure**


- Configure the EUT according to ANSI C63.4. 1.
- 2. The EUT was placed on a turn table which is 0.8m above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all default test channel measured were complete 7.

7.2 **Test SET-UP**

(B) Radiated Emission Test Set-Up, Frequency Below 30MHz

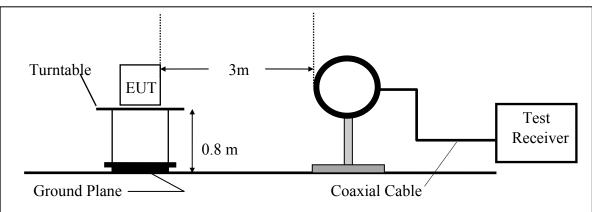

Radiated Emission Test Set-Up, Frequency Below 1000MHz (C)

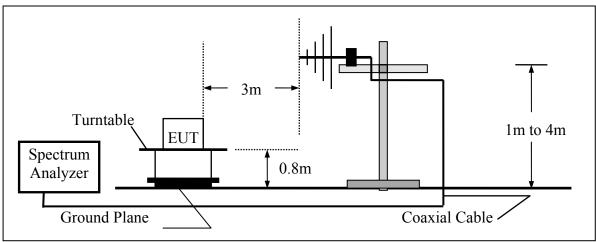

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

966 Chamber								
EQUIPMENT	EQUIPMENT MFR		SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100760	05/04/2014	05/03/2015			
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	12/22/2014	12/21/2015			
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/23/2014	12/22/2015			
Loop Antenna	ETS.LINDGREN	6502	00148045	07/03/2014	07/02/2015			
Pre-Amplifier	Agilent	8447D	2944A07676	01/02/2015	01/01/2016			
Turn Table	HD	DT420	N/A	N.C.R	N.C.R			
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R			
Controller	HD	HD100	N/A	N.C.R	N.C.R			
Low Loss Cable	Huber Suhner	966_Rx	9	01/02/2015	01/01/2016			
3m Site NSA	SGS	966 chamber	N/A	07/15/2014	07/14/2015			

7.3 **Measurement Equipment Used**

7.4 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5 Field Strength of Fundamental Emissions and Mask Measurement

7.5.1 **Standard Applicable**

Limit:

Rules and specifiactions	CFR 47 Part 15 section 15.225(a)-(d)				
Frequency of Emission (MHz)	Field Strength (μV/m)at 30m	Field Strength (dBµV/m)at 30m	Field Strength (dBµV/m)at 3m		
1.705~13.110	30	29.5	69.5		
13.110~13.410	106	40.5	80.5		
13.410~13.553	334	50.5	90.47		
13.553~13.567	15848	84	123.9		
13.567~13.710	334	50.5	90.47		
13.710~14.010	106	40.5	80.5		
14.010~30.00	30	29.5	69.5		

Note:


- 1. Emission level in dBuV/m=20 log (μ V/m)
- 2. Distance extrapolation factor = $40 \log$ (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Field Strength of Fundamental Emission Measurement Result 7.5.2

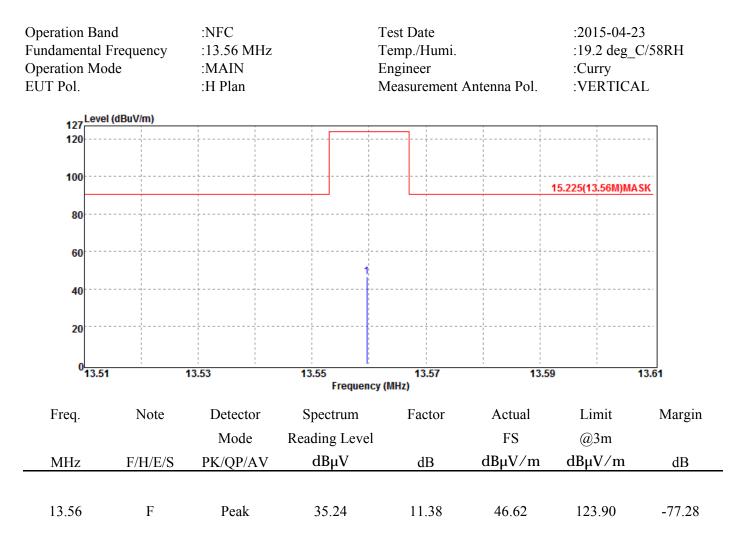

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: ER/2015/40089 Issue Date: Jul. 09, 2015 Page: 22 of 39

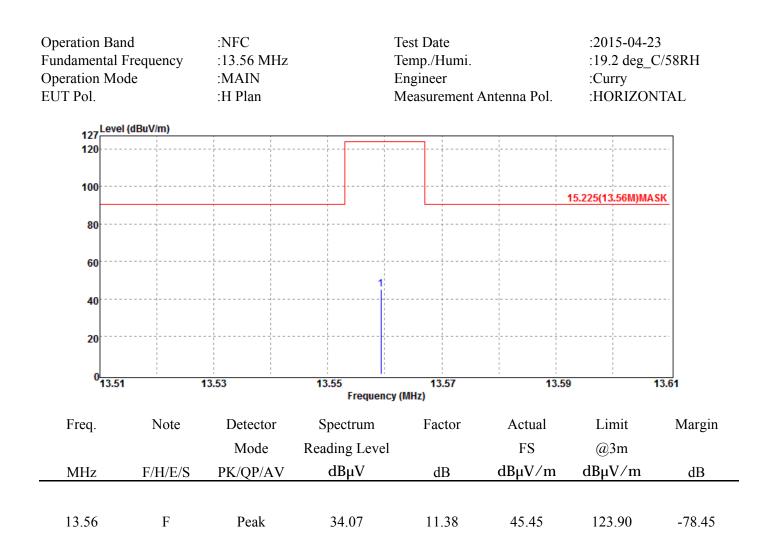

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




7.5.3 Mask Measurement Result

Operation Band	:NFC
Fundamental Frequency	:13.56 MHz
Operation Mode	:MASK
EUT Pol.	:H Plan

Test Date Temp./Humi. Engineer Measurement Antenna Pol.


:2015-04-23 :19.2 deg C/58RH :Curry :VERTICAL

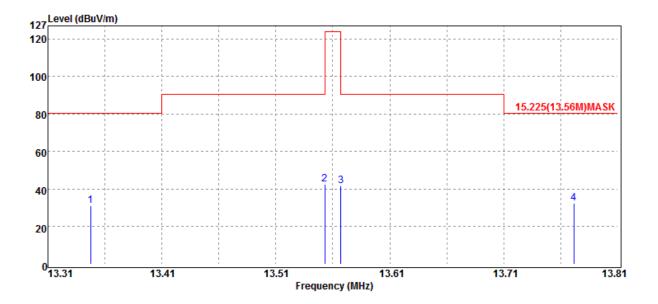

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.35	S	Peak	20.00	11.38	31.38	80.50	-49.12
13.55	S	Peak	31.33	11.38	42.71	90.47	-47.76
13.57	S	Peak	30.45	11.38	41.83	90.47	-48.64
13.77	S	Peak	20.98	11.39	32.37	80.50	-48.13



Report No: ER/2015/40089 Issue Date: Jul. 09, 2015 Page: 24 of 39

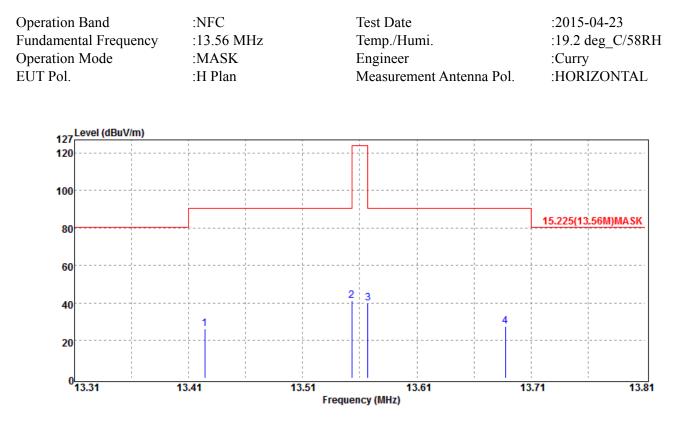

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.42	S	Peak	15.07	11.38	26.45	90.47	-64.02
13.55	S	Peak	29.79	11.38	41.17	90.47	-49.30
13.57	S	Peak	28.58	11.38	39.96	90.47	-50.51
13.69	S	Peak	16.24	11.39	27.63	90.47	-62.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.6 Radiated Emission Measurement

7.6.1 Standard Applicable

The field strength of any emission which appear outside of 13.553~13.567MHz Band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (µV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. Emission level in dB μ V/m=20 log (μ V/m)

- 2. Distance extrapolation factor = $40 \log$ (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.




7.6.2 Radiated Emission Measurement Result (Transmitter)

Operation Band Fundamental F Operation Mod EUT Pol.	requency	:NFC :13.56 MHz :TX :H Plan	,]	Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2015-04-23 :19.2 deg_C/5 :Curry :VERTICAL	8RH
127 Level (dBuV/m)						_
120							
100							
80	p_	L					
60							
						15.225(13.56M)MA	SK .
40 1-		2	3 4	5			
20				5	6	7	
0 <mark></mark> 10		14.	18. Frequer	22. ncy (MHz)	26	i.	30
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Leve	el	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10.74	S	Peak	25.21	11.31	36.52	69.54	-33.02
14.40	S	Peak	24.22	11.40	35.62	69.54	-33.92
17.90	S	Peak	17.41	11.46	28.87	69.54	-40.67
19.70	S	Peak	15.82	11.50	27.32	69.54	-42.22
22.26	S	Peak	13.16	10.83	23.99	69.54	-45.55
23.78	S	Peak	12.12	10.42	22.54	69.54	-47.00
27.12	Н	Peak	10.16	9.62	19.78	69.54	-49.76



Report No: ER/2015/40089 Issue Date: Jul. 09, 2015 Page: 27 of 39

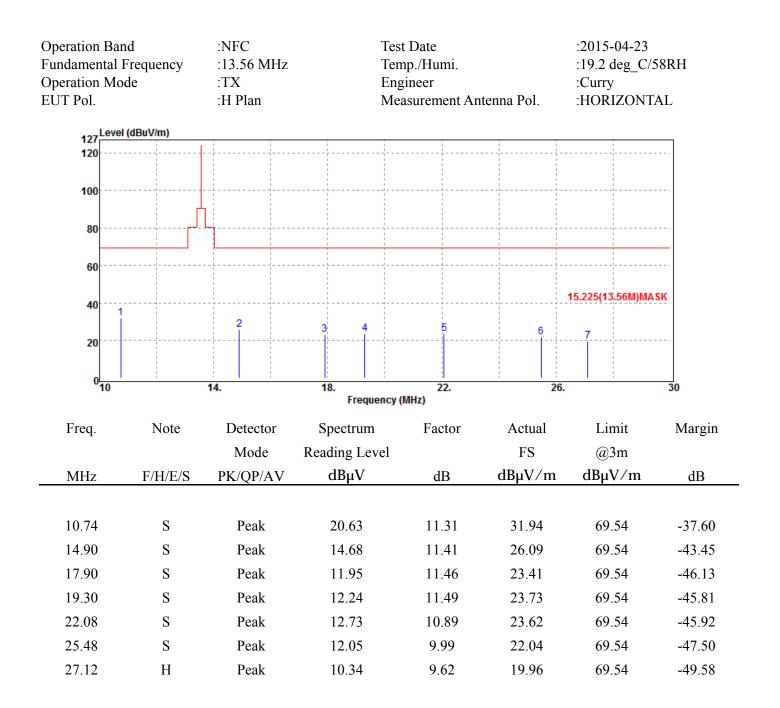

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No: ER/2015/40089 Issue Date: Jul. 09, 2015 Page: 28 of 39

Operation Bar Fundamental I Operation Mo EUT Pol.	Frequency	:NFC :13.56 MHz :TX :H Plan		Test Date Temp./Humi. Engineer Measurement Ar	ntenna Pol.	:2015-04-23 :19.2 deg_C/5 :Curry :VERTICAL	8RH
97 Level	(dBuV/m)						
90							
80							
70						·	
60						45 225/42 560004	
50						15.225(13.56M)MA	
40							
30		1	34	-56			
20							
10							
0 <mark></mark>		224	418.		000		1000
30		224.		612. ency (MHz)	806		1000
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Lev	vel	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
288.02	S	Peak	33.54	-8.24	25.30	46.00	-20.70
323.91	S	Peak	35.54	-7.67	27.87	46.00	-18.13
359.80	S	Peak	35.65	-7.03	28.62	46.00	-17.38
414.12	S	Peak	32.80	-5.75	27.05	46.00	-18.95
515.00	S	Peak	32.06	-4.51	27.55	46.00	-18.45
594.54	S	Peak	28.75	-1.63	27.12	46.00	-18.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Report No: ER/2015/40089 Issue Date: Jul. 09, 2015 Page: 29 of 39

Operation Bar Fundamental I Operation Mo EUT Pol.	Frequency	:NFC :13.56 MHz :TX :H Plan		Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2015-04-23 :19.2 deg_C/58RH :Curry :HORIZONTAL		
97	(dBuV/m)							
90						 		
80								
70						 		
60	, , , ,					15.225(13.56M)MA		
50								
40						 		
30	2		β		·	 		
20			 			 		
10			 			 		
0 30		224.	418.	612.	80	6.	1000	
			Freque	ncy (MHz)				
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Lev	el	FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
144.46	S	Peak	35.58	-9.69	25.89	43.50	-17.61	
180.35	S	Peak	40.22	-10.59	29.63	43.50	-13.87	
252.13	S	Peak	36.79	-9.79	27.00	46.00	-19.00	
288.02	S	Peak	34.28	-8.24	26.04	46.00	-19.96	
323.91	S	Peak	34.59	-7.67	26.92	46.00	-19.08	
359.80	S	Peak	34.82	-7.03	27.79	46.00	-18.21	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




7.6.3 Radiated Emission Measurement Result (Receiver)

Operation Ban Fundamental F Operation Mod EUT Pol.	Frequency	:NFC :13.56 MHz :RX :H Plan		Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:19.2 :Curry	-04-23 deg_C/58I ⁄ TICAL	RΗ	
127	(dBuV/m)	- · · · ·							1
120									
100									
80					- - - - - - -				
60									
40 1		2			 		15.225(13	3.56M)MA SK	
20			3 4	5	6				
0 <mark></mark> 10		14.	18. Freque	ency (MHz)	22.	26	•	:	50
Freq.	Note	Detector	Spectrum	Fa	ctor	Actual	Li	mit	Margin
		Mode	Reading Lev	el		FS	(a)	3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	Ċ	В	dBµV/m	dBµ	V/m	dB
	~						60		• • • •
10.74	S	Peak	23.75		.31	35.06		.54	-34.48
14.36	S	Peak	25.11		.40	36.51		.54	-33.03
17.90	S	Peak	16.06		.46	27.52		.54	-42.02
19.32	S	Peak	15.02		.50	26.52		.54	-43.02
21.10	S	Peak	13.15		.17	24.32		.54	-45.22
23.50	S	Peak	11.68		.50	22.18		.54	-47.36
27.12	Н	Peak	10.62	9.	62	20.24	69	.54	-49.30



Report No: ER/2015/40089 Issue Date: Jul. 09, 2015 Page: 31 of 39

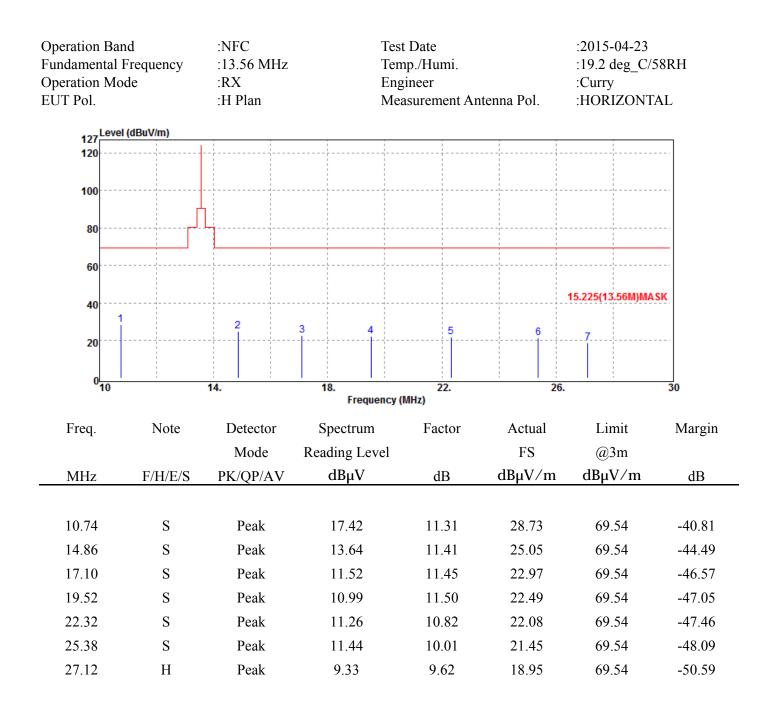

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No: ER/2015/40089 Issue Date: Jul. 09, 2015 Page: 32 of 39

Operation Bar Fundamental I Operation Mo EUT Pol.	Frequency	:NFC :13.56 MHz :RX :H Plan		Test Date Temp./Humi. Engineer Measurement Ar	ntenna Pol.	:2015-04-23 :19.2 deg_C/5 :Curry :VERTICAL	8RH
97	(dBuV/m)						
90						 	
80							·
70							·
60						15.225(13.56M)MAS	
50						13.223(13.3000)004	
40							
30		2	3 4	5 6			·
20						 	
10						 	
0 30		224.	418.	612.	806		1000
50		224.		ency (MHz)	000		1000
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Lev	rel	FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
167.74	S	Peak	26.92	-9.09	17.83	43.50	-25.67
323.91	S	Peak	30.34	-7.67	22.67	46.00	-23.33
378.23	S	Peak	30.60	-6.49	24.11	46.00	-21.89
414.12	S	Peak	31.92	-5.75	26.17	46.00	-19.83
515.00	S	Peak	30.22	-4.51	25.71	46.00	-20.29
605.21	S	Peak	28.43	-2.58	25.85	46.00	-20.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Report No: ER/2015/40089 Issue Date: Jul. 09, 2015 Page: 33 of 39

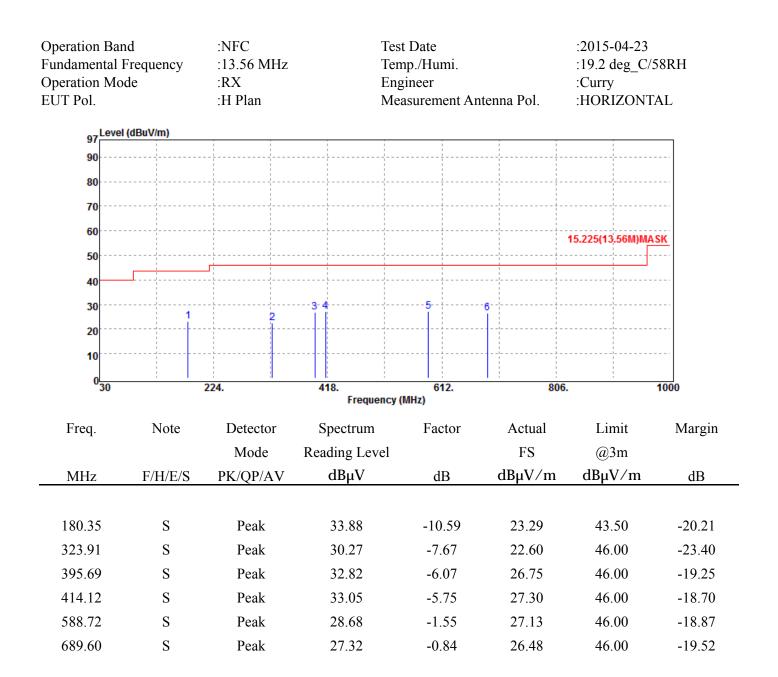

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



FREQUENCY STABILITY 8

8.1 **Standard Applicable**


The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.2 **Measurement Procedure**

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- Set EUT as normal operation. 2.
- 3. Turn the EUT on and couple its output to spectrum.
- Turn the EUT off and set the chamber to the highest temperature specified. 4.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn 5. the EUT and measure the operating frequency.
- Repeat step with the temperature chamber set to the lowest temperature. 6.
- 7. Set spectrum Center Frequency = fundamental frequency, RBW, VBW= 10 kHz, Span = 100 kHz, Detector = Max hold, Mark peak.

8.3 **Test SET-UP**

Temperature Chamber

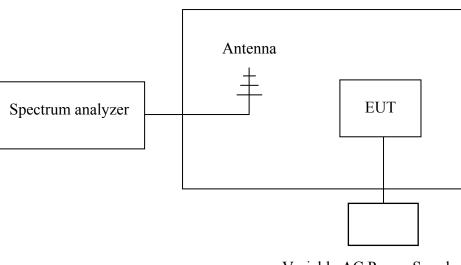

Variable AC Power Supply

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8.4 **Measurement Equipment Used**

Conducted Emission Test Site								
EQUIPMENT	PMENT MODEL SERIAL		LAST	CAL DUE				
TYPE	MFR	NUMBER	NUMBER	CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2015	01/28/2016			
Temperature Chamber	TERCHY	MHG-120LF	911009	05/06/2015	05/05/2016			
AC Power Supply	APW-105N	887592	All Power	N/A	N/A			

Measurement Results 8.5

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the mark of the stated in the instant of the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



A. Temperature Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (kHz)	
Vdc	Temperature ()	(MHz)	Della (IIZ)	Linit (KIIZ)	
7.4	-20	13.559858	342.00	+/- 1.356	
7.4	-10	13.559944	256.00	+/- 1.356	
7.4	0	13.560045	155.00	+/- 1.356	
7.4	10	13.560124	76.00	+/- 1.356	
7.4	20	13.560200	0.00	+/- 1.356	
7.4	30	13.560354	-154.00	+/- 1.356	
7.4	40	13.560478	-278.00	+/- 1.356	
7.4	50	13.560673	-473.00	+/- 1.356	

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (kHz)	
Vdc	Temperature ()	(MHz)	Delta (IIZ)		
8.51	25	13.560200	0.000	+/- 1.356	
7.4	25	13.560200	0.000	+/- 1.356	
6.29	25	13.560300	-100.000	+/- 1.356	



20 dB OCCUPIED BANDWIDTH MEASUREMENT 9


9.1 **Standard Applicable:**

The 20 dB bandwidth shall be specified in operating frequency band.

9.2 Limit:

None

Test Set-up 9.3



Measurement Procedure 9.4

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.

Measurement Equipment Used 9.5


Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.	CAL DUE.		
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2015	01/28/2016		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



20dB Bandwidth Measurement Result 9.6

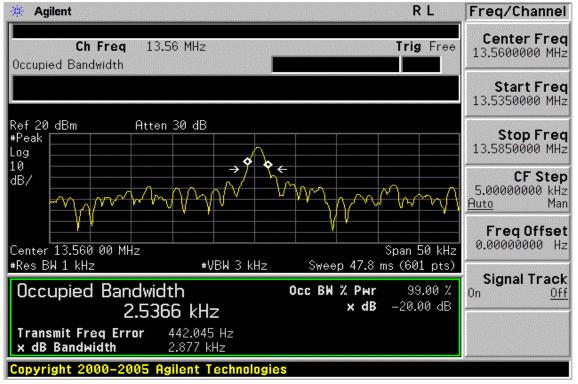

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10 ANTENNA REQUIREMENT

10.1. Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

10.2. Antenna Connected Construction

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.