

EMC EMISSIONS - TEST REPORT

Test Report No.	BC107362-1	Issue Date	November 8, 2001
Model / Serial No.	HG200B / 485485		
Product Type	HG9010#2		
Client	BI Incorporated		
Manufacturer	BI Incorporated		
License holder	BI Incorporated		
Address	6400 Lookout Rd.		
	Boulder, CO 80301		
Test Criteria Applied	FCC Part 15	47 CFR 15: Radio Frequency Devices	
	Class B & 15.231e		
Test Result	PASS		
Test Project Number	BC107362		
References			
Total Pages Including Appendices:	20		



Reviewed By : Todd Seeley



Reviewed By : Robert Cresswell

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval of TÜV Product Service. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

DIRECTORY

Documentation	Page(s)
Test report	<u>1 - 3</u>
Directory	<u>2</u>
Test Regulations	<u>3</u>
General Remarks	<u>3</u>
	<u> </u>
Appendix A	
Test Data Sheets and Test Equipment Used	<u>A1 - A9</u>
Appendix B	
Test Plan/Constructional Data Form	<u>B1 - B8</u>

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

EUT Received Date: 06 November 2001Testing Start Date: 06 November 2001Testing End Date: 06 November 2001

The tests were performed according to following regulations :

■ - FCC Part 15:2001

■ Class B

Emission Test Results:

Conducted emissions, Powerline 450 kHz- 30 MHz

Test Result	N/A		
Minimum limit margin	_____ dB	at	_____ MHz
Maximum limit exceeding	_____ dB	at	_____ MHz
Remarks:	<u>Battery Powered</u>		

Radiated emissions (electric field) 30 MHz - 1000 MHz

Test Result	PASS		
Minimum limit margin	_____ 21.3 dB	at	_____ 44.95 MHz
Maximum limit exceeding	_____ dB	at	_____ MHz
Remarks:	_____		

Radiated emissions (electric field) Intentional Radiating

Test Result	PASS		
Minimum limit margin	_____ 0.6 dB	at	_____ 314.2 MHz
Maximum limit exceeding	_____ dB	at	_____ MHz
Remarks:	_____		

GENERAL REMARKS:

This device has a means for automatically limiting operation so that the duration of each transmission shall not be greter than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds. – CFR 47 15.231 (e)

Modifications required to pass:


None

Test Specification Deviations: Additions to or Exclusions from:

None

Appendix A

Test Data Sheets
and
Test Equipment Used

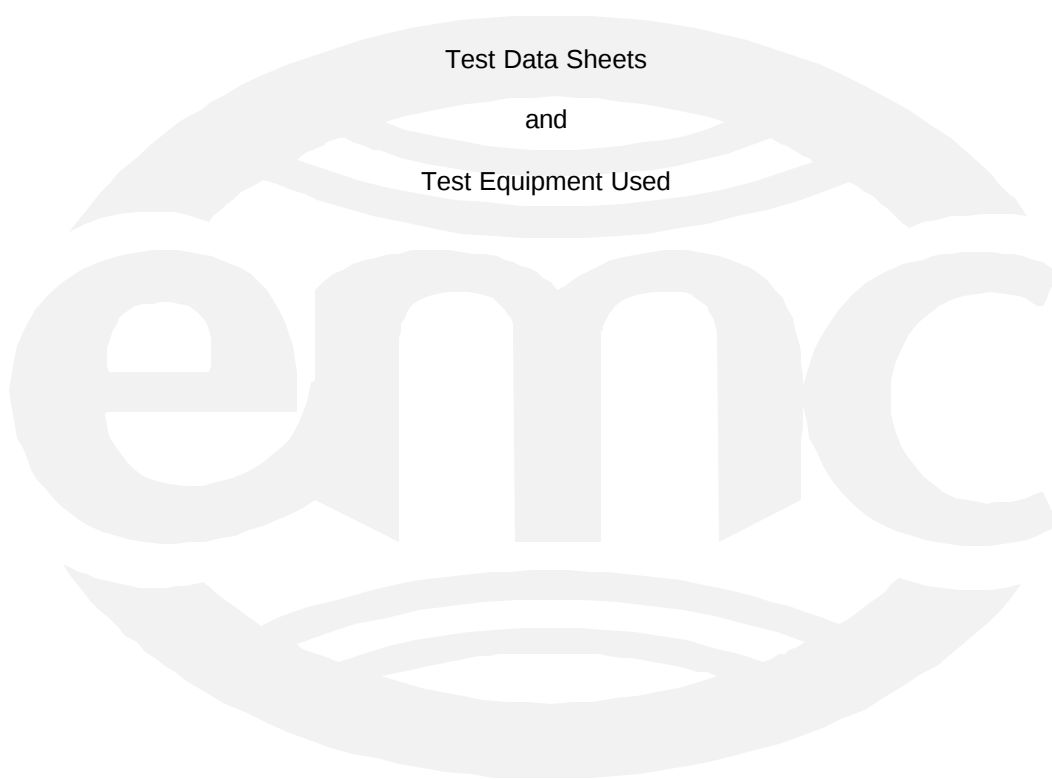

Intentional Radiator Data

Date: 13-Nov-01
EUT: Ankle-Mount Low Power RF Transmitter
Manufacturer: BI Inc.
Representative: Don Melton

Measured @
 314.2 MHz

Miscellaneous Measurements:	<u>FCC Specification kHz</u>	<u>Measurement kHz</u>	<u>Bandwidth Margin kHz</u>
1) 20 dB Bandwidth	785	376	409.0

Tx Mode: Radiated Measurements

Calculated Averaging Factor: -20 dB (20*Log(duty cycle))
Averaging Factor Applied: -20 dB

	Average Specification	Peak Measurement dBuV/m @ MHz	Average Measurement dBuV/m @ MHz	Delta dB
Fundamental Field Strength:	67.6 dBuV/m	87 314.2	67 314.2	-0.6


Harmonics	Average Specification	Peak Measurement dBuV/m @ MHz	Average Measurement dBuV/m @ MHz	Delta dB
2nd harmonic (628.4 MHz)	47.6 dBuV/m	51.9 628.4	31.9 628.4	-15.7
3rd harmonic (942.6 MHz)	47.6 dBuV/m	46.5 942.6	26.5 942.6	-21.1
4th harmonic (1256.8 MHz)	54 dBuV/m	46.6 1256.8	26.6 1256.8	-27.4
5th harmonic (1571 MHz)	54 dBuV/m	40.6 1571.0	20.6 1571.0	-33.4
6th harmonic (1885.2 MHz)	54 dBuV/m	44.1 1885.2	24.1 1885.2	-29.9
7th harmonic (2199.4 MHz)	54 dBuV/m	49.2 2199.5	29.2 2199.5	-24.8
8th harmonic (2513.6 MHz)	54 dBuV/m	53.9 2513.6	33.9 2513.6	-20.1
9th harmonic (2827.8 MHz)	54 dBuV/m	46.4 2827.8	26.4 2827.8	-27.6
10th harmonic (3142 MHz)	54 dBuV/m	46.7 3142.1	26.7 3142.1	-27.3

Minumum Passing Margin: -0.6 dB

Note 1: The harmonics of the fundamental are compared to the limits stated in CISPR Class B, and FCC CFR47 Part 15, Class B for the fact that this limit reflects the lowest limit in the concerned bands.

Note 2: The table above stated the "Worst-case" measurement at each frequency.

Note 3: Transmission = 7.12 msec with an interval of 14.5 to 29 seconds. This is under hardware and microprocessor control

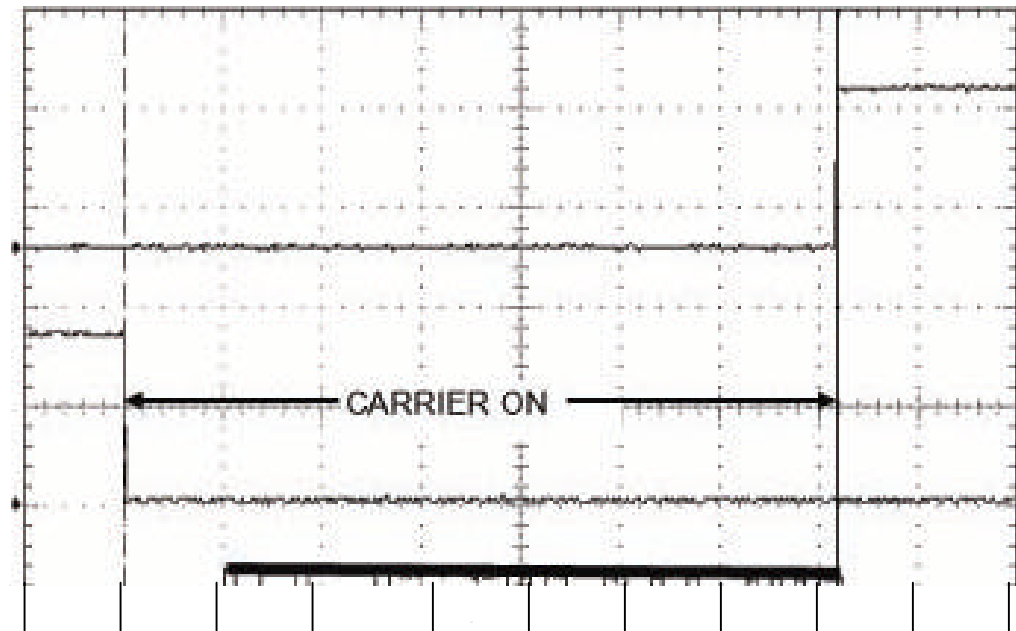

Time base = 1msec/div

Worst case carrier on time is 10 msec, normal carrier on time is 7.18 msec.

$$\begin{aligned}
 \text{Averaging Factor} &= 20 \log \frac{\text{carrier on}}{100 \text{ msec}} \\
 &= 20 \log \frac{10 \text{ msec}}{100 \text{ msec}} \\
 &= 20 \text{ dB}
 \end{aligned}$$

Non-Intentional Radiator Data

Radiated Electromagnetic Emissions



Test Report #:	BC107362 Run 03	Test Area:	Pinewood Site 1 (3m)	
Test Method:	FCC Part 15	Test Date:	06-Nov-2001	
EUT Model #:	HG200B	EUT Power:	3.6 VDC	
EUT Serial #:	485485			Temperature: 23.3 °C
Manufacturer:	BI Incorporated			Relative Humidity: <26 %
EUT Description:	HG9010#2			Air Pressure: 80 kPa
Notes:	R114 = 4.3K, RF turned off			Page: 1 of 3

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dB/m) (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) FCC B (< 1GHz)	DELTA2 (dB) N/A
200 - 1000 MHz, Horizontal						
No emissions found: 0 Deg, horizontal						
No emissions found: 90 Deg, horizontal						
No emissions found: 180 Deg, horizontal						
No emissions found: 270 Deg, horizontal						
200 - 1000 MHz, Vertical						
No emissions found: 0 Deg, vertical						
No emissions found: 90 Deg, vertical						
No emissions found: 180 Deg, vertical						
No emissions found: 270 Deg, vertical						
The following are noise floor readings between 200 and 1000 MHz						
202.04	23.9 Qp	0.8 / 11.7 / 27.4	8.9	V / 1.0 / 180.0	-34.6	N/A
226.22	25.1 Qp	0.8 / 14.2 / 27.3	12.7	V / 1.0 / 180.0	-33.3	N/A
298.52	21.2 Qp	0.9 / 14.4 / 27.0	9.5	V / 1.0 / 180.0	-36.5	N/A
428.42	21.0 Qp	1.2 / 16.7 / 27.8	11.1	V / 1.0 / 180.0	-34.9	N/A
558.02	21.4 Qp	1.4 / 19.4 / 28.1	14.0	V / 1.0 / 180.0	-32.0	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #:	BC107362 Run 03	Test Area:	Pinewood Site 1 (3m)		
Test Method:	FCC Part 15	Test Date:	06-Nov-2001		
EUT Model #:	HG200B	EUT Power:	3.6 VDC		
EUT Serial #:	485485			Temperature:	23.3 °C
Manufacturer:	BI Incorporated			Relative Humidity:	<26 %
EUT Description:	HG9010#2			Air Pressure:	80 kPa
Notes:	R114 = 4.3K, RF turned off			Page:	2 of 3

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dBm) (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) FCC B (< 1GHz)	DELTA2 (dB) N/A
663.62	21.3 Qp	1.5 / 20.9 / 28.0	15.7	V / 1.0 / 180.0	-30.3	N/A
826.52	20.8 Qp	1.6 / 22.5 / 27.8	17.1	V / 1.0 / 180.0	-28.9	N/A
970.52	20.7 Qp	1.9 / 25.8 / 27.3	21.0	V / 1.0 / 180.0	-33.0	N/A
44.95	35.0 Qp	0.3 / 11.3 / 27.9	18.7	V / 1.0 / 0.0	-21.3	N/A
72.05	34.5 Qp	0.4 / 8.7 / 27.8	15.8	V / 1.0 / 0.0	-24.2	N/A
44.95	34.6 Qp	0.3 / 11.3 / 27.9	18.3	V / 1.0 / 90.0	-21.7	N/A
72.05	35.3 Qp	0.4 / 8.7 / 27.8	16.6	V / 1.0 / 90.0	-23.4	N/A
No higher emissions found: 180 Deg, vertical						
44.95	34.9 Qp	0.3 / 11.3 / 27.9	18.5	V / 1.0 / 270.0	-21.5	N/A
No emissions found within 10 dB, nothing maximized						
44.95	34.5 Qp	0.3 / 11.3 / 27.9	18.1	H / 1.0 / 0.0	-21.9	N/A
72.05	32.2 Qp	0.4 / 8.7 / 27.8	13.6	H / 1.0 / 0.0	-26.4	N/A
44.95	34.4 Qp	0.3 / 11.3 / 27.9	18.1	H / 1.0 / 90.0	-21.9	N/A
No higher emissions found: 180 Deg, horizontal						
No higher emissions found: 270 Deg, horizontal						
No emissions within 10 dB, nothing maximized						

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Radiated Electromagnetic Emissions



Test Report #:	BC107362 Run 03	Test Area:	Pinewood Site 1 (3m)		
Test Method:	FCC Part 15	Test Date:	06-Nov-2001		
EUT Model #:	HG200B	EUT Power:	3.6 VDC		
EUT Serial #:	485485			Temperature:	23.3 °C
Manufacturer:	BI Incorporated			Relative Humidity:	<26 %
EUT Description:	HG9010#2			Air Pressure:	80 kPa
Notes:	R114 = 4.3K, RF turned off			Page:	3 of 3

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dB/m) (dB)	FINAL (dBuV/m)	POL / HGT / AZ (m) (DEG)	DELTA1 (dB) FCC B (< 1GHz)	DELTA2 (dB) N/A
---------------	-----------------	--	-------------------	-----------------------------	-------------------------------	--------------------

***** MEASUREMENT SUMMARY *****						
44.95	35.0 Qp	0.3 / 11.3 / 27.9	18.7	V / 1.0 / 0.0	-21.3	N/A
72.05	35.3 Qp	0.4 / 8.7 / 27.8	16.6	V / 1.0 / 90.0	-23.4	N/A
826.52	20.8 Qp	1.6 / 22.5 / 27.8	17.1	V / 1.0 / 180.0	-28.9	N/A
663.62	21.3 Qp	1.5 / 20.9 / 28.0	15.7	V / 1.0 / 180.0	-30.3	N/A
558.02	21.4 Qp	1.4 / 19.4 / 28.1	14.0	V / 1.0 / 180.0	-32.0	N/A
970.52	20.7 Qp	1.9 / 25.8 / 27.3	21.0	V / 1.0 / 180.0	-33.0	N/A
226.22	25.1 Qp	0.8 / 14.2 / 27.3	12.7	V / 1.0 / 180.0	-33.3	N/A
202.04	23.9 Qp	0.8 / 11.7 / 27.4	8.9	V / 1.0 / 180.0	-34.6	N/A
428.42	21.0 Qp	1.2 / 16.7 / 27.8	11.1	V / 1.0 / 180.0	-34.9	N/A
298.52	21.2 Qp	0.9 / 14.4 / 27.0	9.5	V / 1.0 / 180.0	-36.5	N/A

Tested by: Dan Dillon

Printed

Signature

Reviewed by: Todd Seeley

Printed

Signature

Equipment Report

06-Nov-2001

Project Number: BC107362

Project Date: 06-Nov-2001

Company Name: BI Inc.

Equip ID	Manufacturer	Model Number	Serial Number	Description	Date	Calibration Interval	Due	Cal Code
-------------	--------------	-----------------	------------------	-------------	------	-------------------------	-----	-------------

Test Performed

8264	EMCO	3115	9205-3886	Horn Antenna	23-Jun-2001	12	23-Jun-2002	G
------	------	------	-----------	--------------	-------------	----	-------------	---

Test Performed R Radiated Emissions

7514	A.H.SYSTEMS	SAS-200/512	104	Log Periodic Antenna (200-1500 MHz)	26-Sep-2001	12	26-Sep-2002	G
7617	MINI-CIRCUITS LAB	ZHL-42	N052792-2	Amplifier	23-Apr-2001	12	23-Apr-2002	B
8005	HEWLETT PACKARD	8447F	3113A04923	Option H64 Dual Preamp	04-Apr-2001	12	04-Apr-2002	B
8179	EMCO	3108	2149	Biconical Dipole Antenna (30-300 MHz)	18-Jun-2001	12	18-Jun-2002	G
8213	HEWLETT PACKARD	8566B	2410A00154	Spectrum Analyzer (dc-22 GHz)	04-May-2001	12	04-May-2002	G
8214	HEWLETT PACKARD	85662A	2403A08749	Display Section	04-May-2001	12	04-May-2002	G
8215	HEWLETT PACKARD	85650A	2043A00256	Quasi Peak Adapter (set 1)	24-Aug-2001	12	24-Aug-2002	G

Cal Code Legend: G=Out Source, Y=No Cal required, R=Out of Service, B=In-House Verification Required

1 of 1

Appendix B

Test Plan
and
Constructional Data Form



EMC Test Plan and Constructional Data Form

PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.

Applicant -- NOTE: This information will be input into your test report as shown below.
Press the F1 key at any time to get HELP for the current field selected.

Company: BI Incorporated

Address: 6400 Lookout Road
Boulder CO 80301

Contact: Don Melton Position: Principal Electrical Engineer

Phone: 303-218-1031 Fax: 303-218-1250

E-mail Address: don.melton@bi.com

General Equipment Description -- NOTE: This information will be input into your test report as shown below.

EUT Description Low power RF transmitter for Electronic House Arrest
Monitoring

EUT Name HomeGuard Standard Transmitter

Model No.: HG200B Serial No.: N/A

Product Options: N/A

Configurations to be tested: N/A

Test Objective

- | | |
|---|---|
| ☐ EMC Directive 89/336/EEC (EMC) | ☐ FCC: Class ☐ A ☐ B Part _____ |
| Std: _____ | ☐ VCCI: Class ☐ A ☐ B |
| ☐ Machinery Directive 89/392/EEC (EMC) | ☐ BCIQ: Class ☐ A ☐ B |
| Std: _____ | ☐ Canada: Class ☐ A ☐ B |
| ☐ Medical Device Directive 93/42/EEC (EMC) | ☐ Australia: Class ☐ A ☐ B |
| Std: _____ | ☐ Other: (1) FCC Part 15, para 15.231 (e)
(2) Industry Canada RSS210,
6.1.1(e) |
| ☐ Vehicle Directive 72/245/EEC (EMC) | |
| Std: _____ | |
| ☐ FDA Reviewers Guidance for Premarket
Notification Submissions (EMC) | |

EMC Test Plan and Constructional Data Form

TÜV Product Service Certification Requested

- ☐ Attestation of Conformity (AoC)
 ☐ International EMC Mark (IEM)
- ☐ Certificate of Conformity (CoC)
 ☐ Compliance Document
- Protection Class (N/A for vehicles)
 ☐ Class I
 ☐ Class II
 ☐ Class III
- (Press **F1** when field is selected to show additional information on Protection Class.)

Attendance

Test will be: ☒ Attended by the customer ☐ Unattended by the customer

Failure - Complete this section if testing will not be attended by the customer.

If a failure occurs, TÜV Product Service should:

- ☐ Call contact listed above, if not available then stop testing. (After hrs phone): _____
- ☐ Continue testing to complete test series.
- ☐ Continue testing to define corrective action.
- ☐ Stop testing.

EUT Specifications and Requirements

Length: 2" Width: .75" Height: 2.5" Weight: 3 oz

Power Requirements

Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)

Voltage: N/A (If battery powered, make sure battery life is sufficient to complete testing.)

of Phases: _____

Current (Amps/phase(max)): _____ Current (Amps/phase(nominal)): _____

Other Lithium thionyl chloride primary cell, 3.6 VDC/750 mahr

Other Special Requirements

N/A

Typical Installation and/or Operating Environment

(ie. Hospital, Small Business, Industrial/Factory, etc.)

Typical installation, EUT is attached with a companion strap to the ankle of a person on Electronic House Arrest. Unit is waterproof, is worn 24 hours a day, and can operate between 0 and 50 degrees C.

EMC Test Plan and Constructional Data Form



EUT Power Cable					
☐	Permanent	OR	☐	Removable	Length (in meters): _____
☐	Shielded	OR	☐	Unshielded	
☒	Not Applicable				

EMC Test Plan and Constructional Data Form

EUT Interface Ports and Cables												
Interface			Shielding									
Type	Analog	Digital	Qty	Yes	No	Type	Termination	Connector Type	Port Termination	Length (in meters)	Removable	Permanent
EXAMPLE:												
RS232	☐	☒	2	☒	☐	Foil over braid	Coaxial	Metallized 9-pin D-Sub	Characteristic Impedance	6	☒	☐
N/A	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐						☐	☐
	☐	☐		☐	☐							

EUT Software.

Description: Special F/W for FCC test

EUT Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing.

Consult with your TÜV Product Service Representative if additional assistance is required.

1. EUT operating in Fast Turbo mode (normal mode is transmit in a pseudorandom time interval of 14.5 to 29 seconds. Fast turbo mode transmits the same data but at a rate of once every 0.25 second for test purposes).
- 2.
- 3.

EUT System Components-- List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

Description	Model #	Serial #	FCC ID #
EUT Transmitter	HG200B	N/A	EUT

EMC Test Plan and Constructional Data Form



Support Equipment -- List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)			
<i>Description</i>	<i>Model #</i>	<i>Serial #</i>	<i>FCC ID #</i>
Activator	Tool	Tool #0687	N/A

Oscillator Frequencies			
<i>Frequency</i>	<i>Derived Frequency</i>	<i>Component # / Location</i>	<i>Description of Use</i>
32.768 kHz	2 Hz	Y1 logic pcba	Wake-up timer @ .5-sec intervals
2.0 MHz	same	Y2 logic pcba	Microprocessor clock
9.8188 MHz	314.2 MHz	Y101 RF pcba	Generates 314.2 MHz carrier
314.2 MHz	same	U101 VCO/PLL	carrier

Power Supply			
<i>Manufacturer</i>	<i>Model #</i>	<i>Serial #</i>	<i>Type</i>
Eagle-Picher	custom battery	N/A	☐ Switched-mode: (Frequency) _____ ☐ Linear ☒ Other: 3.6V/750ma LiSO2
			☐ Switched-mode: (Frequency) _____ ☐ Linear ☐ Other: _____

Power Line Filters		
<i>Manufacturer</i>	<i>Model #</i>	<i>Location in EUT</i>
N/A		

EMC Test Plan and Constructional Data Form

**Critical EMI Components (Capacitors, ferrites, etc.)**

<i>Description</i>	<i>Manufacturer</i>	<i>Part # or Value</i>	<i>Qty</i>	<i>Component # / Location</i>
N/A				

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.

(PLEASE INSERT "ELECTRONIC SIGNATURE" BELOW IF POSSIBLE)

Authorization Signatures

Donald A. Melton

10/22/01

Customer authorization to perform tests according to
this test plan.

Date

Donald A. Melton

10/22/01

Test Plan/CDF Prepared By (please print)

Date

A handwritten signature in black ink, appearing to read 'Robert Crosswell', written over a horizontal line.

11/15/01

Reviewed by TÜV Product Service Associate

Date