



Test report No. : 10019765H-R1
Page : 1 of 20
Issued date : October 1, 2013
Revised date : October 1, 2013
FCC ID : CWTWB1U752

RADIO TEST REPORT

Test Report No. : 10019765H-R1

Applicant : Alps Electric Co., Ltd.
Type of Equipment : Remote Keyless Entry (Hand Unit)
Model No. : TWB1U752
Test regulation : FCC Part 15 Subpart C: 2013
FCC ID : CWTWB1U752
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This report is a revised version of 10019765H. 10019765H is replaced with this report.

Date of test: August 25, 2013

Representative test engineer:

K. Kawamura

Keisuke Kawamura
Engineer of WiSE Japan,
UL Verification Service

Approved by:

M. Nishiyama

Masanori Nishiyama
Manager of WiSE Japan,
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

REVISION HISTORY

Original Test Report No.: 10019765H

[illegible]

CONTENTS	PAGE
SECTION 1: Customer information	4
SECTION 2: Equipment under test (E.U.T.)	4
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)	9
SECTION 6: Automatically deactivate	10
SECTION 7: -20dB and 99% Occupied Bandwidth	10
APPENDIX 1: Data of EMI test	11
Automatically deactivate	11
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)	12
-20dB and 99% Occupied Bandwidth	13
Duty Cycle	14
APPENDIX 2: Test Instruments	17
APPENDIX 3: Photographs of test setup	18
Radiated emission	18
Worst case position	19

SECTION 1: Customer information

Company Name	:	Alps Electric Co., Ltd.
Address	:	6-3-36, Nakazato, Furukawa, Osaki-city, Miyagi-pref, 989-6181, Japan
Telephone Number	:	+81-229-23-5111
Facsimile Number	:	+81-229-22-3755
Contact Person	:	Toru Kinoshita

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Remote Keyless Entry (Hand Unit)
Model No.	:	TWB1U752
Serial No.	:	Refer to Section 4, Clause 4.2
Receipt Date of Sample	:	August 23, 2013
Country of Mass-production	:	China
Condition of EUT	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product Description

Model No: TWB1U752 (referred to as the EUT in this report) is the Remote Keyless Entry (Hand Unit).

General Specification

Feature of EUT	:	This transmitter transmit RF signal to tuner.
Clock frequency in the system	:	4MHz (CPU)

Radio Specification

Equipment Type	:	Transmitter
Frequency of operation	:	433.92MHz
Type of modulation	:	ASK
Antenna Type	:	PCB Pattern antenna
Method of Frequency Generation	:	SAW Resonator
Operating voltage (inner)	:	DC 3.0V
Operating Temperature	:	-10 to +60 deg. C

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C: 2013, final revised on June 11, 2013 and effective July 11, 2013

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.231 Periodic operation in the band 40.66 - 40.70MHz
and above 70MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.4	FCC: Section 15.207 IC: RSS-Gen 7.2.4	N/A	N/A *1)	-
Automatically Deactivate	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.231(a)(1) IC: RSS-210 A1.1.1	N/A	Complied	Radiated
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.8	FCC: Section 15.231(b) IC: RSS-210 A1.1.2	15.4dB 433.92MHz Horizontal, PK with Duty factor	Complied	Radiated
Electric Field Strength of Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.9	FCC: Section 15.205 Section 15.209 Section 15.231(b) IC: RSS-210 A1.1.2, 2.5.1 RSS-Gen 7.2.5	8.2dB 1301.760MHz Vertical, PK with Duty factor	Complied	Radiated
-20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.231(c) IC: Reference data	N/A	Complied	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT does not have AC Mains.

FCC 15.31 (e)

This test was performed with the New Battery (DC 3.0V) and the constant voltage was supplied to the EUT during the tests. Therefore, the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	Complied	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	4.3dB	5.0dB	5.1dB	4.9dB	5.8dB	4.4dB	4.3dB
No.2	4.3dB	5.2dB	5.1dB	5.0dB	5.7dB	4.3dB	4.2dB
No.3	4.6dB	5.0dB	5.1dB	5.0dB	5.7dB	4.5dB	4.2dB
No.4	4.8dB	5.2dB	5.0dB	5.0dB	5.7dB	5.2dB	4.2dB

*3m/1m/0.5m = Measurement distance

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.8 x 4.6 x 2.8m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Data of EMI, Test instruments, and Test set up.


Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

Test Item*	Mode
Automatically Deactivate Duty Cycle	Normal use mode
Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission -20dB & 99% Occupied Bandwidth	Continuous Transmitting mode
* The system was configured in typical fashion (as a customer would normally use it) for testing.	

4.2 Configuration and peripherals



* Test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Remote Keyless Entry (Hand Unit)	TWB1U752	13082101*1) 13082102 *2)	Alps Electric Co., Ltd.	EUT

*1) Used for Continuous Transmitting mode

*2) Used for Normal use mode

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane. The EUT was set on the center of the tabletop.
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.
Photographs of the set up are shown in Appendix 3.

(Below 30MHz)

The noise level was checked by moving a search-coil (Loop Antenna) close to the EUT.

(Above 30MHz)

The Radiated Electric Field Strength has been measured on Semi anechoic chamber with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver/spectrum analyzer.

Test Antennas are used as below;

Frequency	Below 30MHz	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz	Above 1GHz
Detector Type	Peak	Peak	Peak	Peak	Peak and Peak with Duty factor	Peak and Peak with Duty factor
IF Bandwidth	200Hz	200Hz	9.1kHz	9.1kHz	120kHz	PK: S/A:RBW 1MHz, VBW:3MHz

* For the test below 30MHz, the noise was not detected when it was confirmed with PK detect.

- The carrier level was measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

Noise levels of all the frequencies were measured at the position.

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key, as a result, the test without mechanical key was the worst case. Therefore the test without mechanical key was performed only.

*The result is rounded off to the second decimal place, so some differences might be observed.

Measurement range : 9kHz-3.2GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 6: Automatically deactivate

Test Procedure

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX
Test result : Pass

SECTION 7: -20dB and 99% Occupied Bandwidth

Test Procedure

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
20dB Bandwidth	300kHz	3kHz	9.1kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth	Enough width to display 20dB Bandwidth	1 % of Span	Three times of RBW	Auto	Peak *1)	Max Hold *1)	Spectrum Analyzer
*1) The measurement was performed with Peak detector, Max Hold since the duty cycle was not 100%.							


Test data : APPENDIX
Test result : Pass

APPENDIX 1: Data of EMI test

Automatically deactivate

Test place	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No.	10019765H
Date	08/25/2013
Temperature/ Humidity	20 deg.C / 51% RH
Engineer	Keisuke Kawamura
Mode	Normal use mode

Time of Transmitting [sec]	Limit [sec]	Result
0.408	5.00	Pass

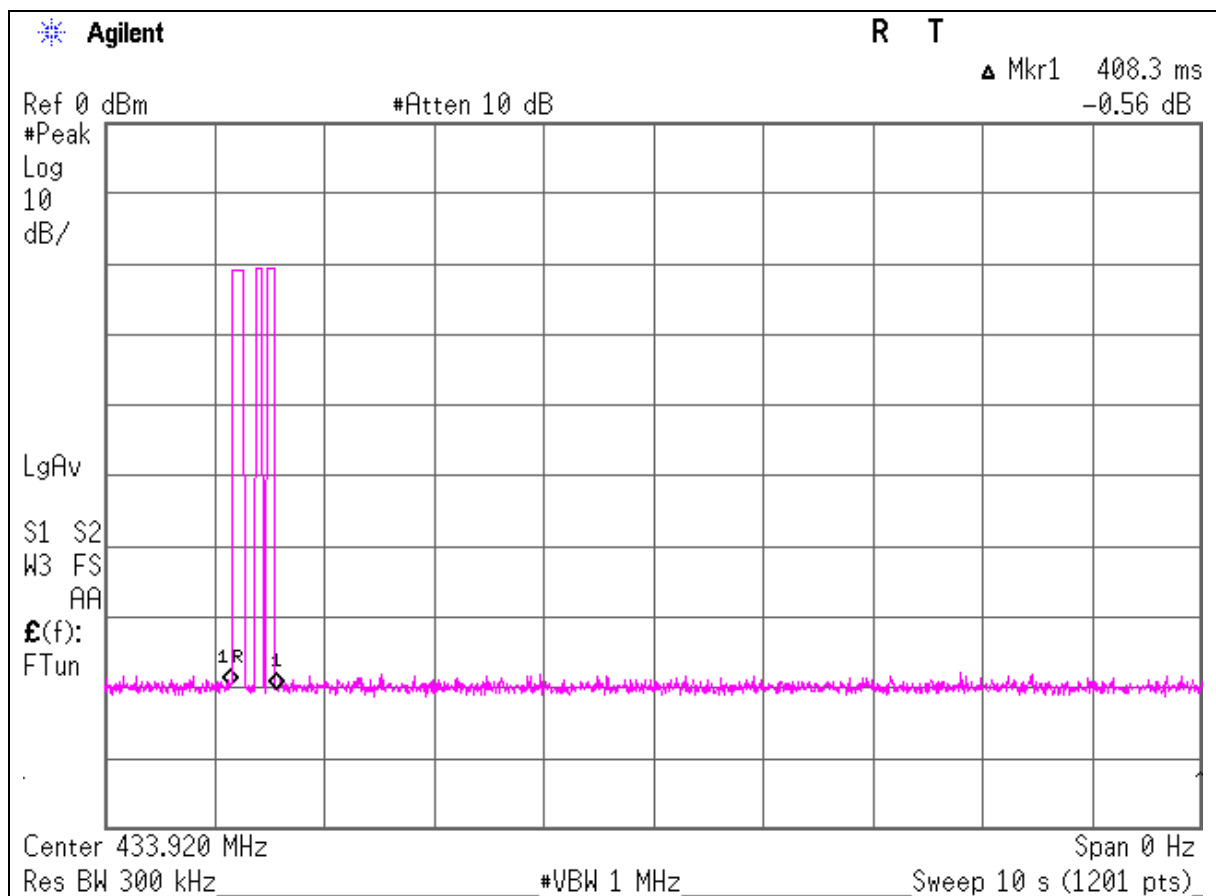

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Test place	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No.	10019765H
Date	08/25/2013
Temperature/ Humidity	20 deg.C / 51% RH
Engineer	Keisuke Kawamura
Mode	Transmitting mode

PK

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
433.920	PK	75.6	75.5	17.6	9.4	28.5	-	74.1	74.0	100.8	26.7	26.8	Carrier
867.840	PK	44.5	42.8	22.2	11.2	27.9	-	50.0	48.3	80.8	30.8	32.5	Outside
1301.760	PK	63.4	64.2	24.8	1.7	36.3	-	53.6	54.4	73.9	20.3	19.5	Inside
1735.680	PK	53.0	50.8	26.0	2.0	35.9	-	45.1	42.9	80.8	35.7	37.9	Outside
2169.600	PK	61.4	59.4	26.9	2.2	35.7	-	54.8	52.8	80.8	26.0	28.0	Outside
2603.520	PK	52.1	50.4	26.9	2.5	35.6	-	45.9	44.2	80.8	34.9	36.6	Outside
3037.440	PK	53.5	54.5	27.6	2.7	35.2	-	48.6	49.6	80.8	32.2	31.2	Outside
3471.360	PK	51.1	51.1	28.1	2.9	34.9	-	47.2	47.2	80.8	33.6	33.6	Outside
3905.280	PK	48.5	48.1	28.9	3.1	34.6	-	45.9	45.5	73.9	28.0	28.4	Inside
4339.200	PK	45.7	44.1	29.5	3.3	34.7	-	43.8	42.2	73.9	30.1	31.7	Inside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

PK with Duty factor

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
433.920	PK	75.6	75.5	17.6	9.4	28.5	-8.7	65.4	65.3	80.8	15.4	15.5	Carrier
867.840	PK	44.5	42.8	22.2	11.2	27.9	-8.7	41.3	39.6	60.8	19.5	21.2	Outside
1301.760	PK	63.4	64.2	24.8	1.7	36.3	-8.7	44.9	45.7	53.9	9.0	8.2	Inside
1735.680	PK	53.0	50.8	26.0	2.0	35.9	-8.7	36.4	34.2	60.8	24.4	26.6	Outside
2169.600	PK	61.4	59.4	26.9	2.2	35.7	-8.7	46.1	44.1	60.8	14.7	16.7	Outside
2603.520	PK	52.1	50.4	26.9	2.5	35.6	-8.7	37.2	35.5	60.8	23.6	25.3	Outside
3037.440	PK	53.5	54.5	27.6	2.7	35.2	-8.7	39.9	40.9	60.8	20.9	19.9	Outside
3471.360	PK	51.1	51.1	28.1	2.9	34.9	-8.7	38.5	38.5	60.8	22.3	22.3	Outside
3905.280	PK	48.5	48.1	28.9	3.1	34.6	-8.7	37.2	36.8	53.9	16.7	17.1	Inside
4339.200	PK	45.7	44.1	29.5	3.3	34.7	-8.7	35.1	33.5	53.9	18.8	20.4	Inside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor (Refer to Duty factor data sheet)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

- * The test above 1GHz was performed with PK detect. Average emission measurements were calculated with PK detect and Duty cycle factor.
- * Duty Factor was calculated with the assumption of the worst condition in 100msec.
- * The noise measured with PK detect was pulse emission.


-20dB and 99% Occupied Bandwidth

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. 10019765H
Date 08/25/2013
Temperature/ Humidity 20 deg.C / 51% RH
Engineer Keisuke Kawamura
Mode Transmitting mode

Bandwidth Limit : Fundamental Frequency $433.92 \text{ MHz} \times 0.25\% = 1084.80 \text{ kHz}$

-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
15.62	1084.80	Pass

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
35.54	1084.80	Pass

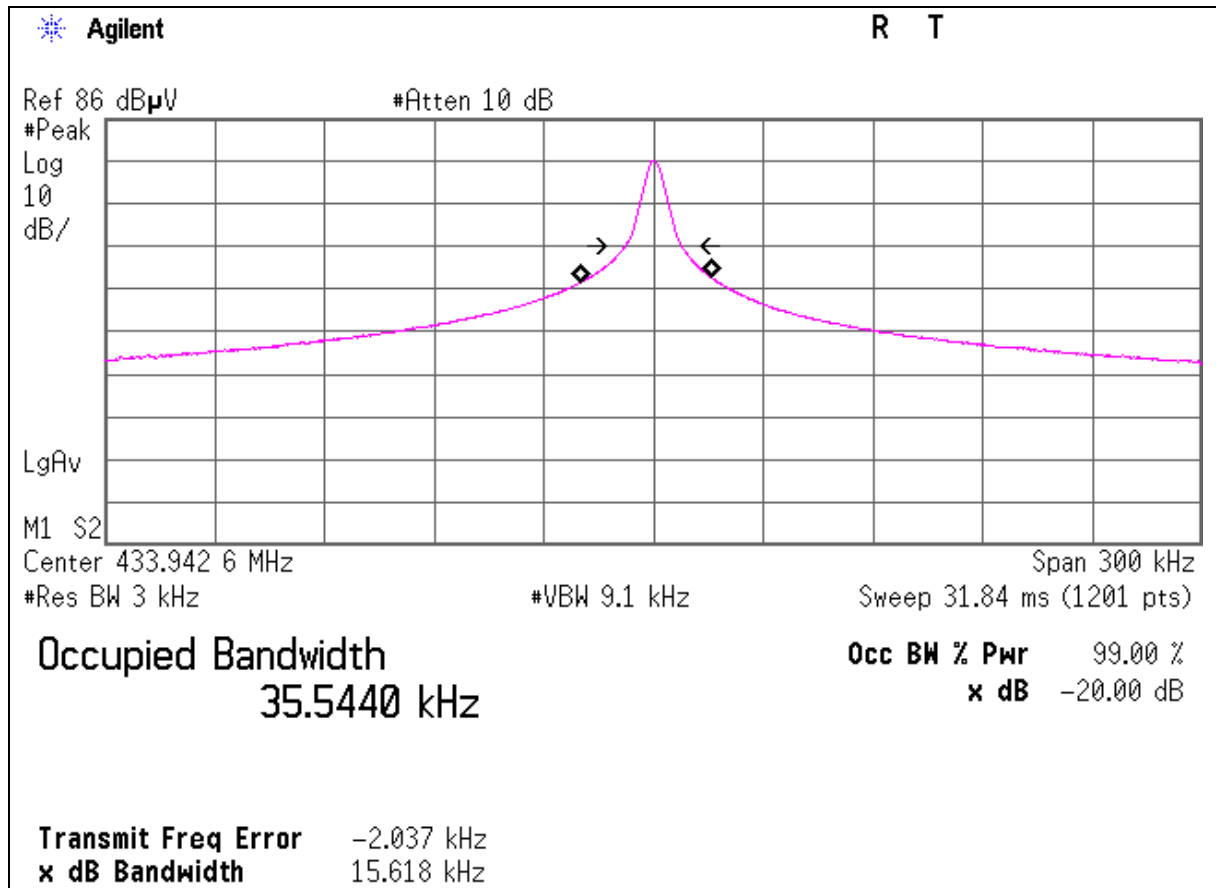

Duty Cycle

Test place	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No.	10019765H
Date	08/25/2013
Temperature/ Humidity	20 deg.C / 51% RH
Engineer	Keisuke Kawamura
Mode	Transmitting mode

(Total)

Type	Times	ON time(One pulse) [ms]	ON time(in 100ms) [ms]
A	18	0.58	10.4994
B	22	0.99	21.8174
C	1	4.26	4.2580


*1)ON time(in 100ms) = Times * On time(One Pulse)

*2)The train of pulses was exceeding 100msec, and that sampled 100msec was the worst case against the train

ON time [ms]	Cycle [ms]	Duty (On time/Cycle)	Duty [dB]
36.575	100.00	0.3657	-8.74

*3)ON time = Type A's On time(in 100ms) + Type B's On time(in 100ms) + Type C's On time(in 100ms)

*4)Duty = 20log(ON time/100ms)

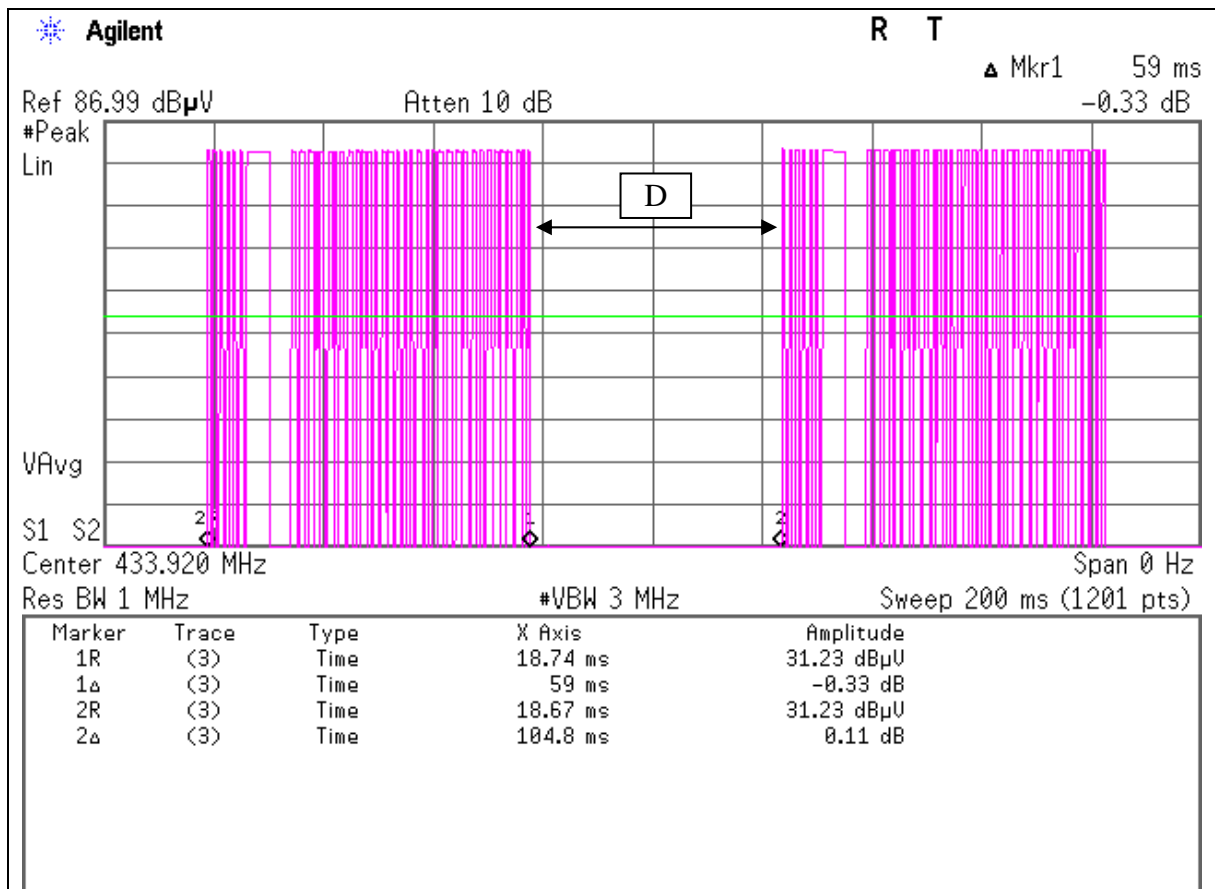

*D is intentional off time.

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Duty Cycle

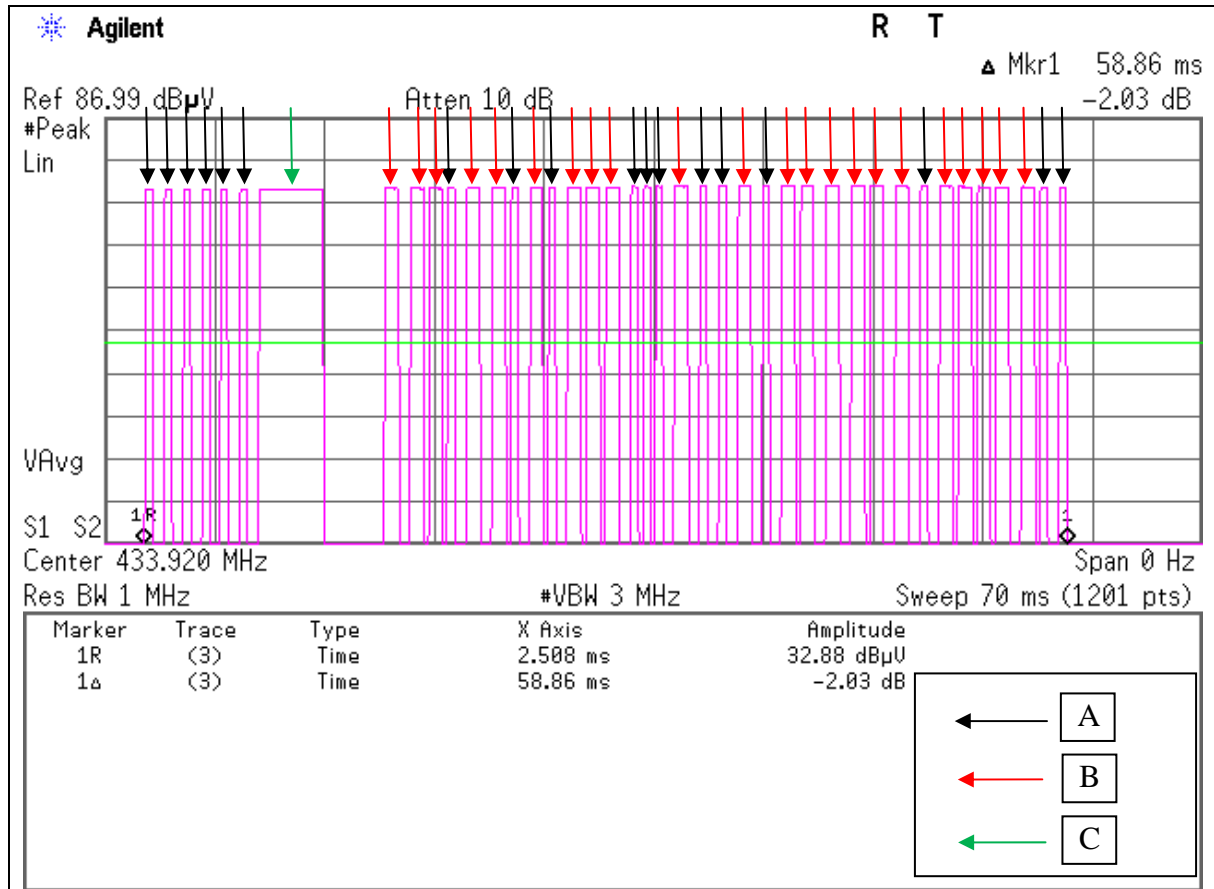

Duty Cycle

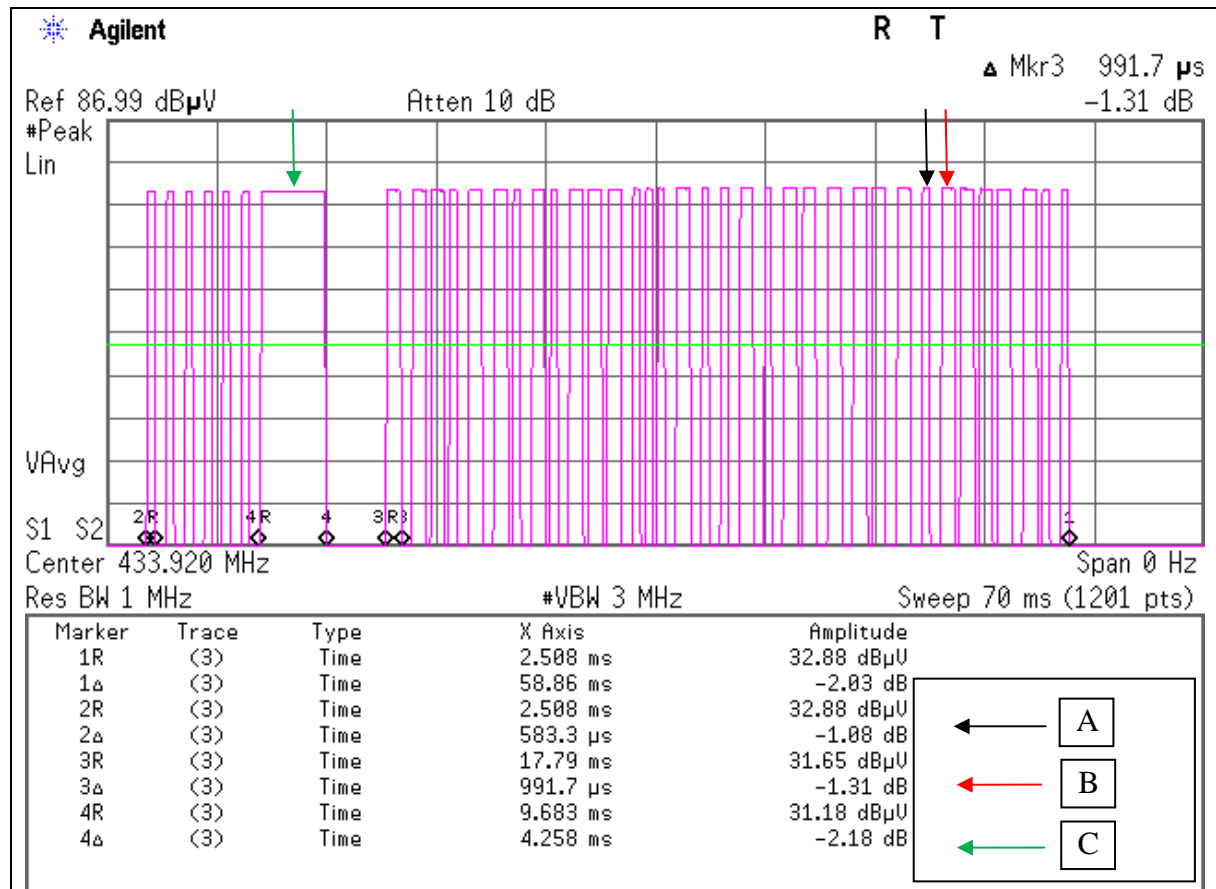

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2013/06/30 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2013/02/26 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MRENT-95	Spectrum Analyzer	Agilent	E4440A	MY46185823	RE	2013/06/14 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2013/06/11 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	VHA91032008	RE	2012/10/08 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	201	RE	2012/10/08 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2013/02/06 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2012/11/06 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2012/09/11 * 12
MSA-04	Spectrum Analyzer	Agilent	E4448A	US44300523	RE	2013/04/03 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2013/02/15 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2013/01/10 * 12
MCC-132	Microwave Cable	HUBER+SUHNER	SUCOFLEX104	336161/4(1m) / 340639(5m)	RE	2012/09/05 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Radiated emission, 99% Occupied Bandwidth, -20dB bandwidth , Automatically deactivate and Duty cycle tests

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124