


APPENDIX 2: Data of EMI test

Automatically deactivate

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Report No. 29JE0126-HO-01
 Date 02/17/2010
 Temperature/ Humidity 22 deg.C./ 32%
 Engineer Norihisa Hashimoto
 Mode Standard mode

Time of Transmitting [sec]	Limit [sec]	Result
0.37	5.00	Pass

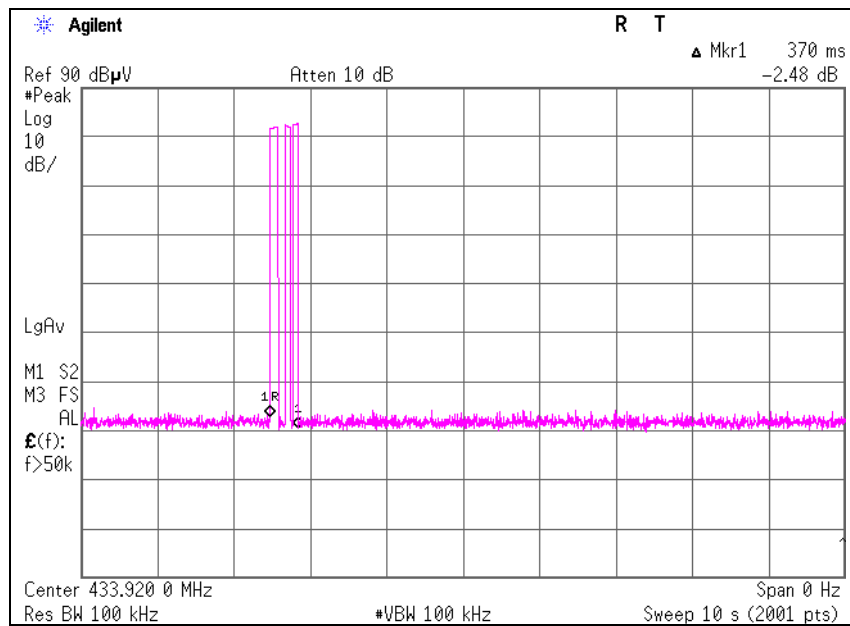

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. 29JE0126-HO-01
Date 02/17/2010
Temperature/ Humidity 23 deg.C./ 32%
Engineer Norihisa Hashimoto
Mode Continuous transmission Mode

PK

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
433.920	PK	74.6	75.0	18.1	9.6	28.5	-	73.8	74.2	100.8	27.0	26.6	Carrier
867.840	PK	52.4	48.4	22.7	11.2	28.1	-	58.2	54.2	80.8	22.6	26.7	Outside
1301.760	PK	65.5	65.6	24.9	2.2	33.3	-	59.3	59.4	73.9	14.6	14.5	Inside
1735.680	PK	56.4	59.0	26.1	2.4	32.7	-	52.2	54.8	80.8	28.6	26.0	Outside
2169.600	PK	62.6	56.7	26.9	2.6	32.4	-	59.7	53.8	80.8	21.1	27.0	Outside
2603.520	PK	47.6	45.7	27.2	2.8	32.4	-	45.2	43.3	80.8	35.6	37.5	Outside
3037.440	PK	55.3	50.0	27.4	3.1	32.2	-	53.6	48.3	80.8	27.2	32.5	Outside
3471.360	PK	55.4	49.4	28.0	3.2	31.9	-	54.7	48.7	80.8	26.2	32.1	Outside
3905.280	PK	50.5	48.4	28.6	3.4	31.7	-	50.8	48.7	73.9	23.1	25.3	Inside
4339.200	PK	44.1	42.8	29.7	3.6	31.5	-	45.9	44.6	73.9	28.0	29.3	Inside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

PK with Duty factor

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
433.920	PK	74.6	75.0	18.1	9.6	28.5	-8.5	65.3	65.7	80.8	15.5	15.1	Carrier
867.840	PK	52.4	48.4	22.7	11.2	28.1	-8.5	49.7	45.7	60.8	11.1	15.2	Outside
1301.760	PK	65.5	65.6	24.9	2.2	33.3	-8.5	50.8	50.9	53.9	3.1	3.0	Inside
1735.680	PK	56.4	59.0	26.1	2.4	32.7	-8.5	43.7	46.3	60.8	17.1	14.5	Outside
2169.600	PK	62.6	56.7	26.9	2.6	32.4	-8.5	51.2	45.3	60.8	9.6	15.5	Outside
2603.520	PK	47.6	45.7	27.2	2.8	32.4	-8.5	36.7	34.8	60.8	24.1	26.0	Outside
3037.440	PK	55.3	50.0	27.4	3.1	32.2	-8.5	45.1	39.8	60.8	15.7	21.0	Outside
3471.360	PK	55.4	49.4	28.0	3.2	31.9	-8.5	46.2	40.2	60.8	14.7	20.6	Outside
3905.280	PK	50.5	48.4	28.6	3.4	31.7	-8.5	42.3	40.2	53.9	11.6	13.8	Inside
4339.200	PK	44.1	42.8	29.7	3.6	31.5	-8.5	37.4	36.1	53.9	16.5	17.8	Inside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier) + Duty factor (Refer to Duty factor data sheet)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

- * The test above 1GHz was performed with PK detect. Average emission measurements were calculated with PK detect and Duty cycle factor.
- * Duty Factor was calculated with the assumption of the worst condition in 100msec.
- * All the measured noise was pulse emission.


-20dB and 99% Occupied Bandwidth

Test place	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No.	29JE0126-HO-01
Date	02/17/2010
Temperature/ Humidity	22 deg.C./ 32%
Engineer	Norihisa Hashimoto
Mode	Continuous transmission Mode

Bandwidth Limit : Fundamental Frequency $433.92 \text{ MHz} \times 0.25\% = 1084.80 \text{ kHz}$

-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
45.68	1084.80	Pass

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
99.86	1084.80	Pass

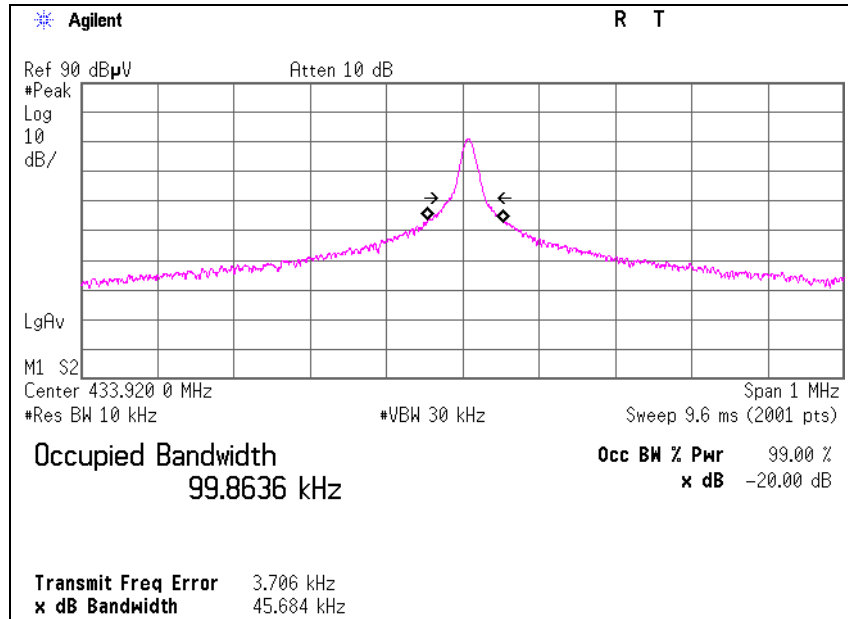

Duty Cycle

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber
Report No. 29JE0126-HO-01
Date 02/17/2010
Temperature/ Humidity 22 deg.C./ 32%
Engineer Norihisa Hashimoto
Mode Continuous transmission Mode

Type	Times	ON time(One pulse) [ms]	ON time(in 100ms) [ms]
A	13	0.570	7.41
B	1	4.200	4.2
C	27	0.960	25.92

*1)ON time(in 100ms) = Times * ON time(One pulse)

*2)The train of pulses was exceeding 100msec, and that sampled 100msec was the worst case against the pulse train.


(Total)

ON time [ms]	Cycle [ms]	Duty (On time/Cycle)	Duty [dB]
37.53	100.00	0.38	-8.5


*3)ON time = Type A's ON time (in 100ms) + Type B's ON time (in 100ms) + Type C's ON time (in 100ms)

*4)Duty = $20\log_{10}(\text{ON time}/\text{Cycle})$

Duty Cycle

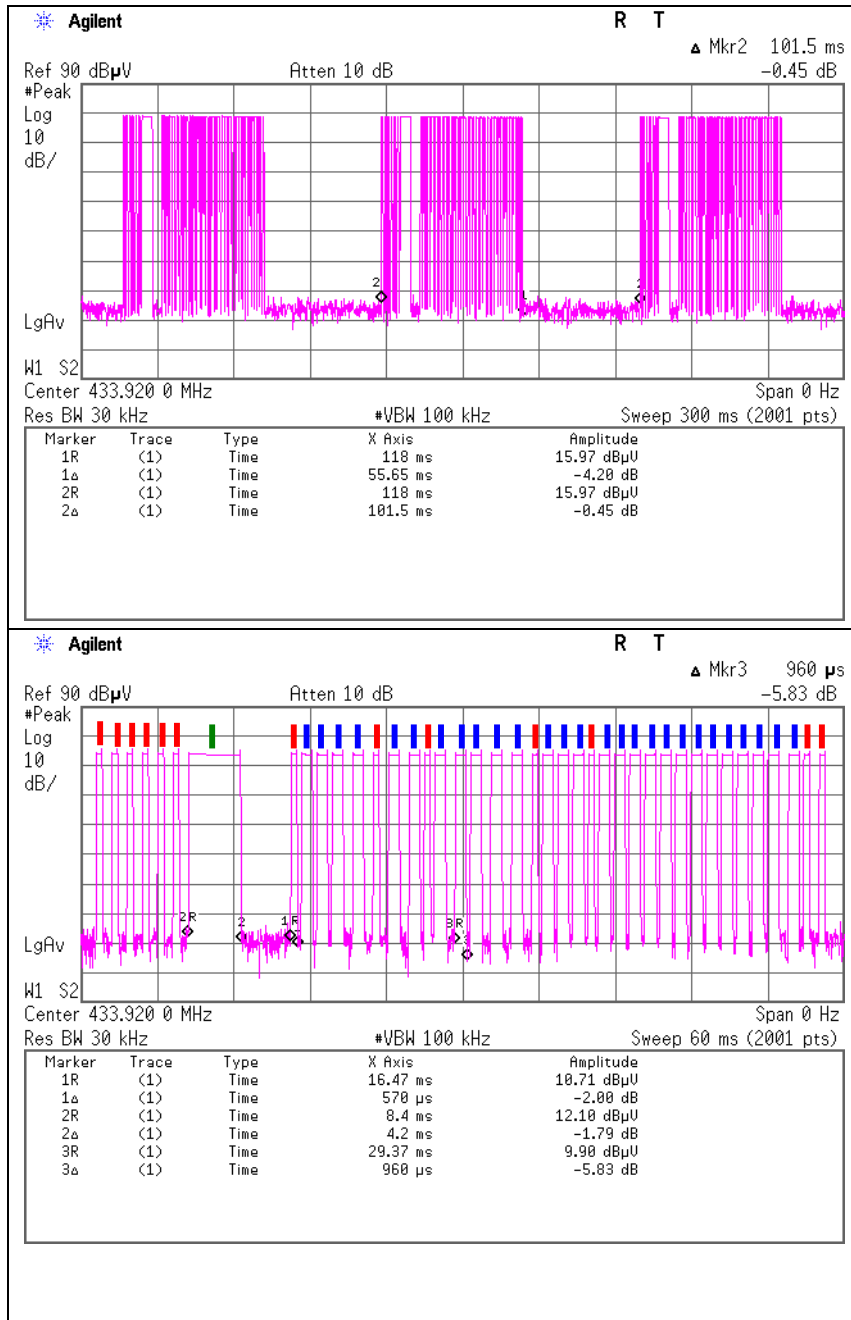

Duty Cycle

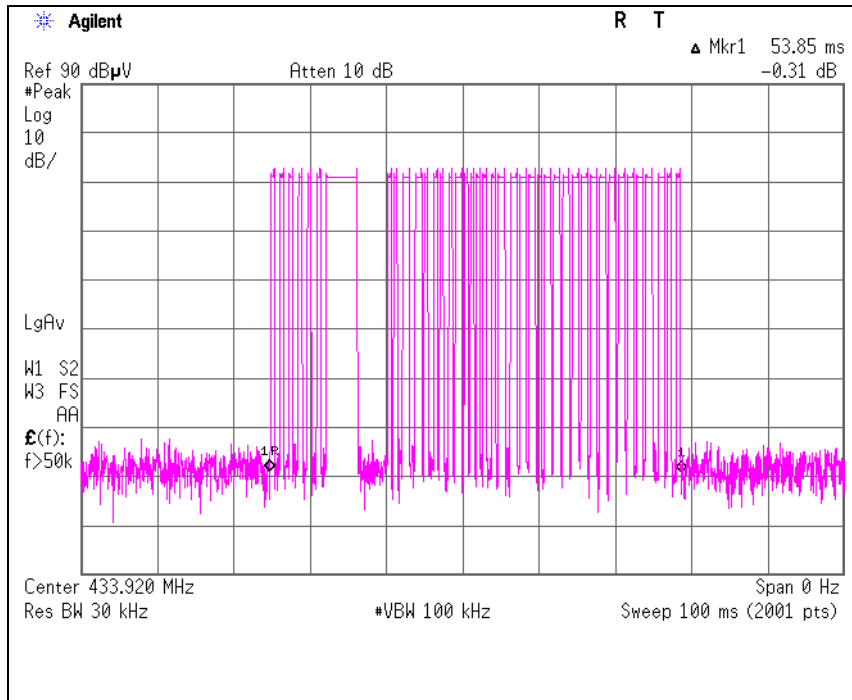

APPENDIX 3:Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2009/08/17 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2010/02/09 * 12
MJM-05	Measure	PROMART	SEN1955	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2009/11/20 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2009/04/14 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	VHA91032008	RE	2009/10/05 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	201	RE	2009/10/05 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2009/02/16 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2009/11/12 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2009/09/02 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2010/01/19 * 12
MCC-47	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	295123(5m) / 287573(1m)	RE	2009/11/19 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2009/09/14 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards. As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Radiated emission, -20dB bandwidth and 99% Occupied Bandwidth, Automatically deactivate and Duty cycle tests

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124