



UL Apex Co., Ltd.

Test report No. : 24KE0135-HO-2
Page : 1 of 15
Issued date : September 10, 2004
FCC ID : CWTWD1U625

EMI TEST REPORT

Test Report No. : 24KE0135-HO-2

Applicant : Alps Electric Co., Ltd.

**Type of Equipment : Passive Entry System
(Control Unit)**

Model No. : TFWD1U625

**Test standard : FCC Part 15 Subpart C : 2004
Section 15.209**


FCC ID : CWTWD1U625

Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.

Date of test : August 27, 2004

Tested by : 
Mitsuru Fujimura
EMC Service

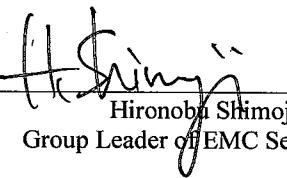Approved by : 
Hironobu Shimoji
Group Leader of EMC Service

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Faxsimile : +81 596 24 8124

MF060b(10.04.03)

| CONTENTS | PAGE |
|---|-------------|
| SECTION 1: Client information..... | 3 |
| SECTION 2: Equipment under test (E.U.T.) | 3 |
| SECTION 3: Test specification, procedures & results | 4 |
| SECTION 4: Operation of E.U.T. during testing..... | 6 |
| SECTION 5: Radiated emission (Fundamental and Spurious Emission) | 8 |
| APPENDIX 1: Photographs of test setup..... | 9 |
| Radiated emission..... | 9 |
| Worst Case Position (Horizontal : X-axis / Vertical: X-axis)..... | 10 |
| APPENDIX 2: Test Instruments..... | 11 |
| APPENDIX 3: Data of EMI test | 12 |
| Radiated Emission..... | 12 |
| -26dB bandwidth | 14 |
| 99% Occupied Bandwidth..... | 15 |

SECTION 1: Client information

Company Name : Alps Electric Co., Ltd.
Address : 6-3-36 Nakazato, Furukawa-city Miyagi-pref., 989-6181 Japan
Telephone Number : +81-229-23-5111
Facsimile Number : +81-229-22-3755
Contact Person : Tomosuke Takata

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Passive Entry System (Control Unit)
Model No. : TFWD1U625
Serial No. : 5
Country of Manufacture : Japan
Receipt Date of Sample : July 15, 2004
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)

2.2 Product Description

Model No: TFWD1U625 is the Passive Entry System (Control Unit).

Rating : DC 12.0V (Car battery)
Temperature of operation : -35 deg. C. -+85 deg. C.
Other Clock Frequency : 65.14MHz, 16MHz, 32.768kHz

Tx section

Frequency Characteristics : 125kHz
Modulation : Amplitude
Information antenna : External (Bar antenna)

FCC 15.31 (e)

The power supply of this EUT is transformed to DC 5.0V and provides stable voltage (DC 5.0V) constantly to Radio part. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for users to replace the antenna, because the antenna is a set with EUT and installed outside of EUT based on the specification. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C : 2004
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.209 Radiated emission limits, general requirements

3.2 Procedures and results

| No. | Item | Test Procedure | Specification | Remarks | Worst margin | Result |
|-----|---|-----------------|--|------------------|-------------------------------------|----------|
| 1 | Electric Field Strength of Fundamental Emission | ANSI C63.4:2003 | FCC Section 15.209 | Radiated | 29.1dB 0.125MHz 0 deg. PK | Complied |
| 2 | Electric Field Strength of Spurious Emission | ANSI C63.4:2003 | FCC Section 15.205 FCC Section 15.209 | Radiated | 3.8dB QP 69.774MHz Horizontal | Complied |
| 3 | Conducted Emission | ANSI C63.4:2003 | FCC Section 15.207(a) | AC Mains only*1) | N/A | N/A |

Note: UL Apex's EMI Work procedures No. QPM05

*1) This test is not applicable since the EUT does not have AC power port.

*These tests were performed without any deviations from test procedure except for additions or exclusions.

3.3 Addition to standards

| No. | Item | Test Procedure | Specification | Remarks | Deviation | Worst margin | Results |
|-----|-------------------------|---|---|----------|-----------|--------------|---------|
| 1 | 99% Occupied Band Width | RSS210(issue 5): 2001 + Amendment:2002 + Amendment2:2003 + Amendment3:2004 | RSS210(issue 5): 2001 + Amendment:2002 + Amendment2:2003 + Amendment3:2004 | Radiated | N/A | N/A | N/A |
| 2 | -26dB Bandwidth | ANSI C63.4:2003 | Reference data | Radiated | N/A | N/A | N/A |

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

3.4 Uncertainty

Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test using Loop antenna is ± 1.8 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 5.2 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Horn Antenna is ± 6.6 dB.

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

| | Listed date (for FCC) | FCC Registration Number | IC Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms |
|-------------------------------|--------------------------|-------------------------------|-----------|-------------------------------|---|---------------------|
| No.1 semi-anechoic chamber | February 01, 2002 | 313583 | IC4247 | 19.2 x 11.2 x 7.7m | 7.0 x 6.0m | Preparation room |
| No.2 semi-anechoic chamber | June 05, 2002 | 846015 | IC4247-2 | 7.5 x 5.8 x 5.2m | 4.0 x 4.0m | - |
| No.3 shielded room | - | - | - | 4.7 x 7.5 x 2.7m | 4.7 x 7.5m | - |
| No.4 measurement room | - | - | - | 3.1 x 5.0 x 2.7m | N/A | - |

*Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1 and No.2 semi-anechoic and No.3 shielded room.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The sequence is used : Continuous Transmitting mode

Remarks:

This EUT has two antennas for Doors and Control Unit. Both antennas are identical to one another. And the antenna of Control Unit is installed inside. Therefore, the test was made with the antenna for Doors.


This EUT in actual use is set to have the maximum RF power that is supplied to Antenna.

The length of the antenna cable was set for the test in the worst condition (actual usage).


Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

4.2 Configuration and peripherals

Front View

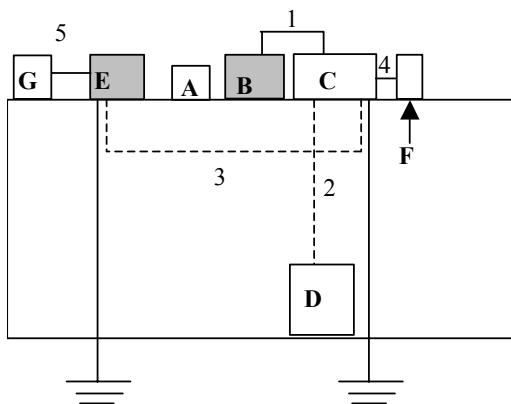

Top View

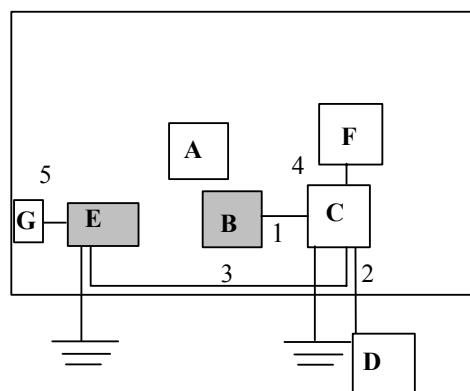

* Test data was taken under worse case conditions.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

(Hand Unit)

Support equipment

| No. | Item | Model number | Serial number | Manufacturer | FCC ID |
|-----|----------------------------------|--------------|---------------|-------------------------|------------|
| A | Passive Entry System (Hand Unit) | TFWB1U618 | 1 | Alps Electric Co., Ltd. | CWTWB1U618 |

(Control Unit)

Description of EUT and Support Equipment

| No. | Item | Model number | Serial number | Manufacturer | FCC ID |
|-----|--------------|--------------|---------------|-------------------------|------------|
| B | Bar antenna | - | - | Alps Electric Co., Ltd. | - |
| C | Checker Box | N/A | N/A | Alps Electric Co., Ltd. | - |
| D | Car Battery | 50B24L | N/A | YUASA | - |
| E | Control Unit | TFWD1U625 | 5 | Alps Electric Co., Ltd. | CWTWD1U625 |
| F | Checker PWB | - | - | Alps Electric Co., Ltd. | - |
| G | Tuner | TFWC1U119 | 4 | Alps Electric Co., Ltd. | CWTWC1U119 |

List of cables used

| No. | Name | Length (m) | Shield | Remark |
|-----|-------------------------|------------|--------|--------|
| 1 | Antenna Cable | 0.5 | N | - |
| 2 | DC Power Cable | 1.0 | N | - |
| 3 | Signal & DC Power Cable | 1.2 | N | - |
| 4 | Cable for Checker PWB | 0.3 | N | - |
| 5 | Cable for Tuner | 1.1 | N | - |

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 5: Radiated emission (Fundamental and Spurious Emission)

5.1 Operating environment

Test place : No.1 semi anechoic chamber
 Temperature : See data
 Humidity : See data

Test Procedure

The Radiated Electric Field Strength intensity has been measured at a distance of 10m and at a distance of 3m.

Frequency : From 9kHz to 30MHz at distance 10m

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for each antenna angle 0deg., 45deg. and 90deg.

Frequency : From 30MHz to 1GHz at distance 3m

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

| | From 9kHz to 90kHz and From 110kHz to 150kHz | From 90kHz to 110kHz | From 150kHz to 490kHz | From 490kHz to 30MHz | From 30MHz to 1GHz |
|---------------|---|----------------------------|-----------------------------|----------------------------|--------------------------|
| Detector Type | PK/AV | QP | PK/AV | QP | QP |
| IF Bandwidth | 200Hz | 200Hz | 9kHz | 9kHz | 120kHz |

* PK: Spectrum Analyzer RBW = 1MHz, VBW = 1MHz

* AV: Spectrum Analyzer RBW = 1MHz, VBW = 10Hz

-The carrier level and noise levels were confirmed at each position of X, Y and Z axis of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

* Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

9kHz – 490kHz [Limit at 10m]=[Limit at 300m]-40log (10[m]/300[m])

490kHz – 30MHz[Limit at 10m]=[Limit at 30m]-40log (10[m]/30[m])

5.2 Results

Summary of the test results: Pass

Date: August 27, 2004

Tested by: Mitsuru Fujimura

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124


MF060b(10.04.03)

APPENDIX 1: Photographs of test setup

Radiated emission
Front



Rear

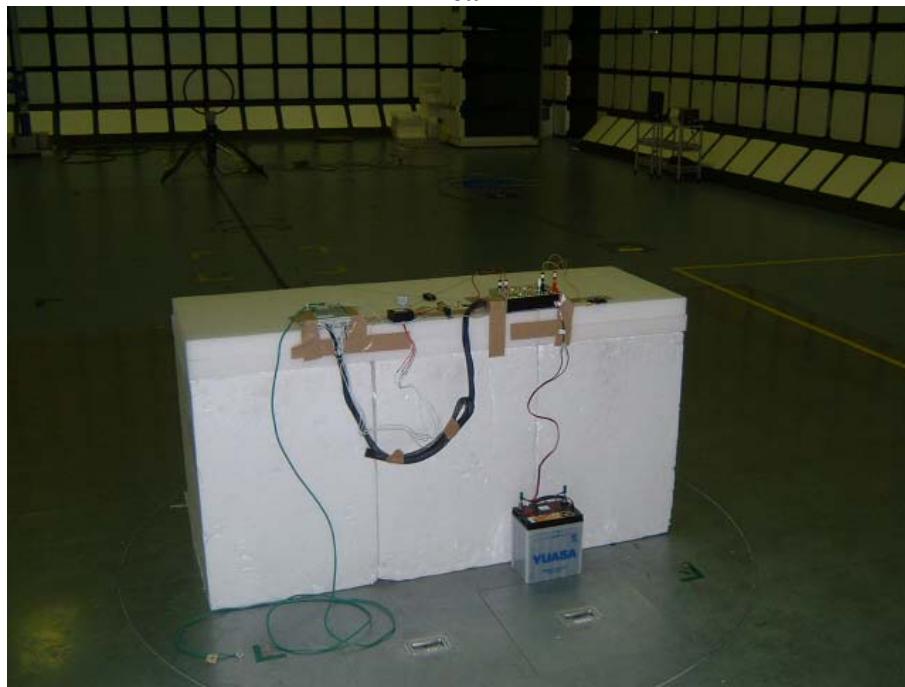

UL Apex Co., Ltd.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

Worst Case Position (Horizontal : X-axis / Vertical: X-axis)

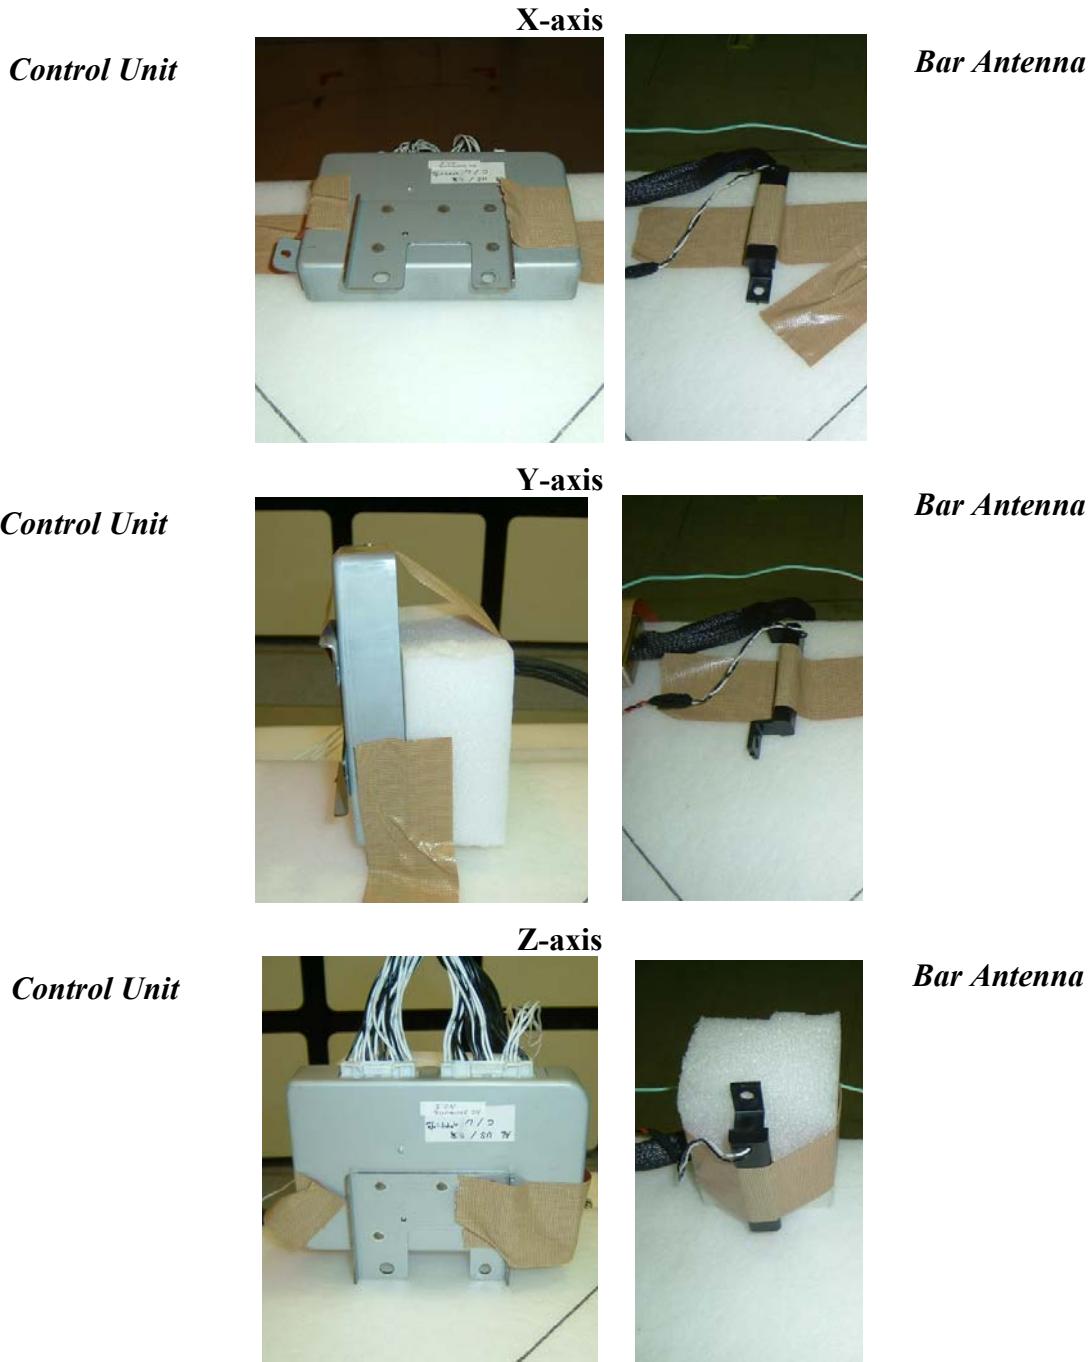

APPENDIX 2: Test Instruments

EMI test equipment

| Control No. | Instrument | Manufacturer | Model No | Test Item | Calibration Date * Interval(month) |
|-------------|---------------------|------------------------------|---------------------------|-----------|------------------------------------|
| MAEC-01 | Anechoic Chamber | TDK | Semi Anechoic Chamber 10m | RE /ME | 2003/12/27 * 12 |
| MTR-01 | Test Receiver | Rohde & Schwarz | ESI40 | RE /ME | 2003/11/12 * 12 |
| MCC-05 | Microwave Cable | Storm | 421-011 | RE | 2004/01/06 * 12 |
| MCC-23 | Microwave Cable | Storm | - | RE | 2004/05/01 * 12 |
| MPA-01 | Pre Amplifier | Agilent | 8449B | RE | 2004/02/06 * 12 |
| MHA-05 | Horn Antenna | Schwarzbeck | BBHA9120D | RE | 2004/01/10 * 12 |
| MBA-01 | Biconical Antenna | Schwarzbeck | BBA9106 | RE | 2003/10/15 * 12 |
| MLA-01 | Logperiodic Antenna | Schwarzbeck | USLP9143 | RE | 2003/10/15 * 12 |
| MCC-01 | Coaxial Cable | Suhner/storm/Agilent/ TSJ | - | RE | 2003/12/19 * 12 |
| MAT-06 | Attenuator(6dB) | Weinschel Corp | 2 | RE /ME | 2003/12/16 * 12 |
| MPA-04 | Pre Amplifier | Agilent | 8447D | RE /ME | 2004/05/25 * 12 |
| MCC-03 | Coaxial Cable | Fujikura/Suhner/Agilent/ TSJ | - | ME | 2003/12/24 * 12 |
| MLPA-01 | Loop Antenna | Rohde & Schwarz | HFH2-Z2 | ME | 2004/01/08 * 12 |
| MCC-07 | coaxial cable | - | - | ME | 2004/01/26 * 12 |
| MCC-08 | coaxial cable | - | - | ME | 2004/01/26 * 12 |

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

RE: Radiated emission

ME: Radiated Magnetic Field Strength 9kHz – 30MHz

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

APPENDIX 3: Data of EMI test

Radiated Emission

DATA OF RADIATED EMISSION TEST


UL Apex Co., Ltd. Head Office EMC Lab. No.1 Semi Anechoic Chamber

Applicant : ALPS Electric Co.,Ltd.
 Kind of EUT : Passive Keyless entry
 Model No. : TFWD1U625
 Serial No. : 5

Report No. : 24KE0135-HO
 Power : DC 12V
 Temp°C/Humi% : 23 / 65%
 Operator : Mitsuru Fujimura

Mode / Remarks: Transmitting / X-axis (Max-axis)

LIMIT : FCC Part15 Class B(3m)/USA
 Except for the data below : All other spurious emissions were less than 20dB for the limit.

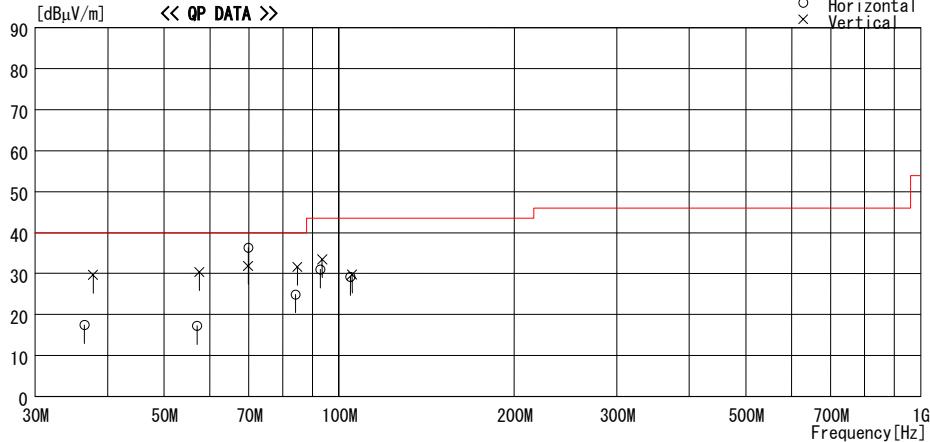

| No. | FREQ [MHz] | READING QP [dBμV] | ANT FACTOR [dB/m] | LOSS [dB] | GAIN [dB] | RESULT [dBμV/m] | LIMIT [dBμV/m] | MARGIN [dB] | ANTENNA [cm] | TABLE [DEG] |
|-------------------------------|------------|-------------------|-------------------|-----------|-----------|-----------------|----------------|-------------|--------------|-------------|
| <u>----- Horizontal -----</u> | | | | | | | | | | |
| 1 | 36.493 | 22.5 | 15.6 | 7.2 | 27.9 | 17.4 | 40.0 | 22.6 | 100 | 359 |
| 2 | 57.017 | 28.7 | 8.8 | 7.4 | 27.7 | 17.2 | 40.0 | 22.8 | 337 | 256 |
| 3 | 69.774 | 49.8 | 6.7 | 7.6 | 27.8 | 36.3 | 40.0 | 3.8 | 234 | 183 |
| 4 | 84.144 | 38.0 | 6.9 | 7.8 | 27.8 | 24.9 | 40.0 | 15.1 | 213 | 159 |
| 5 | 92.778 | 42.2 | 8.5 | 7.9 | 27.6 | 31.0 | 43.5 | 12.5 | 182 | 157 |
| 6 | 104.521 | 38.0 | 10.9 | 8.0 | 27.7 | 29.2 | 43.5 | 14.3 | 277 | 0 |
| <u>----- Vertical -----</u> | | | | | | | | | | |
| 7 | 37.766 | 35.3 | 15.0 | 7.1 | 27.8 | 29.6 | 40.0 | 10.4 | 100 | 208 |
| 8 | 57.510 | 42.1 | 8.6 | 7.4 | 27.8 | 30.3 | 40.0 | 9.7 | 100 | 123 |
| 9 | 69.764 | 45.3 | 6.7 | 7.6 | 27.8 | 31.8 | 40.0 | 8.2 | 100 | 284 |
| 10 | 84.766 | 44.6 | 7.0 | 7.8 | 27.8 | 31.6 | 40.0 | 8.4 | 100 | 16 |
| 11 | 93.521 | 44.5 | 8.6 | 7.9 | 27.6 | 33.4 | 43.5 | 10.1 | 100 | 238 |
| 12 | 105.270 | 38.5 | 11.0 | 8.0 | 27.7 | 29.8 | 43.5 | 13.7 | 100 | 269 |

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

CHART:WITH FACTOR ANT TYPE : -30MHz LOOP 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
 CALCULATION : READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - AMP. GAIN

Page:

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

Data of carrier and supurious emissions(9kHz to 30MHz)

UL Apex Co., Ltd.
Head Office EMC Lab. No.1 Semi Anechoic Chamber

Company : Alps Electric Co.,Ltd
 Equipment : Passive Keyless entry
 Model : TFWD1U625
 Sample No. : 5
 Power : DC 12.0V (Car battery)
 Mode : Transmitting (125kHz)
 EUT Position : X-axis (Max-axis)

Report No. : 24KE0135-HO
 Regulation : FCC Part15C Section 15.209
 Test Distance : 10m
 Date : 2004/8/27
 Temperature : 23deg.C
 Humidity : 65%
 ENGINEER : Mitsuru Fujimura

Frequency Range : 9-90kHz & 110-490kHz / AV & PK DETECT(Test Receiver: BW 200Hz or 9kHz)
Other Frequency Range : 490kHz-30MHz QP DETECT(Test Receiver: BW 9kHz)

| No. | FREQ [kHz] | Loop Max Angle [deg] | T/R detector type | T/R READING [dBuV] | ANT Factor | ATTEN [dB] | CABLE LOSS [dB] | AMP GAIN [dB] | RESULT [dBuV/m] | LIMIT [dBuV/m] | MARGIN [dB] |
|-----|------------|----------------------|-------------------|--------------------|------------|------------|-----------------|---------------|-----------------|----------------|-------------|
| 1 | 125.06 | 0 | PK | 75.9 | 19.9 | 5.8 | 0.6 | 26.6 | 75.6 | 104.7 | 29.1 |
| 1 | 125.06 | 45 | PK | 74.7 | 19.9 | 5.8 | 0.6 | 26.6 | 74.4 | 104.7 | 30.3 |
| 1 | 125.06 | 90 | PK | 74.6 | 19.9 | 5.8 | 0.6 | 26.6 | 74.3 | 104.7 | 30.4 |
| 1 | 125.06 | 0 | AV | 43.1 | 19.9 | 5.8 | 0.6 | 26.6 | 42.8 | 84.7 | 41.9 |
| 2 | 250.12 | 0 | PK | 37.9 | 19.9 | 5.8 | 0.3 | 27.1 | 36.8 | 98.7 | 61.9 |
| 2 | 250.12 | 0 | AV | 26.2 | 19.9 | 5.8 | 0.3 | 27.1 | 25.1 | 78.7 | 53.6 |
| 3 | 375.18 | 0 | PK | 37.1 | 19.9 | 5.8 | 0.4 | 27.4 | 35.8 | 95.2 | 59.4 |
| 3 | 375.18 | 0 | AV | 24.5 | 19.9 | 5.8 | 0.4 | 27.4 | 23.2 | 75.2 | 52.0 |
| 4 | 500.24 | 0 | QP | 29.3 | 19.9 | 5.8 | 0.7 | 27.6 | 28.1 | 52.7 | 24.6 |
| 5 | 625.30 | 0 | QP | 28.5 | 19.8 | 5.8 | 0.6 | 27.8 | 26.9 | 50.8 | 23.9 |
| 6 | 750.36 | 0 | QP | 28.1 | 19.8 | 5.8 | 0.7 | 27.9 | 26.5 | 49.2 | 22.7 |
| 7 | 875.42 | 0 | QP | 27.7 | 19.8 | 5.8 | 0.7 | 27.9 | 26.1 | 47.8 | 21.7 |
| 8 | 1000.48 | 0 | QP | 27.5 | 19.8 | 5.8 | 0.7 | 27.9 | 25.9 | 46.7 | 20.8 |
| 9 | 1125.54 | 0 | QP | 27.4 | 19.8 | 5.8 | 0.7 | 27.9 | 25.8 | 45.7 | 19.9 |
| 10 | 1250.60 | 0 | QP | 27.4 | 19.8 | 5.8 | 0.5 | 27.8 | 25.7 | 44.7 | 19.0 |

REMARKS

ANTENNA TYPE : 10kHz-30MHz (Loop Antenna)

CALCULATION: READING + ANT Factor + Cable Loss - AMP Gain

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

All other spurious emissions are more than 20dB below the limits.

Used Equipment: MLPA-01, MPA-04, MCC-(07+08+03),MAT-06,MTR-01

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124


MF060b(10.04.03)

-26dB bandwidth

UL Apex Co., Ltd.
Head Office EMC Lab. No.1 Semi Anechoic Chamber

| | | | |
|-----------|---------------------------------------|---------------|--------------------|
| COMPANY | : Alps Electric Co.,Ltd. | REPORT NO. | : 24KE0135-HO |
| EQUIPMENT | : Passive Entry System (Control Unit) | REGULATION | : - |
| MODEL | : TFWD1U625 | TEST DISTANCE | : 10 m |
| S/N | : 5 | DATE | : 08/27/2004 |
| FCC ID | : CWTWD1U625 | TEMPERATURE | : 24°C |
| POWER | : DC 12V | HUMIDITY | : 58% |
| MODE | : Transmitting | ENGINEER | : Mitsuru Fujimura |

| -26dB Bandwidth | |
|-----------------|------|
| [kHz] | 8.18 |

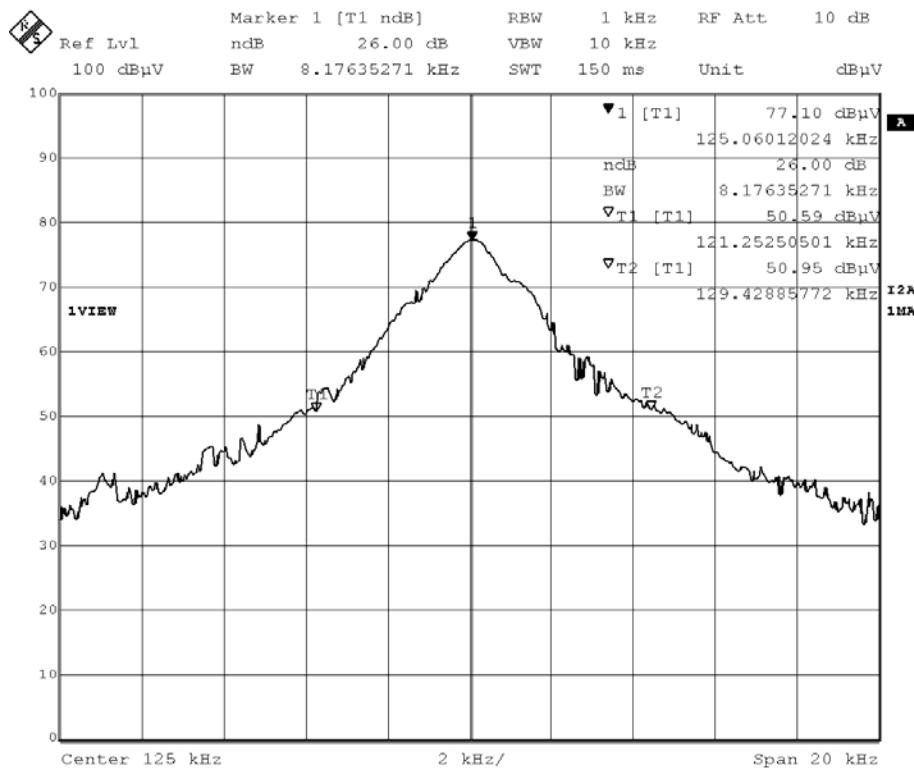

99% Occupied Bandwidth

UL Apex Co., Ltd.
Head Office EMC Lab. No.1 Semi Anechoic Chamber

COMPANY : Alps Electric Co.,Ltd.
 EQUIPMENT : Passive Entry System (Control Unit)
 MODEL : TFWD1U625
 S/N : 5
 FCC ID : CWTWD1U625
 POWER : DC 12V
 MODE : Transmitting

REPORT NO. : 24KE0135-HO
 REGULATION : RSS210
 TEST DISTANCE : 10 m
 DATE : 08/27/2004
 TEMPERATURE : 24°C
 HUMIDITY : 58%
 ENGINEER : Mitsuru Fujimura

| |
|------------------------|
| 99% Occupied Bandwidth |
| [kHz] |
| 6.33 |

