



EMI TEST REPORT

Test Report No. : 26IE0397-YK-A

Applicant : Alps Electric Co., Ltd.
Type of Equipment : Passive Entry System (Control Unit)
Model No. : TWD1U633
FCC ID : CWTWDU633
Test Standard : FCC Part15 Subpart B Section 15.109: 2006
FCC Part15 Subpart C Section 15.209: 2006
Test Result : Complied

1. This test report shall not be reproduced except in full, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this test report are traceable to the national or international standards.

Date of test: May 9 and 11, 2006

Tested by: M. Hosaka
Makoto Hosaka

Approved by: O. Watatani
Osamu Watatani
Site Manager of Yamakita EMC Lab.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

Table of Contents	Page
1 Applicant Information	3
2 Product Description	4
3 Test Specification, Procedures and Results	5
4 System Test Configuration	7
5 Radiated Emissions	8
6 26dB Bandwidth and Occupied Bandwidth	10
<u>Contents of Appendixes</u>	11
APPENDIX 1: Photographs of test setup	12
APPENDIX 2: Test Data	15
APPENDIX 3: Test instruments	24

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

1 Applicant Information

Company Name : Alps Electric Co., Ltd.
Address : 6-3-36 Nakazato, Furukawa, Osaki-shi, Miyagi-ken, 989-6181 JAPAN
Telephone Number : +81-229-23-5111
Facsimile Number : +81-229-23-3755
Contact Person : Katsuhiko Seino

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

2 Product Description

Type of Equipment : Passive Entry System (Control Unit)
Model No. : TWD1U633
Serial No. : 20060508
Rating : DC12V (Car Battery)
Country of Manufacture : Japan
Receipt Date of Sample : May 9, 2006
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

Model: TWD1U633 (referred to as the EUT in this report) is a Control Unit of Passive Entry System. The Passive Entry System is a system which locks, unlocks and can start engine only with the intelligent-key of the vehicle.

Equipment type : Transceiver
Operation temperature range : -30 ~ +80 deg. C.
Other clock frequency : 32.768kHz, 16MHz, 65.14MHz (Crystal)
Emission designation : A1D

Tx section

Frequency of operation : 125kHz
Modulation : Amplitude
Antenna type : External Bar antenna

Rx section

Frequency of operation : 315MHz
Intermediate frequency : 10.7MHz
Local frequency : 325.7MHz
Type of receiver : Super Heterodyne
Antenna type : Internal Bar antenna

FCC Part15.31 (e)

The power supply of the EUT is transformed to DC5.0V and provides stable voltage, DC5.0V constantly to Radio part. Therefore, the EUT complies with the power supply regulation.

FCC Part15.111 (b)

The receiving antenna is installed inside the EUT and cannot be removed. Therefore, the EUT complies with the requirement.

FCC Part15.203 Antenna requirement

It is impossible for users to replace the antenna because the antenna is a set with EUT and installed outside of the EUT inside the vehicle. Therefore, the EUT complies with the antenna requirement.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

3 Test Specification, Procedures and Results

3.1 Test specification

Test Specification : FCC Part 15 Subpart B: 2006
 Title : FCC 47CFR Part 15 Radio Frequency Device
 Subpart B Unintentional Radiators
 Test specification : FCC Part15 Subpart C: 2006
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.209 Radiated emission limits, general requirements

3.2 Procedures & Results

<Part 15 Subpart B>

Item	Test Procedure	Limits	Deviation	Worst margin	Result
Conducted emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	FCC §15.107(a) & 207	N/A *1	N/A	N/A
Radiated emission	ANSI C63.4: 2003 8. Radiated emission measurements	FCC §15.109(a)	N/A	19.4dB (299.99MHz, QP, Vertical)	Complied
Antenna power conduction for receivers	ANSI C63.4: 2003 12.1.5 Antenna-conducted power measurements	FCC §15.111(a)	N/A *2	N/A	N/A

<Part 15 Subpart C>

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted Emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Section 15.207(a)	AC Mains	N/A *1	-	N/A
Electric Field Strength of Fundamental Emission	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section 15.209	Radiated	N/A	18.5dB (PK, Horizontal)	Complied
Electric Field Strength of Spurious Emission	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section 15.205 & 209	Radiated	N/A	4.2dB (54.88MHz, QP, Vertical)	Complied
-26dB Bandwidth	ANSI C63.4: 2003 Annex H.6 Occupied bandwidth measurements	-	Radiated	N/A	-	Complied

*1) The test is not applicable since the EUT has no AC mains.

*2) The test is not applicable to the EUT since the EUT does not have antenna port.

Note: UL Apex's EMI Work Procedures No.QPM05.

3.3 Addition to standard

No addition, deviation or exclusion has been made from the standard.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

3.4 Uncertainty

Radiated emission

The measurement uncertainty (with 95% confidence level) for this test using Loop antenna is ± 2.3 dB.
The measurement uncertainty (with 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.
The measurement uncertainty (with 95% confidence level) for this test using Logperiodic antenna is ± 4.3 dB.
The measurement uncertainty (with 95% confidence level) for this test using Horn antenna is ± 5.2 dB.

The data listed in this report meets the limits, unless the uncertainty is taken into consideration.

3.5 Test Location

UL Apex Co., Ltd. Yamakita EMC Lab.
907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN
Telephone number : +81 465 77 1011
Facsimile number : +81 465 77 2112
NVLAP Lab. code : 200441-0

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on August 26, 2005 (Registration No.: 95486).

IC Registration No. : IC3489A

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on April 4, 2005 (Registration No.: 466226).

IC Registration No. : IC3489A-2

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on November 2, 2005 (Registration No.: 95967).

IC Registration No. : IC3489A-B

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1 EMS lab. (Semi-anechoic chamber)	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5		
No.3 shielded room	4.0 x 5.0 x 2.7		

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112


4 System Test Configuration

4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode: Transmitting mode
 Receiving mode

4.2 Configuration of Tested System

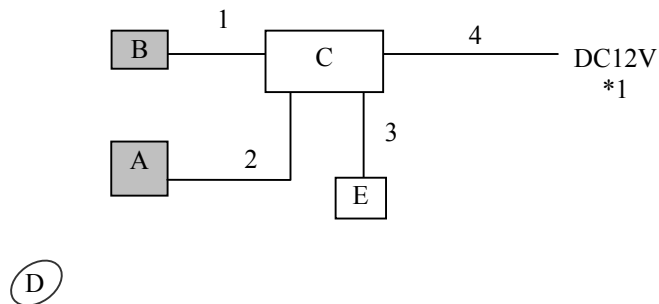

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID (Remarks)
A	Passive Entry System (Control Unit)	TWD1U633	20060508	Alps Electric Co., Ltd.	CWTWDU633 (EUT)
B	Bar Antenna	-	-	Alps Electric Co., Ltd.	(EUT)
C	Checker Box	-	-	Alps Electric Co., Ltd.	-
D	Passive Entry System (Hand Unit)	TWB1U735	-	Alps Electric Co., Ltd.	CWTWBU735
E	Checker CW	-	-	Alps Electric Co., Ltd.	-

*1) DC Power Supply (Model No.: PAN35-10A) was used for DC 12V input.

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Antenna cable	1.6	Unshielded	Unshielded	-
2	Signal & DC power cable	0.9	Unshielded	Unshielded	-
3	Cable for Checker PWB	0.3	Unshielded	Unshielded	-
4	DC power cable	1.1	Unshielded	Unshielded	-

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

5 Radiated Emissions

5.1 Operating environment

The test was carried out in No.1 anechoic chamber.

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane. A drawing of the set up is shown in the photos of Appendix 1.

5.3 Test conditions

Frequency range and EUT operation mode : 30MHz - 2GHz (Receiving (Part 15 Subpart B))
9kHz - 1GHz (Transmitting (Part 15 Subpart C))
Test distance : 3m

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

5.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

<Part 15 Subpart B>

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Detector	QP	PK/AV
IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz AV: RBW: 1MHz/VBW: 10Hz

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

<Part 15 Subpart C>

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz
Detector Type	PK/AV	QP	PK/AV	QP	QP
IF Bandwidth	200Hz	200Hz	9kHz	9kHz	120kHz

The equipment and its antenna were previously checked at each position of three axes X, Y and Z. The position in which the maximum noise occurred was chosen to put into measurement. See the table below and photographs in page 14. With the position, the noise levels of all the frequencies were measured.

	EUT	EUT's antenna
Horizontal	Z	X
Vertical	Z	X

5.5 Results

<Part 15 Subpart B>

Summary of the test results : Pass
 Test data : APPENDIX 2 Page 15 to 17
 Date : May 11, 2006 Test engineer : Makoto Hosaka

<Part 15 Subpart C>

Summary of the test results : Pass
 Test data : APPENDIX 2 Page 18 to 19 (Fundamental and Harmonics)
 : APPENDIX 2 Page 20 to 21 (Other)
 Date : May 9 and 11, 2006 Test engineer : Makoto Hosaka

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

6 26dB Bandwidth and Occupied Bandwidth

6.1 Operating environment

The test was carried out in No.1 anechoic chamber.

6.2 Test procedure

The bandwidth was measured with a spectrum analyzer and an antenna which is placed by the EUT.

-26dB Bandwidth : 7.41kHz
Occupied Bandwidth (99%) : 5.89kHz

6.3 Results

Summary of the test results : Pass
Test data : APPENDIX 2 Page 22 to 23

Date : May 9, 2006 Test engineer : Makoto Hosaka

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

APPENDIX 1: Photographs of test setup

Page 12	:	Radiated emission (Receiving)
Page 13	:	Radiated emission (Transmitting)
Page 14	:	Pre-check of the worst position

APPENDIX 2: Test Data

Page 15 - 21	:	Radiated emission
		Receiving (Part 15 Subpart B)
15	:	30 - 1000MHz
16 - 17	:	1 - 2GHz
		Transmitting (Part 15 Subpart C)
18 - 19	:	Fundamental and Harmonics
20 - 21	:	Other
Page 22	:	26dB bandwidth
Page 23	:	Occupied bandwidth

APPENDIX 3: Test instruments

Page 24	:	Test instruments
---------	---	------------------

UL Apex Co., Ltd.



YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

Radiated emission (Receiving)

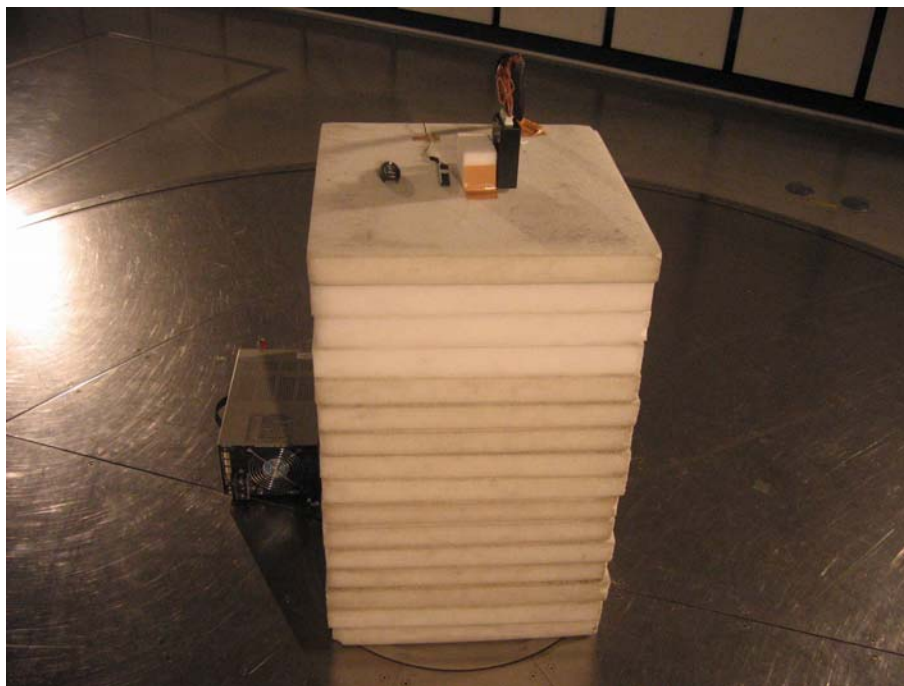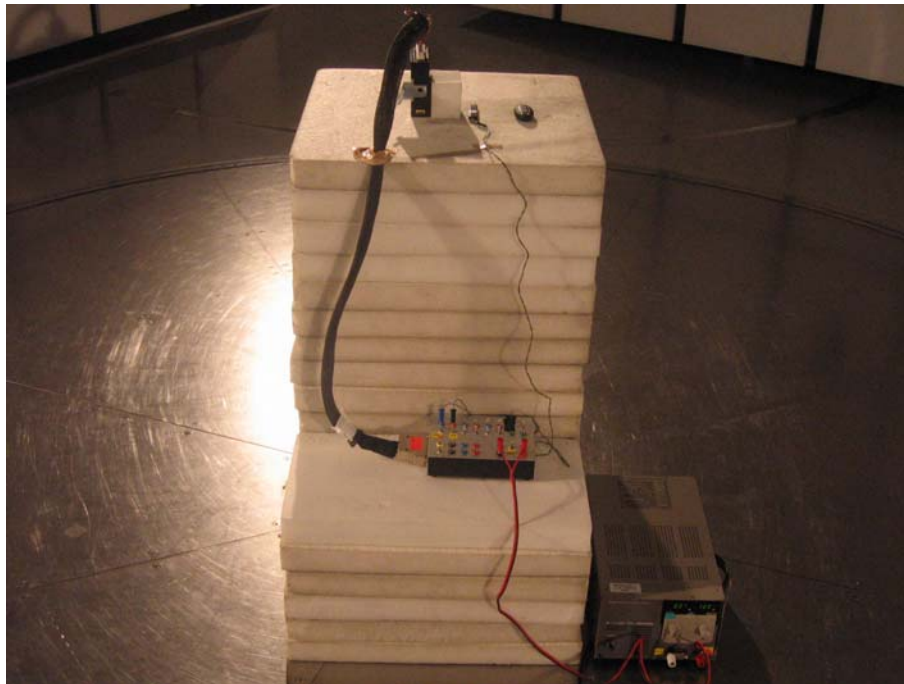

UL Apex Co., Ltd.



YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

Radiated emission (Transmitting)

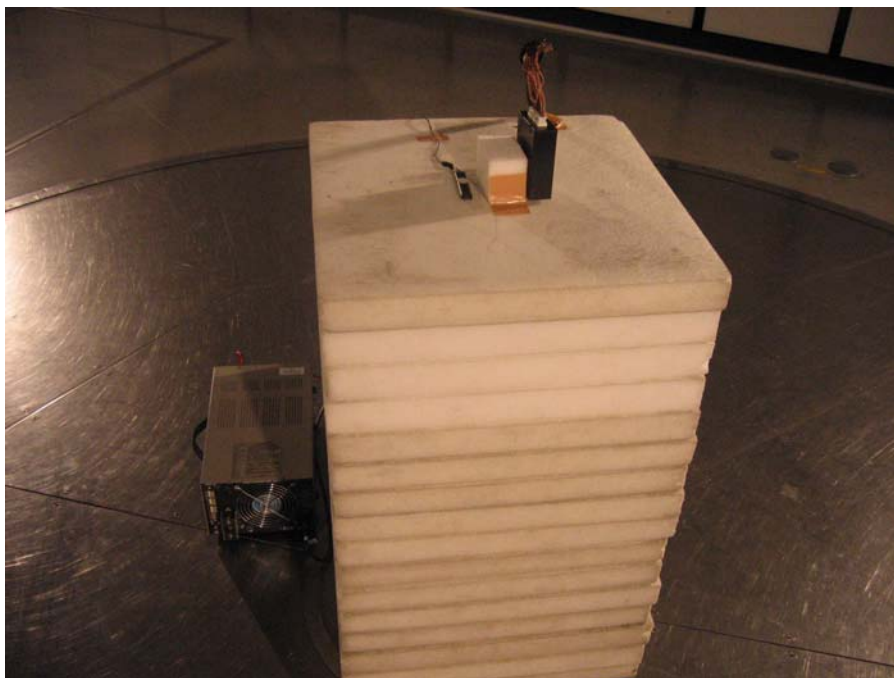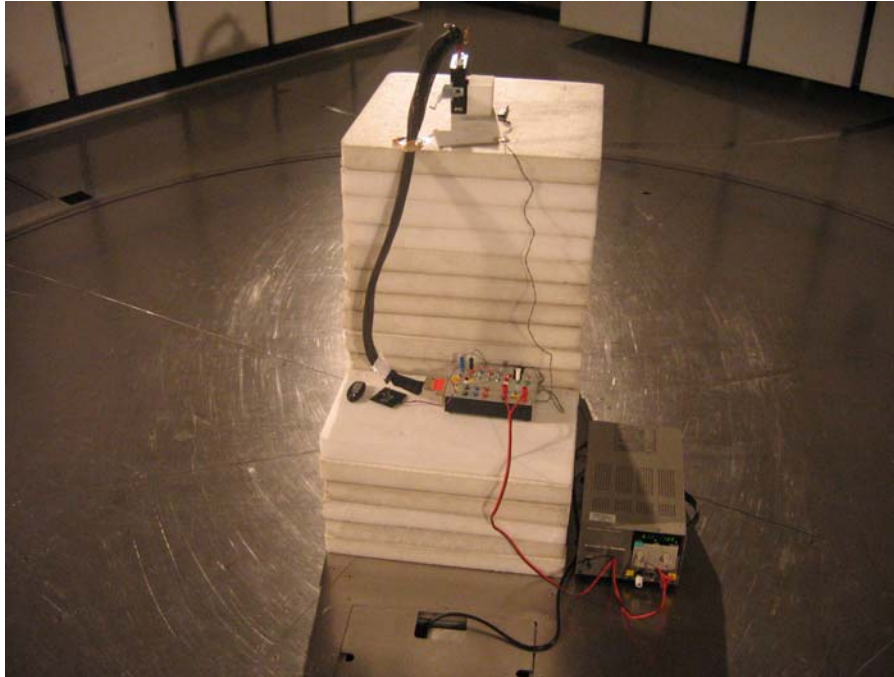

UL Apex Co., Ltd.






YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

Pre-check of worst position

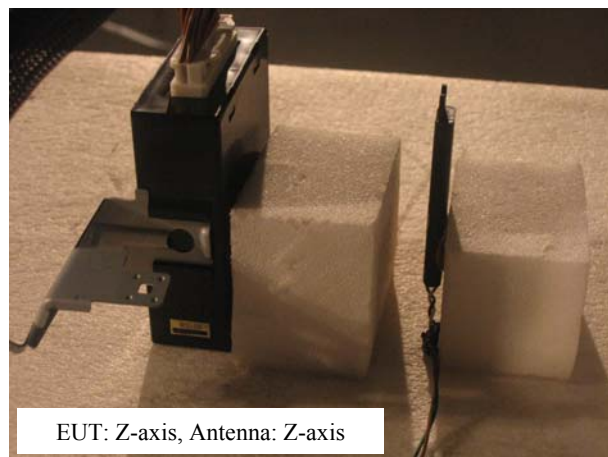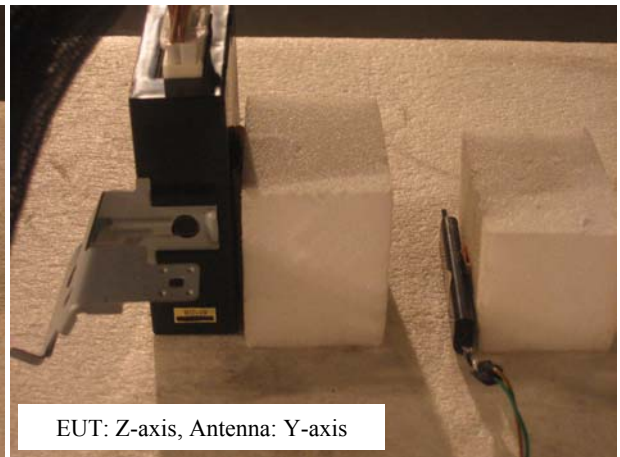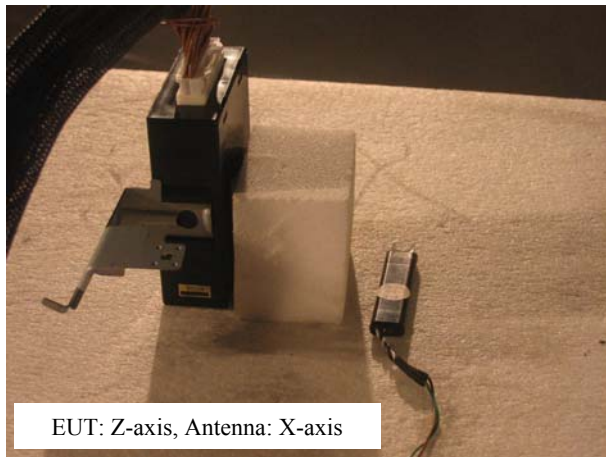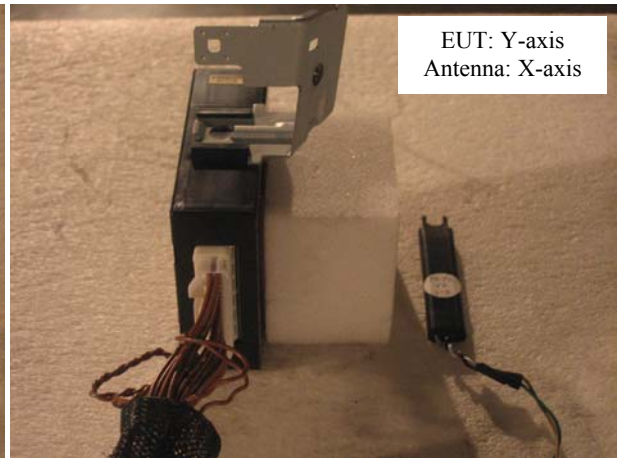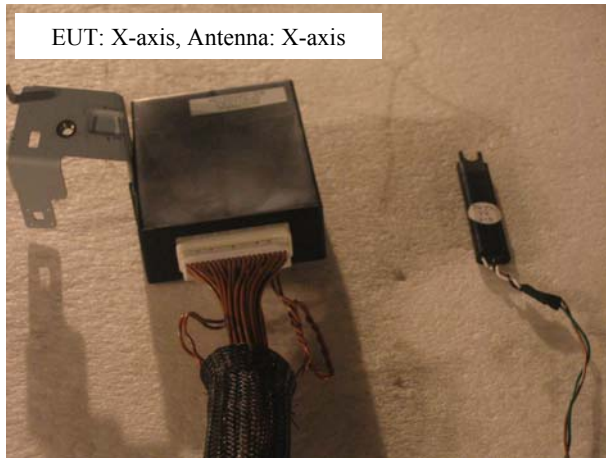

DATA OF RADIATION TEST

UL Apex Co.,Ltd.
YAMAKITA No.1 ANECHOIC CHAMBER
Report No. : 261E0397-YK - A

Applicant : Alps Electric Co., Ltd.
 Kind of Equipment : Passive Entry System (Control Unit)
 Model No. : TWD1U633
 Serial No. : 20060508
 Power : DC12V
 Mode : Receiving
 Remarks :
 Date : 5/11/2006
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 52 %
 Regulation : FCC Part15B § 15.109(a)

Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	48.00	BB	21.9	26.8	12.0	28.5	1.4	6.0	12.8	17.7	40.0	27.2	22.3
2.	80.00	BB	21.7	27.7	7.2	28.5	1.8	6.0	8.2	14.2	40.0	31.8	25.8
3.	299.99	BB	23.6	24.0	20.6	27.7	3.7	6.0	26.2	26.6	46.0	19.8	19.4
4.	325.70	BB	21.6	20.6	15.6	27.8	4.0	6.0	19.4	18.4	46.0	26.6	27.6
5.	651.40	BB	21.5	21.6	19.9	29.1	5.6	6.0	23.9	24.0	46.0	22.1	22.0
6.	977.10	BB	20.7	20.7	23.8	28.6	7.0	6.1	29.0	29.0	54.0	25.0	25.0

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz
 ■ CABLE: KCC-30/31/32/34 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.
YAMAKITA No.1 ANECHOIC CHAMBER
Report No. : 261E0397-YK - A

Applicant : Alps Electric Co., Ltd.
Kind of Equipment : Passive Entry System (Control Unit)
Model No. : TWD1U633
Serial No. : 20060508
Power : DC12V
Mode : Receiving
Remarks : PK RBW:1MHz, VBW:1MHz
Date : 5/11/2006
Test Distance : 3 m
Temperature : 21 °C
Humidity : 52 %
Regulation : FCC Part15B CLASS B(PK)
Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]	HOR [dB]	VER [dB]		
1.	1037.07	BB	48.5	47.5	24.3	37.7	3.1	0.0	38.2	37.2	74.0	35.8	36.8	
2.	1302.80	BB	45.4	46.3	24.7	37.2	3.4	0.0	36.3	37.2	74.0	37.7	36.8	

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA:KHA-01 (SAS-200 571)

■ CABLE:KCC-D7/D13 ■ PREAMP:KAF-02 (8447B) ■ SPECTRUM ANALYZER:KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.
YAMAKITA No.1 ANECHOIC CHAMBER
Report No. : 261E0397-YK - A

Applicant : Alps Electric Co., Ltd.
 Kind of Equipment : Passive Entry System (Control Unit)
 Model No. : TWD1U633
 Serial No. : 20060508
 Power : DC12V
 Mode : Receiving
 Remarks : AV RBW:1MHz, VBW:10Hz
 Date : 5/11/2006
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 52 %
 Regulation : FCC Part15B § 15.109(a)

Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	1037.07	BB	35.5	35.5	24.3	37.7	3.1	0.0	25.2	25.2	54.0	28.8	28.8
2.	1302.80	BB	34.3	34.4	24.7	37.2	3.4	0.0	25.2	25.3	54.0	28.8	28.7

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA:KHA-01 (SAS-200 571)
 ■ CABLE:KCC-D7/D13 ■ PREAMP:KAF-02 (8447B) ■ SPECTRUM ANALYZER:KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.
YAMAKITA No.1 ANECHOIC CHAMBER
Report No. : 261E0397-YK - A

Applicant : Alps Electric Co., Ltd.
 Kind of Equipment : Passive Entry System (Control Unit)
 Model No. : TWD1U633
 Serial No. : 20060508
 Power : DC12V
 Mode : Transmitting
 Remarks : PK
 Date : 5/9/2006
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 44 %
 Regulation : FCC Part15C § 15.209 9KHz-490kHz (3m) Pk
 Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	0.13	BB	108.8	105.7	19.4	26.7	0.1	5.2	106.8	103.7	125.3	18.5	21.6
2.	0.25	BB	63.0	57.1	19.4	27.6	0.1	6.0	60.9	55.0	119.6	58.7	64.6
3.	0.38	BB	58.5	55.5	19.4	28.1	0.1	6.0	55.9	52.9	116.0	60.1	63.1

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KLP-01 (HFH2-Z2)

■ CABLE: KCC-30/31/32/34 ■ PREAMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 261E0397-YK - A

Applicant : Alps Electric Co., Ltd.
Kind of Equipment : Passive Entry System (Control Unit)
Model No. : TWD1U633
Serial No. : 20060508
Power : DC12V
Mode : Transmitting
Remarks : AV
Date : 5/9/2006
Test Distance : 3 m
Temperature : 24 °C Engineer : Makoto Hosaka
Humidity : 44 %
Regulation : FCC Part15C § 15.209 9KHz-30MHz (3m)

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	0.13	BB	86.6	83.5	19.4	26.7	0.1	5.2	84.6	81.5	105.3	20.7	23.8
2.	0.25	BB	49.6	44.6	19.4	27.6	0.1	6.0	47.5	42.5	99.6	52.1	57.1
3.	0.38	BB	46.1	42.4	19.4	28.1	0.1	6.0	43.5	39.8	96.0	52.5	56.2

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KLP-01 (HFH2-Z2)

■ CABLE: KCC-30/31/32/34 ■ PREAMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140)

Page:

DATA OF RADIATION TEST

UL Apex Co.,Ltd.
YAMAKITA No.1 ANECHOIC CHAMBER
Report No. : 261E0397-YK-A

Applicant : Alps Electric Co., Ltd.
 Kind of Equipment : Passive Entry System (Control Unit)
 Model No. : TWD1U633
 Serial No. : 20060508
 Power : DC12V
 Mode : Transmitting
 Remarks : QP
 Date : 5/9/2006
 Test Distance : 3 m
 Temperature : 24 °C
 Humidity : 44 %
 Regulation : FCC Part15C § 15.209 9KHz-30MHz (3m)
 Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER					HOR [dB μ V/m]	VER		HOR [dB]	VER
1.	0.50	BB	29.2	31.6	19.4	28.2	0.1	6.0	26.5	28.9	73.6	47.1	44.7
2.	0.63	BB	47.6	43.0	19.4	28.4	0.2	6.0	44.8	40.2	71.6	26.8	31.4
3.	0.75	BB	28.0	28.2	19.4	28.4	0.2	6.0	25.2	25.4	70.1	44.9	44.7
4.	0.88	BB	41.7	37.4	19.4	28.3	0.2	6.0	39.0	34.7	68.7	29.7	34.0
5.	1.00	BB	35.9	30.1	19.4	28.3	0.2	6.0	33.2	27.4	67.6	34.4	40.2
6.	1.13	BB	34.5	34.0	19.4	28.3	0.2	6.0	31.8	31.3	66.5	34.7	35.2
7.	1.25	BB	29.0	27.9	19.4	28.4	0.2	6.0	26.2	25.1	65.7	39.5	40.6
8.	18.88	BB	35.5	46.2	20.1	28.5	0.8	6.0	33.9	44.6	69.5	35.6	24.9
9.	22.50	BB	44.3	55.0	20.5	28.4	0.9	6.0	43.3	54.0	69.5	26.2	15.5
10.	28.75	BB	37.7	49.8	21.1	28.5	1.1	6.0	37.4	49.5	69.5	32.1	20.0

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KLP-01 (HFH2-Z2)

■ CABLE: KCC-30/31/32/34 ■ PREAMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.
YAMAKITA No.1 ANECHOIC CHAMBER
Report No. : 261E0397-YK

Applicant : Alps Electric Co., Ltd.
 Kind of Equipment : Passive Entry System (Control Unit)
 Model No. : TWD1U633
 Serial No. : 20060508
 Power : DC12V
 Mode : Transmitting
 Remarks :
 Date : 5/11/2006
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 52 %
 Regulation : FCC Part15C § 15. 209

Engineer : Makoto Hosaka

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER					HOR [dB μV/m]	VER		HOR [dB]	VER
1.	30.88	BB	23.1	36.2	19.6	28.5	1.1	6.0	21.3	34.4	40.0	18.7	5.6
2.	46.75	BB	31.8	44.1	12.4	28.5	1.3	6.0	23.0	35.3	40.0	17.0	4.7
3.	54.88	BB	35.1	46.6	10.2	28.5	1.5	6.0	24.3	35.8	40.0	15.7	4.2
4.	80.00	BB	32.5	47.1	7.2	28.5	1.8	6.0	19.0	33.6	40.0	21.0	6.4
5.	86.88	BB	29.3	43.3	8.4	28.4	1.9	6.1	17.3	31.3	40.0	22.7	8.7
6.	104.00	BB	33.2	45.2	11.6	28.4	2.1	6.1	24.6	36.6	43.5	18.9	6.9

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz
 ■ CABLE: KCC-30/31/32/34 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

-26dB Bandwidth


COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Passive Entry System (Control Unit)
MODEL NUMBER: TWD1U633
SERIAL NUMBER: 20060508
FCC ID : CWTWDU633
POWER : DC12V

UL Apex Co.,Ltd. Yamakita No.1 Anchoic Chamber
REPORT NO : 26IE0397-YK-A
REGULATION : -
DATE : 2006/05/09
TEMP./HUMI : 24deg.C./44%
TEST MODE : Transmitting
ENGINEER : Makoto Hosaka

-26dB Bandwidth [kHz]	Bandwidth Limit [kHz]
7.41	-



Ref Lvl 117 dBμV
 RBW 1 kHz RF Att 40 dB
 VBW 10 kHz
 SWT 150 ms Unit dBμV

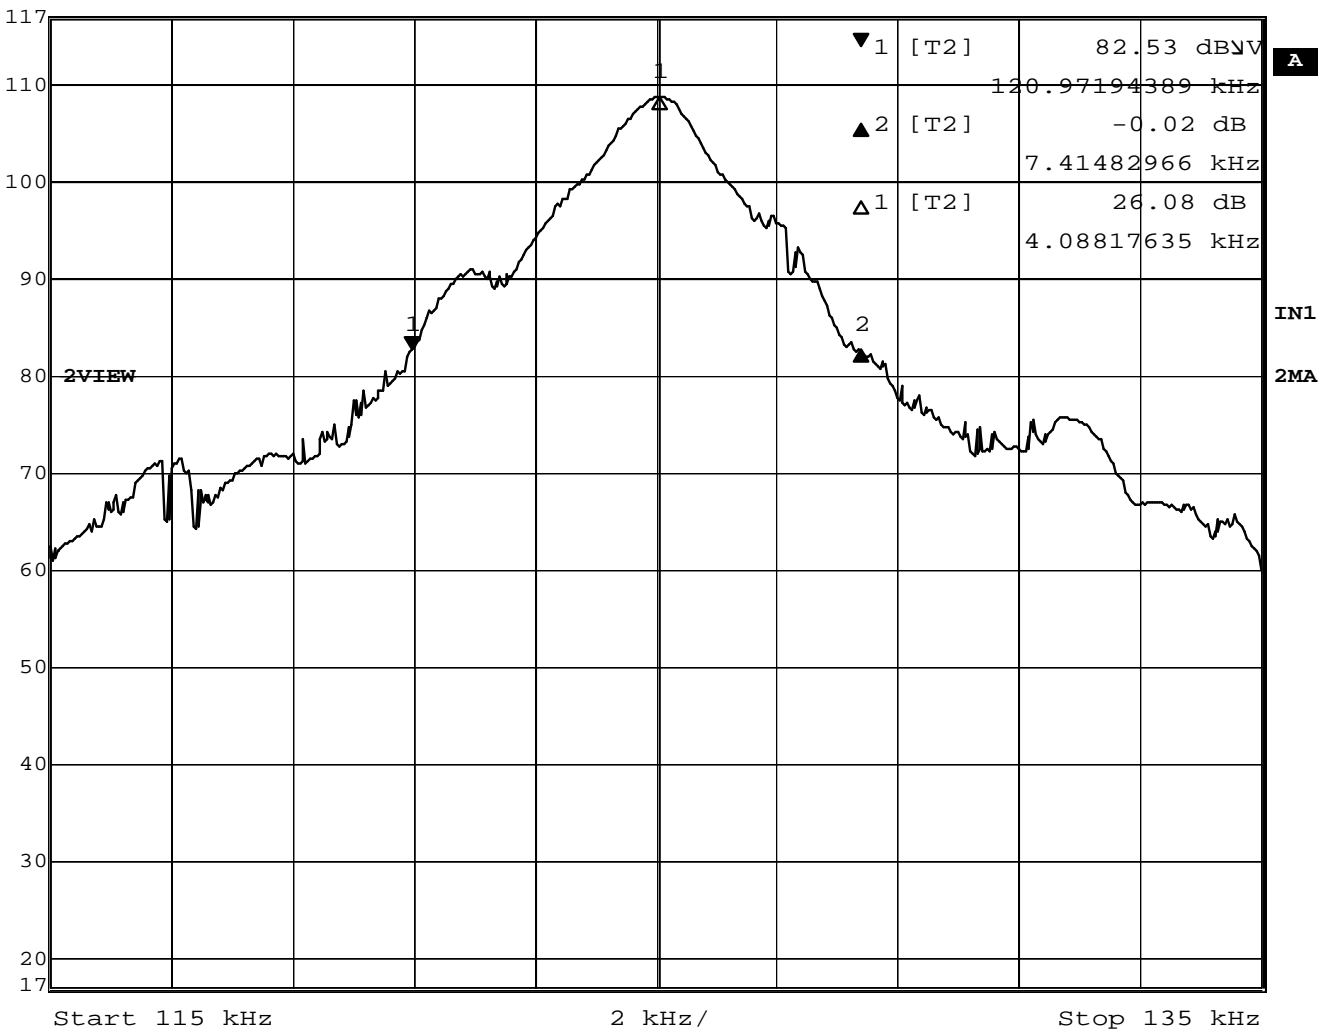

Date: 9.MAY.2006 18:26:31


Occupied Bandwidth(99%)

COMPANY : Alps Electric Co., Ltd. EQUIPMENT : Passive Entry System (Control Unit) MODEL NUMBER : TWD1U633 SERIAL NUMBER : 20060508 FCC ID : CWTWDU633 POWER : DC12V	UL Apex Co.,Ltd. Yamakita No.1 Anchoic Chamber REPORT NO : 26IE0397-YK-A REGULATION : - DATE : 2006/05/09 TEMP./HUMI : 24deg.C./44% TEST MODE : Transmitting ENGINEER : Makoto Hosaka
--	--

99% Occupied Bandwidth
[kHz]
5.89



Ref Lvl	Marker 1 [T2]	RBW	1 kHz	RF Att	40 dB
117 dBμV	108.61 dBμV	VBW	10 kHz	SWT	150 ms
	125.06012024 kHz	Unit			dBμV

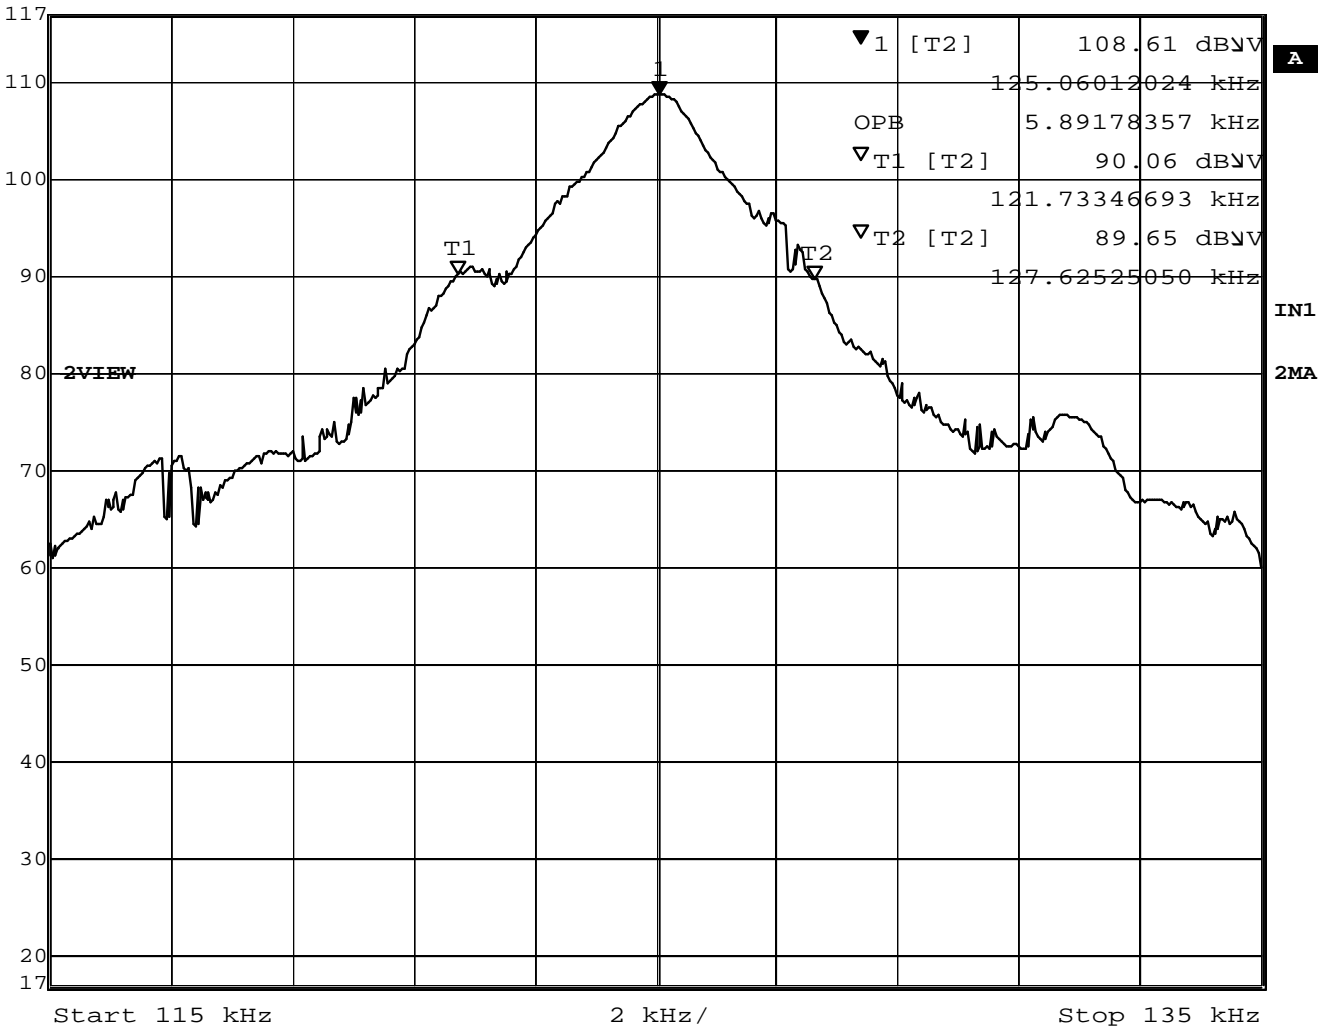

Date: 9.MAY.2006 18:18:39

Test Report No : 26IE0397-YK-A

APPENDIX 3 Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
YA-RE	Radiated emission(software)	UL-Apex	RE(Ver.1.5)	RE	
KAEC-01(NSA)	Anechoic Chamber	JSE	Semi 3m	RE, BW	2005/09/03 * 12
KAF-05	Pre Amplifier	Agilent	8447D	RE 1,2,3	2006/04/21 * 12
KAT6-01	Attenuator	INMET	18N-6dB	RE 1,2,3	2006/03/24 * 12
KBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE 1,3	2006/01/17 * 12
KCC-30/31/32 /34/KRM-03	Coaxial Cable/RF Relay Matrix	Fujikura/Suhner/TSJ	5D-2W/S04272B/RF M-E421	RE 1,2,3	2005/12/22 * 12
KLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE 1,3	2006/01/17 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	RE 1,2,3	2005/09/13 * 12
KTR-01	Test Receiver	Rohde & Schwarz	ESJ40	RE 1,2,3,BW	2005/08/05 * 12
KOS-02	Digital Humidity Indicator	Custom	CTH-190	RE,	2004/07/22 * 24
KBM-01	Barometer	SATO	7610-20	RE, BW	2004/08/09 * 60
KAF-02	Pre Amplifier	Hewlett Packard	8449B	RE 1	2006/04/24 * 12
KCC-D7/D13	Coaxial cable	Advantest/Suhner	A01002/SUCOFLEX1 04	RE 1	2006/04/11 * 12
KHA-01	Horn Antenna	A.H.Systems	SAS-200/571	RE 1	2005/08/20 * 12
KLP-01	Loop Antenna	Rohde & Schwarz	HFH2-Z2	RE 2	2005/06/17 * 12
KCC-D7	Coaxial Cable	Advantest	A01002	BW	2006/04/11 * 12
KOS-01	Digital Humidity Indicator	Custom	CTH-190	BW	2004/08/19 * 24

All equipment is calibrated with traceable calibrations . Each calibration is traceable to the national or international standards .

Test Item :

- RE: Radiated emission
 - 1: Receiving
 - 2: Transmitting (9kHz-30MHz)
 - 3: Transmitting (30-1000MHz)
- BW: Bandwidth