



849 NW STATE ROAD 45  
 NEWBERRY, FL 32669 USA  
 PH: 888.472.2424 OR 352.472.5500  
 FAX: 352.472.2030  
 EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**AMPLIFIER  
 FCC Part 90 & IC RSS-131  
 TEST REPORT**

Applicant	CRESCEND TECHNOLOGIES, LLC
Address	140 E. State Parkway SCHAUMBURG IL 60173 USA
FCC ID	CWWP2RTK450
IC LABEL	7291A-P2RTK450
Model Number	P2-RTK-450
Product Description	25W ONE-WAY AMPLIFIER
Standards Applied	CFR 47 Part 90 IC Standard RSS-131, Issue 2, July 2003 IC Standard RSS-GEN, Issue 4, November 14
Date Sample Received	4/30/2015
Date Report Issued	5/6/2015
Date Tested	5/1/2015
Tested By	Sid Sanders
Approved By	Cory Leverett
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Version Number	Description	Issue Date
820AUT15TestReport.docx	Rev.1	Initial Issue	5/6/2015

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
 WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

GENERAL REMARKS.....	3
EUT DESCRIPTION .....	4
TEST REPORT SUMMARY .....	5
TEST RESULTS .....	6
RF POWER OUTPUT .....	6
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) .....	14
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) .....	15
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) .....	16
FIELD STRENGTH OF SPURIOUS EMISSIONS - RADIATED .....	17
EQUIPMENT LIST .....	19

Applicant: CRESCEND TECHNOLOGIES, LLC  
FCC ID: CWWP2RTK450  
IC: 7291A-P2RTK450  
Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

### Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report  
 Not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made, under my supervision, at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**

### Authorized Signatory Name:



Sid Sanders  
Engineering Project Manager

**Date: 5/6/2015**

### [Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
FCC ID: CWWP2RTK450  
IC: 7291A-P2RTK450  
Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## EUT DESCRIPTION

<b>EUT Description</b>	25W ONE-WAY AMPLIFIER
<b>FCC ID</b>	CWWP2RTK450
<b>IC</b>	7291A-P2RTK450
<b>Model Number</b>	P2-RTK-450
<b>Operating Frequency</b>	450 to 470MHz
<b>Test Frequencies</b>	450.025, 460, & 469.075 MHz
<b>Type of Emission</b>	F1D
<b>Modulation</b>	C4FM
<b>EUT Power Source</b>	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input checked="" type="checkbox"/> DC Power 12V
	<input type="checkbox"/> Battery Operated Exclusively
<b>Test Item</b>	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable
<b>Test Conditions</b>	The temperature was 24- 26°C with a relative humidity of 50 - 65%.
<b>Revision History to the EUT</b>	None
<b>Test Exercise</b>	The EUT was operated in a normal mode.
<b>Requirements</b>	FCC CFR 47 PART 90, IC STANDARD RSS-131 ISS.2
<b>Test Standards</b>	ANSI/TIA 603-D:2010, ANSI C63.4: 2003 , RSS-131 I.2 Iss. 2
<b>Test Facility</b>	<b>Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA.</b>

### [Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## TEST REPORT SUMMARY

Rule Part No.	Scope of Work	Status Pass/Fail/NA
<a href="#">Part 2.1033(c)(8)</a> , <a href="#">Part 2.1046(a)</a> , <a href="#">Part 90</a> <a href="#">RSS-131 Para. 6.2</a>	RF Power Output	PASS
<a href="#">RSS-131 Para. 4.2</a>	20dB PASSBAND	PASS
<a href="#">RSS-131 Para. 6.3.3</a>	99% BANDWIDTH	PASS
<a href="#">RSS-131 Para. 6.3.</a>	BANDWIDTH NON-LINEARITY:	PASS
<a href="#">Part 2.1033(c) (4)</a> <a href="#">Part 2.1047(a)(6)</a>	Modulation Characteristics	PASS
<a href="#">2.1051(a)</a>  <a href="#">RSS-131Para 6.4</a>	Antenna Conducted Emissions	PASS
<a href="#">2.1053</a> , <a href="#">Part 90</a>	Field Strength Spurious Emissions	PASS

[Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx


## TEST RESULTS

### RF POWER OUTPUT

**Rule Part No.:** Pt 2.1046(a), Pt 90.205, Pt 90.210, RSS-131

**Requirements:** Pt 2.1046(a), Pt 90, Pt 90.210, RSS-131 Para. 6.2 & 4.3.2

**Method of Measurement:** The RF power output was measured at the antenna feed point using a Average power meter. A 50-ohm, resistive wattmeter was connected to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

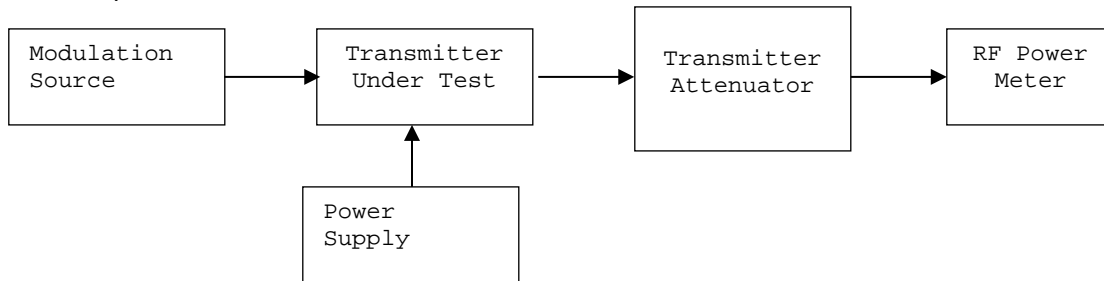

**Test Data:** Power = 42.16 Watts

DC Power Consumption

Vdc = 13.6

Ic = 3.1

Frequency MHz	Input dBm	Output dBm	Output W	Gain dB
450	34.08	43.90	24.5	9.8
460	34.36	44.4	27.5	9.84
470	34.71	44.76	29.91	10.05

### Gain Variation in Passband

**Rule Part No.;** RSS – 131 Para. 6.1

Requirement: The passband Gain shall not exceed the Nominal gain by more than 1.0dB.



Results: Less than 0.76dB.

### [Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## PASS BAND 20dB BANDWIDTH:

Requirements: RSS-131 Para. 4.2,

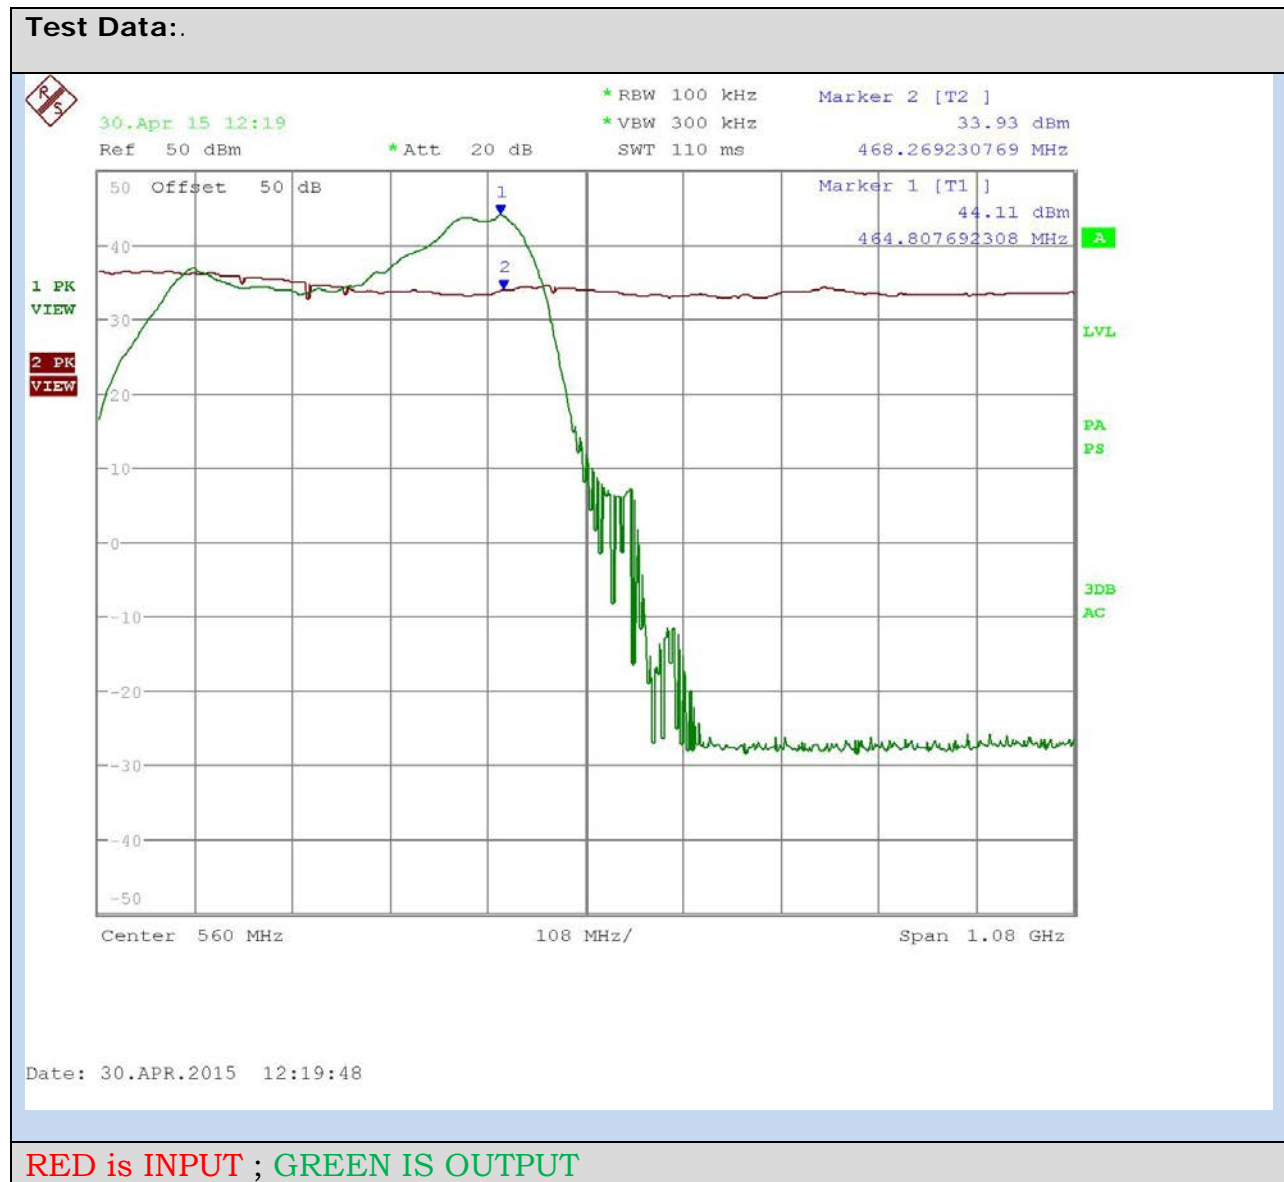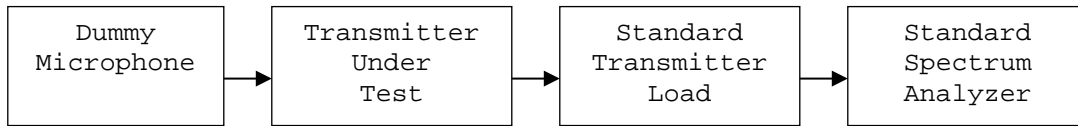

Result Meets The Requirement



[Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

**OCCUPIED BANDWIDTH 99% at OUTPUT:**

**Requirements: RSS-131 Para. 6.3.3**


**Measurement Method: ANSI/TIA-603-C:2004 para 2.2.11.**

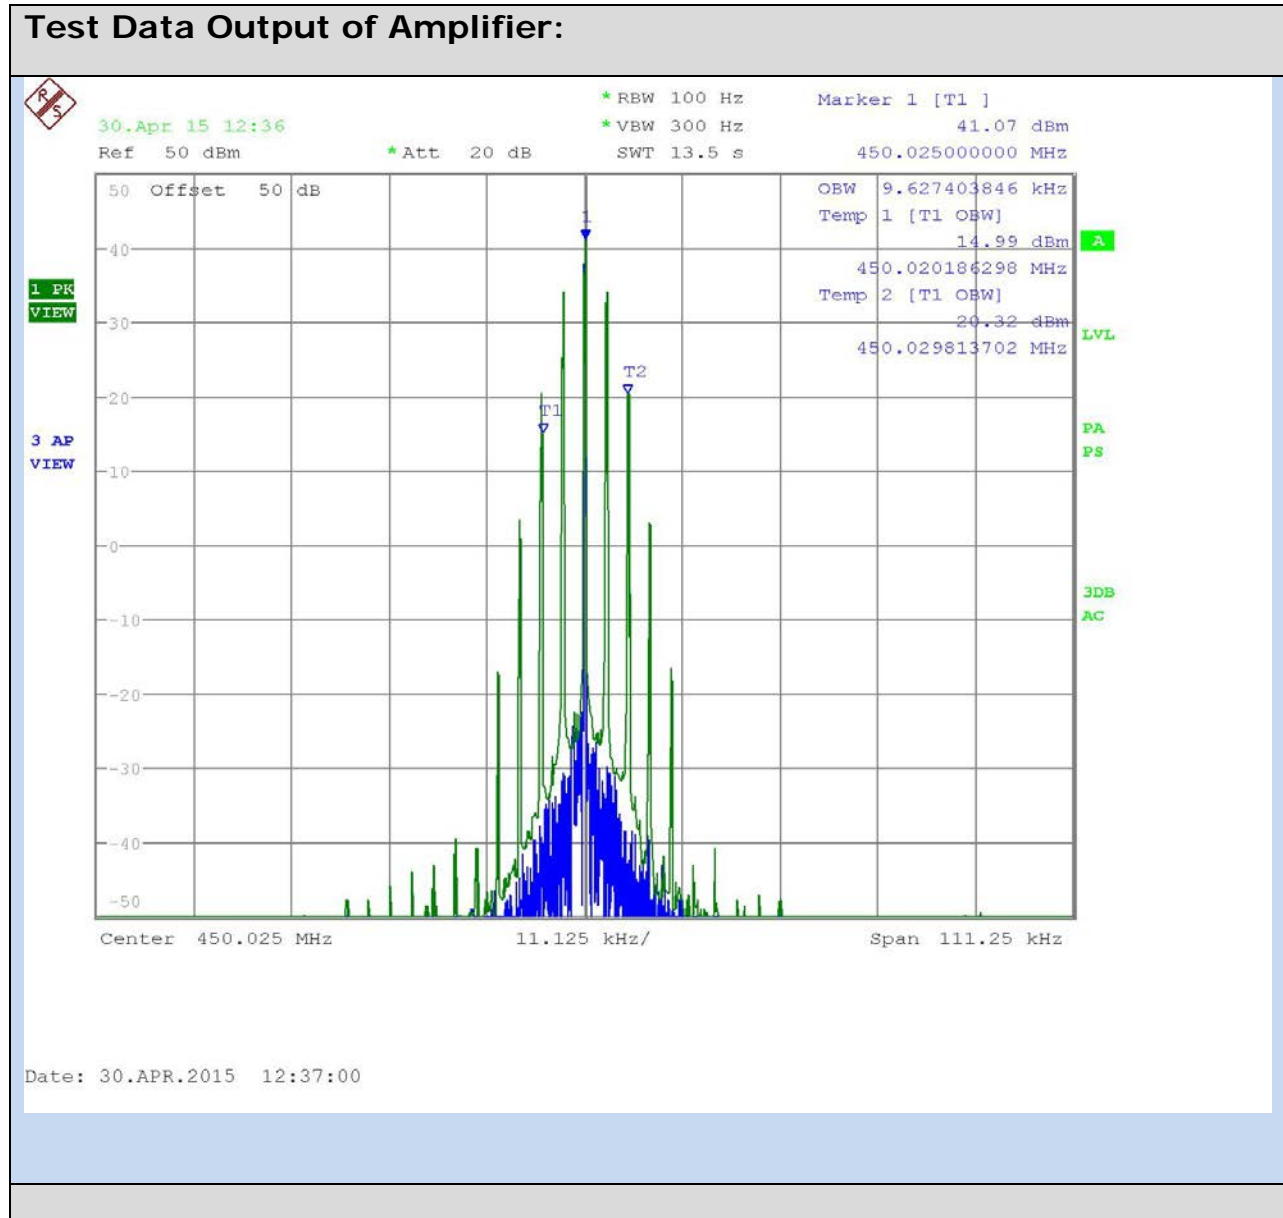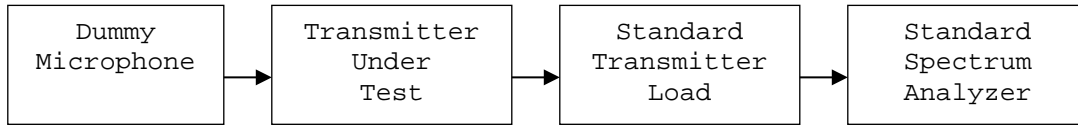

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx



### OCCUPIED BANDWIDTH 99 at INPUT%:

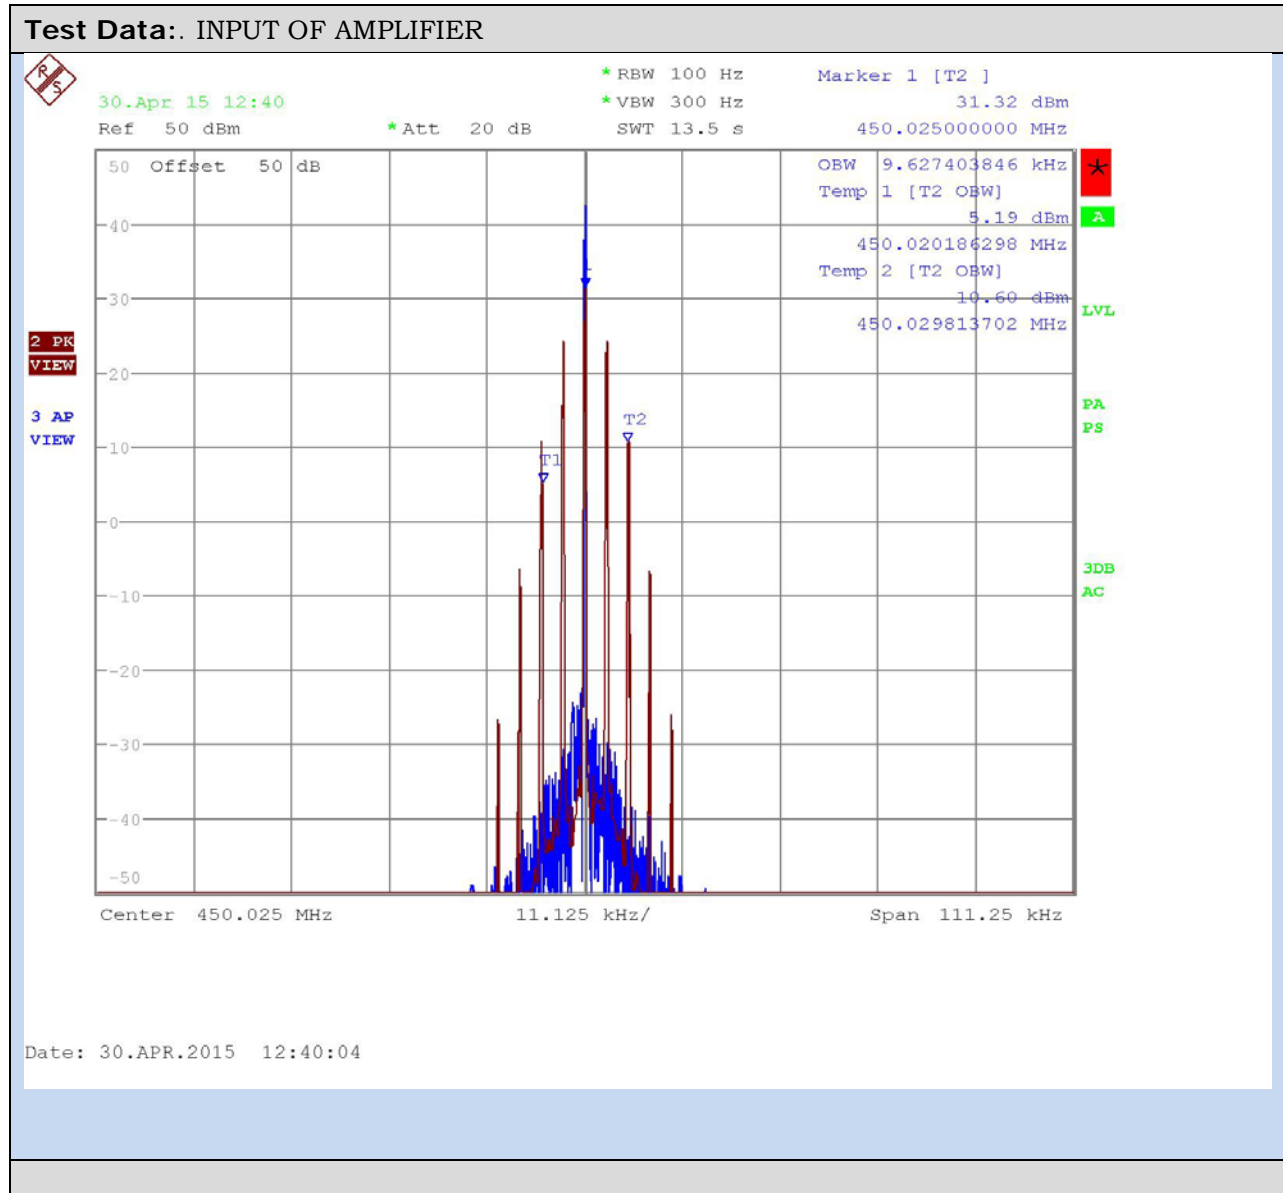



[Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## BANDWIDTH NON-LINEARITY at 450MHz:

Requirements: RSS-131 Para. 6.3.3


Measurement Method: ANSI/TIA-603-C:2004 para 2.2.11.

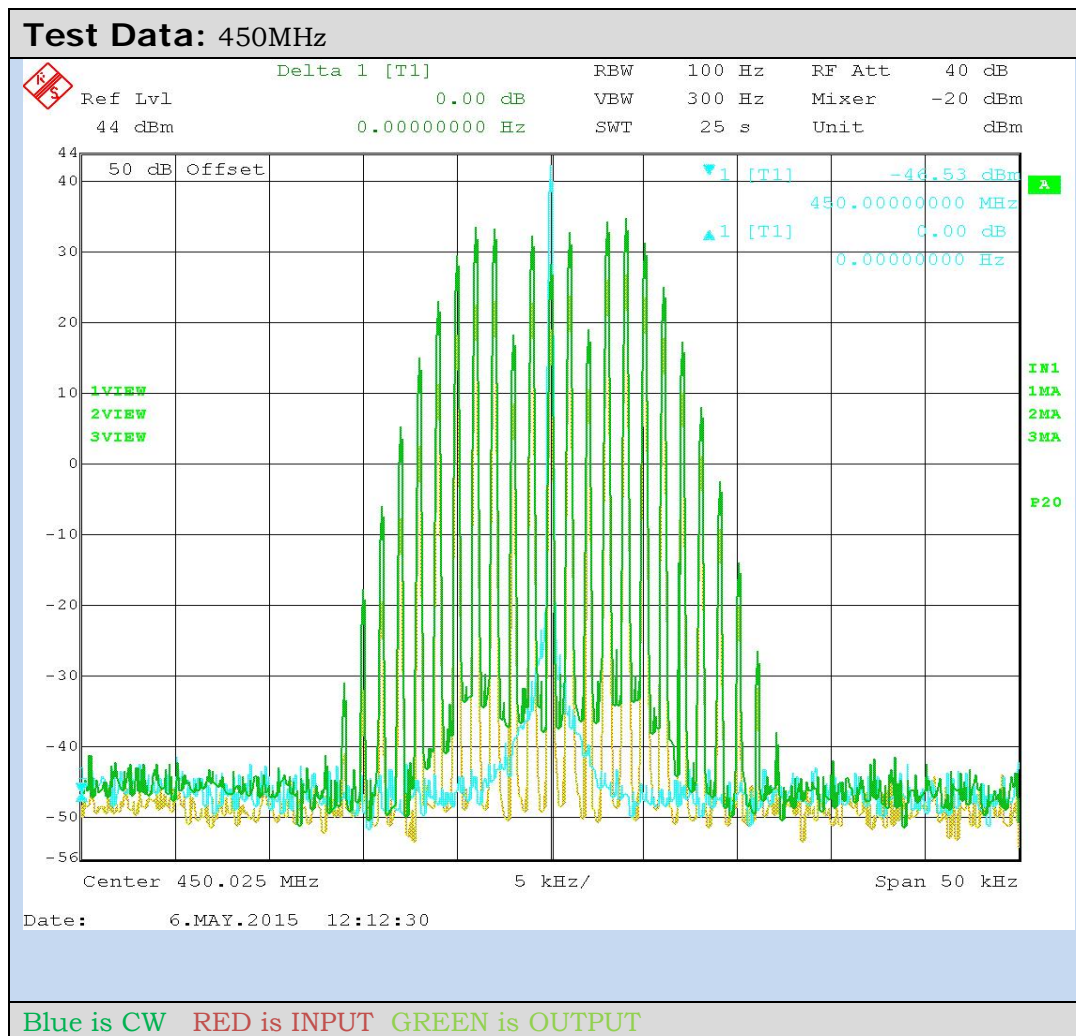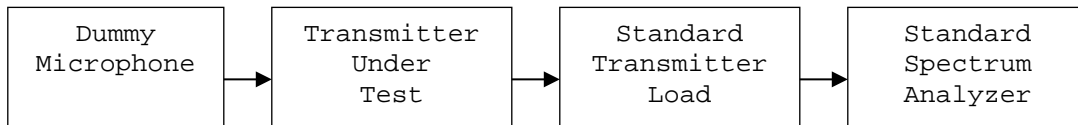

### [Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx


### BANDWIDTH NON-LINEARITY at 460MHz:

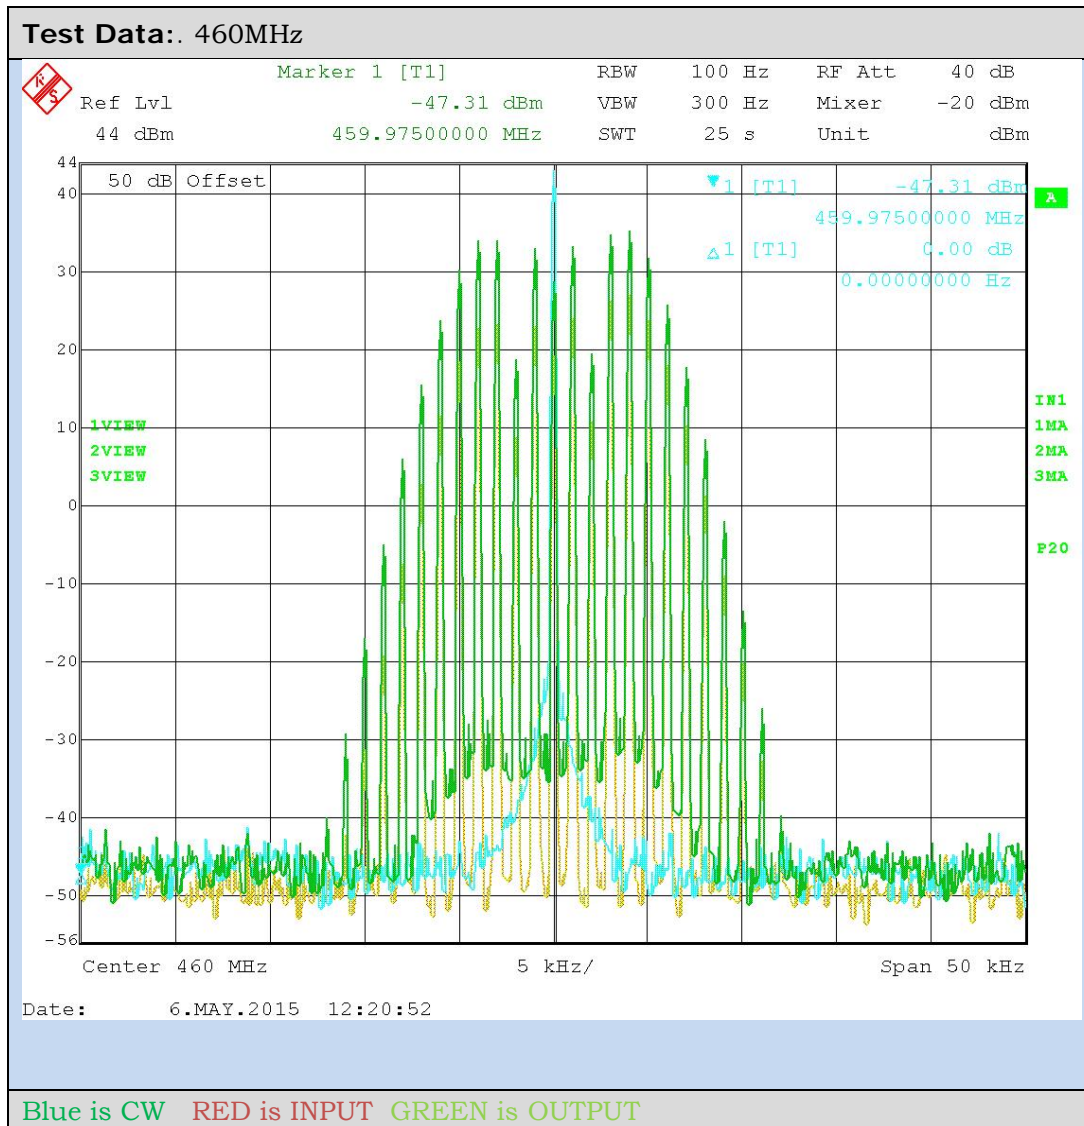

### [Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## BANDWIDTH NON-LINEARITY at 470MHz:

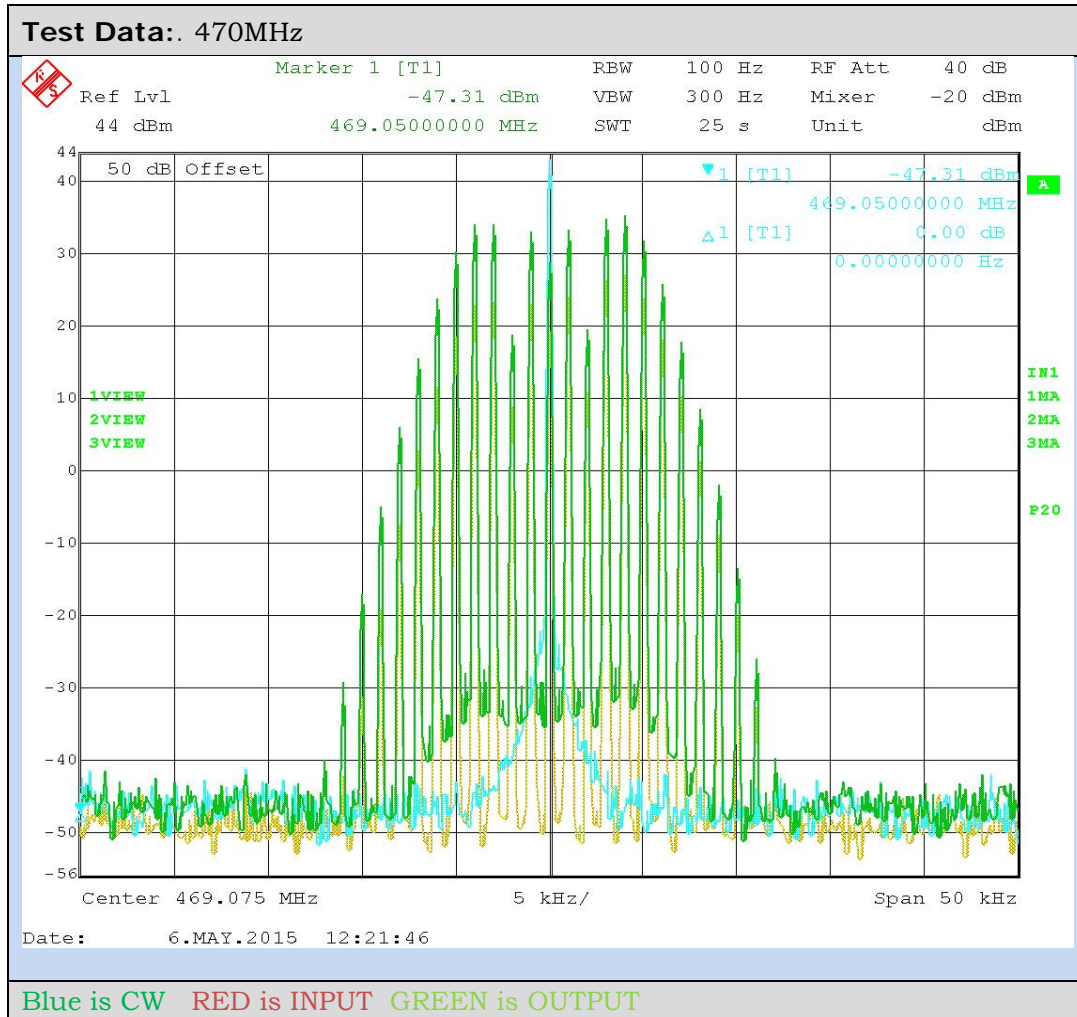

[Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part No.: Part 2.1051(a)


### Requirements:

12.5 kHz Channel Spacing =  $50 + 10 \log(25.0) = 64.0$  dBc (high power)

12.5 kHz Channel Spacing =  $50 + 10 \log(5.0) = 57.0$  dBc (low power)

**Method of Measurement:** The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from the lowest frequency generated to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-D: 2010.

### Method of Measuring Conducted Spurious Emissions:

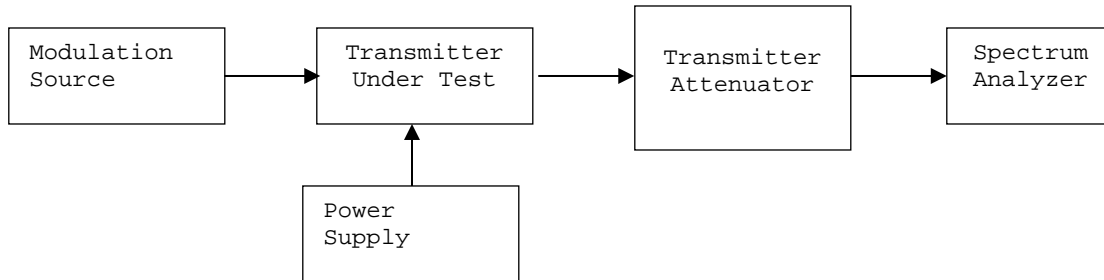

### Test Data: High Power Low end of Band

	dBm	Watts
Power Output		25
	Frequency	dBc
	450.025	0
	900.05	69.03
	1350.075	71.46
	1800.1	71.42
	2250.125	70.2
	2700.15	70.21
	3150.175	70.31
	3600.2	80.36
	4050.225	77.5
	4500.25	77.21

[Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

**SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)**

**Rule Part No.:** FCC Pt 2.1051(a), IC RSS-131

**Requirements:**  $43+10\log(P_o) = 50+10\log(25) = 64.0$  dB

**Test Data: High Power Middle of Band**

	dBm	Watts
Power Output	44	25
	Frequency	dBc
	460	0
	920	70.27
	1380	71.3
	1840	73.32
	2300	68.97
	2760	70.44
	3220	72.18
	3680	80
	4140	81.7
	4600	79.9

**Test Data: High Power High End of Band**

	dBm	Watts
Power Output	44	25
	frequency	dBc
	469.075	0
	938.15	71.1
	1407.225	74.56
	1876.3	69.52
	2345.375	68.75
	2814.45	68.9
	3283.525	69.89
	3752.6	77.77
	4221.675	77.8
	4690.75	79.2

[Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

### Test Data: Low Power Low end of Band

	dBm	Watts
Power Output	37	5
	Frequency	dBc
	450.025	0
	900.05	67.8
	1350.075	67.4
	1800.1	64.2
	2250.125	62
	2700.15	61.6
	3150.175	62.7
	3600.2	70.9
	4050.225	71.4
	4500.25	71.6

### Test Data: Low Power Middle of Band

	dBm	Watts
Power Output	37	5
	Frequency	dBc
	460	0
	920	67.8
	1380	63.6
	1840	64.4
	2300	64.2
	2760	63
	3220	62.7
	3680	73.7
	4140	71.9
	4600	71.7

### [Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

**SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)**

**Test Data: low Power High End of Band**

	dBm	Watts
Power Output	37	5
	Frequency	dBc
	469.075	0
	938.15	65.8
	1407.225	65.5
	1876.3	66.3
	2345.375	64.3
	2814.45	61.5
	3283.525	64.1
	3752.6	73.1
	4221.675	73.9
	4690.75	82

**RESULTS: PASS**

[Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx



## FIELD STRENGTH OF SPURIOUS EMISSIONS - RADIATED


Rule Parts. No.: Part 2.1053, IC RSS-119

### Requirements:

$$12.5\text{kHz Channel Spacing} = 50 + 10\log(OP) = \text{dBc}$$

**METHOD OF MEASUREMENT:** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-D: 2010 using the substitution method. Measurements were made at the test site of **TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.**

### Test Setup Diagram:

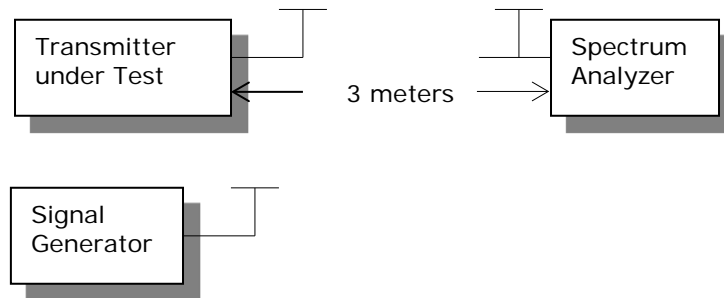

### Test Data:

#### HIGH POWER: Low End of the Band

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
450.00	Hi	44.00	25.12	64.00	12.50

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
900.00	H	68.98	4.98
1,350.00	V	85.49	21.49
1,800.00	V	81.18	17.18
2,250.00	H	68.62	48.62
2,700.00	H	66.25	46.25
3,150.00	H	63.63	43.63
3,600.00	H	62.12	42.12
4,050.00	H	57.31	37.31
4,500.00	H	60.78	40.78

### [Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

**HIGH POWER: Middle of the Band**

<b>Emission Frequency (MHz)</b>	<b>Power Mode</b>	<b>ERP Power Output (dBm)</b>	<b>ERP Power Output (Watts)</b>	<b>FCC Requirement dB</b>	<b>Bandwidth - BW - kHz</b>
<b>460.00</b>	<b>Hi</b>	<b>44.00</b>	<b>25.12</b>	<b>64.00</b>	<b>12.50</b>

<b>Emission Frequency (MHz)</b>	<b>Ant. Polarity</b>	<b>Below Carrier (dBc)</b>	<b>Margin</b>
<b>920.00</b>	<b>H</b>	<b>71.64</b>	<b>7.64</b>
<b>1,380.00</b>	<b>H</b>	<b>84.26</b>	<b>20.26</b>
<b>1,840.00</b>	<b>V</b>	<b>80.60</b>	<b>16.60</b>
<b>2,300.00</b>	<b>V</b>	<b>78.92</b>	<b>14.92</b>
<b>2,760.00</b>	<b>H</b>	<b>66.08</b>	<b>53.08</b>
<b>3,220.00</b>	<b>H</b>	<b>63.24</b>	<b>50.24</b>
<b>3,680.00</b>	<b>H</b>	<b>61.49</b>	<b>48.49</b>
<b>4,140.00</b>	<b>H</b>	<b>58.78</b>	<b>45.78</b>
<b>4,600.00</b>	<b>H</b>	<b>68.06</b>	<b>55.06</b>

**HIGH POWER: High End of the Band**

<b>Emission Frequency (MHz)</b>	<b>Power Mode</b>	<b>ERP Power Output (dBm)</b>	<b>ERP Power Output (Watts)</b>	<b>FCC Requirement dB</b>	<b>Bandwidth - BW - kHz</b>
<b>470.00</b>	<b>Hi</b>	<b>44.00</b>	<b>25.12</b>	<b>64.00</b>	<b>12.50</b>

<b>Emission Frequency (MHz)</b>	<b>Ant. Polarity</b>	<b>Below Carrier (dBc)</b>	<b>Margin</b>
<b>940.00</b>	<b>H</b>	<b>27.78</b>	<b>7.78</b>
<b>1,410.00</b>	<b>H</b>	<b>41.94</b>	<b>21.94</b>
<b>1,880.00</b>	<b>H</b>	<b>67.26</b>	<b>47.26</b>
<b>2,350.00</b>	<b>H</b>	<b>67.99</b>	<b>47.99</b>
<b>2,820.00</b>	<b>H</b>	<b>65.88</b>	<b>45.88</b>
<b>3,290.00</b>	<b>H</b>	<b>63.07</b>	<b>43.07</b>
<b>3,760.00</b>	<b>H</b>	<b>60.76</b>	<b>40.76</b>
<b>4,230.00</b>	<b>H</b>	<b>60.26</b>	<b>40.26</b>
<b>4,700.00</b>	<b>H</b>	<b>63.42</b>	<b>43.42</b>

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx

## EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
DC Power Supply	HP	6286A	1744A03842	12/12/99	12/12/99
Antenna: Biconnical Chamber	Eaton Chamber	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic Chamber	Eaton	96005	1243	05/31/13	05/31/15
Temperature Chamber LARGE	Tenney Engineering	TTRC	11717-7	08/19/14	08/19/16
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Ant: Double-Ridged Horn/ETS Horn 1 Ch	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
Software: Field Strength Program	Timco	N/A	Version 4.0	N/A	N/A
Hygro-Thermometer	Extech	445703	0602	06/20/13	06/20/15
Attenuator N 30dB 150W DC-6G	Narda	769-30	10267	03/15/13	09/15/15
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16
Signal Generator HP 8648C	HP	8648C	3623A02898	08/29/13	08/29/15
Attenuator 30dB 500W	Bird	8325	1761	02/25/13	08/25/15

### \*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)

Applicant: CRESCEND TECHNOLOGIES, LLC  
 FCC ID: CWWP2RTK450  
 IC: 7291A-P2RTK450  
 Report: C:\CRESCEND\_CWW\820AUT15\820AUT15TestReport.docx