

FCC RF Test Report

APPLICANT : TECOM CO., LTD.
EQUIPMENT : Residential Fire and Burglar Control Unit
BRAND NAME : CISCO
MODEL NAME : DLC-200C US
FCC ID : D6XDLC200
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Nov. 14, 2014 and testing was completed on Feb. 03, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Pre-Scanned RF Power.....	10
2.3 Test Mode.....	12
2.4 Connection Diagram of Test System.....	13
2.5 Support Unit used in test configuration and system	14
2.6 EUT Operation Test Setup	14
2.7 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 6dB and 99% Bandwidth Measurement	15
3.2 Average Output Power Measurement	18
3.3 Power Spectral Density Measurement	20
3.4 Conducted Band Edges and Spurious Emission Measurement	23
3.5 Radiated Band Edges and Spurious Emission Measurement	48
3.6 AC Conducted Emission Measurement.....	53
3.7 Antenna Requirements.....	57
4 LIST OF MEASURING EQUIPMENT	58
5 UNCERTAINTY OF EVALUATION	59
APPENDIX A. RADIATED TEST RESULTS	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N1471-02	Rev. 01	Initial issue of report	Jul. 16, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-210 A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.03 dB at 2390.000 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 10.00 dB at 8.678 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

TECOM CO., LTD.

No. 23 R&D Road 2, Science-Based Industrial Park, Hsin-Chu Taiwan

1.2 Manufacturer

Global Brands Manufacture (DongGuan) Ltd.

Yue Yuan Industrial Estate, Huang Jiang Zhen, DongGuan City, Guangdong Province, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Residential Fire and Burglar Control Unit
Brand Name	CISCO
Model Name	DLC-200C US
FCC ID	D6XDLC200
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA WLAN 11b/g/n HT20/HT40
HW Version	614-901005R V1.1
SW Version	v1.00.17
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard			
Tx/Rx Channel Frequency Range		2412 MHz ~ 2462 MHz	
Maximum (Average) Output Power to antenna		<Ant. 1> 802.11b : 24.07 dBm (0.2553 W) 802.11g : 21.65 dBm (0.1462 W) <Ant. 2> 802.11g : 21.72 dBm (0.1486 W) <SISO Ant. 1> 802.11n HT20 : 21.83 dBm (0.1524 W) 802.11n HT40 : 17.99 dBm (0.0630 W) <SISO Ant. 2> 802.11n HT20 : 21.71 dBm (0.1483 W) 802.11n HT40 : 17.13 dBm (0.0561 W) <MIMO Ant. 1+2> 802.11n HT20 : 24.65 dBm (0.2917 W) 802.11n HT40 : 20.86 dBm (0.1222 W)	
99% Occupied Bandwidth		802.11b : 11.20MHz 802.11g : 17.95MHz 802.11n HT20 : 18.70MHz 802.11n HT40 : 36.70MHz	
Antenna Type		<Ant 1> 802.11b/g/n : PCB Antenna type with gain 5.50 dBi <Ant 2> 802.11b/g/n : PCB Antenna type with gain 5.50 dBi	
Type of Modulation		802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)	
Antenna Function for Transmitter			
		Ant. 1	Ant. 2
		802.11 b	-
		802.11 g	V
		802.11 n SISO	V
		802.11 n MIMO	V

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Alley. 75, Lane 564, Wenhua 3 rd Rd. Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0838	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2009 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane for Ant.1 and Ant.2, X plane for MIMO Ant.1 + Ant.2) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

<Ant. 1>

802.11b				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Average Power (dBm)	24.07	23.81	24.06	24.02

802.11g								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Average Power (dBm)	21.65	21.21	21.13	21.18	21.26	21.19	21.18	21.38

<Ant. 2>

802.11g								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Average Power (dBm)	21.72	20.55	20.53	20.54	20.52	20.52	20.54	20.24

<SISO Ant. 1>

2.4GHz 802.11n HT20								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	21.83	19.42	19.36	19.42	19.37	19.40	19.46	19.44

2.4GHz 802.11n HT40								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	17.99	17.83	17.94	17.97	17.98	17.86	17.97	17.95

<SISO Ant. 2>

2.4GHz 802.11n HT20								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	21.71	20.36	20.28	20.29	20.44	20.60	20.39	20.40

2.4GHz 802.11n HT40								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	17.13	17.11	17.08	17.11	17.12	17.12	17.09	17.11

**MIMO <Ant. 1+2>**

2.4GHz 802.11n HT20								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	24.65	24.22	24.30	24.39	24.57	24.47	24.47	24.51

2.4GHz 802.11n HT40								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	20.86	20.85	20.78	20.78	20.77	20.72	20.79	20.80

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Single Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


MIMO Antenna

Modulation	Data Rate
802.11n HT20	MCS8
802.11n HT40	MCS8


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 (GPRS Class 8) Idle + WLAN Link + LAN Link + PoE1 Link + Battery
Remark: - PoE Link includes data Link with Notebook which means data application transferred mode between EUT and Notebook. - This is a variant product of FCC ID: D6XDLC200 (model name: DLC-200; Sporton report Number FR4N1471 Rev. 01), after spot-checking the tests, the parent test results were worse than variant test results, thus this test report was reuse parent test data.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

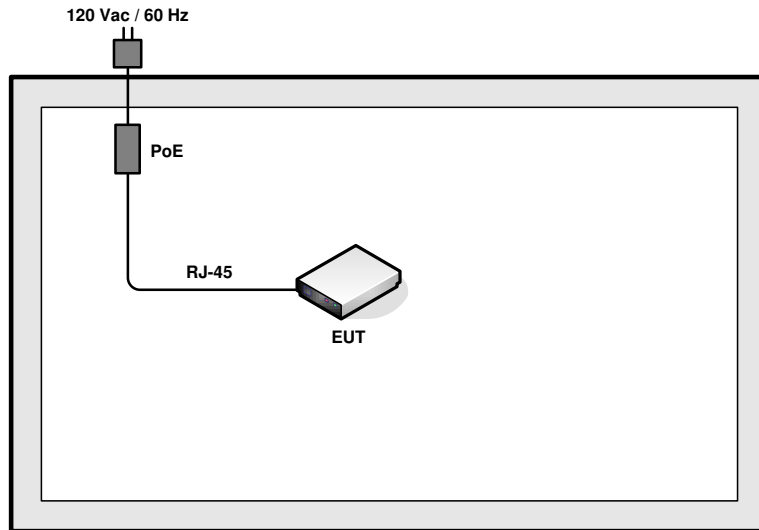

<AC Conducted Emission Mode>

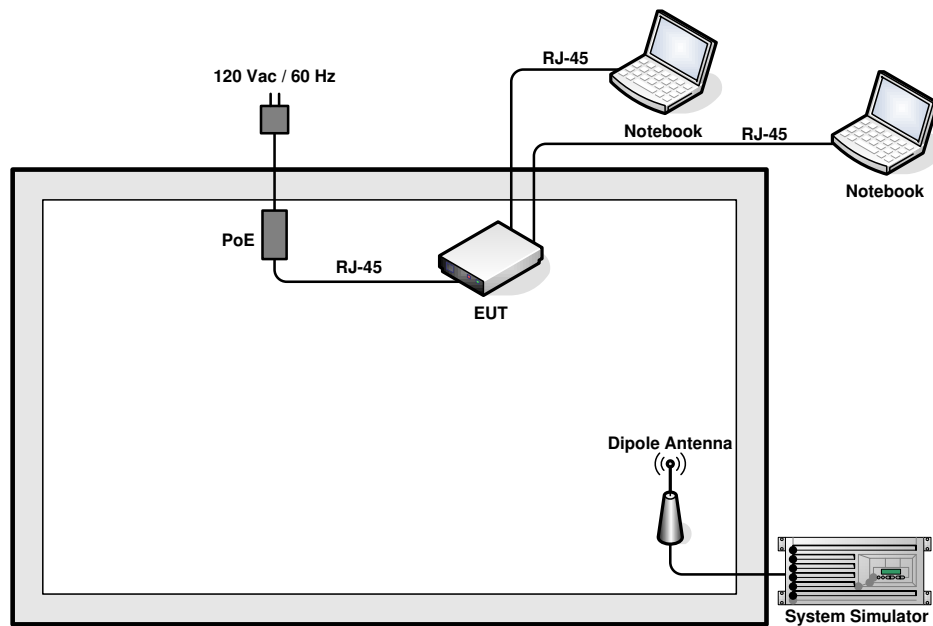

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	DELL	P20G	FCC DoC/ Contains FCC ID:QDS-BRCM1051	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	PoE 1	PowerDsine	PD-9001GR/AC	FCC DoC	N/A	N/A
5.	PoE 2	PHIHONG	POE31U-1AT	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

The programmed RF utility “Tera Term” is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

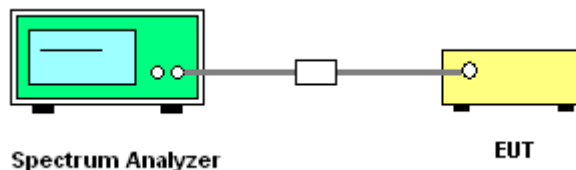




3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	21~26°C
Test Engineer :	Alen Tsui and Luffy Lin	Relative Humidity :	45~54%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	99% Bandwidth (MHz)		6dB Bandwidth (MHz)		6dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant. 1	Ant. 2	Ant. 1	Ant. 2		
11b	1Mbps	1	1	2412	11.20	-	8.06	-	0.5	Pass
11b	1Mbps	1	6	2437	11.20	-	8.04	-	0.5	Pass
11b	1Mbps	1	11	2462	11.15	-	8.06	-	0.5	Pass
11g	6Mbps	1	1	2412	-	17.90	-	16.36	0.5	Pass
11g	6Mbps	1	6	2437	-	17.90	-	16.32	0.5	Pass
11g	6Mbps	1	11	2462	-	17.95	-	16.44	0.5	Pass
HT20	MCS0	1	1	2412	18.60	-	17.60	-	0.5	Pass
HT20	MCS0	1	6	2437	18.50	-	17.32	-	0.5	Pass
HT20	MCS0	1	11	2462	18.70	-	17.60	-	0.5	Pass
HT40	MCS0	1	3	2422	36.60	-	36.36	-	0.5	Pass
HT40	MCS0	1	6	2437	36.10	-	35.04	-	0.5	Pass
HT40	MCS0	1	9	2452	36.50	-	35.76	-	0.5	Pass
HT20	MCS8	2	1	2412	18.55	18.55	17.60	17.56	0.5	Pass
HT20	MCS8	2	6	2437	18.55	18.65	17.32	17.56	0.5	Pass
HT20	MCS8	2	11	2462	18.65	18.65	17.56	17.56	0.5	Pass
HT40	MCS8	2	3	2422	36.60	36.70	36.08	36.32	0.5	Pass
HT40	MCS8	2	6	2437	36.10	36.10	36.04	35.08	0.5	Pass
HT40	MCS8	2	9	2452	36.40	36.50	35.80	35.92	0.5	Pass

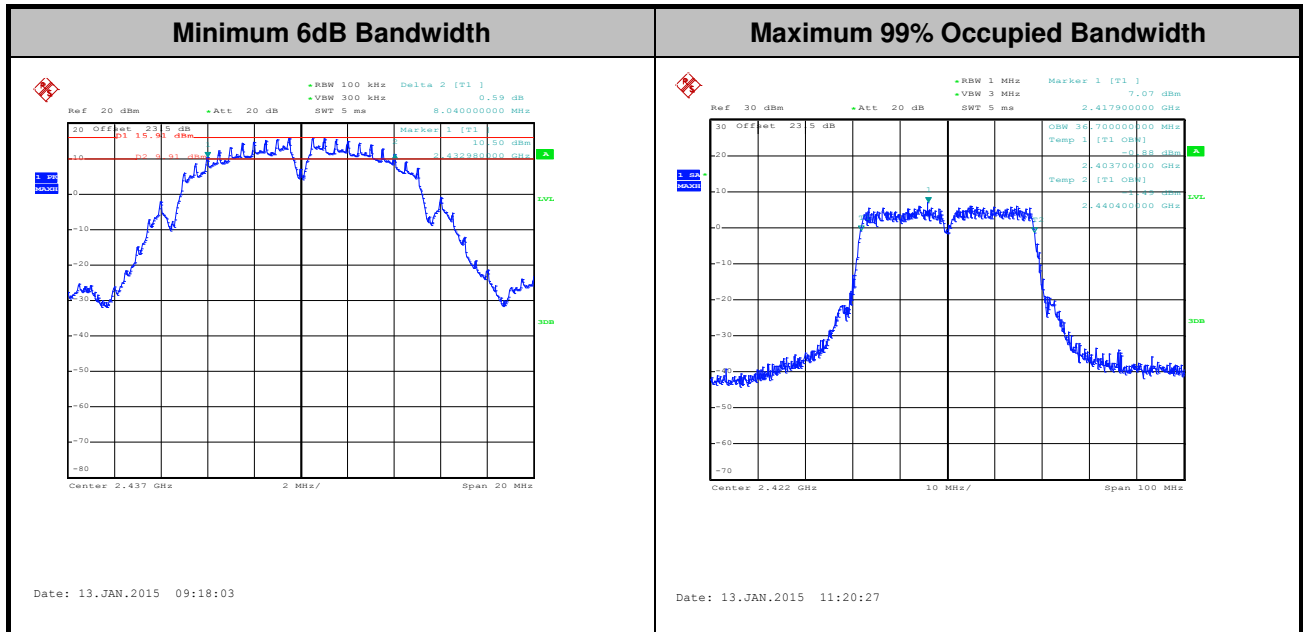

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Average Output Power Measurement

3.2.1 Limit of Average Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

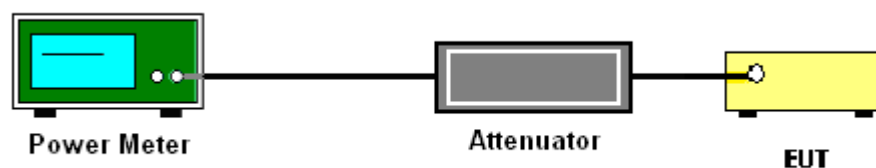

3.2.5 Test Result of Average output Power

Test Band :	2.4GHz	Temperature :	21~26°C
Test Engineer :	Alen Tsui and Luffy Lin	Relative Humidity :	45~54%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			Power Limit (dBm)	DG (dBi)	Pass /Fail
					Ant. 1	Ant. 2	Ant. 1	Ant. 2	Sum Power			
11b	1Mbps	1	1	2412	0.19	-	23.83	-	-	30.00	5.50	Pass
11b	1Mbps	1	6	2437	0.19	-	24.07	-		30.00	5.50	Pass
11b	1Mbps	1	11	2462	0.19	-	21.59	-		30.00	5.50	Pass
11g	6Mbps	1	1	2412	0.20	0.20	18.53	16.06		30.00	5.50	Pass
11g	6Mbps	1	6	2437	0.20	0.20	21.65	21.72		30.00	5.50	Pass
11g	6Mbps	1	11	2462	0.20	0.20	17.63	17.08		30.00	5.50	Pass
HT20	MCS0	1	1	2412	0.21	0.21	18.39	15.74		30.00	5.50	Pass
HT20	MCS0	1	6	2437	0.21	0.21	21.83	21.71		30.00	5.50	Pass
HT20	MCS0	1	11	2462	0.21	0.21	17.91	16.51		30.00	5.50	Pass
HT40	MCS0	1	3	2422	0.42	0.42	13.19	13.18		30.00	5.50	Pass
HT40	MCS0	1	6	2437	0.42	0.42	17.99	17.13		30.00	5.50	Pass
HT40	MCS0	1	9	2452	0.42	0.42	15.48	15.49		30.00	5.50	Pass
HT20	MCS8	2	1	2412	0.41	0.41	15.46	15.53	18.50	30.00	5.50	Pass
HT20	MCS8	2	6	2437	0.41	0.41	21.82	21.46	24.65	30.00	5.50	Pass
HT20	MCS8	2	11	2462	0.41	0.41	17.79	17.36	20.59	30.00	5.50	Pass
HT40	MCS8	2	3	2422	0.77	0.72	12.79	12.92	15.87	30.00	5.50	Pass
HT40	MCS8	2	6	2437	0.77	0.72	17.64	17.24	20.46	30.00	5.50	Pass
HT40	MCS8	2	9	2452	0.77	0.72	17.90	17.79	20.86	30.00	5.50	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.7 Method AVGPS of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = RMS, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup

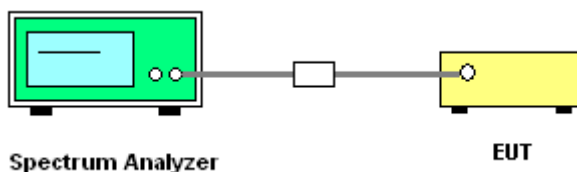


3.3.5 Test Result of Power Spectral Density

Test Band :	2.4GHz	Temperature :	21~26℃
Test Engineer :	Alen Tsui and Luffy Lin	Relative Humidity :	45~54%

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Power Density (dBm/3kHz)			Max. Limit (dBm/3kHz)		DG (dBi)		Pass/Fail
					Ant. 1	Ant. 2	Worst +10log(2)	Ant. 1	Ant. 2	Ant. 1	Ant. 2	
11b	1Mbps	1	1	2412	-3.13	-	-	8.00	8.00	5.50	5.50	Pass
11b	1Mbps	1	6	2437	-2.64	-		8.00	8.00	5.50	5.50	Pass
11b	1Mbps	1	11	2462	-5.08	-		8.00	8.00	5.50	5.50	Pass
11g	6Mbps	1	1	2412	-	-15.17		8.00	8.00	5.50	5.50	Pass
11g	6Mbps	1	6	2437	-	-16.84		8.00	8.00	5.50	5.50	Pass
11g	6Mbps	1	11	2462	-	-14.81		8.00	8.00	5.50	5.50	Pass
HT20	MCS0	1	1	2412	-13.08	-		8.00	8.00	5.50	5.50	Pass
HT20	MCS0	1	6	2437	-9.56	-		8.00	8.00	5.50	5.50	Pass
HT20	MCS0	1	11	2462	-13.57	-		8.00	8.00	5.50	5.50	Pass
HT40	MCS0	1	3	2422	-23.53	-	-	8.00	8.00	5.50	5.50	Pass
HT40	MCS0	1	6	2437	-16.72	-		8.00	8.00	5.50	5.50	Pass
HT40	MCS0	1	9	2452	-19.84	-		8.00	8.00	5.50	5.50	Pass
HT20	MCS8	2	1	2412	-15.75	-16.65	-12.74	5.49		8.51		Pass
HT20	MCS8	2	6	2437	-9.50	-10.38	-6.49	5.49		8.51		Pass
HT20	MCS8	2	11	2462	-14.00	-14.50	-10.99	5.49		8.51		Pass
HT40	MCS8	2	3	2422	-23.72	-23.86	-20.71	5.49		8.51		Pass
HT40	MCS8	2	6	2437	-17.46	-17.33	-14.32	5.49		8.51		Pass
HT40	MCS8	2	9	2452	-17.89	-18.36	-14.88	5.49		8.51		Pass

Note: Measured power density (dBm) has offset with cable loss.

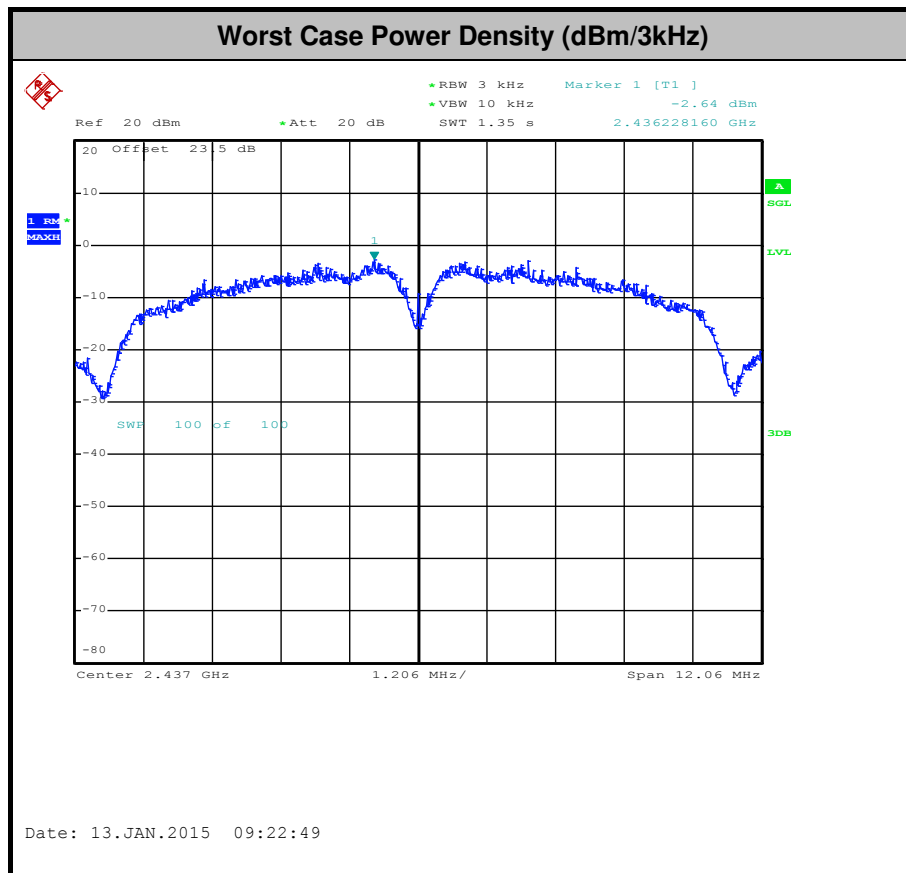

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

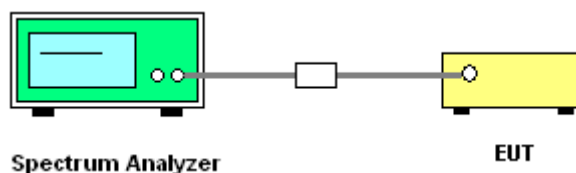




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Number of TX = 1, Ant. 1 (Measured)

Number of TX	1	Ant. :	1
Test Mode :	802.11b	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	Alen Tsui and Luffy Lin

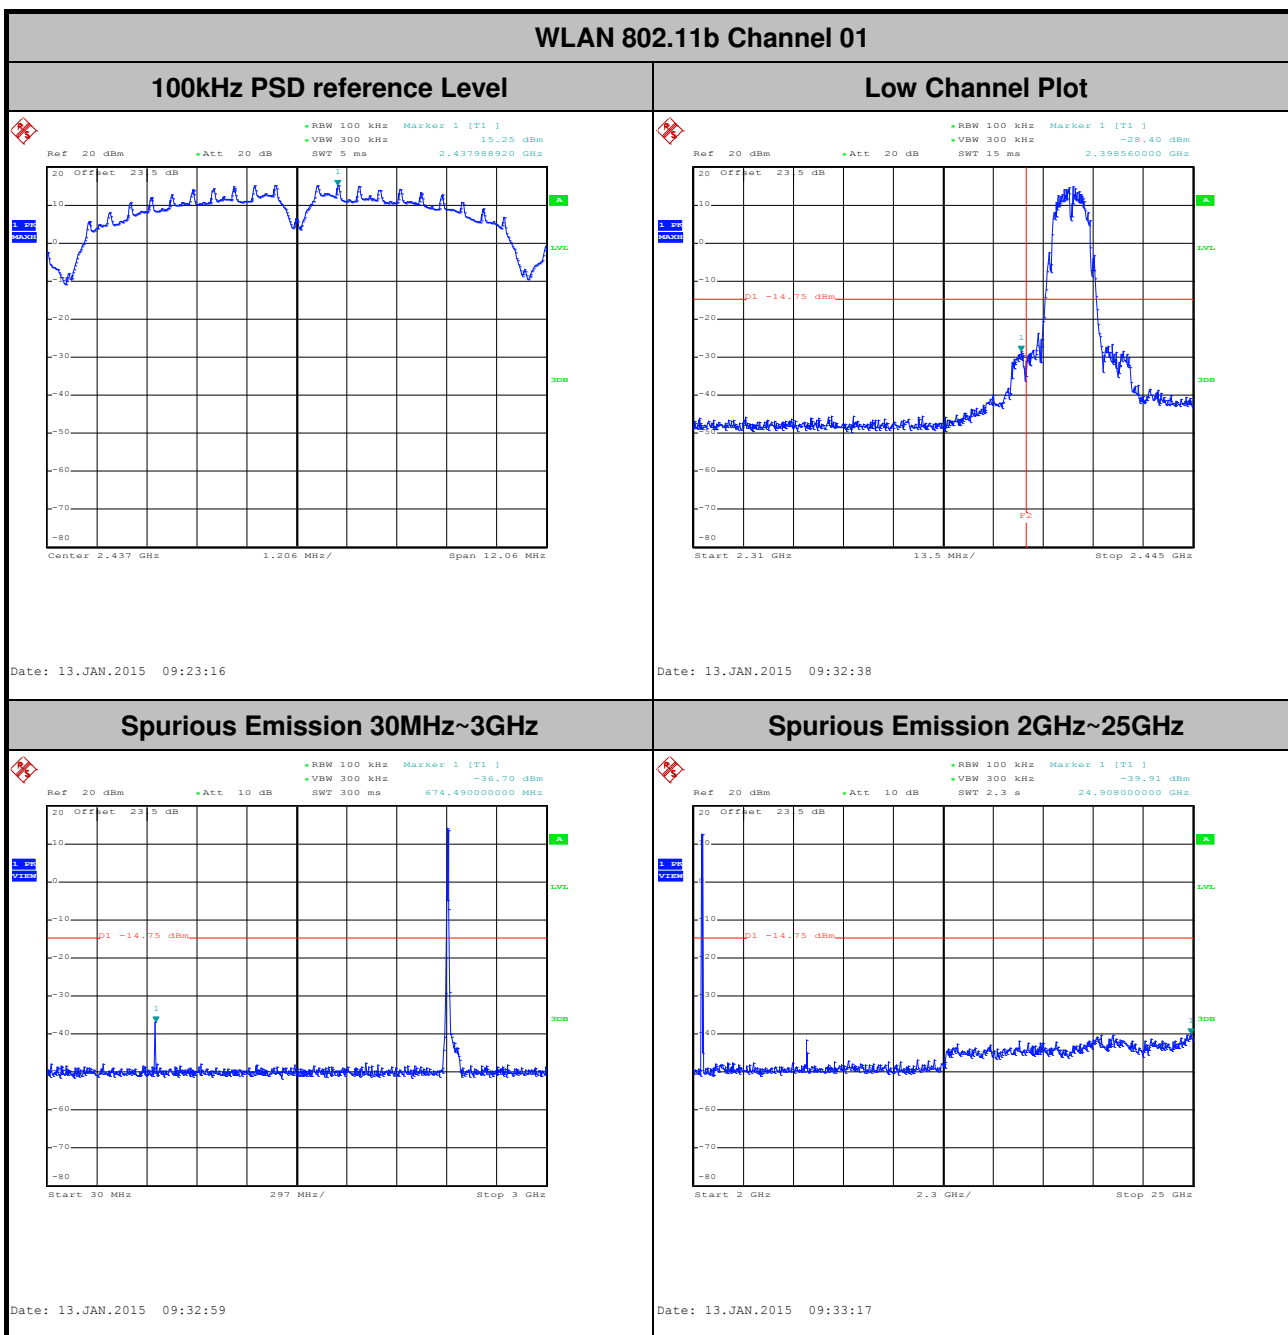




Number of TX :	1	Ant. :	1
Test Mode :	802.11b	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11b Channel 06

100kHz PSD reference Level

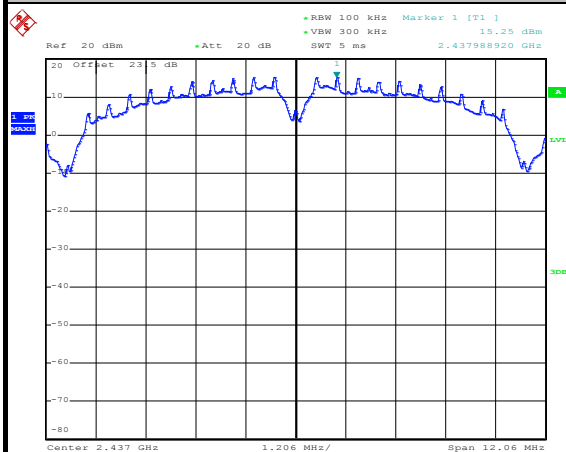


Date: 13.JAN.2015 09:23:16

Spurious Emission 30MHz~3GHz

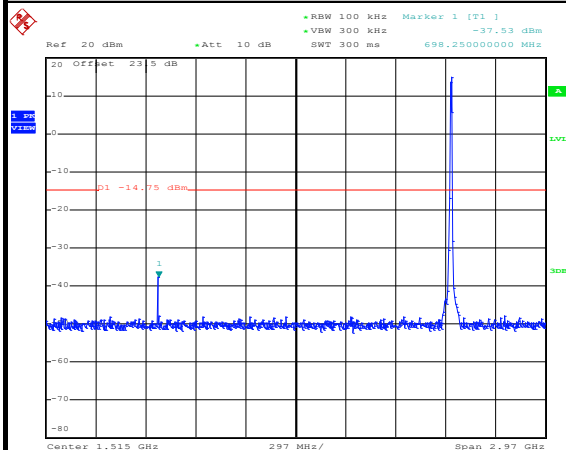

Date: 13.JAN.2015 09:24:19


Spurious Emission 2GHz~25GHz

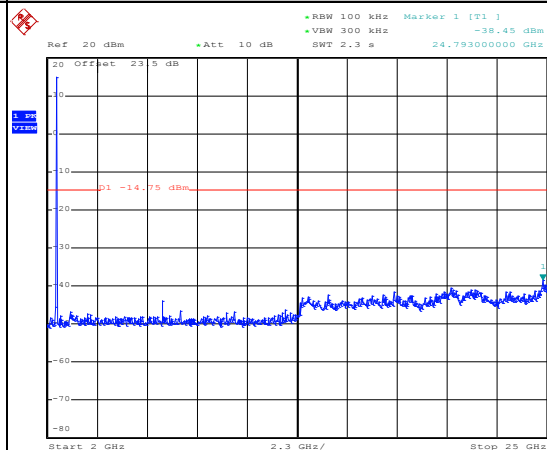


Date: 13.JAN.2015 09:24:37




Number of TX :	1	Ant. :	1
Test Mode :	802.11b	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	Alen Tsui and Luffy Lin

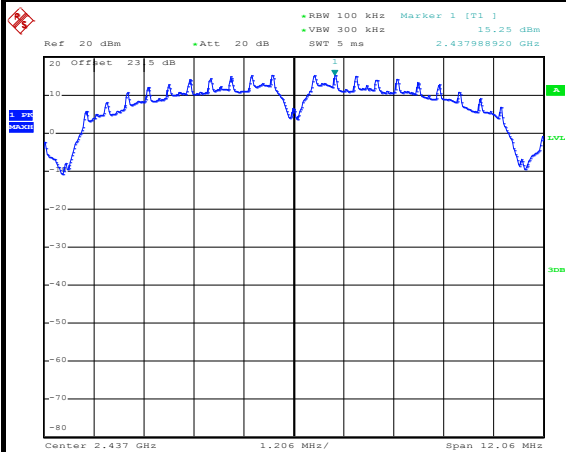WLAN 802.11b Channel 11**100kHz PSD reference Level**


Date: 13.JAN.2015 09:23:16

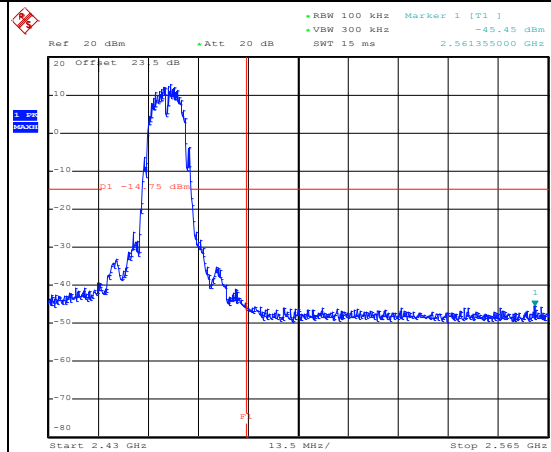High Channel Plot

Date: 13.JAN.2015 09:37:27

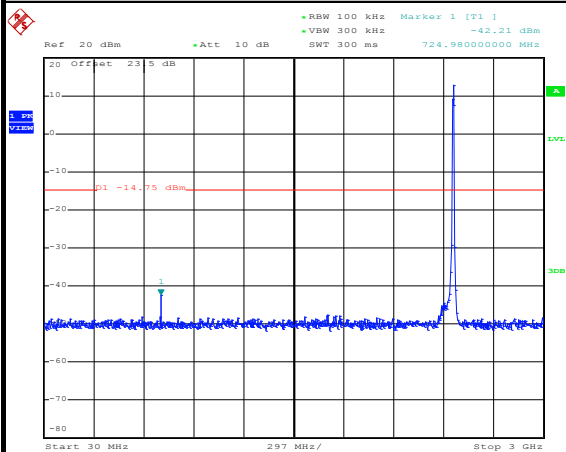Spurious Emission 30MHz~3GHz

Date: 13.JAN.2015 09:37:48

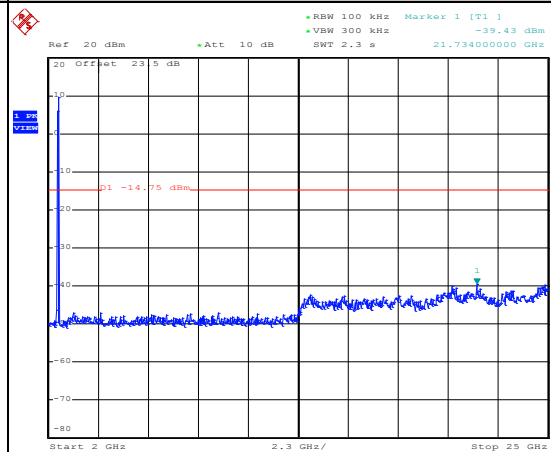Spurious Emission 2GHz~25GHz


Date: 13.JAN.2015 09:38:06



Number of TX :	1	Ant. :	1
Test Mode :	802.11g	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11g Channel 01

100kHz PSD reference Level

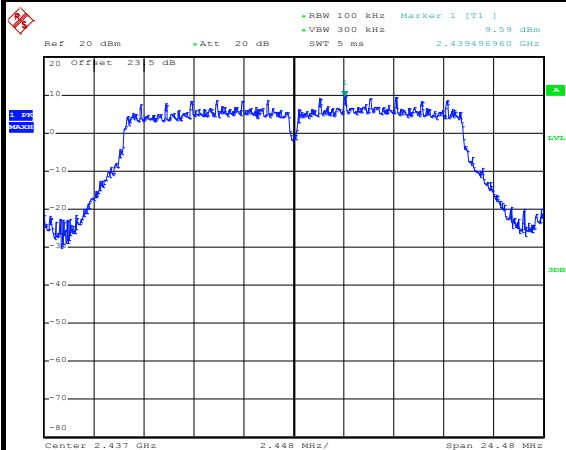


Date: 13.JAN.2015 09:41:07

Low Channel Plot

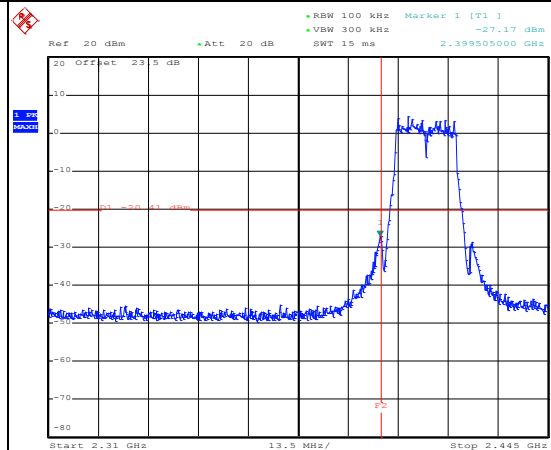


Date: 13.JAN.2015 09:44:03

Spurious Emission 30MHz~3GHz

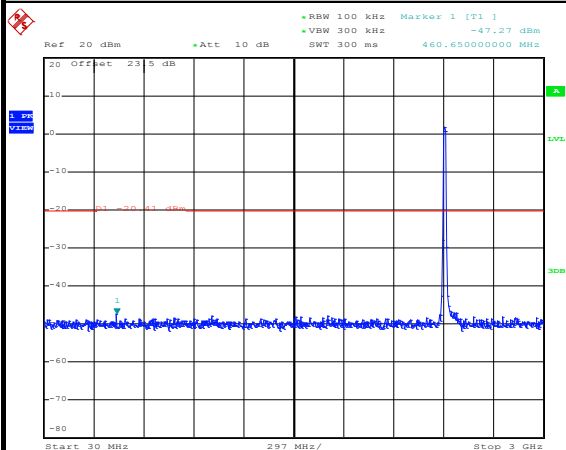

Date: 13.JAN.2015 09:44:26


Spurious Emission 2GHz~25GHz

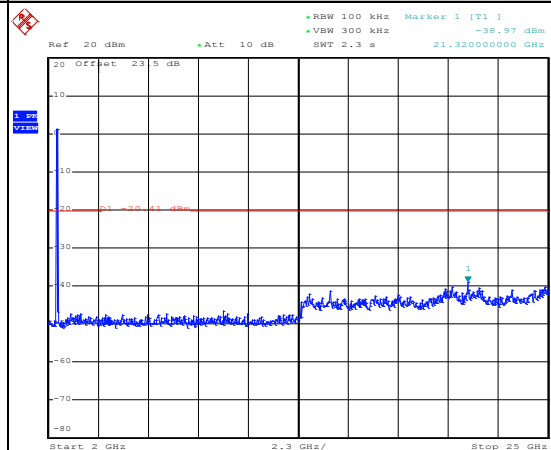


Date: 13.JAN.2015 09:44:44




Number of TX :	1	Ant. :	1
Test Mode :	802.11g	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	Alen Tsui and Luffy Lin

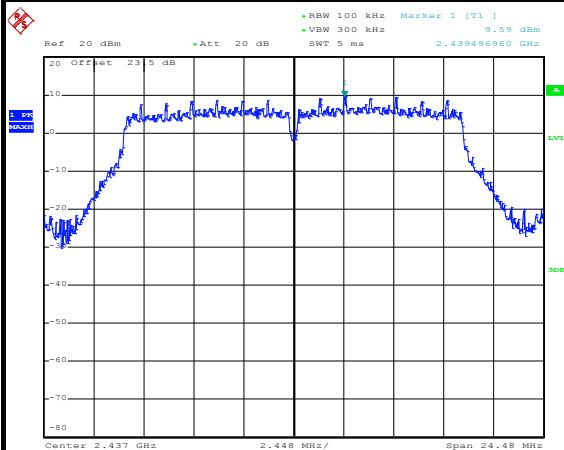WLAN 802.11g Channel 06**100kHz PSD reference Level**

Date: 13.JAN.2015 09:41:07

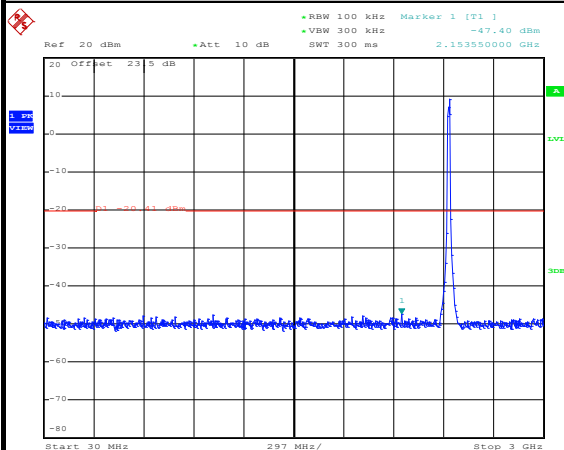Spurious Emission 30MHz~3GHz

Date: 13.JAN.2015 09:42:49

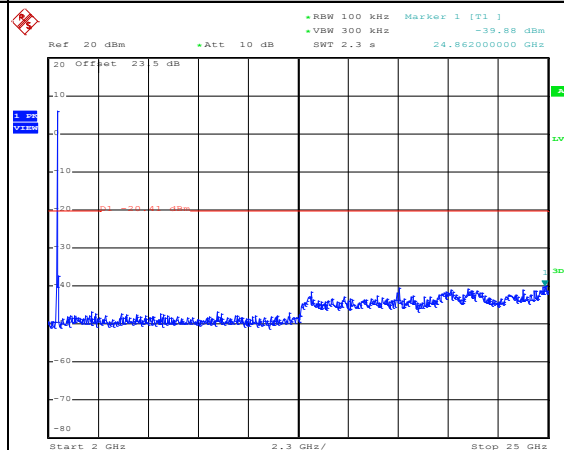
Spurious Emission 2GHz~25GHz

Date: 13.JAN.2015 09:43:07

Number of TX :	1	Ant. :	1
Test Mode :	802.11g	Temperature :	21~26℃
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11g Channel 11

100kHz PSD reference Level

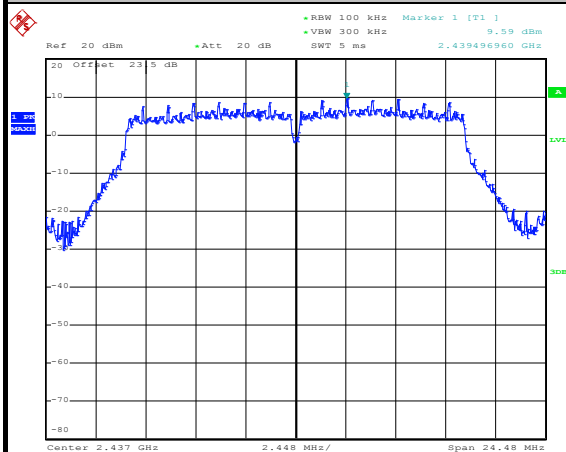


Date: 13.JAN.2015 09:41:07

High Channel Plot

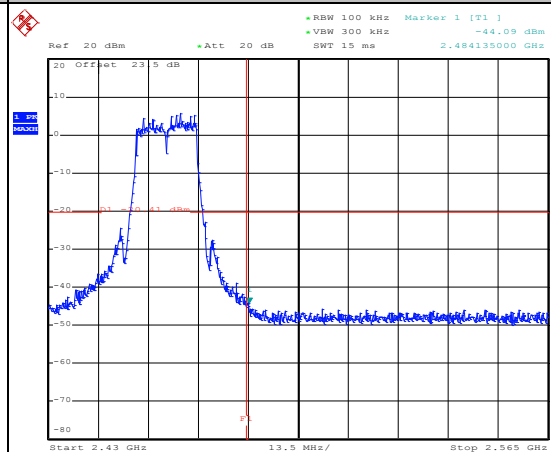


Date: 13.JAN.2015 09:45:49

Spurious Emission 30MHz~3GHz

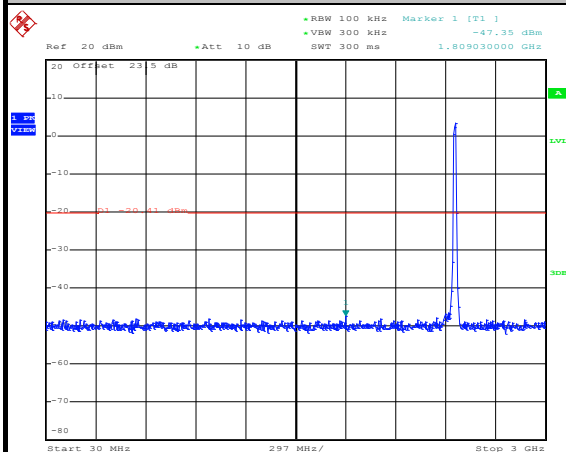

Date: 13.JAN.2015 09:47:08

Spurious Emission 2GHz~25GHz

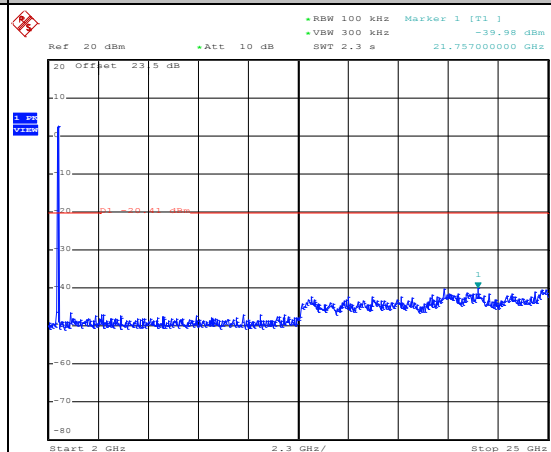


Date: 13.JAN.2015 09:47:26



Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

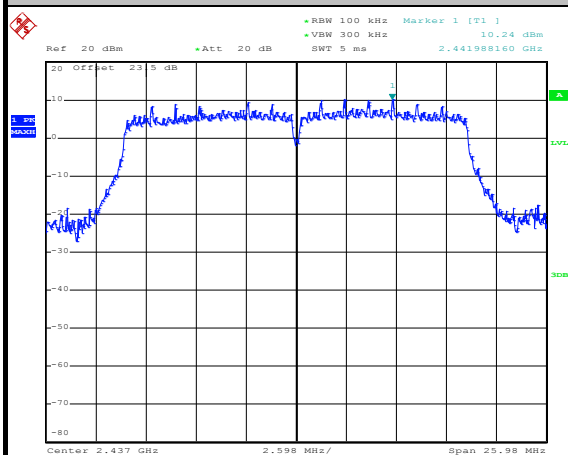


Date: 13.JAN.2015 09:50:31

Low Channel Plot

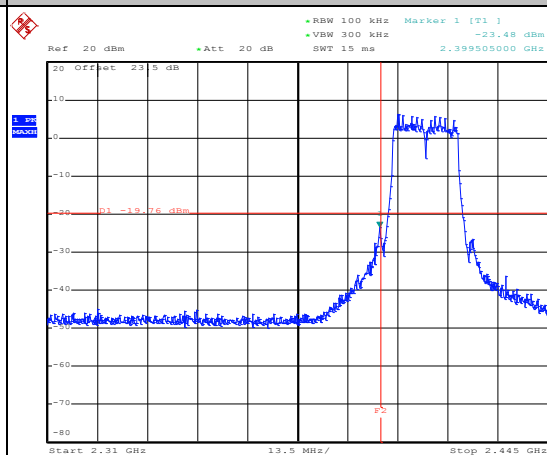


Date: 13.JAN.2015 09:53:05

Spurious Emission 30MHz~3GHz

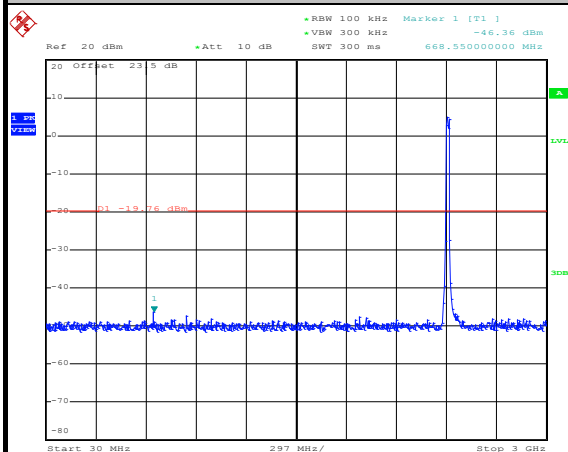

Date: 13.JAN.2015 09:53:27


Spurious Emission 2GHz~25GHz

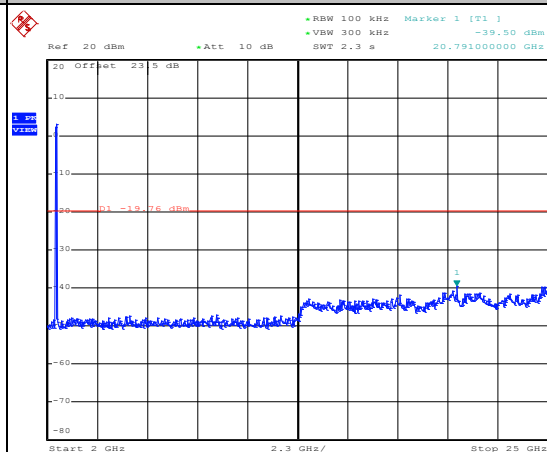


Date: 13.JAN.2015 09:53:45




Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	Alen Tsui and Luffy Lin

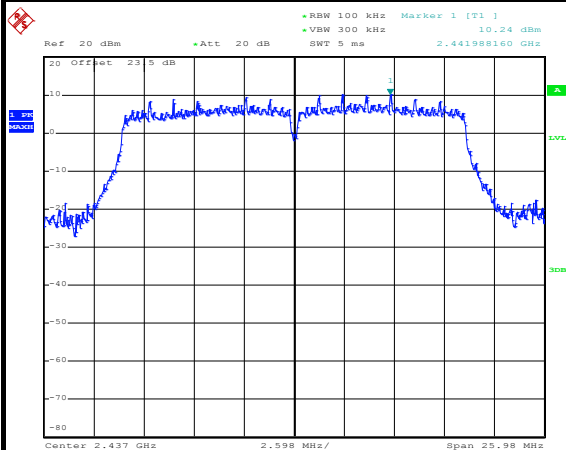WLAN 802. 11n HT20 Channel 06**100kHz PSD reference Level**

Date: 13.JAN.2015 09:50:31

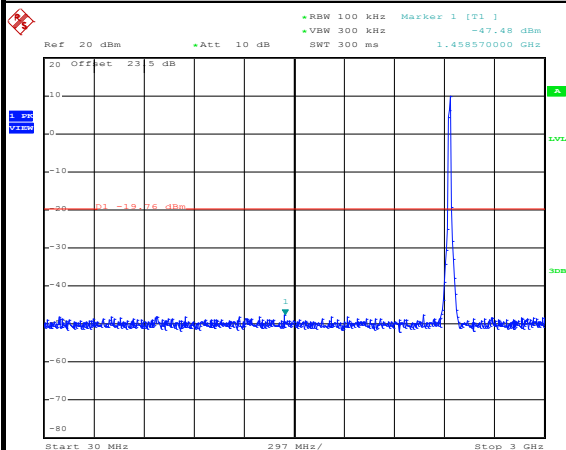Spurious Emission 30MHz~3GHz

Date: 13.JAN.2015 09:51:26

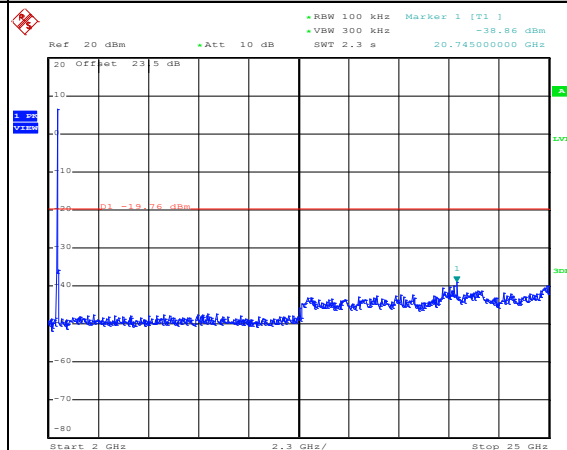Spurious Emission 2GHz~25GHz


Date: 13.JAN.2015 09:51:44



Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

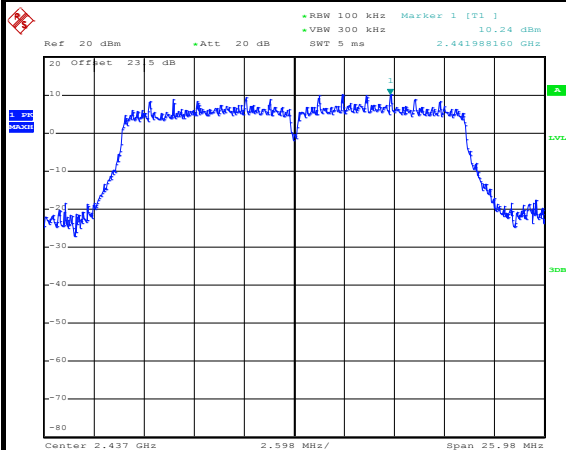


Date: 13.JAN.2015 09:50:31

High Channel Plot

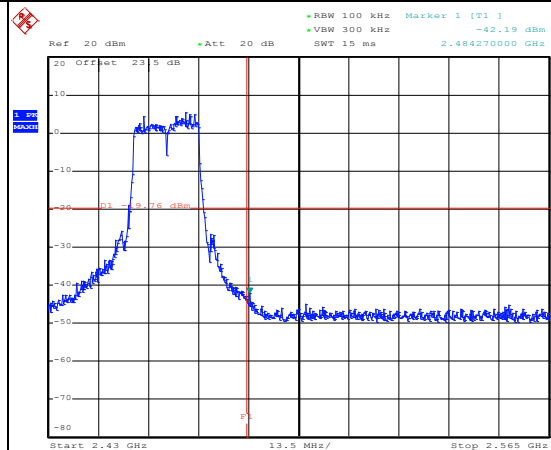


Date: 13.JAN.2015 09:54:45

Spurious Emission 30MHz~3GHz

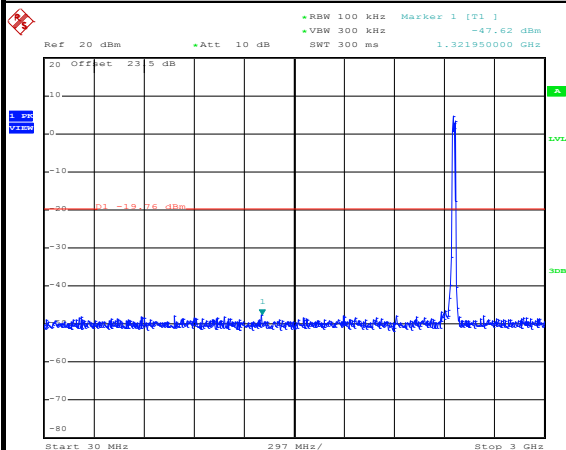

Date: 13.JAN.2015 09:55:11

Spurious Emission 2GHz~25GHz

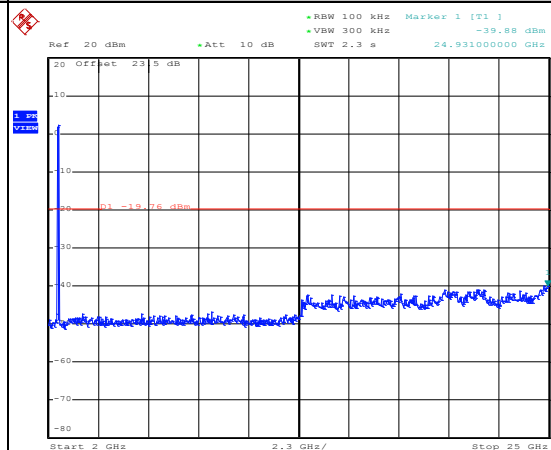


Date: 13.JAN.2015 09:55:29



Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT40 Channel 01

100kHz PSD reference Level

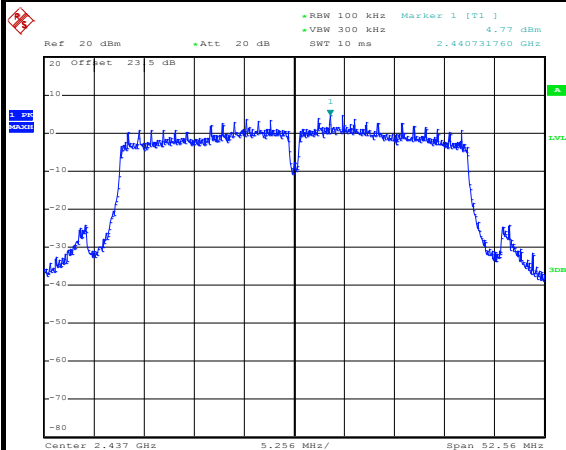


Date: 12.JAN.2015 15:11:13

Low Channel Plot

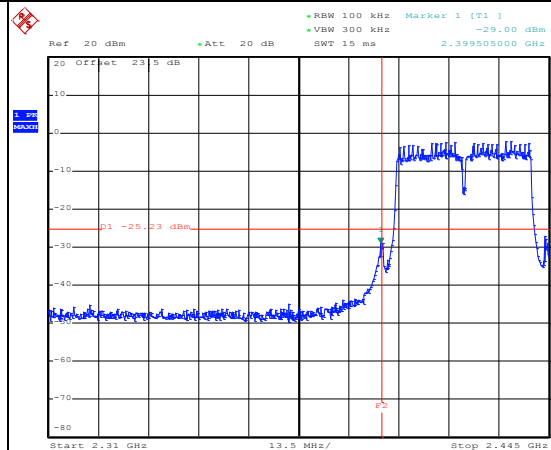


Date: 12.JAN.2015 15:13:56

Spurious Emission 30MHz~3GHz

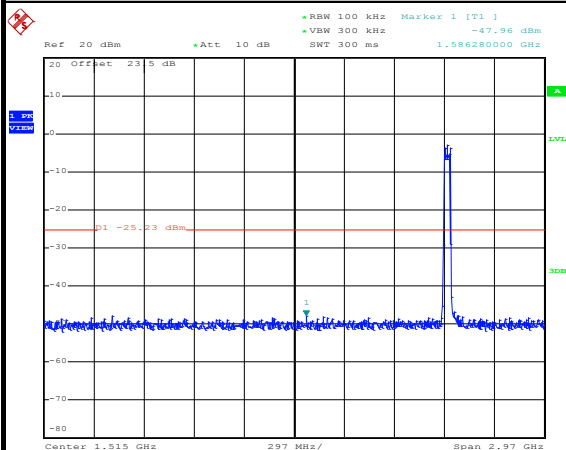

Date: 12.JAN.2015 15:15:42

Spurious Emission 2GHz~25GHz

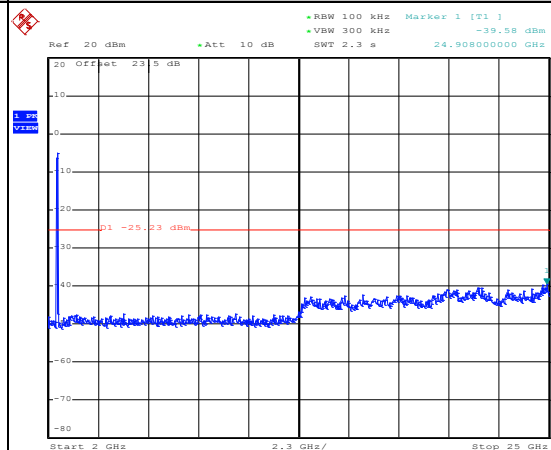


Date: 12.JAN.2015 15:16:00



Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802. 11n HT40 Channel 06

100kHz PSD reference Level

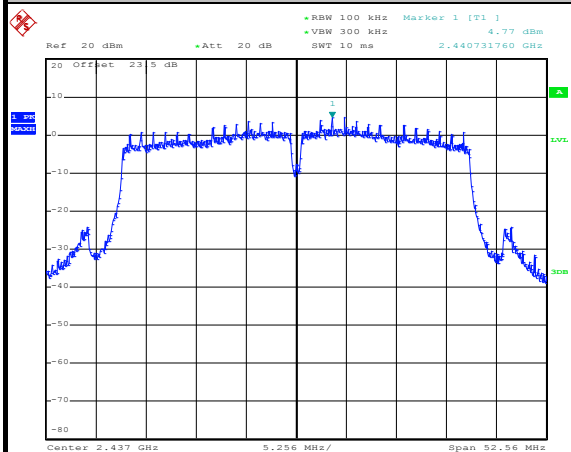


Date: 12.JAN.2015 15:11:13

Spurious Emission 30MHz~3GHz

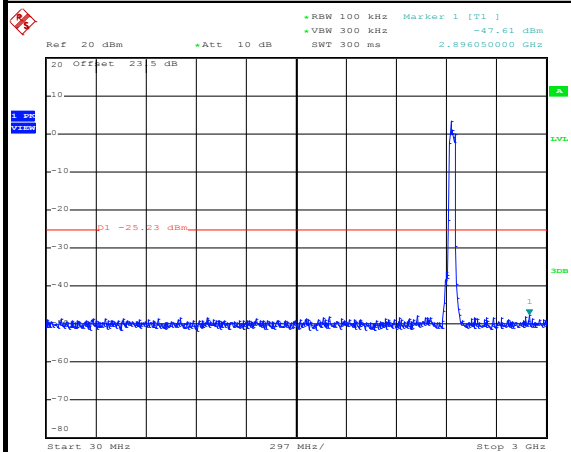

Date: 12.JAN.2015 15:11:54

Spurious Emission 2GHz~25GHz

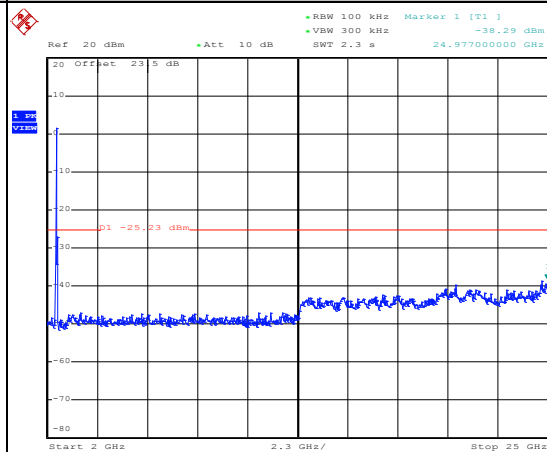


Date: 12.JAN.2015 15:12:12



Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT40 Channel 11

100kHz PSD reference Level

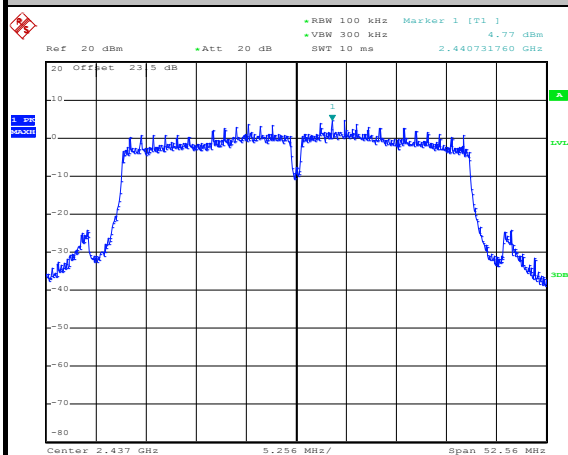


Date: 12.JAN.2015 15:11:13

High Channel Plot

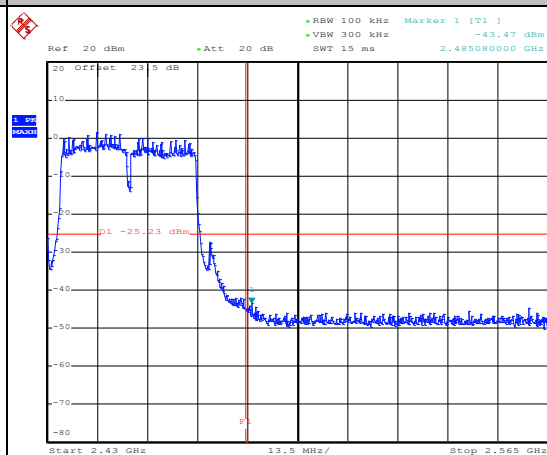


Date: 12.JAN.2015 15:30:34

Spurious Emission 30MHz~3GHz

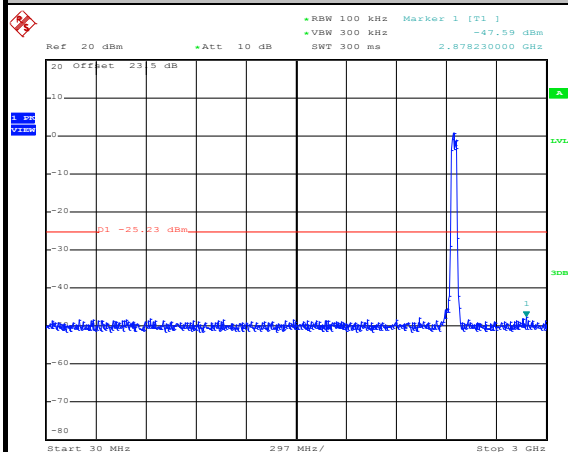

Date: 12.JAN.2015 15:30:57

Spurious Emission 2GHz~25GHz

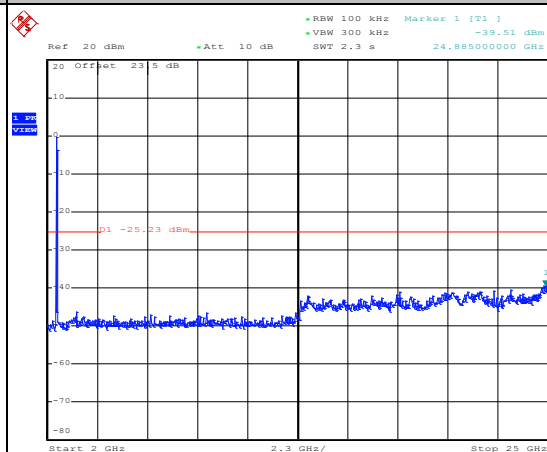

Date: 12.JAN.2015 15:31:15




Number of TX = 2, Ant. 1 (Measured)

Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

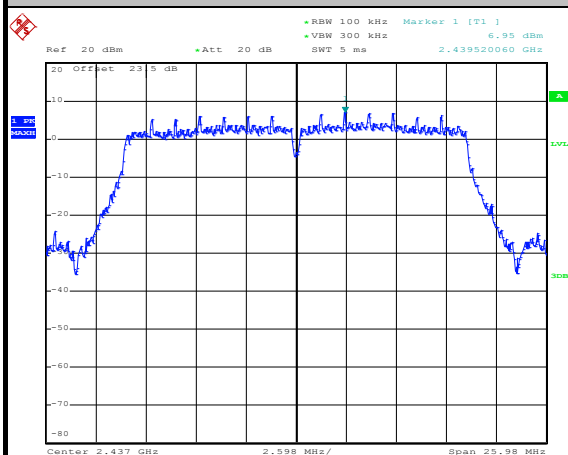


Date: 13.JAN.2015 09:58:04

Low Channel Plot

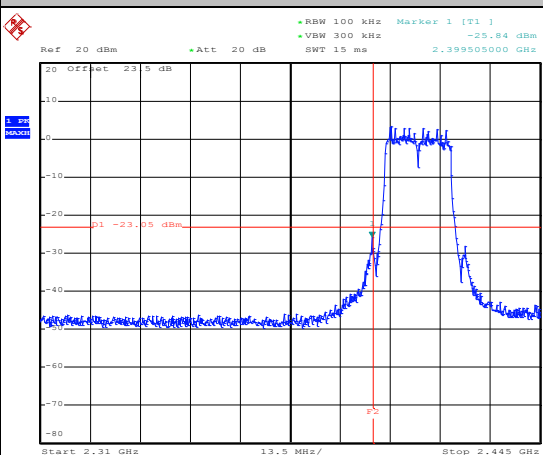


Date: 13.JAN.2015 09:59:30

Spurious Emission 30MHz~3GHz

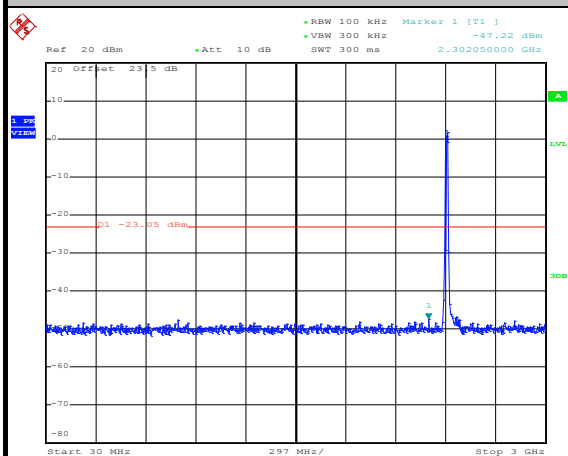

Date: 13.JAN.2015 09:59:51

Spurious Emission 2GHz~25GHz

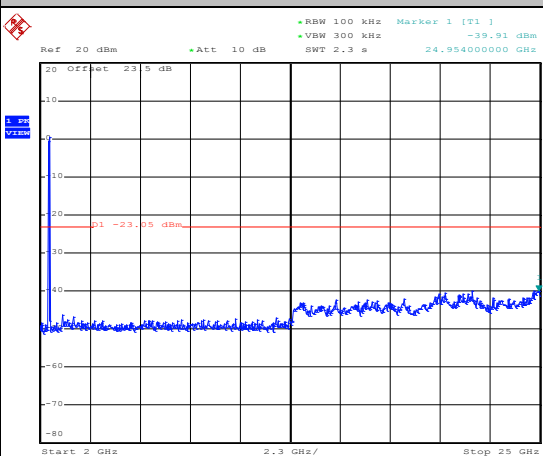


Date: 13.JAN.2015 10:00:09



Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

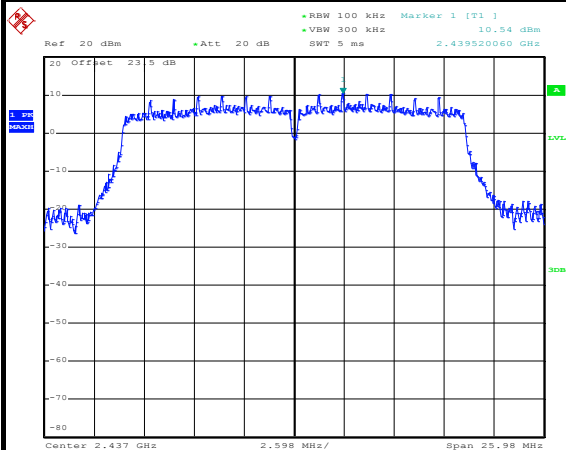


Date: 23.JAN.2015 11:55:15

Spurious Emission 30MHz~3GHz

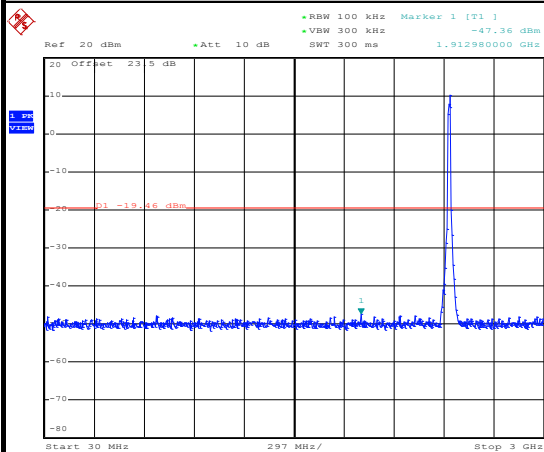

Date: 23.JAN.2015 11:55:47

Spurious Emission 2GHz~25GHz

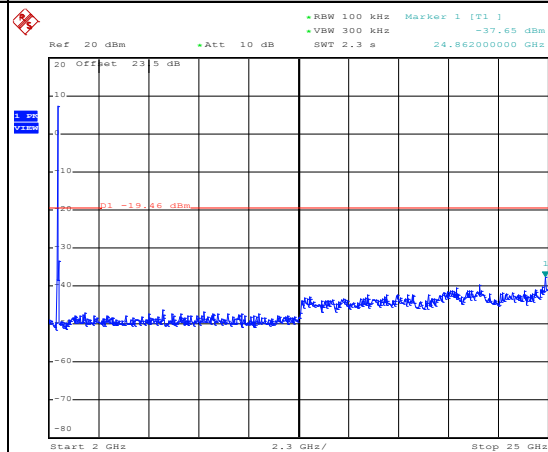


Date: 23.JAN.2015 11:56:05



Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

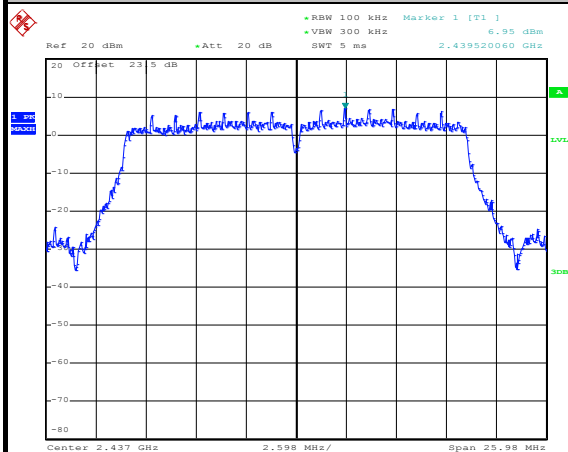


Date: 13.JAN.2015 09:58:04

High Channel Plot

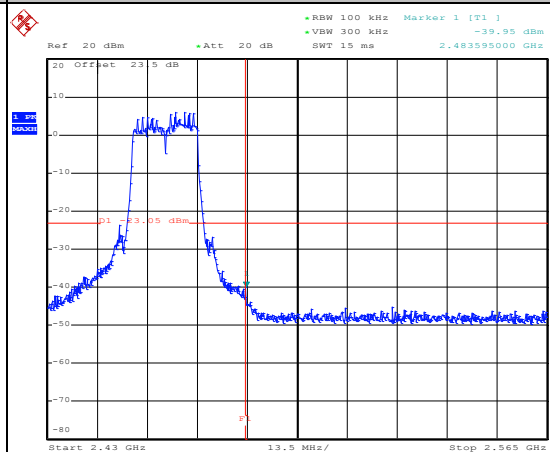


Date: 13.JAN.2015 10:01:08

Spurious Emission 30MHz~3GHz

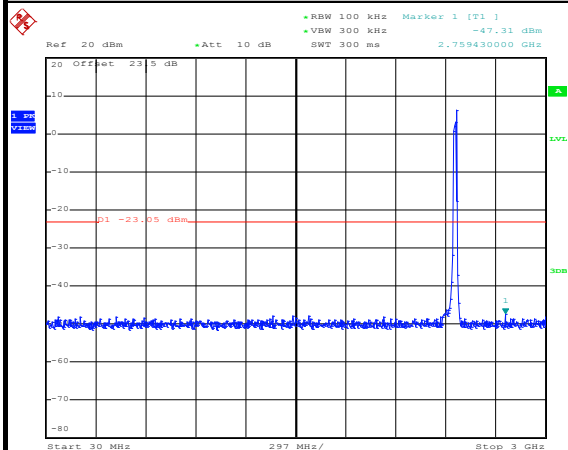

Date: 13.JAN.2015 10:01:31

Spurious Emission 2GHz~25GHz

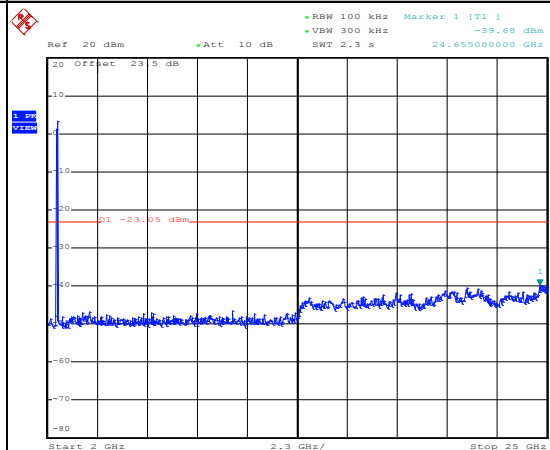


Date: 13.JAN.2015 10:01:49



Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	03	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

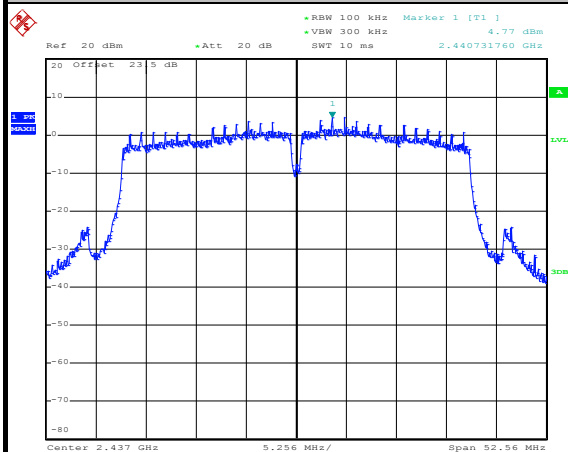


Date: 12.JAN.2015 15:11:13

Low Channel Plot

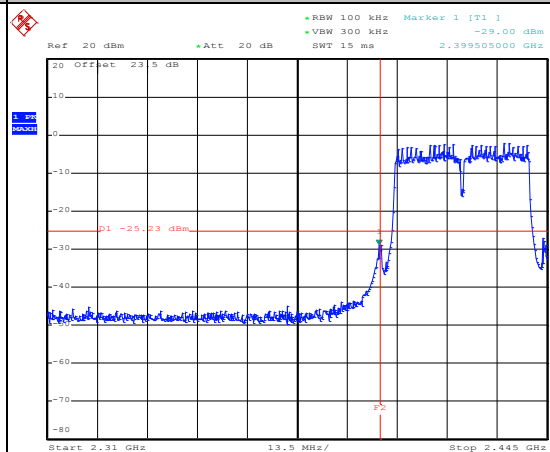


Date: 12.JAN.2015 15:13:56

Spurious Emission 30MHz~3GHz

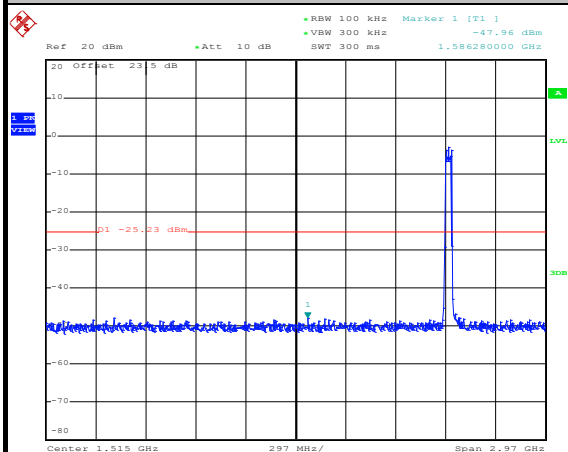

Date: 12.JAN.2015 15:15:42

Spurious Emission 2GHz~25GHz

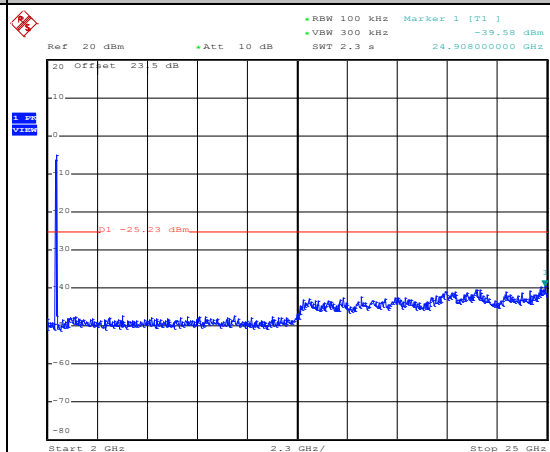


Date: 12.JAN.2015 15:16:00



Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

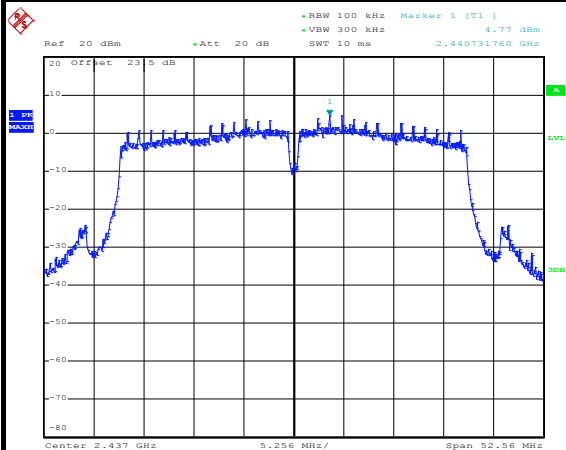


Date: 12.JAN.2015 15:11:13

Spurious Emission 30MHz~3GHz

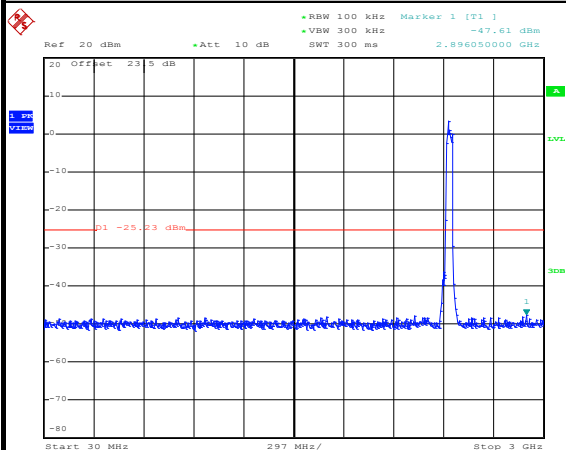

Date: 12.JAN.2015 15:11:54


Spurious Emission 2GHz~25GHz

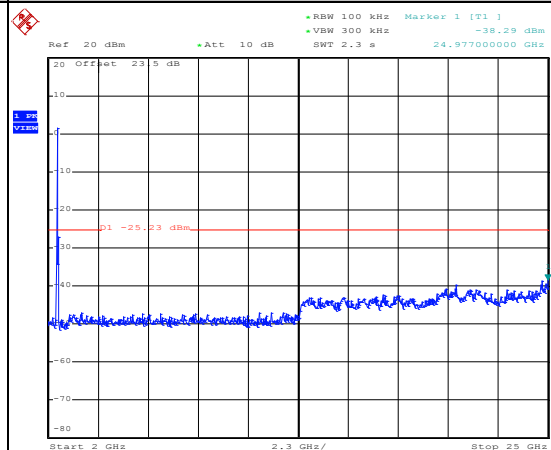


Date: 12.JAN.2015 15:12:12




Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	09	Test Engineer :	Alen Tsui and Luffy Lin

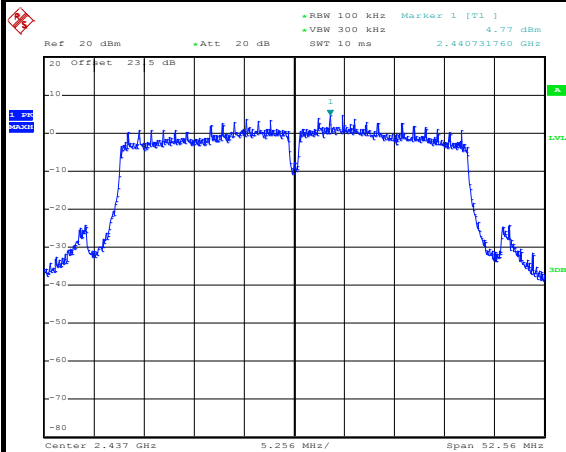WLAN 802.11n HT40 Channel 09**High Channel Plot**


Date: 12.JAN.2015 15:11:13

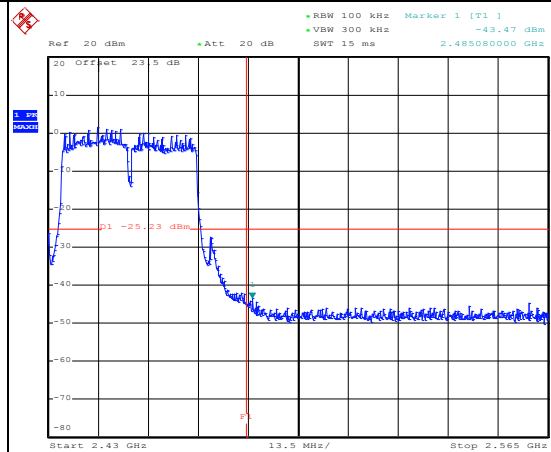

Date: 12.JAN.2015 15:30:34

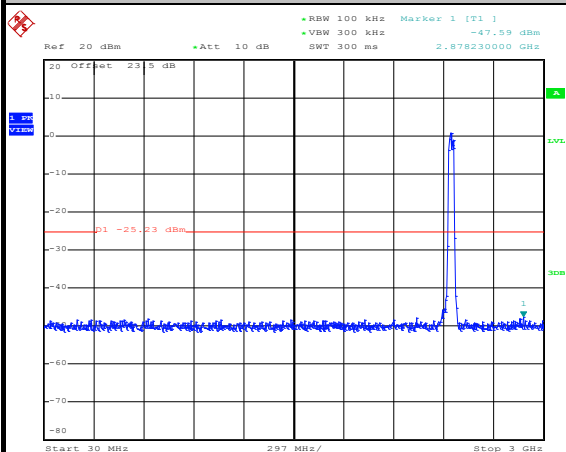Spurious Emission 30MHz~3GHz**Spurious Emission 2GHz~25GHz**


Date: 12.JAN.2015 15:30:57

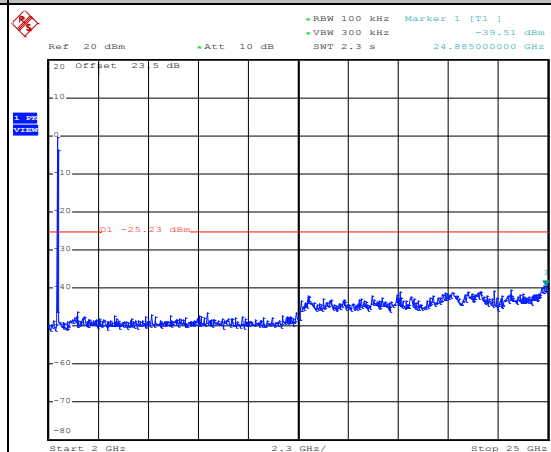


Date: 12.JAN.2015 15:31:15

**Number of TX = 2, Ant. 2 (Measured)**


Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	Alen Tsui and Luffy Lin

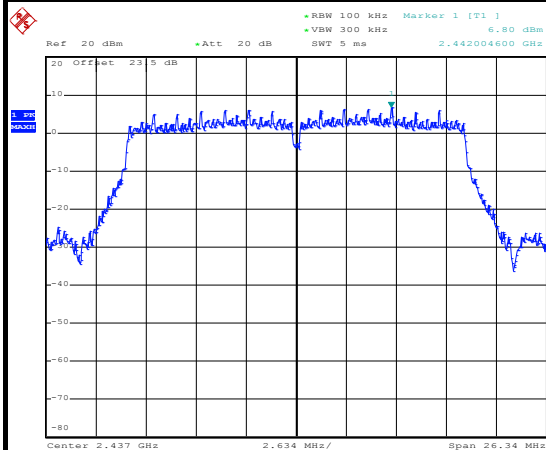WLAN 802.11n HT20 Channel 01**Low Channel Plot**


Date: 13.JAN.2015 10:04:15

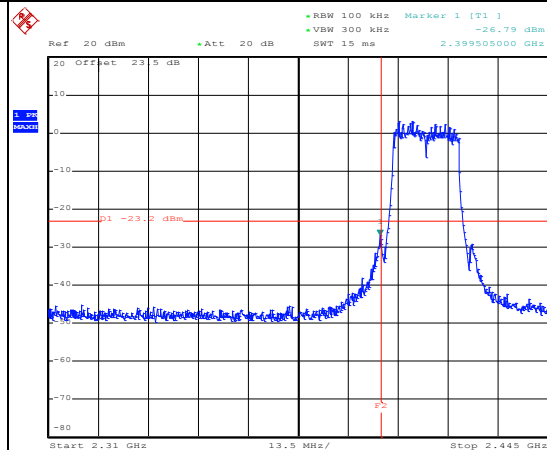

Date: 13.JAN.2015 10:05:50

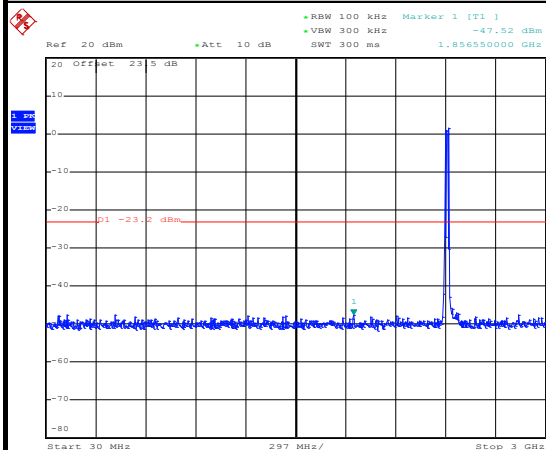Spurious Emission 30MHz~3GHz**Spurious Emission 2GHz~25GHz**


Date: 13.JAN.2015 10:06:11

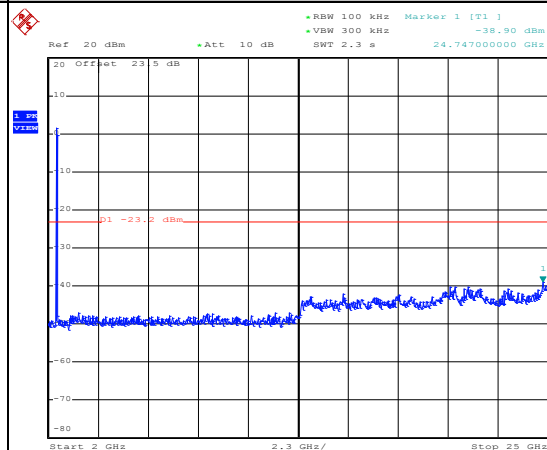


Date: 13.JAN.2015 10:06:29




Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	Alen Tsui and Luffy Lin

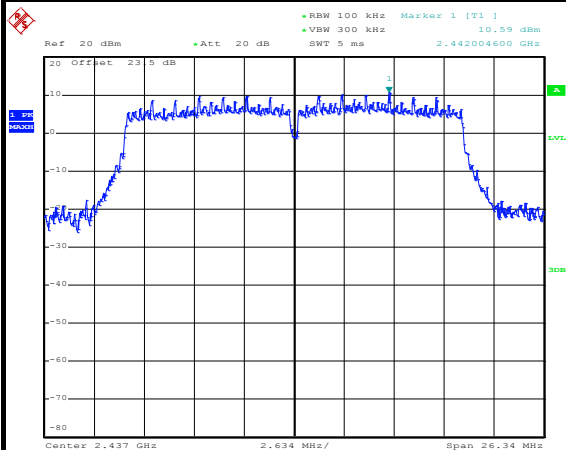WLAN 802.11n HT20 Channel 06**100kHz PSD reference Level**

Date: 23.JAN.2015 13:46:41

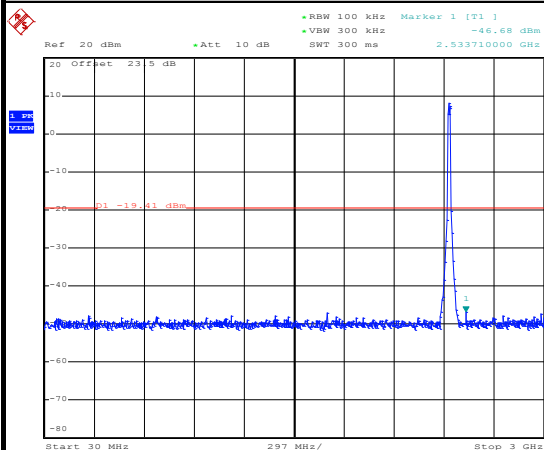Spurious Emission 30MHz~3GHz

Date: 23.JAN.2015 13:47:20

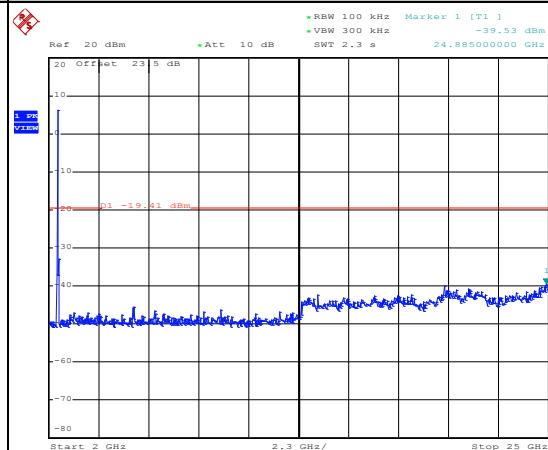Spurious Emission 2GHz~25GHz


Date: 23.JAN.2015 13:47:38




Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	Alen Tsui and Luffy Lin

WLAN 802.11n HT20 Channel 11

High Channel Plot

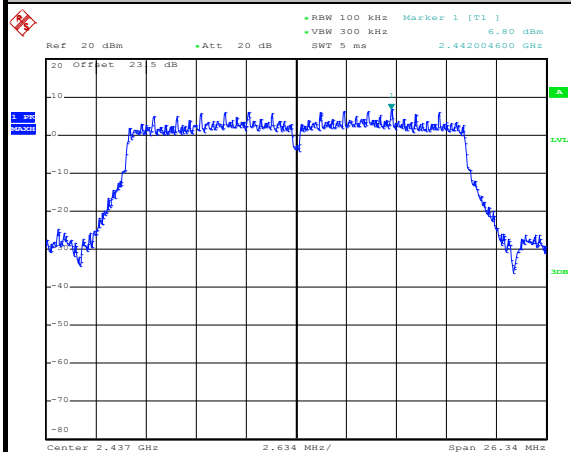


Date: 13.JAN.2015 10:04:15

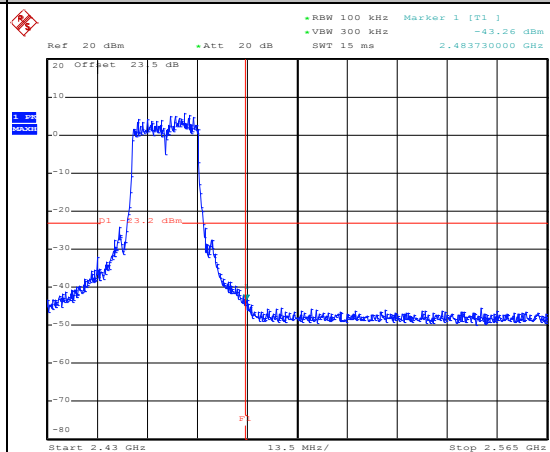


Date: 13.JAN.2015 10:07:37

Spurious Emission 30MHz~3GHz

Spurious Emission 2GHz~25GHz

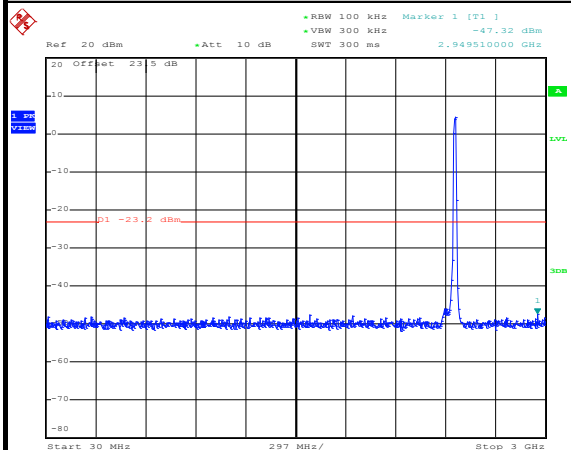

Date: 13.JAN.2015 10:07:59

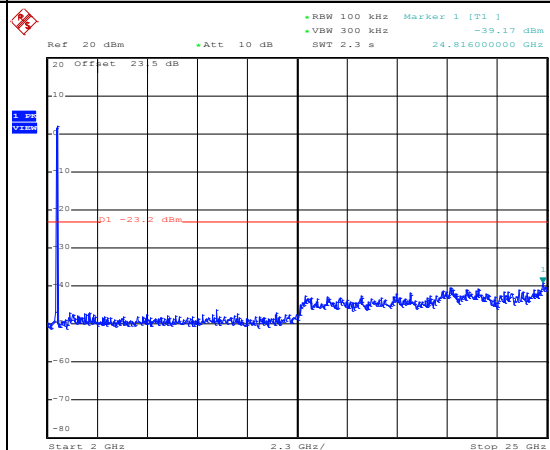


Date: 13.JAN.2015 10:08:17




Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	03	Test Engineer :	Alen Tsui and Luffy Lin

WLAN 802.11n HT40 Channel 03

Low Channel Plot

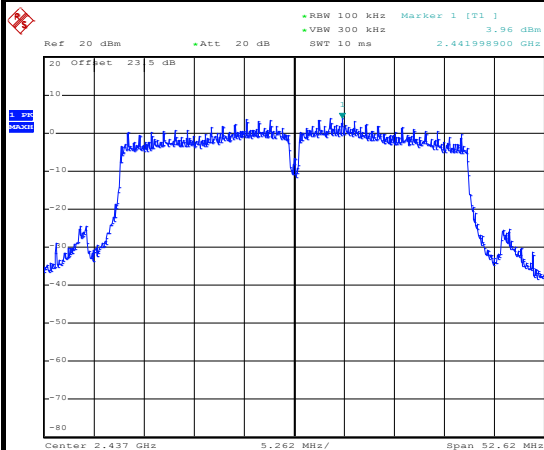


Date: 12.JAN.2015 17:18:54

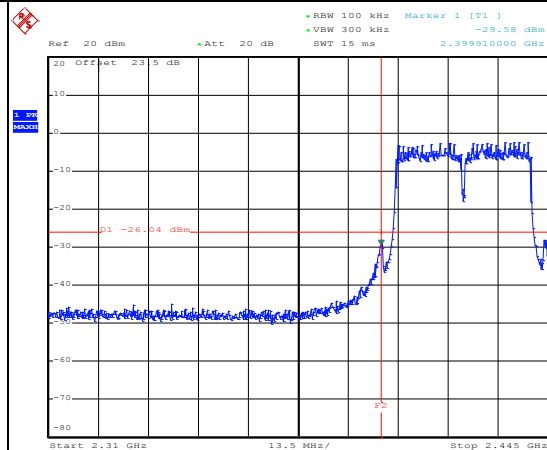


Date: 12.JAN.2015 17:33:20

Spurious Emission 30MHz~3GHz

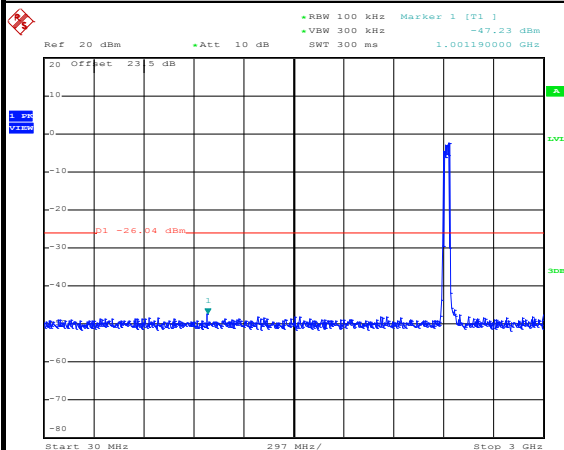

Date: 12.JAN.2015 17:33:42

Spurious Emission 2GHz~25GHz

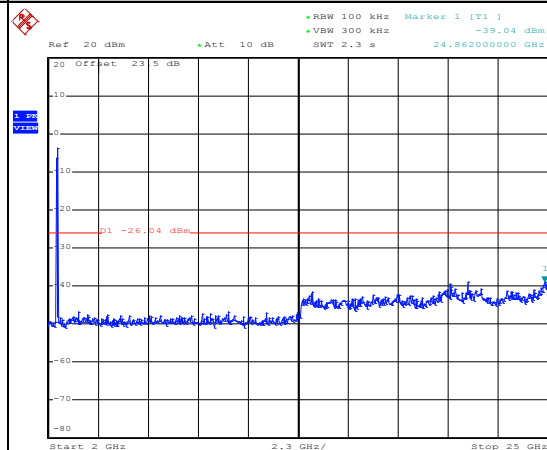


Date: 12.JAN.2015 17:34:00



Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	Alen Tsui and Luffy Lin


WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

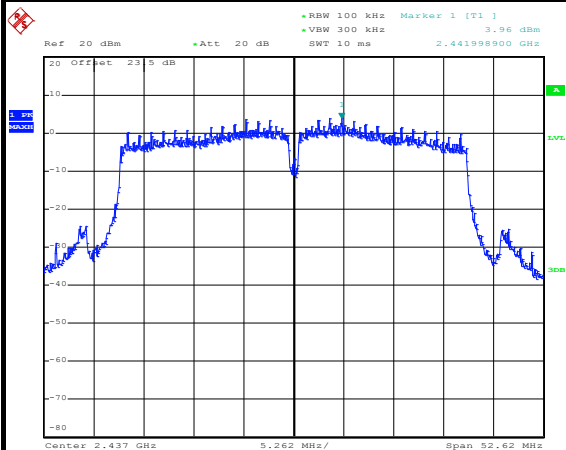


Date: 12.JAN.2015 17:18:54

Spurious Emission 30MHz~3GHz

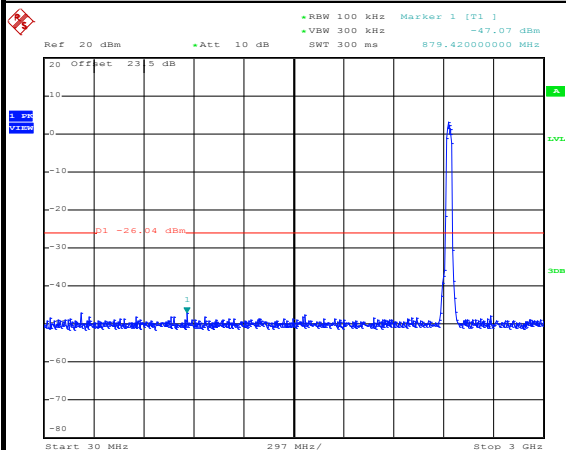

Date: 12.JAN.2015 17:19:45

Spurious Emission 2GHz~25GHz

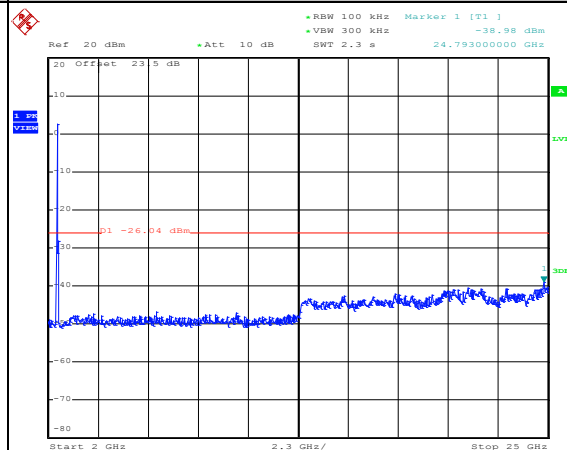


Date: 12.JAN.2015 17:20:03




Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	09	Test Engineer :	Alen Tsui and Luffy Lin

WLAN 802.11n HT40 Channel 09

High Channel Plot

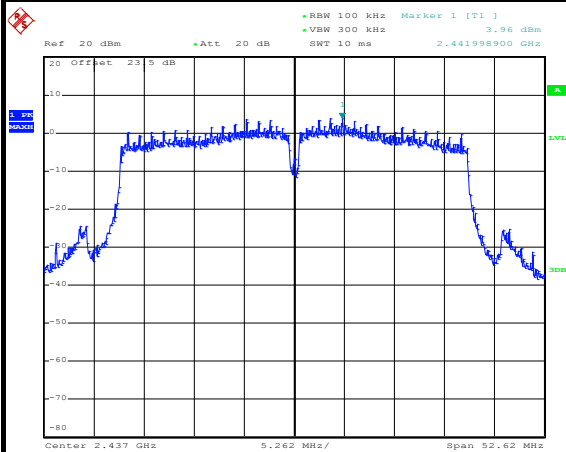


Date: 12.JAN.2015 17:18:54

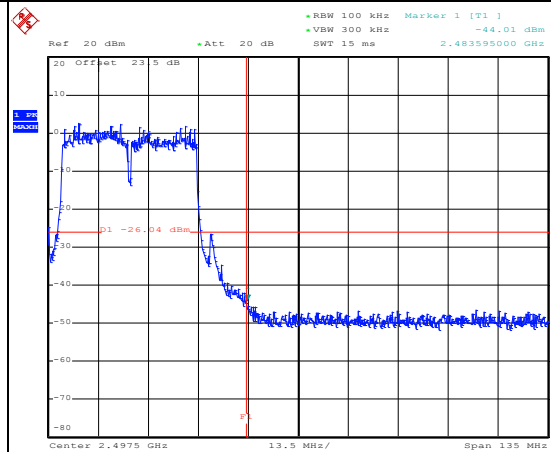


Date: 12.JAN.2015 17:52:12

Spurious Emission 30MHz~3GHz

Spurious Emission 2GHz~25GHz

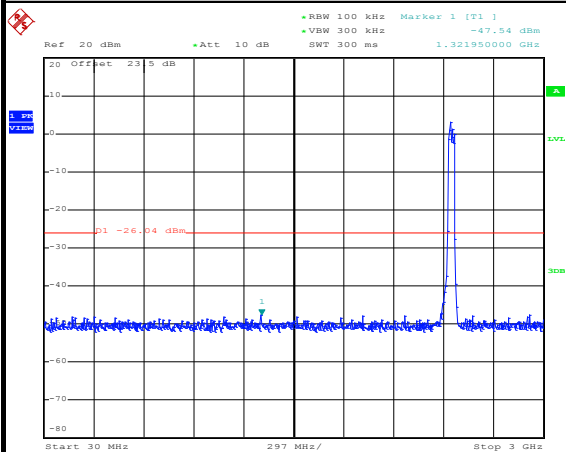

Date: 12.JAN.2015 17:54:22

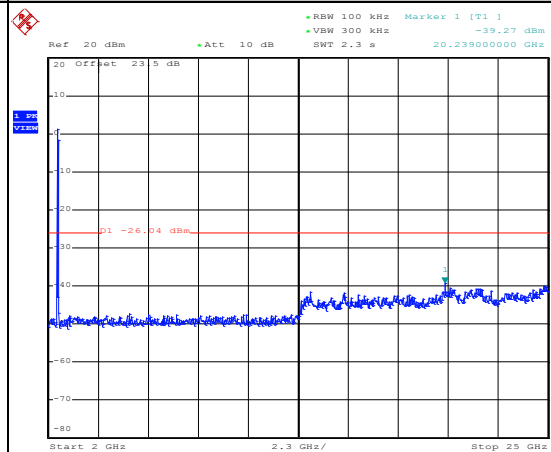

Date: 12.JAN.2015 17:53:42

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11b	95.72	1253.7179	0.7976276	1kHz
1	802.11g Ant 1	95.57	2073.205	0.482344968	
2	802.11g Ant 2	95.59	2083.333	0.480000077	
1	2.4GHz 802.11n HT20 for Ant 1	95.24	1923.077	0.519999979	
2	2.4GHz 802.11n HT20 for Ant 2	95.24	1923.077	0.519999979	
1+2	2.4GHz 802.11n HT20 for Ant 1	91.04	977.5641	1.022950822	3kHz
1+2	2.4GHz 802.11n HT20 for Ant 2	91.04	977.5641	1.022950822	
1	2.4GHz 802.11n HT40 for Ant 1	90.77	945.512821	1.057627118	
2	2.4GHz 802.11n HT40 for Ant 2	90.77	945.512821	1.057627118	
1+2	2.4GHz 802.11n HT40 for Ant 1	83.78	4967.94872	0.201290322	300Hz
1+2	2.4GHz 802.11n HT40 for Ant 2	84.72	4887.82061	0.20459016	

3.5.4 Test Setup


For radiated emissions below 30MHz

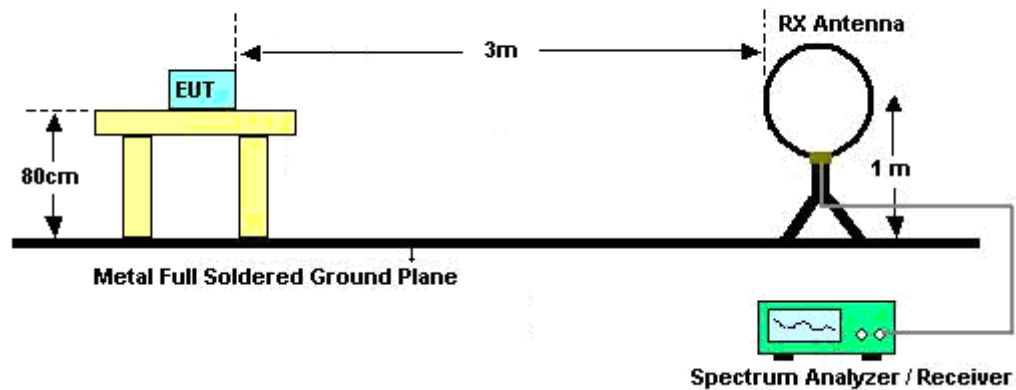

For radiated emissions from 30MHz to 1GHz

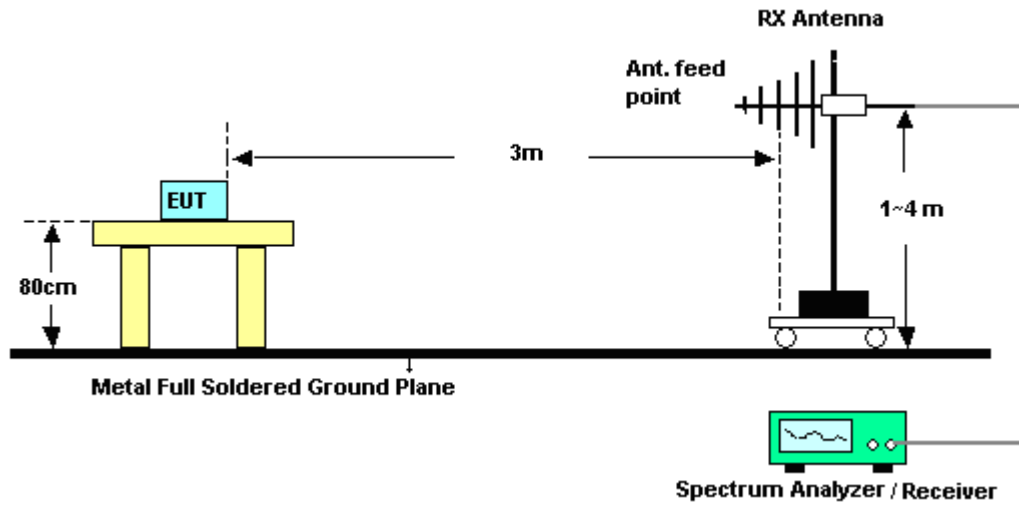

For radiated emissions above 1GHz

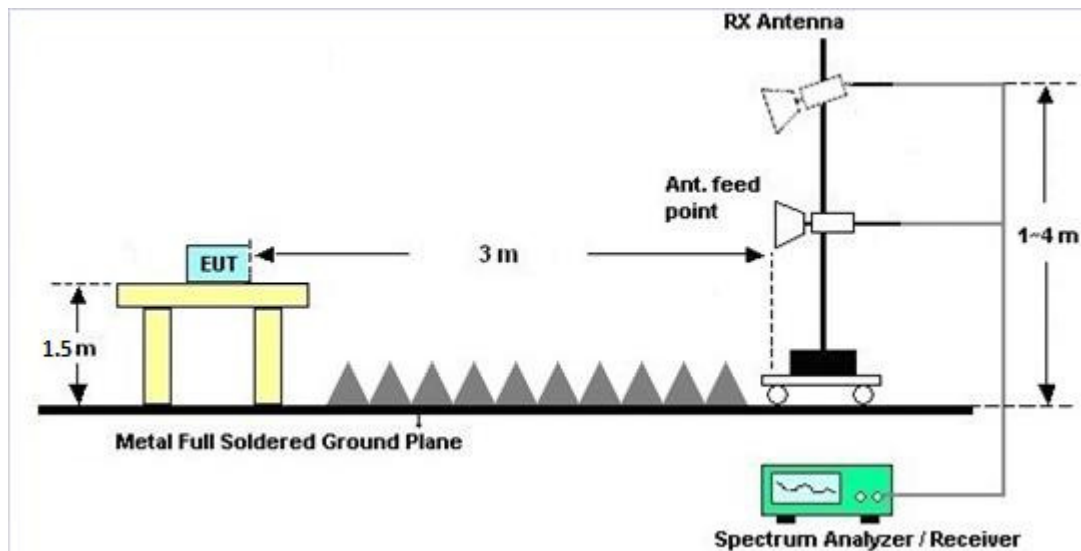



3.5.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B of this test report.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B of this test report.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

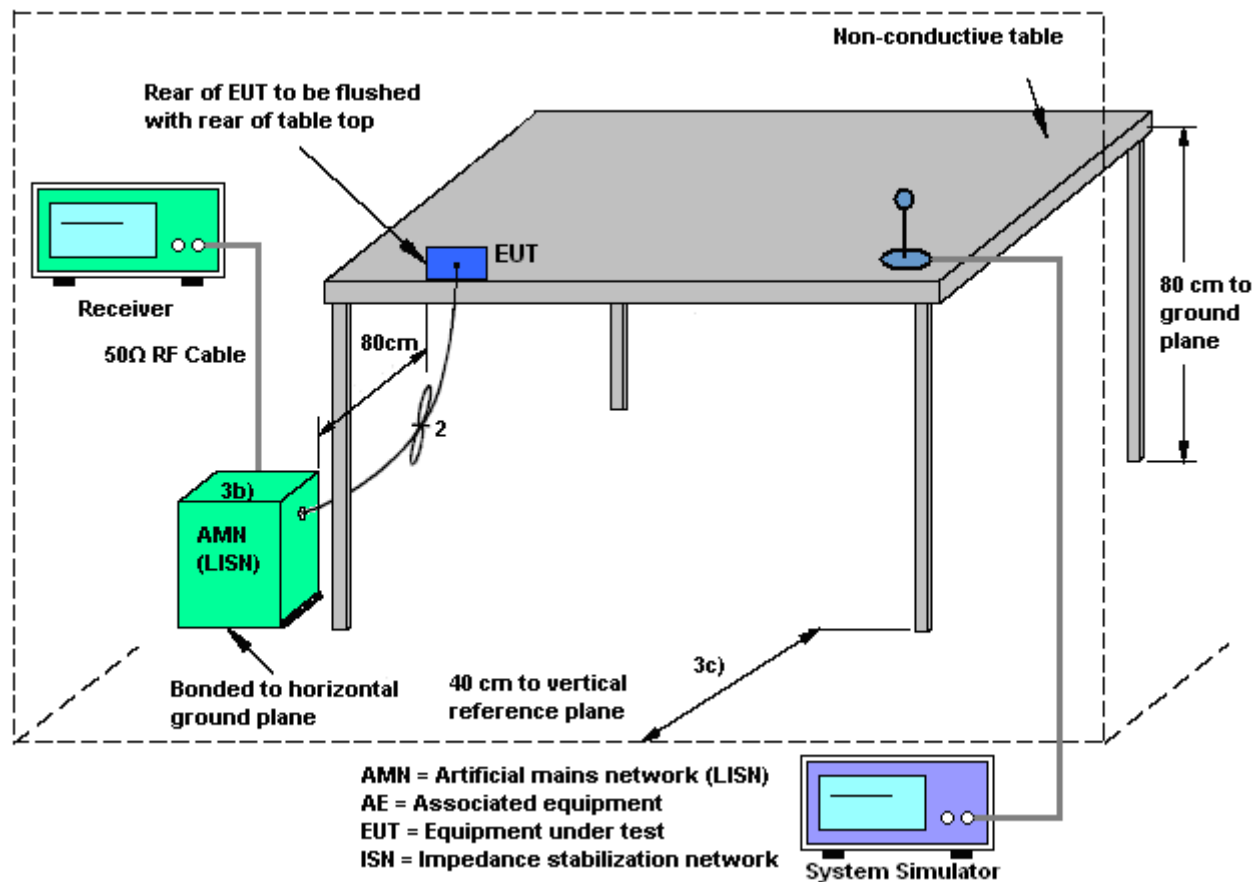

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22℃
Test Engineer :	Eric Jeng	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 (GPRS Class 8) Idle + WLAN Link + LAN Link + PoE1 Link + Battery		

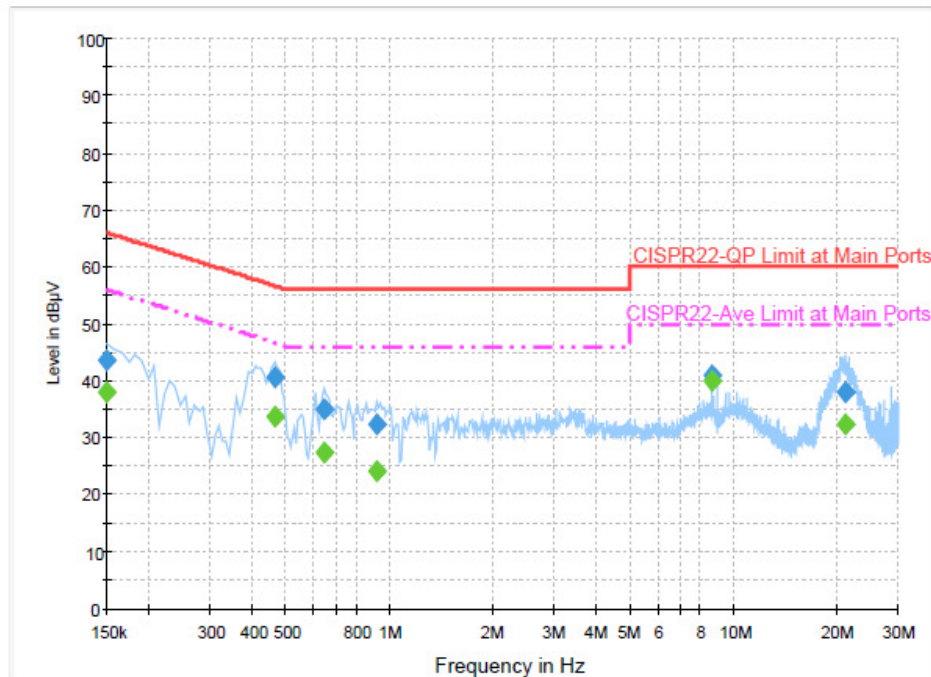

Final Result : QuasiPeak


Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	43.7	Off	L1	19.4	22.3	66.0
0.462000	40.5	Off	L1	19.5	16.2	56.7
0.646000	35.1	Off	L1	19.5	20.9	56.0
0.918000	32.5	Off	L1	19.5	23.5	56.0
8.678000	41.0	Off	L1	19.6	19.0	60.0
20.966000	38.0	Off	L1	19.8	22.0	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	38.0	Off	L1	19.4	18.0	56.0
0.462000	33.6	Off	L1	19.5	13.1	46.7
0.646000	27.4	Off	L1	19.5	18.6	46.0
0.918000	24.0	Off	L1	19.5	22.0	46.0
8.678000	40.0	Off	L1	19.6	10.0	50.0
20.966000	32.2	Off	L1	19.8	17.8	50.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Eric Jeng	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 (GPRS Class 8) Idle + WLAN Link + LAN Link + PoE1 Link + Battery		

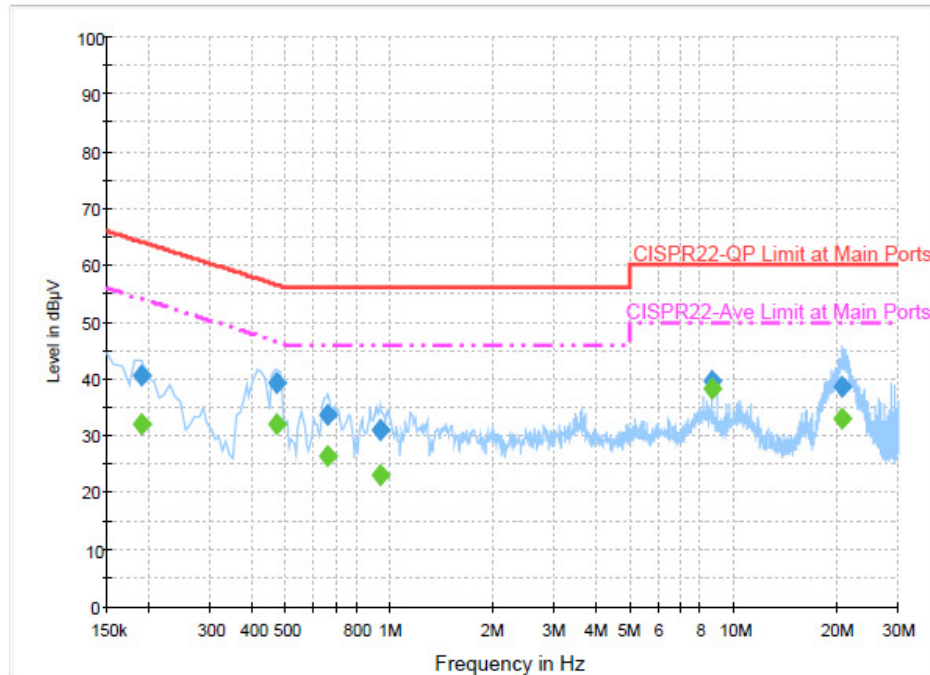**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	40.5	Off	N	19.5	23.5	64.0
0.470000	39.3	Off	N	19.5	17.2	56.5
0.662000	33.5	Off	N	19.5	22.5	56.0
0.934000	31.0	Off	N	19.5	25.0	56.0
8.678000	39.5	Off	N	19.7	20.5	60.0
20.710000	38.5	Off	N	19.8	21.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	32.2	Off	N	19.5	21.8	54.0
0.470000	31.9	Off	N	19.5	14.6	46.5
0.662000	26.3	Off	N	19.5	19.7	46.0
0.934000	23.1	Off	N	19.5	22.9	46.0
8.678000	38.4	Off	N	19.7	11.6	50.0
20.710000	32.9	Off	N	19.8	17.1	50.0

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

For CDD transmissions, directional gain is calculated as

Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 1	Ant. 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	5.50	5.50	5.50	8.51	0.00	2.51

$\text{Power Limit Reduction} = DG(\text{Power}) - 6\text{dBi}, (\text{min} = 0)$

$\text{PSD Limit Reduction} = DG(\text{PSD}) - 6\text{dBi}, (\text{min} = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Nov. 26, 2014 ~ Jan. 28, 2015	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 09, 2014	Nov. 26, 2014 ~ Jan. 28, 2015	Aug. 08, 2015	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 09, 2014	Nov. 26, 2014 ~ Jan. 28, 2015	Aug. 08, 2015	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Aug. 30, 2014	Nov. 27, 2014	Aug. 29, 2015	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	Nov. 27, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	Nov. 27, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 27, 2014	N/A	Conduction (CO05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz- 40GHz	Oct. 02, 2014	Jan. 14, 2015~ Feb. 03, 2015	Oct. 01, 2015	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	0.1MHz~1000MHz	Nov. 24, 2014	Jan. 14, 2015~ Feb. 03, 2015	Nov. 23, 2015	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 24, 2014	Jan. 14, 2015~ Feb. 03, 2015	Oct. 23, 2015	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 20, 2014	Jan. 14, 2015~ Feb. 03, 2015	Nov. 19, 2015	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902247	1GHz~18GHz	Nov. 25, 2014	Jan. 14, 2015~ Feb. 03, 2015	Nov. 24, 2015	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	N/A	Sep. 24, 2014	Jan. 14, 2015~ Feb. 03, 2015	Sep. 23, 2015	Radiation (03CH11-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 03, 2014	Jan. 14, 2015~ Feb. 03, 2015	Oct. 02, 2015	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	N/A	N/A	Jan. 14, 2015~ Feb. 03, 2015	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0-360 degree	N/A	Jan. 14, 2015~ Feb. 03, 2015	N/A	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90
---	------



Appendix A. Radiated Spurious Emission

Test Engineer :	Stan Hsieh, Luke Chang, and Lewis He	Temperature :	22~23°C
		Relative Humidity :	45~47%

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	56.85	-17.15	74	57.65	27.23	6.01	34.04	115	149	P	H
		2389.56	47.85	-6.15	54	48.65	27.23	6.01	34.04	115	149	A	H
	*	2413.193	108.42	-	-	109.14	27.28	6.04	34.04	115	149	P	H
	*	2413.36	105.8	-	-	106.52	27.28	6.04	34.04	115	149	A	H
													H
													H
		2389.56	61.62	-12.38	74	62.42	27.23	6.01	34.04	202	213	P	V
		2390	53.43	-0.57	54	54.23	27.23	6.01	34.04	202	213	A	V
	*	2412.024	115.06	-	-	115.78	27.28	6.04	34.04	202	213	P	V
	*	2413.11	111.57	-	-	112.29	27.28	6.04	34.04	202	213	A	V
													V
													V
802.11b CH 06 2437MHz		2389.65	56.52	-17.48	74	57.32	27.23	6.01	34.04	238	199	P	H
		2390	47.12	-6.88	54	47.92	27.23	6.01	34.04	238	199	A	H
	*	2438.243	110.71	-	-	111.33	27.37	6.04	34.03	238	199	P	H
	*	2438.326	108.14	-	-	108.76	27.37	6.04	34.03	238	199	A	H
		2483.52	54.61	-19.39	74	55.07	27.46	6.09	34.01	238	199	P	H
		2483.68	45.78	-8.22	54	46.24	27.46	6.09	34.01	238	199	A	H
		2389.74	62.2	-11.8	74	63	27.23	6.01	34.04	175	217	P	V
		2389.92	53.18	-0.82	54	53.98	27.23	6.01	34.04	175	217	A	V
	*	2437.074	115.24	-	-	115.86	27.37	6.04	34.03	175	217	P	V
	*	2438.827	112.14	-	-	112.76	27.37	6.04	34.03	175	217	A	V
		2483.56	62.06	-11.94	74	62.52	27.46	6.09	34.01	175	217	P	V
		2483.52	52.43	-1.57	54	52.89	27.46	6.09	34.01	175	217	A	V



802.11b CH 11 2462MHz	*	2462.041	109.73	-	-	110.27	27.41	6.07	34.02	229	196	P	H
	*	2460.955	107.12	-	-	107.66	27.41	6.07	34.02	229	196	A	H
		2484.12	55.81	-18.19	74	56.27	27.46	6.09	34.01	229	196	P	H
		2483.52	47.01	-6.99	54	47.47	27.46	6.09	34.01	229	196	A	H
													H
													H
	*	2462.041	115.1	-	-	115.64	27.41	6.07	34.02	165	227	P	V
	*	2463.293	111.57	-	-	112.11	27.41	6.07	34.02	165	227	A	V
		2483.72	60.69	-13.31	74	61.15	27.46	6.09	34.01	165	227	P	V
		2483.52	51.91	-2.09	54	52.37	27.46	6.09	34.01	165	227	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	35.12	-38.88	74	53.76	31.32	8.65	58.61	100	0	P	H
													H
													H
													H
		4824	42.3	-31.7	74	60.94	31.32	8.65	58.61	100	0	P	V
													V
													V
													V
802.11b CH 06 2437MHz		4874	41.23	-32.77	74	59.65	31.41	8.69	58.52	100	0	P	H
		7311	42.45	-31.55	74	53.94	36.28	10.39	58.16	100	0	P	H
													H
													H
		4874	40.23	-33.77	74	58.65	31.41	8.69	58.52	100	0	P	V
		7311	44.99	-29.01	74	56.48	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11b CH 11 2462MHz		4924	43.64	-30.36	74	61.78	31.49	8.79	58.42	100	0	P	H
		7386	42.18	-31.82	74	53.54	36.47	10.48	58.31	100	0	P	H
													H
													H
		4924	41.05	-32.95	74	59.19	31.49	8.79	58.42	100	0	P	V
		7386	43.72	-30.28	74	55.08	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.65	63.6	-10.4	74	64.4	27.23	6.01	34.04	139	147	P	H
		2390	46.9	-7.1	54	47.7	27.23	6.01	34.04	139	147	A	H
	*	2414	105.52	-	-	106.24	27.28	6.04	34.04	139	147	P	H
	*	2414	97.74	-	-	98.46	27.28	6.04	34.04	139	147	A	H
													H
													H
		2388.48	67.24	-6.76	74	68.04	27.23	6.01	34.04	157	242	P	V
		2390	53.85	-0.15	54	54.65	27.23	6.01	34.04	157	242	A	V
	*	2414	112.92	-	-	113.64	27.28	6.04	34.04	157	242	P	V
	*	2414	104.95	-	-	105.67	27.28	6.04	34.04	157	242	A	V
													V
													V
802.11g CH 06 2437MHz		2389.74	54.92	-19.08	74	55.72	27.23	6.01	34.04	245	199	P	H
		2390	45.95	-8.05	54	46.75	27.23	6.01	34.04	245	199	A	H
	*	2437	111.3	-	-	111.92	27.37	6.04	34.03	245	199	P	H
	*	2437	103.32	-	-	103.94	27.37	6.04	34.03	245	199	A	H
		2484.6	54.57	-19.43	74	55.03	27.46	6.09	34.01	245	199	P	H
		2483.56	44.94	-9.06	54	45.4	27.46	6.09	34.01	245	199	A	H
		2389.47	60.84	-13.16	74	61.64	27.23	6.01	34.04	174	219	P	V
		2390	51.37	-2.63	54	52.17	27.23	6.01	34.04	174	219	A	V
	*	2437	116.53	-	-	117.15	27.37	6.04	34.03	174	219	P	V
	*	2437	109.12	-	-	109.74	27.37	6.04	34.03	174	219	A	V
		2483.76	60.12	-13.88	74	60.58	27.46	6.09	34.01	174	219	P	V
		2483.68	50.95	-3.05	54	51.41	27.46	6.09	34.01	174	219	A	V



802.11g CH 11 2462MHz	*	2464	107.04	-	-	107.58	27.41	6.07	34.02	225	195	P	H
	*	2464	99.28	-	-	99.82	27.41	6.07	34.02	225	195	A	H
		2484.08	61.38	-12.62	74	61.84	27.46	6.09	34.01	225	195	P	H
		2483.56	47.5	-6.5	54	47.96	27.46	6.09	34.01	225	195	A	H
													H
													H
	*	2464	113.3	-	-	113.84	27.41	6.07	34.02	167	236	P	V
	*	2464	105.78	-	-	106.32	27.41	6.07	34.02	167	236	A	V
		2483.6	66.89	-7.11	74	67.35	27.46	6.09	34.01	167	236	P	V
		2483.56	53.11	-0.89	54	53.57	27.46	6.09	34.01	167	236	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	36.44	-37.56	74	55.08	31.32	8.65	58.61	100	0	P	H
													H
													H
													H
		4824	35.81	-38.19	74	54.45	31.32	8.65	58.61	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4874	35.49	-38.51	74	53.91	31.41	8.69	58.52	100	0	P	H
		7311	41.95	-32.05	74	53.44	36.28	10.39	58.16	100	0	P	H
													H
													H
		4874	35.34	-38.66	74	53.76	31.41	8.69	58.52	100	0	P	V
		7311	42.68	-31.32	74	54.17	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4924	35.03	-38.97	74	53.17	31.49	8.79	58.42	100	0	P	H
		7386	40.41	-33.59	74	51.77	36.47	10.48	58.31	100	0	P	H
													H
													H
		4924	34.12	-39.88	74	52.26	31.49	8.79	58.42	100	0	P	V
		7386	40.9	-33.1	74	52.26	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.92	58.35	-15.65	74	59.15	27.23	6.01	34.04	136	146	P	H
		2389.92	47.06	-6.94	54	47.86	27.23	6.01	34.04	136	146	A	H
	*	2414	104.98	-	-	105.7	27.28	6.04	34.04	136	146	P	H
	*	2414	97.39	-	-	98.11	27.28	6.04	34.04	136	146	A	H
													H
													H
		2387.22	64.86	-9.14	74	65.66	27.23	6.01	34.04	158	245	P	V
		2390	53.29	-0.71	54	54.09	27.23	6.01	34.04	158	245	A	V
	*	2414	111.56	-	-	112.28	27.28	6.04	34.04	158	245	P	V
	*	2414	104.17	-	-	104.89	27.28	6.04	34.04	158	245	A	V
													V
													V
802.11n HT20 CH 06 2437MHz		2346.99	52.1	-21.9	74	53.1	27.1	5.95	34.05	124	223	P	H
		2388.48	42.47	-11.53	54	43.27	27.23	6.01	34.04	124	223	A	H
	*	2439	101.28	-	-	101.9	27.37	6.04	34.03	124	223	P	H
	*	2439	92.59	-	-	93.21	27.37	6.04	34.03	124	223	A	H
		2499.92	53.14	-20.86	74	53.55	27.5	6.09	34	124	223	P	H
		2500	44.1	-9.9	54	44.51	27.5	6.09	34	124	223	A	H
		2388.93	62.59	-11.41	74	63.39	27.23	6.01	34.04	149	228	P	V
		2389.92	51.93	-2.07	54	52.73	27.23	6.01	34.04	149	228	A	V
	*	2435	116.68	-	-	117.35	27.32	6.04	34.03	149	228	P	V
	*	2435	108.91	-	-	109.58	27.32	6.04	34.03	149	228	A	V
		2483.96	60.52	-13.48	74	60.98	27.46	6.09	34.01	149	228	P	V
		2483.52	50.4	-3.6	54	50.86	27.46	6.09	34.01	149	228	A	V



802.11n HT20 CH 11 2462MHz	*	2464	107.42	-	-	107.96	27.41	6.07	34.02	234	194	P	H
	*	2464	99.65	-	-	100.19	27.41	6.07	34.02	234	194	A	H
		2483.88	63.33	-10.67	74	63.79	27.46	6.09	34.01	234	194	P	H
		2483.52	49.49	-4.51	54	49.95	27.46	6.09	34.01	234	194	A	H
													H
													H
	*	2460	113.09	-	-	113.63	27.41	6.07	34.02	178	241	P	V
	*	2460	105.17	-	-	105.71	27.41	6.07	34.02	178	241	A	V
		2484.12	67.32	-6.68	74	67.78	27.46	6.09	34.01	178	241	P	V
		2483.52	53.61	-0.39	54	54.07	27.46	6.09	34.01	178	241	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	36.16	-37.84	74	54.8	31.32	8.65	58.61	100	0	P	H
													H
													H
													H
		4824	34.22	-39.78	74	52.86	31.32	8.65	58.61	100	0	P	V
													V
													V
													V
802.11n HT20 CH 06 2437MHz		4874	35.71	-38.29	74	54.13	31.41	8.69	58.52	100	0	P	H
		7311	40.99	-33.01	74	52.48	36.28	10.39	58.16	100	0	P	H
													H
													H
		4874	35.89	-38.11	74	54.31	31.41	8.69	58.52	100	0	P	V
		7311	42.29	-31.71	74	53.78	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11n HT20 CH 11 2462MHz		4924	34.35	-39.65	74	52.49	31.49	8.79	58.42	100	0	P	H
		7386	39.35	-34.65	74	50.71	36.47	10.48	58.31	100	0	P	H
													H
													H
		4924	33.9	-40.1	74	52.04	31.49	8.79	58.42	100	0	P	V
		7386	41.82	-32.18	74	53.18	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.83	61.99	-12.01	74	62.79	27.23	6.01	34.04	213	199	P	H
		2389.92	47.93	-6.07	54	48.73	27.23	6.01	34.04	213	199	A	H
	*	2420	102.04	-	-	102.71	27.32	6.04	34.03	213	199	P	H
	*	2420	93.26	-	-	93.93	27.32	6.04	34.03	213	199	A	H
													H
													H
		2390	69.51	-4.49	74	70.31	27.23	6.01	34.04	156	236	P	V
		2389.92	53.05	-0.95	54	53.85	27.23	6.01	34.04	156	236	A	V
	*	2424	106.79	-	-	107.46	27.32	6.04	34.03	156	236	P	V
	*	2424	99.31	-	-	99.98	27.32	6.04	34.03	156	236	A	V
													V
													V
802.11n HT40 CH 06 2437MHz		2389.65	57.12	-16.88	74	57.92	27.23	6.01	34.04	206	197	P	H
		2389.83	46.54	-7.46	54	47.34	27.23	6.01	34.04	206	197	A	H
	*	2439	104.58	-	-	105.2	27.37	6.04	34.03	206	197	P	H
	*	2439	97.32	-	-	97.94	27.37	6.04	34.03	206	197	A	H
		2484.04	57.02	-16.98	74	57.48	27.46	6.09	34.01	206	197	P	H
		2483.92	46.6	-7.4	54	47.06	27.46	6.09	34.01	206	197	A	H
		2390	64.95	-9.05	74	65.75	27.23	6.01	34.04	152	229	P	V
		2389.65	52.94	-1.06	54	53.74	27.23	6.01	34.04	152	229	A	V
	*	2439	110.91	-	-	111.53	27.37	6.04	34.03	152	229	P	V
	*	2439	103.51	-	-	104.13	27.37	6.04	34.03	152	229	A	V
		2483.64	61.87	-12.13	74	62.33	27.46	6.09	34.01	152	229	P	V
		2483.52	50.16	-3.84	54	50.62	27.46	6.09	34.01	152	229	A	V



802.11n HT40 CH 09 2452MHz	*	2450	103.47	-	-	104.05	27.37	6.07	34.02	190	196	P	H
	*	2450	95.74	-	-	96.32	27.37	6.07	34.02	190	196	A	H
		2483.56	58.66	-15.34	74	59.12	27.46	6.09	34.01	190	196	P	H
		2483.52	48.77	-5.23	54	49.23	27.46	6.09	34.01	190	196	A	H
													H
													H
	*	2450	108.93	-	-	109.51	27.37	6.07	34.02	153	222	P	V
	*	2450	101.98	-	-	102.56	27.37	6.07	34.02	153	222	A	V
		2484.08	63.55	-10.45	74	64.01	27.46	6.09	34.01	153	222	P	V
		2483.84	53.7	-0.3	54	54.16	27.46	6.09	34.01	153	222	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4844	33.46	-40.54	74	52	31.35	8.69	58.58	100	0	P	H
													H
													H
													H
		4844	33.05	-40.95	74	51.59	31.35	8.69	58.58	100	0	P	V
													V
													V
													V
802.11n HT40 CH 06 2437MHz		4874	33.03	-40.97	74	51.45	31.41	8.69	58.52	100	0	P	H
		7311	38.99	-35.01	74	50.48	36.28	10.39	58.16	100	0	P	H
													H
													H
		4874	32.81	-41.19	74	51.23	31.41	8.69	58.52	100	0	P	V
		7311	39.21	-34.79	74	50.7	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11n HT40 CH 09 2452MHz		4924	32.56	-41.44	74	50.7	31.49	8.79	58.42	100	0	P	H
		7386	38.18	-35.82	74	49.54	36.47	10.48	58.31	100	0	P	H
													H
													H
		4924	32.57	-41.43	74	50.71	31.49	8.79	58.42	100	0	P	V
		7386	38.53	-35.47	74	49.89	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		62.94	28.4	-11.6	40	54.2	4.95	1.04	31.79			P	H
		189.03	33.57	-9.93	43.5	55.53	8.18	1.64	31.78	142	33	P	H
		250.05	29.34	-16.66	46	47.16	12.01	1.94	31.77			P	H
		349.7	21.49	-24.51	46	36.91	14.19	2.17	31.78			P	H
		384	21.47	-24.53	46	35.92	15.02	2.32	31.79			P	H
		850.2	25.66	-20.34	46	33.69	20.2	3.44	31.67			P	H
													H
													H
													H
													H
													H
													H
		62.94	28.57	-11.43	40	54.37	4.95	1.04	31.79			P	V
		189.03	33.34	-10.16	43.5	55.3	8.18	1.64	31.78	163	32	P	V
		250.05	30.31	-15.69	46	48.13	12.01	1.94	31.77			P	V
		349.7	22.64	-23.36	46	38.06	14.19	2.17	31.78			P	V
		384	21.84	-24.16	46	36.29	15.02	2.32	31.79			P	V
		750.1	28.81	-17.19	46	37.74	19.8	3.25	31.98			P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.74	58.98	-15.02	74	59.78	27.23	6.01	34.04	114	114	P	H
		2390	47.21	-6.79	54	48.01	27.23	6.01	34.04	114	114	A	H
	*	2411	104.88	-	-	105.6	27.28	6.04	34.04	114	114	P	H
	*	2411	96.86	-	-	97.58	27.28	6.04	34.04	114	114	A	H
													H
													H
		2389.2	65.87	-8.13	74	66.67	27.23	6.01	34.04	107	351	P	V
		2389.74	53.74	-0.26	54	54.54	27.23	6.01	34.04	107	351	A	V
	*	2413	112.38	-	-	113.1	27.28	6.04	34.04	107	351	P	V
	*	2413	104.4	-	-	105.12	27.28	6.04	34.04	107	351	A	V
													V
													V
802.11g CH 06 2437MHz		2388.84	57.75	-16.25	74	58.55	27.23	6.01	34.04	165	55	P	H
		2390.01	47.65	-6.35	54	48.45	27.23	6.01	34.04	165	55	A	H
	*	2438	111.81	-	-	112.43	27.37	6.04	34.03	165	55	P	H
	*	2438	104.36	-	-	104.98	27.37	6.04	34.03	165	55	A	H
		2484.44	55.44	-18.56	74	55.9	27.46	6.09	34.01	165	55	P	H
		2483.56	45.82	-8.18	54	46.28	27.46	6.09	34.01	165	55	A	H
		2389.65	60.47	-13.53	74	61.27	27.23	6.01	34.04	107	351	P	V
		2389.92	51.54	-2.46	54	52.34	27.23	6.01	34.04	107	351	A	V
	*	2438	116.42	-	-	117.04	27.37	6.04	34.03	107	351	P	V
	*	2438	108.69	-	-	109.31	27.37	6.04	34.03	107	351	A	V
		2483.56	57.14	-16.86	74	57.6	27.46	6.09	34.01	107	351	P	V
		2483.52	48.21	-5.79	54	48.67	27.46	6.09	34.01	107	351	A	V



802.11g CH 11 2462MHz	*	2461	108.76	-	-	109.3	27.41	6.07	34.02	163	54	P	H
	*	2461	100.68	-	-	101.22	27.41	6.07	34.02	163	54	A	H
		2483.96	64.4	-9.6	74	64.86	27.46	6.09	34.01	163	54	P	H
		2483.6	50.11	-3.89	54	50.57	27.46	6.09	34.01	163	54	A	H
													H
													H
	*	2462	113.19	-	-	113.73	27.41	6.07	34.02	102	352	P	V
	*	2462	105.23	-	-	105.77	27.41	6.07	34.02	102	352	A	V
		2483.96	66.79	-7.21	74	67.25	27.46	6.09	34.01	102	352	P	V
		2483.56	53.82	-0.18	54	54.28	27.46	6.09	34.01	102	352	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	32.99	-41.01	74	51.63	31.32	8.65	58.61	100	0	P	H
													H
													H
													H
		4824	32.7	-41.3	74	51.34	31.32	8.65	58.61	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4874	34.41	-39.59	74	52.83	31.41	8.69	58.52	100	0	P	H
		7311	40.89	-33.11	74	52.38	36.28	10.39	58.16	100	0	P	H
													H
													H
		4874	36.33	-37.67	74	54.75	31.41	8.69	58.52	100	0	P	V
		7311	39.49	-34.51	74	50.98	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4924	34.95	-39.05	74	53.09	31.49	8.79	58.42	100	0	P	H
		7386	37.81	-36.19	74	49.17	36.47	10.48	58.31	100	0	P	H
													H
													H
		4924	34.33	-39.67	74	52.47	31.49	8.79	58.42	100	0	P	V
		7386	37.9	-36.1	74	49.26	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.83	61.02	-12.98	74	61.82	27.23	6.01	34.04	173	109	P	H
		2390	48.73	-5.27	54	49.53	27.23	6.01	34.04	173	109	A	H
	*	2410	106.54	-	-	107.26	27.28	6.04	34.04	173	109	P	H
	*	2410	99.16	-	-	99.88	27.28	6.04	34.04	173	109	A	H
													H
													H
		2389.74	67.45	-6.55	74	68.25	27.23	6.01	34.04	109	344	P	V
		2390	53.97	-0.03	54	54.77	27.23	6.01	34.04	109	344	A	V
	*	2414	111.61	-	-	112.33	27.28	6.04	34.04	109	344	P	V
	*	2410	103.58	-	-	104.3	27.28	6.04	34.04	109	344	A	V
													V
													V
802.11n HT20 CH 06 2437MHz		2389.83	58.01	-15.99	74	58.81	27.23	6.01	34.04	149	111	P	H
		2389.92	46.57	-7.43	54	47.37	27.23	6.01	34.04	149	111	A	H
	*	2439	111.81	-	-	112.43	27.37	6.04	34.03	149	111	P	H
	*	2439	104.2	-	-	104.82	27.37	6.04	34.03	149	111	A	H
		2483.6	55.24	-18.76	74	55.7	27.46	6.09	34.01	149	111	P	H
		2483.68	46.21	-7.79	54	46.67	27.46	6.09	34.01	149	111	A	H
		2389.47	63	-11	74	63.8	27.23	6.01	34.04	107	348	P	V
		2390	51.81	-2.19	54	52.61	27.23	6.01	34.04	107	348	A	V
	*	2435	116.36	-	-	117.03	27.32	6.04	34.03	107	348	P	V
	*	2439	108.65	-	-	109.27	27.37	6.04	34.03	107	348	A	V
		2483.72	57.97	-16.03	74	58.43	27.46	6.09	34.01	107	348	P	V
		2483.52	48.8	-5.2	54	49.26	27.46	6.09	34.01	107	348	A	V



802.11n HT20 CH 11 2462MHz	*	2464	107.34	-	-	107.88	27.41	6.07	34.02	145	110	P	H
	*	2464	99.67	-	-	100.21	27.41	6.07	34.02	145	110	A	H
		2484.12	61.5	-12.5	74	61.96	27.46	6.09	34.01	145	110	P	H
		2483.64	49.46	-4.54	54	49.92	27.46	6.09	34.01	145	110	A	H
													H
													H
	*	2464	112.33	-	-	112.87	27.41	6.07	34.02	102	347	P	V
	*	2464	103.94	-	-	104.48	27.41	6.07	34.02	102	347	A	V
		2483.88	66.4	-7.6	74	66.86	27.46	6.09	34.01	102	347	P	V
		2483.52	53.49	-0.51	54	53.95	27.46	6.09	34.01	102	347	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	32.51	-41.49	74	51.15	31.32	8.65	58.61	100	0	P	H
													H
													H
													H
		4824	32.71	-41.29	74	51.35	31.32	8.65	58.61	100	0	P	V
													V
													V
													V
802.11n HT20 CH 06 2437MHz		4874	38.28	-35.72	74	56.7	31.41	8.69	58.52	100	0	P	H
		7308	38.16	-35.84	74	49.65	36.28	10.39	58.16	100	0	P	H
													H
													H
		4872	33.96	-40.04	74	52.38	31.41	8.69	58.52	100	0	P	V
		7308	38.83	-35.17	74	50.32	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11n HT20 CH 11 2462MHz		4926	36.24	-37.76	74	54.38	31.49	8.79	58.42	100	0	P	H
		7386	37.33	-36.67	74	48.69	36.47	10.48	58.31	100	0	P	H
													H
													H
		4926	32.16	-41.84	74	50.3	31.49	8.79	58.42	100	0	P	V
		7386	36.84	-37.16	74	48.2	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.11	58.21	-15.79	74	59.01	27.23	6.01	34.04	161	109	P	H
		2390	48.45	-5.55	54	49.25	27.23	6.01	34.04	161	109	A	H
	*	2420	101.49	-	-	102.16	27.32	6.04	34.03	161	109	P	H
	*	2420	93.49	-	-	94.16	27.32	6.04	34.03	161	109	A	H
		2484.04	53.35	-20.65	74	53.81	27.46	6.09	34.01	161	109	P	H
		2483.84	44.72	-9.28	54	45.18	27.46	6.09	34.01	161	109	A	H
		2388.57	63.16	-10.84	74	63.96	27.23	6.01	34.04	123	347	P	V
		2389.65	53.94	-0.06	54	54.74	27.23	6.01	34.04	123	347	A	V
	*	2420	106.13	-	-	106.8	27.32	6.04	34.03	123	347	P	V
	*	2420	98.8	-	-	99.47	27.32	6.04	34.03	123	347	A	V
		2483.56	55.12	-18.88	74	55.58	27.46	6.09	34.01	123	347	P	V
		2483.56	46.09	-7.91	54	46.55	27.46	6.09	34.01	123	347	A	V
802.11n HT40 CH 06 2437MHz		2387.04	58.27	-15.73	74	59.07	27.23	6.01	34.04	146	110	P	H
		2389.74	48.47	-5.53	54	49.27	27.23	6.01	34.04	146	110	A	H
	*	2439	106.89	-	-	107.51	27.37	6.04	34.03	146	110	P	H
	*	2439	98.79	-	-	99.41	27.37	6.04	34.03	146	110	A	H
		2483.64	56.85	-17.15	74	57.31	27.46	6.09	34.01	146	110	P	H
		2483.8	47.27	-6.73	54	47.73	27.46	6.09	34.01	146	110	A	H
		2389.92	66.23	-7.77	74	67.03	27.23	6.01	34.04	107	349	P	V
		2390	53.85	-0.15	54	54.65	27.23	6.01	34.04	107	349	A	V
	*	2439	110.59	-	-	111.21	27.37	6.04	34.03	107	349	P	V
	*	2439	103.4	-	-	104.02	27.37	6.04	34.03	107	349	A	V
		2483.52	59.79	-14.21	74	60.25	27.46	6.09	34.01	107	349	P	V
		2483.64	49.79	-4.21	54	50.25	27.46	6.09	34.01	107	349	A	V



802.11n HT40 CH 09 2452MHz		2389.38	54.98	-19.02	74	55.78	27.23	6.01	34.04	147	109	P	H
		2389.29	46.25	-7.75	54	47.05	27.23	6.01	34.04	147	109	A	H
	*	2450	105.65	-	-	106.23	27.37	6.07	34.02	147	109	P	H
	*	2450	96.39	-	-	96.97	27.37	6.07	34.02	147	109	A	H
		2483.6	58.96	-15.04	74	59.42	27.46	6.09	34.01	147	109	P	H
		2483.52	50.35	-3.65	54	50.81	27.46	6.09	34.01	147	109	A	H
		2389.11	58.84	-15.16	74	59.64	27.23	6.01	34.04	105	352	P	V
		2389.29	50.04	-3.96	54	50.84	27.23	6.01	34.04	105	352	A	V
	*	2450	109	-	-	109.58	27.37	6.07	34.02	105	352	P	V
	*	2450	100.94	-	-	101.52	27.37	6.07	34.02	105	352	A	V
		2483.84	63.08	-10.92	74	63.54	27.46	6.09	34.01	105	352	P	V
		2483.52	53.78	-0.22	54	54.24	27.46	6.09	34.01	105	352	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4842	32.45	-41.55	74	50.99	31.35	8.69	58.58	100	0	P	H
		7266	37.11	-36.89	74	48.66	36.21	10.34	58.1	100	0	P	H
													H
													H
		4842	33.57	-40.43	74	52.11	31.35	8.69	58.58	100	0	P	V
		7266	37.95	-36.05	74	49.5	36.21	10.34	58.1	100	0	P	V
													V
													V
802.11n HT40 CH 06 2437MHz		4872	33.52	-40.48	74	51.94	31.41	8.69	58.52	100	0	P	H
		7308	37.6	-36.4	74	49.09	36.28	10.39	58.16	100	0	P	H
													H
													H
		4872	32.76	-41.24	74	51.18	31.41	8.69	58.52	100	0	P	V
		7308	38.18	-35.82	74	49.67	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11n HT40 CH 09 2452MHz		4902	33.38	-40.62	74	51.64	31.46	8.74	58.46	100	0	P	H
		7356	37.74	-36.26	74	49.15	36.4	10.44	58.25	100	0	P	H
													H
													H
		4902	32.37	-41.63	74	50.63	31.46	8.74	58.46	100	0	P	V
		7356	37.3	-36.7	74	48.71	36.4	10.44	58.25	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		62.94	28.47	-11.53	40	54.27	4.95	1.04	31.79	101	63	P	H
		157.44	19.3	-24.2	43.5	39.92	9.7	1.46	31.78			P	H
		220.35	25.73	-20.27	46	47.39	8.33	1.79	31.78			P	H
		349.7	22.2	-23.8	46	37.62	14.19	2.17	31.78			P	H
		384	20.79	-25.21	46	35.24	15.02	2.32	31.79			P	H
		750.1	28.39	-17.61	46	37.32	19.8	3.25	31.98			P	H
													H
													H
													H
													H
													H
													H
		31.35	27.44	-12.56	40	41.27	17.33	0.67	31.83			P	V
		189.03	33.13	-10.37	43.5	55.09	8.18	1.64	31.78	334	253	P	V
		250.05	30.14	-15.86	46	47.96	12.01	1.94	31.77			P	V
		351.1	22.59	-23.41	46	37.94	14.26	2.17	31.78			P	V
		384	21.86	-24.14	46	36.31	15.02	2.32	31.79			P	V
		750.1	27.96	-18.04	46	36.89	19.8	3.25	31.98			P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.38	64.67	-9.33	74	65.47	27.23	6.01	34.04	136	202	P	H
		2390	53.54	-0.46	54	54.34	27.23	6.01	34.04	136	202	A	H
	*	2410	111.95	-	-	112.67	27.28	6.04	34.04	136	202	P	H
	*	2410	104.26	-	-	104.98	27.28	6.04	34.04	136	202	A	H
													H
													H
		2390	61.1	-12.9	74	61.9	27.23	6.01	34.04	100	49	P	V
		2389.92	47.71	-6.29	54	48.51	27.23	6.01	34.04	100	49	A	V
	*	2410.104	105.54	-	-	106.26	27.28	6.04	34.04	100	49	P	V
	*	2410	97.11	-	-	97.83	27.28	6.04	34.04	100	49	A	V
													V
													V
802.11n HT20 CH 06 2437MHz		2389.74	63.93	-10.07	74	64.73	27.23	6.01	34.04	167	200	P	H
		2389.83	53.21	-0.79	54	54.01	27.23	6.01	34.04	167	200	A	H
	*	2435	117.98	-	-	118.65	27.32	6.04	34.03	167	200	P	H
	*	2435	110.11	-	-	110.78	27.32	6.04	34.03	167	200	A	H
		2483.52	58.47	-15.53	74	58.93	27.46	6.09	34.01	167	200	P	H
		2483.56	49.33	-4.67	54	49.79	27.46	6.09	34.01	167	200	A	H
		2387.49	56.1	-17.9	74	56.9	27.23	6.01	34.04	146	32	P	V
		2389.92	47.6	-6.4	54	48.4	27.23	6.01	34.04	146	32	A	V
	*	2439	114.32	-	-	114.94	27.37	6.04	34.03	146	32	P	V
	*	2439	106.46	-	-	107.08	27.37	6.04	34.03	146	32	A	V
		2484.28	54.43	-19.57	74	54.89	27.46	6.09	34.01	146	32	P	V
		2483.52	46.07	-7.93	54	46.53	27.46	6.09	34.01	146	32	A	V



802.11n HT20 CH 11 2462MHz	*	2464	114.27	-	-	114.81	27.41	6.07	34.02	148	184	P	H
	*	2464	106.48	-	-	107.02	27.41	6.07	34.02	148	184	A	H
		2484.28	64.36	-9.64	74	64.82	27.46	6.09	34.01	148	184	P	H
		2483.52	53.8	-0.2	54	54.26	27.46	6.09	34.01	148	184	A	H
													H
													H
	*	2464	107.45	-	-	107.99	27.41	6.07	34.02	137	57	P	V
	*	2464	99.06	-	-	99.6	27.41	6.07	34.02	137	57	A	V
		2484.16	57.75	-16.25	74	58.21	27.46	6.09	34.01	137	57	P	V
		2483.6	47.67	-6.33	54	48.13	27.46	6.09	34.01	137	57	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	32.03	-41.97	74	50.67	31.32	8.65	58.61	100	0	P	H
													H
													H
													H
		4824	33	-41	74	51.64	31.32	8.65	58.61	100	0	P	V
													V
													V
													V
802.11n HT20 CH 06 2437MHz		4872	45.59	-28.41	74	39.03	31.41	8.69	33.54	100	0	P	H
		7308	49.72	-24.28	74	37.49	36.28	10.39	34.44	100	0	P	H
													H
													H
		4872	47.14	-26.86	74	40.58	31.41	8.69	33.54	100	0	P	V
		7308	50.13	-23.87	74	37.9	36.28	10.39	34.44	100	0	P	V
													V
													V
802.11n HT20 CH 11 2462MHz		4926	34.01	-39.99	74	52.15	31.49	8.79	58.42	100	0	P	H
		7386	38.4	-35.6	74	49.76	36.47	10.48	58.31	100	0	P	H
													H
													H
		4926	38.17	-35.83	74	56.31	31.49	8.79	58.42	100	0	P	V
		7386	38.83	-35.17	74	50.19	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.74	67.65	-6.35	74	68.45	27.23	6.01	34.04	155	192	P	H
		2390	53.5	-0.5	54	54.3	27.23	6.01	34.04	155	192	A	H
	*	2424	107.95	-	-	108.62	27.32	6.04	34.03	155	192	P	H
	*	2424	99.24	-	-	99.91	27.32	6.04	34.03	155	192	A	H
		2483.68	53.68	-20.32	74	54.14	27.46	6.09	34.01	155	192	P	H
		2483.52	45.79	-8.21	54	46.25	27.46	6.09	34.01	155	192	A	H
		2389.65	55.78	-18.22	74	56.58	27.23	6.01	34.04	100	49	P	V
		2389.92	46.8	-7.2	54	47.6	27.23	6.01	34.04	100	49	A	V
	*	2420	99.36	-	-	100.03	27.32	6.04	34.03	100	49	P	V
	*	2420	91.25	-	-	91.92	27.32	6.04	34.03	100	49	A	V
		2493.76	53.17	-20.83	74	53.58	27.5	6.09	34	100	49	P	V
		2483.72	43.49	-10.51	54	43.95	27.46	6.09	34.01	100	49	A	V
802.11n HT40 CH 06 2437MHz		2388.57	64.84	-9.16	74	65.64	27.23	6.01	34.04	153	192	P	H
		2390	53.45	-0.55	54	54.25	27.23	6.01	34.04	153	192	A	H
	*	2439	113.21	-	-	113.83	27.37	6.04	34.03	153	192	P	H
	*	2439	104.81	-	-	105.43	27.37	6.04	34.03	153	192	A	H
		2483.68	60.91	-13.09	74	61.37	27.46	6.09	34.01	153	192	P	H
		2483.72	49.21	-4.79	54	49.67	27.46	6.09	34.01	153	192	A	H
		2387.94	57.19	-16.81	74	57.99	27.23	6.01	34.04	139	40	P	V
		2389.38	46.89	-7.11	54	47.69	27.23	6.01	34.04	139	40	A	V
	*	2439	105.08	-	-	105.7	27.37	6.04	34.03	139	40	P	V
	*	2439	97.46	-	-	98.08	27.37	6.04	34.03	139	40	A	V
		2483.52	54.65	-19.35	74	55.11	27.46	6.09	34.01	139	40	P	V
		2483.56	45.99	-8.01	54	46.45	27.46	6.09	34.01	139	40	A	V



802.11n HT40 CH 09 2452MHz		2389.11	59.63	-14.37	74	60.43	27.23	6.01	34.04	155	195	P	H
		2389.92	49.94	-4.06	54	50.74	27.23	6.01	34.04	155	195	A	H
	*	2450	111.84	-	-	112.42	27.37	6.07	34.02	155	195	P	H
	*	2450	103.53	-	-	104.11	27.37	6.07	34.02	155	195	A	H
		2483.6	64.09	-9.91	74	64.55	27.46	6.09	34.01	155	195	P	H
		2483.52	52.89	-1.11	54	53.35	27.46	6.09	34.01	155	195	A	H
		2375.16	53.17	-20.83	74	54.01	27.19	6.01	34.04	136	48	P	V
		2390	44.82	-9.18	54	45.62	27.23	6.01	34.04	136	48	A	V
	*	2450	103.95	-	-	104.53	27.37	6.07	34.02	136	48	P	V
	*	2450	95.64	-	-	96.22	27.37	6.07	34.02	136	48	A	V
		2484	58.99	-15.01	74	59.45	27.46	6.09	34.01	136	48	P	V
		2483.52	49.32	-4.68	54	49.78	27.46	6.09	34.01	136	48	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4842	32.11	-41.89	74	50.65	31.35	8.69	58.58	100	0	P	H
		7266	38.34	-35.66	74	49.89	36.21	10.34	58.1	100	0	P	H
													H
													H
		4842	32.1	-41.9	74	50.64	31.35	8.69	58.58	100	0	P	V
		7266	38.93	-35.07	74	50.48	36.21	10.34	58.1	100	0	P	V
													V
													V
802.11n HT40 CH 06 2437MHz		4872	33.45	-40.55	74	51.87	31.41	8.69	58.52	100	0	P	H
		7308	37.71	-36.29	74	49.2	36.28	10.39	58.16	100	0	P	H
													H
													H
		4872	32.78	-41.22	74	51.2	31.41	8.69	58.52	100	0	P	V
		7308	38.57	-35.43	74	50.06	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11n HT40 CH 09 2452MHz		4902	32.71	-41.29	74	50.97	31.46	8.74	58.46	100	0	P	H
		7356	39.08	-34.92	74	50.49	36.4	10.44	58.25	100	0	P	H
													H
													H
		4902	32.09	-41.91	74	50.35	31.46	8.74	58.46	100	0	P	V
		7356	37.18	-36.82	74	48.59	36.4	10.44	58.25	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		31.35	26.73	-13.27	40	40.56	17.33	0.67	31.83			P	H
		62.94	27.69	-12.31	40	53.49	4.95	1.04	31.79			P	H
		189.03	34.23	-9.27	43.5	56.19	8.18	1.64	31.78	100	99	P	H
		384	21	-25	46	35.45	15.02	2.32	31.79			P	H
		540.1	19.6	-26.4	46	30.28	18.5	2.77	31.95			P	H
		750.1	28.72	-17.28	46	37.65	19.8	3.25	31.98			P	H
													H
													H
													H
													H
													H
													H
		39.72	19.41	-20.59	40	37.71	12.85	0.67	31.82			P	V
		141.78	22.11	-21.39	43.5	41.94	10.49	1.46	31.78			P	V
		204.69	28.64	-14.86	43.5	50.37	8.41	1.64	31.78	302	68	P	V
		384	21.67	-24.33	46	36.12	15.02	2.32	31.79			P	V
		561.8	20.84	-25.16	46	31.55	18.5	2.77	31.98			P	V
		723.5	20.7	-25.3	46	29.97	19.6	3.14	32.01			P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.