



FCC Test Report

According to

47 CFR Part 15 Subpart C

Equipment : GSM(900&1800&1900 MHz) / GPRS / Mobile
Phone / with Bluetooth v1.2 and WLAN (IEEE
802.11b&g)

Trade Name : WIN II

Model No. : DMP330

FCC ID : D6XDMP330

Filing Type : Certification

Applicant : TECOM CO., LTD.
23, R & D ROAD 2, SCIENCE-BASED INDUSTRIAL PARK,
HSIN-CHU, TAIWAN R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Jan. 24-30 and Feb. 19, 2008 at **Sporton International Inc. LAB.**
- Report No.: FR812117-C, Report Version: Rev. 01.

Roy Wu
Manager

SPORTON International Inc.
6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Report Version: Rev. 01



Table of Contents

History of This Test Report	ii
1. General Description of Equipment under Test.....	1
1.1 Applicant.....	1
1.2 Manufacturer	1
1.3 Basic Description of Equipment under Test.....	1
1.4 Feature of Equipment under Test.....	2
2. Test Configuration of Equipment under Test.....	3
2.1 Test Manner	3
2.2 Test Mode	3
2.3 Ancillary Equipment List	3
2.4 Connection Diagram of Test System	4
3. RF Utility.....	6
4. General Information of Test.....	7
4.1 Test Voltage	7
4.2 Standard for Methods of Measurement	7
4.3 Test Compliance	7
4.4 Frequency Range	7
4.5 Test Distance	7
5. Test Data and Test Result.....	8
5.1 List of Measurements and Examinations.....	8
5.2 6dB Bandwidth Measurement	9
5.3 Power Spectral Density Measurement	16
5.4 Band Edges Measurement.....	24
5.5 Peak Output Power Measurement	31
5.6 Conducted Emission.....	33
5.7 Radiated Emission Measurement.....	42
5.8 Antenna Requirements.....	72
6. List of Measuring Equipment	73
7. Uncertainty Evaluation.....	74
Appendix A. Photographs of EUT External	
Appendix B. Photographs of EUT Internal	
Appendix C. Setup Photographs	



History of This Test Report

Report Issue Date: Feb. 19, 2008

Report No.	Description



1. General Description of Equipment under Test

1.1 Applicant

TECOM CO., LTD.

23, R & D ROAD 2, SCIENCE-BASED INDUSTRIAL PARK, HSIN-CHU, TAIWAN R.O.C.

1.2 Manufacturer

TECOM CO., LTD.

23, R & D ROAD 2, SCIENCE-BASED INDUSTRIAL PARK, HSIN-CHU, TAIWAN R.O.C.

1.3 Basic Description of Equipment under Test

Equipment		GSM(900&1800&1900 MHz) / GPRS / Mobile Phone / with Bluetooth v1.2 and WLAN (IEEE 802.11b&g)
Trade Name		WIN II
Model Name		DMP330
FCC ID		D6XDMP330
AC Adapter	Brand Name	Tecom
	Model Name	KWT05A11CN01G
	Power Rating	I/P:100-240Vac, 50-60Hz, 0.25A; O/P: 4.6~5.5Vdc, 550mA, 4.5W
	AC Power Cord Type	1.545 meter non-shielded cable without ferrite core
Battery	Brand Name	Tecom
	Model Name	306-0000-00001
	Power Rating	3.7Vdc, 1000mAh
	Type	Li-ion
Earphone	Brand Name	N/A
	Model Name	N/A
	Signal Line Type	1.45 meter non-shielded cable without ferrite core
USB Cable	Brand Name	N/A
	Model Name	N/A
	Signal Line Type	0.4 meter non-shielded cable without ferrite core

Remark: Above EUT's information was declared by manufacturer. Please refer to the specifications of manufacturer or User's Manual for more detailed features description.

**1.4 Feature of Equipment under Test**

Product Feature & Specification			
DUT Type :	GSM(900&1800&1900 MHz) / GPRS / Mobile Phone / with Bluetooth v1.2 and WLAN (IEEE 802.11b&g)		
Trade Name :	WIN II		
Model Name :	DMP330		
FCC ID :	D6XDMP330		
Tx Frequency :	GSM1900 : 1850 MHz ~1910 MHz WLAN / Bluetooth : 2400 MHz ~ 2483.5 MHz		
Rx Frequency :	GSM1900 : 1930 MHz ~ 1990 MHz WLAN / Bluetooth : 2400 MHz ~ 2483.5 MHz		
Number of Channels :	Bluetooth : 79 WLAN : 11		
Carrier Frequency of Each Channel :	Bluetooth : 2402+n*1 MHz; n=0~78 WLAN : 2412+(n-1)*5 MHz; n=1~11		
Channel Spacing :	GSM1900 : 200 KHz Bluetooth : 1 MHz WLAN : 5 MHz		
Maximum Output Power to Antenna :	GSM1900 : 28.26 dBm (GSM) / 28.09 dBm (GPRS) Bluetooth : -1.72 dBm (1Mbps) WLAN : 15.33 dBm (802.11b) / 13.85 dBm (802.11g)		
Type of Antenna Connector :	N/A		
Antenna Type :	GSM1900 : Fixed Internal Antenna Bluetooth : Chip Antenna WLAN : PIFA Antenna		
Antenna Gain :	GSM1900 : 0 dBi Bluetooth : 1 dBi WLAN : 1.07 dBi		
HW Version :	7510MB-008-A		
SW Version :	7S75100000-002-R1I		
GPRS Multislot Class :	12		
Type of Modulation :	GSM / GPRS : GMSK Bluetooth : GFSK WLAN : DSSS / OFDM		
Function Type :	Transmitter		Transceiver V
DUT Stage :	Production Unit		



2. Test Configuration of Equipment under Test

2.1 Test Manner

- The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.
- The EUT is programmed to transmit signal continuously for all testings.
- Frequency range investigated: conduction 150 kHz to 30 MHz, radiation 30 MHz to 25000MHz.
- For radiated measurements, the results were the maximum of those obtained in 3 orthogonal axes and only showed the worst data in this report.

2.2 Test Mode


Application	Test Mode	
Radiated Emission / RF Conducted	802.11b	802.11g
	Mode1: CH01_2412MHz	Mode4: CH01_2412MHz
	Mode2: CH06_2437MHz	Mode5: CH06_2437MHz
	Mode3: CH11_2462MHz	Mode6: CH11_2462MHz
	Mode7: CH11_2462MHz + Bluetooth CH78_2480 MHz	
Conducted Emission	Mode 1: GSM1900 Idle Mode + BT Link + Camera + Adapter	
	Mode 2: GSM1900 Idle Mode + BT Link + MPEG4 + Adapter	
	Mode 3: WLAN Link Mode + BT Link + MPEG4 + Adapter	
	Mode 4: GSM1900 Idle Mode + BT Link + MPEG4 + USB Link	

2.3 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable / Power Cord
1.	Base Station	R&S	CMU 200	N/A	Unshielded, 1.8 m


2.4 Connection Diagram of Test System

<Radiated Emission>

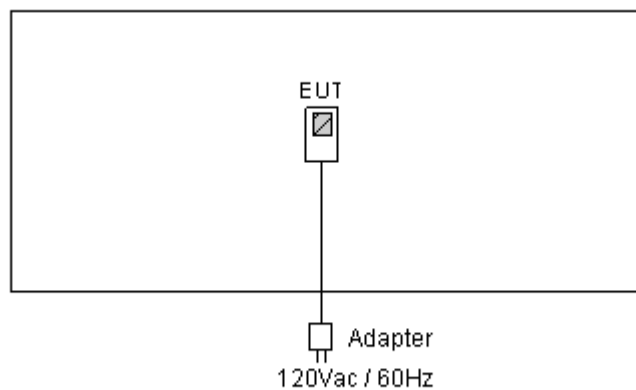


<Conducted Emission>


Mode 1~2

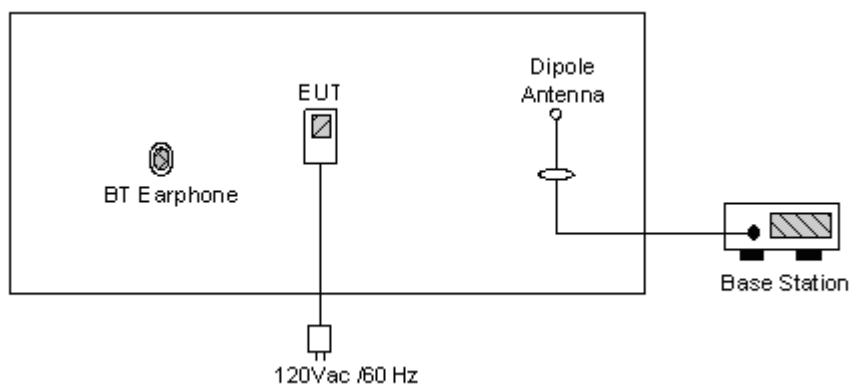

Mode 3

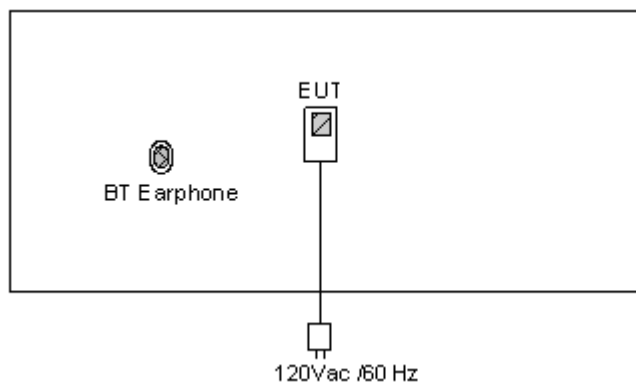

Mode 4

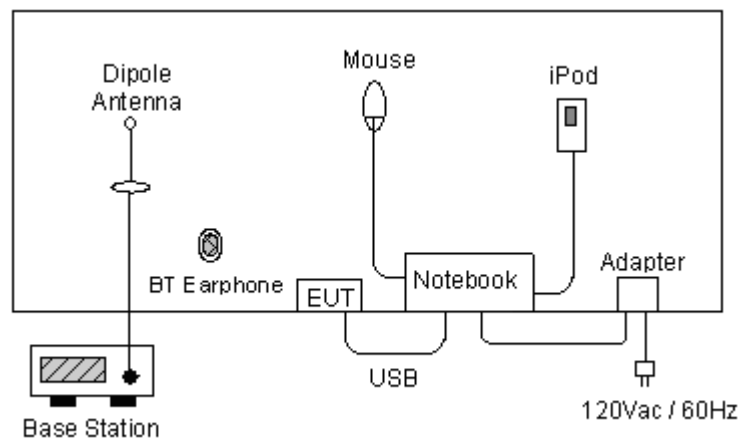



3. RF Utility

Press key number *#7415963# to make EUT into Engineer mode to link with the Base Station. The programmed RF Utility is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testings.



4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-328-4978
Test Site No : CO01-HY, 03CH06-HY

4.1 Test Voltage

AC 120V / 60Hz

4.2 Standard for Methods of Measurement

ANSI C63.4-2003

4.3 Test Compliance

47 CFR Part 15 Subpart C

4.4 Frequency Range

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation: from 30 MHz to 25000 MHz

4.5 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.



5. Test Data and Test Result

5.1 List of Measurements and Examinations

The Emission Mode: Wireless LAN

FCC Rule	Description of Test	Result
15.207	Conducted Emission	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.209(a) 15.247(d)	Radiated Emission	Pass
15.247(d)	100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	Power Spectral Density	Pass
15.203 15.247(b)(4)	Antenna Requirement	Pass

5.2 6dB Bandwidth Measurement


5.2.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.2.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 100kHz and VBW to 100kHz.
3. The 6 dB bandwidth is defined as the frequency range where the power is higher than the peak power minus 6dB.

5.2.3 Test Setup Layout :

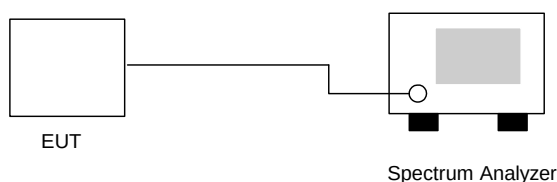

5.2.4 Test Result :

- Application Type : WLAN 802.11b/g
- Temperature : 21~24°C
- Relative Humidity : 49~52%
- Test Engineer : Sun

802.11b

Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
01	2412	10.08	> 0.5MHz	Mode 1
06	2437	10.08	> 0.5MHz	Mode 2
11	2462	10.04	> 0.5MHz	Mode 3


802.11g

Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
01	2412	16.56	> 0.5MHz	Mode 4
06	2437	16.52	> 0.5MHz	Mode 5
11	2462	16.48	> 0.5MHz	Mode 6



5.2.5 6dB Bandwidth

Mode 1

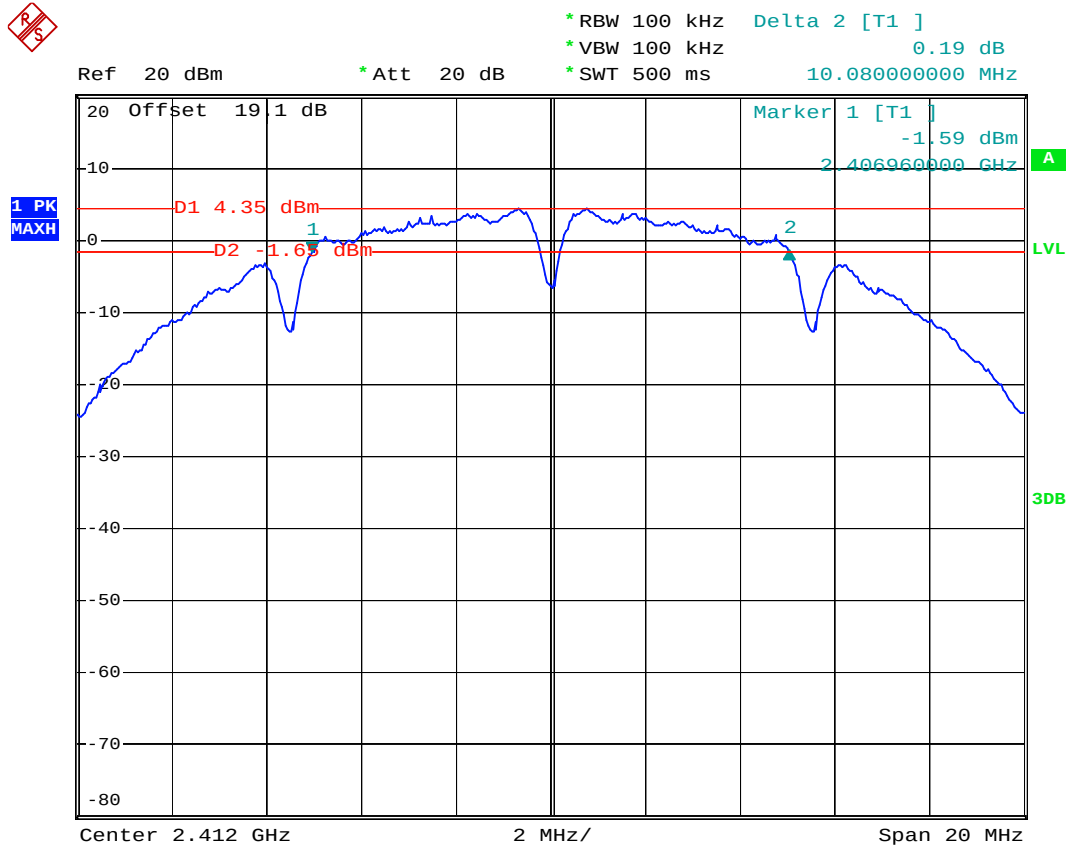


2nd comment ...

Date: 29.JAN.2008 11:57:28



Mode 2

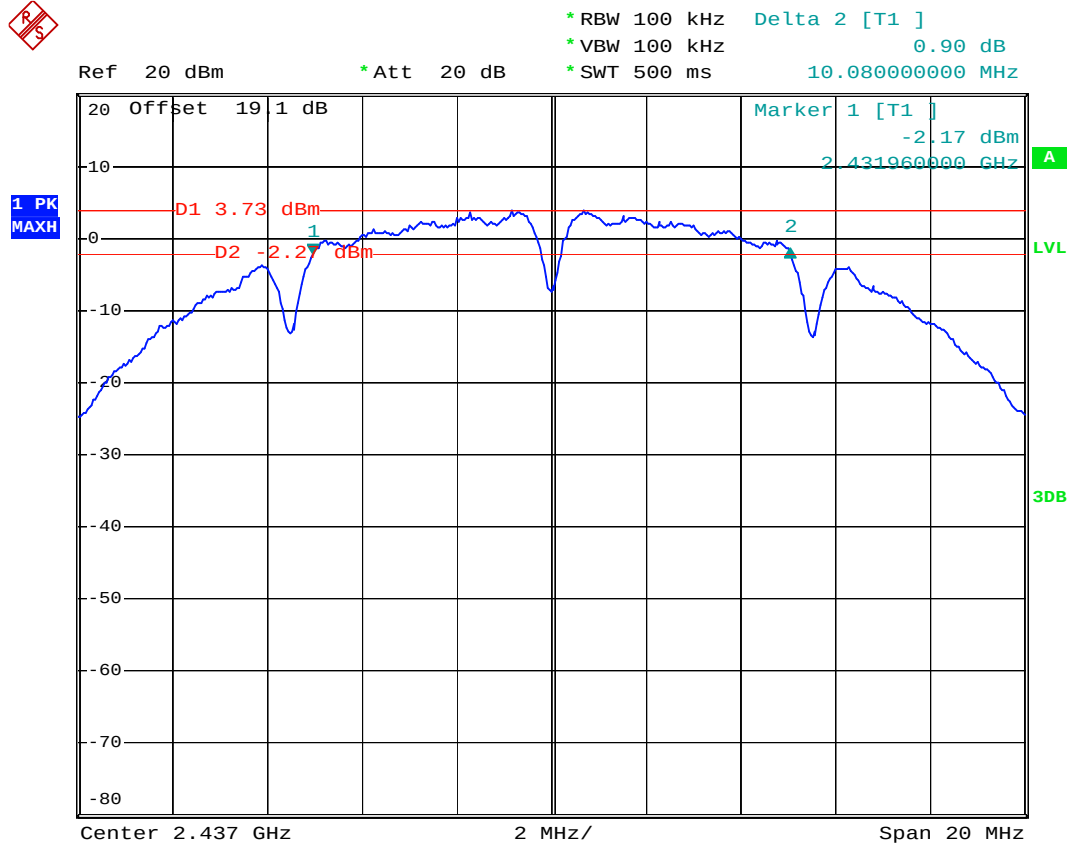


2nd comment ...

Date: 29.JAN.2008 11:59:05



Mode 3

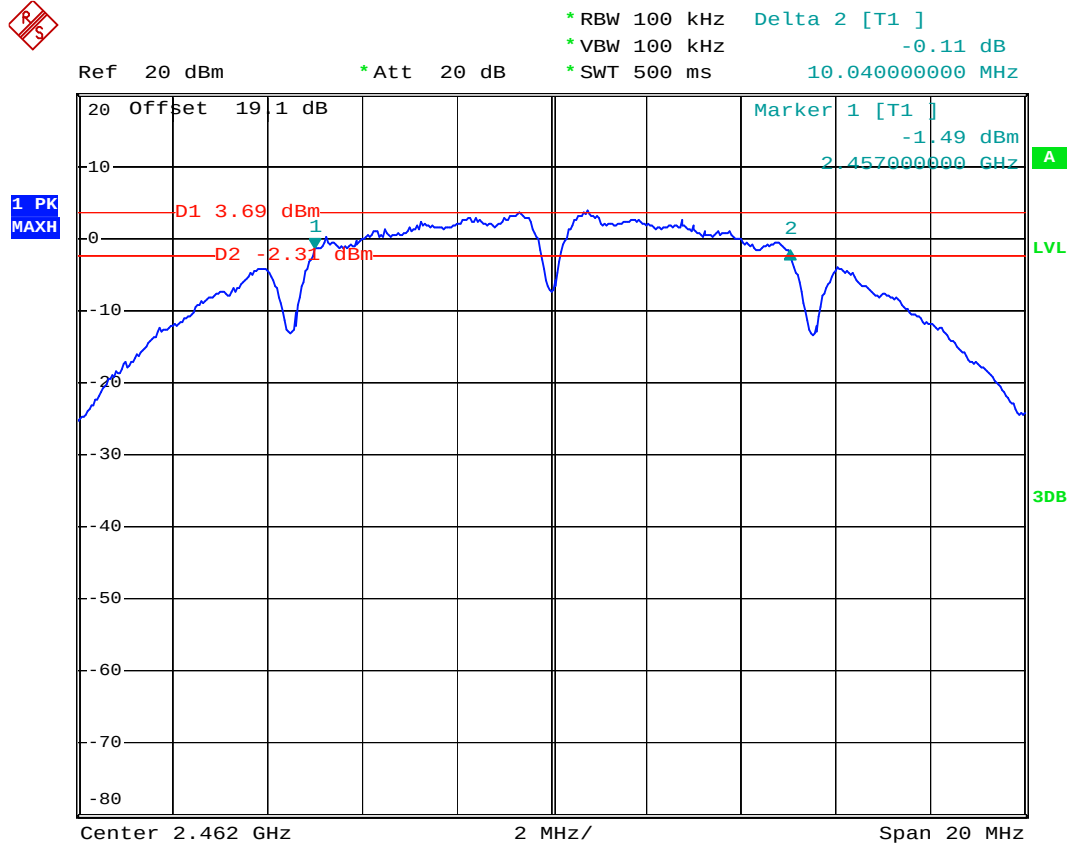


2nd comment ...

Date: 29.JAN.2008 12:01:08




Mode 4

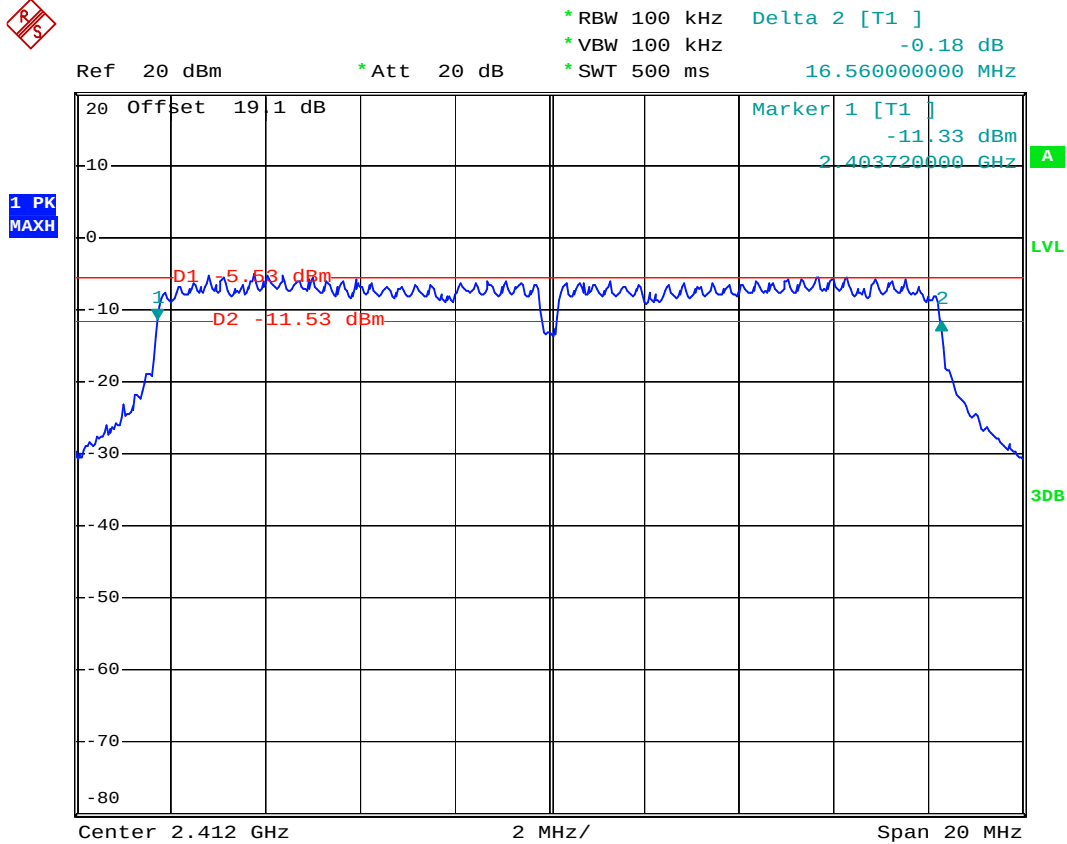

Date: 31.JAN.2008 13:39:20




Mode 5

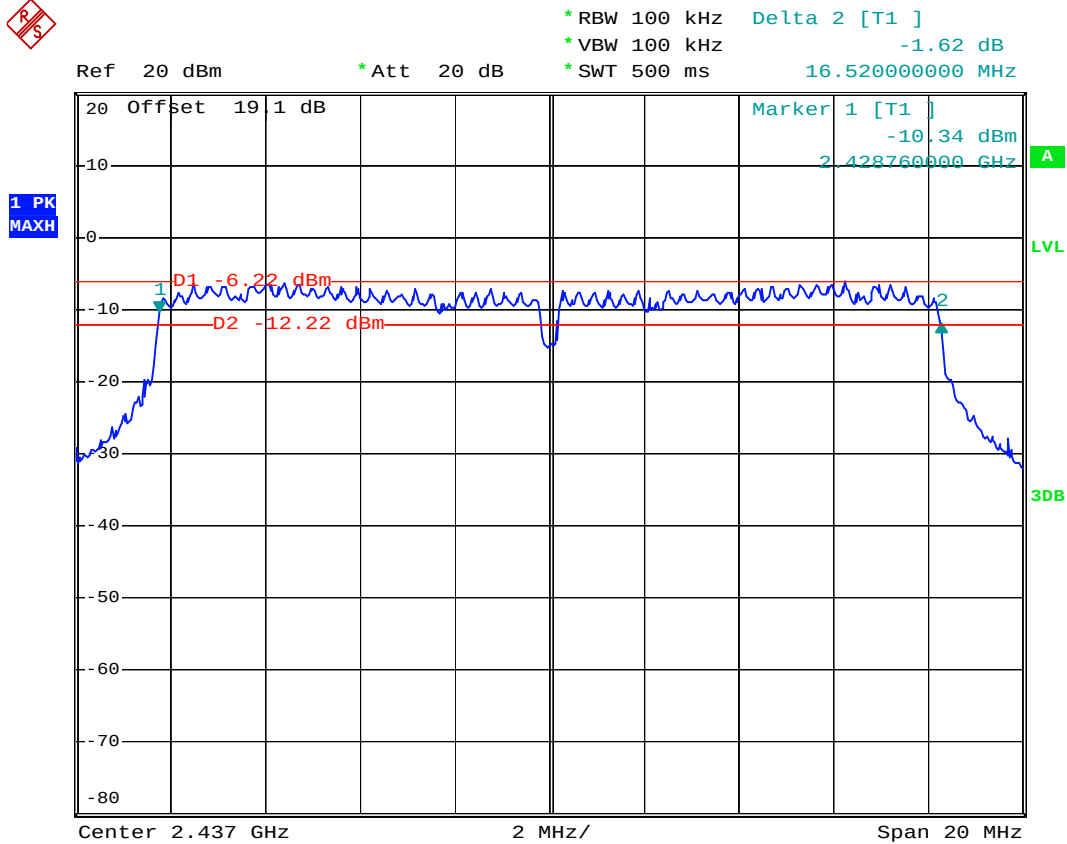

Date: 31.JAN.2008 13:40:55



Mode 6

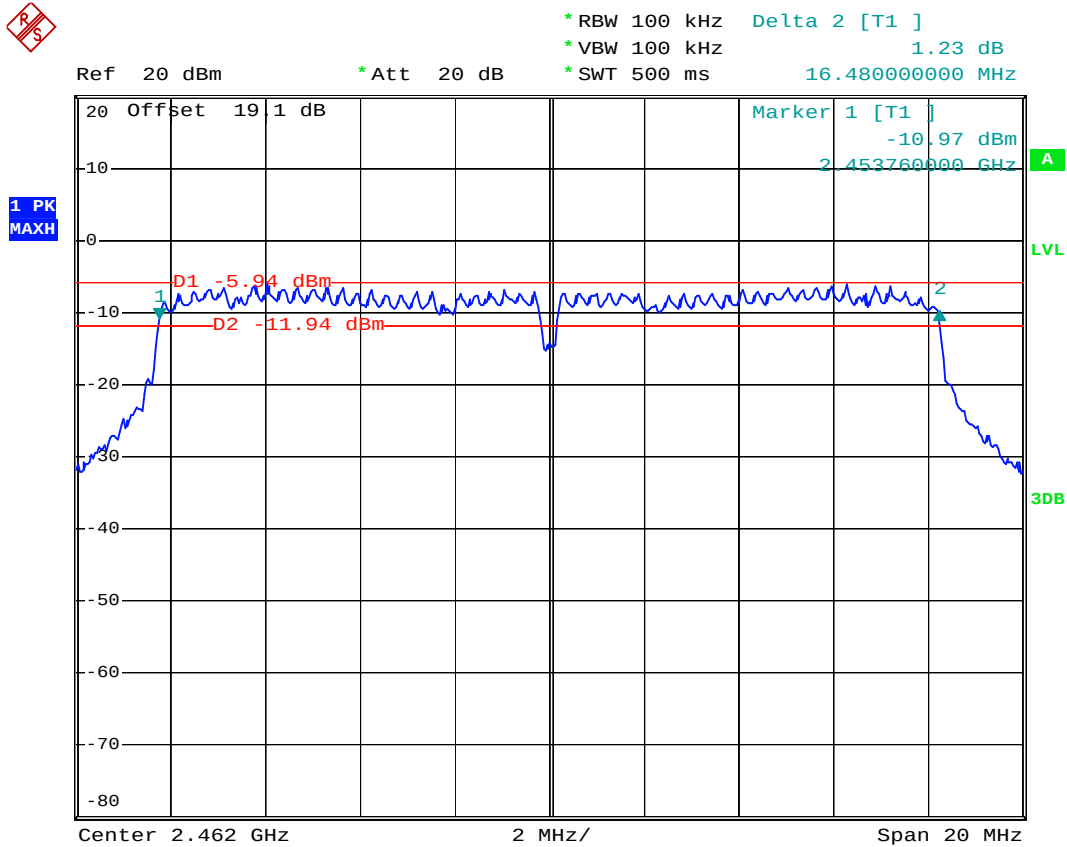

Date: 31.JAN.2008 13:42:11

5.3 Power Spectral Density Measurement


5.3.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.3.2 Test Procedure :

1. The transmitter output was connected to spectrum analyzer directly.
2. The spectrum analyzer's resolution bandwidth was set at 3kHz RBW and 30kHz VBW as that of the fundamental frequency. Set the sweep time=span/3kHz.
3. The power spectral density was measured and recorded.
4. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

5.3.3 Test Setup Layout :

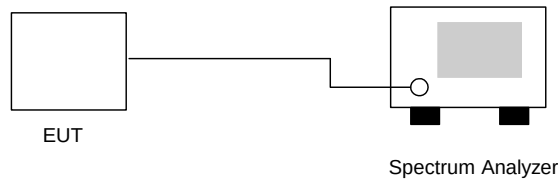

5.3.4 Test Result :

- Application Type : 802.11b/g
- Temperature : 21~24°C
- Relative Humidity : 49~52%
- Test Enginner : Sun

802.11b

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
01	2412	-8.11	8	Mode 1
06	2437	-8.85	8	Mode 2
11	2462	-8.00	8	Mode 3


802.11g

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
01	2412	-16.92	8	Mode 4
06	2437	-18.06	8	Mode 5
11	2462	-18.31	8	Mode 6



5.3.5 Power Spectral Density

Mode 1

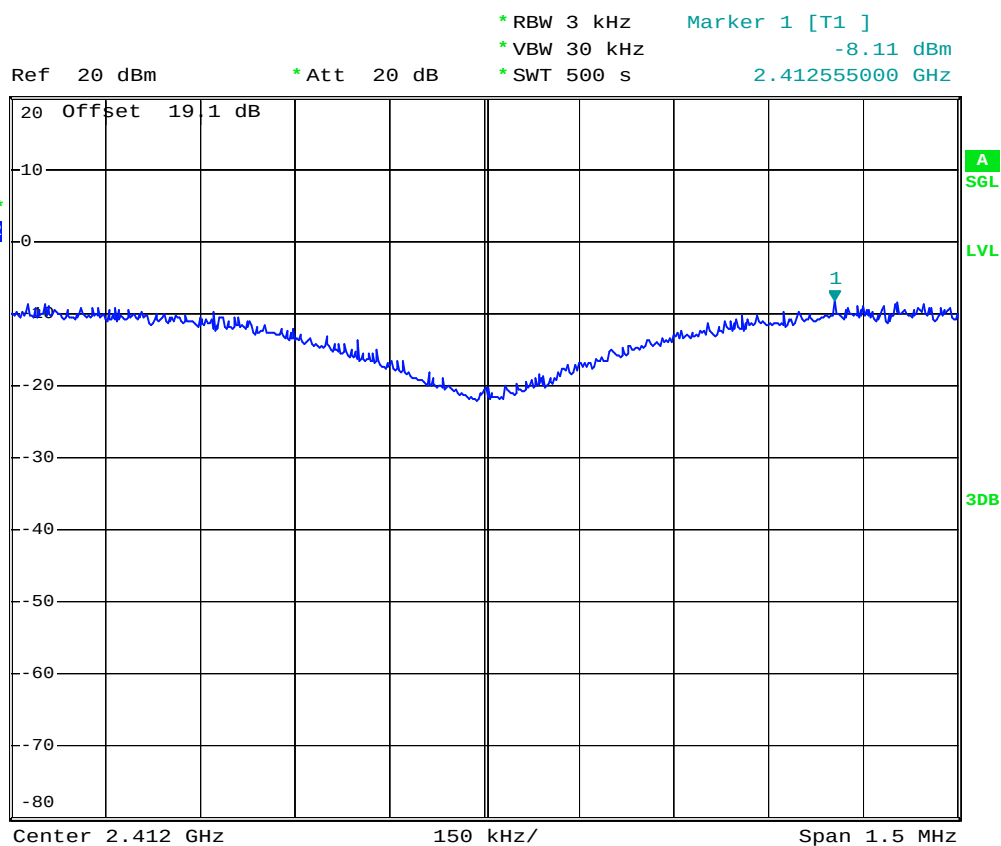


2nd comment ...

Date: 29.JAN.2008 13:44:26



Mode 2

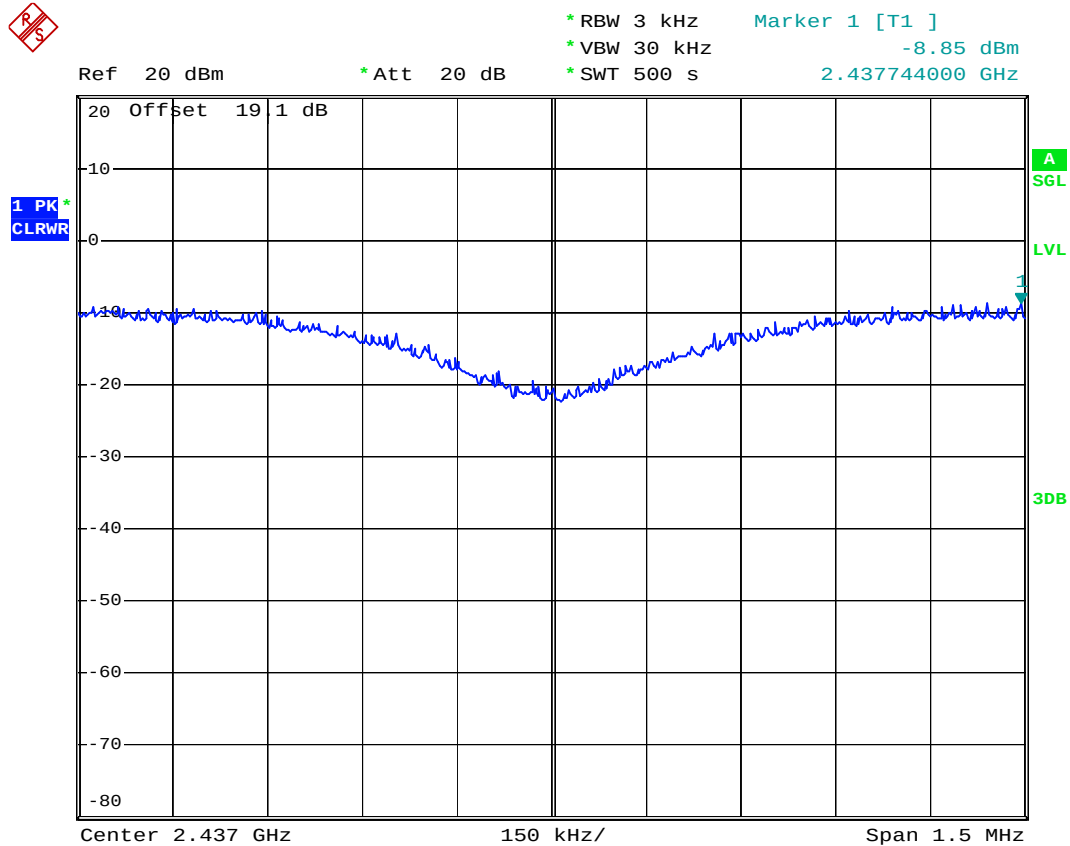


2nd comment ...

Date: 29.JAN.2008 14:13:18



Mode 3

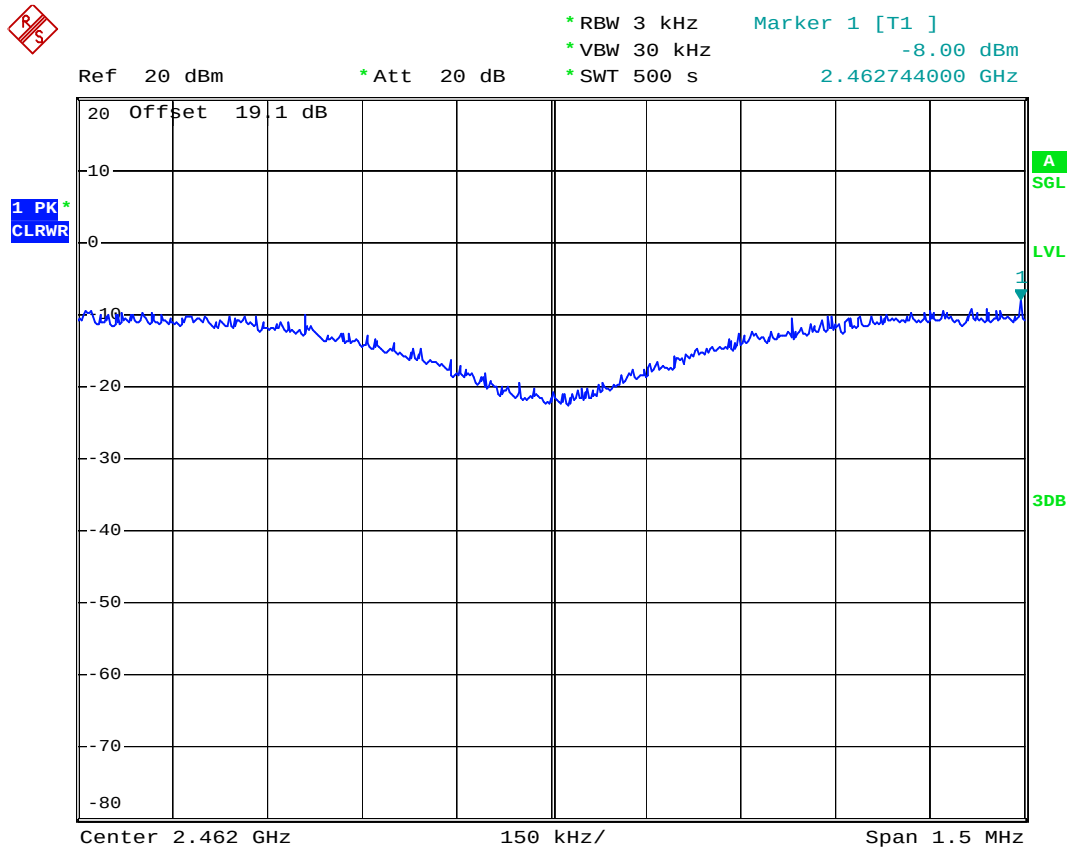


2nd comment ...

Date: 29.JAN.2008 14:03:17



Mode 4

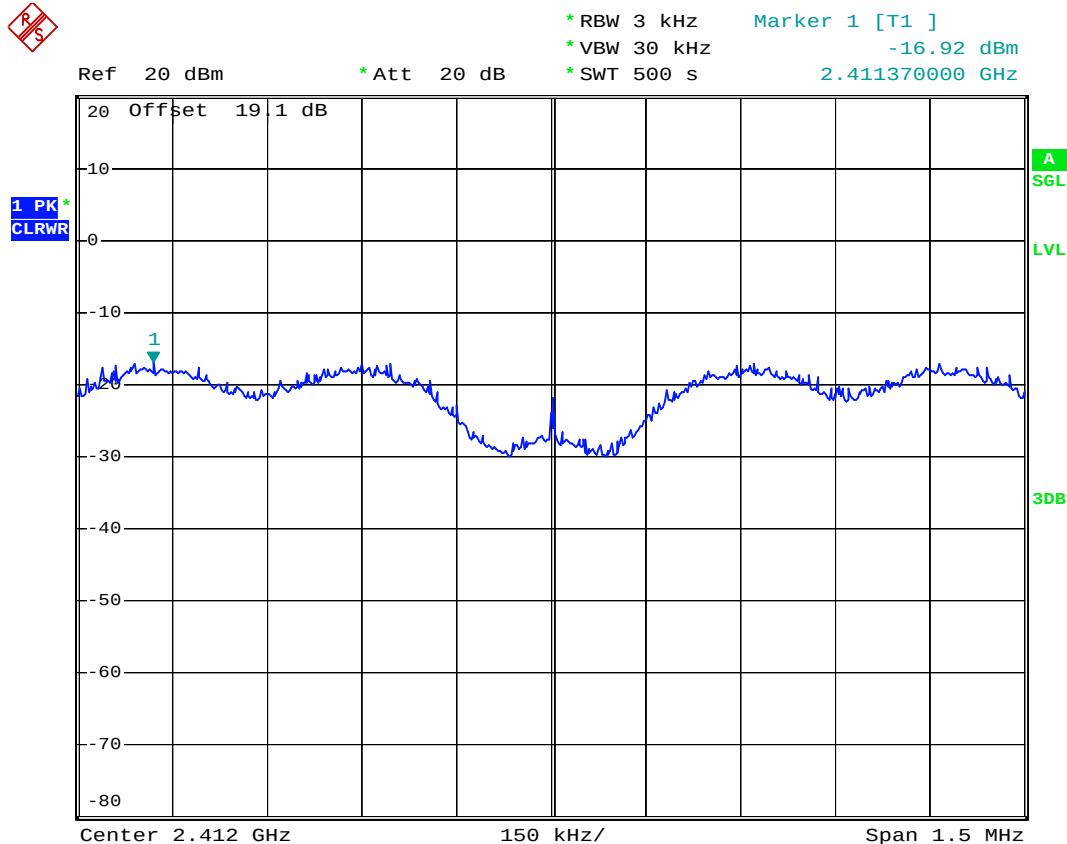


2nd comment ...

Date: 29.JAN.2008 14:23:19



Mode 5

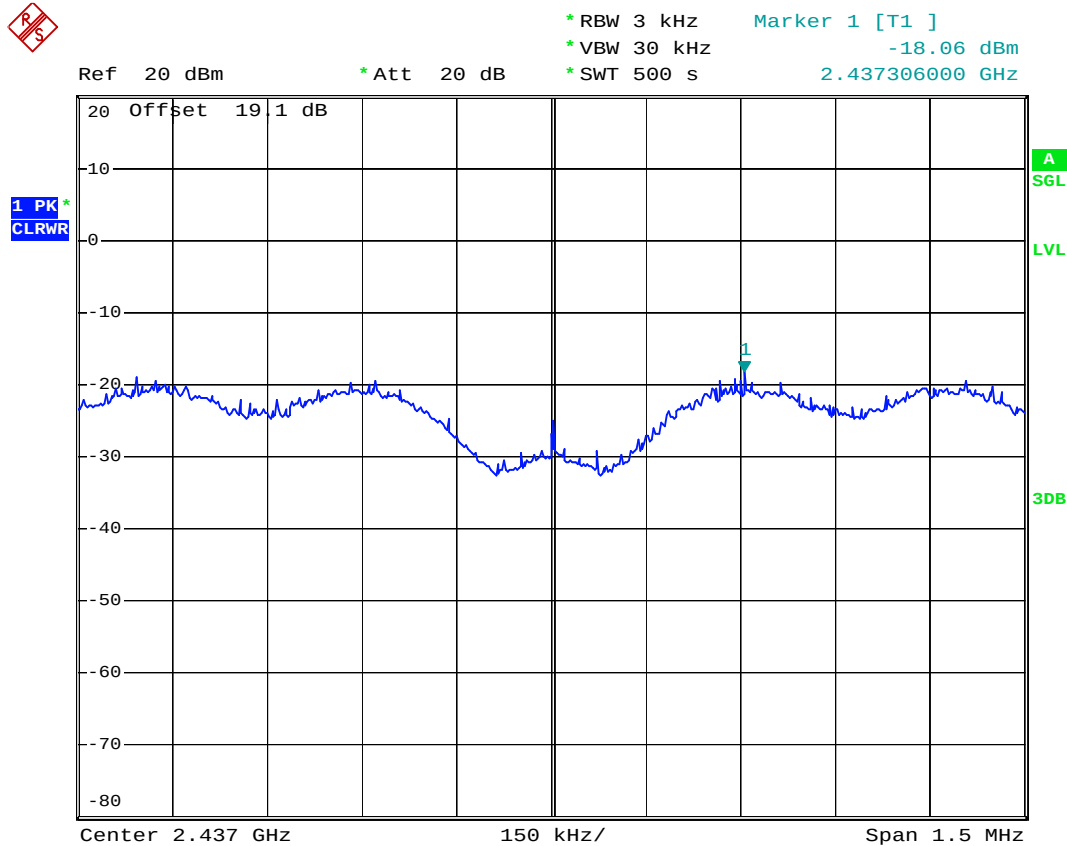


2nd comment ...

Date: 29.JAN.2008 15:14:00



Mode 6

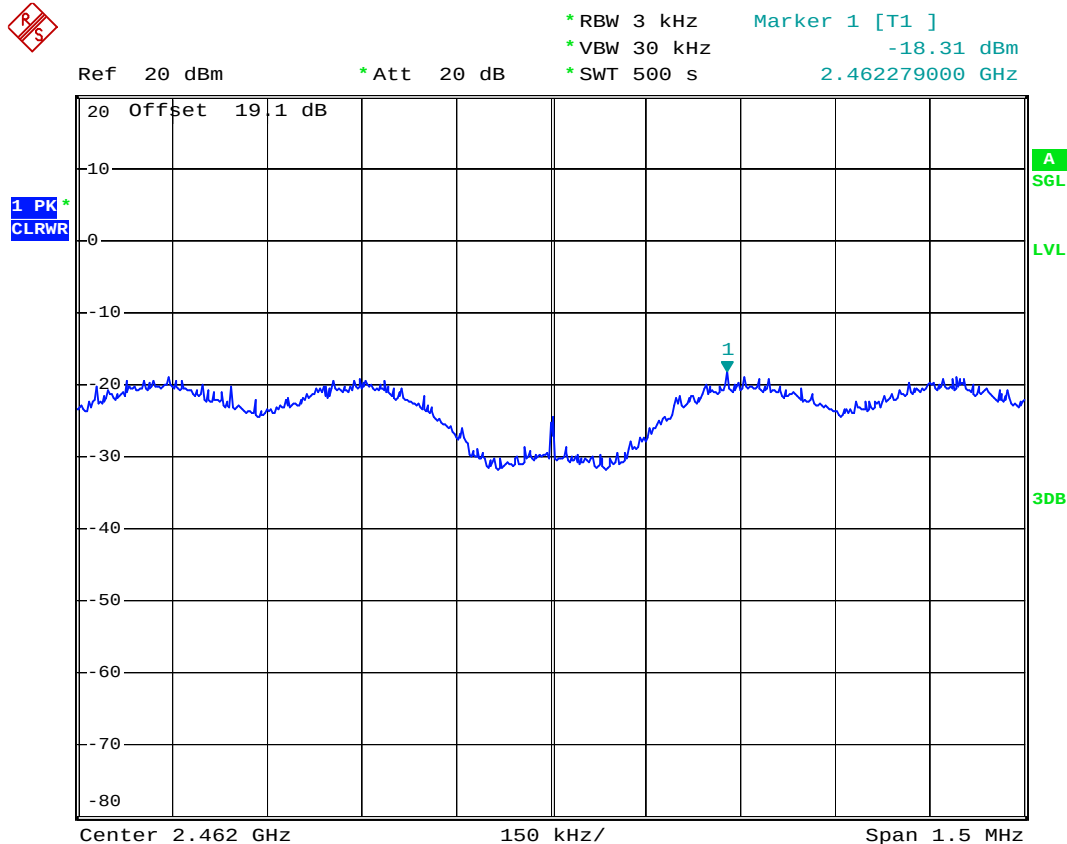

2nd comment ...

Date: 29.JAN.2008 15:24:57

5.4 Band Edges Measurement

5.4.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.4.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 kHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.4.3 Test Result :

- Application Type : WLAN 802.11b/g
- Temperature : 21~24°C
- Relative Humidity : 49~52%
- Test Engineer : Sun

- Test Result in WLAN lower band (802.11b/g) : PASS
- Test Result in WLAN higher band (802.11b/g) : PASS



5.4.4 Note on Band Edge Emission :

➤WLAN 802.11b

CH01 (Horizontal)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.33	52.29	-21.71	74.00	52.19	31.86	3.92	35.68	100	0	Peak
2387.33	42.79	-11.21	54.00	42.69	31.86	3.92	35.68	189	183	Average

CH01 (Vertical)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.33	50.94	-23.06	74.00	50.84	31.86	3.92	35.68	100	0	Peak
2387.33	41.92	-12.08	54.00	41.82	31.86	3.92	35.68	167	77	Average

CH11 (Horizontal)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	50.65	-23.35	74.00	50.32	31.98	4.05	35.70	100	0	Peak
2483.50	41.52	-12.48	54.00	41.19	31.98	4.05	35.70	153	6	Average

CH11 (Vertical)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	50.03	-23.97	74.00	49.70	31.98	4.05	35.70	100	0	Peak
2483.50	40.95	-33.05	74.00	40.62	31.98	4.05	35.70	162	119	Average

**➤WLAN 802.11g**

CH01 (Horizontal)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.61	56.16	-17.84	74.00	56.06	31.86	3.92	35.68	100	0	Peak
2389.61	42.09	-11.91	54.00	41.99	31.86	3.92	35.68	182	171	Average

CH01 (Vertical)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390.00	54.06	-19.94	74.00	53.96	31.86	3.92	35.68	100	0	Peak
2390.00	41.55	-12.45	54.00	41.45	31.86	3.92	35.68	106	118	Average

CH11 (Horizontal)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.66	54.97	-19.03	74.00	54.64	31.98	4.05	35.70	100	0	Peak
2483.66	41.52	-12.48	54.00	41.19	31.98	4.05	35.70	180	338	Average

CH11 (Vertical)


Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	53.62	-20.38	74.00	53.29	31.98	4.05	35.70	100	0	Peak
2483.50	41.32	-12.68	54.00	40.99	31.98	4.05	35.70	159	119	Average



5.4.5 Band Edge

WLAN 802.11b

CH01

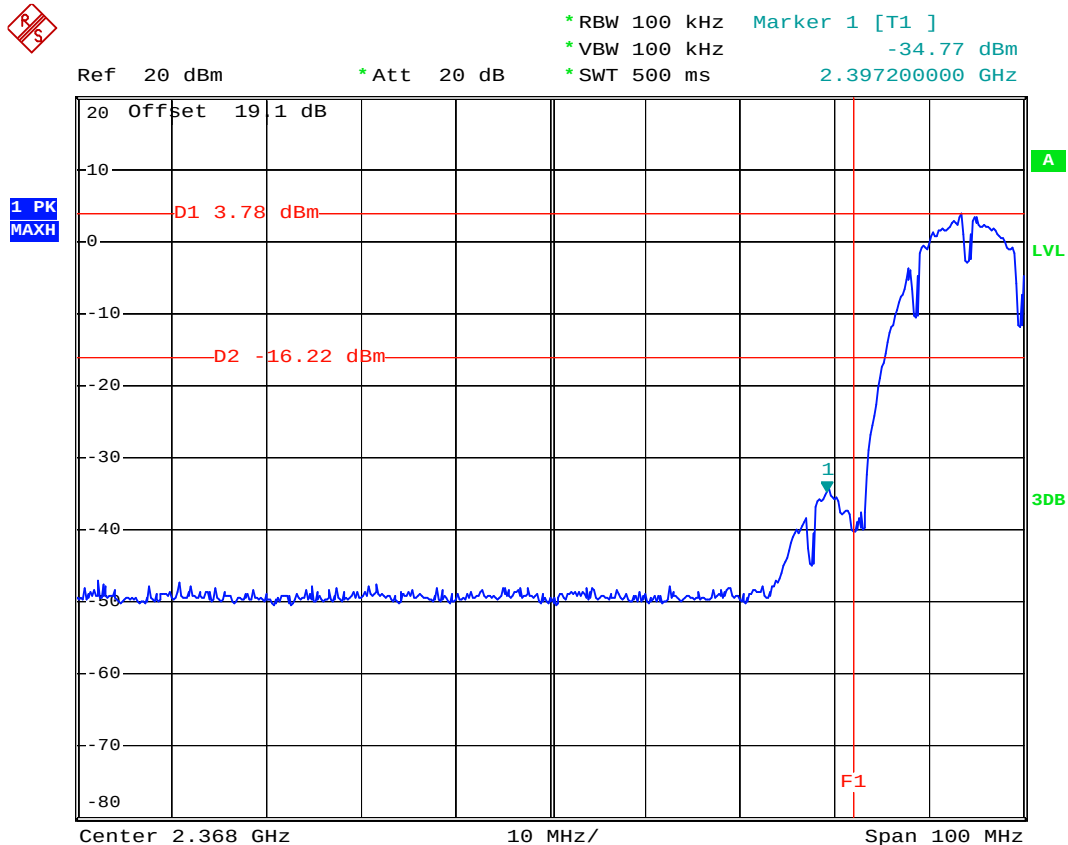


2nd comment ...

Date: 29.JAN.2008 13:32:41



WLAN 802.11b

CH11

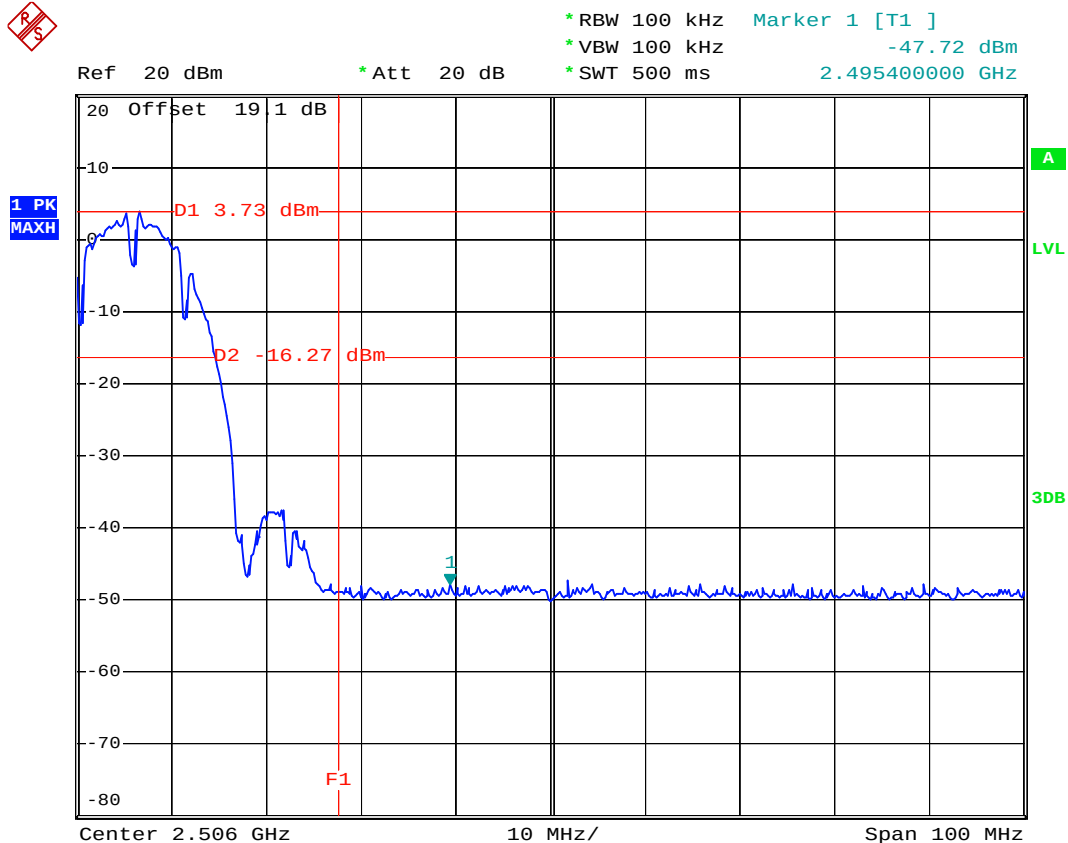


2nd comment ...

Date: 29.JAN.2008 13:31:26



WLAN 802.11g

CH01

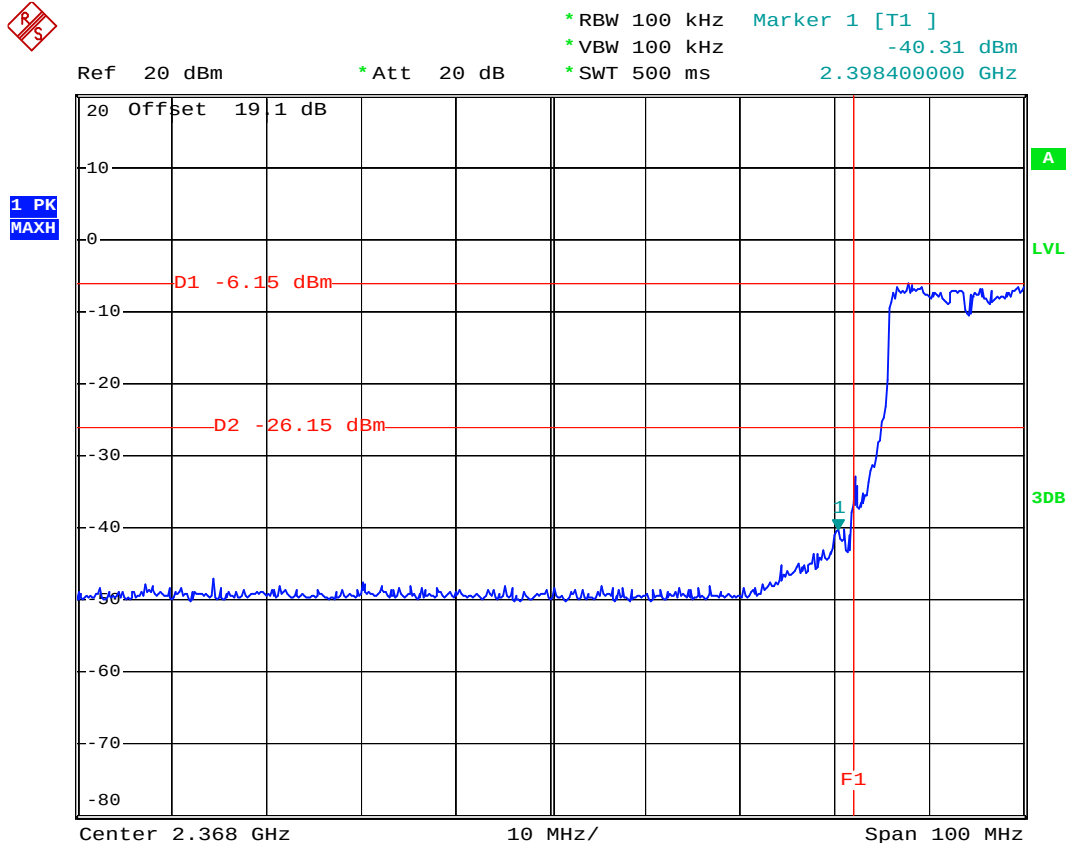


2nd comment ...

Date: 29.JAN.2008 15:01:53



WLAN 802.11g

CH11

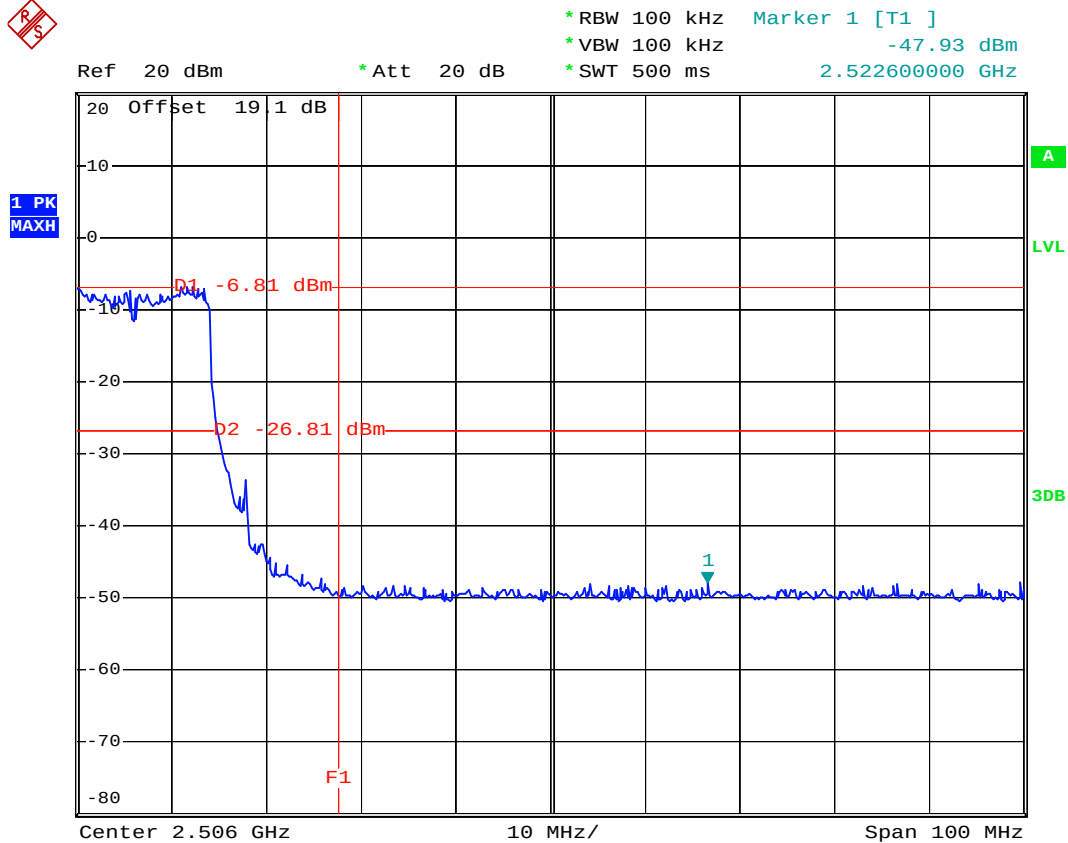

2nd comment ...

Date: 29.JAN.2008 15:00:16

5.5 Peak Output Power Measurement


5.5.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.5.2 Test Procedure :

1. The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter for WLAN measurement. The power is equal to the reading level on power meter plus cable loss at the EUT antenna terminal.
2. The antenna port(RF output) of the EUT was connected to the input (RF input) of a spectrum analyzer for BT measurement. The cable loss has been offset before testing.

5.5.3 Test Setup Layout :



5.5.4 Test Result :

- Application Type : WLAN 802.11b/g
- Temperature : 21~24°C
- Relative Humidity : 49~52%
- Test Enginner : Sun

WLAN 802.11b

Channel	Frequency (MHz)	Measured Output Power (dBm)	Limits (Watt/dBm)
01	2412	15.33	1W / 30dBm
06	2437	15.00	1W / 30dBm
11	2462	14.57	1W / 30dBm

WLAN 802.11g

Channel	Frequency (MHz)	Measured Output Power (dBm)	Limits (Watt/dBm)
01	2412	13.85	1W / 30dBm
06	2437	12.57	1W / 30dBm
11	2462	12.94	1W / 30dBm

5.6 Conducted Emission

5.6.1 Measuring Instruments

As described in chapter 6 of this test Report.

The receiver setting :

150 KHz ~ 30 MHz	Detector : Quasi – Peak and Average Bandwidth : 9 KHz
------------------	--

5.6.2 Test Procedures :


- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power port of a line impedance stabilization network (LISN).
- All the support units are connected to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



5.6.3 Test Data


- Temperature : 22~23°C
- Relative Humidity : 59~60%
- Test Enginner : Happy
- Test Mode : Mode 1

■ The test that passed at minimum margin was marked by the frame in the following table.

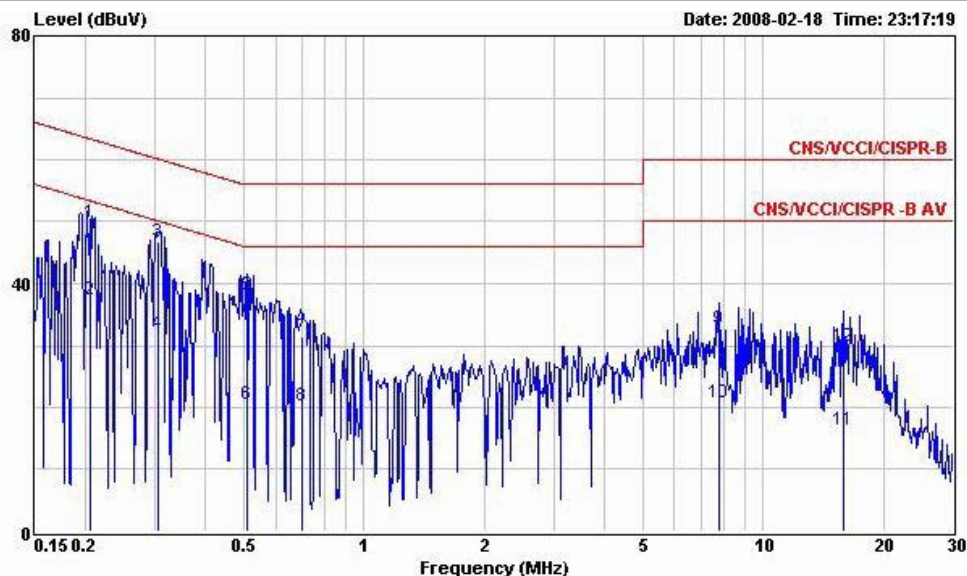

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 LINE
 EUT : Mobile Phone(GSM900/DCS1800)
 Power : 120V/60Hz
 Model : FR 812117
 Memo : PCS1900 Idle + BT Link + Camera
 : + Adaptor

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.205	49.86	-13.54	63.40	49.68	0.10	0.08	QP
2	0.205	37.34	-16.06	53.40	37.16	0.10	0.08	Average
3	0.304	46.62	-13.50	60.12	46.42	0.10	0.10	QP
4	0.304	31.87	-18.25	50.12	31.67	0.10	0.10	Average
5	0.508	38.15	-17.85	56.00	37.92	0.10	0.13	QP
6	0.508	20.51	-25.49	46.00	20.28	0.10	0.13	Average
7	0.696	31.51	-24.49	56.00	31.26	0.10	0.15	QP
8	0.696	20.24	-25.76	46.00	19.99	0.10	0.15	Average
9	7.730	32.71	-27.29	60.00	32.15	0.27	0.29	QP
10	7.730	20.88	-29.12	50.00	20.32	0.27	0.29	Average
11	15.890	16.35	-33.65	50.00	15.57	0.32	0.46	Average
12	15.890	29.84	-30.16	60.00	29.06	0.32	0.46	QP

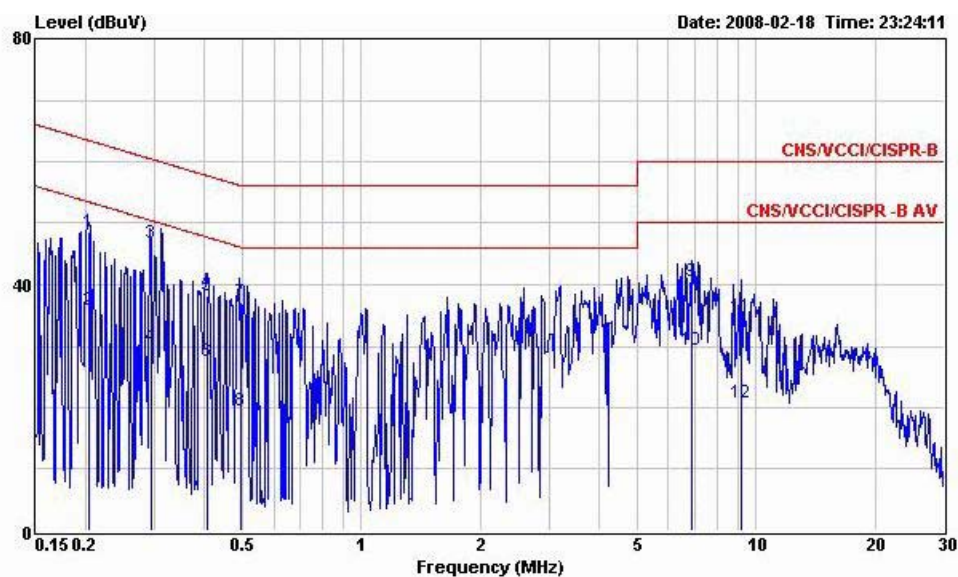


Site : CO01-HY
Condition : CNS/VCCI/CISPR-B 2001/004 200604 NEUTRAL
EUT : Mobile Phone(GSM900/DCS1800)
Power : 120V/60Hz
Model : FR 812117
Memo : PCS1900 Idle + BT Link + Camera
 : + Adaptor

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
1	0.205	48.60	-14.81	63.41	48.42	0.10	0.08	QP
2	0.205	35.89	-17.52	53.41	35.71	0.10	0.08	Average
3	0.293	46.73	-13.70	60.43	46.53	0.10	0.10	QP
4	0.293	29.79	-20.64	50.43	29.59	0.10	0.10	Average
5	0.405	38.10	-19.65	57.75	37.88	0.10	0.12	QP
6	0.405	27.60	-20.15	47.75	27.38	0.10	0.12	Average
7	0.495	37.24	-18.85	56.09	37.01	0.10	0.13	QP
8	0.495	19.56	-26.53	46.09	19.33	0.10	0.13	Average
9	6.840	40.63	-19.37	60.00	40.17	0.16	0.30	QP
10	6.840	29.36	-20.64	50.00	28.90	0.16	0.30	Average
11	9.200	34.90	-25.10	60.00	34.43	0.19	0.28	QP
12	9.200	20.82	-29.18	50.00	20.35	0.19	0.28	Average




- Temperature : 22~23°C
- Relative Humidity : 59~60%
- Test Enginner : Happy
- Test Mode : Mode 2

■ The test that passed at minimum margin was marked by the frame in the following table.

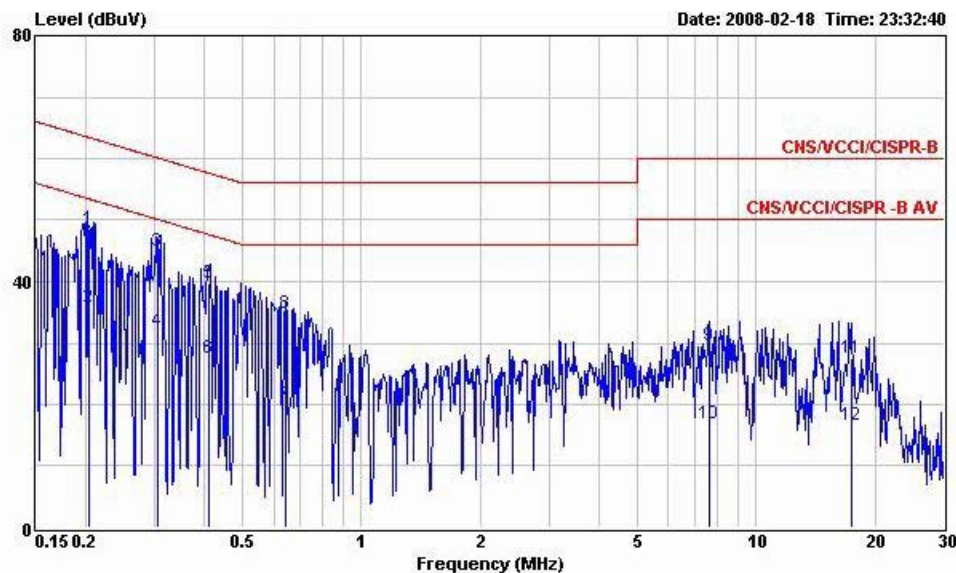

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 LINE
 EUT : Mobile Phone(GSM900/DCS1800)
 Power : 120V/60Hz
 Model : FR 812117
 Memo : PCS1900 Idle + BT Link + MPEG4
 : + Adaptor

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.205	48.68	-14.74	63.42	48.50	0.10	0.08	QP
2	0.205	35.75	-17.67	53.42	35.57	0.10	0.08	Average
3	0.305	44.90	-15.20	60.10	44.70	0.10	0.10	QP
4	0.305	32.06	-18.04	50.10	31.86	0.10	0.10	Average
5	0.410	39.82	-17.84	57.66	39.60	0.10	0.12	QP
6	0.410	27.45	-20.21	47.66	27.23	0.10	0.12	Average
7	0.644	19.92	-26.08	46.00	19.67	0.10	0.15	Average
8	0.644	34.91	-21.09	56.00	34.66	0.10	0.15	QP
9	7.610	29.67	-30.33	60.00	29.11	0.27	0.29	QP
10	7.610	17.00	-33.00	50.00	16.44	0.27	0.29	Average
11	17.470	27.40	-32.60	60.00	26.63	0.35	0.42	QP
12	17.470	16.63	-33.37	50.00	15.86	0.35	0.42	Average

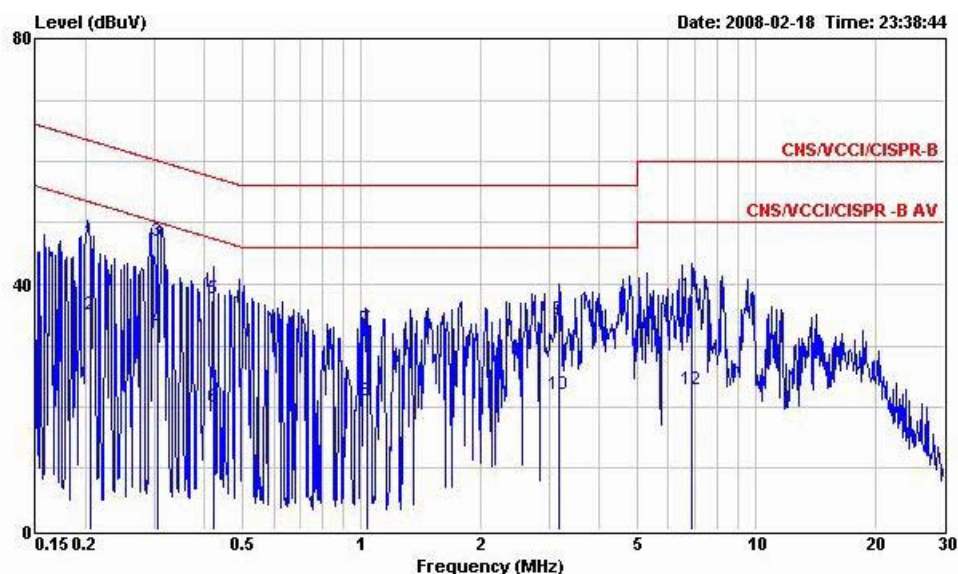


Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 NEUTRAL
 EUT : Mobile Phone(GSM900/DCS1800)
 Power : 120V/60Hz
 Model : FR 812117
 Memo : PCS1900 Idle + BT Link + MPEG4
 : + Adaptor

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.206	46.98	-16.41	63.39	46.80	0.10	0.08	QP
2	0.206	34.95	-18.44	53.39	34.77	0.10	0.08	Average
3	0.304	47.08	-13.06	60.14	46.88	0.10	0.10	QP
4	0.304	32.83	-17.31	50.14	32.63	0.10	0.10	Average
5	0.422	37.58	-19.83	57.41	37.36	0.10	0.12	QP
6	0.422	20.03	-27.38	47.41	19.81	0.10	0.12	Average
7	1.030	32.68	-23.32	56.00	32.41	0.10	0.17	QP
8	1.030	21.11	-24.89	46.00	20.84	0.10	0.17	Average
9	3.170	34.39	-21.61	56.00	34.02	0.10	0.27	QP
10	3.170	22.01	-23.99	46.00	21.64	0.10	0.27	Average
11	6.840	38.09	-21.91	60.00	37.63	0.16	0.30	QP
12	6.840	22.84	-27.16	50.00	22.38	0.16	0.30	Average




- Temperature : 22~23°C
- Relative Humidity : 59~60%
- Test Enginner : Happy
- Test Mode : Mode 3

■ The test that passed at minimum margin was marked by the frame in the following table.

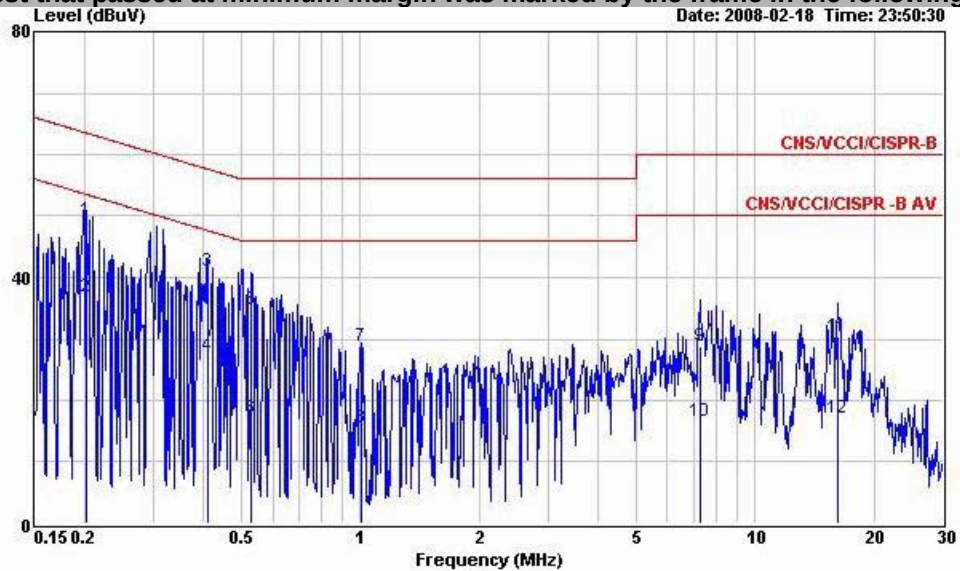

Site : CO01-HY
Condition : CNS/VCCI/CISPR-B 2001/004 200604 LINE
EUT : Mobile Phone(GSM900/DCS1800)
Power : 120V/60Hz
Model : FR 812117
Memo : WLAN Link+ BT Link+ MPEG4
 : + Adaptor

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.202	49.42	-14.12	63.54	49.24	0.10	0.08	QP
2	0.202	36.94	-16.60	53.54	36.76	0.10	0.08	Average
3	0.410	40.96	-16.68	57.64	40.74	0.10	0.12	QP
4	0.410	27.15	-20.49	47.64	26.93	0.10	0.12	Average
5	0.528	34.90	-21.10	56.00	34.66	0.10	0.14	QP
6	0.528	17.21	-28.79	46.00	16.97	0.10	0.14	Average
7	1.003	28.81	-27.19	56.00	28.54	0.10	0.17	QP
8	1.003	15.55	-30.45	46.00	15.28	0.10	0.17	Average
9	7.250	28.76	-31.24	60.00	28.21	0.26	0.29	QP
10	7.250	16.55	-33.45	50.00	16.00	0.26	0.29	Average
11	16.230	30.26	-29.74	60.00	29.48	0.33	0.45	QP
12	16.230	17.06	-32.94	50.00	16.28	0.33	0.45	Average

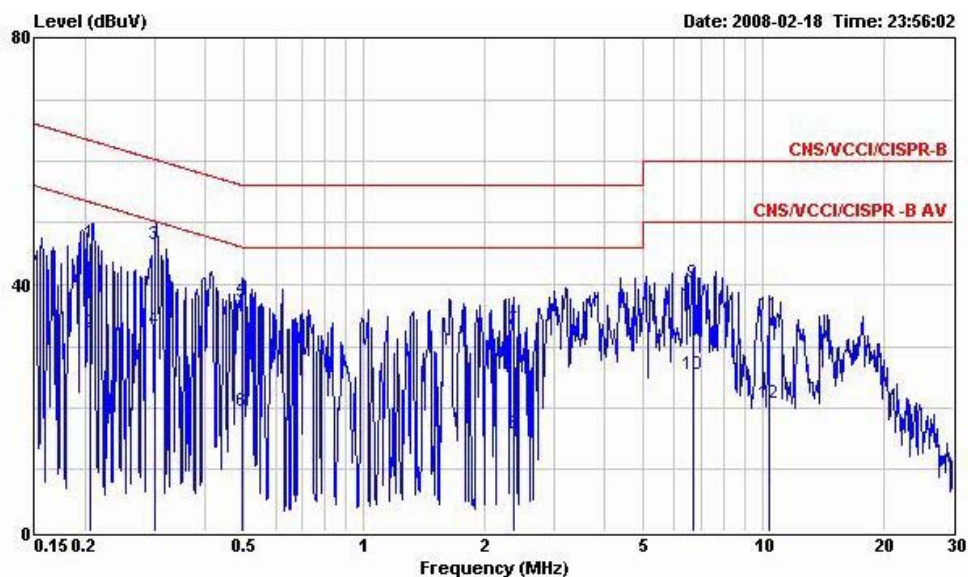


Site : CO01-HY
Condition : CNS/VCCI/CISPR-B 2001/004 200604 NEUTRAL
EUT : Mobile Phone(GSM900/DCS1800)
Power : 120V/60Hz
Model : FR 812117
Memo : WLAN Link+ BT Link+ MPEG4
+ Adaptor

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.207	46.76	-16.57	63.33	46.58	0.10	0.08	QP
2	0.207	32.32	-21.01	53.33	32.14	0.10	0.08	Average
3	0.300	46.43	-13.82	60.25	46.23	0.10	0.10	QP
4	0.300	32.67	-17.58	50.25	32.47	0.10	0.10	Average
5	0.497	37.16	-18.90	56.06	36.93	0.10	0.13	QP
6	0.497	19.52	-26.54	46.06	19.29	0.10	0.13	Average
7	2.380	32.71	-23.29	56.00	32.43	0.10	0.18	QP
8	2.380	15.79	-30.21	46.00	15.51	0.10	0.18	Average
9	6.660	40.31	-19.69	60.00	39.85	0.16	0.30	QP
10	6.660	25.50	-24.50	50.00	25.04	0.16	0.30	Average
11	10.340	35.15	-24.85	60.00	34.65	0.21	0.29	QP
12	10.340	20.87	-29.13	50.00	20.37	0.21	0.29	Average




- Temperature : 22~23°C
- Relative Humidity : 59~60%
- Test Enginner : Happy
- Test Mode : Mode 4

■ The test that passed at minimum margin was marked by the frame in the following table.

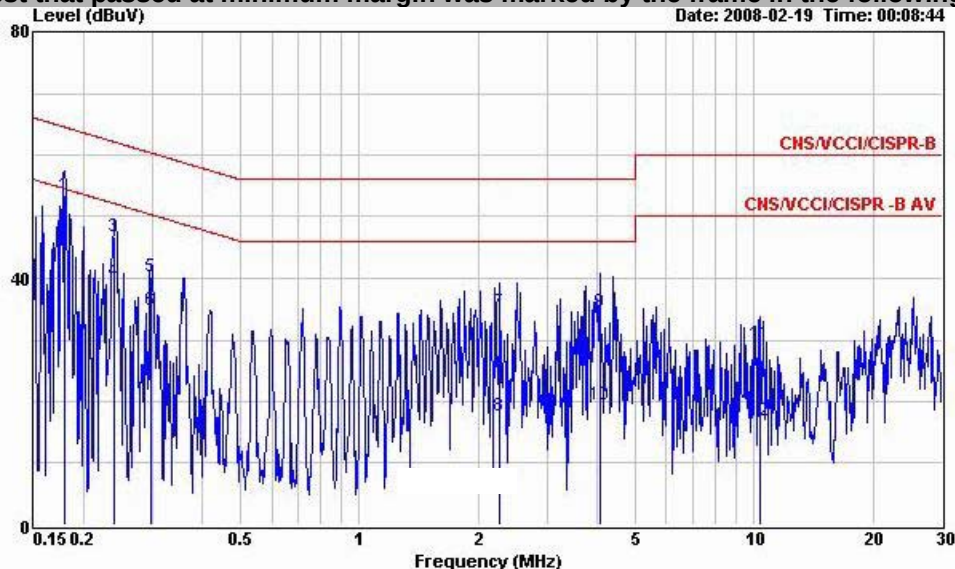

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 LINE
 EUT : Mobile Phone(GSM900/DCS1800)
 Power : From System
 Model : FR 812117
 Memo : PCS1900 Idle + BT Link + MPEG4
 : + USB Link

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.179	53.49	-11.04	64.53	53.30	0.10	0.09	QP
2	0.179	44.33	-20.20	64.53	44.14	0.10	0.09	Average
3	0.238	46.63	-15.53	62.16	46.44	0.10	0.09	QP
4	0.238	39.48	-22.68	62.16	39.29	0.10	0.09	Average
5	0.297	40.16	-20.17	60.33	39.96	0.10	0.10	QP
6	0.297	34.85	-25.48	60.33	34.65	0.10	0.10	Average
7	2.270	34.66	-21.34	56.00	34.37	0.12	0.17	QP
8	2.270	17.72	-38.28	56.00	17.43	0.12	0.17	Average
9	4.070	34.64	-21.36	56.00	34.10	0.20	0.34	QP
10	4.070	19.49	-36.51	56.00	18.95	0.20	0.34	Average
11	10.400	29.40	-30.60	60.00	28.81	0.30	0.29	QP
12	10.400	16.79	-43.21	60.00	16.20	0.30	0.29	Average

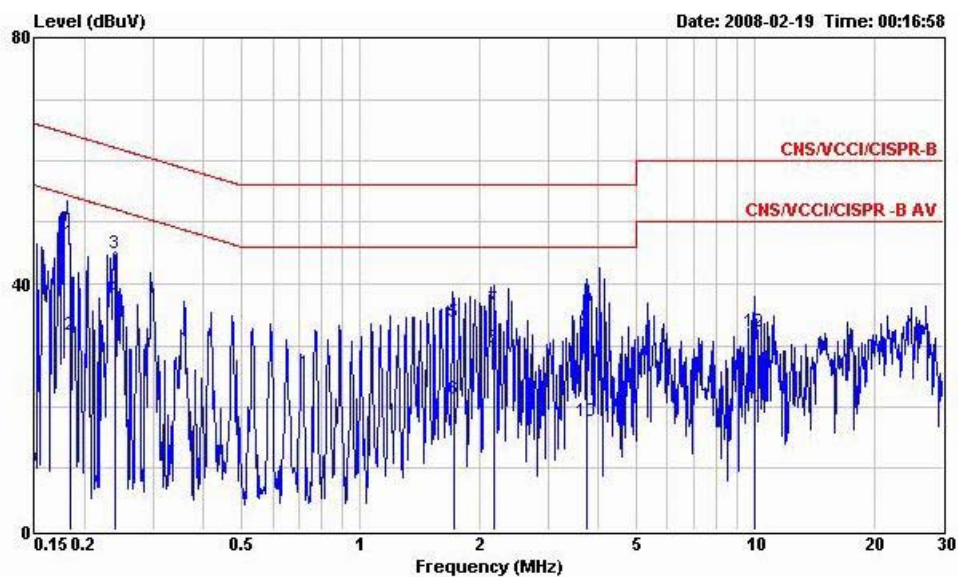

Site : CO01-HV
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 NEUTRAL
 EUT : Mobile Phone(GSM900/DCS1800)
 Power : From System
 Model : FR 812117
 Memo : PCS1900 Idle +BT Link +MPEG4
 : +USB Link

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.184	46.82	-17.50	64.32	46.64	0.10	0.08	QP
2	0.184	31.61	-22.71	54.32	31.43	0.10	0.08	Average
3	0.238	44.88	-17.27	62.15	44.69	0.10	0.09	QP
4	0.238	37.61	-14.54	52.15	37.42	0.10	0.09	Average
5	1.720	33.71	-22.29	56.00	33.47	0.10	0.14	QP
6	1.720	21.20	-24.80	46.00	20.96	0.10	0.14	Average
7	2.190	35.75	-20.25	56.00	35.49	0.10	0.16	QP
8	2.190	29.54	-16.46	46.00	29.28	0.10	0.16	Average
9	3.740	32.94	-23.06	56.00	32.52	0.10	0.32	QP
10	3.740	17.66	-28.34	46.00	17.24	0.10	0.32	Average
11	10.020	18.32	-31.68	50.00	17.85	0.20	0.27	Average
12	10.020	32.29	-27.71	60.00	31.82	0.20	0.27	QP

5.7 Radiated Emission Measurement

5.7.1 Measuring Instruments

As described in chapter 6 of this Report.


The spectrum analyzer setting :

30 ~ 1000 MHz	Detector : Quasi – Peak Bandwidth : 120 KHz
1 ~ 25 GHz	Detector : Peak and Average Bandwidth : 1 MHz

5.7.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
- For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- For testing below 1GHz, If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.7.3 Typical Test Setup Layout of Radiated Emission

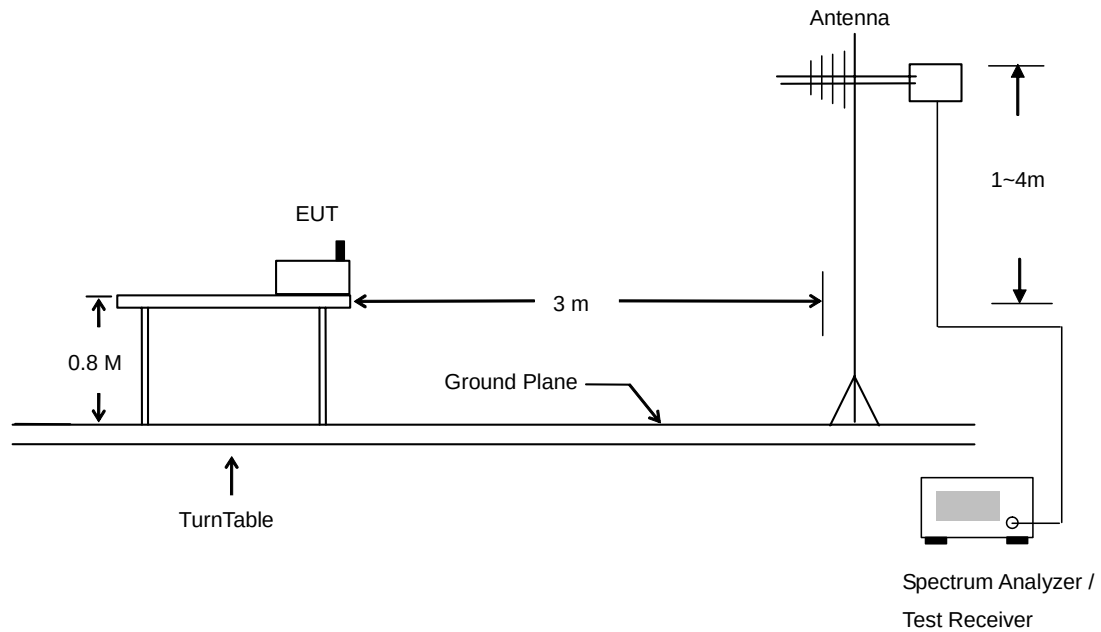





5.7.4 Test Data

- Temperature : 21~24°C
- Relating Humidity : 49~52%
- Test Enginner : Sun
- Test Mode : Mode 1
- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

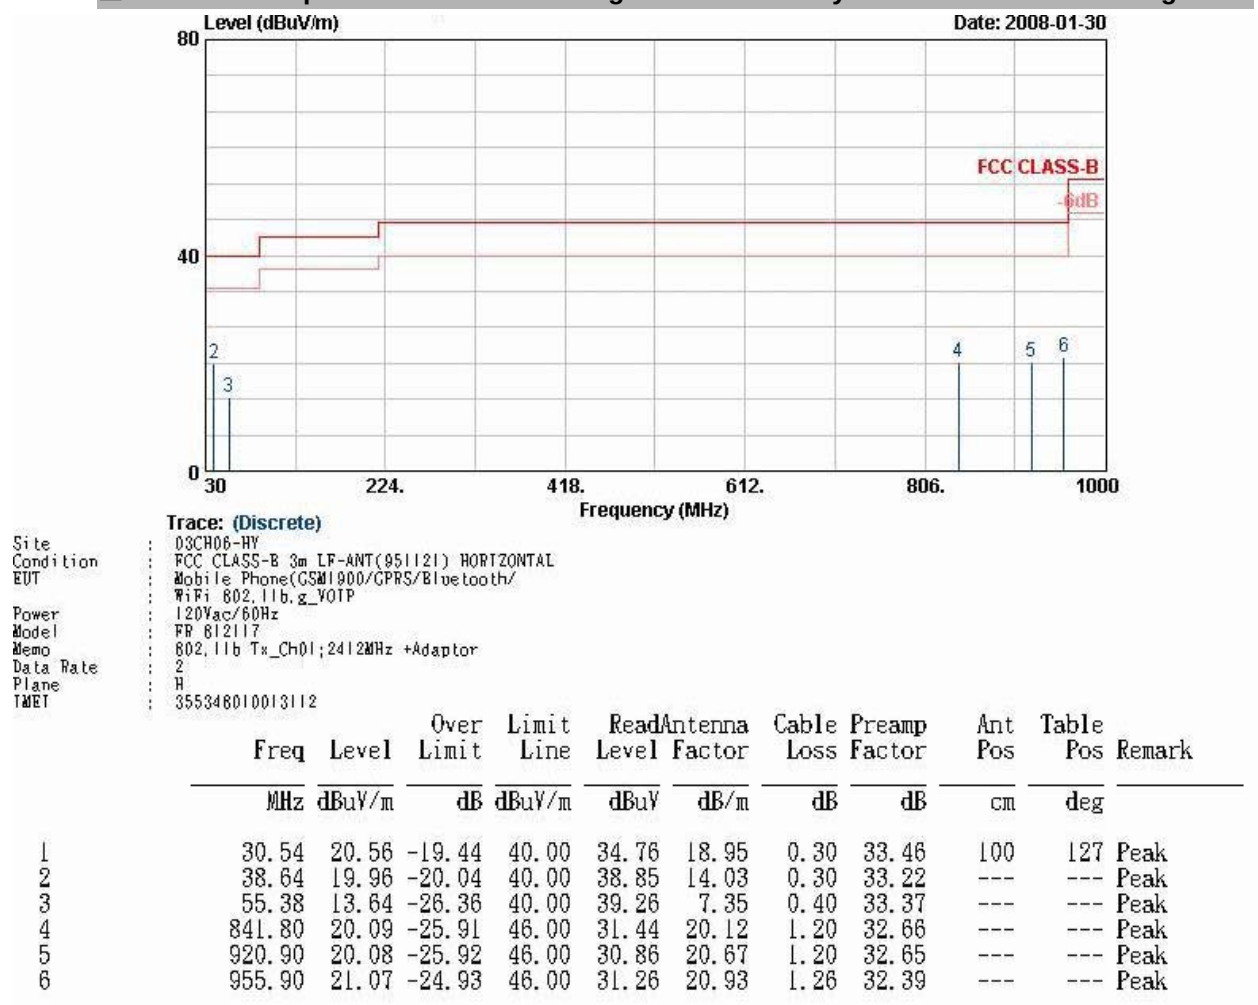

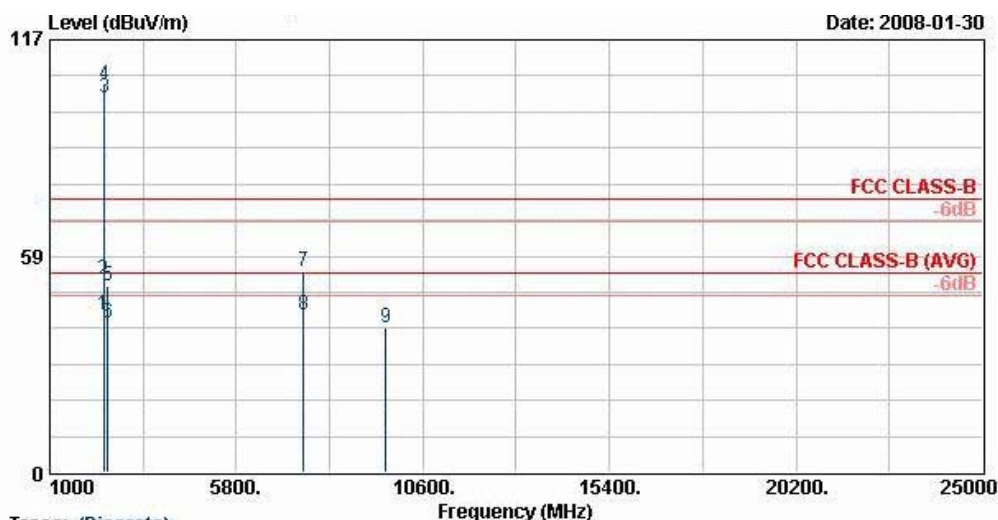

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 WiFi 802.11b.g_VOTP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch01;2412MHz +Adaptor
 Data Rate : 2
 Plane : H
 IMET : 355348010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2387.33	42.79	-11.21	54.00	42.69	31.86	3.92	35.68	189	183 Average
2	2387.33	52.29	-21.71	74.00	52.19	31.86	3.92	35.68	100	0 Peak
3 @	2412.00	101.25			101.10	31.88	3.95	35.68	189	183 Average
4 X	2412.00	104.74			104.59	31.88	3.95	35.68	100	0 Peak
5	2494.00	50.44	-23.56	74.00	50.09	32.00	4.05	35.70	100	0 Peak
6	2494.00	40.47	-13.53	54.00	40.12	32.00	4.05	35.70	189	183 Average
7	7521.00	54.49	-19.51	74.00	47.80	35.61	7.28	36.21	100	0 Peak
8	7521.00	42.81	-11.19	54.00	36.13	35.61	7.28	36.21	100	134 Average
9	9642.00	39.01	-34.99	74.00	77.88	-10.09	7.94	36.73	100	0 Peak

Remark: #3 and #4 Fundamental Signal



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

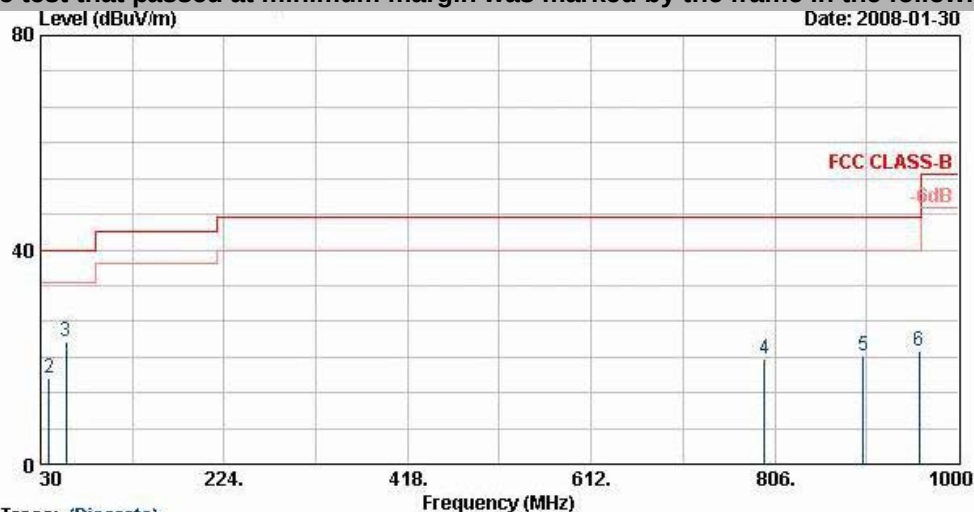

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(951121) VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch01;2412MHz +Adaptor
 Data Rate : 2
 Plane : H
 IMET : 355348010013112

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	21.00	-19.00	40.00	34.54	19.66	0.30	33.50	---	---	Peak
2	38.64	16.01	-23.99	40.00	34.90	14.03	0.30	33.22	---	---	Peak
3	56.73	22.76	-17.24	40.00	48.68	7.06	0.40	33.38	100	54	Peak
4	794.90	19.70	-26.30	46.00	31.31	19.77	1.20	32.59	---	---	Peak
5	899.90	20.15	-25.85	46.00	31.12	20.53	1.30	32.80	---	---	Peak
6	958.70	20.97	-25.03	46.00	31.12	20.94	1.28	32.37	---	---	Peak

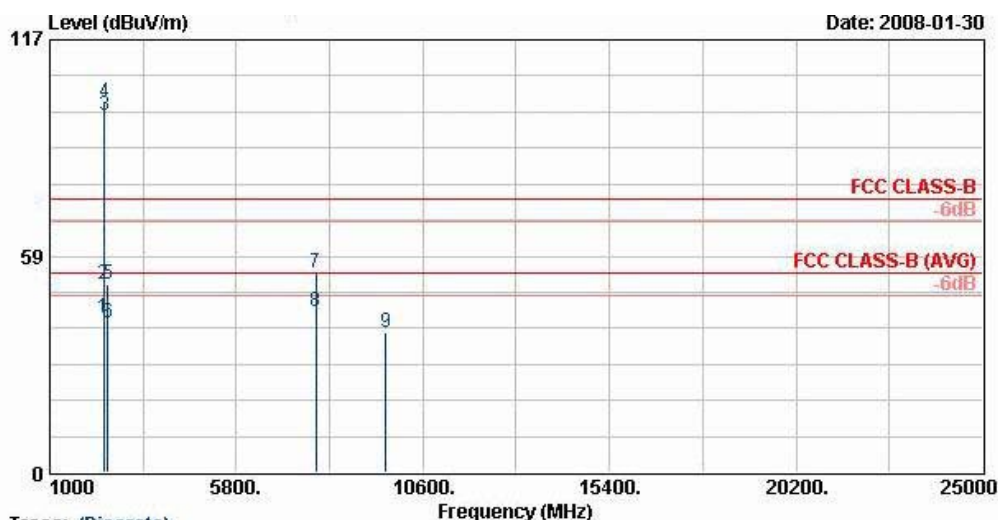

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/WiFi 802.11b.g_V0TP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch01;2412MHz +Adaptor
 Data Rate : 2
 Plane : H
 IMET : 355348010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2387.33	41.92	-12.08	54.00	41.82	31.86	3.92	35.68	167	77 Average
2	2387.33	50.94	-23.06	74.00	50.84	31.86	3.92	35.68	100	0 Peak
3 @	2412.00	96.55			96.40	31.88	3.95	35.68	167	77 Average
4 X	2412.00	100.15			99.99	31.88	3.95	35.68	100	0 Peak
5	2498.00	50.85	-23.15	74.00	50.50	32.00	4.05	35.70	100	0 Peak
6	2498.00	40.44	-13.56	54.00	40.09	32.00	4.05	35.70	167	77 Average
7	7851.00	53.99	-20.01	74.00	47.15	35.67	7.44	36.27	100	0 Peak
8	7851.00	43.54	-10.46	54.00	36.70	35.67	7.44	36.27	100	53 Average
9	9642.00	37.68	-36.32	74.00	76.55	-10.09	7.94	36.73	100	0 Peak

Remark: #3 and #4 Fundamental Signal



- Test Mode : Mode 2
- Polarization : Horizontal


■ The test that passed at minimum margin was marked by the frame in the following table.

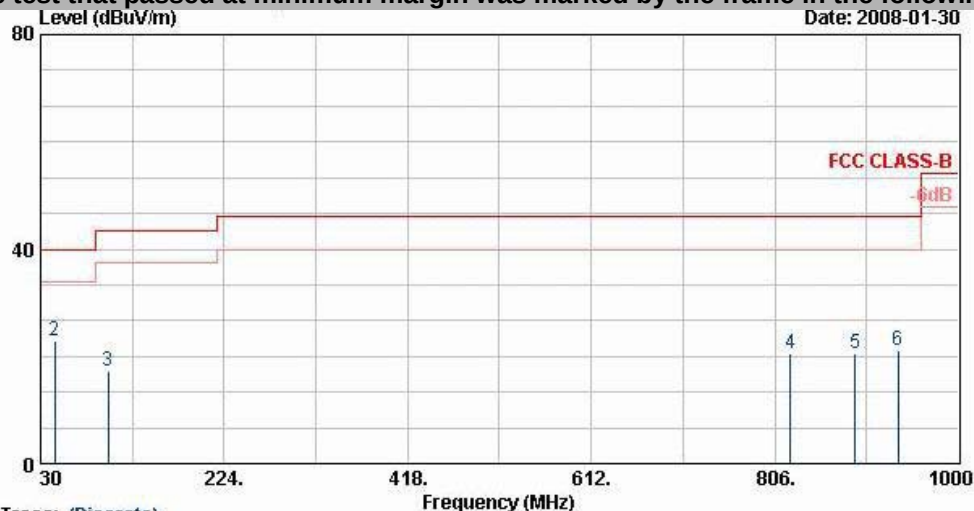

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(951121) HORIZONTAL
 EUT : Mobile Phone(GSM1900/CDPRS/Bluetooth/
 WiFi 802.11b.g_VOTP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch06;2437MHz +Adaptor
 Data Rate : 2
 Plane : H
 TWTET : 355348010013112

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.54	20.74	-19.26	40.00	34.95	18.95	0.30	33.46	---	Peak
2	45.39	22.76	-17.24	40.00	45.05	10.53	0.30	33.12	100	114 Peak
3	101.28	17.39	-26.11	43.50	39.09	11.07	0.50	33.27	---	Peak
4	822.90	20.48	-25.52	46.00	31.91	19.98	1.20	32.61	---	Peak
5	890.80	20.51	-25.49	46.00	31.52	20.46	1.30	32.78	---	Peak
6	936.30	21.21	-24.79	46.00	31.76	20.79	1.20	32.54	---	Peak

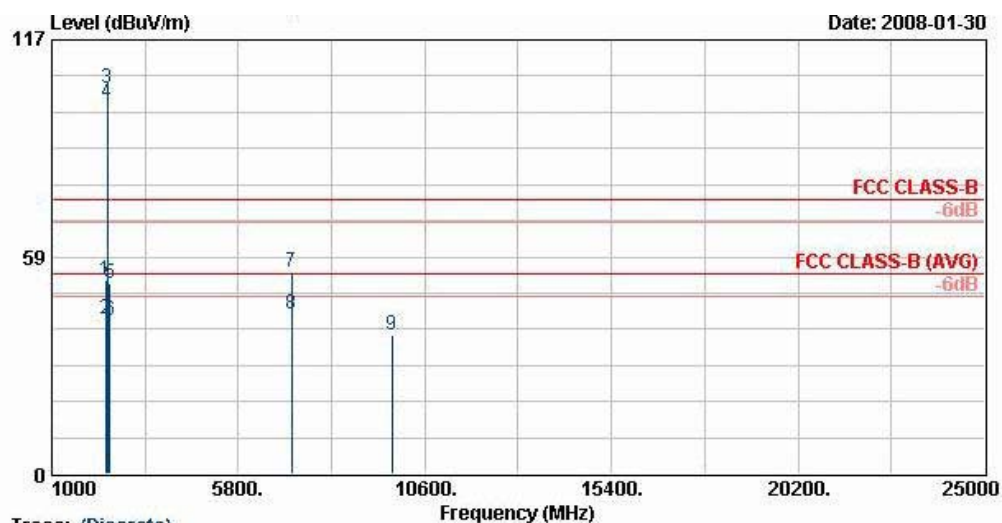

Trace: (Discrete)

Site : 03CH06-HV
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch06;2437MHz +Adaptor
 Data Rate : 2
 Plane : H
 IMET : 355348010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2388.00	52.13	-21.87	74.00	52.03	31.86	3.92	35.68	100	0 Peak
2	2388.00	41.57	-12.43	54.00	41.47	31.86	3.92	35.68	181	339 Average
3 X	2437.00	103.83			103.61	31.93	3.99	35.69	100	0 Peak
4 @	2437.00	100.18			99.95	31.93	3.99	35.69	181	339 Average
5	2498.00	51.33	-22.67	74.00	50.98	32.00	4.05	35.70	100	0 Peak
6	2498.00	41.13	-12.87	54.00	40.78	32.00	4.05	35.70	181	339 Average
7	7167.00	54.45	-19.55	74.00	47.64	35.73	7.15	36.07	100	0 Peak
8	7167.00	43.24	-10.76	54.00	36.43	35.73	7.15	36.07	100	247 Average
9	9747.00	37.51	-36.49	74.00	76.13	-9.85	7.98	36.75	100	0 Peak

Remark: #3 and #4 Fundamental Signal



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

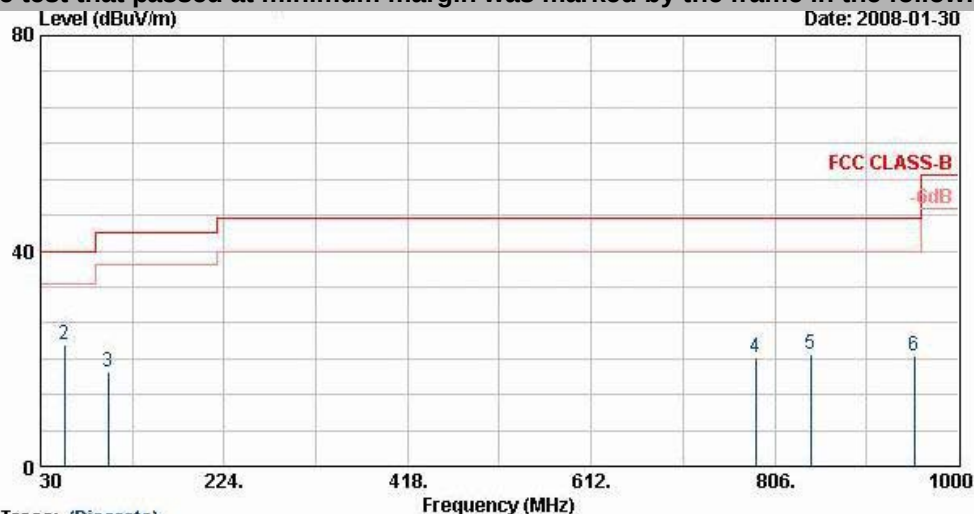

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(951121) VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 612117
 Memo : 802.11b Tx_Ch06;2437MHz +Adaptor
 Data Rate : 2
 Plane : H
 TMET : 355348010013112

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	20.96	-19.04	40.00	34.50	19.66	0.30	33.50	---	---	Peak
2	55.38	22.66	-17.34	40.00	48.28	7.35	0.40	33.37	100	36	Peak
3	101.28	17.63	-25.87	43.50	39.33	11.07	0.50	33.27	---	---	Peak
4	785.80	20.07	-25.93	46.00	31.84	19.68	1.20	32.65	---	---	Peak
5	843.90	20.90	-25.10	46.00	32.23	20.13	1.20	32.66	---	---	Peak
6	953.80	20.54	-25.46	46.00	30.81	20.91	1.24	32.41	---	---	Peak

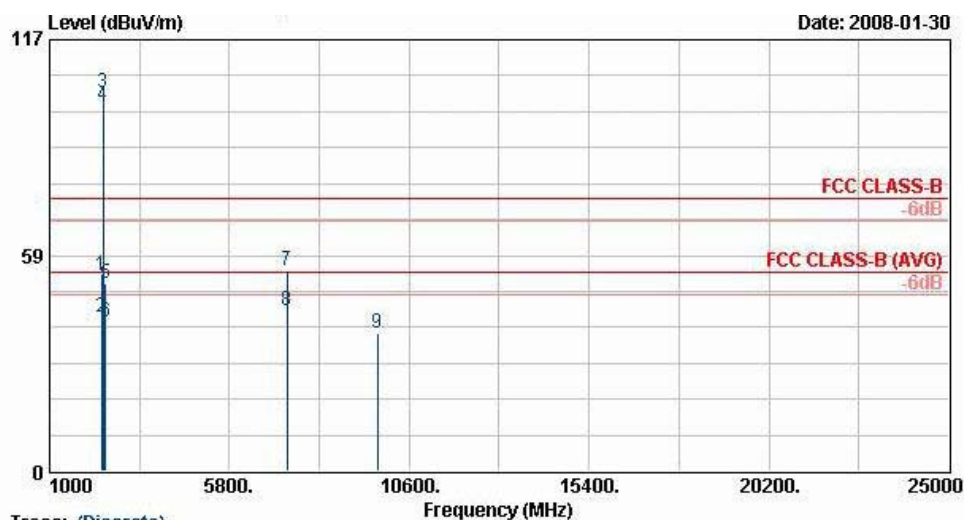

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_YOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch06;2437MHz +Adaptor
 Data Rate : 2
 Plane : H
 TMET : 355346010013112


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2388.00	52.90	-21.10	74.00	52.80	31.86	3.92	35.68	100	0	Peak
2	2388.00	41.84	-12.16	54.00	41.74	31.86	3.92	35.68	165	119	Average
3 X	2437.00	102.81			102.59	31.93	3.99	35.69	100	0	Peak
4 @	2437.00	99.18			98.95	31.93	3.99	35.69	165	119	Average
5	2498.00	50.88	-23.12	74.00	50.53	32.00	4.05	35.70	100	0	Peak
6	2498.00	40.50	-13.50	54.00	40.15	32.00	4.05	35.70	165	119	Average
7	7347.00	54.16	-19.84	74.00	47.43	35.66	7.21	36.14	100	0	Peak
8	7347.00	43.42	-10.58	54.00	36.69	35.66	7.21	36.14	100	154	Average
9	9747.00	37.53	-36.47	74.00	76.14	-9.85	7.98	36.75	100	0	Peak

Remark: #3 and #4 Fundamental Signal




- Test Mode : Mode 3
- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

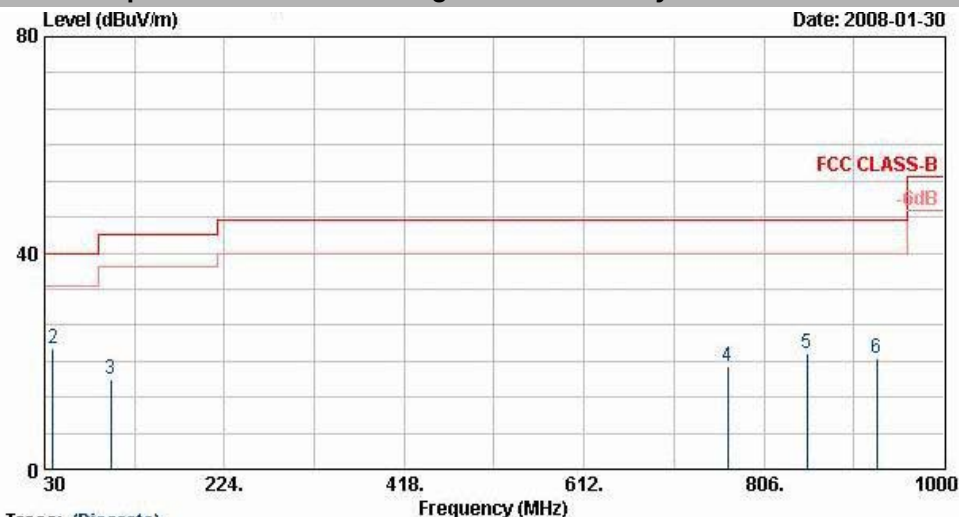

Trace: (Discrete)
 Site : 03CH08-HY
 Condition : FCC CLASS-B 3m LP-ANT(951121) HORIZONTAL
 EUT : Mobile Phone(GSM1900/CDMA/Bluetooth/
 : WiFi 802.11b.g.VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch11;2462MHz +Adaptor
 Data Rate : 2
 Plane : H
 TMET : 355348010013112

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg	
1	30.00	20.40	-19.60	40.00	33.94	19.66	0.30	33.50	---	---	Peak
2	38.64	22.37	-17.63	40.00	41.25	14.03	0.30	33.22	100	114	Peak
3	101.28	16.77	-26.73	43.50	38.47	11.07	0.50	33.27	---	---	Peak
4	766.90	19.18	-26.82	46.00	31.33	19.51	1.10	32.76	---	---	Peak
5	852.30	21.55	-24.45	46.00	32.85	20.19	1.20	32.69	---	---	Peak
6	927.90	20.65	-25.35	46.00	31.31	20.73	1.20	32.59	---	---	Peak

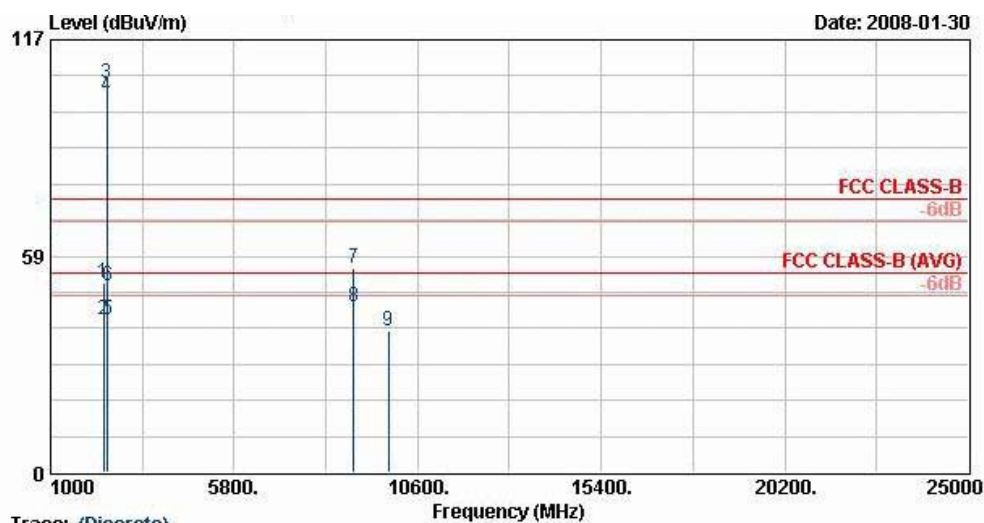

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 EUT : Mobile Phone(CSM1900/GPRS/Bluetooth/
 WiFi 802.11b.g_VOTP
 Power : 120Vac/60Hz
 Model : FR 612117
 Memo : 802.11b Tx_Ch11;2462MHz +Adaptor
 Data Rate : 2
 Plane : H
 IMET : 355348010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	2384.00	51.42	-22.58	74.00	51.35	31.83	3.92	35.68	100	0 Peak
2	2384.00	41.13	-12.87	54.00	41.05	31.83	3.92	35.68	153	6 Average
3 @	2462.00	105.37			105.09	31.95	4.02	35.69	100	0 Peak
4 @	2462.00	101.78			101.50	31.95	4.02	35.69	153	6 Average
5	2483.50	41.52	-12.48	54.00	41.19	31.98	4.05	35.70	153	6 Average
6	2483.50	50.65	-23.35	74.00	50.32	31.98	4.05	35.70	100	0 Peak
7	8916.00	55.23	-18.77	74.00	47.67	36.38	7.71	36.54	100	0 Peak
8	8916.00	44.76	-9.24	54.00	37.21	36.38	7.71	36.54	100	136 Average
9	9846.00	38.26	-35.74	74.00	76.63	-9.63	8.04	36.77	100	0 Peak

Remark: #3 and #4 Fundamental Signal



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

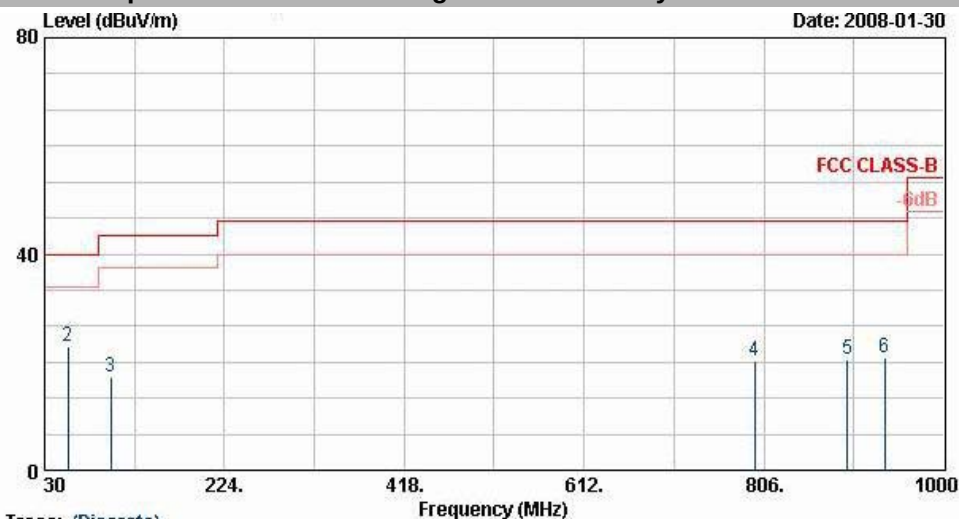

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(951121) VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch11;2462MHz +Adaptor
 Data Rate : 2
 Plane : H
 TMET : 355346010013112

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	20.48	-19.52	40.00	34.02	19.66	0.30	33.50	---	---	Peak
2	54.84	22.87	-17.13	40.00	48.49	7.35	0.40	33.37	100	164	Peak
3	101.28	17.29	-26.21	43.50	38.99	11.07	0.50	33.27	---	---	Peak
4	796.30	20.08	-25.92	46.00	31.68	19.78	1.20	32.58	---	---	Peak
5	896.40	20.45	-25.55	46.00	31.43	20.50	1.30	32.79	---	---	Peak
6	936.30	20.86	-25.14	46.00	31.42	20.79	1.20	32.54	---	---	Peak

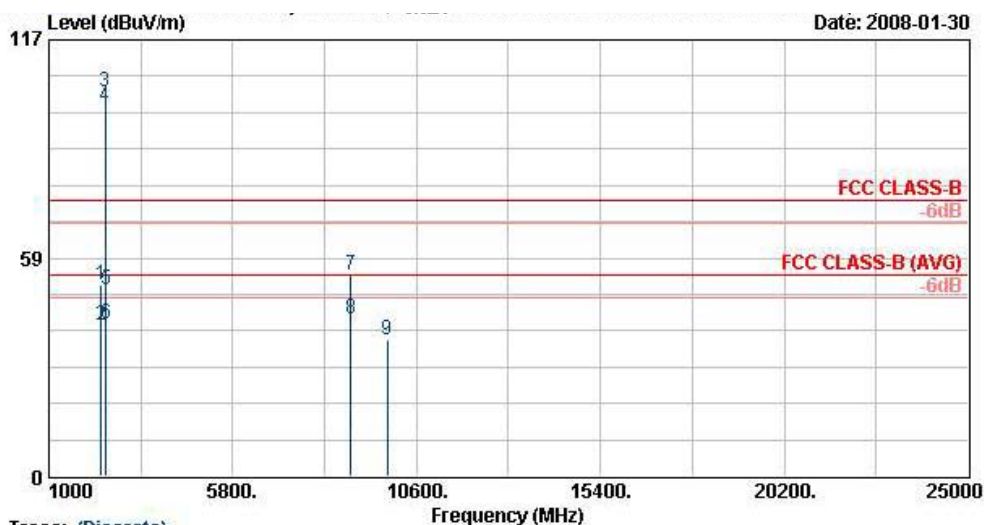

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11b Tx_Ch11;2462MHz +Adaptor
 Data Rate : 2
 Plane : H
 TWTET : 355348010013112

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2368.00	51.46	-22.54	74.00	51.44	31.81	3.89	35.68	100	0 Peak
2	2368.00	40.48	-13.52	54.00	40.46	31.81	3.89	35.68	162	119 Average
3 X	2462.00	103.06			102.78	31.95	4.02	35.69	100	0 Peak
4 @	2462.00	99.37			99.09	31.95	4.02	35.69	162	119 Average
5	2483.50	50.03	-23.97	74.00	49.70	31.98	4.05	35.70	100	0 Peak
6	2483.50	40.94	-13.06	54.00	40.61	31.98	4.05	35.70	162	119 Average
7	8892.00	53.85	-20.15	74.00	46.35	36.34	7.68	36.53	100	0 Peak
8	8892.00	42.35	-11.65	54.00	34.86	36.34	7.68	36.53	100	76 Average
9	9846.00	36.48	-37.52	74.00	74.84	-9.63	8.04	36.77	100	0 Peak

Remark: #3 and #4 Fundamental Signal




- Test Mode : Mode 4
- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.



Trace: (Discrete)
 Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LP-ANT(951121) HORIZONTAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : Wi-Fi 802.11b.g.VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch01;2412MHz +Adaptor
 Data Rate : 24
 Plane : H
 IMET : 355348010013112

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.54	20.66	-19.34	40.00	34.87	18.95	0.30	33.46	100	217	Peak
2	38.64	19.10	-20.90	40.00	37.99	14.03	0.30	33.22	---	---	Peak
3	101.28	15.70	-27.80	43.50	37.40	11.07	0.50	33.27	---	---	Peak
4	847.40	20.82	-25.18	46.00	32.14	20.16	1.20	32.67	---	---	Peak
5	901.30	21.66	-24.34	46.00	32.61	20.54	1.30	32.79	---	---	Peak
6	956.60	21.16	-24.84	46.00	31.36	20.93	1.26	32.39	---	---	Peak

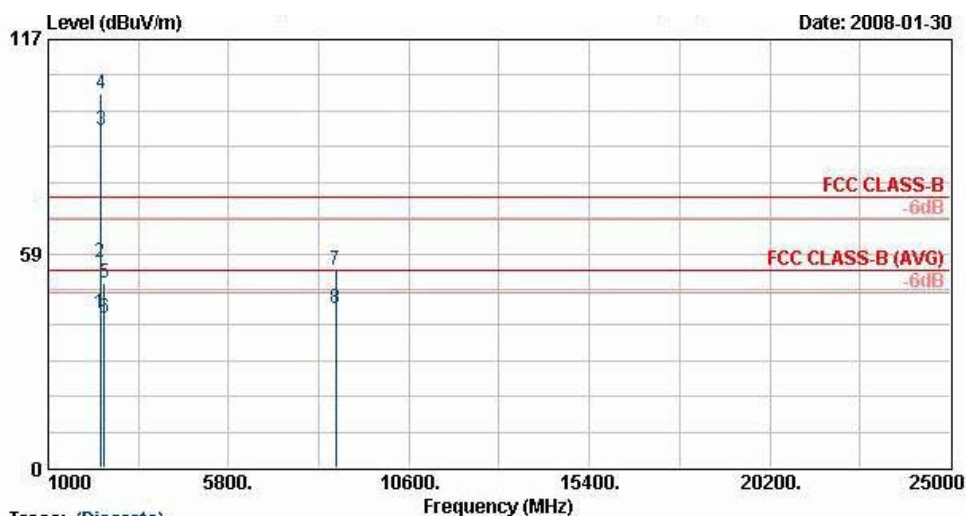

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOTP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch01;2412MHz +Adaptor
 Data Rate : 24
 Plane : H
 TARET : 355346010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2389.61	42.09	-11.91	54.00	41.99	31.86	3.92	35.68	182	171 Average
2	2389.61	56.16	-17.84	74.00	56.06	31.86	3.92	35.68	100	0 Peak
3 @	2412.00	92.33			92.18	31.88	3.95	35.68	182	171 Average
4 X	2412.00	102.28			102.12	31.88	3.95	35.68	100	0 Peak
5	2484.00	50.65	-23.35	74.00	50.32	31.98	4.05	35.70	100	0 Peak
6	2484.00	41.07	-12.93	54.00	40.74	31.98	4.05	35.70	182	171 Average
7	8652.00	54.01	-19.99	74.00	47.01	36.01	7.39	36.39	100	0 Peak
8	8652.00	43.71	-10.29	54.00	36.70	36.01	7.39	36.39	100	213 Average


Remark: #3 and #4 Fundamental Signal



- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

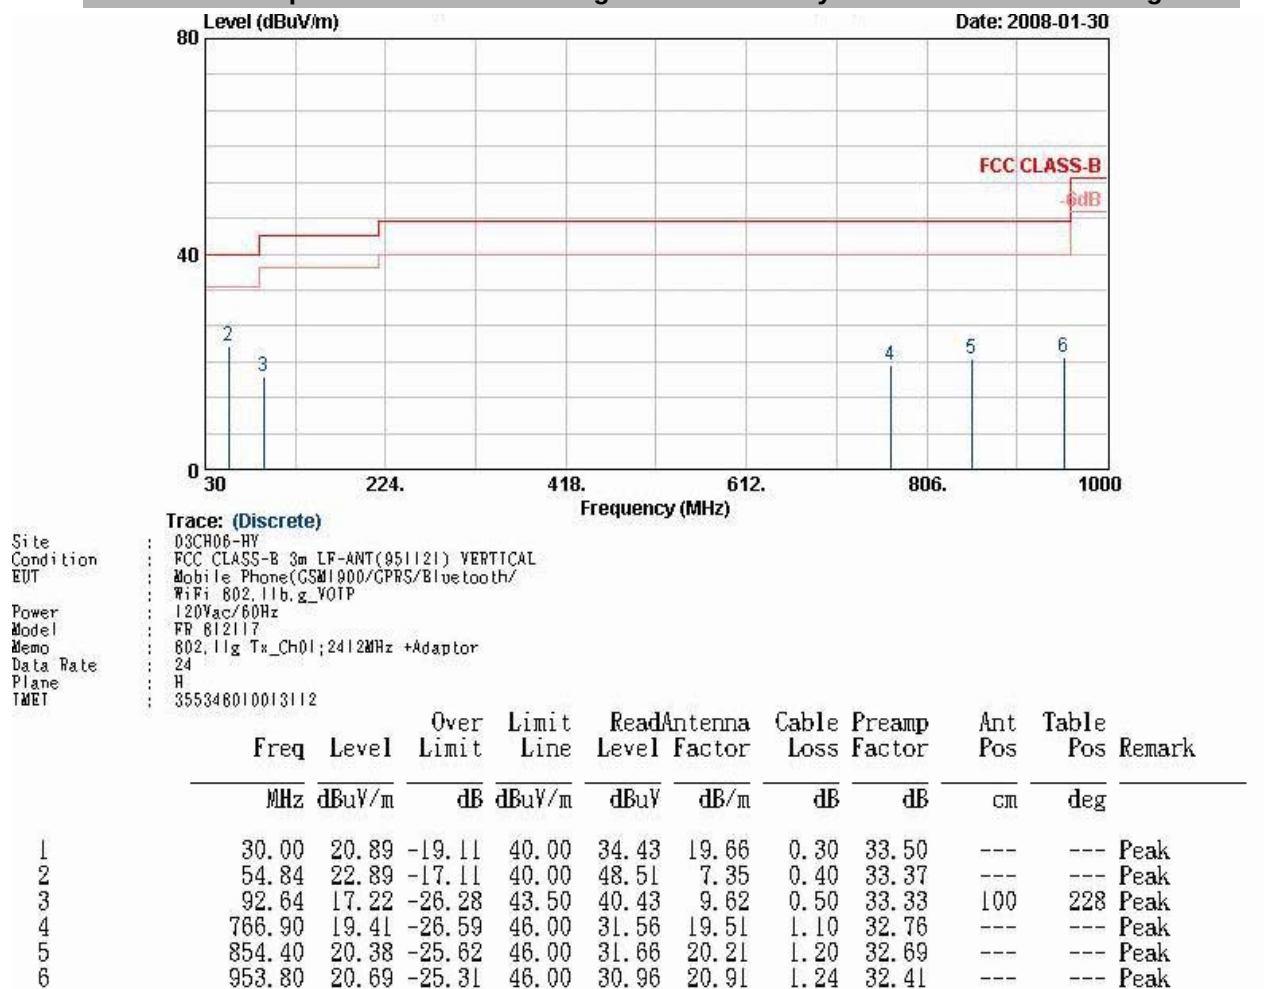

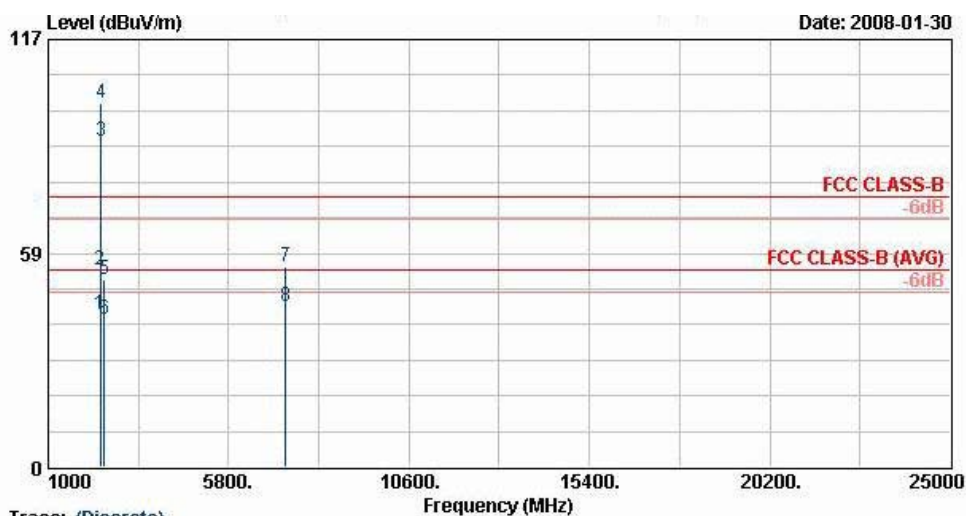

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOTP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch01;2412MHz +Adaptor
 Data Rate : 24
 Plane : H
 TA/ET : 355346010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2390.00	41.55	-12.45	54.00	41.45	31.86	3.92	35.68	106	118 Average
2	2390.00	54.06	-19.94	74.00	53.96	31.86	3.92	35.68	100	0 Peak
3 @	2412.00	89.36			89.21	31.88	3.95	35.68	106	118 Average
4 X	2412.00	99.63			99.48	31.88	3.95	35.68	100	0 Peak
5	2484.00	51.40	-22.60	74.00	51.07	31.98	4.05	35.70	100	0 Peak
6	2484.00	40.66	-13.34	54.00	40.33	31.98	4.05	35.70	106	118 Average
7	7311.00	54.76	-19.24	74.00	48.00	35.68	7.20	36.12	100	0 Peak
8	7311.00	43.78	-10.22	54.00	37.02	35.68	7.20	36.12	100	186 Average

Remark: #3 and #4 Fundamental Signal



- Test Mode : Mode 5
- Polarization : Horizontal


■ The test that passed at minimum margin was marked by the frame in the following table.

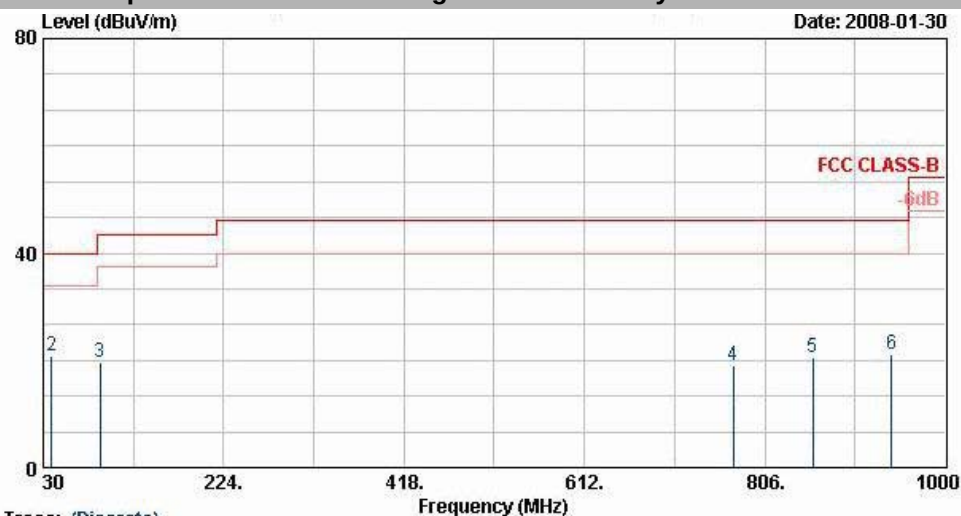

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LP-ANT(951121) HORIZONTAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch06;2437MHz +Adaptor
 Data Rate : 24
 Plane : H
 TMET : 355346010013112

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.00	20.90	-19.10	40.00	34.44	19.66	0.30	33.50	100	265 Peak
2	38.64	20.88	-19.12	40.00	39.77	14.03	0.30	33.22	---	---
3	91.29	19.56	-23.94	43.50	43.13	9.23	0.50	33.30	---	---
4	771.80	19.14	-26.86	46.00	31.19	19.56	1.12	32.73	---	---
5	857.90	20.59	-25.41	46.00	31.86	20.23	1.20	32.70	---	---
6	941.90	21.13	-24.87	46.00	31.60	20.83	1.20	32.50	---	---

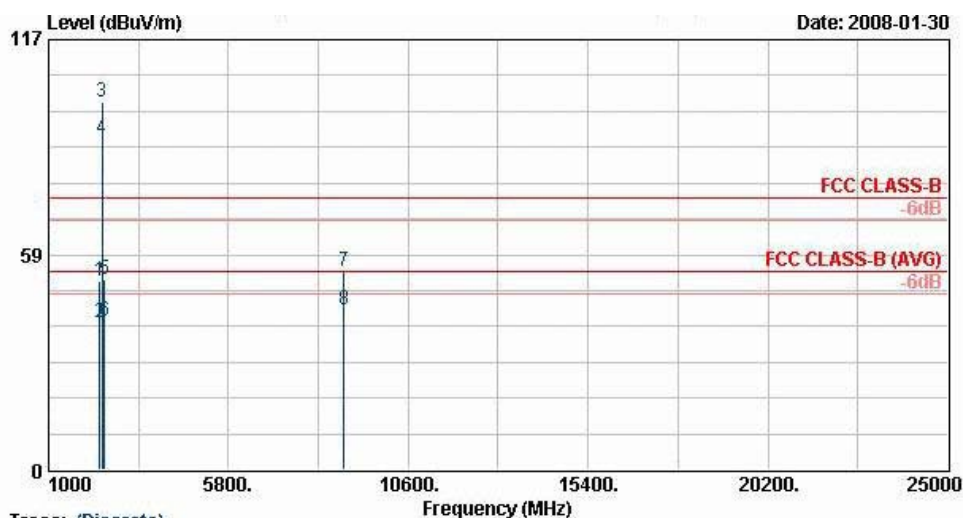

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch06;2437MHz +Adaptor
 Data Rate : 24
 Plane : H
 TMET : 355346010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2368.00	51.11	-22.89	74.00	51.09	31.81	3.89	35.68	100	0 Peak
2	2368.00	40.20	-13.80	54.00	40.18	31.81	3.89	35.68	182	341 Average
3 X	2437.00	100.19			99.96	31.93	3.99	35.69	100	0 Peak
4 @	2437.00	90.20			89.97	31.93	3.99	35.69	182	341 Average
5	2494.00	51.63	-22.37	74.00	51.28	32.00	4.05	35.70	100	0 Peak
6	2494.00	40.48	-13.52	54.00	40.13	32.00	4.05	35.70	182	341 Average
7	8886.00	54.00	-20.00	74.00	46.50	36.34	7.68	36.53	100	0 Peak
8	8886.00	43.50	-10.50	54.00	36.01	36.34	7.68	36.53	100	233 Average

Remark: #3 and #4 Fundamental Signal




- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

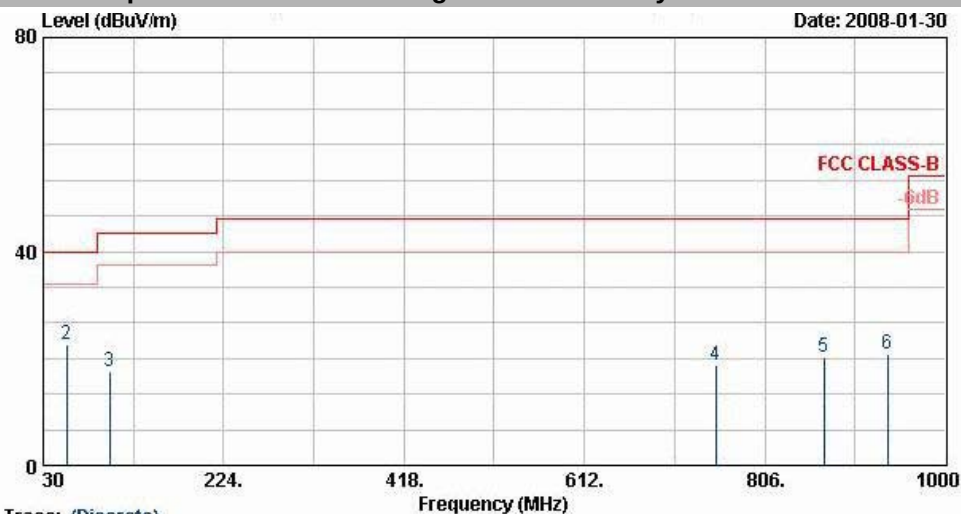

Trace: (Discrete)
 Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(951121) VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : Wi-Fi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch06;2437MHz +Adaptor
 Data Rate : 24
 Plane : H
 TARET : 355346010013112

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	30.00	20.86	-19.14	40.00	34.40	19.66	0.30	33.50	---	Peak
2	54.84	22.62	-17.38	40.00	48.24	7.35	0.40	33.37	100	274 Peak
3	101.28	17.51	-25.99	43.50	39.21	11.07	0.50	33.27	---	Peak
4	752.90	18.74	-27.26	46.00	31.11	19.38	1.10	32.85	---	Peak
5	869.80	20.14	-25.86	46.00	31.25	20.32	1.30	32.73	---	Peak
6	938.40	20.72	-25.28	46.00	31.25	20.80	1.20	32.52	---	Peak

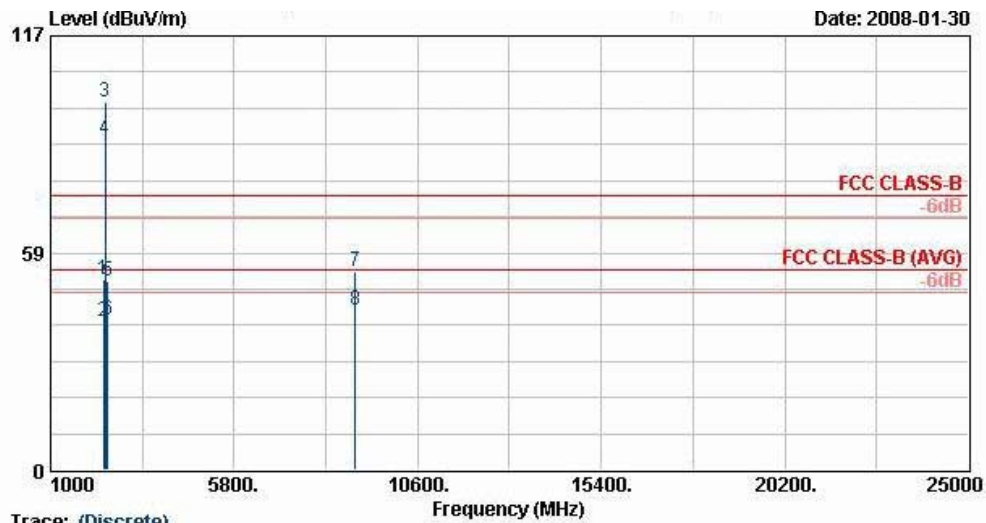

Trace: (Discrete)

Site : 03CH06-HV
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/WiFi 802.11b.g_VOIP)
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch06;2437MHz +Adaptor
 Data Rate : 24
 Plane : H
 IMET : 355348010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2378.00	51.30	-22.70	74.00	51.26	31.83	3.89	35.68	100	0 Peak
2	2378.00	40.18	-13.82	54.00	40.14	31.83	3.89	35.68	165	118 Average
3 X	2437.00	99.17			98.94	31.93	3.99	35.69	100	0 Peak
4 @	2437.00	89.35			89.12	31.93	3.99	35.69	165	118 Average
5	2498.00	50.71	-23.29	74.00	50.36	32.00	4.05	35.70	100	0 Peak
6	2498.00	40.43	-13.57	54.00	40.08	32.00	4.05	35.70	165	118 Average
7	8976.00	53.69	-20.31	74.00	46.05	36.45	7.77	36.59	100	0 Peak
8	8976.00	43.05	-10.95	54.00	35.41	36.45	7.77	36.59	100	87 Average

Remark: #3 and #4 Fundamental Signal



- Test Mode : Mode 6
- Polarization : Horizontal


■ The test that passed at minimum margin was marked by the frame in the following table.

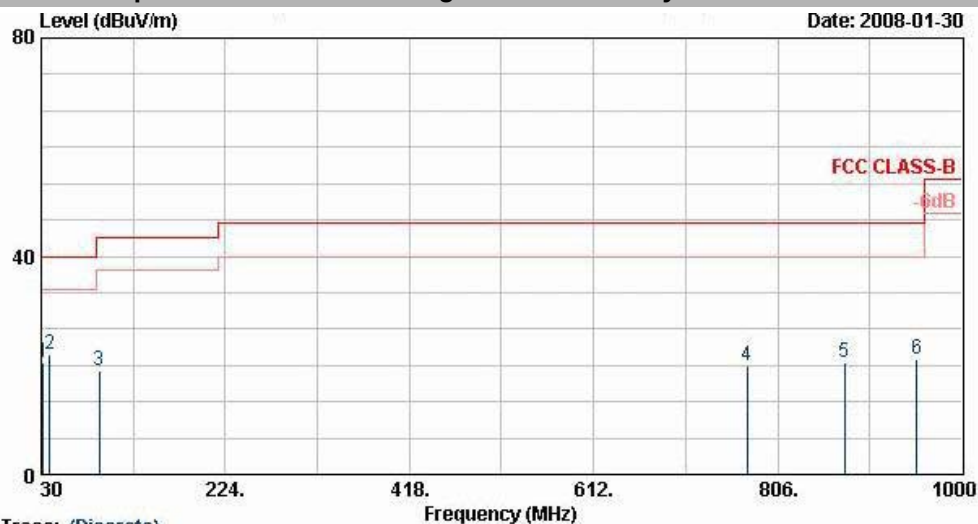

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(851121) HORIZONTAL
 EUT : Mobile Phone(GSM1900/CDMA/Bluetooth/
 : Wi-Fi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch11;2462MHz +Adaptor
 Data Rate : 24
 Plane : H
 T&E1 : 355348010013112

	Freq	Level	Over	Limit	Read		
	MHz	dBuV/m	Limit	Line	Level	Factor	Remark
			dB	dBuV/m	dBuV	dB	
1	32.43	20.53	-19.47	40.00	36.07	-15.54	Peak
2 @	38.64	21.99	-18.01	40.00	40.88	-18.89	Peak
3	91.02	18.94	-24.56	43.50	42.51	-23.57	Peak
4	773.90	19.85	-26.15	46.00	31.85	-12.00	Peak
5	876.80	20.49	-25.51	46.00	31.57	-11.08	Peak
6	952.40	21.13	-24.87	46.00	31.42	-10.29	Peak

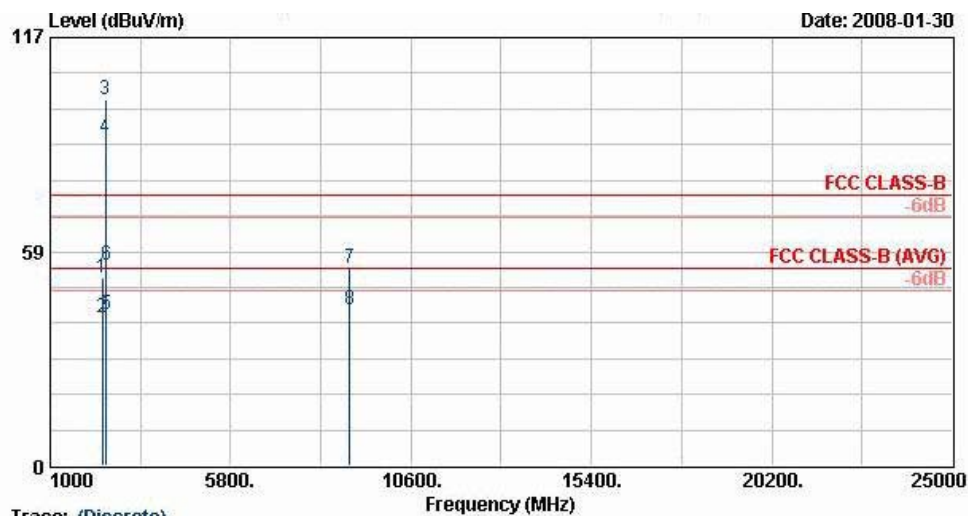

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOTP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch11;2462MHz +Adaptor
 Data Rate : 24
 Plane : H
 TARET : 355346010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2388.00	51.26	-22.74	74.00	51.16	31.86	3.92	35.68	100	0 Peak
2	2388.00	40.64	-13.36	54.00	40.54	31.86	3.92	35.68	180	338 Average
3 X	2462.00	99.84			99.56	31.95	4.02	35.69	100	0 Peak
4 @	2462.00	89.80			89.52	31.95	4.02	35.69	180	338 Average
5	2483.66	41.52	-12.48	54.00	41.19	31.98	4.05	35.70	180	338 Average
6	2483.66	54.97	-19.03	74.00	54.64	31.98	4.05	35.70	100	0 Peak
7	8967.00	54.07	-19.93	74.00	46.42	36.45	7.77	36.57	100	0 Peak
8	8967.00	42.57	-11.43	54.00	34.92	36.45	7.77	36.57	100	116 Average

Remark: #3 and #4 Fundamental Signal




- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

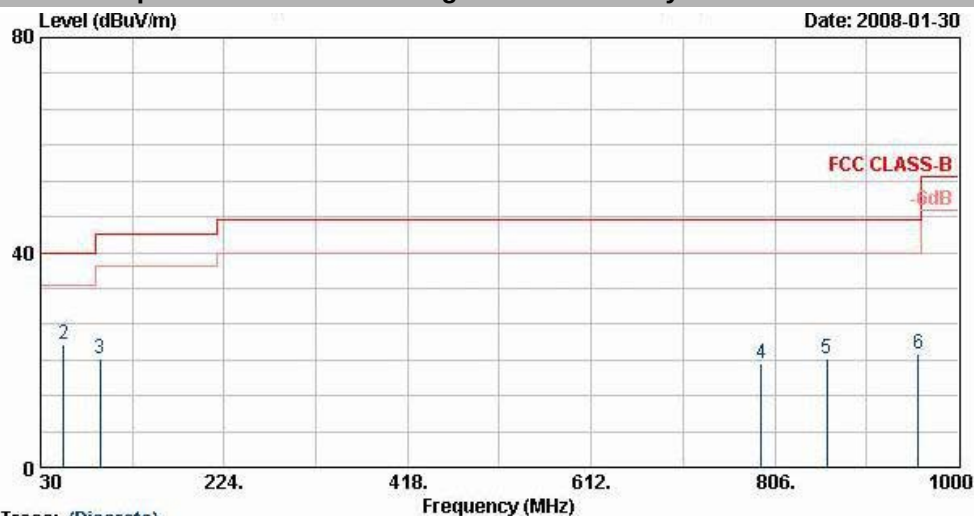

Trace: (Discrete)
 Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(051121) VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 612117
 Memo : 802.11g Tx_Ch11;2462MHz +Adaptor
 Data Rate : 24
 Plane : H
 IMET : 355348010013112

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	21.05	-18.95	40.00	34.59	19.66	0.30	33.50	---	---	Peak
2	54.03	22.89	-17.11	40.00	48.34	7.50	0.38	33.33	100	292	Peak
3	92.64	20.08	-23.42	43.50	43.30	9.62	0.50	33.33	---	---	Peak
4	791.40	19.35	-26.65	46.00	31.02	19.74	1.20	32.61	---	---	Peak
5	861.40	20.33	-25.67	46.00	31.57	20.25	1.21	32.71	---	---	Peak
6	957.30	20.99	-25.01	46.00	31.16	20.94	1.27	32.38	---	---	Peak

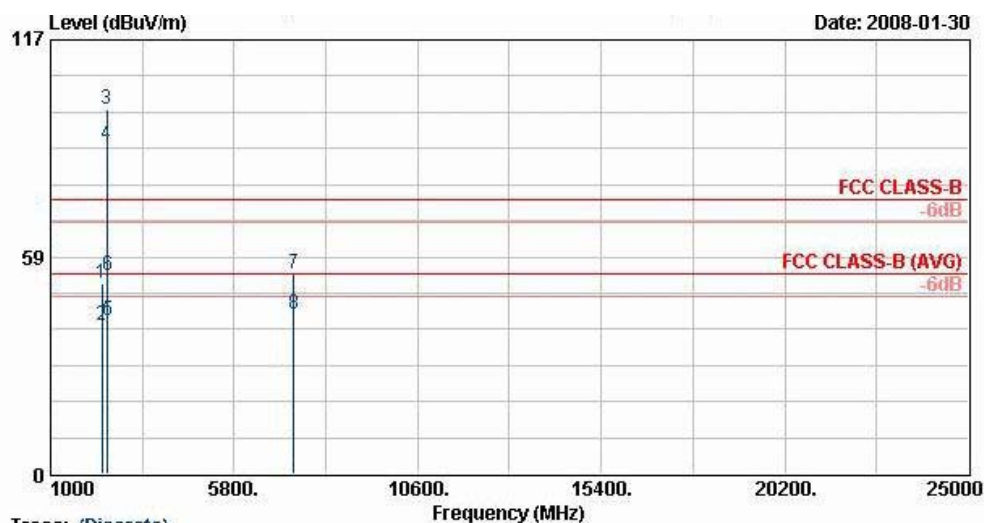

Trace: (Discrete)

Site : 03CH06-HV
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 EUT : Mobile Phone(GSM1900/GPRS/Bluetooth/
 : WiFi 802.11b.g_VOIP
 Power : 120Vac/60Hz
 Model : FR 812117
 Memo : 802.11g Tx_Ch11;2462MHz +Adaptor
 Data Rate : 24
 Plane : H
 IMET : 355348010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2338.00	51.36	-22.64	74.00	51.39	31.78	3.86	35.67	100	0 Peak
2	2338.00	40.14	-13.86	54.00	40.17	31.78	3.86	35.67	159	119 Average
3 X	2462.00	98.49			98.21	31.95	4.02	35.69	100	0 Peak
4 @	2462.00	88.57			88.29	31.95	4.02	35.69	159	119 Average
5	2483.50	41.32	-12.68	54.00	40.99	31.98	4.05	35.70	159	119 Average
6	2483.50	53.62	-20.38	74.00	53.29	31.98	4.05	35.70	100	0 Peak
7	7362.00	53.91	-20.09	74.00	47.18	35.66	7.22	36.14	100	0 Peak
8	7362.00	43.17	-10.83	54.00	36.44	35.66	7.22	36.14	100	264 Average

Remark: #3 and #4 Fundamental Signal



- Test Mode : Mode 7
- Polarization : Horizontal


■ The test that passed at minimum margin was marked by the frame in the following table.

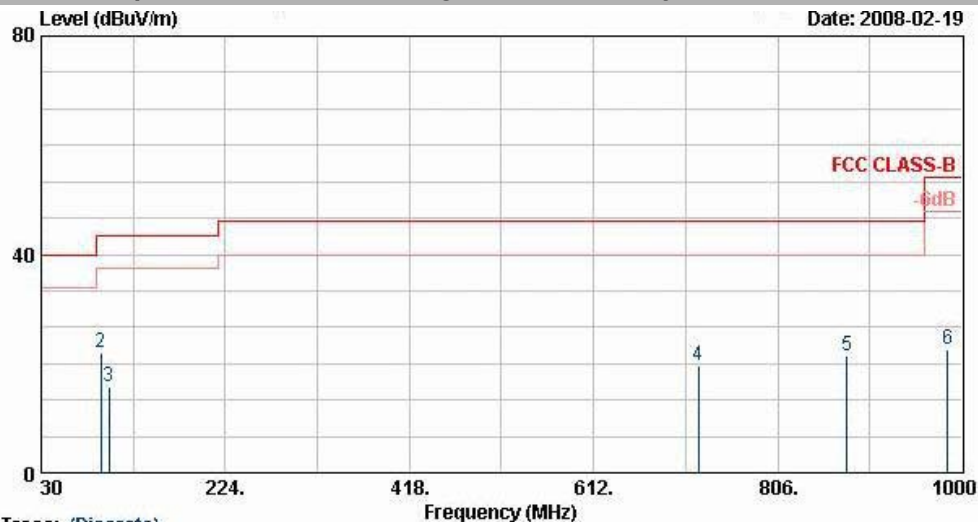

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(951121) HORIZONTAL
 EUT : Mobile Phone
 Power : 120Vac/60Hz
 Model : FR 812802
 Memo : BT Tx_Ch78;2480 + 11b Tx_Ch11; 2462MHz
 + Adaptor
 Data Rate : BT:DH5 WLAN:2
 Plane : H
 T&ET : 355348010013112

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	21.41	-18.59	40.00	34.95	19.66	0.30	33.50	100	126	Peak
2	92.64	21.88	-21.62	43.50	45.10	9.62	0.50	33.33	---	---	Peak
3	101.28	15.81	-27.69	43.50	37.51	11.07	0.50	33.27	---	---	Peak
4	722.80	19.70	-26.30	46.00	32.46	19.10	1.17	33.03	---	---	Peak
5	878.90	21.48	-24.52	46.00	32.55	20.38	1.30	32.75	---	---	Peak
6	985.30	22.71	-31.29	54.00	32.45	21.14	1.30	32.18	---	---	Peak

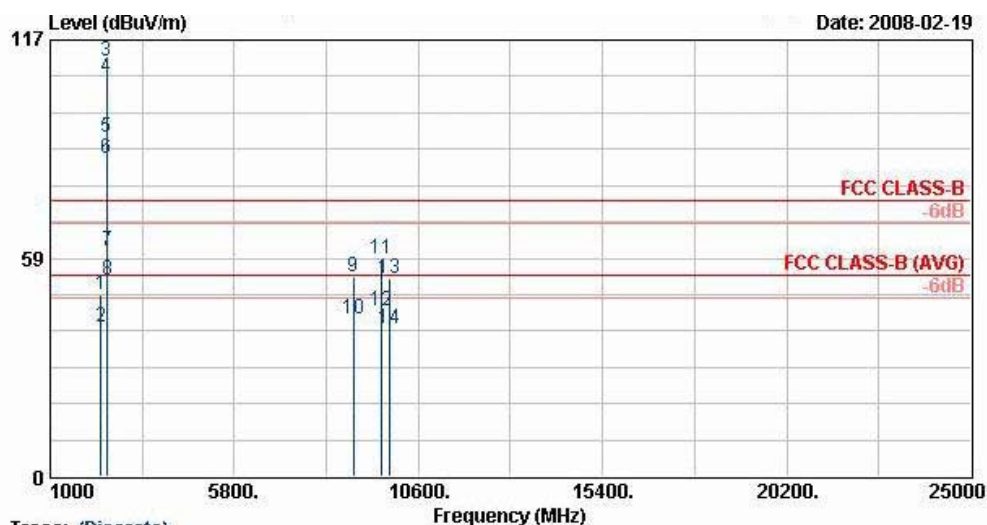

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
 EUT : Mobile Phone
 Power : 120Vac/60Hz
 Model : FR 812802
 Memo : BT Tx_Ch78;2480 + 11b Tx_Ch11; 2462MHz
 : + Adaptor
 Data Rate : BT;DH5 WLAN;2
 Plane : H
 TMEI : 355348010013112


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2318.00	48.73	-25.27	74.00	48.82	31.76	3.82	35.67	100	0 Peak
2	2318.00	39.85	-14.15	54.00	39.93	31.76	3.82	35.67	100	355 Average
3 X	2462.00	111.46			111.18	31.95	4.02	35.69	100	0 Peak
4 @	2462.00	107.11			106.83	31.95	4.02	35.69	100	355 Average
5 X	2480.00	90.85			90.52	31.98	4.05	35.70	100	0 Peak
6 X	2480.00	85.26			84.93	31.98	4.05	35.70	100	344 Average
7	2483.47	60.54	-13.46	74.00	60.21	31.98	4.05	35.70	100	0 Peak
8 !	2483.47	52.74	-1.26	54.00	52.41	31.98	4.05	35.70	100	344 Average
9	8907.00	53.38	-20.62	74.00	45.88	36.36	7.68	36.54	100	0 Peak
10	8907.00	42.12	-11.88	54.00	34.62	36.36	7.68	36.54	100	153 Average
11	9642.00	58.22	-15.78	74.00	97.10	-10.09	7.94	36.73	100	0 Peak
12	9642.00	44.56	-9.44	54.00	83.44	-10.09	7.94	36.73	100	246 Average
13	9846.00	52.94	-21.06	74.00	91.30	-9.63	8.04	36.77	100	0 Peak
14	9846.00	39.62	-14.38	54.00	77.98	-9.63	8.04	36.77	100	116 Average

Remark: #3, #4, #5, and #6 Fundamental Signal



- Polarization : Vertical


■ The test that passed at minimum margin was marked by the frame in the following table.

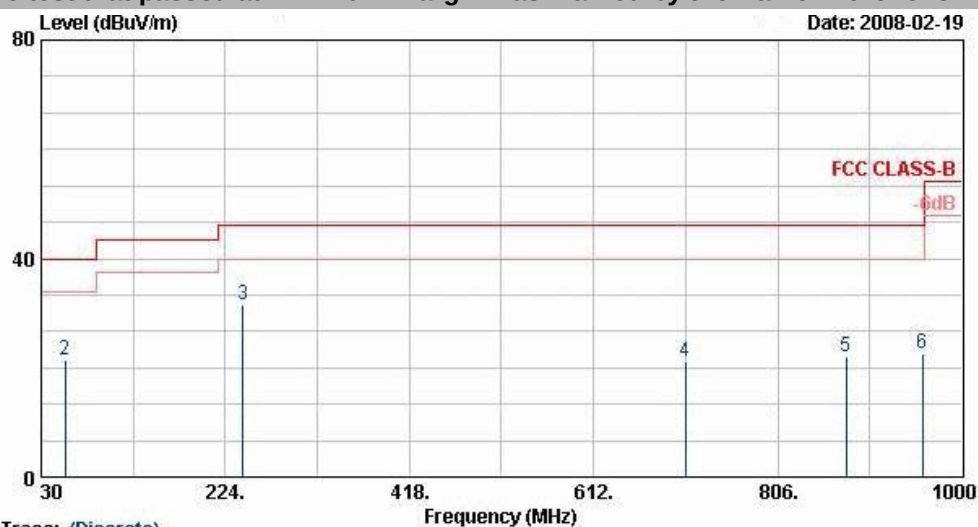

Trace: (Discrete)

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m LF-ANT(051121) VERTICAL
 EUT : Mobile Phone
 Power : 120Vac/60Hz
 Model : FR 812802
 Memo : BT Tx_Ch78;2480 + 11b Tx_Ch11; 2462MHz
 + Adaptor
 Data Rate : BT;DH5 WLAN:2
 Plane : H
 T&ET : 355348010013112

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	30.00	21.18	-18.82	40.00	34.72	19.66	0.30	33.50	---	Peak
2	55.38	21.33	-18.67	40.00	46.95	7.35	0.40	33.37	---	Peak
3	242.49	31.39	-14.61	46.00	52.33	11.81	0.70	33.45	100	326 Peak
4	708.80	21.03	-24.97	46.00	33.98	18.97	1.19	33.12	---	Peak
5	878.20	21.90	-24.10	46.00	32.97	20.37	1.30	32.75	---	Peak
6	958.70	22.60	-23.40	46.00	32.75	20.94	1.28	32.37	---	Peak

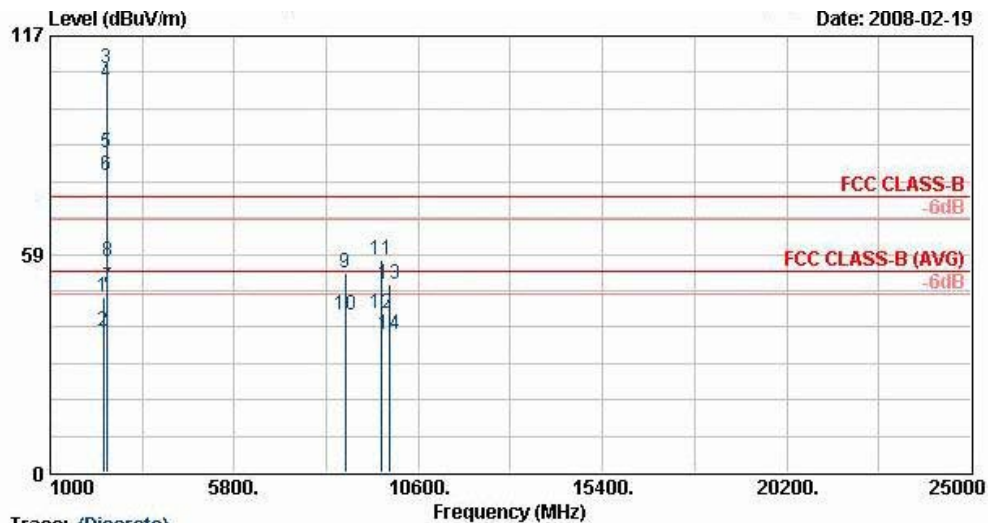

Trace: (Discrete)

Site : D3CH06-HY
 Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
 EUT : Mobile Phone
 Power : 120Vac/60Hz
 Model : FR 812802
 Memo : BT Tx_Ch78;2480 + 11b Tx_Ch11; 2462MHz
 : + Adaptor
 Data Rate : BT;DH5 WLAN;2
 Plane : H
 TMEI : 355348010013112

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2380.00	47.16	-26.84	74.00	47.09	31.83	3.92	35.68	100	0 Peak
2	2380.00	37.94	-16.06	54.00	37.86	31.83	3.92	35.68	160	124 Average
3 X	2462.00	108.31			108.03	31.95	4.02	35.69	100	0 Peak
4 @	2462.00	104.24			103.96	31.95	4.02	35.69	160	124 Average
5 X	2480.00	85.71			85.38	31.98	4.05	35.70	100	0 Peak
6 X	2480.00	79.69			79.36	31.98	4.05	35.70	100	126 Average
7 !	2483.47	49.65	-4.35	54.00	49.32	31.98	4.05	35.70	160	124 Average
8	2483.47	56.73	-17.27	74.00	56.40	31.98	4.05	35.70	100	0 Peak
9	8697.00	53.65	-20.35	74.00	46.54	36.08	7.45	36.42	100	0 Peak
10	8697.00	42.24	-11.76	54.00	35.13	36.08	7.45	36.42	100	265 Average
11	9642.00	56.79	-17.21	74.00	95.67	-10.09	7.94	36.73	100	0 Peak
12	9642.00	42.59	-11.41	54.00	81.47	-10.09	7.94	36.73	100	114 Average
13	9846.00	50.31	-23.69	74.00	88.68	-9.63	8.04	36.77	100	0 Peak
14	9846.00	36.91	-17.09	54.00	75.27	-9.63	8.04	36.77	100	297 Average

Remark: #3, #4, #5, and #6 Fundamental Signal



5.8 Antenna Requirements

5.8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

5.8.2 Antenna Connected Construction

The antennas used in this product are PIFA antenna for WLAN without connector. It is considered to meet antenna requirement of FCC.

5.8.3 Antenna Gain

The antenna gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



6. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Jul. 14, 2007	Jul. 13, 2008	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Mar. 29, 2007	Mar. 28, 2008	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Mar. 30, 2007	Mar. 29, 2008	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 03, 2007	Dec. 02, 2008	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	N/A	Conduction (CO01-HY)
Impedance Stabilization Network	SCHAFFNER	T400	21653	150kHz – 230MHz	Mar. 28, 2007	Mar. 27, 2008	Conduction (CO01-HY)
Impedance Stabilization Network	SCHAFFNER	T400	23342	150kHz – 230MHz	Mar. 05, 2007	Mar. 04, 2008	Conduction (CO01-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211028	9KHz-26.5GHz	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 26, 2007	Jul. 25, 2008	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Dec. 01, 2007	Nov. 30, 2008	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Com-Power	AH118	071025	1G~18G	Jun. 04, 2007	Jun. 03, 2008	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-251	14G - 40G	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G - 26.5G	Nov. 22, 2007	Nov. 21, 2008	Radiation (03CH06-HY)
PreAmplifier	EMEC	PA303	PA303-SMA-0	100K~3GHz	Nov. 26, 2007	Nov. 25, 2008	Radiation (03CH06-HY)
Base Station Simulator	R & S	CMU200	103937	Third-Band	Oct. 19, 2007	Oct. 18, 2008	Radiation (03CH06-HY)

7. Uncertainty Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
Combined standard uncertainty Uc(y)	1.13		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.26		

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.11	Normal(k=2)	0.06
Antenna factor calibration	0.91	Normal(k=2)	0.46
Cable loss calibration	0.12	Normal(k=2)	0.06
Pre Amplifier Gain calibration	0.15	Normal(k=2)	0.08
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.52	Rectangular	0.88
Mismatch	+0.45/-0.48	U-shaped	0.33
Combined standard uncertainty Uc(y)	1.30		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.60		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				

The measured result is : $y \text{ dBuV} \pm U \text{ dB}$
for a level of confidence of approximately 95%, ($k = 2$)