



FCC PART 74, SUBPART H  
ISED C RSS-210, ISSUE 9  
TEST AND MEASUREMENT REPORT

For

**Lectrosonics, Inc.**

581 Laser Road NE, Rio Rancho, NM 87124, USA

**FCC ID: DBZDBUL**  
**IC: 8024A-DBUL**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Digital Wireless Microphone Transmitter
Christian McCaig	
<b>Prepared By:</b> Test Engineer	
<b>Report Number:</b> R1908131-74	
<b>Report Date:</b> 2019-10-17	
Frank Wang	
<b>Reviewed By:</b> RF Lead	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Ave., Sunnyvale, CA 94089, USA Tel: (408) 732-9162, Fax: (408) 732 9164	



**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
1.2	MECHANICAL DESCRIPTION OF EUT .....	5
1.3	OBJECTIVE .....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY .....	5
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY REGISTRATIONS .....	6
1.8	TEST FACILITY ACCREDITATIONS.....	6
<b>2</b>	<b>EUT TEST CONFIGURATION.....</b>	<b>9</b>
2.1	JUSTIFICATION .....	9
2.2	EUT EXERCISE SOFTWARE.....	9
2.3	DUTY CYCLE CORRECTION FACTOR .....	9
2.4	SPECIAL EQUIPMENT .....	9
2.5	EQUIPMENT MODIFICATIONS .....	10
2.6	LOCAL SUPPORT EQUIPMENT.....	10
2.7	INTERFACE PORTS AND CABLES .....	10
<b>3</b>	<b>SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>4</b>	<b>FCC §2.1093 &amp; ISEDC RSS-102 - RF EXPOSURE .....</b>	<b>12</b>
<b>5</b>	<b>ISEDC RSS-GEN §6.8 - ANTENNA REQUIREMENTS.....</b>	<b>13</b>
5.1	APPLICABLE STANDARDS .....	13
5.2	ANTENNA DESCRIPTION .....	13
<b>6</b>	<b>FCC §74.861(E) (1) &amp; ISEDC RSS-210 ANNEX G §G.3.1- RF OUTPUT POWER .....</b>	<b>14</b>
6.1	APPLICABLE STANDARDS .....	14
6.2	TEST PROCEDURE .....	14
6.3	TEST EQUIPMENT LIST AND DETAILS .....	15
6.4	TEST ENVIRONMENTAL CONDITIONS.....	15
6.5	TEST RESULTS .....	16
<b>7</b>	<b>FCC §74.861(E)(5)(7) &amp; ISEDC RSS-210 ANNEX G §G.3.2, G.3.4 -OCCUPIED BANDWIDTH &amp; EMISSION MASK.....</b>	<b>17</b>
7.1	APPLICABLE STANDARDS .....	17
7.2	TEST PROCEDURE .....	18
7.3	TEST EQUIPMENT LIST AND DETAILS .....	18
7.4	TEST ENVIRONMENTAL CONDITIONS.....	18
7.5	TEST RESULTS .....	18
<b>8</b>	<b>FCC §74.861(E)(7) &amp; ISEDC RSS-210 ANNEX G §G.3.4-CONDUCTED SPURIOUS EMISSIONS AT ANTENNA PORT .....</b>	<b>22</b>
8.1	APPLICABLE STANDARDS .....	22
8.2	TEST PROCEDURE .....	22
8.3	TEST EQUIPMENT LIST AND DETAILS .....	22
8.4	TEST ENVIRONMENTAL CONDITIONS.....	23
8.5	TEST RESULTS .....	23
<b>9</b>	<b>FCC §74.861(E)(7) &amp; ISEDC RSS-210 ANNEX G§G.3.4-FIELD STRENGTH OF SPURIOUS RADIATION 26</b>	
9.1	APPLICABLE STANDARDS .....	26
9.2	TEST PROCEDURE .....	26
9.3	TEST EQUIPMENT LIST AND DETAILS .....	27
9.4	TEST ENVIRONMENTAL CONDITIONS.....	27
9.5	TEST RESULTS .....	27

**10 FCC §74.861(E)(4) & ISEDC RSS-210 ANNEX G §G.3.3- FREQUENCY STABILITY .....29**

- 10.1 APPLICABLE STANDARDS ..... 29
- 10.2 TEST PROCEDURE ..... 29
- 10.3 TEST EQUIPMENT LIST AND DETAILS ..... 30
- 10.4 TEST ENVIRONMENTAL CONDITIONS ..... 30
- 10.5 TEST RESULTS ..... 31

**11 APPENDIX A - EUT TEST SETUP PHOTOGRAPHS.....32**

**12 APPENDIX B - EUT EXTERNAL PHOTOGRAPHS .....32**

**13 APPENDIX C - EUT INTERNAL PHOTOGRAPHS.....32**

**14 APPENDIX D (INFORMATIVE)- A2LA ELECTRICAL TESTING CERTIFICATE .....33**

**DOCUMENT REVISION HISTORY**

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
0	R1908131-74	Original Report	2019-10-17

## 1 General Description

---

### 1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report has been compiled on behalf of *Lectrosonics, Inc.* and their product model: *DBu-LEMO*, FCC ID: *DBZDBUL*, IC: *8024A-DBUL*, which henceforth is referred to as the EUT (Equipment Under Test). The EUT is a Digital wireless microphone transmitter. The EUT operates in the frequency range: 470.1-607.95 MHz.

### 1.2 Mechanical Description of EUT

The UUT measures approximately 8.6 cm (L) x 6.2 cm (W) x 1.9 cm (H) and weighs approximately 0.177 kg.

### 1.3 Objective

The following type approved report is prepared on behalf of *Lectrosonics, Inc.* in accordance with Part 74, Subparts H of the Federal Communications Commission rules.

The objective is to determine compliance with Part 74 of the FCC Rules, limits for RF output power, Modulation characteristics, Emission bandwidth, Field strength of spurious radiation and Frequency stability for license-exempt, low-power radio apparatus operating in the television bands.

### 1.4 Related Submittal(s)/Grant(s)

N/A

### 1.5 Test Methodology

All measurements contained in this report were conducted in accordance with FCC KDB 971168 D01 Power Meas License Digital Systems v03r01, and EN 300 422-1 v1.4.2 Electromagnetic compatibility and Radio Spectrum Matters; Wireless microphones in the 25MHz to 3GHz frequency range.

All tests were performed at Bay Area Compliance Laboratories Corp.

## 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2011, The Treatment of Uncertainty in EMC Measurements, the values ranging from  $\pm 2.0$  dB for Conducted Emissions tests and  $\pm 4.0$  dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

## 1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

## 1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

**A- An independent, 3<sup>rd</sup>-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02)**, in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (\*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

**B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body**

-- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1- All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2- All Scope 2-Licensed Personal Mobile Radio Services;
- 3- All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4- All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5- All Scope 5-Licensed Fixed Microwave Radio Services
- 6- All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
  - All Scope A1 - Terminal Equipment for the Purpose of Calls;
  - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
  - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
  - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
  - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

**C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:**

- 1 Electronics and Office Equipment:
  - for Telephony (ver. 3.0)
  - for Audio/Video (ver. 3.0)
  - for Battery Charging Systems (ver. 1.1)
  - for Set-top Boxes & Cable Boxes (ver. 4.1)
  - for Televisions (ver. 6.1)
  - for Computers (ver. 6.0)
  - for Displays (ver. 6.0)
  - for Imaging Equipment (ver. 2.0)
  - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
  - for Commercial Dishwashers (ver. 2.0)
  - for Commercial Ice Machines (ver. 2.0)
  - for Commercial Ovens (ver. 2.1)
  - for Commercial Refrigerators and Freezers
- 3 Lighting Products
  - For Decorative Light Strings (ver. 1.5)
  - For Luminaires (including sub-components) and Lamps (ver. 1.2)
  - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
  - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products

- for Residential Ceiling Fans (ver. 3.0)
- for Residential Ventilating Fans (ver. 3.2)
- 5 Other
  - For Water Coolers (ver. 3.0)

***D. A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:***

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - IC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
  - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
  - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
  - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA)  
APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter
- USA:
  - o ENERGY STAR Recognized Test Laboratory – US EPA
  - o Telecommunications Certification Body (TCB) – US FCC;
  - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;



## 2 EUT Test Configuration

### 2.1 Justification

The EUT was configured for testing according to KDB 971168 D01 v03r01.

### 2.2 EUT Exercise Software

None

### 2.3 Duty Cycle Correction Factor


Frequency (MHz)	Total On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
539.025	100	100	100	0.00

Duty Cycle = On Time (ms)/ Period (ms)

Duty Cycle Correction Factor (dB) =  $10 \cdot \log(1/\text{Duty Cycle})$

Please refer to the following plots.

Duty Cycle

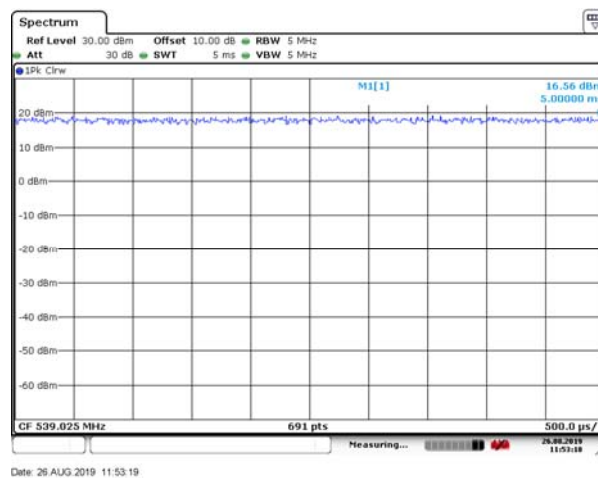

### 2.4 Special Equipment

There were no special accessories were required, included, or intended for use with EUT during these tests.

## **2.5 Equipment Modifications**

N/A

## **2.6 Local Support Equipment**

None

## **2.7 Interface Ports and Cables**

None

### 3 Summary of Test Results

FCC & ISED Rules	Descriptions of Test	Result (s)
FCC §2.1093 ISED RSS-102	RF exposure	Compliant <sup>1</sup>
FCC §74.861(e)(1) ISED RSS-102 G3.1	RF output power	Compliant
ISED RSS-Gen §6.8	Transmit Antenna	Compliant
FCC §74.861(e)(3) ISED RSS-210 G.3.5	Modulation characteristics	Not applicable <sup>2</sup>
FCC §74.861(e)(5)(7), ISED RSS-210 G.3.2 & G.3.4	Operating bandwidth & Emission mask	Compliant
FCC §74.861(e) (7) ISED RSS-210 Annex G §G.3.4	Spurious emissions at the antenna port	Compliant
FCC §74.861(e) (7) ISED RSS-210 Annex G §G.3.4	Field strength of spurious emissions	Compliant
FCC §74.861 (e) (4) ISED RSS-210 Annex G §G.3.3	Frequency Tolerance	Compliant

Note 1: Please refer to report R1908131-SAR

Note 2: Not applicable: The EUT only supports digital modulation (8PSK).

## **4 FCC §2.1093 & ISEDC RSS-102 - RF Exposure**

---

Please refer to report R1908131-SAR for results.

## 5 ISEDC RSS-Gen §6.8 - Antenna Requirements

### 5.1 Applicable Standards

According to ISEDC RSS-Gen §6.8: Transmit Antenna

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

### 5.2 Antenna Description

Two antennas are included with the transmitter, and are shipped from the factory pre-cut and fully assembled. Each antenna covers three blocks. The chart below is the frequency ranges for each antenna. The maximum gain of both antennas is 2.15 dBi.

Frequency Block	Frequency Range (MHz)	Cap Color	Antenna	Gain (dBi)
19	470.100-537.500	Black	AMM19	2.15
22	537.600-607.950	Red	AMM22	2.15

## 6 FCC §74.861(e) (1) & ISEDC RSS-210 Annex G §G.3.1- RF Output Power

### 6.1 Applicable Standards

According to FCC §74.861 (e) (1): the power may not exceed the following values:

- (i) 54-72, 76-88, and 174-216 MHz bands—50 mW EIRP
- (ii) 470-608 and 614-698 MHz bands—250 mW Conducted power
- (iii) 600 MHz duplex gap: 20 mW EIRP

According to ISDEC RSS-210 Annex G §G.3.1:

**Table G1 — Specification for Low-Power Radio Apparatus**

Frequency Bands (MHz)	Transmit e.i.r.p. (mW)	Authorized Bandwidth (kHz)	Frequency Stability (ppm)
54-72 76-88 174-216	50	200	± 50
470-608 614-698 <sup>Note</sup>	250	200	± 50

### 6.2 Test Procedure

KDB 971168 D01 v03r01

### 6.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
ETS-LINDGREN	Power Sensor	7002-006	160097	2018-12-31	2 years
-	RF Cable	-	-	Each time <sup>1</sup>	N/A
-	10dB Attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: equipment included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

### 6.4 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	45 %
ATM Pressure:	101.2 kPa

The testing was performed by Christian McCaig on 2019-08-26 at RF site.

## 6.5 Test Results

### FCC:

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limits (dBm)	Rated Power (mW/dBm)
Low	470.100	16.76	24	50/17
		13.80	24	25/14
Middle	539.025	16.80	24	50/17
		13.78	24	25/14
High	607.950	16.34	24	50/17
		13.48	24	25/14

### ISED:

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max Antenna Gain (dBi)	EIRP (dBm)	Limits (dBm)
Low	470.100	16.76	2.15	18.91	24
		13.80	2.15	15.95	24
Middle	539.025	16.80	2.15	18.95	24
		13.78	2.15	15.93	24
High	607.950	16.34	2.15	18.49	24
		13.48	2.15	15.63	24



## 7 FCC §74.861(e)(5)(7) & ISEDC RSS-210 Annex G §G.3.2, G.3.4 -Occupied Bandwidth & Emission Mask

### 7.1 Applicable Standards

According to FCC §74.861 (e) (5) (7):

The operating bandwidth shall not exceed 200 kHz.

Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08).

According to ISEDC RSS-210 Annex G §G.3.2:

The occupied bandwidth for low-power radio apparatus shall not exceed the authorized bandwidth specified in Table G1.

**Table G1 — Specification for Low-Power Radio Apparatus**

Frequency Bands (MHz)	Transmit e.i.r.p. (mW)	Authorized Bandwidth (kHz)	Frequency Stability (ppm)
54-72 76-88 174-216	50	200	± 50
470-608 614-698 <sup>Note</sup>	250	200	± 50

As per ISED RSS-210 Issue 9, G.3.4:

The transmitter unwanted emissions shall meet the requirements in sections 8.3 and 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08), *Electromagnetic compatibility and radio spectrum matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement*

## 7.2 Test Procedure

The OBW is according to KDB 971168 D01 v03r01

The Emission mask is according to sections 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08).

## 7.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Rohde & Schwarz	Spectrum Analyzer	FSV40	1321.3008K3 9-101203-UW	2019-08-06	1 year
-	10dB Attenuator	-	-	Each time <sup>1</sup>	N/A
-	RF Cable	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: equipment included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

## 7.4 Test Environmental Conditions

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	45 %
<b>ATM Pressure:</b>	101.2 kPa

The testing was performed by Christian McCaig on 2019-08-26 at RF site.


## 7.5 Test Results

Center Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result	Power Setting
539.025	149.93	200	Pass	High (50 mW)
539.025	149.35	200	Pass	Low (25 mW)

Please refer to the following plots for detailed test results


(50 mW power setting)

### Occupied Bandwidth

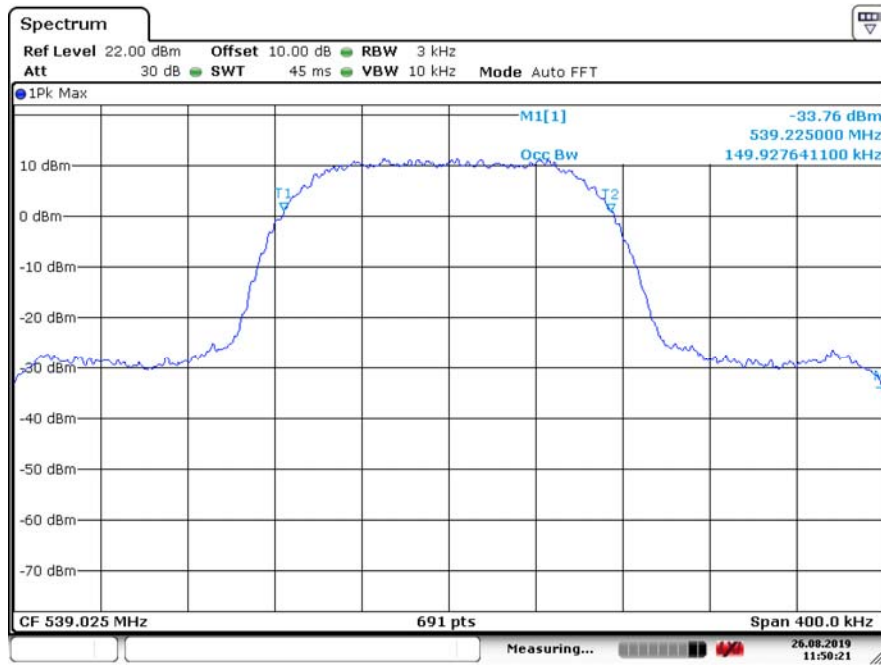


Date: 26 AUG.2019 11:50:22

### Emission Mask Reference Level

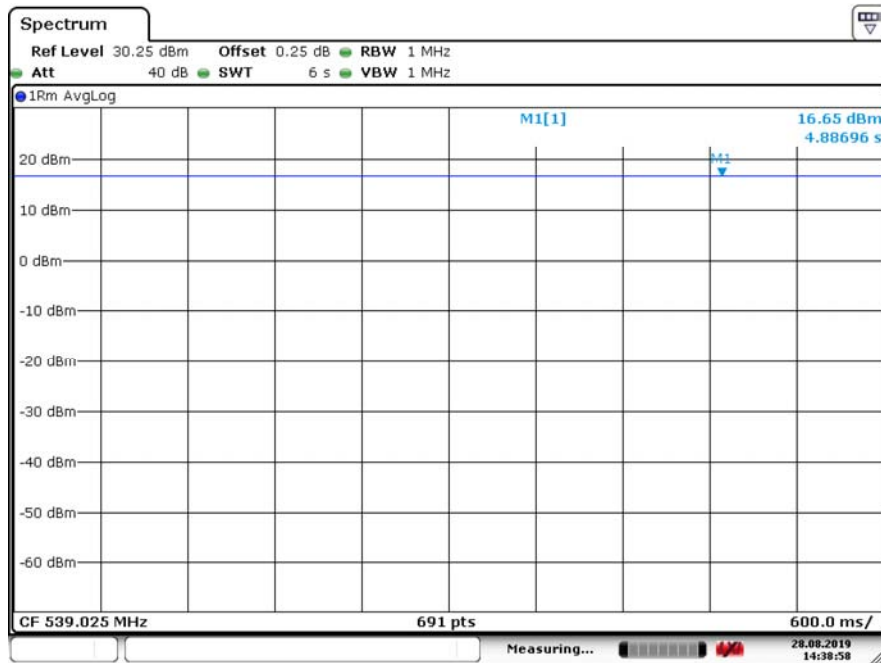

Date: 28.AUG.2019 14:38:58


### Emission Mask

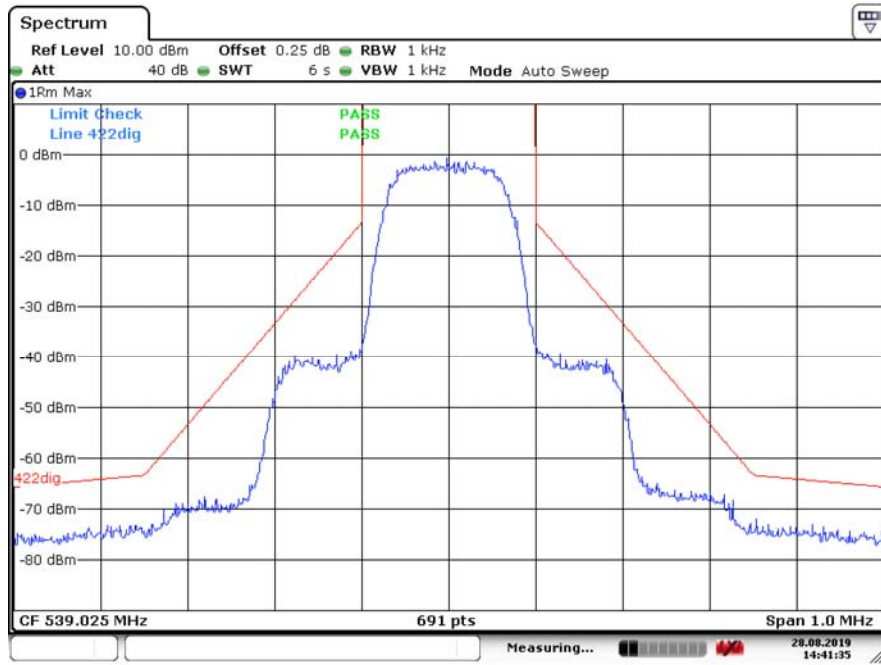

Date: 28.AUG.2019 14:41:35


(25 mW power setting)

### Occupied Bandwidth

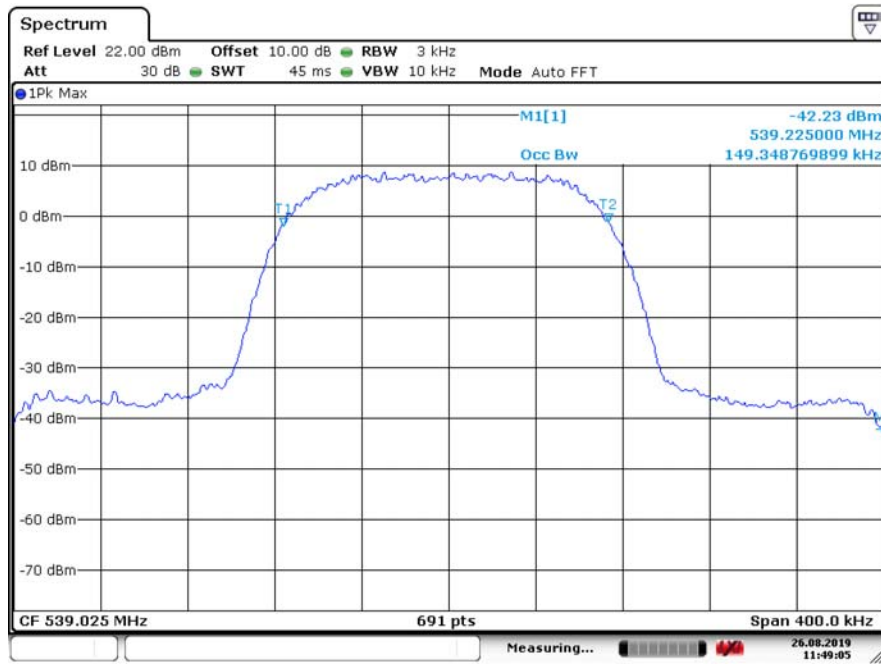


Date: 26.AUG.2019 11:49:05

### Emission Mask Reference Level

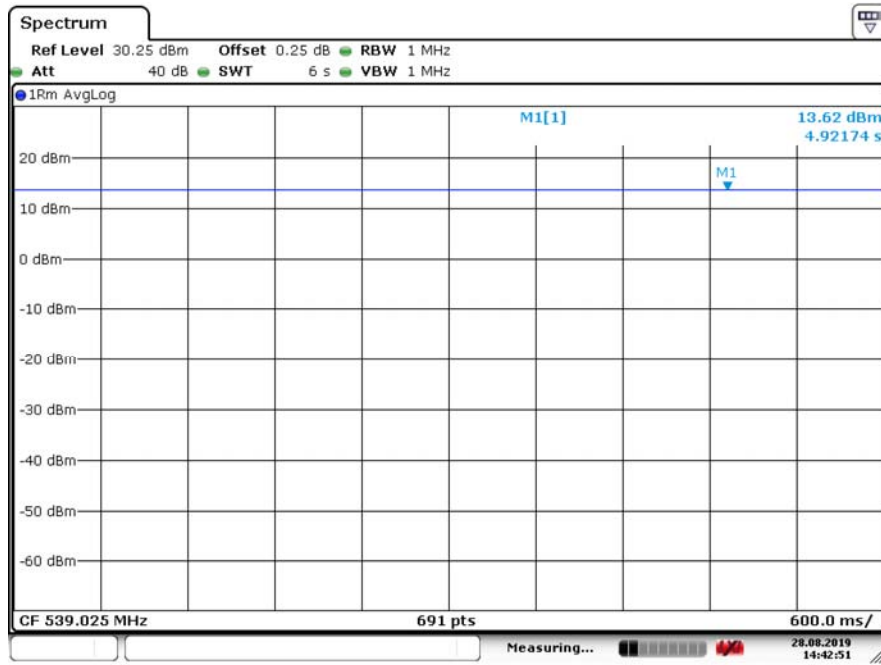

Date: 28.AUG.2019 14:42:51

### Emission Mask

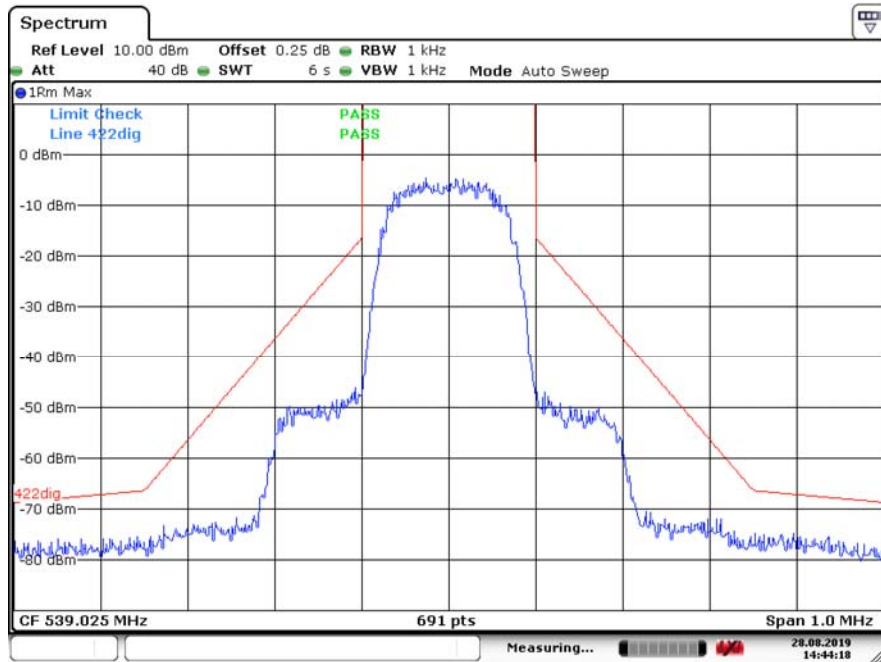

Date: 28.AUG.2019 14:44:19

## 8 FCC §74.861(e)(7) & ISEDC RSS-210 Annex G §G.3.4-Conducted Spurious Emissions at Antenna Port

### 8.1 Applicable Standards

According to FCC §74.861 (e) (7):

Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

According to ISEDC RSS-210 Annex G §G.3.4:

The transmitter unwanted emissions shall meet the requirements in sections 8.3 and 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08), *Electromagnetic compatibility and radio spectrum matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement*

### 8.2 Test Procedure

KDB 971168 D01 v03r01 and ETSI EN 300 422-1 V1.4.2 (2011-08).

### 8.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Rohde & Schwarz	Spectrum Analyzer	FSV40	1321.3008K3 9-101203-UW	2019-08-06	1 year
-	RF Cable	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

## 8.4 Test Environmental Conditions

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	45 %
<b>ATM Pressure:</b>	101.2 kPa


*The testing was performed by Christian McCaig on 2019-08-26 at RF site.*

## 8.5 Test Results

Please refer to the following table plots for detailed test results, testing was done at the highest power setting and limits from ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and radio spectrum matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement were used for worst case limits.

539.025 MHz:


30 MHz to 1 GHz

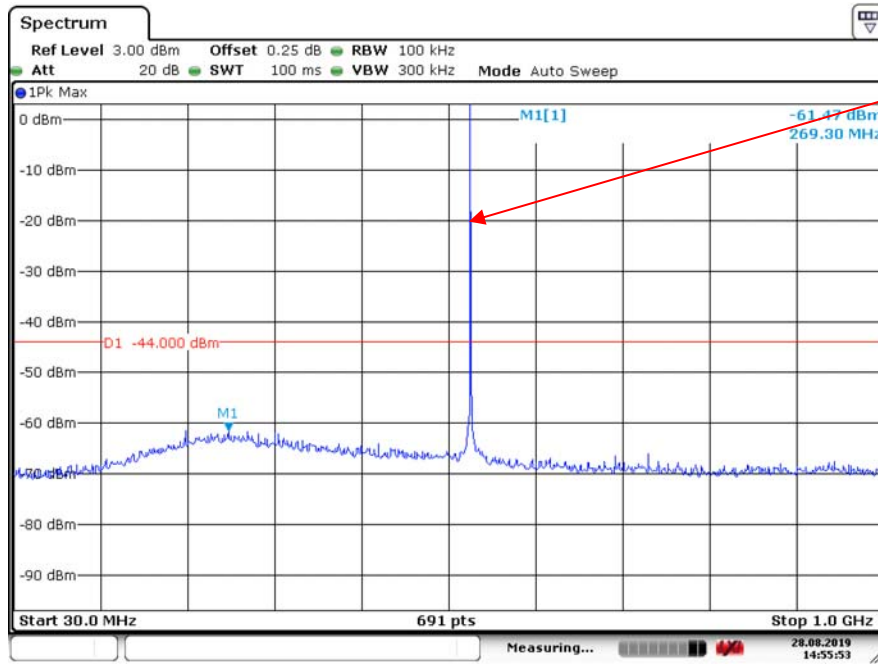

Date: 28.AUG.2019 14:55:54

Note: The worst limit is -54 dBm. The emission is still within the limit.

1 GHz to 26 GHz

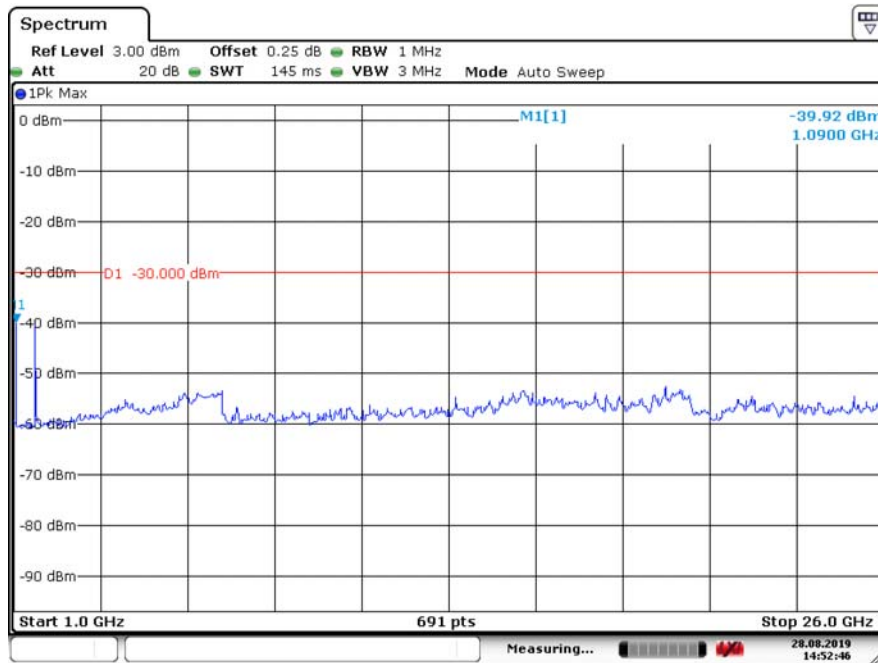


Date: 28.AUG.2019 14:52:46




Standby:

30 MHz to 1 GHz

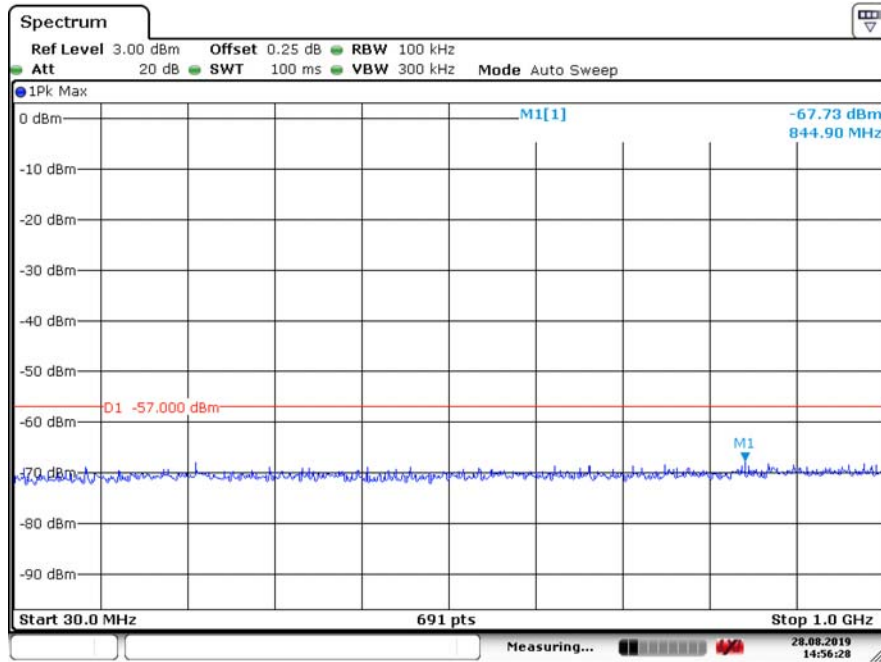

Date: 28.AUG.2019 14:56:28

1 GHz to 26 GHz

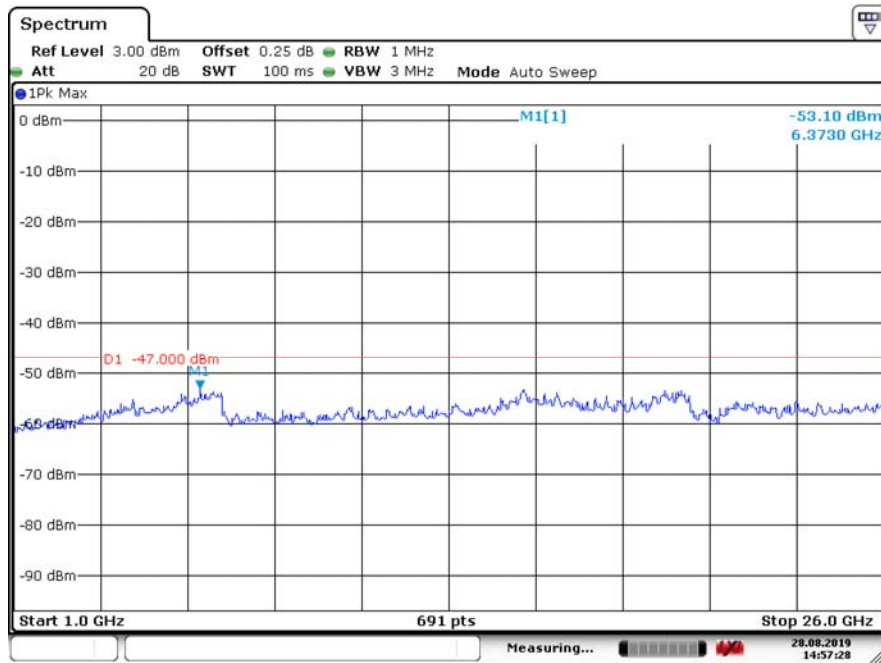

Date: 28.AUG.2019 14:57:28

## **9 FCC §74.861(e)(7) & ISEDC RSS-210 Annex G §G.3.4-Field Strength of Spurious Radiation**

---

### **9.1 Applicable Standards**

According to FCC §74.861 (e) (7):

Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

According to ISEDC RSS-210 Annex G §G.3.4:

The transmitter unwanted emissions shall meet the requirements in sections 8.3 and 8.4 of ETSI EN 300 422-1 v1.4.2(2011-08)

### **9.2 Test Procedure**

KDB 971168 D01 v03r01 and ETSI EN 300 422-1 V1.4.2 (2011-08).

### 9.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-19	1 year
Sunol Science Corp	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2018-02-26	2 years
Agilent	Amplifier, Pre	8447D	2944A10187	2019-04-11	1 year
HP	Pre-Amplifier	8449B	3008A01978	2018-09-18	1 year
EMCO	Antenna, Horn	3115	9511-4627	2018-03-28	2 years
A.R.A.	Antenna, Horn	DRG-118/A	1132	2018-02-13	2 years
Keysight Technologies	Generator, Signal	N5182B	MY51350070	2019-01-29	1 year
-	RF Cable	-	-	Each time <sup>1</sup>	N/A
COM-POWER	Antenna, Dipole	AD-100	721033DB1, 2, 3, 4	2019-03-06	2 years

Note<sup>1</sup>: cable included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

### 9.4 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	40 %
ATM Pressure:	101.0 kPa

The testing was performed by Christian McCaig on 2019-08-27 at 5 meter chamber 3.

### 9.5 Test Results

EUT was configured to the highest power setting on worst case channel. Please refer to the following tables for test results.

**TX Mid channel 539.025 MHz**

Freq. (MHz)	S.A. Amp. (dBμV)	Table Azimuth (Degrees)	Test Antenna		Substitution				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Freq. (MHz)	S.G. Level (dBm)	Antenna Gain (dBi/dBd)	Cable Loss (dB)			
746	28.22	0	100	H	746	-72.29	0	0.5	-72.79	-54	-18.79
746	29.84	0	100	V	746	-68.01	0	0.5	-68.51	-54	-14.51
850	28.07	0	100	H	850	-70.48	0	0.5	-70.98	-54	-16.98
850	28.15	0	100	V	850	-68.9	0	0.5	-69.4	-54	-15.4
1787	49.25	0	100	H	1787	-59.21	8.401	0.786	-51.595	-30	-21.595
1787	49.55	0	100	V	1787	-57.96	8.401	0.786	-50.345	-30	-20.345

**Standby mode:**

Freq. (MHz)	S.A. Amp. (dBμV)	Table Azimuth (Degrees)	Test Antenna		Substitution				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Freq. (MHz)	S.G. Level (dBm)	Antenna Gain (dBi/dBd)	Cable Loss (dB)			
746	28.27	0	100	H	746	-72.24	0	0.5	-72.74	-57	-15.74
746	30.11	0	100	V	746	-67.74	0	0.5	-68.24	-57	-11.24
850	27.42	0	100	H	850	-71.13	0	0.5	-71.63	-57	-14.63
850	27.68	0	100	V	850	-69.37	0	0.5	-69.87	-57	-12.87
1787	45.77	0	100	H	1787	-62.69	8.401	0.786	-55.075	-47	-8.075
1787	45.42	0	100	V	1787	-62.09	8.401	0.786	-54.475	-47	-7.475

## 10 FCC §74.861(e)(4) & ISEDC RSS-210 Annex G §G.3.3- Frequency Stability

### 10.1 Applicable Standards

According to FCC §74.861 (e) (4):

The frequency tolerance of the transmitter shall be 0.005 percent

According to ISDEC RSS-210 Annex G §G.3.3:

The frequency stability of equipment shall comply with the limits specified in Table G1, when tested under the frequency stability testing condition specified in RSS-Gen.

**Table G1 — Specification for Low-Power Radio Apparatus**

Frequency Bands (MHz)	Transmit e.i.r.p. (mW)	Authorized Bandwidth (kHz)	Frequency Stability (ppm)
54-72 76-88 174-216	50	200	± 50
470-608 614-698 <sup>Note</sup>	250	200	± 50

### 10.2 Test Procedure

According to RSS- Gen issue 5 Section 6.11, frequency stability is a measure of frequency drift due to temperature and supply voltage variations with reference to the frequency measurement at an appropriate reference temperature and the rated supply voltage.

Unless specified otherwise in the RSS that is applicable to the device, the reference temperature for transmitters is +20°C.

A hand-held device that is only capable of operating using internal batteries shall be tested using a new battery without any further requirement to vary the supply voltage. Alternatively, an external supply voltage can be used and set at the batter nominal voltage, and again at the battery operating end point voltage which must be specified by the equipment manufacturer.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency-determining circuit element shall be made subsequent to this initial set-up.

With the transmitter installed in an environment test chamber, the unmodulated carrier frequency shall be measured under the conditions specified below. A sufficient stabilization period at each temperature shall be used prior to each frequency measurement. The following temperatures and supply voltage ranges apply, unless specified otherwise in the applicable RSS.

- a) At temperature of -30°C, +20°C and +50°C, and at the manufacturer's rated supply voltage; and
- b) At a temperature of +20°C and at  $\pm 15$  percent of the manufacturer's rated supply voltage.

If the frequency stability limits are only met at a different temperature range than specified in (a), the frequency stability requirement will be deemed met if the transmitter is automatically inhibited from operating outside this different temperature range and the published equipment operating characteristics are revised to reflect this different temperature range.

If an unmodulated carrier is not available, the measurement method shall be described in the test report.

### 10.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Rohde & Schwarz	Spectrum Analyzer	FSV40	1321.3008K3 9-101203-UW	2019-08-06	1 year
BACL	Temp and Humi Chamber	BTH-150-40	30078	2019-03-26	1 year
InterPower	Power Source	85510510	39711	Not Required	N/A
-	RF Cable	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) "A2LA Policy on Metrological Traceability".

### 10.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	43 %
ATM Pressure:	101.1 kPa

The testing was performed by Christian McCaig on 2019-08-26 and 2019-08-28 at RF site.

## 10.5 Test Results

### 539.025 MHz:

Varying temperature:

Temperature (°C)	Measured Frequency (MHz)	Channel Frequency (MHz)	Frequency Tolerance (ppm)	Limits (+/-ppm)
-20	539.0228	539.025	-4.081443347	50
-10	539.0263	539.025	2.411761978	50
0	539.0233	539.025	-3.153842586	50
10	539.0253	539.025	0.556560456	50
20	539.025	539.025	0	50
30	539.0273	539.025	4.266963499	50
40	539.0263	539.025	2.411761978	50
50	539.0213	539.025	-6.864245629	50

Varying supply voltage:

Voltage	Measured Frequency (MHz)	Channel Frequency (MHz)	Frequency Tolerance (ppm)	Limits (+/-ppm)
2.55 V	539.025	539.025	0	50
3.45 V	539.025	539.025	0	50

Please refer to plots for detailed test results.

## **11 Appendix A - EUT Test Setup Photographs**

---

Please refer to the attachment

## **12 Appendix B - EUT External Photographs**

---

Please refer to the attachment

## **13 Appendix C - EUT Internal Photographs**

---

Please refer to the attachment



# 14 Appendix D (Informative)- A2LA Electrical Testing Certificate



## Accredited Laboratory

A2LA has accredited

### BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 2<sup>nd</sup> day of October 2018.

Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 3297.02  
Valid to September 30, 2020  
Revised June 5, 2019

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

----- END OF REPORT -----