

Test Plot 1#: FM_ Body Worn Back _Low**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

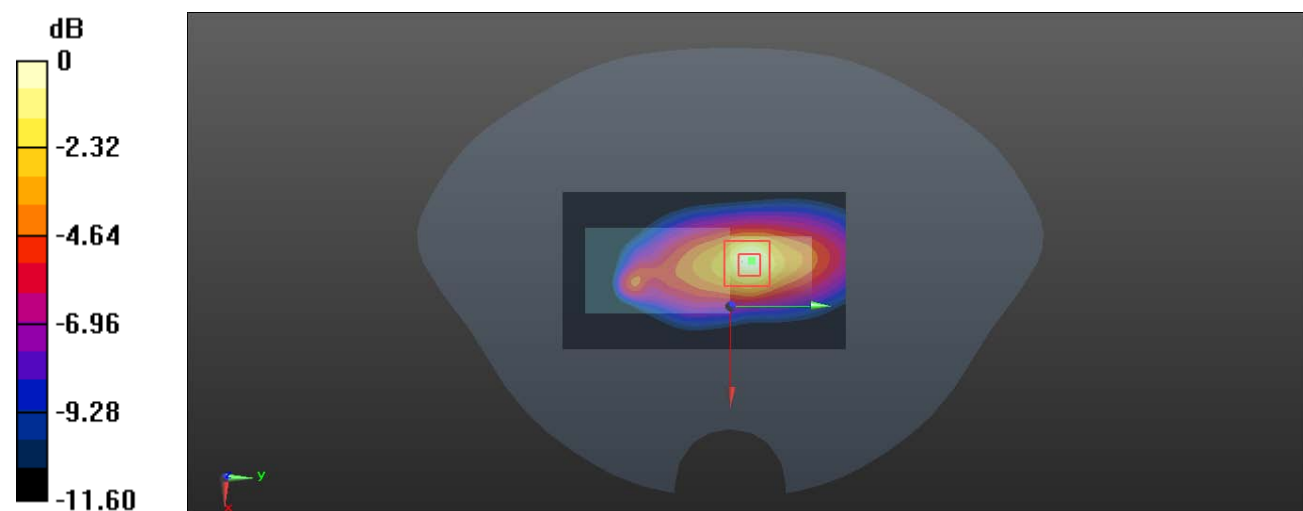
Communication System: FM; Frequency: 941.525 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 941.525 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 39.929$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 941.525 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.39 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 27.16 V/m ; Power Drift = 0.04 dB Peak SAR (extrapolated) = 1.81 W/kg **SAR(1 g) = 0.917 W/kg ; SAR(10 g) = 0.532 W/kg** Maximum value of SAR (measured) = 1.47 W/kg 0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Plot 2#: FM_ Body Worn Back _Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

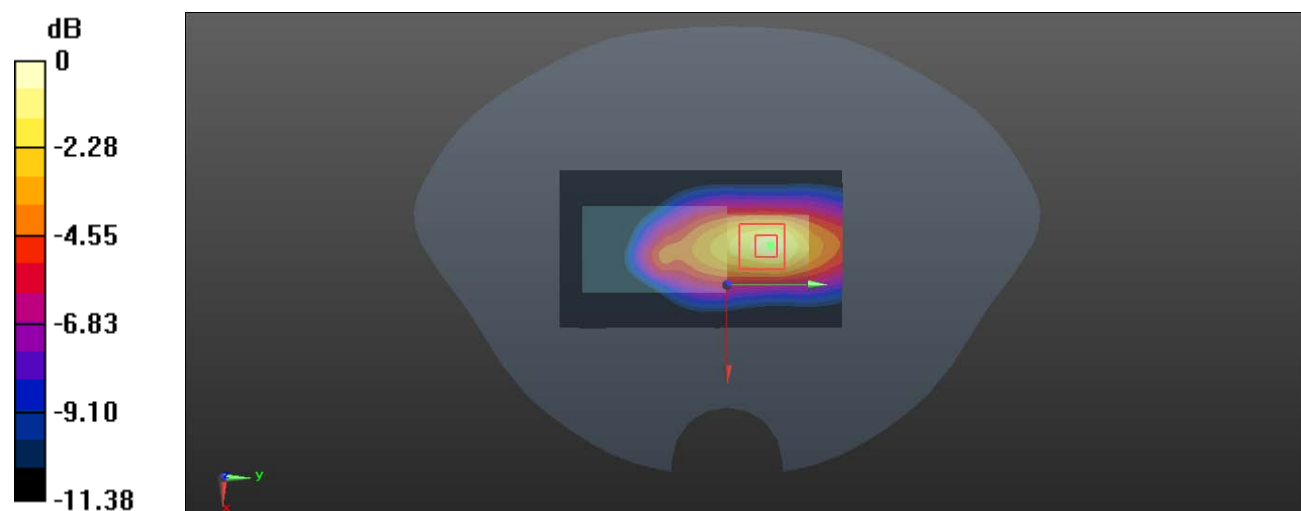
Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 39.862$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.04 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 24.95 V/m ; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.63 W/kg **SAR(1 g) = 0.850 W/kg ; SAR(10 g) = 0.507 W/kg** Maximum value of SAR (measured) = 1.34 W/kg 0 dB = 1.34 W/kg = 1.27 dBW/kg

Test Plot 3#: FM_ Body Worn Back _High**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

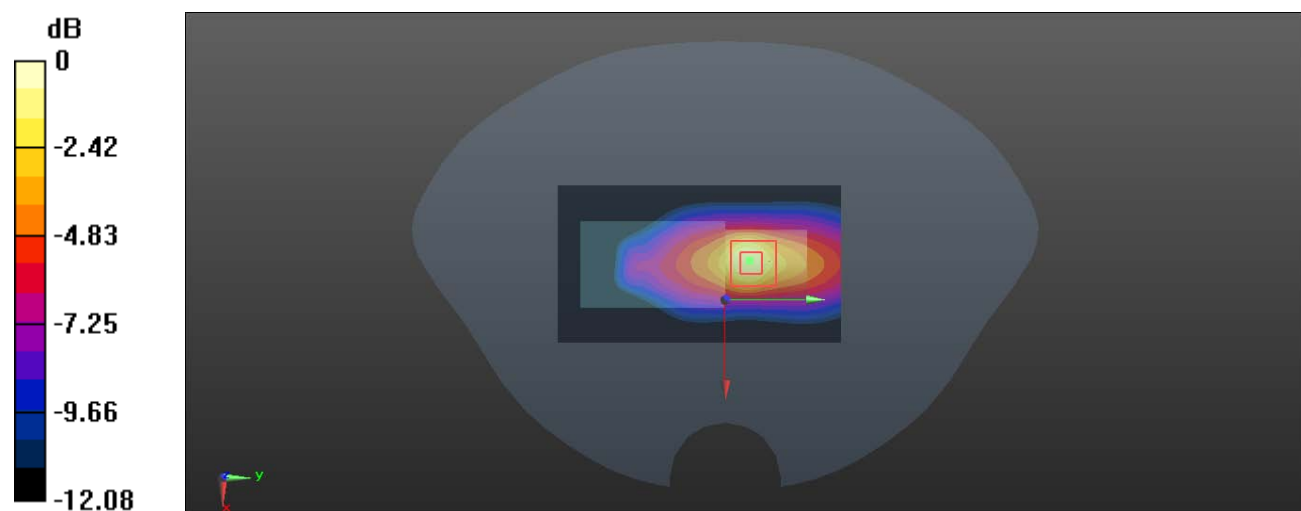
Communication System: FM; Frequency: 959.825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 959.825 \text{ MHz}$; $\sigma = 1.025 \text{ S/m}$; $\epsilon_r = 39.825$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 959.825 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.26 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 24.16 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.85 W/kg **SAR(1 g) = 0.872 W/kg ; SAR(10 g) = 0.490 W/kg** Maximum value of SAR (measured) = 1.50 W/kg 0 dB = 1.50 W/kg = 1.76 dBW/kg

Test Plot 4#: FM_ Handheld Configuration a Back _Low**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

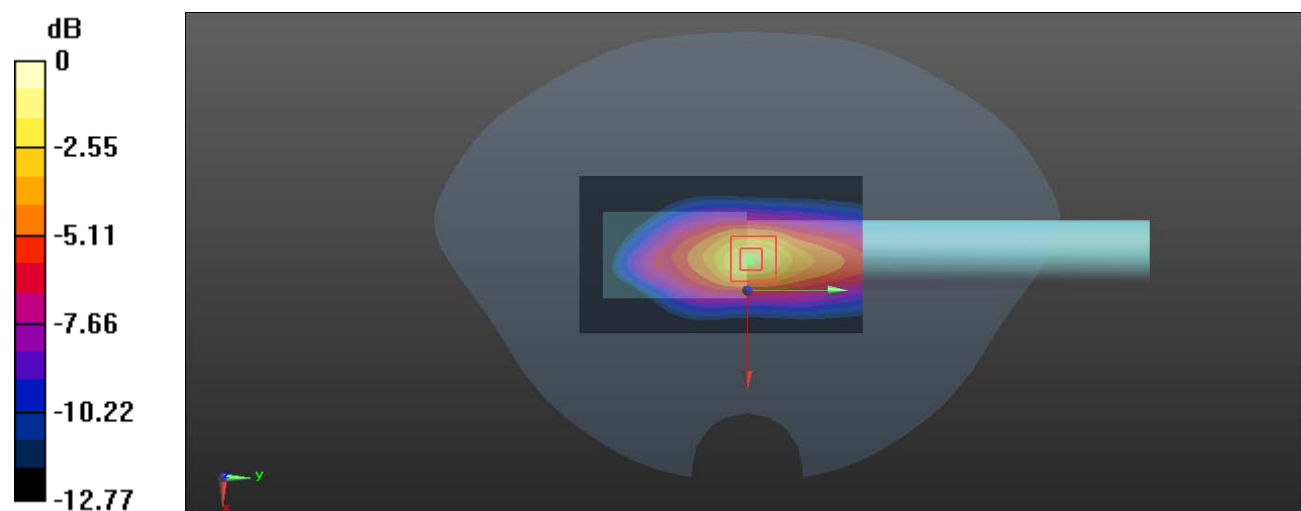
Communication System: FM; Frequency: 941.525 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 941.525 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 39.929$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 941.525 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.991 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 25.96 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 1.72 W/kg **SAR(1 g) = 0.815 W/kg ; SAR(10 g) = 0.452 W/kg** Maximum value of SAR (measured) = 1.37 W/kg 0 dB = 1.37 W/kg = 1.37 dBW/kg

Test Plot 5#: FM_ Handheld Configuration a Back _Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

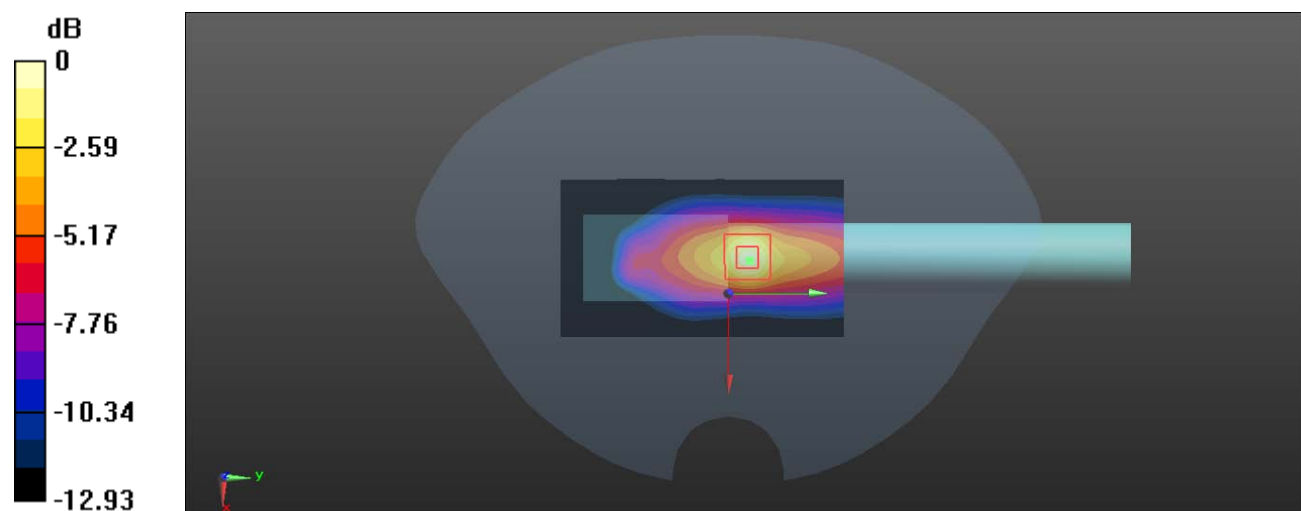
Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 39.862$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.17 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 25.52 V/m ; Power Drift = 0.04 dB Peak SAR (extrapolated) = 1.66 W/kg **SAR(1 g) = 0.809 W/kg ; SAR(10 g) = 0.449 W/kg** Maximum value of SAR (measured) = 1.34 W/kg 0 dB = 1.34 W/kg = 1.27 dBW/kg

Test Plot 6#: FM_ Handheld Configuration a Back _High**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

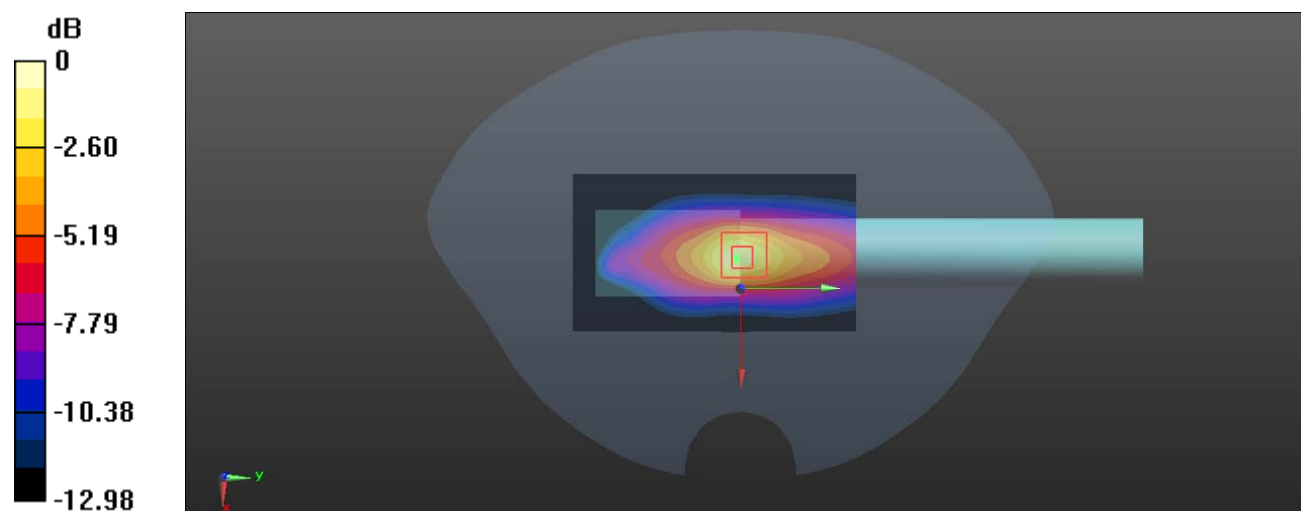
Communication System: FM; Frequency: 959.825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 959.825 \text{ MHz}$; $\sigma = 1.025 \text{ S/m}$; $\epsilon_r = 39.825$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 959.825 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.14 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 30.32 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 1.82 W/kg **SAR(1 g) = 0.865 W/kg ; SAR(10 g) = 0.477 W/kg** Maximum value of SAR (measured) = 1.44 W/kg 0 dB = 1.44 W/kg = 1.58 dBW/kg

Test Plot 7#: FM_ Handheld Configuration a Front _Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

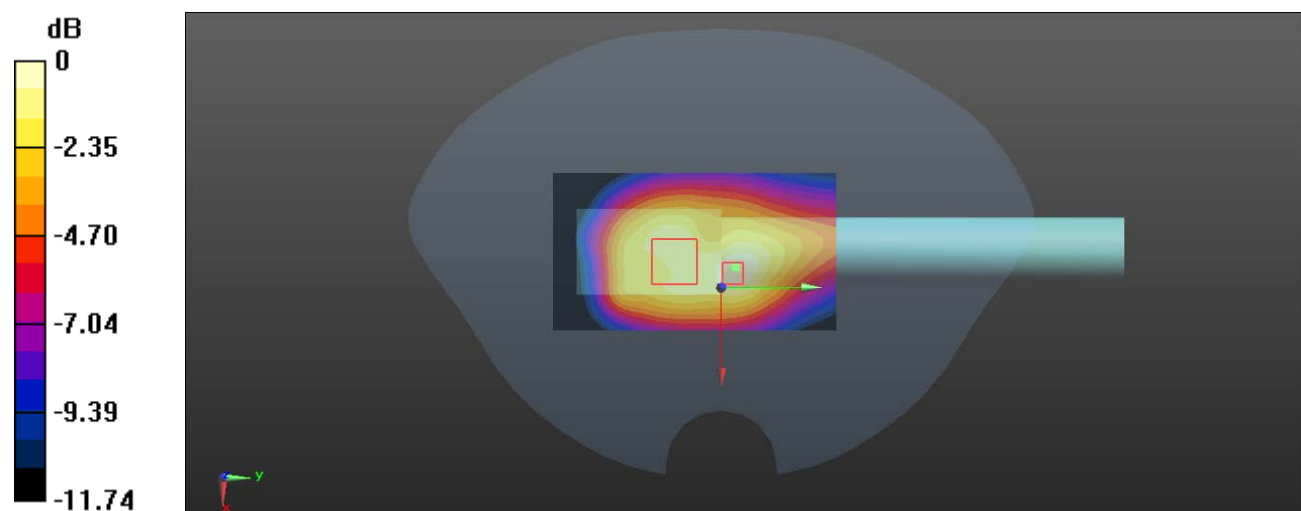
Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 39.862$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.412 W/kg **Zoom Scan (7x9x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.26 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.491 W/kg **SAR(1 g) = 0.292 W/kg ; SAR(10 g) = 0.223 W/kg** Maximum value of SAR (measured) = 0.413 W/kg 0 dB = 0.413 W/kg = -3.84 dBW/kg

Test Plot 8#: FM_ Handheld Configuration a Left _Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

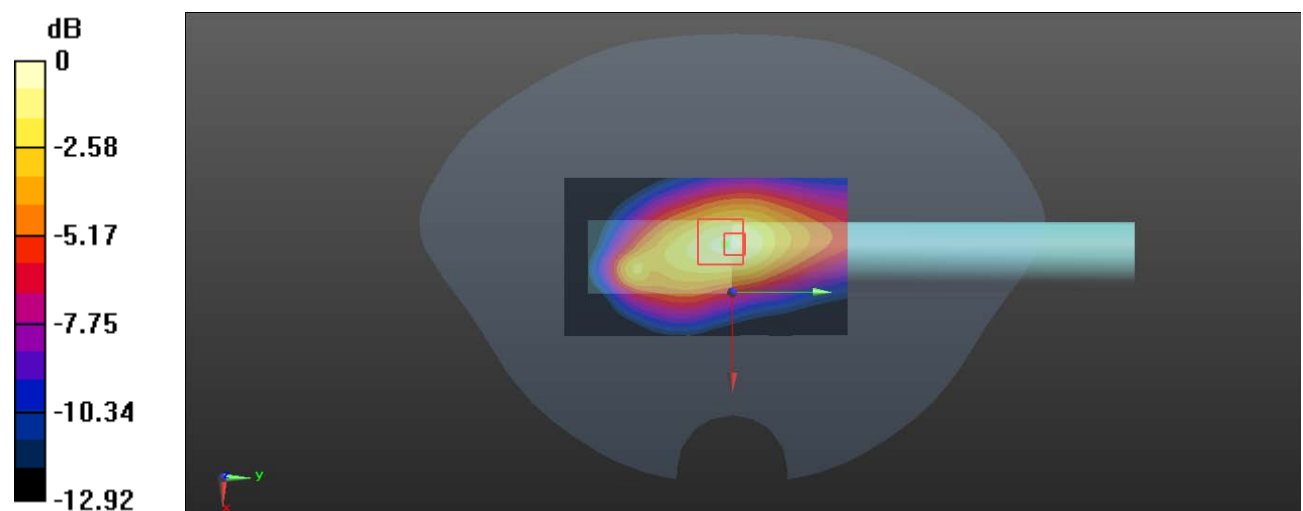
Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 39.862$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.537 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 19.37 V/m ; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.766 W/kg **SAR(1 g) = 0.408 W/kg ; SAR(10 g) = 0.263 W/kg** Maximum value of SAR (measured) = 0.624 W/kg 0 dB = 0.624 W/kg = -2.05 dBW/kg

Test Plot 9#: FM_ Handheld Configuration a Right _Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

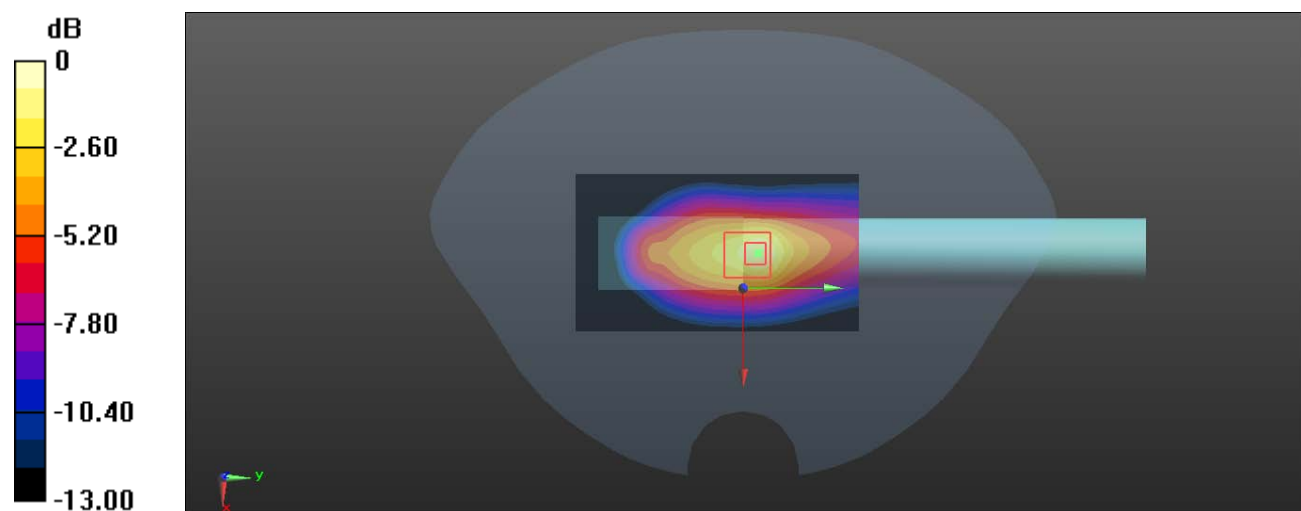
Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 39.862$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (91x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.724 W/kg **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 23.17 V/m ; Power Drift = 0.07 dB Peak SAR (extrapolated) = 1.11 W/kg **SAR(1 g) = 0.557 W/kg ; SAR(10 g) = 0.334 W/kg** Maximum value of SAR (measured) = 0.906 W/kg 0 dB = 0.906 W/kg = -0.43 dBW/kg

Test Plot 10#: FM_ Handheld Configuration b Back _Low**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

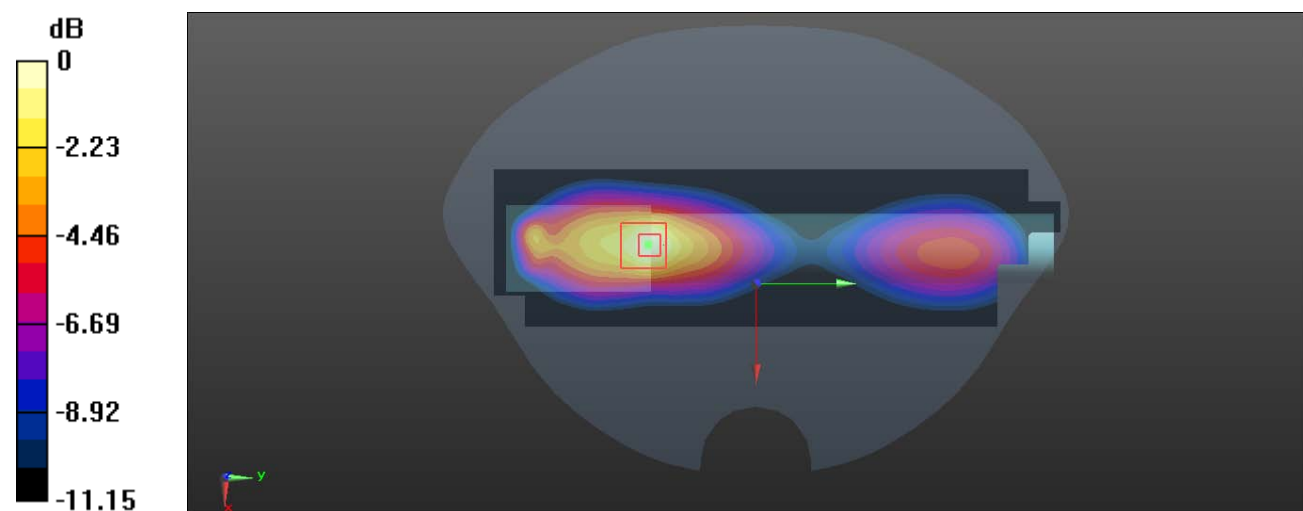
Communication System: FM; Frequency: 941.525 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 941.525 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 39.929$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 941.525 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (181x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.955 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.06 V/m ; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.19 W/kg **SAR(1 g) = 0.656 W/kg ; SAR(10 g) = 0.406 W/kg** Maximum value of SAR (measured) = 0.999 W/kg 0 dB = 0.999 W/kg = -0.00 dBW/kg

Test Plot 11#: FM_ Handheld Configuration b Back _Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 39.862$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (181x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.937 W/kg

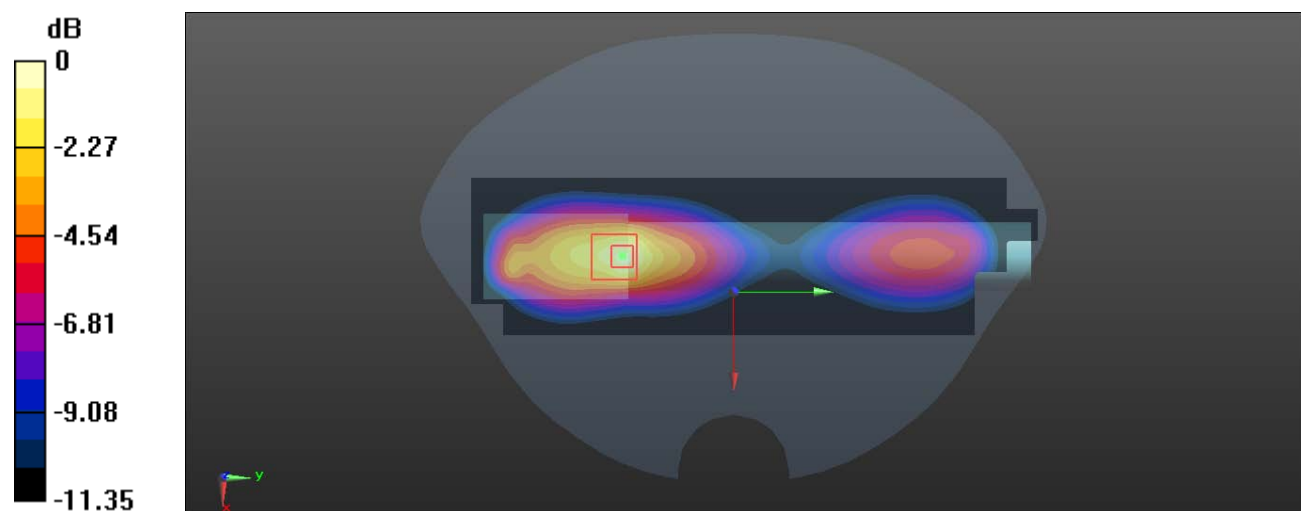
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.76 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 1.08 W/kg



0 dB = 1.08 W/kg = 0.33 dBW/kg

Test Plot 12#: FM_ Handheld Configuration b Back _High**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

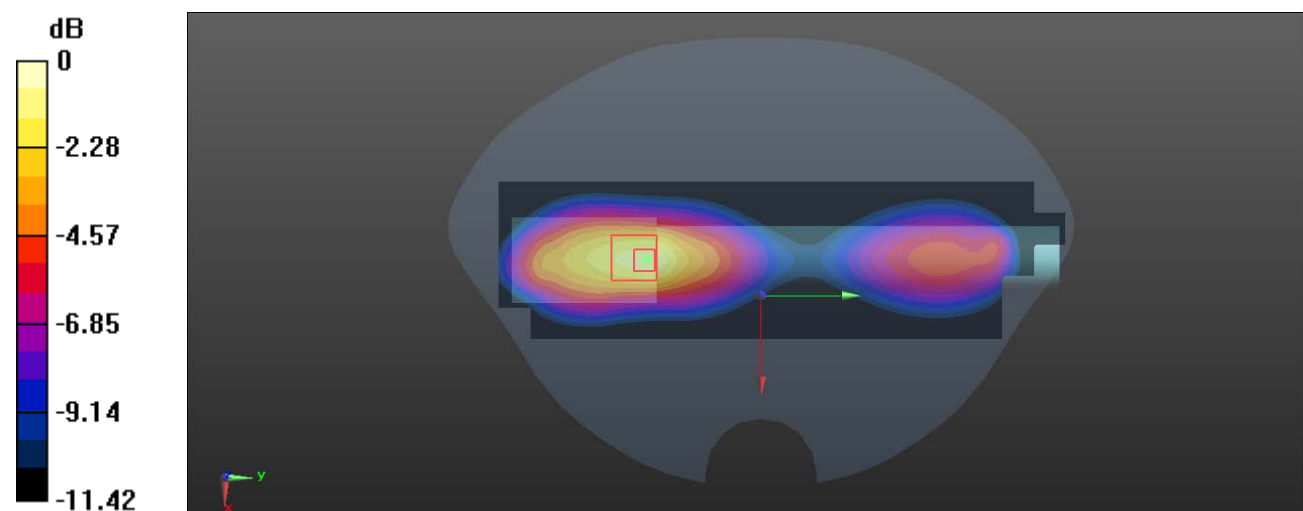
Communication System: FM; Frequency: 959.825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 959.825 \text{ MHz}$; $\sigma = 1.025 \text{ S/m}$; $\epsilon_r = 39.825$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 959.825 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (181x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.811 W/kg **Zoom Scan (5x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.60 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 1.19 W/kg **SAR(1 g) = 0.654 W/kg ; SAR(10 g) = 0.403 W/kg** Maximum value of SAR (measured) = 1.00 W/kg 0 dB = 1.00 W/kg = 0.00 dBW/kg

Test Plot 13#: FM_ Handheld Configuration b Front _Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 39.862$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (181x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.377 W/kg

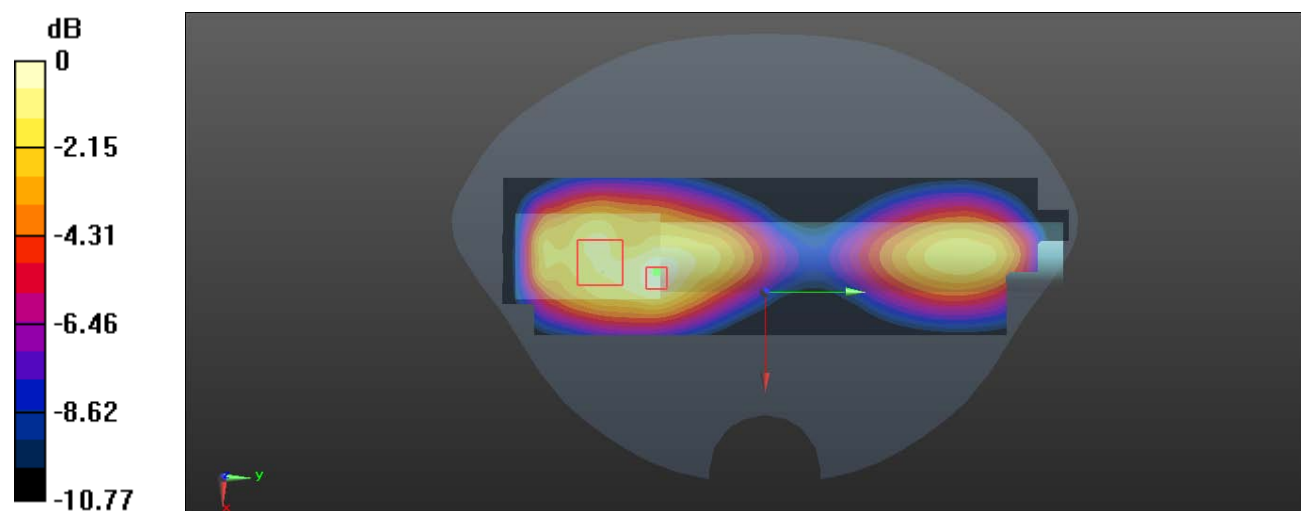
Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.660 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.375 W/kg



0 dB = 0.375 W/kg = -4.26 dBW/kg

Test Plot 14#: FM_ Handheld Configuration b Left_Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 39.862$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (181x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.690 W/kg

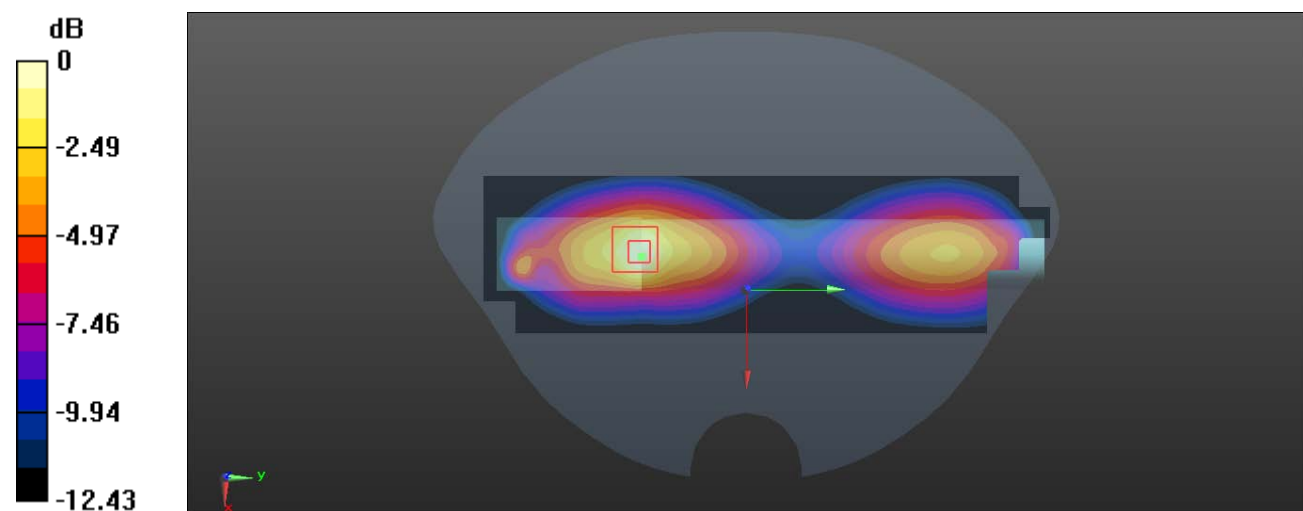
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.53 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 0.720 W/kg



0 dB = 0.720 W/kg = -1.43 dBW/kg

Test Plot 15#: FM_ Handheld Configuration b Right _Mid**DUT: Plug-on UHF Transmitter; Type: HMA/E07-941; Serial: 3**

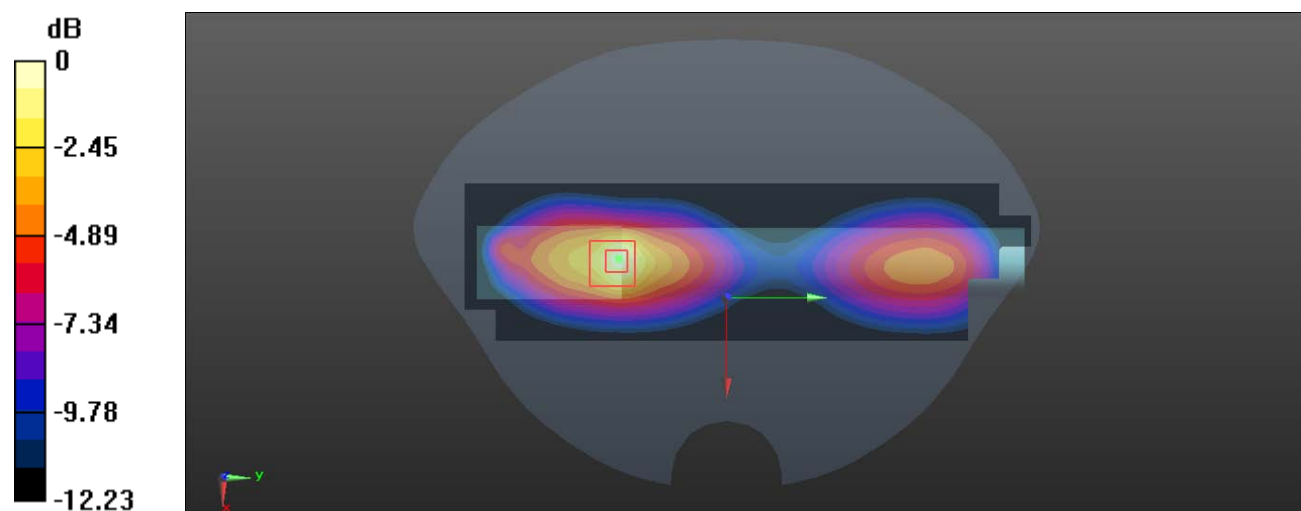
Communication System: FM; Frequency: 950.675 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 950.675 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 39.862$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.68, 9.68, 9.68) @ 950.675 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (181x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.894 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.81 V/m ; Power Drift = 0.14 dB Peak SAR (extrapolated) = 1.22 W/kg **SAR(1 g) = 0.623 W/kg ; SAR(10 g) = 0.372 W/kg** Maximum value of SAR (measured) = 1.01 W/kg 0 dB = 1.01 W/kg = 0.04 dBW/kg