

APPLICATION
SUBMITTAL
REPORT
FOR
GRANT OF CERTIFICATION

MODEL: UM400AV

FCC ID: DBZUM400AV

Wireless Microphone Transmitter

Operating under rule of CFR47 Part 74, Subpart H

FOR

LECTROSONICS, INC.

581 Laser Road

Rio Rancho, NM 87124

Test Report Number: 070913

Authorized Signatory 
Scot D. Rogers



NVLAP Lab Code: 200087-0



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

ENGINEERING TEST REPORT FOR APPLICATION for GRANT of CERTIFICATION For

LECTROSONICS, INC.

581 Laser Road
Rio Rancho, NM 87124

Larry Fisher
Vice President of Engineering

Model: UM400AV Transmitter
Wireless Microphone Transmitter

FREQUENCY: 944.1 - 951.9 MHz
FCC ID: DBZUM400AV

Test Date: September 13, 2007

Certifying Engineer *Scot D Rogers*
Scot D. Rogers
ROGERS LABS, INC.
4405 West 259TH Terrace
Louisburg, KS 66053
Telephone (913) 837-3214
Facsimile (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.



Table of contents

TABLE OF CONTENTS..... 3

FORWARD 5

OPINION / INTERPRETATION OF RESULTS 5

APPLICABLE STANDARDS & TEST PROCEDURES 5

ENVIRONMENTAL CONDITIONS..... 5

2.1033(C) APPLICATION FOR CERTIFICATION 6

EQUIPMENT TESTED 7

EQUIPMENT FUNCTION AND TESTING PROCEDURES 7

EQUIPMENT AND CABLE CONFIGURATIONS 8

 Radiated Emission Test Procedure8

LIST OF TEST EQUIPMENT 8

2.1046 RADIO FREQUENCY POWER OUTPUT 9

 Measurements Required9

 Test Arrangement.....9

 Antenna Conducted Power Data and Results10

2.1047 MODULATION CHARACTERISTICS..... 10

 Measurements Required10

 Test Arrangement.....10

 Modulation Characteristic Results10

 Figure one Audio Frequency Response Characteristics..... 11

 Figure two Deviation Characteristics..... 11

 Figure three Frequency Response of Audio low Pass Filter.12

2.1049 OCCUPIED BANDWIDTH 12

 Measurements Required12

 Test Arrangement.....12

 Figure four Occupied Bandwidth Measurement with 2500 Hz input 13

 Figure five Occupied Bandwidth Measurement with 21,000 Hz input..... 13

 Occupied Bandwidth Results.....14

2.1051 SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... 14

 Measurements Required14

 Test Arrangement.....14

 Figure six, emissions mask at antenna terminal. 15

 Figure seven, emissions mask at antenna terminal..... 15

 Figure eight, emissions mask at antenna terminal..... 16



NVLAP Lab Code: 200087-0

Figure nine, emissions mask at antenna terminal..... 16

Antenna Conducted Emissions Data and Results.....17

2.1053 FIELD STRENGTH OF SPURIOUS RADIATION..... 18

Measurements Required18

Test Arrangement.....18

Figure ten radiated emissions..... 19

Figure eleven radiated emissions20

Figure twelve radiated emissions20

Figure thirteen radiated emissions.....21

Figure fourteen radiated emissions21

Spurious Radiated Emissions Data and Results22

2.1055 FREQUENCY STABILITY 23

Measurements Required23

Test Arrangement.....23

Frequency Stability Data and Results.....24

ANNEX..... 25

Annex A Measurement Uncertainty Calculations26

Annex B Test Equipment List For Rogers Labs, Inc.28

Annex C Qualifications29

Annex D FCC Site Approval Letter30

Annex E Industry Canada Site Approval Letter31



NVLAP Lab Code: 200087-0

FORWARD

The following information is submitted for consideration in obtaining a Grant of Certification for a transmitter operating under rule of CFR47 paragraph 74H.

Name of Applicant:

Lectrosonics Inc.
581 Laser Road
Rio Rancho, NM 87124

Model: UM400AV Wireless Microphone Transmitter.

FCC I.D.: DBZUM400AV.

Operating Power: 100 mW (antenna Conducted).

Opinion / Interpretation of Results

TESTS PERFORMED	RESULTS
Emissions Tests	
General Radiated Emissions as per CFR47 paragraphs 2 and 74H	Complies

Applicable Standards & Test Procedures

In accordance with the Code of Federal Regulations, CFR47 dated October 1, 2006, Part 2 Subpart J, Paragraphs 2.907, 2.911, 2.925, 2.926, 2.1031 through 2.1057 and; Part 74 Subpart H; Paragraphs 74.801 through 74.861 the following report is submitted. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-2003 and/or TIA/EIA 603-1.

Environmental Conditions

Ambient Temperature	22.2° C
Relative Humidity	58%
Atmospheric Pressure	29.95 in Hg

2.1033(C) Application for Certification

- (1) The full name and mailing address of the manufacturer of the device and the applicant for certification.
Lectrosonics, Inc.
581 Laser Road
Rio Rancho, NM 87124
- (2) FCC identifier. DBZUM400AV
- (3) A copy of the installation and operating instructions to be furnished the user. Refer to the instruction manual furnished with this application for details.
- (4) Type or types of emission. 180KF3E
- (5) Frequency range of operation. 944.1 - 951.9 MHz.
- (6) Range of operating power values or specific operating power levels, and description of any means provided for variation of operating power. The output power is factory set to 100 mW (nominal). The EUT has no provision for operator variation of the output power.
- (7) Maximum power rating as defined in the applicable part(s) of the rules. As stated in CFR47, 74.861(e)(ii), the maximum permissible output power allowed is 250 mW.
- (8) The dc voltages applied to and dc currents into the several elements of the final radio frequency amplifying device for normal operation over the power range. The UM400AV model final amplification stage runs at 3.25 volts with 58 mA current for a power requirement of 188.5 mW.
- (9) Tune-up procedure over the power range, or at specific operating power levels. Refer to the tune-up procedure furnished with this application for details.
- (10) A schematic diagram and a description of all circuitry and devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation, and for limiting power. Refer to the schematics furnished with this application for details.
- (11) A photograph or drawing of the equipment identification plate or label showing the information to be placed thereon. Refer to the FCC identification label information furnished with this application for details.
- (12) Photographs (8" x 10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, if any, and labels for controls and meters and sufficient views of the internal construction to define component placement and chassis assembly. Insofar as these requirements are met by photographs or drawings contained in instruction manuals supplied with the certification request, additional photographs are necessary only to complete the required showing. Refer to the exhibits of this report and or additional information furnished with the application for details.

- (13) For equipment employing digital modulation techniques, a detailed description of the modulation system to be used, including the response characteristics (frequency, phase, and amplitude) of any filters provided, and a description of the modulating wave train, shall be submitted for the maximum rated conditions under which the equipment will be operated. The unit does not use digital modulation. It uses digital processing to get the audio ready for transmission, and then converts it back to audio before transmission.
- (14) The data required by Sections 2.1046 through 2.1057, inclusive, measured in accordance with the procedures set out in Section 2.1041.
- (15) The application for certification of an external radio frequency power amplifier under Part 97 of this chapter need not be accompanied by the data required by Paragraph (b)(14) of this section. In lieu thereof, measurements shall be submitted to show compliance with the technical specifications in Subpart C of Part 97 of this chapter and such information as required by Section 2.1060 of this part. This paragraph does not apply to this equipment.
- (16) An application for certification of an AM broadcast stereophonic exciter-generator intended for interfacing with existing certified, or formerly type accepted or notified transmitters must include measurements made on a complete stereophonic transmitter. The instruction book must include complete specifications and circuit requirements for interconnecting with existing transmitters. The instruction book must also provide a full description of the equipment and measurement procedures to monitor modulation and to verify that the combination of stereo exciter-generator and transmitter meets the emission limitations of section 73.44. This paragraph does not apply to this equipment.
- (17) A single application may be filed for a composite system that incorporates devices subject to certification under multiple rule parts; however, the appropriate fee must be included for each device. Separate applications must be filed if different FCC Identifiers will be used for each device.

Equipment Tested

<u>Equipment</u>	<u>Model</u>	<u>FCC I.D.</u>
EUT	UM400AV Transmitter	DBZUM400AV

Equipment Function and Testing Procedures

Equipment testing was performed on the Wireless Microphone model UM400AV operating in the frequency band of 944.1 - 951.9 MHz. The frequency band of operation is covered using equipment typically capable of tuning through 25.6 MHz. These bands are broken into blocks, which cover the frequency band of operation as requested and as previously agreed upon between the FCC and manufacturer. The unit operates from internal 9-volt DC battery power and offers no connection to utility power. For testing purposes, new batteries were used to power the EUT during testing.

Equipment and Cable Configurations

Radiated Emission Test Procedure

Testing for the radiated emissions were performed as defined in sections 8.3 and 13.1 of ANSI C63.4 and/or TIA/EIA 603. The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in the exhibits for EUT placement.

List of Test Equipment

A Hewlett Packard 8591EM and or 8562A Spectrum Analyzer was used as the measuring device for the emissions testing. The analyzer settings used are described in the following table. Refer to the Appendix for a complete list of Test Equipment.

HP 8591EM SPECTRUM ANALYZER SETTINGS		
CONDUCTED EMISSIONS		
RBW	AVG. BW	DETECTOR FUNCTION
9 kHz	30 kHz	Peak/Quasi Peak
RADIATED EMISSIONS (30 – 1000 MHz)		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak/Quasi Peak
HP 8562A SPECTRUM ANALYZER SETTINGS		
RADIATED EMISSIONS (1 – 40 GHz)		
RBW	AVG. BW	DETECTOR FUNCTION
1 MHz	1 MHz	Peak/Average
ANTENNA CONDUCTED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
100 kHz	300 kHz	Peak


Equipment	Manufacturer	Model	Calibration	Due
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/06	10/07
LISN	Comp. Design	1762	2/07	2/08
Antenna	ARA	BCD-235-B	10/06	10/07
Antenna	EMCO	3147	10/06	10/07
Antenna	EMCO	3143	5/07	5/08
Analyzer	HP	8591EM	5/07	5/08

2.1046 Radio Frequency Power Output

Measurements Required

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun. If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

Test Arrangement



The radio frequency output power was measured at the antenna terminal by replacing the antenna with a 50-ohm coaxial cable and observing the emission with the spectrum analyzer. A HP 8591EM Spectrum Analyzer was used to measure the radio frequency power produced by the EUT at the antenna port. The data was taken in dBm and converted to watts as shown in the following Table. Data was taken per Paragraph 2.1046(a) and applicable paragraphs of Part 74.

P_{dBm} = power in dB above 1 milliwatt.

Milliwatts = $10^{(P_{dBm}/10)}$

Watts = (Milliwatts)(0.001)(W/mW)

milliwatts = $10^{(19.53/10)}$

= 89.7 mW

= 0.0897 Watts (0.100) W

Antenna Conducted Power Data and Results

Frequency	P _{dBm}	P _{mw}	P _w
944.1	19.53	89.74	0.1
949.0	19.33	85.70	0.09
951.9	19.33	85.70	0.09


The specifications of Paragraph 2.1046(a) and applicable paragraphs of Part 74 are met. There are no deviations to the specifications.

2.1047 Modulation Characteristics

Measurements Required

A curve or equivalent data, which shows that the equipment will meet the modulation requirements of the rules, under which the equipment is to be licensed, shall be submitted.

Test Arrangement

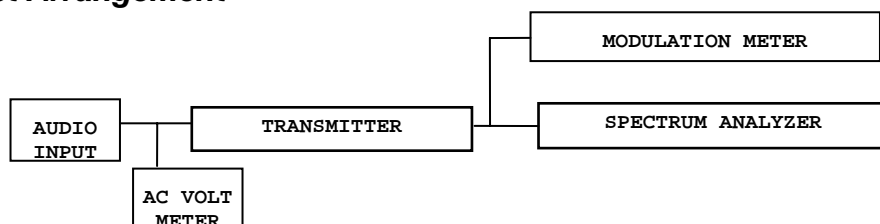

The radio frequency output was coupled to a HP Spectrum Analyzer and a modulation meter. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in its standard mode(s). The modulation meter was used to measure the percent modulation or frequency deviation.

Modulation Characteristic Results

Figure 1 displays the graph made showing the audio frequency response of the modulator. The frequency generator was set to 1 kHz and injected into the audio input port of the EUT. The input voltage amplitude was adjusted to obtain 50% modulation at 1000 Hz. This level was then taken as the 0-dB reference. The frequency of the generator was then varied and the voltage input level recorded while holding the output modulation level constant. The specifications of Paragraph 2.1047 and applicable parts of 74 are met.

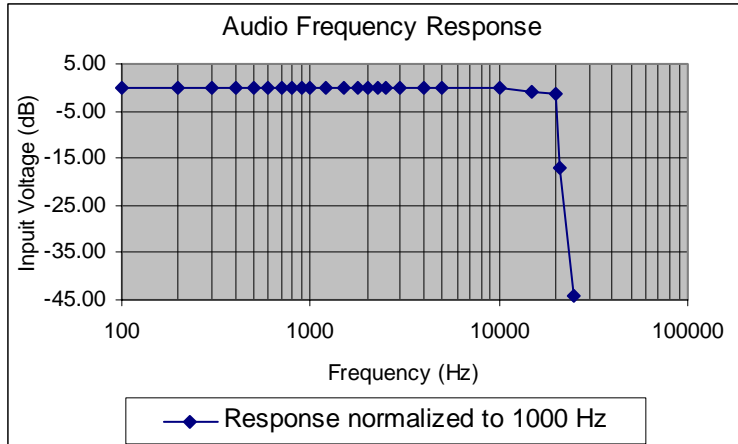


Figure one Audio Frequency Response Characteristics.

Figure 2 shows the frequency deviation response for each of eight frequencies while the input voltage was varied. The frequency was held constant and the frequency deviation was read from the deviation meter.

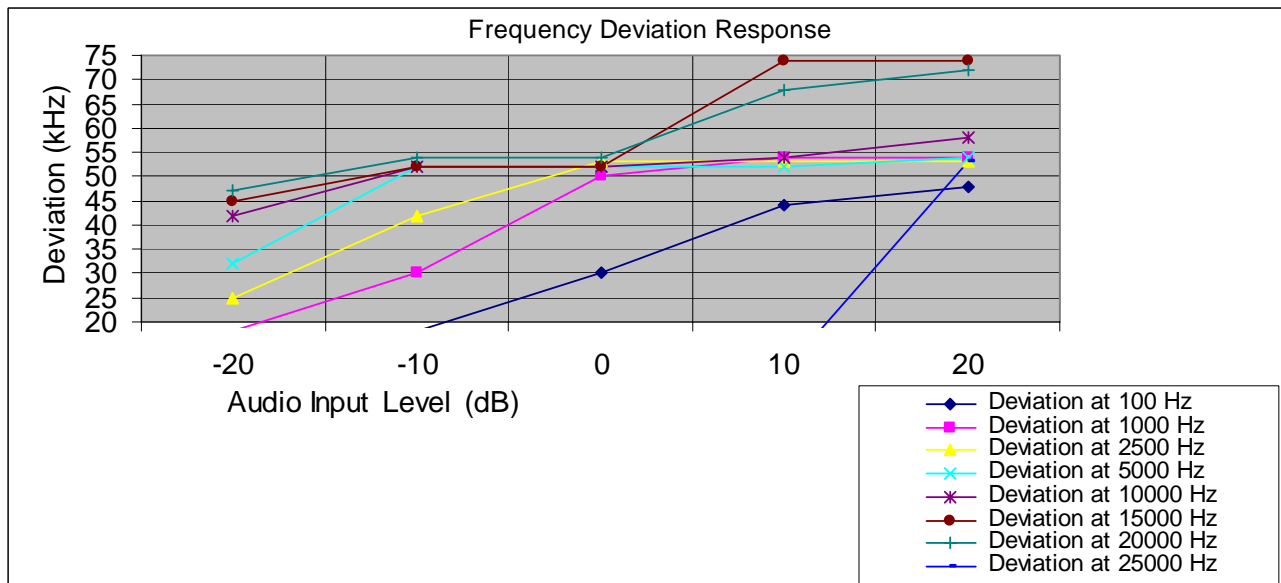


Figure two Deviation Characteristics.

Figure 3 shows the frequency response of the audio low pass filter.

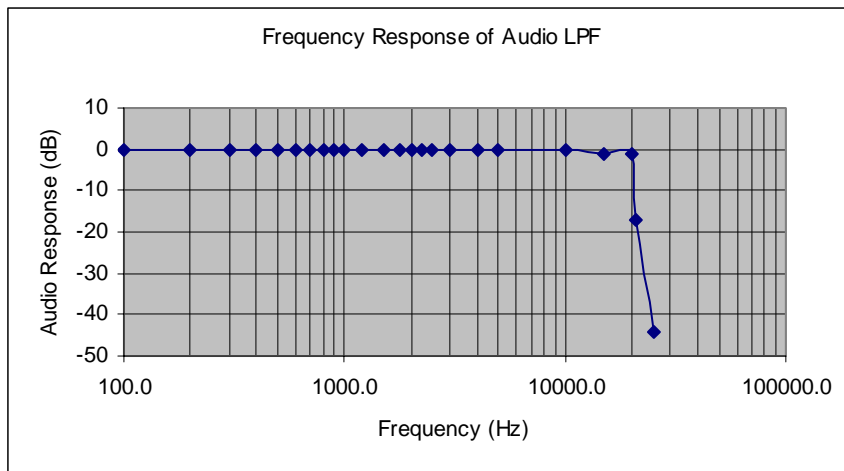



Figure three Frequency Response of Audio low Pass Filter.

2.1049 Occupied Bandwidth

Measurements Required

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are equal to 0.5 percent of the total mean power radiated by a given emission.

Test Arrangement

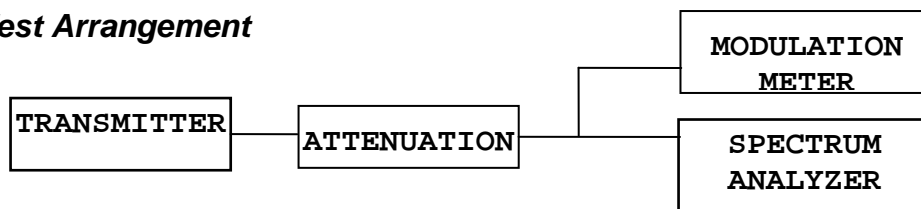


A spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in a normal mode, modulated by a frequency of 2,500 Hz and again at 21,000 Hz. The power ratio in dB representing 99.5% of the total mean power was recorded from the spectrum analyzer. Refer to figures four and five showing plots of the 99.5% power and spectral emissions mask.

MARKER Δ
120.0 kHz
1.09 dB

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 120.0 kHz
1.09 dB

LOG REF 20.0 dBm

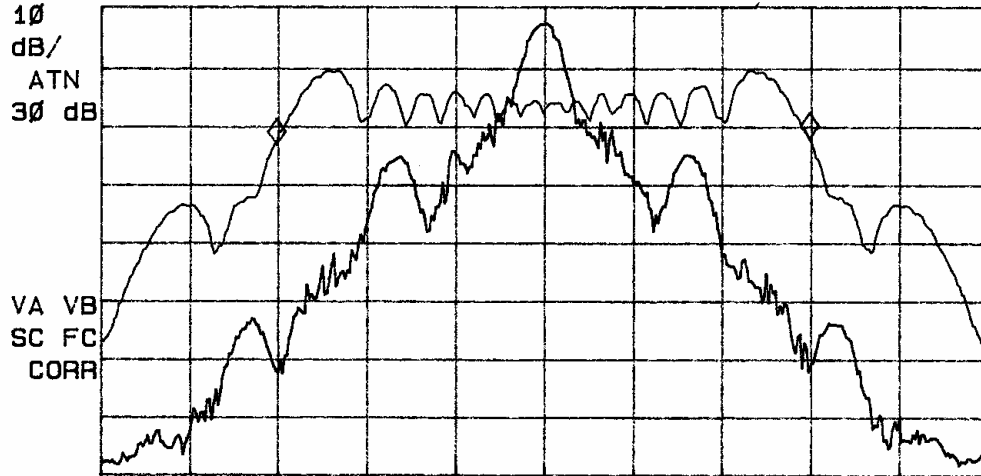


CENTER 948.0000 MHz SPAN 200.0 kHz
#IF BW 3.0 kHz AVG BW 3 kHz SWP 100 msec

Figure four Occupied Bandwidth Measurement with 2500 Hz input

MARKER Δ
176.5 kHz
.42 dB

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 176.5 kHz
.42 dB

LOG REF 20.0 dBm

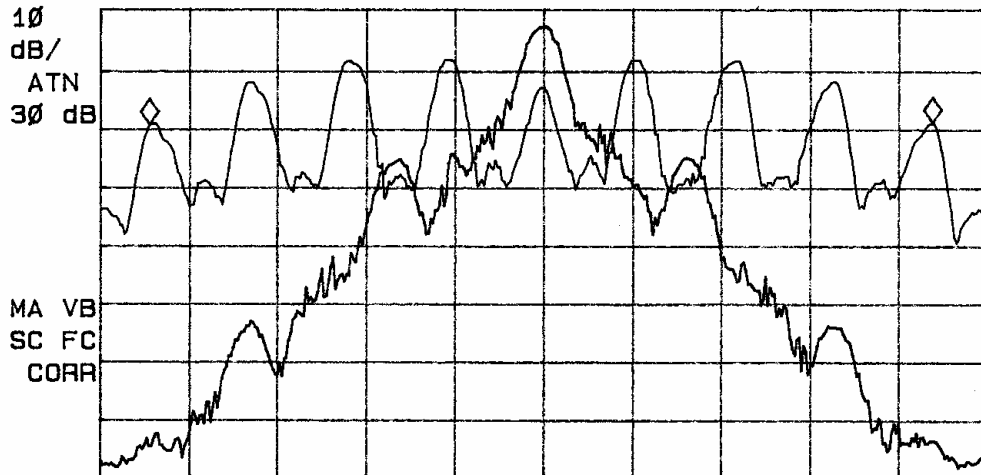

CENTER 948.0000 MHz SPAN 200.0 kHz
#IF BW 3.0 kHz AVG BW 3 kHz SWP 100 msec

Figure five Occupied Bandwidth Measurement with 21,000 Hz input

Occupied Bandwidth Results

The necessary bandwidth for this sound broadcasting class of equipment is calculated from the equation $B_n = 2M + 2KD$ ($k=1$, $M=21,000$ and $D=75,000$). This equates to a necessary bandwidth of 192 kHz. The limiting circuitry of the device reduces the measured bandwidth due to the constant frequency signal wave used as the input.

fc (MHz)	Occupied Bandwidth(kHz)
948.000	176.5(measured)


Requirements of 2.1049(c)(1) and applicable paragraphs of Parts 2 and 74 are met. There are no deviations to the specifications.

2.1051 Spurious Emissions at Antenna Terminals

Measurements Required

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. The EUT utilizes a permanently attached antenna system, therefore the requirements are met, and compliance demonstrated from the radiated field strength measurements.

Test Arrangement



The radio frequency output was coupled to a HP 8591EM and/or 8562A Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter modulated per section 2.1049 and operated in a normal mode. The frequency spectrum from 30 MHz to 10,000 MHz was observed and plots produced of the frequency spectrum. Figures six through nine represents data for the spurious emissions at antenna terminals of the UM400AV. Data was taken per 2.1051, 2.1057, and applicable paragraphs of Part 74.

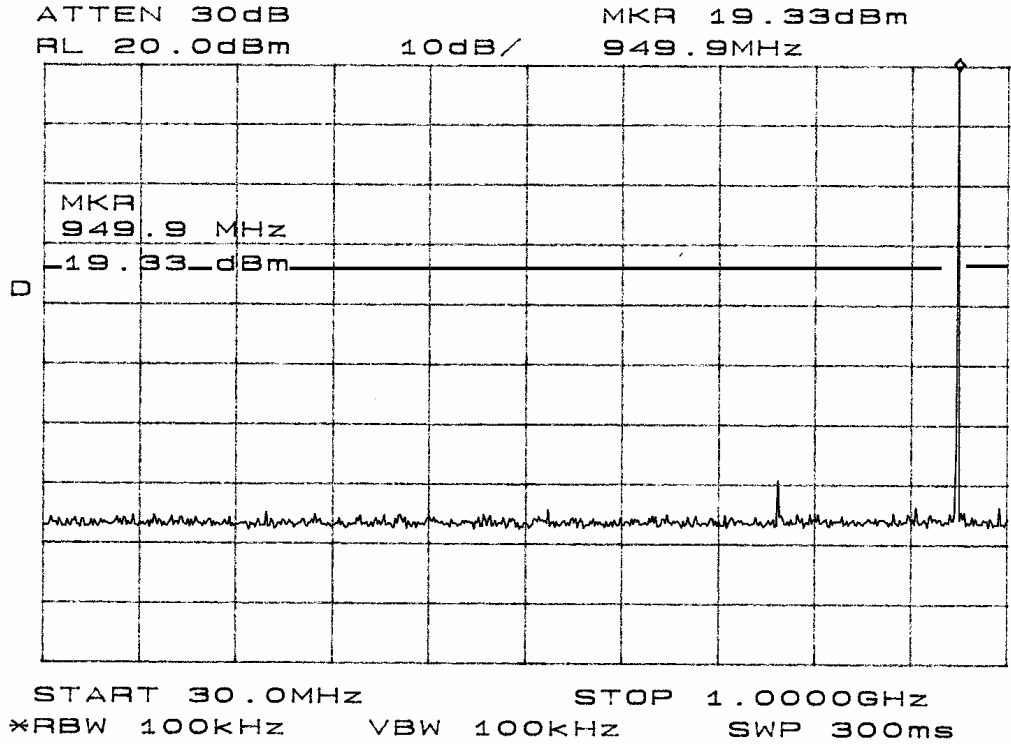


Figure six, emissions mask at antenna terminal.

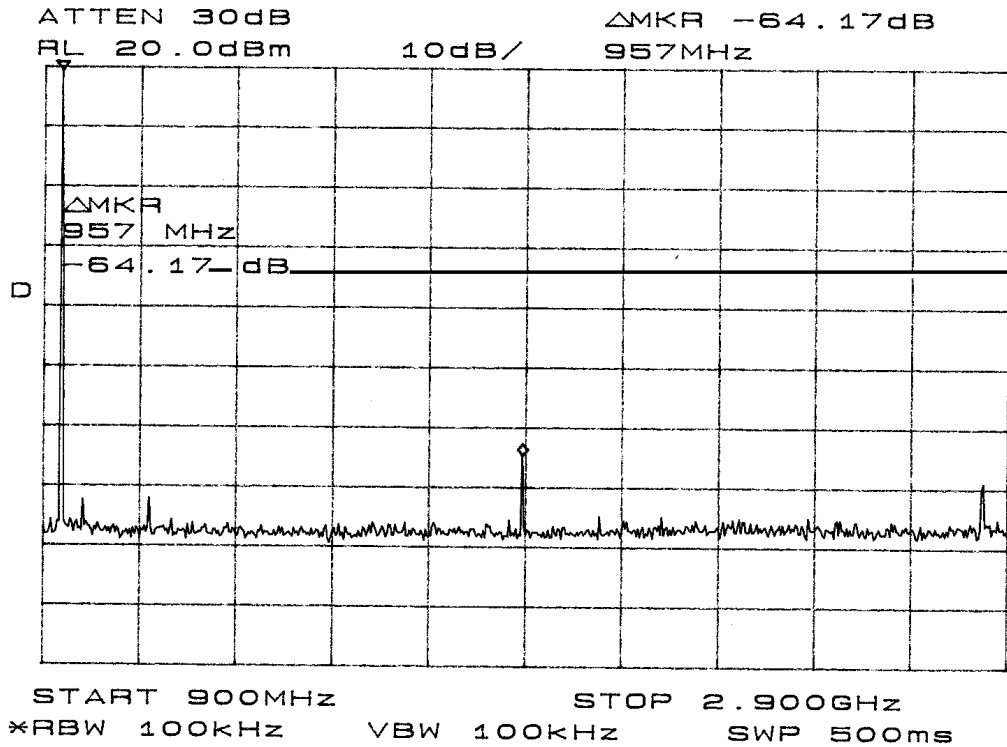


Figure seven, emissions mask at antenna terminal.

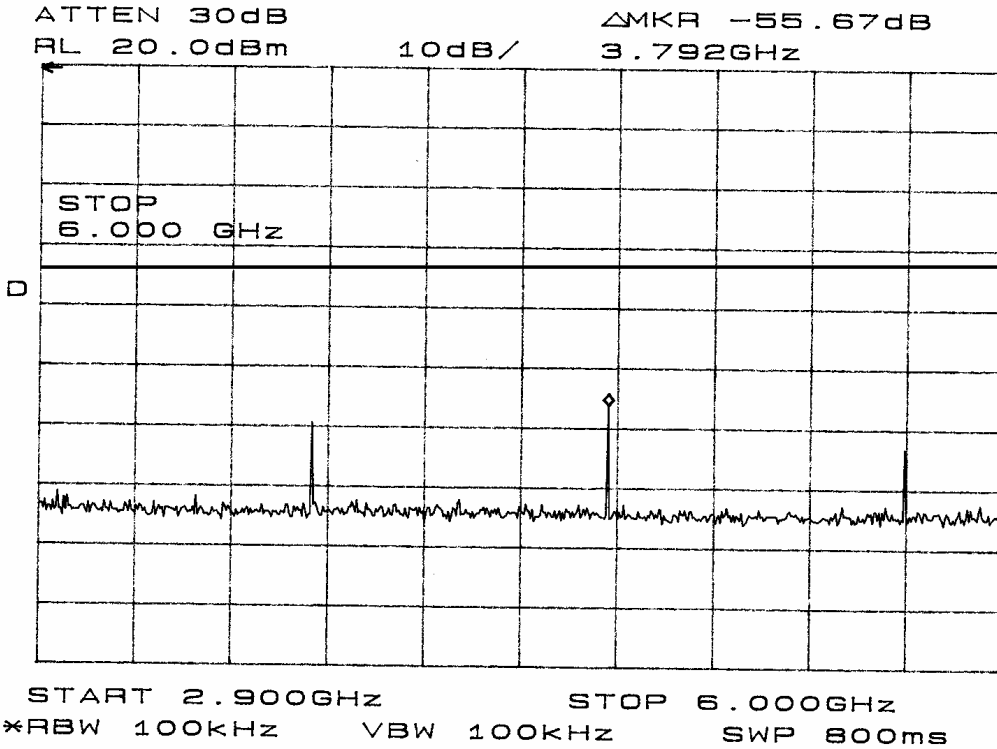


Figure eight, emissions mask at antenna terminal.

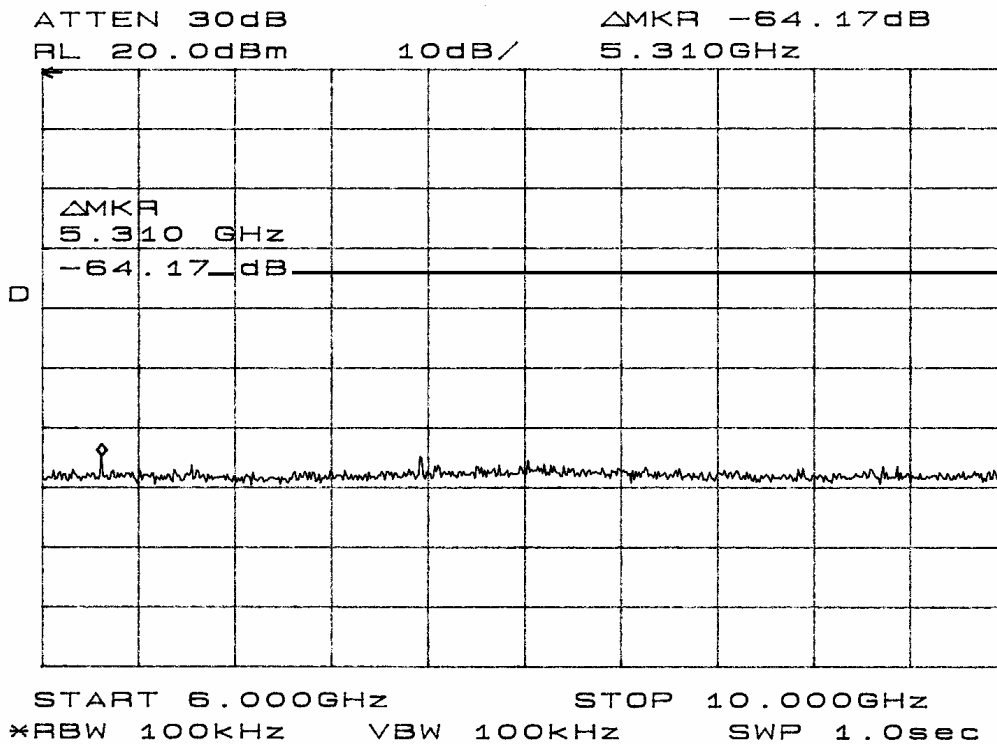


Figure nine, emissions mask at antenna terminal.



Antenna Conducted Emissions Data and Results

The output of the unit was coupled to a HP Spectrum Analyzer and the frequency emissions were measured. Data was taken as per 2.1051 and applicable paragraphs of Part 74.

FCC Limit: The spurious emissions must be reduced in power by at least 43 + 10 LOG(Po) below the carrier output power.

$$\begin{aligned} \text{Limit} &= 43 + 10 \text{ LOG}(P_o) &&= 43 + 10 \text{ LOG}(0.100) \\ \text{Limit} &= 33.0 \text{ dB below carrier} &&= 19.5 - 33 \text{ dBm } (-13.5 \text{ dBm absolute limit}) \end{aligned}$$

Channel MHz	Spurious Freq. (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
944.1		19.5	0
	1888.2	-44.5	64.0
	2832.3	-48.8	68.3
	3776.4	-41.2	60.7
	4720.5	-35.0	54.5
	5664.6	-41.0	60.5
	6608.7	-46.5	66.0
	7552.8	-44.2	63.7
	8496.9	-57.5	77.0
948.0		19.3	0
	1896.0	-44.3	63.6
	2844.0	-48.5	67.8
	3792.0	-40.2	59.5
	4740.0	-36.5	55.8
	5688.0	-42.8	62.1
	6636.0	-45.2	64.5
	7584.0	-43.7	63.0
	8532.0	-58.0	77.3
951.9		19.3	0
	1903.8	-43.7	63.0
	2855.7	-47.5	66.8
	3807.6	-39.3	58.6
	4759.5	-37.3	56.6
	5711.4	-44.5	63.8
	6663.3	-44.3	63.6
	7615.2	-42.5	61.8
	8567.1	-58.2	77.5


Specifications of Paragraphs 2.1051, 2.1057 and applicable paragraphs of part 74 are met. There are no deviations to the specifications.

2.1053 Field Strength of Spurious Radiation

Measurements Required

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

Test Arrangement



The transmitter, with the standard attached, was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 meters from the FSM antenna. The turntable was rotated through 360 degrees to locate the position registering the highest amplitude emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter. Raising and lowering the FSM antenna and rotating the turntable before final data was recorded maximized the measured amplitude of each spurious emission. A log periodic antenna was used for frequencies of 200 MHz to 5 GHz and pyramidal horn antennas were used for frequencies of 5 GHz to 40 GHz. The substitution method was used to measure the spurious emissions. Emission levels from the EUT were measured and amplitude levels were recorded. The EUT transmitter was then removed and replaced with a substitution antenna and signal generator. The signal from the generator was then adjusted such that the amplitude received was the same as that previously recorded for each frequency. This step was repeated for both horizontal and vertical polarizations. The power in dBm required to produce the desired signal level was then recorded from the signal generator. The power in dBm was then calculated by reducing the previous readings by the gain in the substitution antenna. The testing procedures used conform to the procedures stated in the TIA/EIA-603 document.

The limits for the spurious radiated emissions are defined by the following equation.

Limit = Amplitude of the spurious emission must be attenuated by this amount below the level of the fundamental. On any frequency removed from the assigned frequency by more than 250% of the authorized bandwidth: at least $43 + 10 \text{ Log} (P_o)$ dB.

0.100-watt transmitter.

$$\begin{aligned} \text{Attenuation} &= 43 + 10 \text{ Log}_{10}(P_w) \\ &= 43 + 10 \text{ Log}_{10}(0.100) \\ &= 33.0 \text{ dB} \end{aligned}$$

Refer to figures ten through fourteen showing plots of the radiated emissions and spectral emissions mask of the EUT.

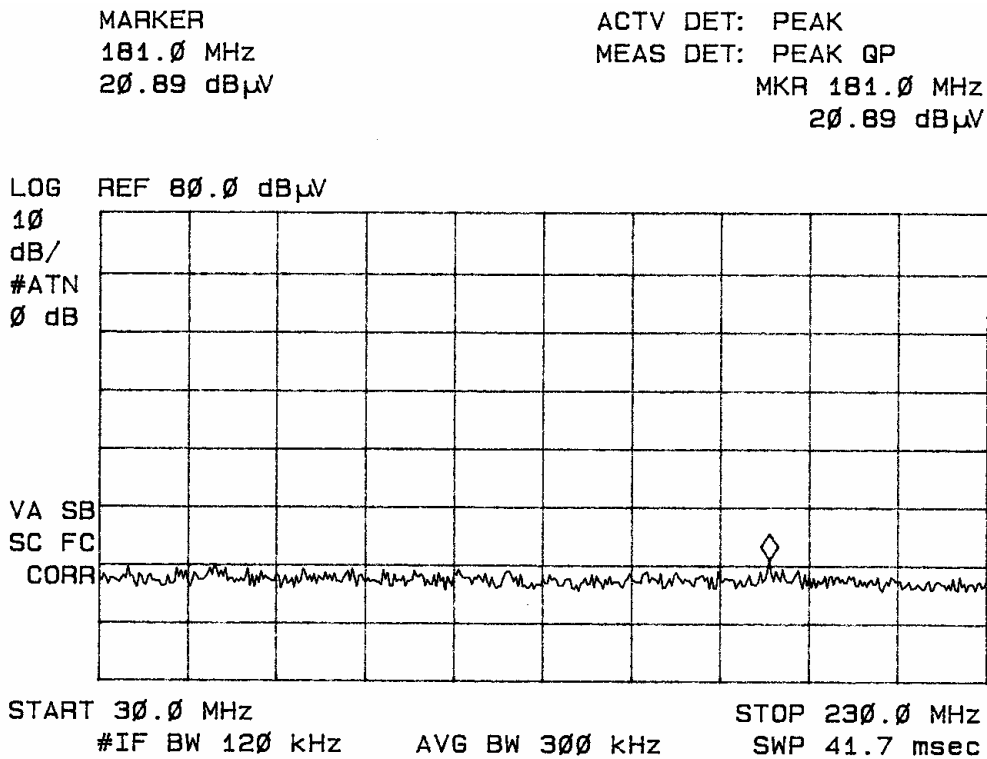


Figure ten radiated emissions

MARKER
950 MHz
98.23 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 950 MHz
98.23 dB μ V

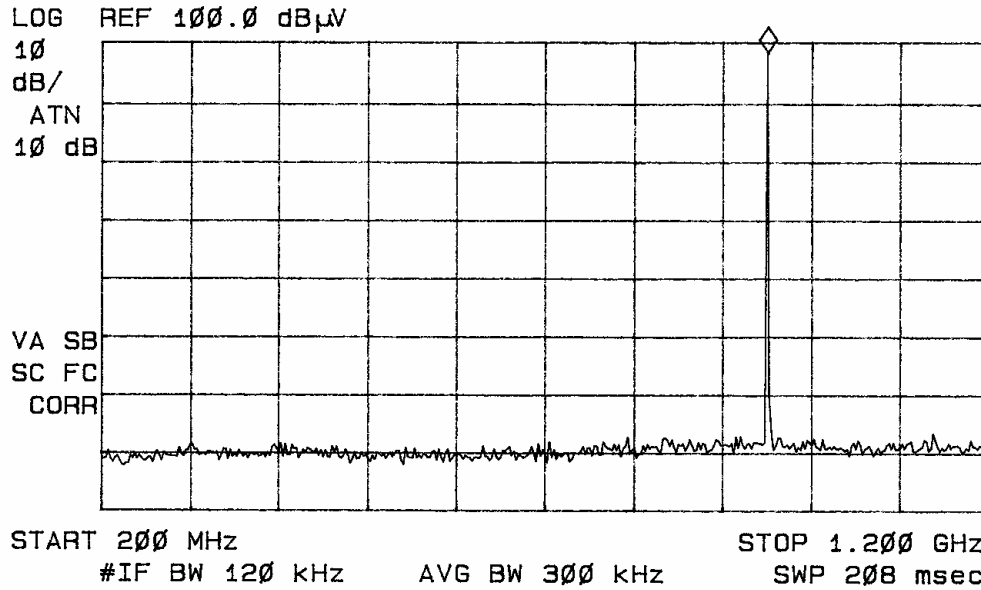


Figure eleven radiated emissions

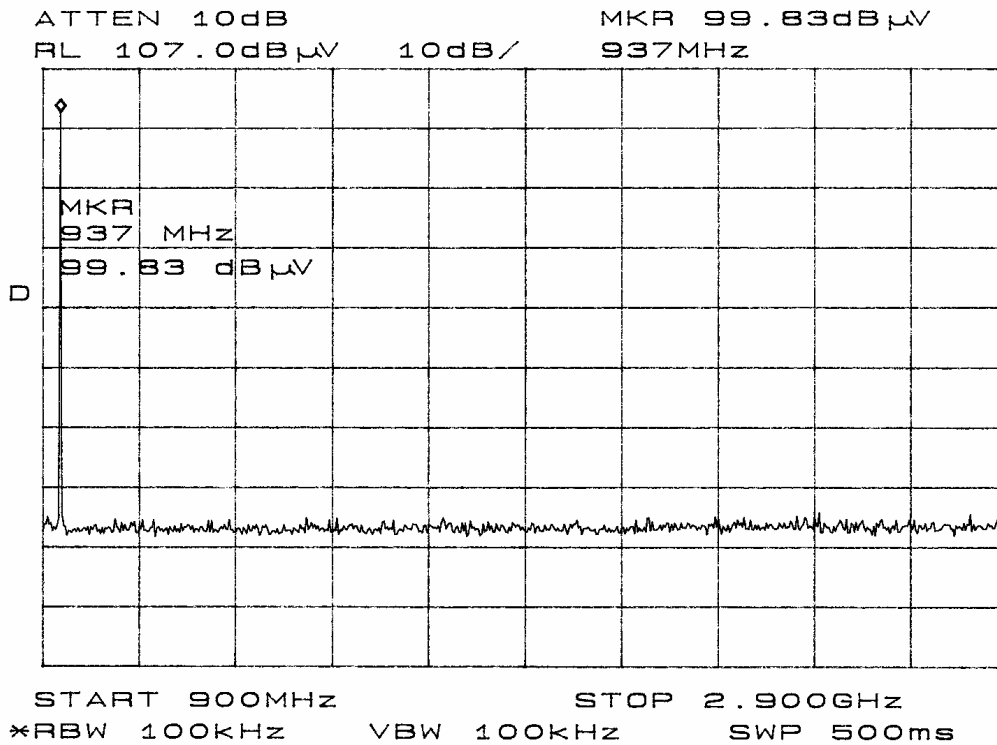


Figure twelve radiated emissions

Spurious Radiated Emissions Data and Results

Frequency of Emission	Amplitude of EUT Spurious emission		Signal level to substitution antenna required to reproduce		Emission level below carrier		Limit At Least
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical	
(MHz)	dB μ V/m	dB μ V/m	dBm	dBm	dBc	dBc	dBc
944.1	91.4	88.8	19.67	17.07			0
1880.2	30.0	26.2	-66.03	-69.83	85.7	86.9	33.0
2832.3	24.5	23.7	-65.83	-66.63	85.5	83.7	33.0
3776.4	28.3	27.6	-58.33	-59.03	78.0	76.1	33.0
4720.5	27.0	27.5	-56.33	-55.83	76.0	72.9	33.0
5664.6	24.3	23.2	-67.83	-68.93	87.5	86.0	33.0
948.0	91.3	88.2	19.77	16.67			0
1896.0	30.5	26.2	-65.53	-69.83	85.3	86.5	33.0
2844.0	24.7	24.8	-65.63	-65.53	85.4	82.2	33.0
3792.0	25.5	30.5	-61.03	-56.03	80.8	72.7	33.0
4740.0	27.6	25.8	-56.33	-58.13	76.1	74.8	33.0
5688.0	25.3	22.1	-66.83	-70.03	86.6	86.7	33.0
951.9	91.1	88.2	19.57	16.67			0
1903.8	31.5	26.5	-64.63	-69.63	84.2	86.3	33.0
2855.7	24.0	24.3	-66.33	-66.03	85.9	82.7	33.0
3807.6	24.0	32.8	-62.53	-53.73	82.1	70.4	33.0
4759.4	26.5	27.8	-57.63	-56.33	77.2	73.0	33.0
5711.4	23.5	25.5	-68.63	-66.63	88.2	83.3	33.0

Specifications of Paragraph 2.1053, 2.1057, applicable paragraphs of part 74 are met. There are no deviations to the specifications.

2.1055 Frequency Stability

Measurements Required


The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade. Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability, the frequency stability shall be measured with variation of primary supply voltage as follows.

Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

For hand carried, batteries powered equipment, reduce primary supply voltage to the battery-operating end point, which shall be specified by the manufacturer.

The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Test Arrangement

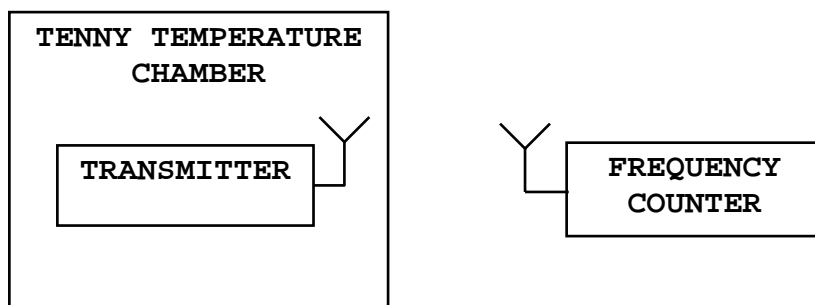

The measurement procedure outlined below shall be followed.

- Step 1 The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.
- Step 2 With the transmitter inoperative (power switched “OFF”), the temperature of the test chamber shall be adjusted to +25°C. After a temperature stabilization period of one hour at +25°C, the transmitter shall be switched “ON” with standard test voltage applied.
- Step 3 The carrier shall be keyed “ON”, and the transmitter shall be operated unmodulated at full radio frequency power output at the duty cycle, for which it is rated, for a duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.



NVLAP Lab Code: 200087-0

Step 4 The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified, -30°C to 50°C in 10-degree increments.

The frequency stability was measured with variations in the power supply voltage from 85 to 115 percent of the nominal value. A BK Precision 1670A DC Power Supply was used to vary the dc voltage for the power input from 7.65 Vdc to 10.35 Vdc. The frequency was measured and the variation in parts per million was calculated. Data was taken per Paragraphs 2.1055 and applicable paragraphs of parts 2, 22, and 74.861.

Frequency Stability Data and Results

Nominal frequency 948.000 MHz	Frequency Stability Vs Temperature In Parts Per Million (PPM) and percent (limit=0.005%)								
Temperature	-30	-20	-10	0	10	20	30	40	50
Change (Hz)	-6270.0	-5590.0	-5950.0	-7480.0	-5560.0	-50.0	490.0	2180.0	2100.0
PPM	-6.6	-5.9	-6.3	-7.9	-5.9	-0.1	0.5	2.3	2.2
%	-0.0007	-0.0006	-0.0006	-0.0008	-0.0006	0.0000	0.0001	0.0002	0.0002

Frequency 948.000 MHz	Frequency Stability Vs Voltage Variation 9.0 volts nominal		
Voltage	7.65	9.0	10.35
Change (Hz)	0.0	0.0	0.0

Frequency 948.000 MHz	Frequency Stability Vs Voltage Variation, 9.0 volts nominal Battery Endpoint Voltage 6.3 Vdc
Change(Hz)	0.0

The frequency tolerance of the transmitter shall be 0.005 percent per CFR47, 74.861.

Specifications of Paragraphs 2.1055 and applicable paragraphs of part 74 are met. There are no deviations to the specifications.



NVLAP Lab Code: 200087-0

Annex

- Annex A, Measurement Uncertainty Calculations
- Annex B, Test Equipment List.
- Annex C, Rogers Qualifications.
- Annex D, FCC Site Approval Letter.
- Annex E, Industry Canada Approval Letter.

Annex A Measurement Uncertainty Calculations

Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Antenna factor calibration	normal (k = 2)	±0.58
Cable loss calibration	normal (k = 2)	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5

Combined standard uncertainty $u_c(y)$ is

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that $u_c(y) / s(q_k) > 3$, where $s(q_k)$ is estimated standard deviation from a sample of n readings

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

unless the repeatability of the EUT is particularly poor, and a coverage factor of $k = 2$ will ensure that the level of confidence will be approximately 95%, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with $k = 2$.
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
 - Unwanted reflections from adjacent objects.
 - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
 - Losses or reflections from "transparent" cabins for the EUT or site coverings.
 - Earth currents in antenna cable (mainly effect biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value (± 4 dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Receiver specification	rectangular	±1.5
LISN coupling specification	rectangular	±1.5
Cable and input attenuator calibration	normal (k=2)	±0.5

Combined standard uncertainty $u_c(y)$ is

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that $u_c(y) / s(q_k) > 3$ and a coverage factor of $k = 2$ will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$



NVLAP Lab Code: 200087-0

Annex B Test Equipment List For Rogers Labs, Inc.

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Oscilloscope Scope: Tektronix 2230	2/07
Wattmeter: Bird 43 with Load Bird 8085	2/07
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/07
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/07
R.F. Generator: HP 606A	2/07
R.F. Generator: HP 8614A	2/07
R.F. Generator: HP 8640B	2/07
Spectrum Analyzer: HP 8562A,	2/07
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591EM	5/07
Frequency Counter: Leader LDC825	2/07
Antenna: EMCO Biconilog Model: 3143	5/07
Antenna: EMCO Log Periodic Model: 3147	10/06
Antenna: Antenna Research Biconical Model: BCD 235	10/06
Antenna: EMCO Dipole Set 3121C	2/07
Antenna: C.D. B-101	2/07
Antenna: Solar 9229-1 & 9230-1	2/07
Antenna: EMCO 6509	2/07
Audio Oscillator: H.P. 201CD	2/07
R.F. Power Amp 65W Model: 470-A-1010	2/07
R.F. Power Amp 50W M185- 10-501	2/07
R.F. PreAmp CPPA-102	2/07
LISN 50 µHy/50 ohm/0.1 µf	10/06
LISN Compliance Eng. 240/20	2/07
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	2/07
Peavey Power Amp Model: IPS 801	2/07
Power Amp A.R. Model: 10W 1010M7	2/07
Power Amp EIN Model: A301	2/07
ELGAR Model: 1751	2/07
ELGAR Model: TG 704A-3D	2/07
ESD Test Set 2010i	2/07
Fast Transient Burst Generator Model: EFT/B-101	2/07
Current Probe: Singer CP-105	2/07
Current Probe: Solar 9108-1N	2/07
Field Intensity Meter: EFM-018	2/07
KEYTEK Ecat Surge Generator	2/07
Shielded Room 5 M x 3 M x 3.0 M	
5/2/2007	



NVLAP Lab Code: 200087-0

Annex C Qualifications

SCOT D. ROGERS, ENGINEER

ROGERS LABS, INC.

Mr. Rogers has approximately 17 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

POSITIONS HELD:

- Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years
- Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years
- Electrical Engineer: Rogers Labs, Inc. Current

EDUCATIONAL BACKGROUND:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers

September 13, 2007

Date



NVLAP Lab Code: 200087-0

Annex D FCC Site Approval Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

May 16, 2006

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053

Attention: Scot Rogers

Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: May 16, 2006

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.


Sincerely,

Phyllis Parish
Information Technician



NVLAP Lab Code: 200087-0

Annex E Industry Canada Site Approval Letter



May 23rd, 2006

OUR FILE: 46405-3041
Submission No: 115252

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg, KY
USA 66053

Dear Sir/Madame:

The Bureau has received your application for the Alternate Test Site or OATS and the filing is satisfactory to Industry Canada.

Please reference to the file number (3041-1) in the body of all test reports containing measurements performed on the site.

In the future, to obtain or renew a unique registration number, you may demonstrate that the site has been accredited to ANSI C63.4-2003 or later.

If the site is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating conformance with the ANSI standard. The Department will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed two years.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca
Please reference our file number above for all correspondence.

Yours sincerely,

Robert Corey
Manager Certification
Certification and Engineering Bureau
3701 Carling Ave., Building 94
Ottawa, Ontario K2H 8S2

ROGERS LABS, INC.
4405 West 259TH Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214

Lectrosonics, Inc.
Model: UM400AV
Test #: 070913
Test to: FCC Parts 2 & 74h Report Revision 1A

FCC ID: DBZUM400AV
SN: P438

Page 31 of 31
UM400AV Test Report R1A 070913 9/25/2007