

FCC PART 15.247

TEST REPORT

For

OPTEX CO., LTD.

5-8-12, Ogoto Otsu, Shiga, Japan

FCC ID: DC9IVP-GU

Report Type: Original Report	Product Type: Wireless Gateway
Test Engineer: Dean Liu	<i>Dean Liu</i>
Report Number: RDG140721003-00	
Report Date: 2014-08-12	
Reviewed By: Sula Huang RF Engineer	<i>Sula Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....5

 DESCRIPTION OF TEST CONFIGURATION5

 EUT EXERCISE SOFTWARE5

 EQUIPMENT MODIFICATIONS5

 SUPPORT EQUIPMENT LIST AND DETAILS5

 EXTERNAL CABLE.....5

 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....8

 APPLICABLE STANDARD8

FCC §15.203 - ANTENNA REQUIREMENT.....9

 APPLICABLE STANDARD9

 ANTENNA CONNECTOR CONSTRUCTION9

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS10

 APPLICABLE STANDARD10

 MEASUREMENT UNCERTAINTY.....10

 EUT SETUP10

 EMI TEST RECEIVER SETUP.....11

 TEST PROCEDURE11

 CORRECTED AMPLITUDE & MARGIN CALCULATION11

 TEST EQUIPMENT LIST AND DETAILS.....12

 TEST RESULTS SUMMARY12

 TEST DATA12

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....17

 APPLICABLE STANDARD17

 MEASUREMENT UNCERTAINTY17

 EUT SETUP17

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP18

 TEST PROCEDURE18

 TEST EQUIPMENT LIST AND DETAILS.....19

 CORRECTED AMPLITUDE & MARGIN CALCULATION19

 TEST RESULTS SUMMARY19

 TEST DATA19

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST23

 APPLICABLE STANDARD23

 TEST EQUIPMENT LIST AND DETAILS.....23

 TEST PROCEDURE23

 TEST DATA23

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING26

APPLICABLE STANDARD26
 TEST PROCEDURE26
 TEST EQUIPMENT LIST AND DETAILS.....26
 TEST DATA26

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST29
 APPLICABLE STANDARD29
 TEST PROCEDURE29
 TEST EQUIPMENT LIST AND DETAILS.....29
 TEST DATA29

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....31
 APPLICABLE STANDARD31
 TEST PROCEDURE31
 TEST EQUIPMENT LIST AND DETAILS.....31
 TEST DATA31

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT34
 APPLICABLE STANDARD34
 TEST PROCEDURE34
 TEST EQUIPMENT LIST AND DETAILS.....34
 TEST DATA34

FCC §15.247(d) - BAND EDGES TESTING37
 APPLICABLE STANDARD37
 TEST PROCEDURE37
 TEST EQUIPMENT LIST AND DETAILS.....37
 TEST DATA37

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *OPTEX CO., LTD.*'s product, model number: *08872 IVP-GU (FCC ID: DC9IVP-GU)* or ("EUT") in this report is a *Wireless Gateway*, which was measured approximately: 12.0 cm (L) x 11.0 cm (H) x 3.0 cm (W), rated input voltage: DC12-24V or AC12-24V.

** All measurement and test data in this report was gathered from production sample serial number: 140721003 (Assigned by BACL, Dongguan). The EUT was received on 2014-07-25.*

Objective

This report is prepared on behalf of *OPTEX CO., LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

16 hopping channels are provided by manufacturer, and EUT was tested with low channel: 2411MHz, middle channel: 2436MHz, and high channel: 2461MHz.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2411	9	2438
2	2414	10	2440
3	2422	11	2442
4	2424	12	2446
5	2426	13	2452
6	2429	14	2454
7	2431	15	2458
8	2436	16	2461

EUT Exercise Software

No EUT exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
MOSO	AC/DC Adapter	KPC-024F-C	/

External Cable


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Power Cable	No	No	2.0	Adapter	EUT

Block Diagram of Test Setup

1. DC 12V from adapter

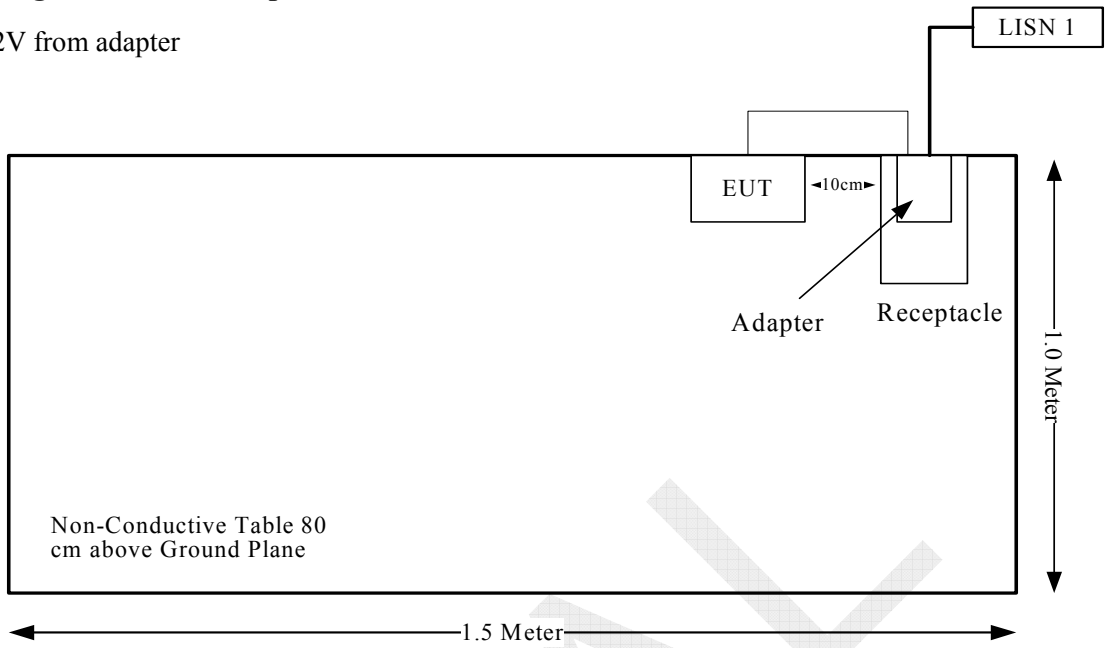

2. AC 12V

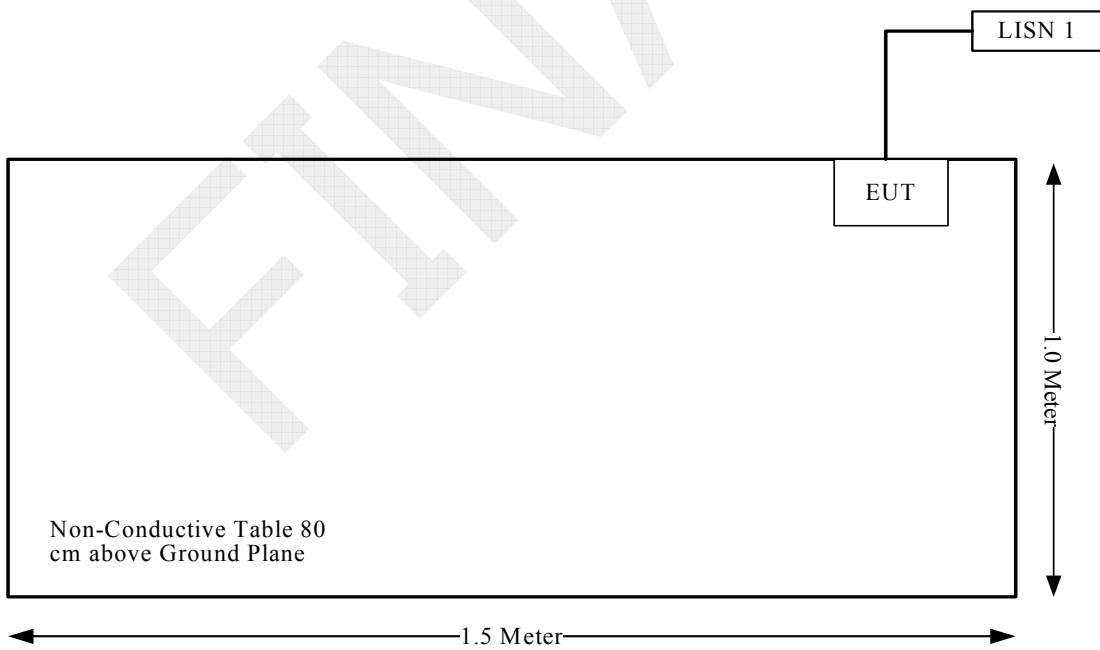

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307,§2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2461	0	1.0	10.86	12.19	20	0.0024	1.0

Result: The device meet FCC MPE at 20cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

This product used 3 integral antennas arrangement, one is for 2.4G band, the other two are only for receiving (418MHz), which were permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

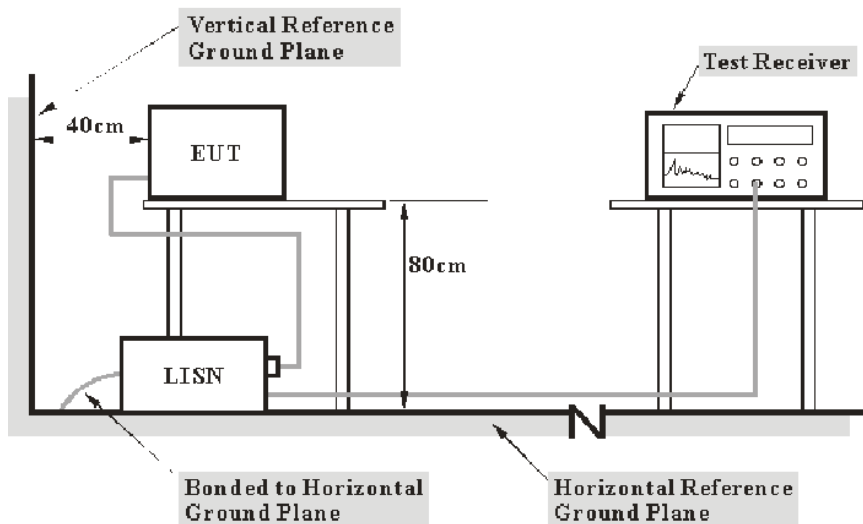

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source or the EUT was connected to a 12 VAC/60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter or EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

- Herein,
- V_C (cord. Reading): corrected voltage amplitude
- V_R : reading voltage amplitude
- A_C : attenuation caused by cable loss
- VDF: voltage division factor of AMN
- C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-20
R&S	L.I.S.N	ESH3-Z5	843331/015	2013-09-25	2014-09-25
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

15.10 dB at 0.476287 MHz in the **Line** conducted mode for powered from adapter

Test Data

Environmental Conditions


Temperature:	27.9 °C
Relative Humidity:	46 %
ATM Pressure:	100 kPa

The testing was performed by Dean Liu on 2014-07-29.

Test Mode: Transmitting

1) Power from adapter (DC 12V)


AC120 V, 60 Hz, Line:

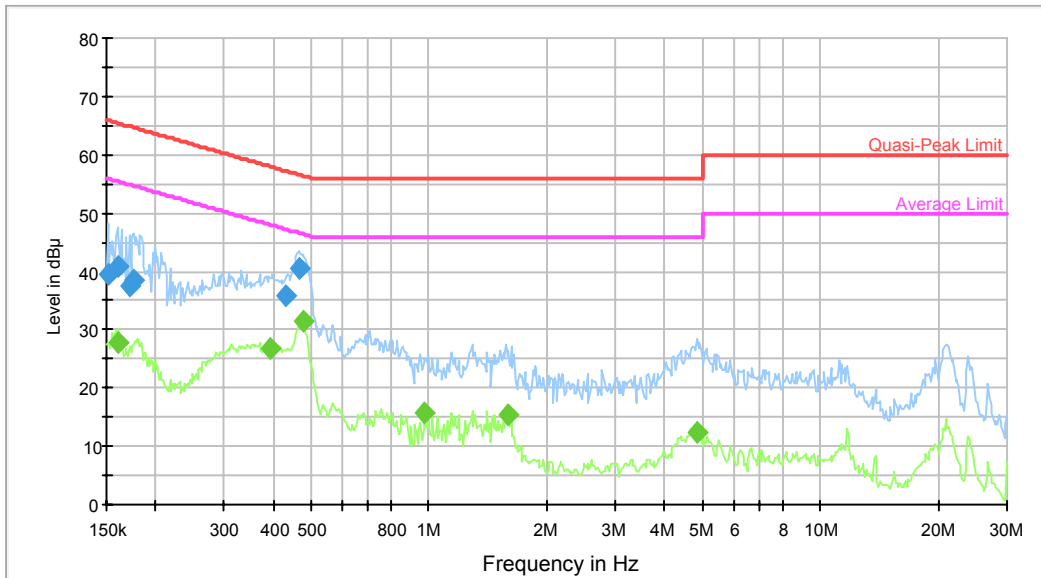

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.151200	39.6	9.000	L1	10.1	26.3	65.9	Compliance
0.159873	40.7	9.000	L1	10.2	24.8	65.5	Compliance
0.171759	37.5	9.000	L1	10.3	27.4	64.9	Compliance
0.175915	38.5	9.000	L1	10.4	26.1	64.7	Compliance
0.429420	35.7	9.000	L1	10.5	21.5	57.3	Compliance
0.468757	40.4	9.000	L1	10.5	16.2	56.5	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.161152	27.8	9.000	L1	10.2	27.6	55.4	Compliance
0.393383	26.9	9.000	L1	10.6	21.1	48.0	Compliance
0.476287	31.3	9.000	L1	10.4	15.1	46.4	Compliance
0.975701	15.8	9.000	L1	10.4	30.2	46.0	Compliance
1.599078	15.4	9.000	L1	10.5	30.6	46.0	Compliance
4.840426	12.5	9.000	L1	10.7	33.5	46.0	Compliance

AC120 V, 60 Hz, Neutral:

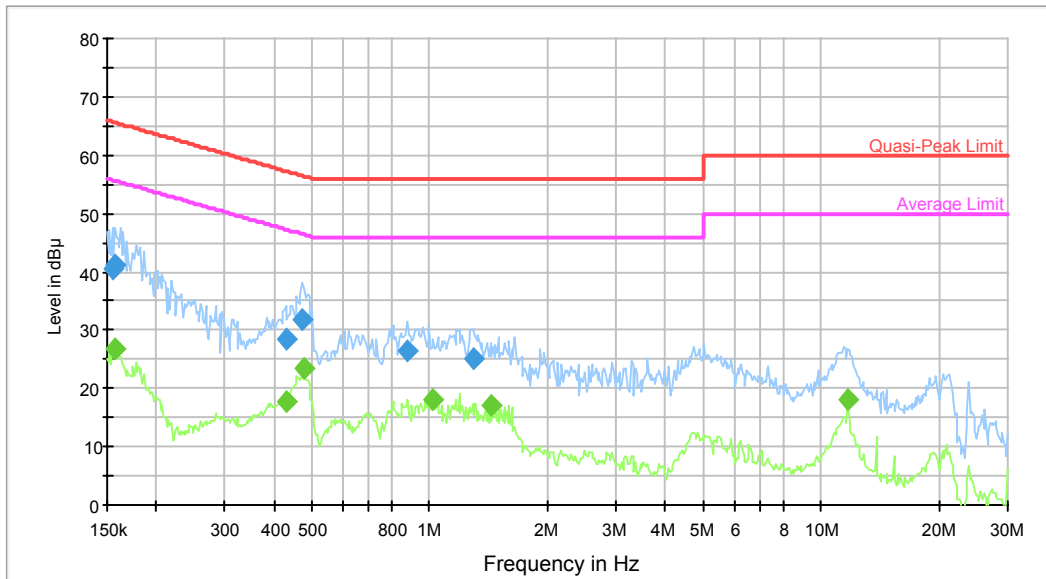


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154858	40.4	9.000	N	10.3	25.3	65.7	Compliance
0.157346	41.0	9.000	N	10.4	24.6	65.6	Compliance
0.429420	28.3	9.000	N	10.7	29.0	57.3	Compliance
0.472507	31.8	9.000	N	10.5	24.6	56.5	Compliance
0.872708	26.3	9.000	N	10.6	29.7	56.0	Compliance
1.289541	25.2	9.000	N	10.5	30.8	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.157346	26.7	9.000	N	10.4	28.9	55.6	Compliance
0.429420	17.8	9.000	N	10.7	29.5	47.3	Compliance
0.480097	23.4	9.000	N	10.5	22.9	46.3	Compliance
1.023481	18.0	9.000	N	10.5	28.0	46.0	Compliance
1.430284	17.2	9.000	N	10.5	28.8	46.0	Compliance
11.722024	18.1	9.000	N	10.6	31.9	50.0	Compliance

2) AC12V/60Hz:


Line:

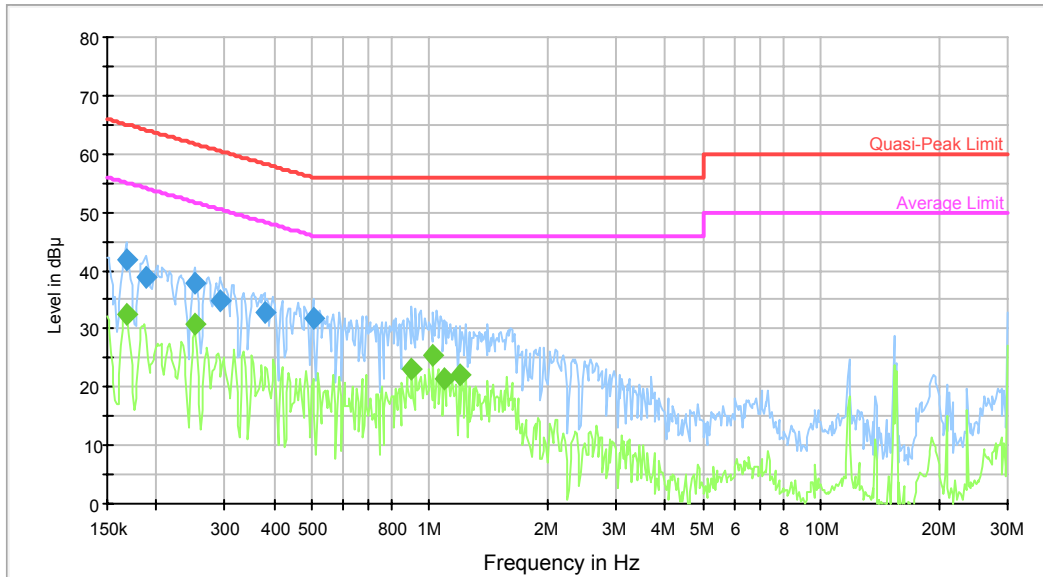

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.167702	41.8	9.000	L1	10.3	23.3	65.1	Compliance
0.188994	38.9	9.000	L1	10.6	25.2	64.1	Compliance
0.251783	37.7	9.000	L1	10.7	24.0	61.7	Compliance
0.290613	34.9	9.000	L1	10.7	25.7	60.5	Compliance
0.378019	32.7	9.000	L1	10.7	25.6	58.3	Compliance
0.503608	31.8	9.000	L1	10.4	24.2	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.169044	32.6	9.000	L1	10.3	22.4	55.0	Compliance
0.251783	30.7	9.000	L1	10.7	21.0	51.7	Compliance
0.900972	23.2	9.000	L1	10.5	22.8	46.0	Compliance
1.023481	25.4	9.000	L1	10.4	20.6	46.0	Compliance
1.090848	21.4	9.000	L1	10.4	24.6	46.0	Compliance
1.190776	22.1	9.000	L1	10.4	23.9	46.0	Compliance

Neutral:

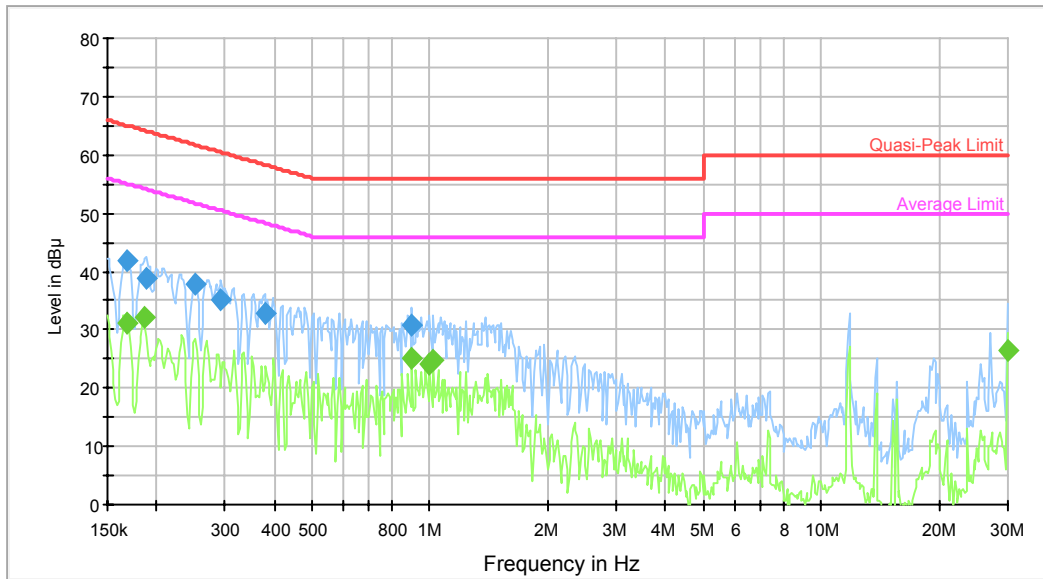

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.167702	41.7	9.000	N	10.6	23.4	65.1	Compliance
0.188994	38.9	9.000	N	11.1	25.2	64.1	Compliance
0.251783	37.8	9.000	N	11.2	23.9	61.7	Compliance
0.292938	35.3	9.000	N	11.2	25.2	60.4	Compliance
0.378019	32.7	9.000	N	10.9	25.6	58.3	Compliance
0.900972	30.7	9.000	N	10.6	25.3	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.167702	31.2	9.000	N	10.6	23.9	55.1	Compliance
0.186006	32.2	9.000	N	11.0	22.0	54.2	Compliance
0.900972	25.2	9.000	N	10.6	20.8	46.0	Compliance
0.999305	24.0	9.000	N	10.5	22.0	46.0	Compliance
1.023481	24.8	9.000	N	10.5	21.2	46.0	Compliance
30.000000	26.4	9.000	N	11.2	23.6	50.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

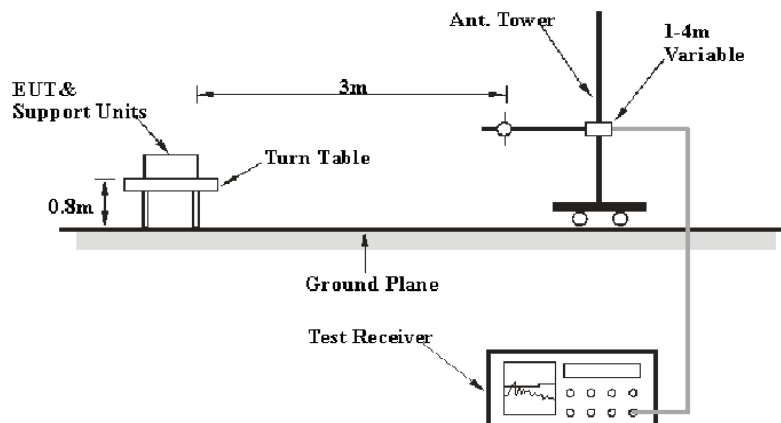

Above 1GHz:

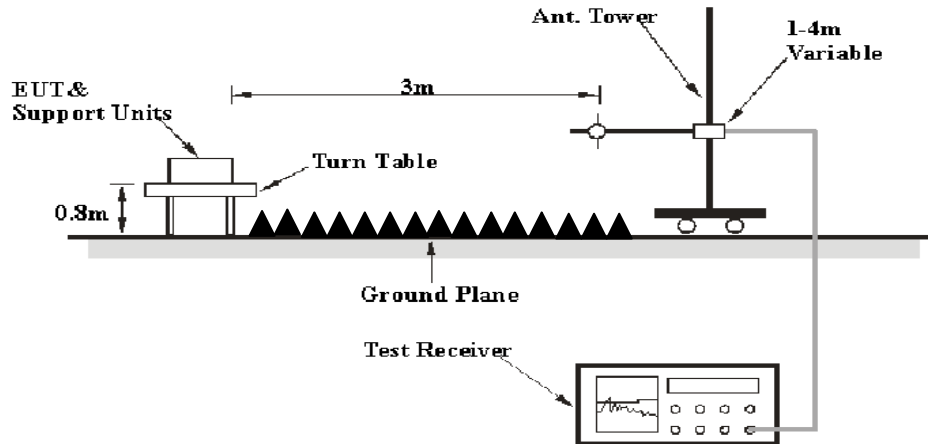

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source or the EUT was connected to a 12VAC/60Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter or EUT was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2013-09-06	2014-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

3.71 dB at 2390 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	26.8 °C
Relative Humidity:	56 %
ATM Pressure:	99.7 kPa

The testing was performed by Dean Liu on 2014-08-03.


Test Mode: Transmitting

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2411 MHz									
2411	74.74	PK	H	25.67	4.42	0.00	104.83	N/A	N/A
2411	57.69	AV	H	25.67	4.42	0.00	87.78	N/A	N/A
2411	75.33	PK	V	25.67	4.42	0.00	105.42	N/A	N/A
2411	57.90	AV	V	25.67	4.42	0.00	87.99	N/A	N/A
2390	61.38	PK	V	25.61	4.39	27.32	64.06	74.00	9.94
2390	47.61	AV	V	25.61	4.39	27.32	50.29	54.00	3.71*
4822	43.92	PK	V	30.64	6.02	27.41	53.17	74.00	20.83
4822	27.69	AV	V	30.64	6.02	27.41	36.94	54.00	17.06
7233	37.69	PK	V	34.16	7.47	25.90	53.42	74.00	20.58
7233	24.96	AV	V	34.16	7.47	25.90	40.69	54.00	13.31
9644	33.26	PK	V	36.05	8.80	27.47	50.64	74.00	23.36
9644	20.63	AV	V	36.05	8.80	27.47	38.01	54.00	15.99
8623	35.62	PK	V	35.90	7.63	26.80	52.35	74.00	21.65
8623	22.74	AV	V	35.90	7.63	26.80	39.47	54.00	14.53
892.4	33.48	QP	V	22.8	3.66	22.19	37.75	46.00	8.25
Middle Channel: 2436 MHz									
2436	74.50	PK	H	25.73	4.41	0.00	104.64	N/A	N/A
2436	59.26	AV	H	25.73	4.41	0.00	89.40	N/A	N/A
2436	76.14	PK	V	25.73	4.41	0.00	106.28	N/A	N/A
2436	60.75	AV	V	25.73	4.41	0.00	90.89	N/A	N/A
4872	44.36	PK	V	30.77	6.09	27.42	53.80	74.00	20.20
4872	30.21	AV	V	30.77	6.09	27.42	39.65	54.00	14.35
7308	38.29	PK	V	34.34	7.51	25.88	54.26	74.00	19.74
7308	24.84	AV	V	34.34	7.51	25.88	40.81	54.00	13.19
9744	32.85	PK	V	36.29	8.83	27.25	50.72	74.00	23.28
9744	30.41	AV	V	36.29	8.83	27.25	48.28	54.00	5.72
8623	34.87	PK	V	35.90	7.63	26.80	51.60	74.00	22.40
8623	22.34	AV	V	35.90	7.63	26.80	39.07	54.00	14.93
892.4	33.56	QP	V	22.8	3.66	22.19	37.83	46.00	8.17
High Channel: 2461 MHz									
2461	75.85	PK	H	25.8	4.43	0.00	106.08	N/A	N/A
2461	60.21	AV	H	25.8	4.43	0.00	90.44	N/A	N/A
2461	76.13	PK	V	25.8	4.43	0.00	106.36	N/A	N/A
2461	61.87	AV	V	25.8	4.43	0.00	92.10	N/A	N/A
2483.5	62.79	PK	V	25.86	4.49	27.36	65.78	74.00	8.22
2483.5	42.40	AV	V	25.86	4.49	27.36	45.39	54.00	8.61
4922	44.63	PK	V	30.90	5.98	27.43	54.08	74.00	19.92
4922	30.17	AV	V	30.90	5.98	27.43	39.62	54.00	14.38
7383	38.22	PK	V	34.52	7.55	25.86	54.43	74.00	19.57
7383	25.36	AV	V	34.52	7.55	25.86	41.57	54.00	12.43
9844	32.52	PK	V	36.53	8.85	26.95	50.95	74.00	23.05
9844	20.44	AV	V	36.53	8.85	26.95	38.87	54.00	15.13
8623	34.68	PK	V	35.90	7.63	26.80	51.41	74.00	22.59
8623	21.96	AV	V	35.90	7.63	26.80	38.69	54.00	15.31
892.4	33.67	QP	V	22.80	3.66	22.19	37.94	46.00	8.06


*Within measurement uncertainty!

Conducted Spurious Emissions at Antenna Port


Low Channel

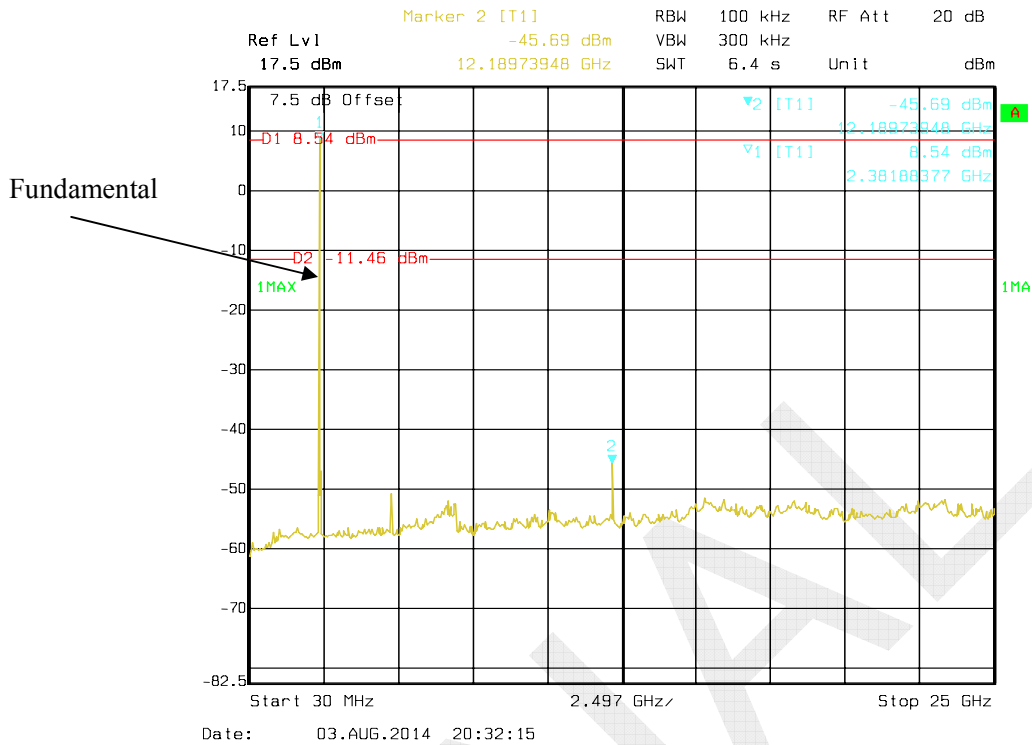

Middle Channel

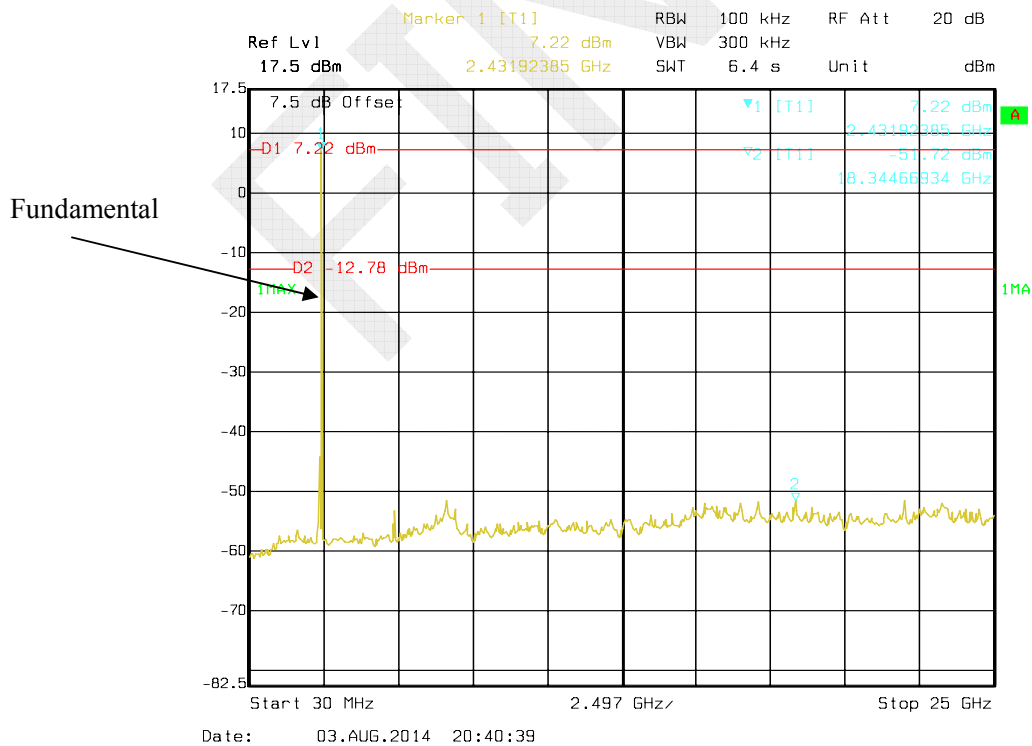

High Channel

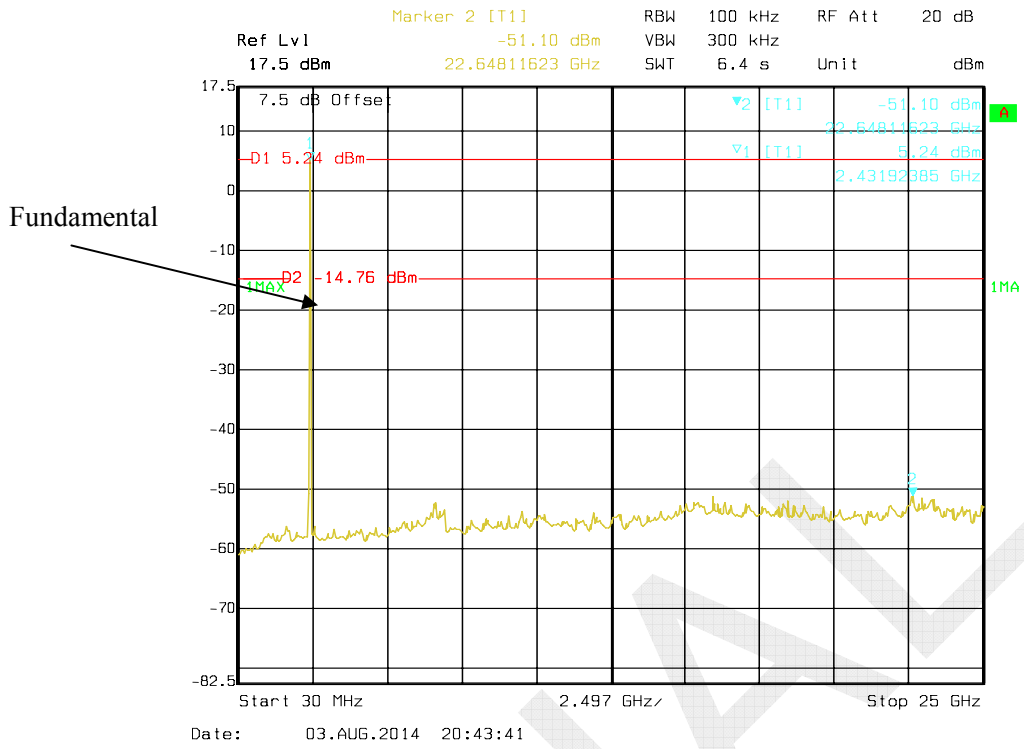

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	30.1 °C
Relative Humidity:	65 %
ATM Pressure:	99.6 kPa

The testing was performed by Dean Liu on 2014-08-05.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2411	3.006	1.469	Pass
Adjacent	2414			
Middle	2436	2.004	1.469	Pass
Adjacent	2438			
High	2461	3.006	1.449	Pass
Adjacent	2458			

Note: Limit= (2/3) of 20 dB bandwidth


Low Channel

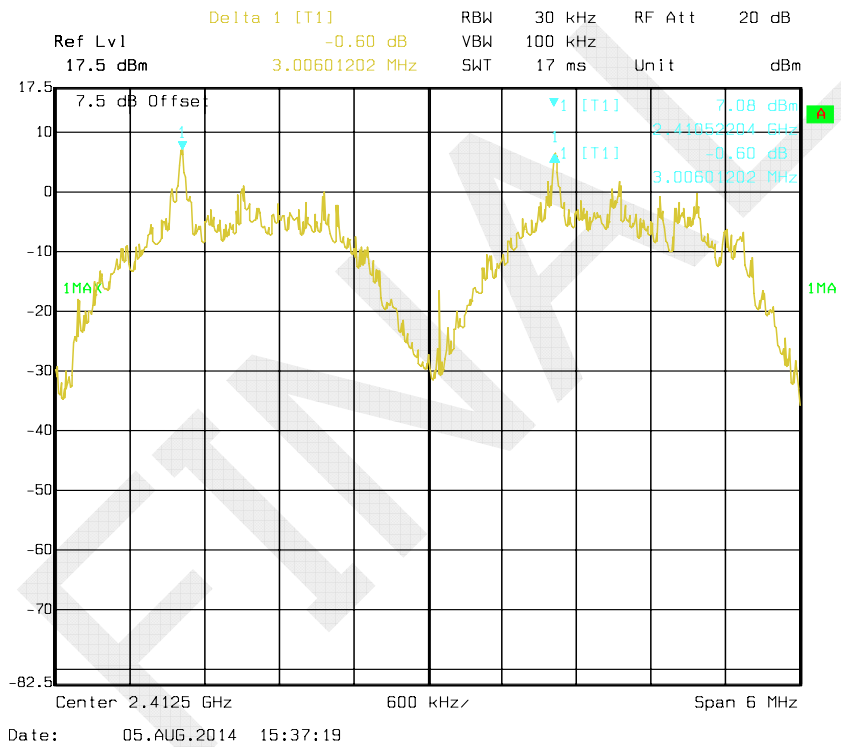

Middle Channel

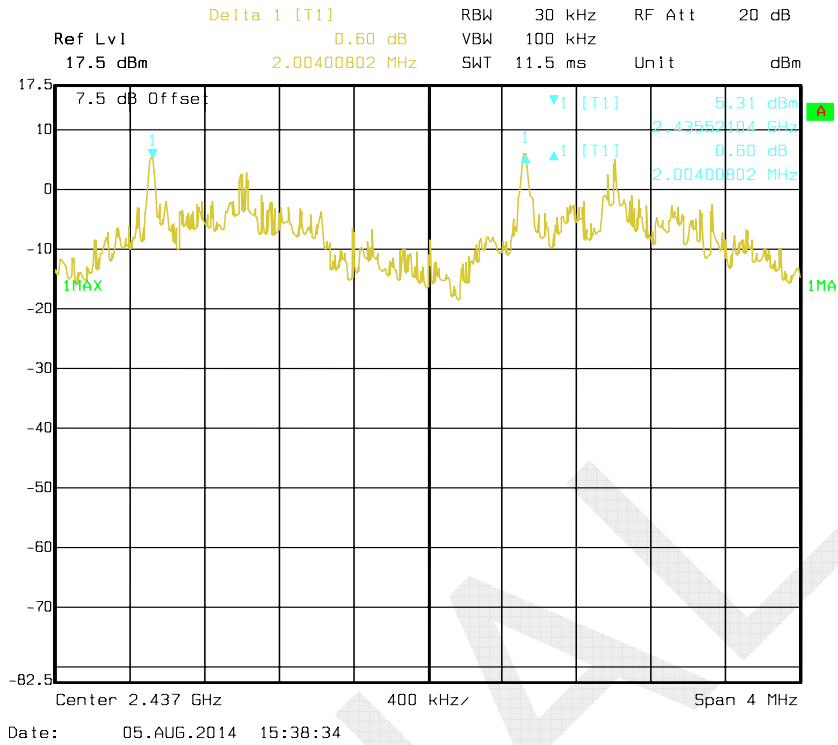

High Channel

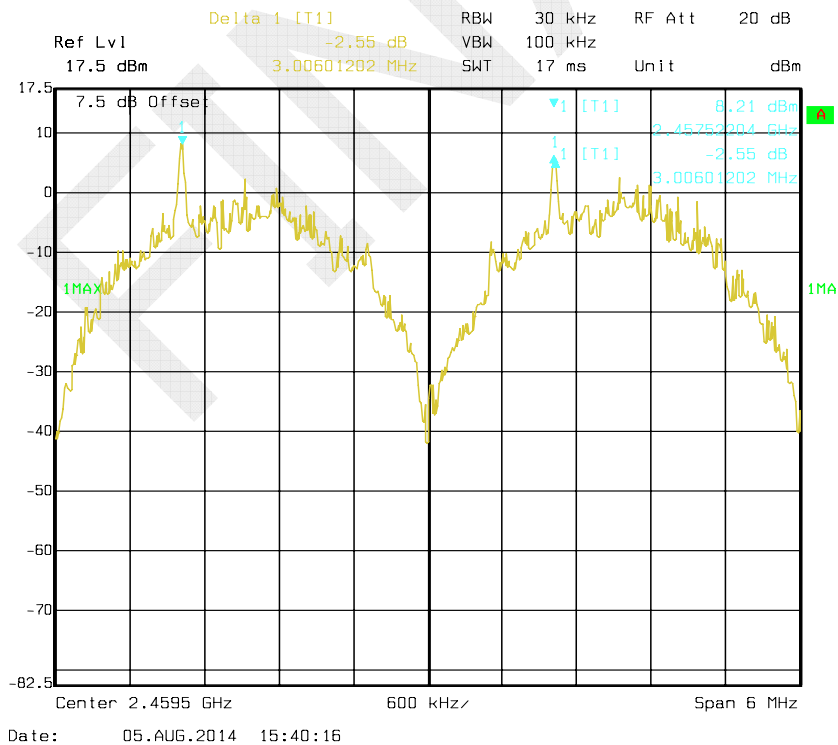

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	30.2 °C
Relative Humidity:	58 %
ATM Pressure:	99.7 kPa

The testing was performed by Dean Liu on 2014-08-03.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2411	2.204
Middle	2436	2.204
High	2461	2.174


Please refer to the following plots.

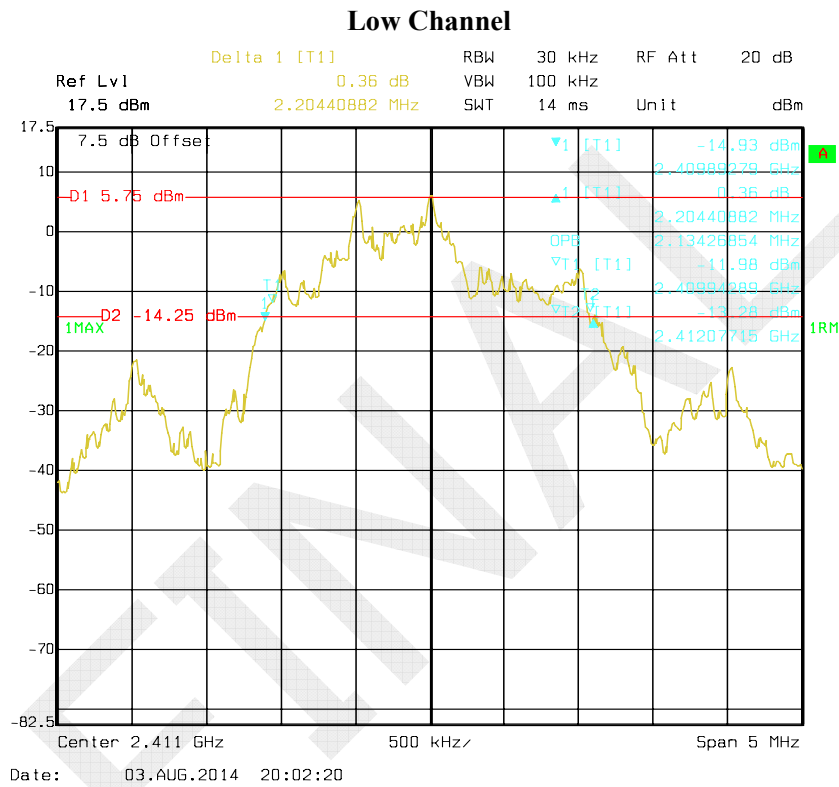

Middle Channel

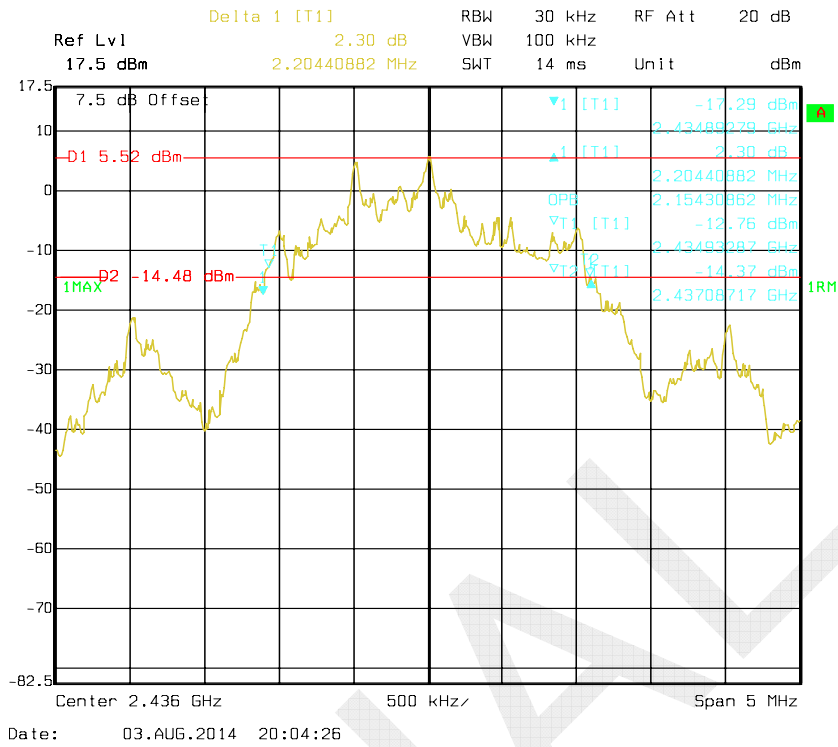

High Channel

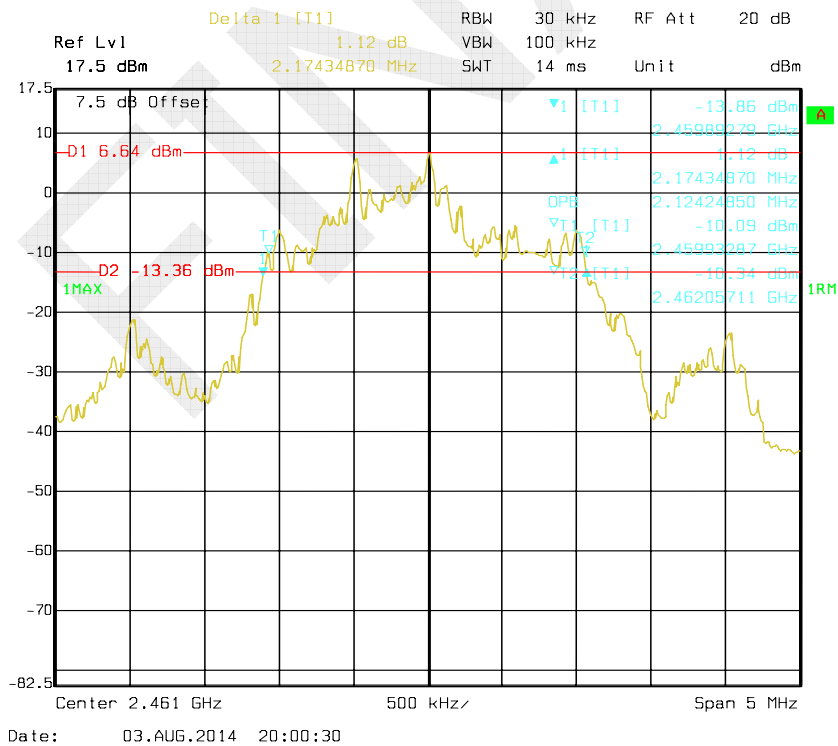

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	30.1 °C
Relative Humidity:	65 %
ATM Pressure:	99.6 kPa

The testing was performed by Dean Liu on 2014-08-05.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	16	≥15

Number of Hopping Channels

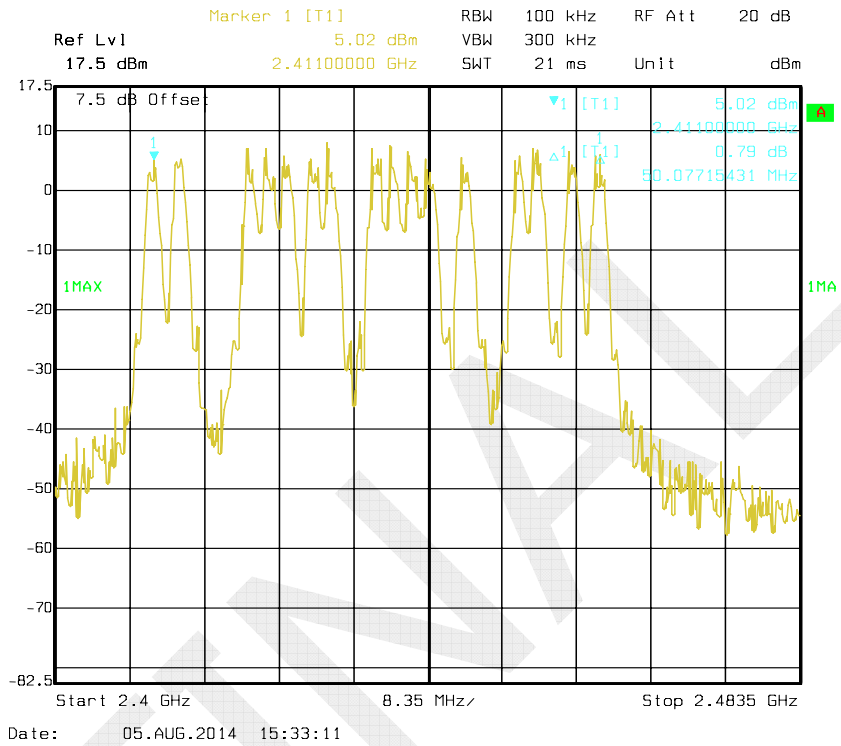

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels *hopping NO. * 0.4s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	30.2 °C
Relative Humidity:	58 %
ATM Pressure:	99.7 kPa

The testing was performed by Dean Liu on 2014-08-03.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	0.165	0.033	0.4	Pass
Middle	0.165	0.033	0.4	Pass
High	0.165	0.033	0.4	Pass
Dwell Time(s)= time slot length(s)*500/16*16 * 0.4				

Note: The EUT hopping 500 times per second, which was declared by manufacturer.


Low Channel

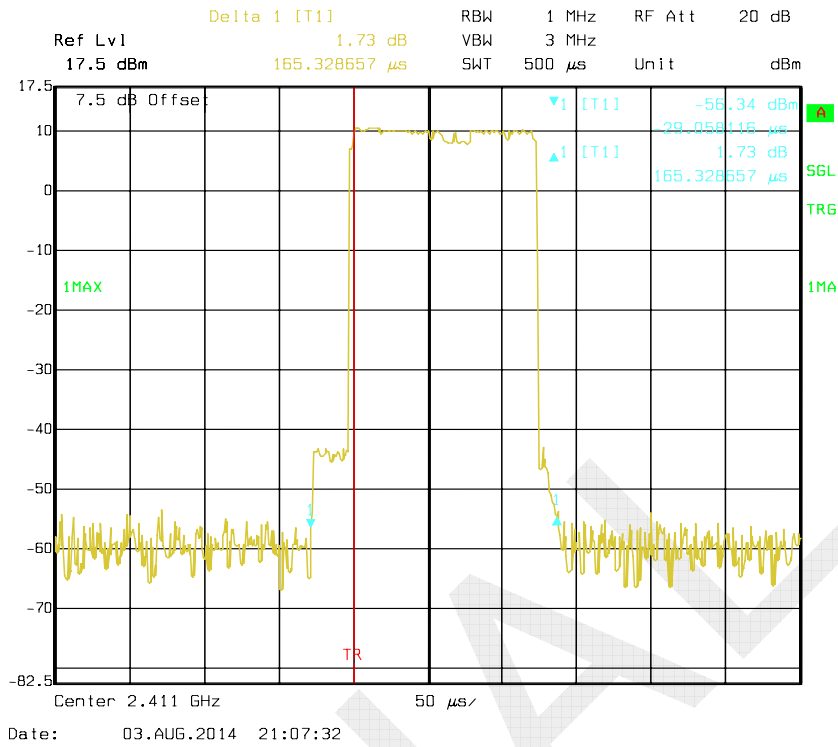

Middle Channel

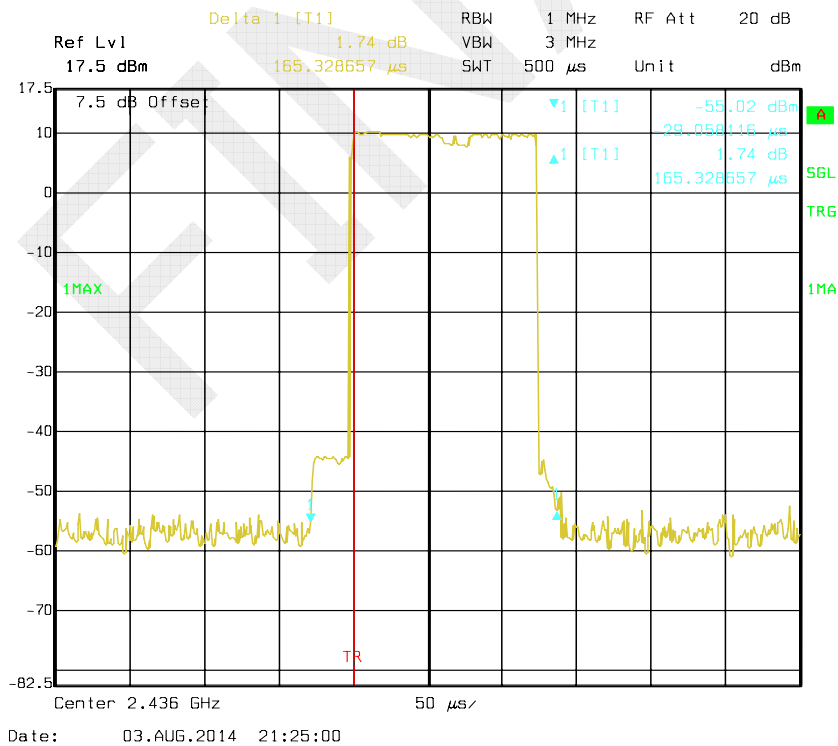

High Channel

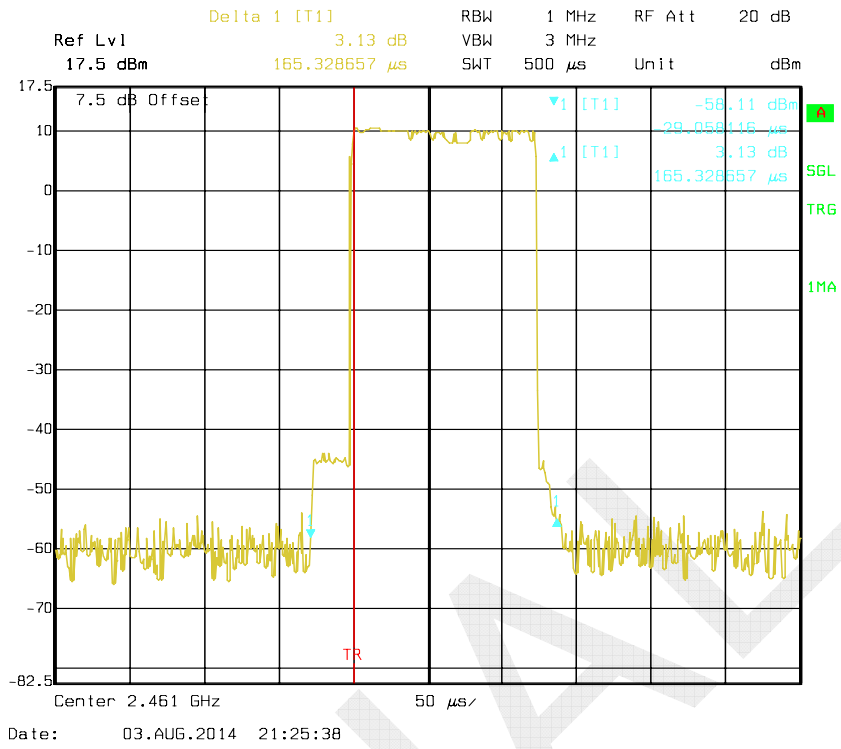

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	30.2 °C
Relative Humidity:	58 %
ATM Pressure:	99.7 kPa


The testing was performed by Dean Liu on 2014-08-03.

Test Result: Compliance.


Test Mode: Transmitting

Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
Low	2411	10.68	21
Middle	2436	10.24	21
High	2461	10.86	21


Note: The data above was tested in conducted mode.

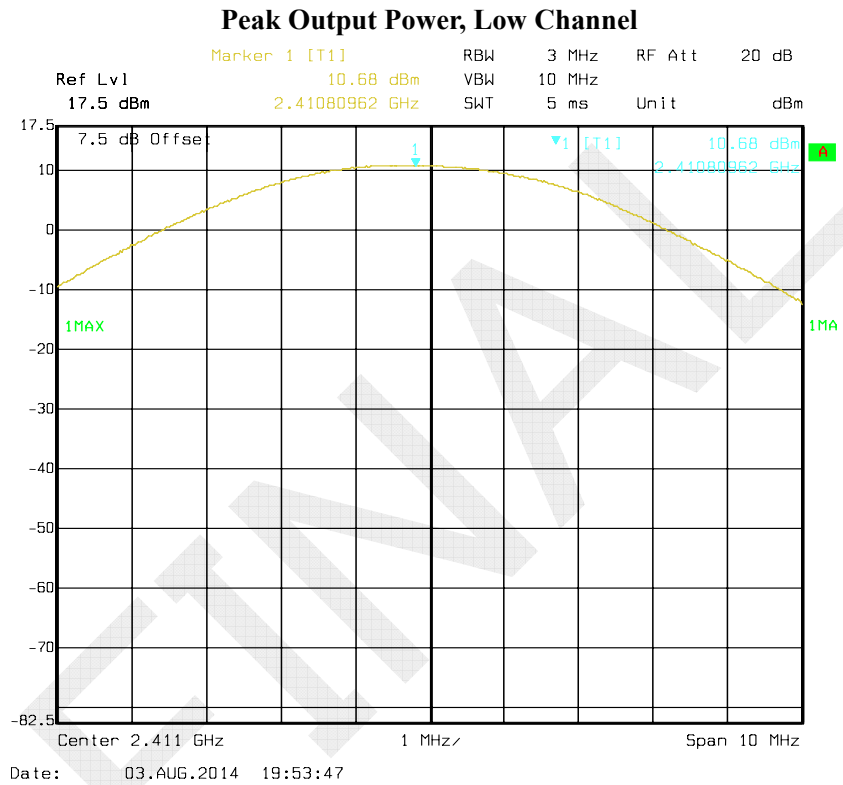

Peak Output Power, Middle Channel

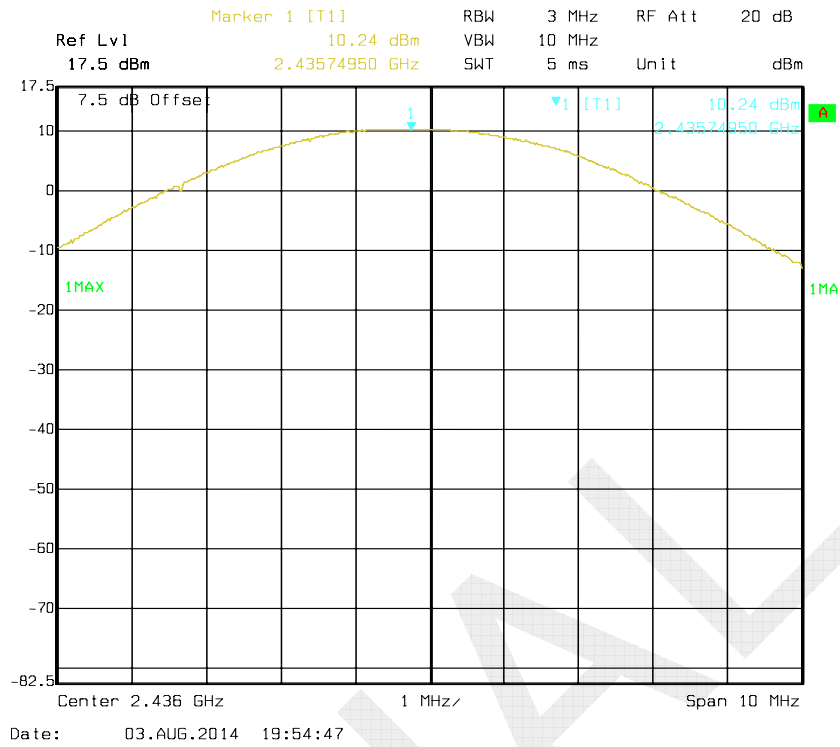

Peak Output Power, High Channel

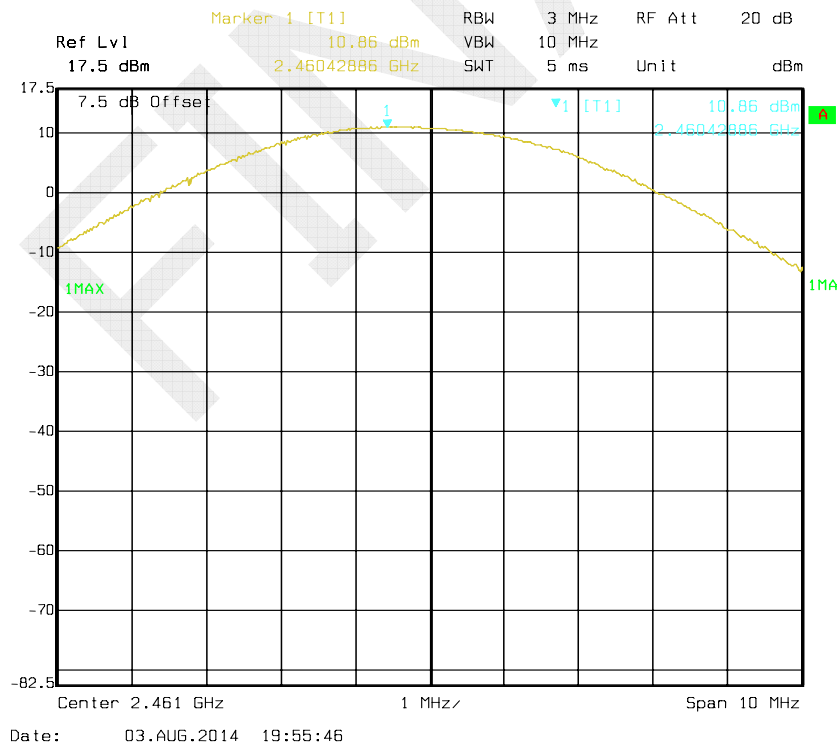

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	30.2 °C
Relative Humidity:	58 %
ATM Pressure:	99.7 kPa


The testing was performed by Dean Liu on 2014-08-03.

Test Result: Compliance

Band Edge, Left Side

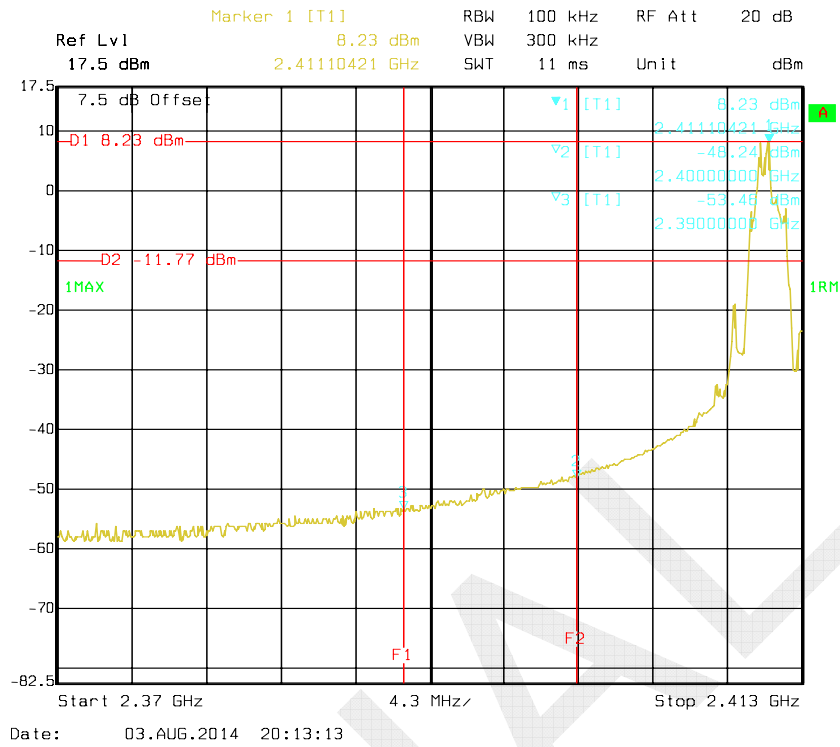

Band Edge, Right Side

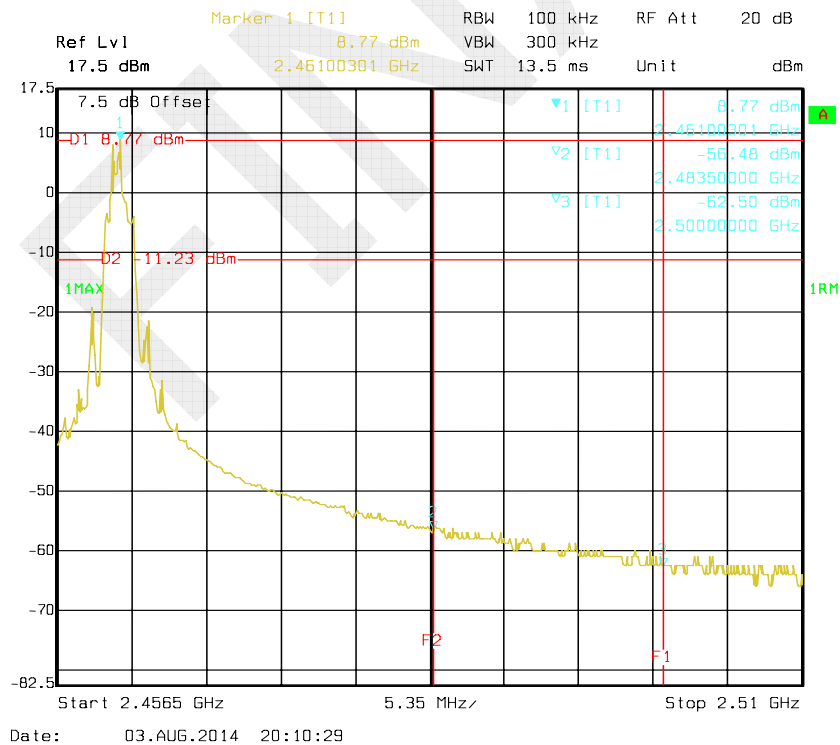

***** END OF REPORT *****