



Band-edge Compliance

DH5 - Channel 00 (2402MHz)

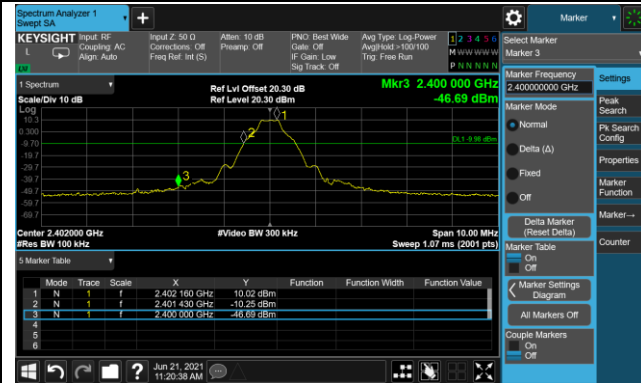


DH5 - Channel 78 (2480MHz)

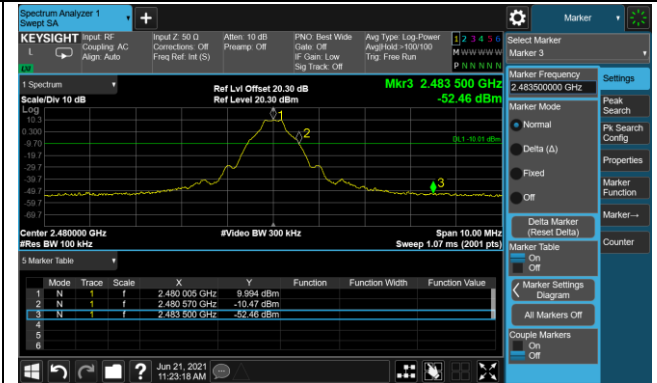

2DH5 - Channel 00 (2402MHz)



2DH5 - Channel 78 (2480MHz)

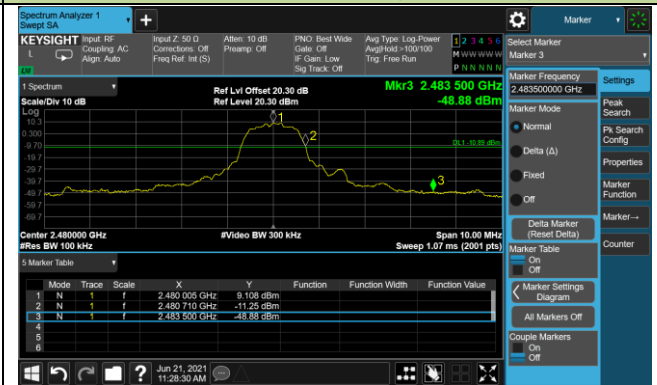

3DH5 - Channel 00 (2402MHz)




3DH5 - Channel 78 (2480MHz)




Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

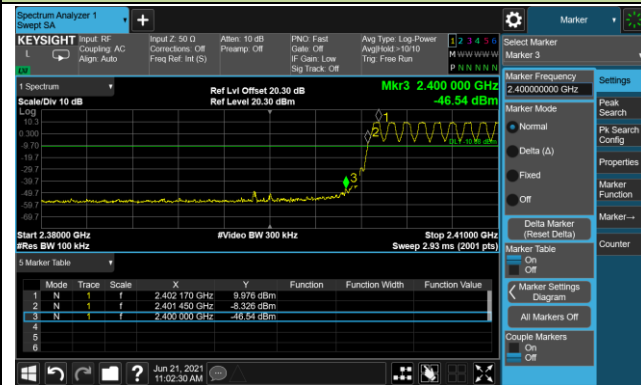

DH5 - Channel 78 (2480MHz)

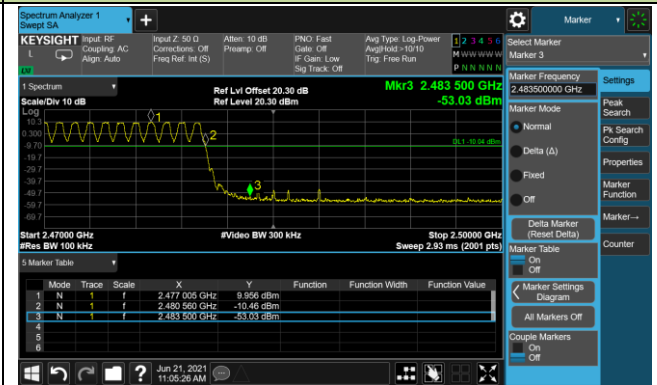

2DH5 - Channel 00 (2402MHz)

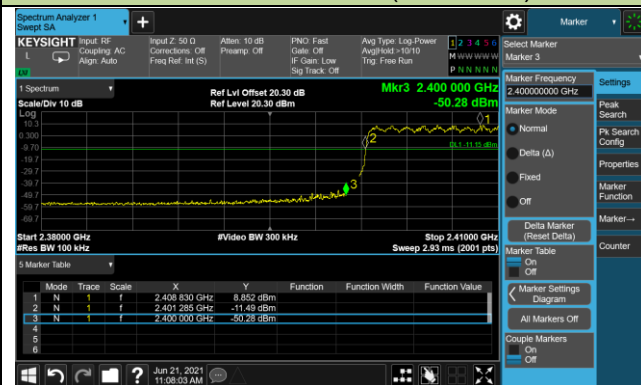

2DH5 - Channel 78 (2480MHz)



3DH5 - Channel 00 (2402MHz)



3DH5 - Channel 78 (2480MHz)



5.8. Conducted Spurious Emissions Measurement

5.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


5.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

5.8.3. Test Setting

1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

5.8.4. Test Setup

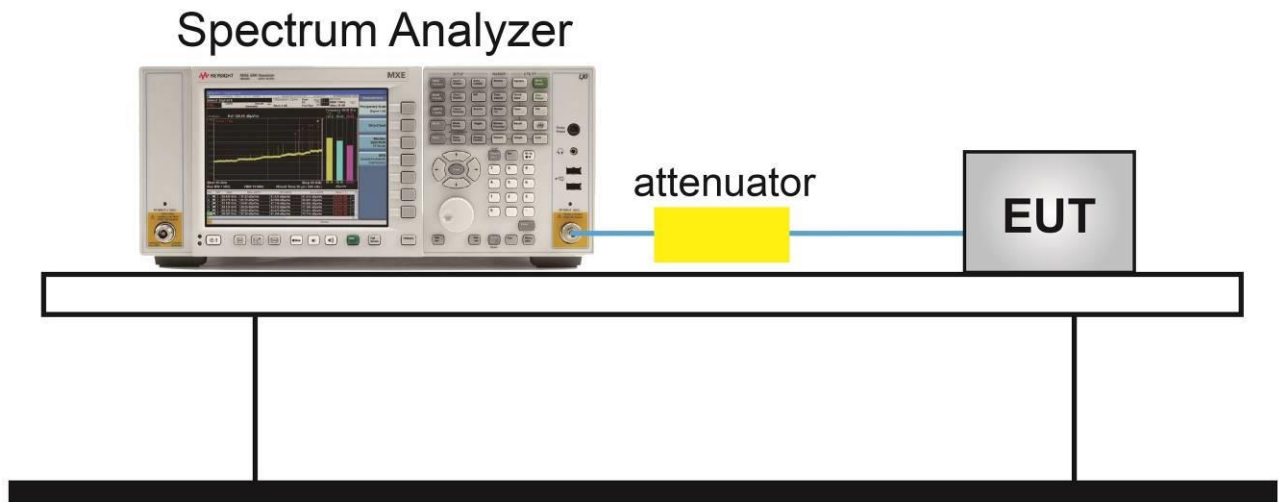

5.8.5. Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2021/06/24		

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions



Channel 00 (2402MHz)



Channel 39 (2441MHz)




Channel 78 (2480MHz)

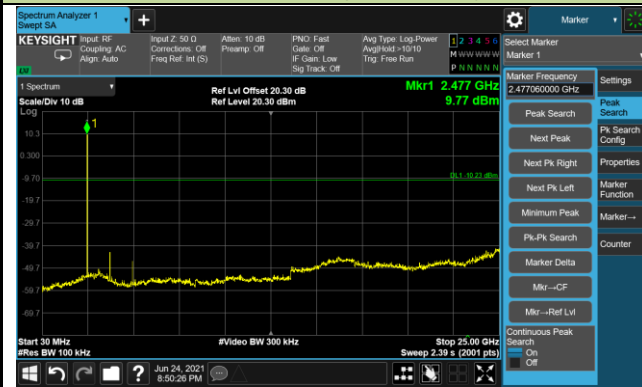

2DH5 Conducted Spurious Emissions



Channel 00 (2402MHz)

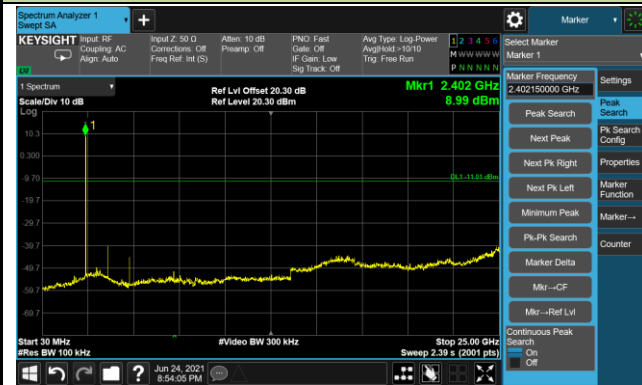

Channel 39 (2441MHz)




Channel 78 (2480MHz)

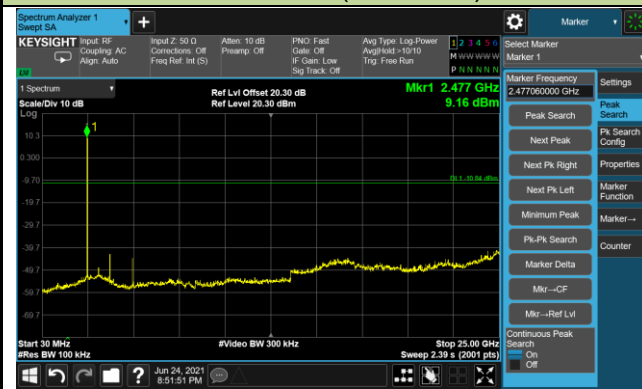


3DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)

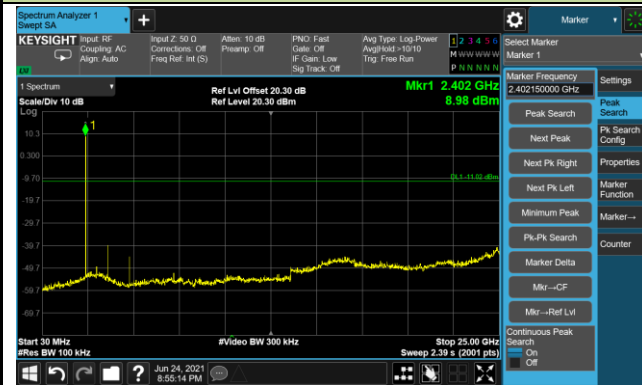

Channel 39 (2441MHz)

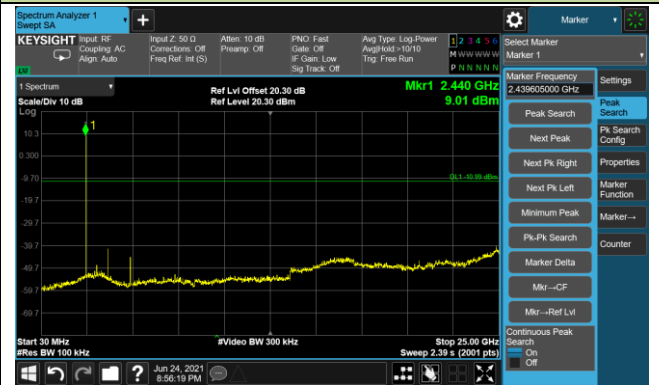

Channel 78 (2480MHz)



5.9. Radiated Spurious Emission Measurement

5.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.4 & 6.5 & 6.6

5.9.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = As specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = Auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

5.9.4. Test Setup

Below 1GHz Test Setup:

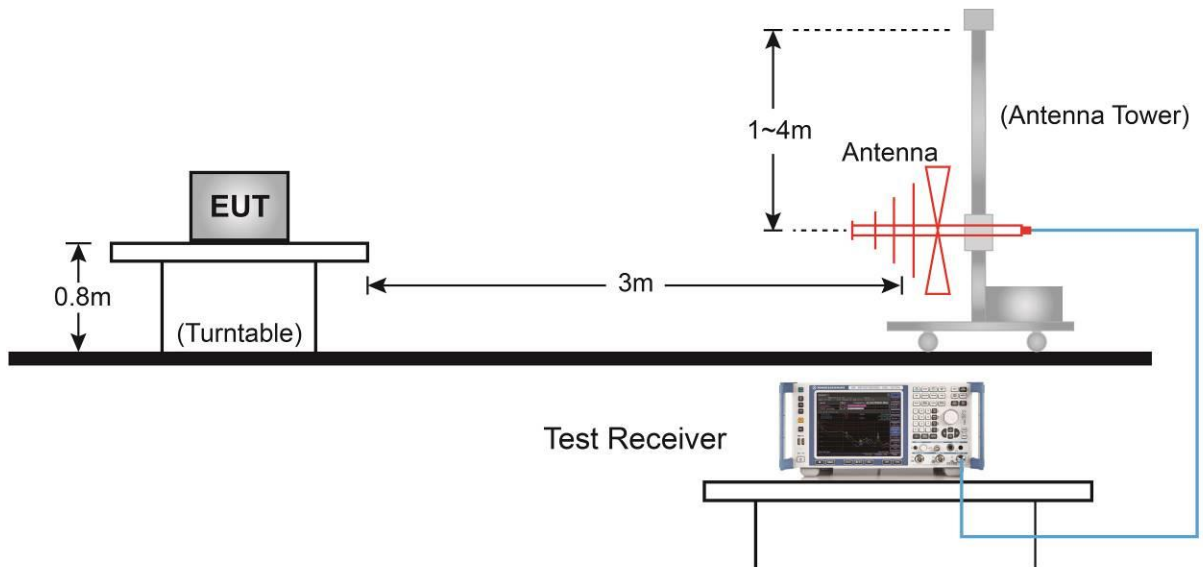

Above 1GHz Test Setup:

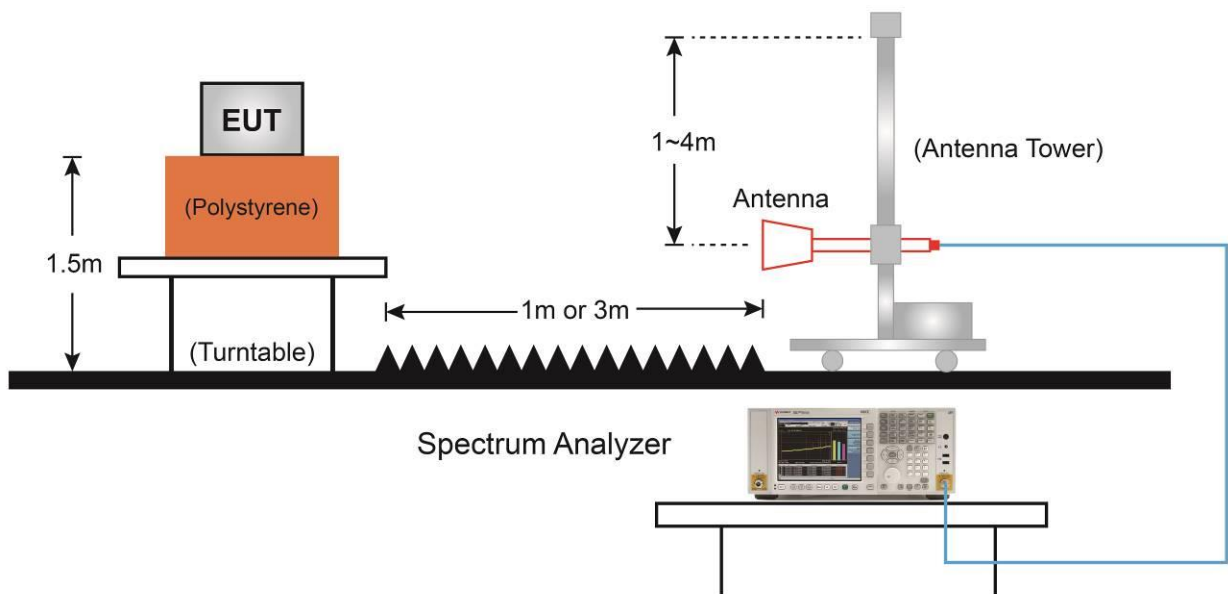

5.9.5. Test Result

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	DH5	Test Date	2021/06/20
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
9398.0	46.8	2.2	49.0	74.0	-25.0	Peak	Horizontal
10800.5	46.8	4.3	51.1	74.0	-22.9	Peak	Horizontal
11429.5	45.4	5.5	50.9	74.0	-23.1	Peak	Horizontal
10800.5	45.7	4.3	50.0	74.0	-24.0	Peak	Vertical
11429.5	44.3	5.5	49.8	74.0	-24.2	Peak	Vertical
12203.0	45.2	4.6	49.8	74.0	-24.2	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	DH5	Test Date	2021/06/20
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7324.0	53.2	-1.7	51.5	74.0	-22.5	Peak	Horizontal
11064.0	45.0	5.4	50.4	74.0	-23.6	Peak	Horizontal
12075.5	45.2	4.5	49.7	74.0	-24.3	Peak	Horizontal
7324.0	52.7	-1.7	51.0	74.0	-23.0	Peak	Vertical
10715.5	46.4	3.7	50.1	74.0	-23.9	Peak	Vertical
11336.0	45.4	5.2	50.6	74.0	-23.4	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	DH5	Test Date	2021/06/20
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7443.0	52.5	-1.1	51.4	74.0	-22.6	Peak	Horizontal
11412.5	46.0	5.3	51.3	74.0	-22.7	Peak	Horizontal
12092.5	45.4	4.6	50.0	74.0	-24.0	Peak	Horizontal
10766.5	46.0	4.3	50.3	74.0	-23.7	Peak	Vertical
11412.5	44.9	5.3	50.2	74.0	-23.8	Peak	Vertical
12653.5	45.0	4.2	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	2DH5	Test Date	2021/06/20
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
11064.0	45.4	5.4	50.8	74.0	-23.2	Peak	Horizontal
11531.5	45.6	5.5	51.1	74.0	-22.9	Peak	Horizontal
12092.5	45.1	4.6	49.7	74.0	-24.3	Peak	Horizontal
10868.5	45.1	4.8	49.9	74.0	-24.1	Peak	Vertical
11285.0	45.6	5.1	50.7	74.0	-23.3	Peak	Vertical
12560.0	45.3	4.2	49.5	74.0	-24.5	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	2DH5	Test Date	2021/06/20
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7324.0	53.2	-1.7	51.5	74.0	-22.5	Peak	Horizontal
11344.5	45.8	5.0	50.8	74.0	-23.2	Peak	Horizontal
12449.5	44.9	4.2	49.1	74.0	-24.9	Peak	Horizontal
7324.0	51.9	-1.7	50.2	74.0	-23.8	Peak	Vertical
10783.5	45.6	4.4	50.0	74.0	-24.0	Peak	Vertical
11259.5	45.9	4.9	50.8	74.0	-23.2	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	2DH5	Test Date	2021/06/20
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7443.0	51.5	-1.1	50.4	74.0	-23.6	Peak	Horizontal
10868.5	44.9	4.8	49.7	74.0	-24.3	Peak	Horizontal
11412.5	45.5	5.3	50.8	74.0	-23.2	Peak	Horizontal
11166.0	46.5	5.1	51.6	74.0	-22.4	Peak	Vertical
11514.5	46.2	5.4	51.6	74.0	-22.4	Peak	Vertical
12152.0	46.5	4.5	51.0	74.0	-23.0	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	3DH5	Test Date	2021/06/20
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
11064.0	45.2	5.4	50.6	74.0	-23.4	Peak	Horizontal
11718.5	45.9	4.5	50.4	74.0	-23.6	Peak	Horizontal
12594.0	45.6	4.1	49.7	74.0	-24.3	Peak	Horizontal
11064.0	45.1	5.4	50.5	74.0	-23.5	Peak	Vertical
11438.0	45.3	5.5	50.8	74.0	-23.2	Peak	Vertical
12628.0	44.9	4.3	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	3DH5	Test Date	2021/06/20
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7324.0	54.6	-1.7	52.9	74.0	-21.1	Peak	Horizontal
7324.0	50.6	-1.7	48.9	54.0	-5.1	Average	Horizontal
11378.5	45.5	4.9	50.4	74.0	-23.6	Peak	Horizontal
12118.0	45.2	4.7	49.9	74.0	-24.1	Peak	Horizontal
7324.0	51.4	-1.7	49.7	74.0	-24.3	Peak	Vertical
10894.0	45.2	4.7	49.9	74.0	-24.1	Peak	Vertical
11438.0	45.0	5.5	50.5	74.0	-23.5	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Stephen Dong
Test Mode	3DH5	Test Date	2021/06/20
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7443.0	52.0	-1.1	50.9	74.0	-23.1	Peak	Horizontal
10809.0	46.9	4.4	51.3	74.0	-22.7	Peak	Horizontal
11293.5	46.0	5.0	51.0	74.0	-23.0	Peak	Horizontal
7443.0	50.3	-1.1	49.2	74.0	-24.8	Peak	Vertical
10894.0	45.5	4.7	50.2	74.0	-23.8	Peak	Vertical
11531.5	44.4	5.5	49.9	74.0	-24.1	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: SIP-AC1	Time: 2021/06/20
Limit: FCC_Part15.209_RE(3m)_Class B	Engineer: Mero Zhou
Probe: SIP-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Worst Case Mode: Transmit by DH5 at Channel 2402MHz	

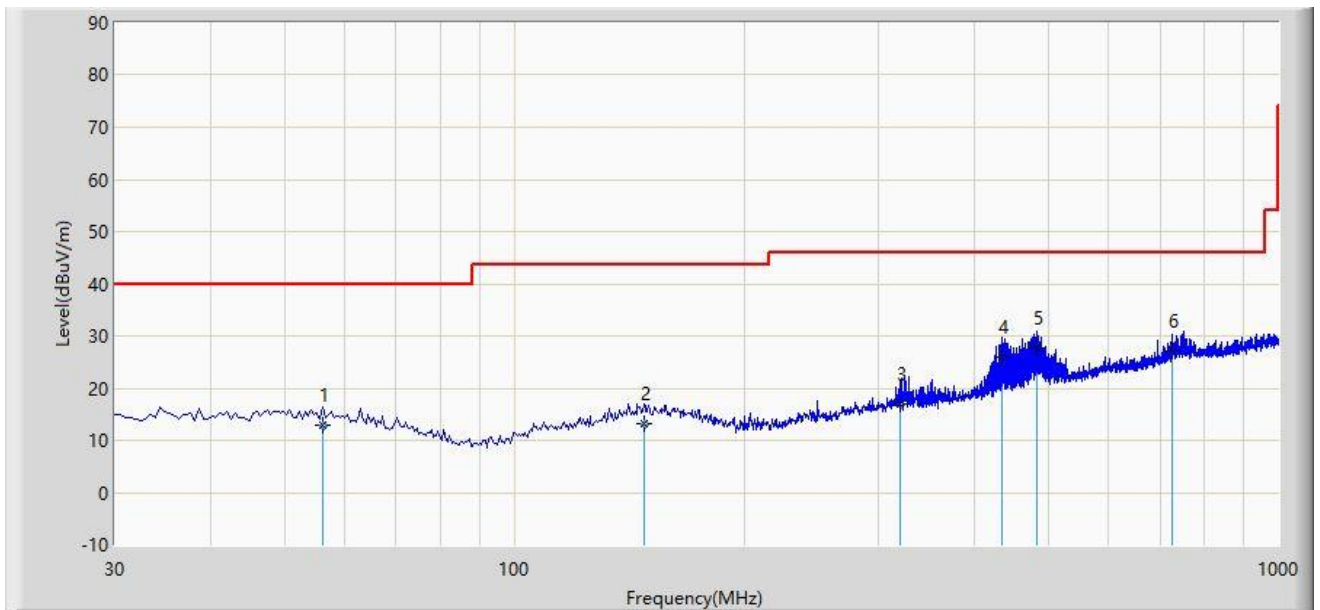

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			56.190	12.885	-4.400	-27.115	40.000	17.285	QP
2			147.855	13.102	-4.900	-30.398	43.500	18.002	QP
3			320.030	17.028	-1.800	-28.972	46.000	18.828	QP
4			434.005	25.930	4.200	-20.070	46.000	21.730	QP
5		*	482.020	27.741	5.300	-18.259	46.000	22.441	QP
6			725.975	27.059	0.200	-18.941	46.000	26.859	QP


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: SIP-AC1	Time: 2021/06/20
Limit: FCC_Part15.209_RE(3m)_Class B	Engineer: Mero Zhou
Probe: SIP-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Worst Case Mode: Transmit by DH5 at Channel 2402MHz	

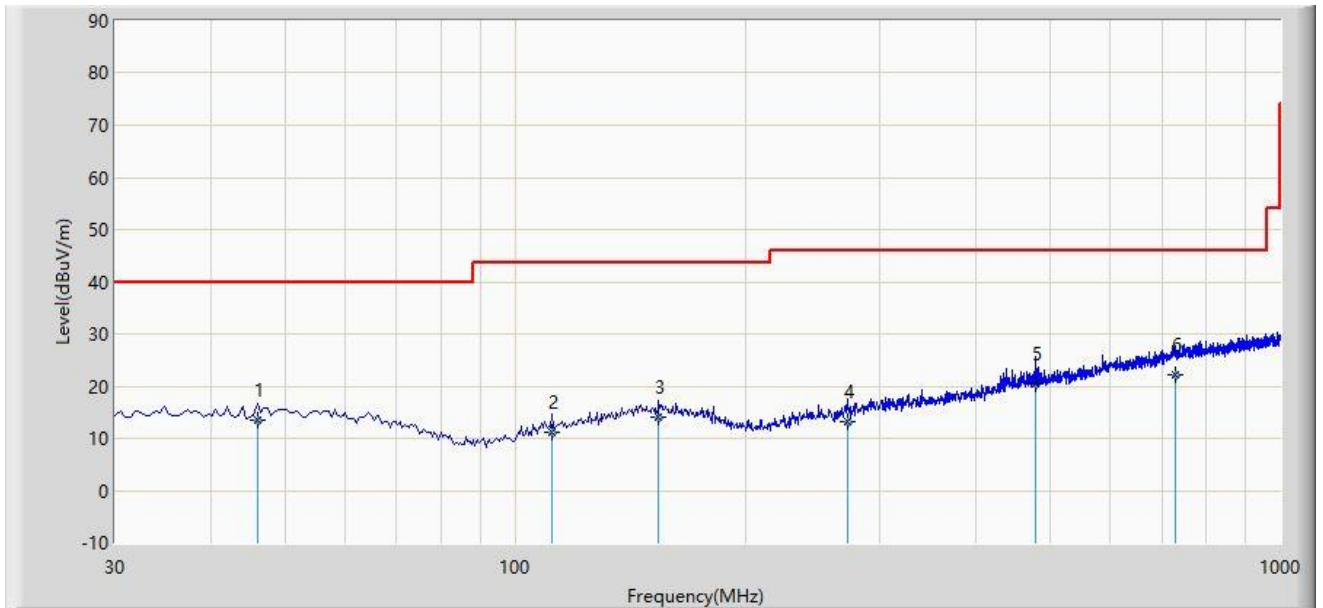

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			46.005	13.601	-4.200	-26.399	40.000	17.801	QP
2			111.965	11.103	-3.900	-32.397	43.500	15.003	QP
3			154.160	14.198	-3.900	-29.302	43.500	18.098	QP
4			272.015	13.302	-4.100	-32.698	46.000	17.402	QP
5			478.140	20.525	-1.900	-25.475	46.000	22.425	QP
6		*	728.400	22.208	-4.800	-23.792	46.000	27.008	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

5.10. Radiated Restricted Band Edge Measurement

5.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.10.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.6 & 6.10

5.10.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

5.10.4. Test Setup

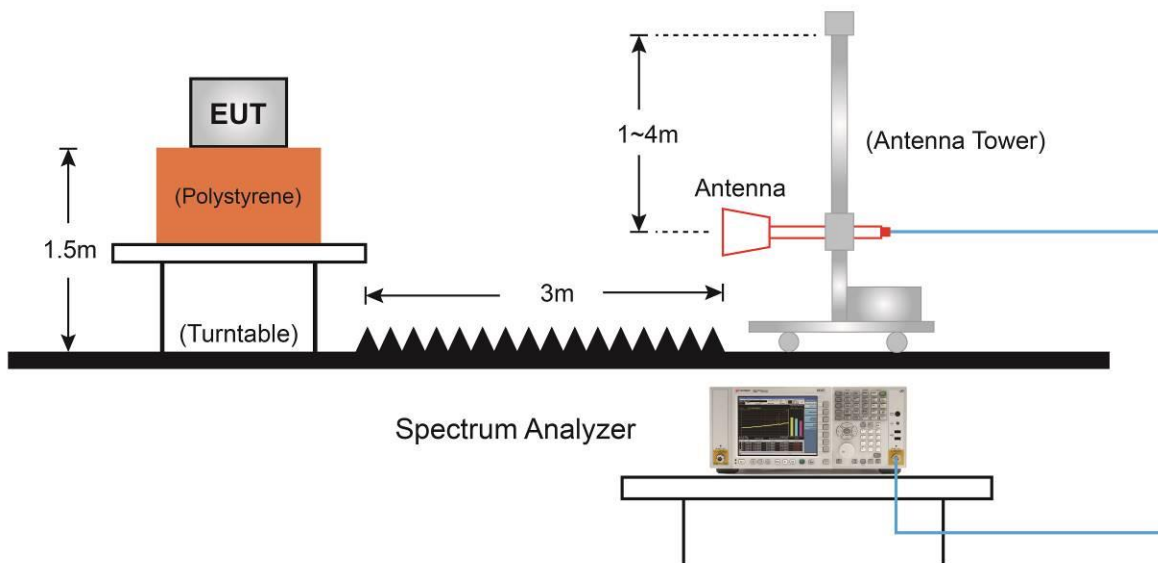

5.10.5. Test Result

Site: SIP-AC2	Time: 2021/06/20 - 13:25
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by DH5 at Channel 2402MHz	

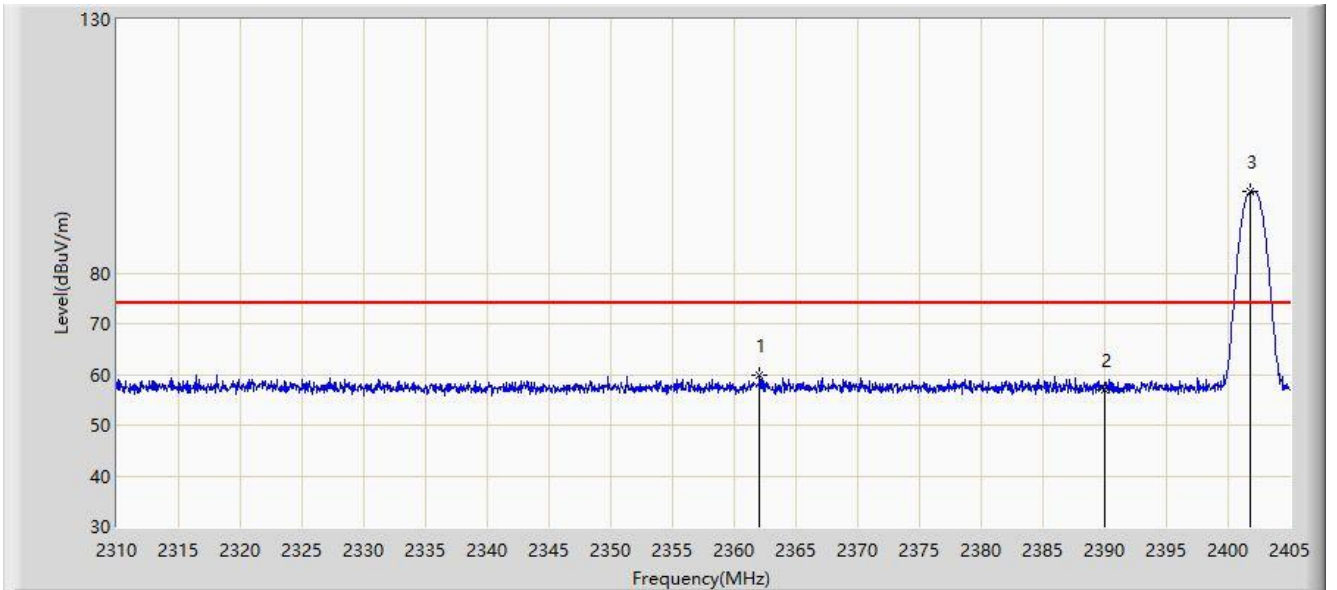


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.060	59.794	27.282	-14.206	74.000	32.512	PK
2			2390.000	57.040	24.636	-16.960	74.000	32.404	PK
3		*	2401.817	95.997	63.631	N/A	N/A	32.366	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:29
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by DH5 at Channel 2402MHz	

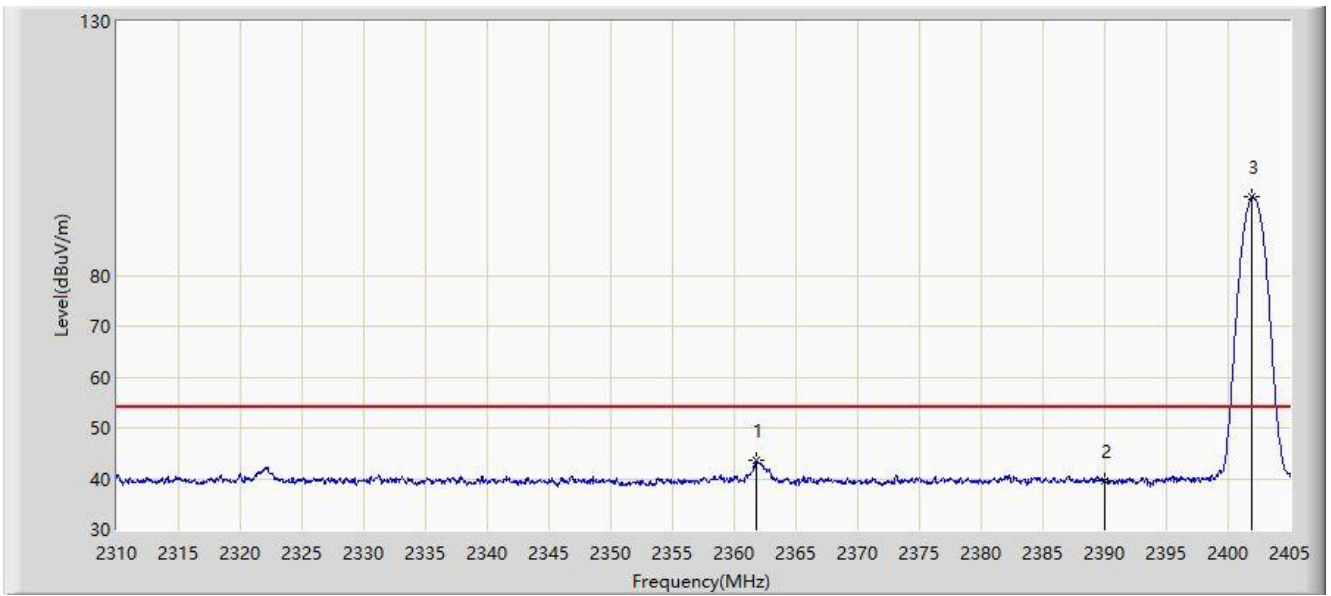


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.823	43.562	11.050	-10.438	54.000	32.512	AV
2			2390.000	39.529	7.125	-14.471	54.000	32.404	AV
3		*	2401.960	95.375	63.009	N/A	N/A	32.366	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:29
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by DH5 at Channel 2402MHz	

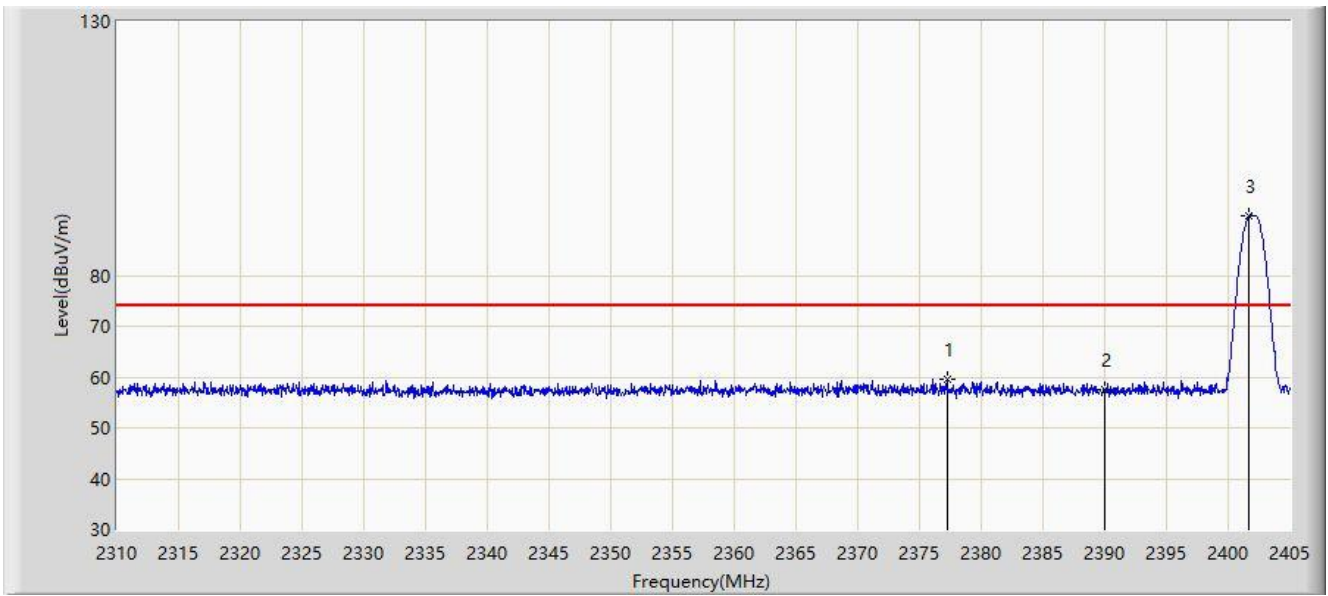


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2377.212	59.559	27.070	-14.441	74.000	32.488	PK
2			2390.000	57.471	25.067	-16.529	74.000	32.404	PK
3		*	2401.675	91.698	59.332	N/A	N/A	32.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:32
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by DH5 at Channel 2402MHz	

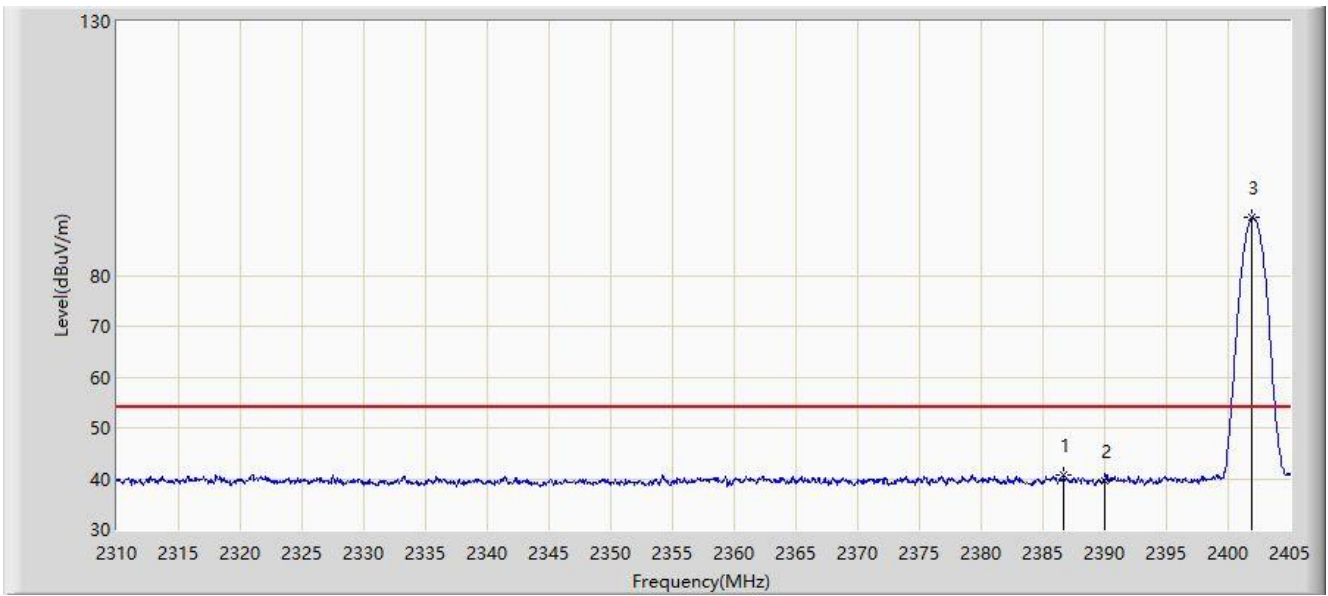


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.665	40.811	8.385	-13.189	54.000	32.427	AV
2			2390.000	39.615	7.211	-14.385	54.000	32.404	AV
3		*	2401.960	91.369	59.003	N/A	N/A	32.366	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:34
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by DH5 at Channel 2480MHz	

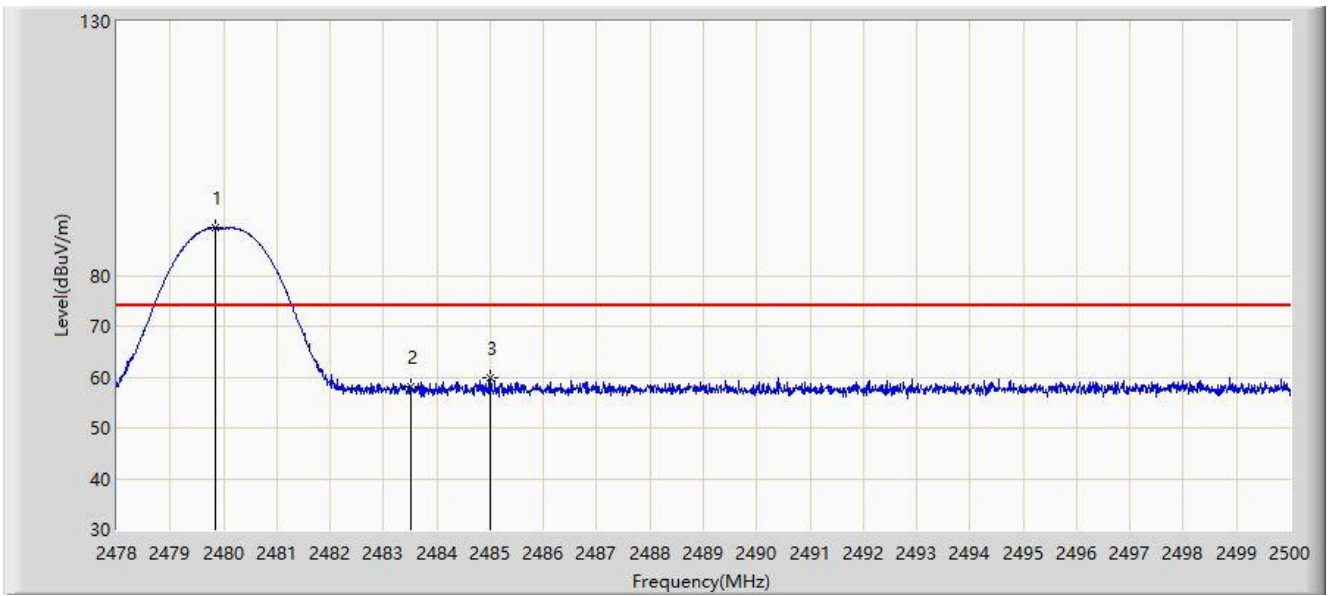


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.837	89.331	57.146	N/A	N/A	32.185	PK
2			2483.500	57.975	25.780	-16.025	74.000	32.195	PK
3			2484.996	59.766	27.567	-14.234	74.000	32.199	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:37
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by DH5 at Channel 2480MHz	

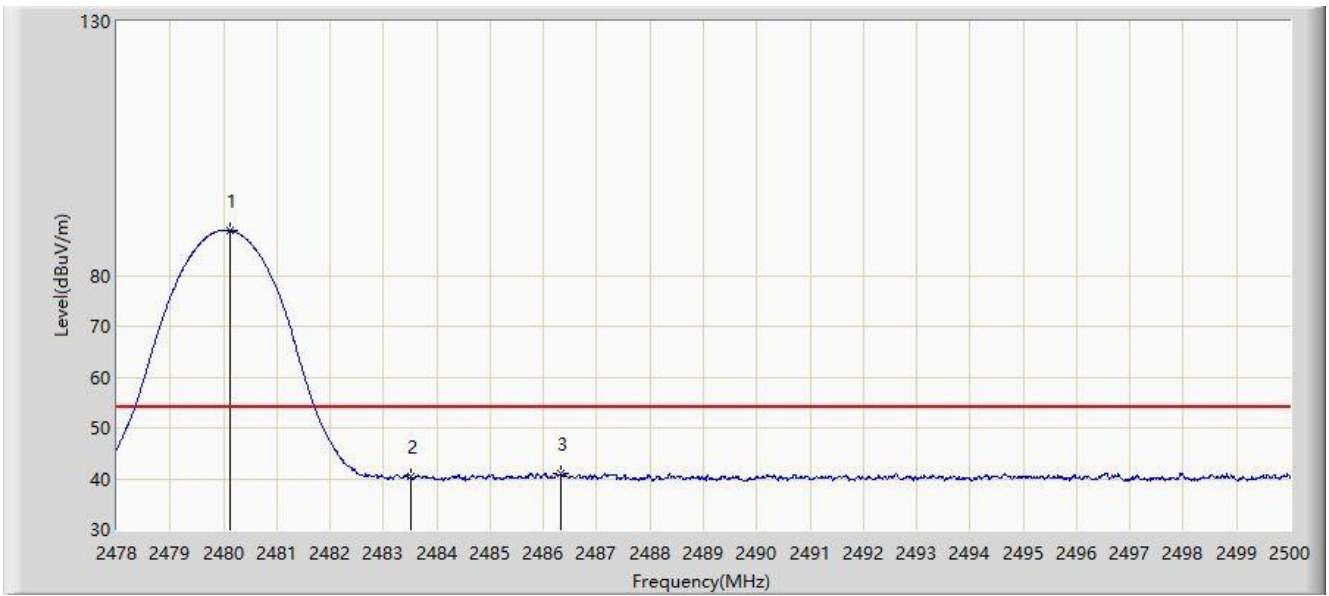


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.112	88.854	56.668	N/A	N/A	32.186	AV
2			2483.500	40.390	8.195	-13.610	54.000	32.195	AV
3			2486.327	40.978	8.775	-13.022	54.000	32.203	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:37
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by DH5 at Channel 2480MHz	

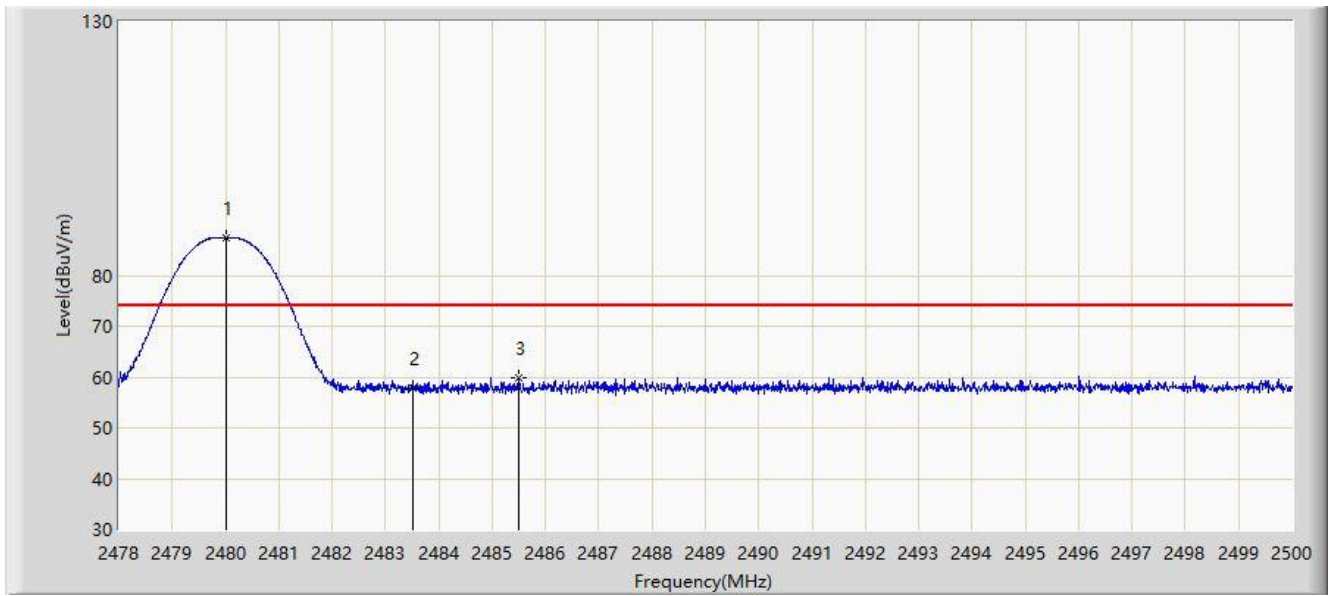


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	87.315	55.129	N/A	N/A	32.186	PK
2			2483.500	57.879	25.684	-16.121	74.000	32.195	PK
3			2485.502	59.753	27.552	-14.247	74.000	32.201	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:41
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by DH5 at Channel 2480MHz	

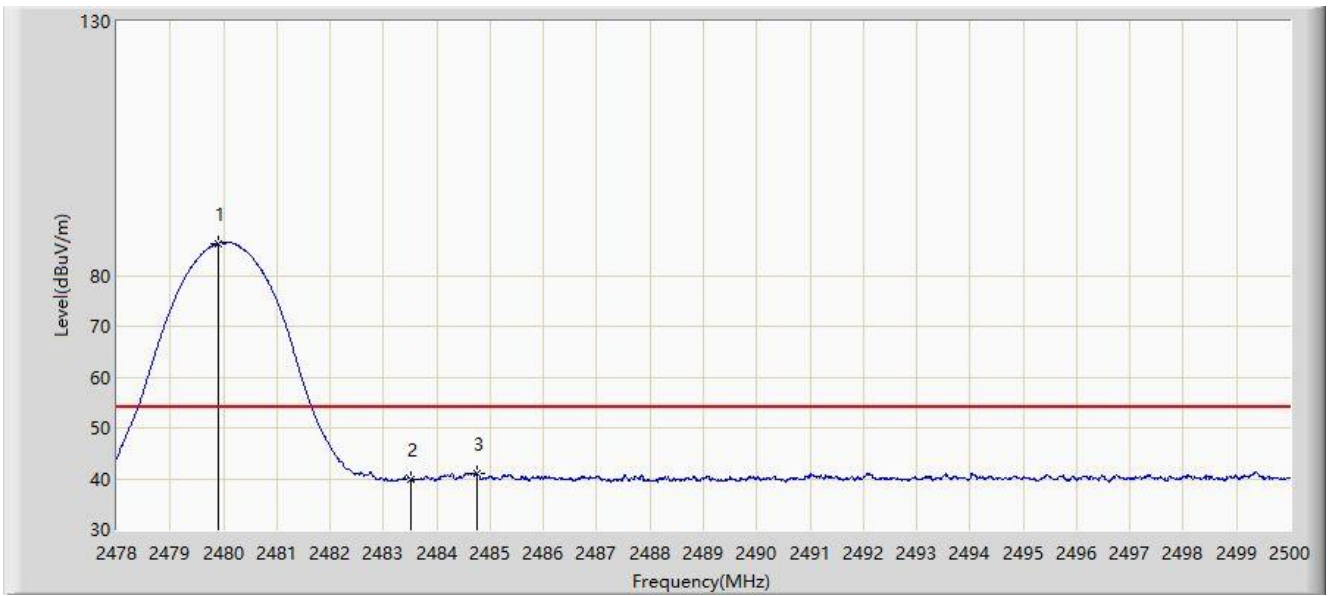


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.914	86.367	54.182	N/A	N/A	32.185	AV
2			2483.500	39.776	7.581	-14.224	54.000	32.195	AV
3			2484.743	41.027	8.828	-12.973	54.000	32.199	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:42
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 2DH5 at Channel 2402MHz	

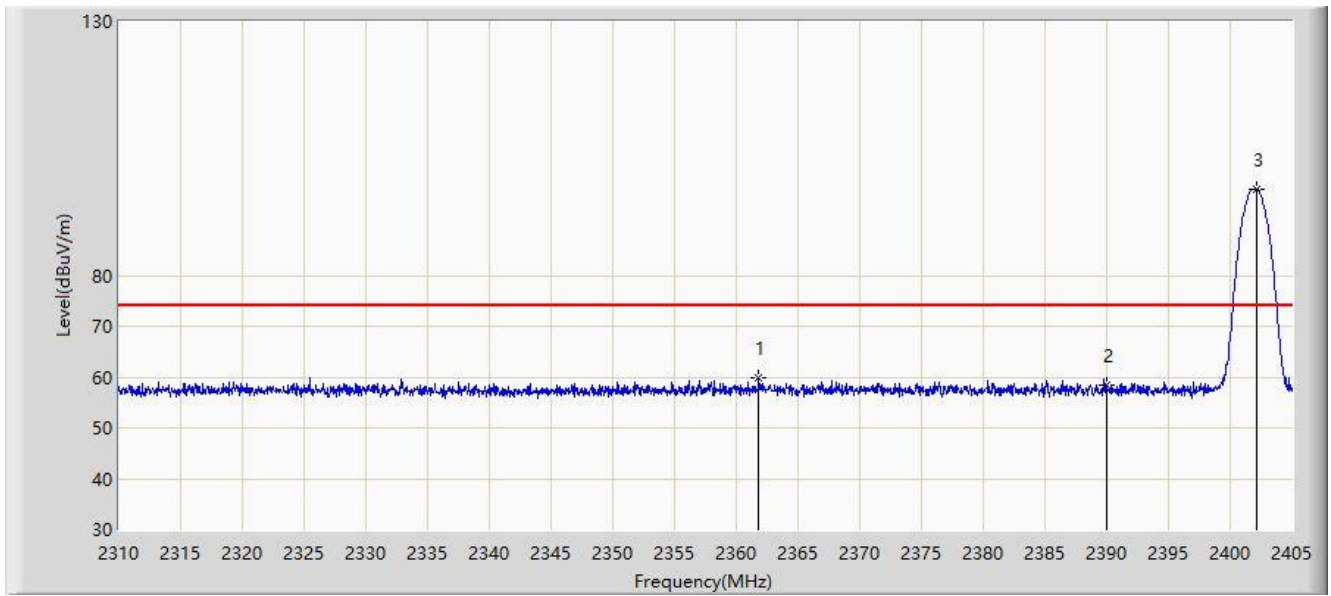


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.823	59.752	27.240	-14.248	74.000	32.512	PK
2			2390.000	58.393	25.989	-15.607	74.000	32.404	PK
3		*	2402.150	97.053	64.687	N/A	N/A	32.365	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:45
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 2DH5 at Channel 2402MHz	

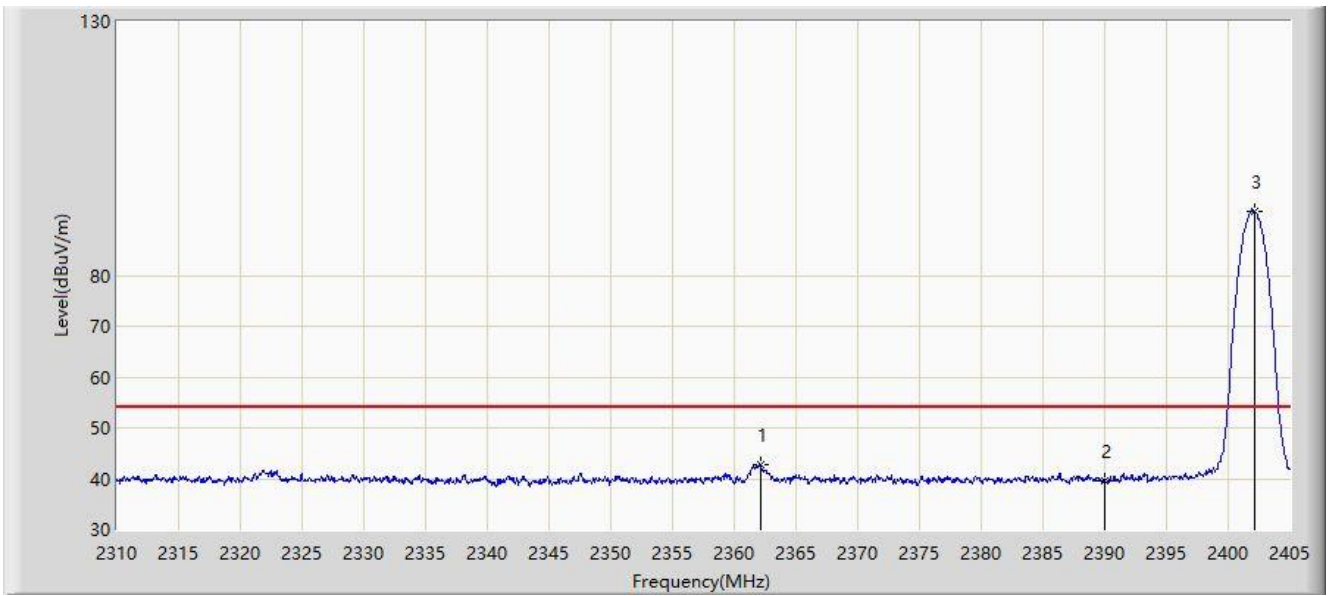


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.107	42.679	10.167	-11.321	54.000	32.511	AV
2			2390.000	39.636	7.232	-14.364	54.000	32.404	AV
3		*	2402.150	92.672	60.306	N/A	N/A	32.365	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:45
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 2DH5 at Channel 2402MHz	

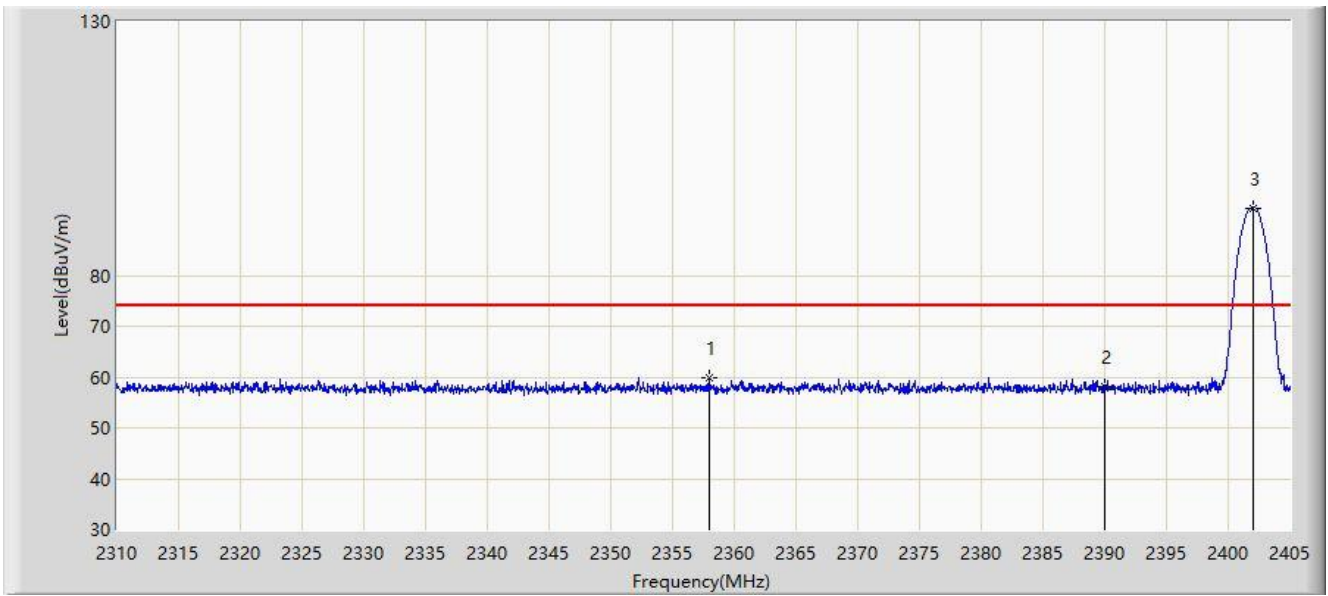


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2358.022	59.743	27.245	-14.257	74.000	32.499	PK
2			2390.000	58.131	25.727	-15.869	74.000	32.404	PK
3		*	2402.008	93.225	60.859	N/A	N/A	32.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:50
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 2DH5 at Channel 2402MHz	

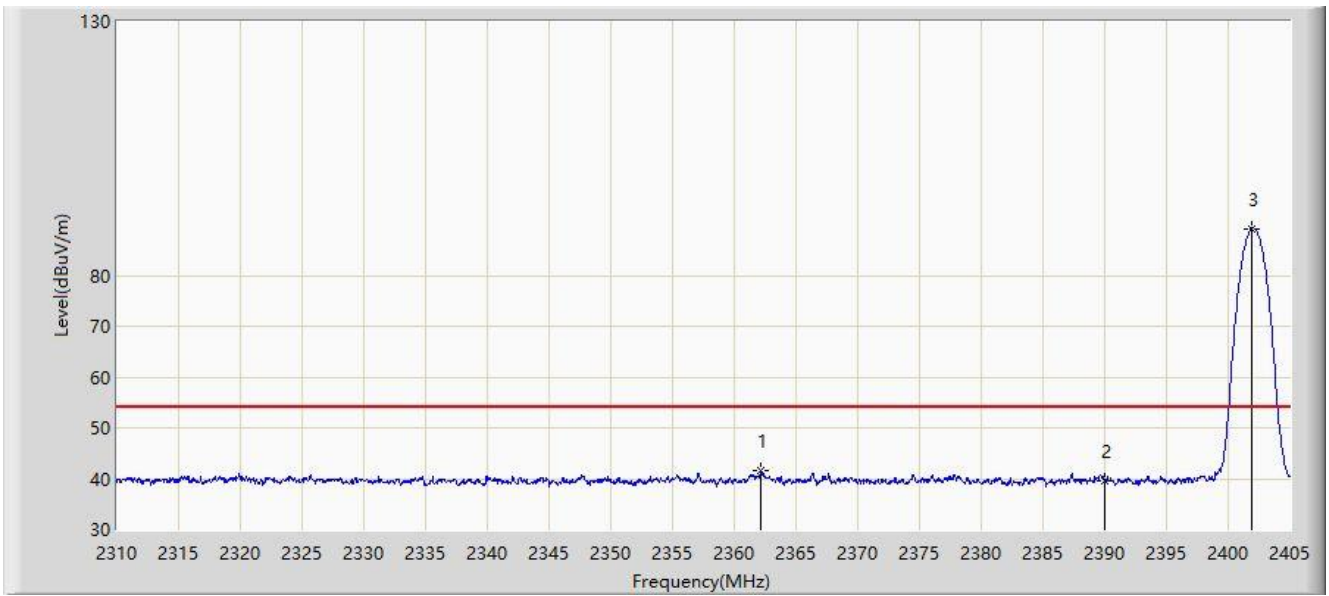


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.155	41.537	9.025	-12.463	54.000	32.512	AV
2			2390.000	39.601	7.197	-14.399	54.000	32.404	AV
3		*	2401.865	89.235	56.869	N/A	N/A	32.366	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:51
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 2DH5 at Channel 2480MHz	

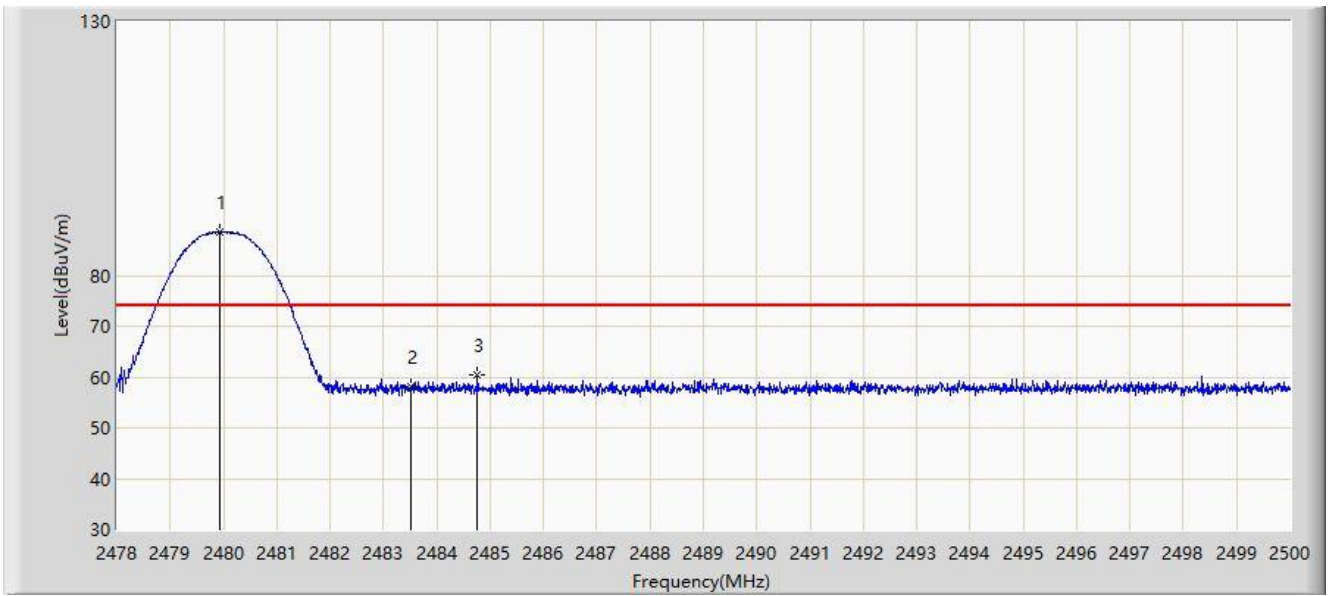


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.936	88.453	56.267	N/A	N/A	32.185	PK
2			2483.500	58.024	25.829	-15.976	74.000	32.195	PK
3			2484.765	60.328	28.129	-13.672	74.000	32.199	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:55
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 2DH5 at Channel 2480MHz	

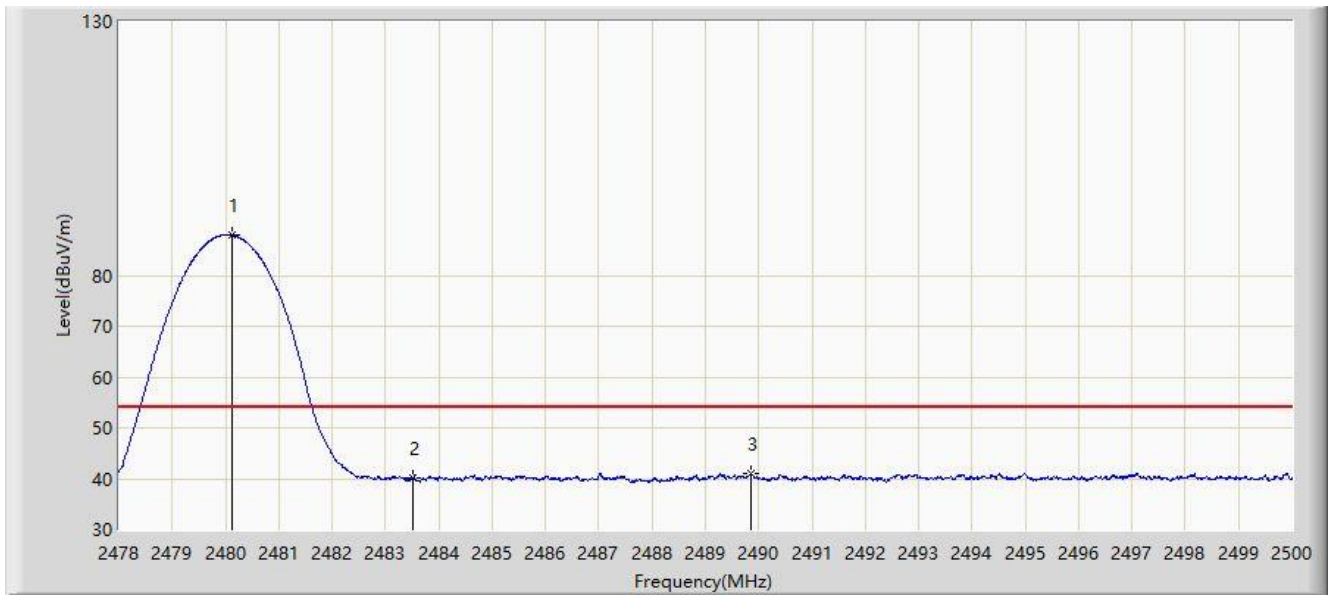


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.112	87.957	55.771	N/A	N/A	32.186	AV
2			2483.500	40.185	7.990	-13.815	54.000	32.195	AV
3			2489.858	40.942	8.730	-13.058	54.000	32.213	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:55
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 2DH5 at Channel 2480MHz	

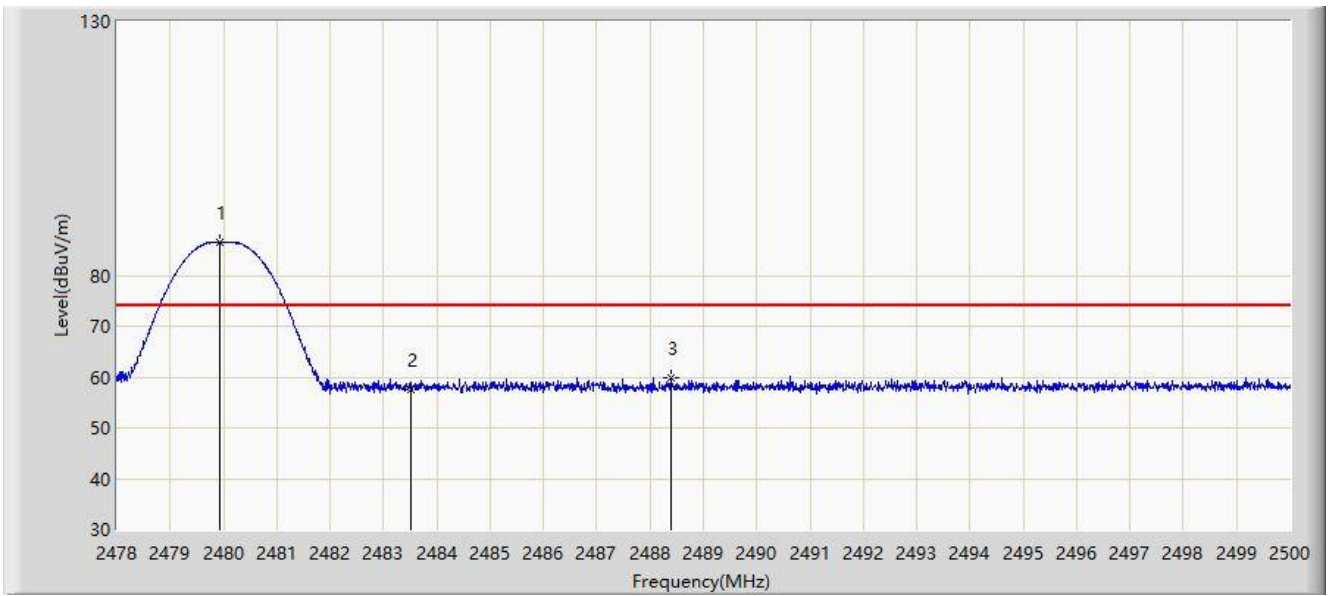


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.936	86.539	54.353	N/A	N/A	32.185	PK
2			2483.500	57.519	25.324	-16.481	74.000	32.195	PK
3			2488.384	59.917	27.709	-14.083	74.000	32.208	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:02
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 2DH5 at Channel 2480MHz	

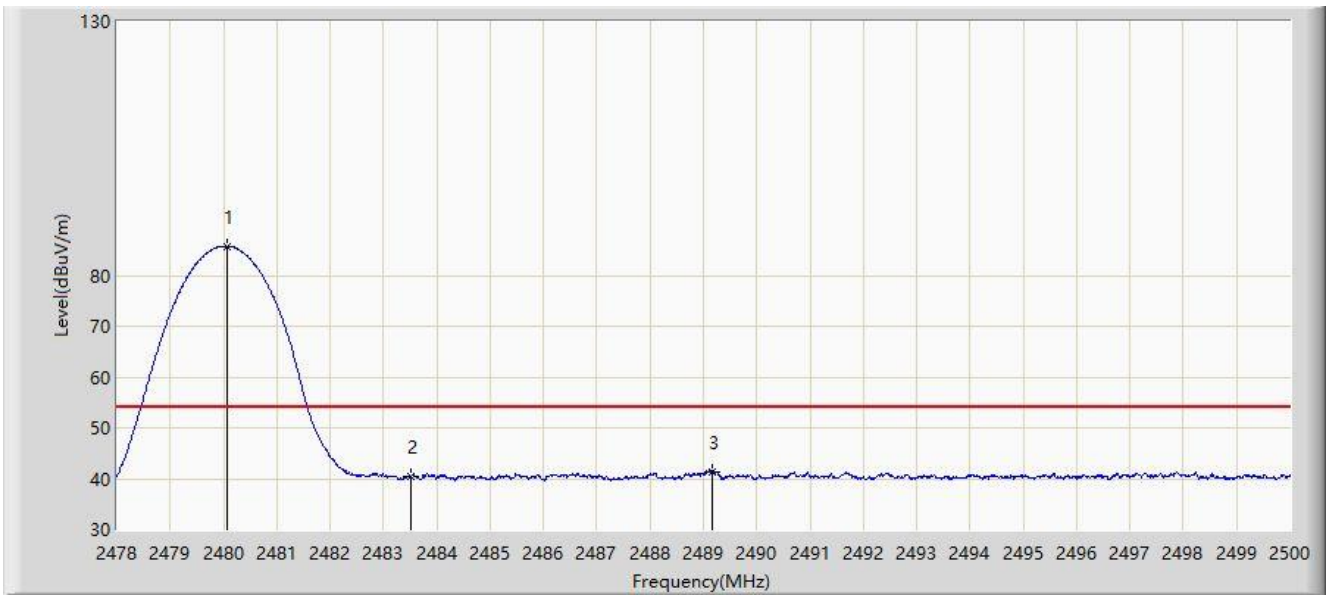


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	85.765	53.579	N/A	N/A	32.186	AV
2			2483.500	40.381	8.186	-13.619	54.000	32.195	AV
3			2489.176	41.437	9.226	-12.563	54.000	32.210	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:05
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 3DH5 at Channel 2402MHz	

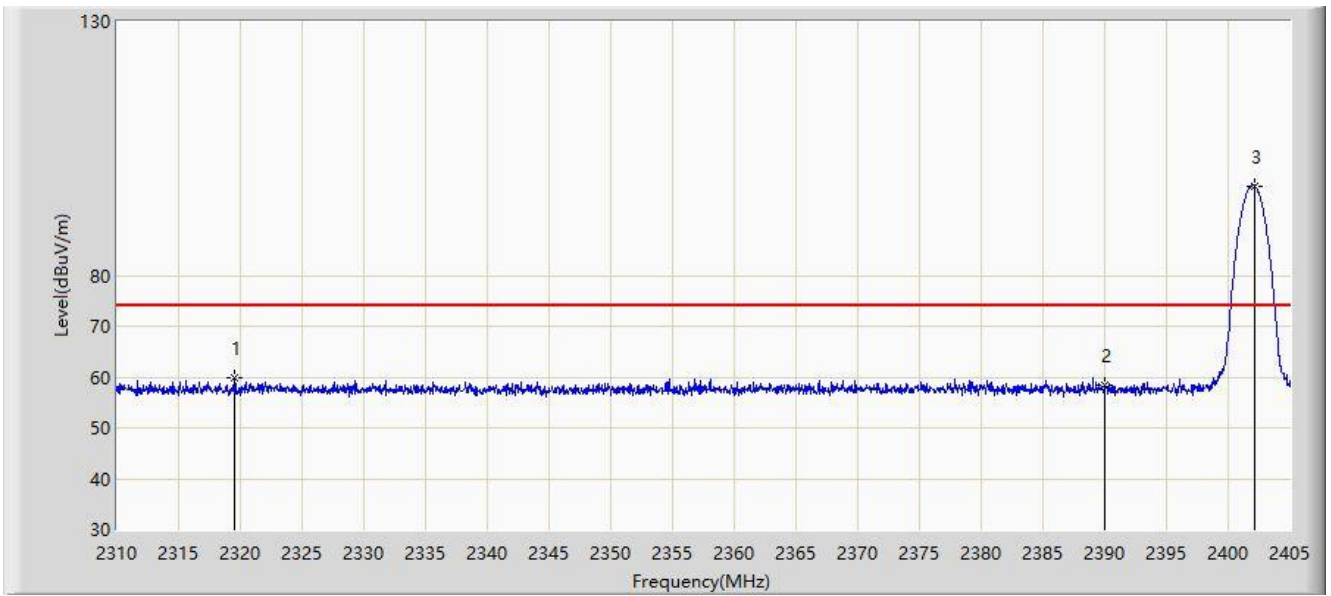


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2319.548	59.997	27.302	-14.003	74.000	32.696	PK
2			2390.000	58.435	26.031	-15.565	74.000	32.404	PK
3		*	2402.150	97.552	65.186	N/A	N/A	32.365	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:10
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 3DH5 at Channel 2402MHz	

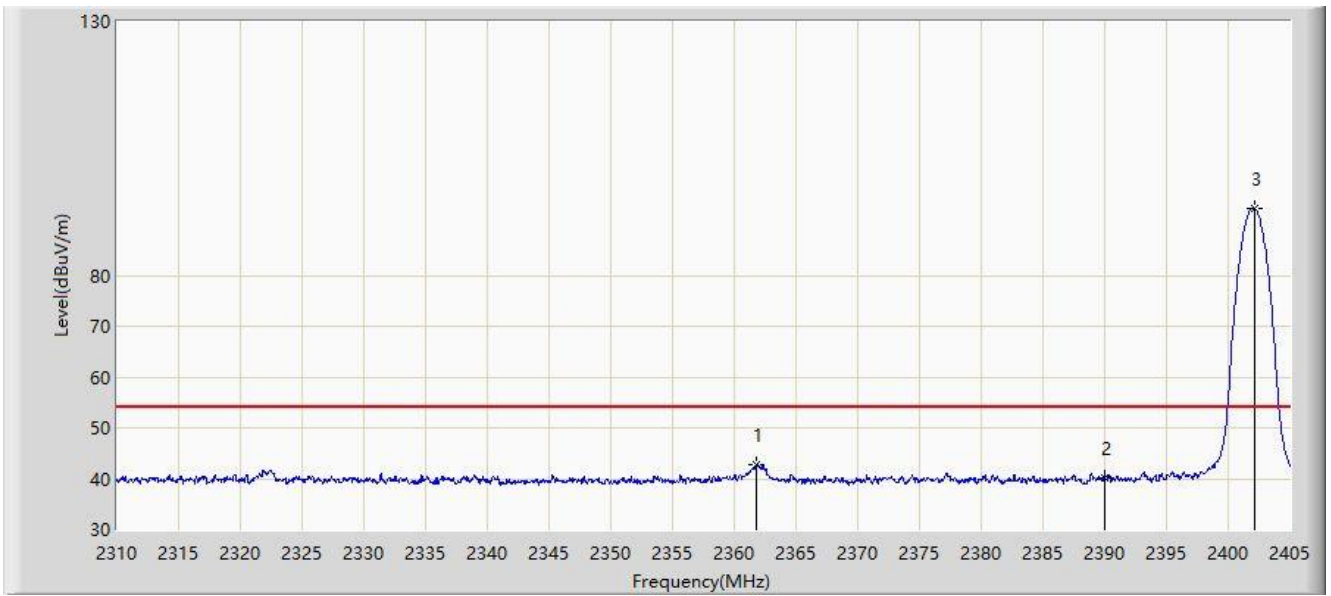


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.823	42.645	10.133	-11.355	54.000	32.512	AV
2			2390.000	40.172	7.768	-13.828	54.000	32.404	AV
3		*	2402.150	93.218	60.852	N/A	N/A	32.365	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:12
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 3DH5 at Channel 2402MHz	

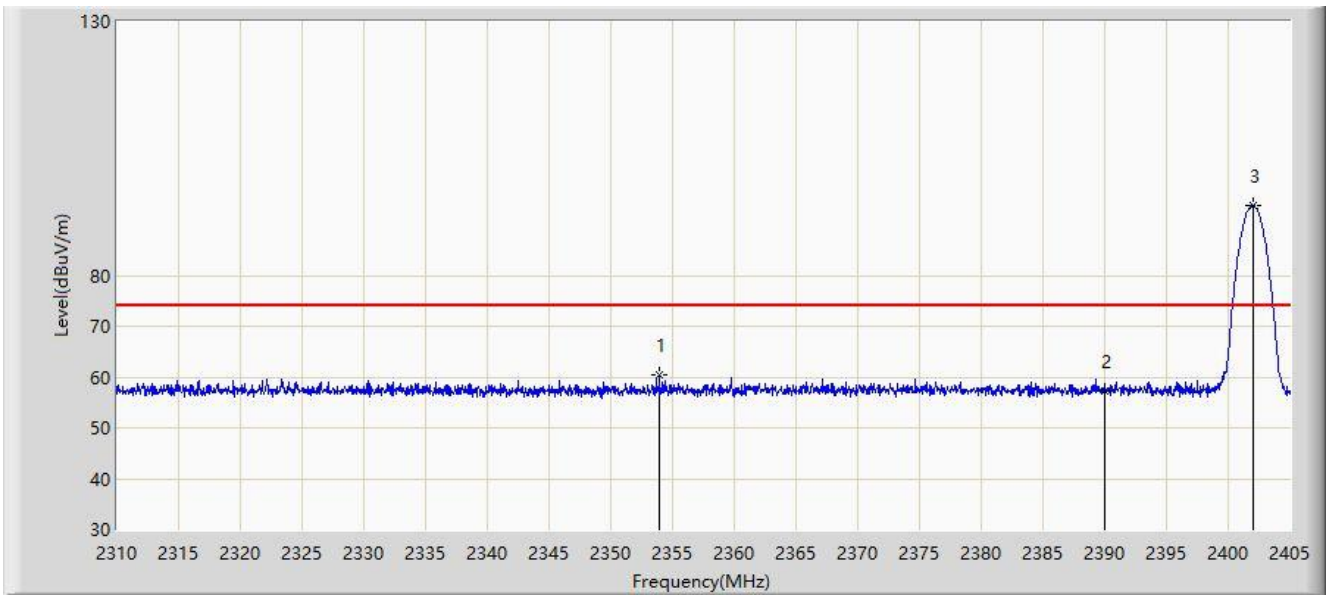


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2353.937	60.451	27.988	-13.549	74.000	32.463	PK
2			2390.000	57.133	24.729	-16.867	74.000	32.404	PK
3		*	2402.008	93.895	61.529	N/A	N/A	32.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:15
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 3DH5 at Channel 2402MHz	

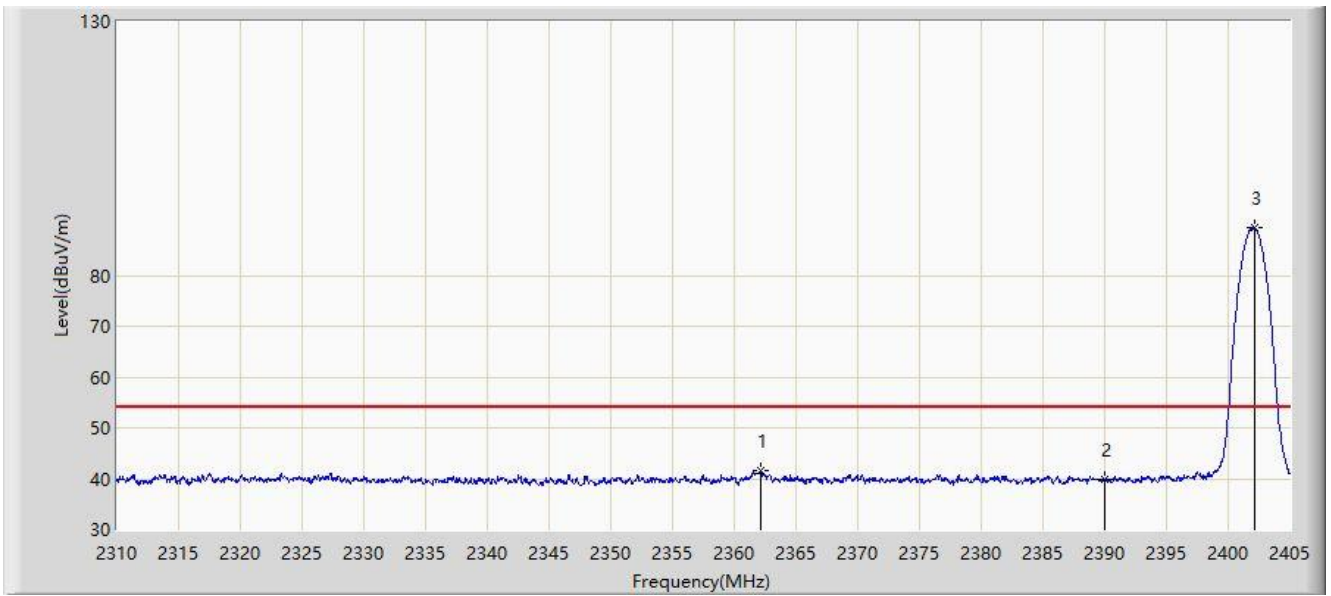


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.107	41.701	9.189	-12.299	54.000	32.511	AV
2			2390.000	39.753	7.349	-14.247	54.000	32.404	AV
3		*	2402.150	89.331	56.965	N/A	N/A	32.365	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:16
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 3DH5 at Channel 2480MHz	

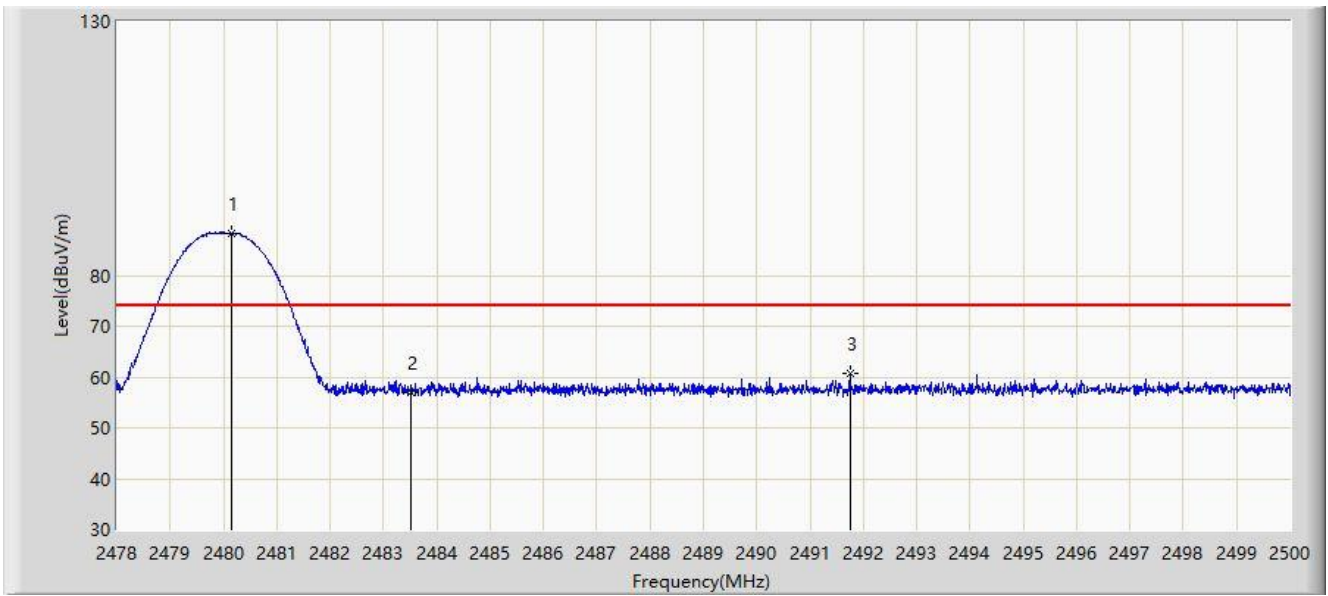


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.145	88.340	56.154	N/A	N/A	32.186	PK
2			2483.500	56.826	24.631	-17.174	74.000	32.195	PK
3			2491.750	60.725	28.507	-13.275	74.000	32.217	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:19
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 3DH5 at Channel 2480MHz	

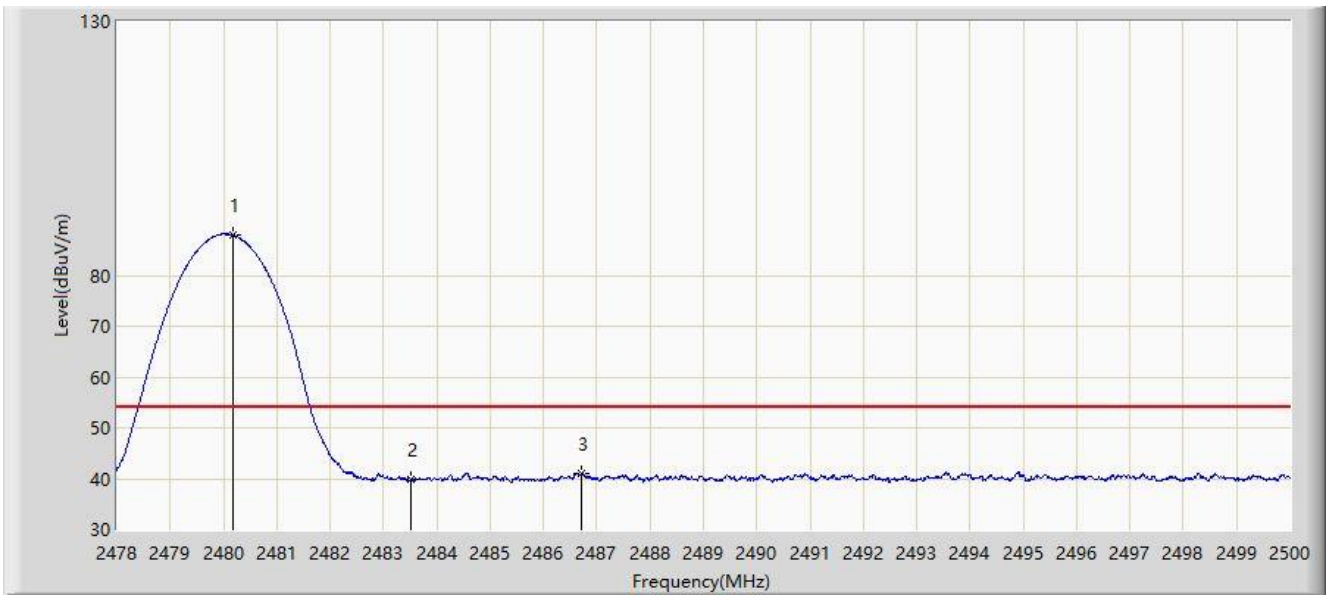


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.178	87.936	55.750	N/A	N/A	32.186	AV
2			2483.500	39.935	7.740	-14.065	54.000	32.195	AV
3			2486.723	41.128	8.924	-12.872	54.000	32.204	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:19
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 3DH5 at Channel 2480MHz	

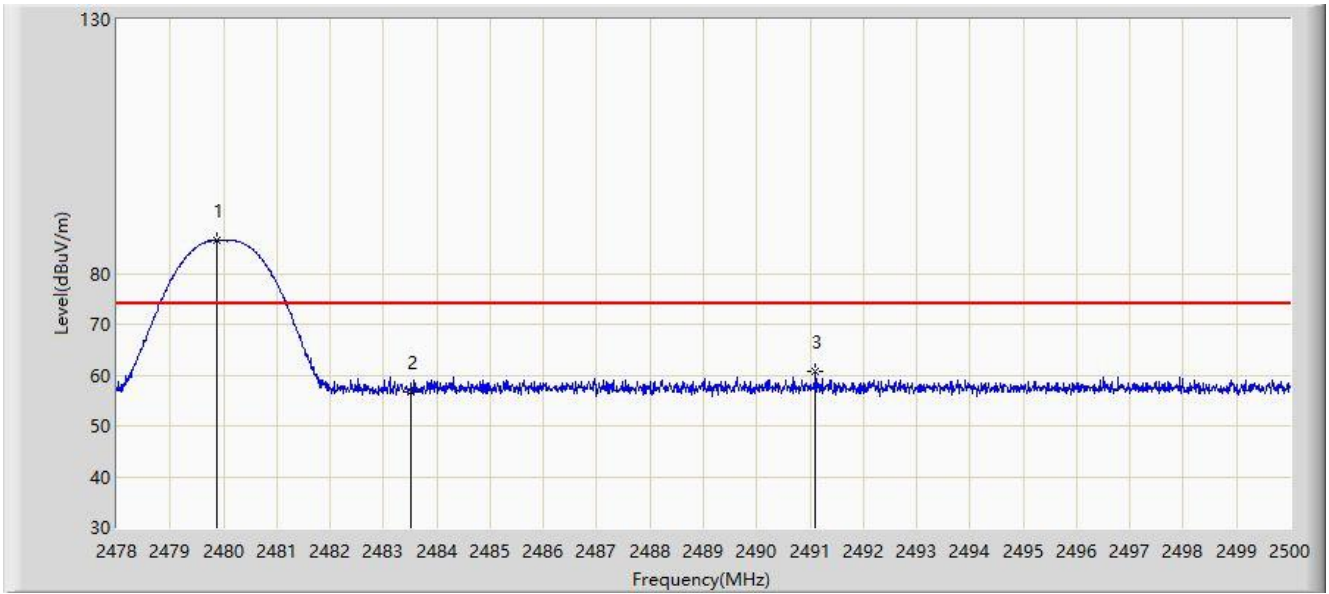


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.870	86.419	54.234	N/A	N/A	32.185	PK
2			2483.500	56.604	24.409	-17.396	74.000	32.195	PK
3			2491.101	60.609	28.393	-13.391	74.000	32.216	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 14:21
Limit: FCC_Part15.209 RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Note: Transmit by 3DH5 at Channel 2480MHz	

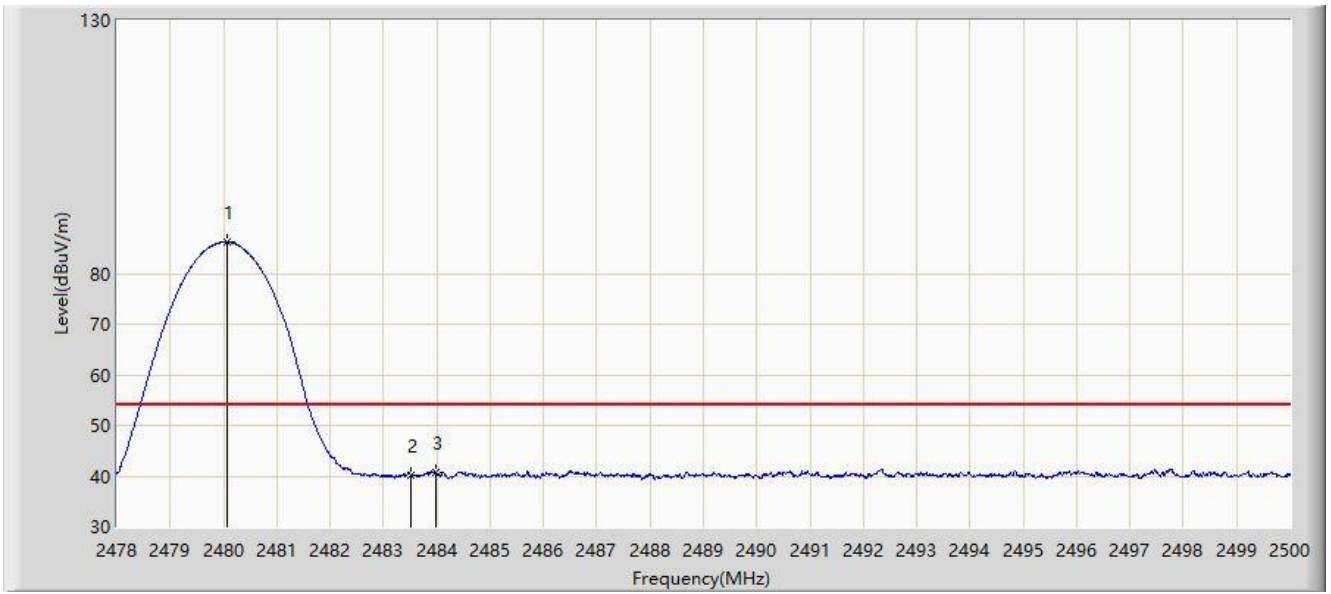

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	86.188	54.002	N/A	N/A	32.186	AV
2			2483.500	40.235	8.040	-13.765	54.000	32.195	AV
3			2483.973	40.857	8.661	-13.143	54.000	32.196	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

5.11. AC Conducted Emissions Measurement


5.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

5.11.2. Test Setup

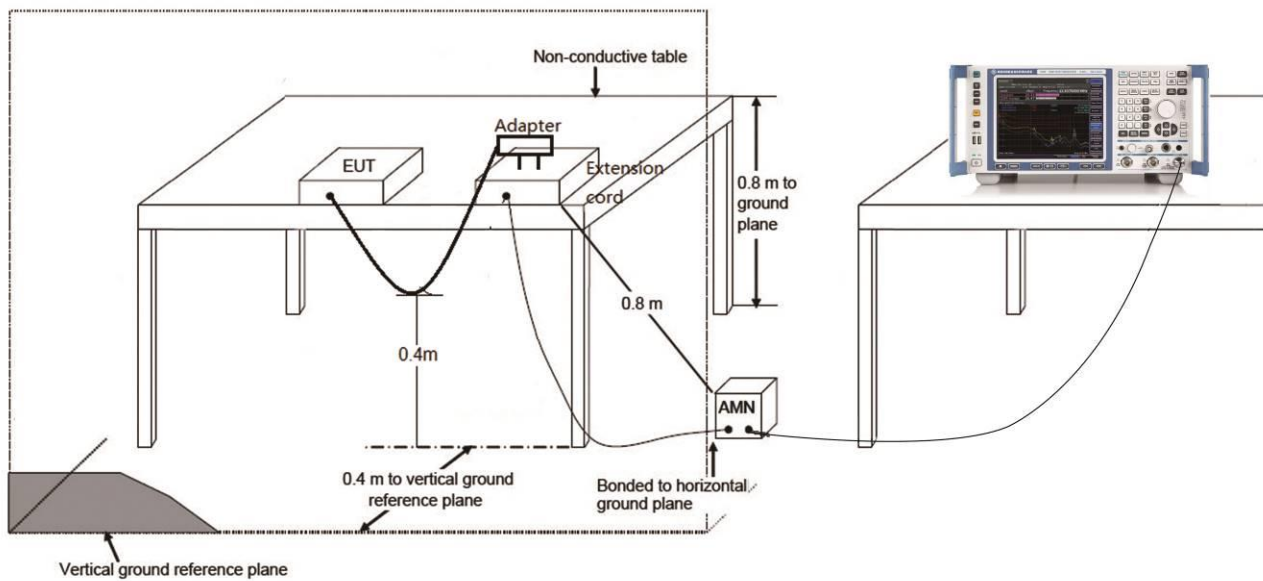

5.11.3. Test Result

Site: SIP-SR2	Time: 2021/06/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Wayen Wang
Probe: SIP-SR2-ENV216_101684_With Connector	Polarity: Neutral
EUT: True Wireless Earphone	Power: AC 120V/60Hz
Note: Test Mode 1	

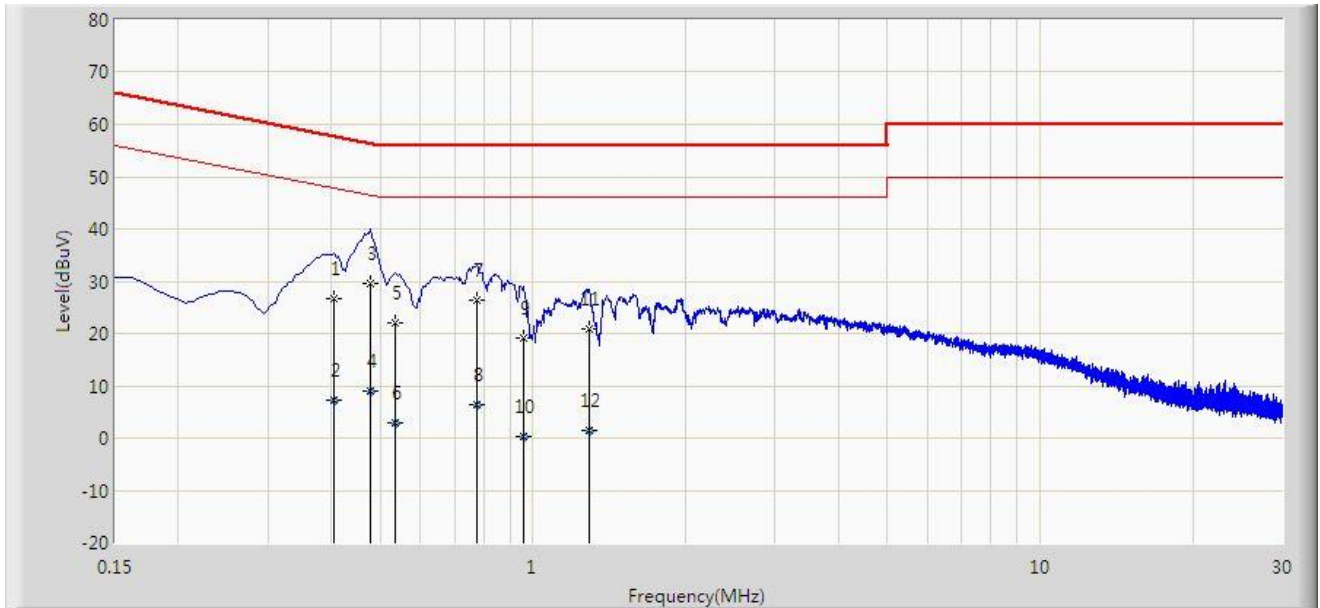


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.406	26.717	17.183	-31.013	57.730	9.533	QP
2			0.406	7.112	-2.421	-40.618	47.730	9.533	AV
3		*	0.478	29.649	20.111	-26.731	56.380	9.538	QP
4			0.478	9.011	-0.528	-37.369	46.380	9.538	AV
5			0.534	21.974	12.434	-34.026	56.000	9.540	QP
6			0.534	2.985	-6.555	-43.015	46.000	9.540	AV
7			0.774	26.281	16.741	-29.719	56.000	9.540	QP
8			0.774	6.461	-3.079	-39.539	46.000	9.540	AV
9			0.958	19.021	9.491	-36.979	56.000	9.530	QP
10			0.958	0.205	-9.325	-45.795	46.000	9.530	AV
11			1.290	20.754	11.211	-35.246	56.000	9.543	QP
12			1.290	1.475	-8.068	-44.525	46.000	9.543	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Time: 2021/06/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Wayen Wang
Probe: SIP-SR2-ENV216_101684_With Connector	Polarity: Line
EUT: True Wireless Earphone	Power: AC 120V/60Hz
Note: Test Mode 1	

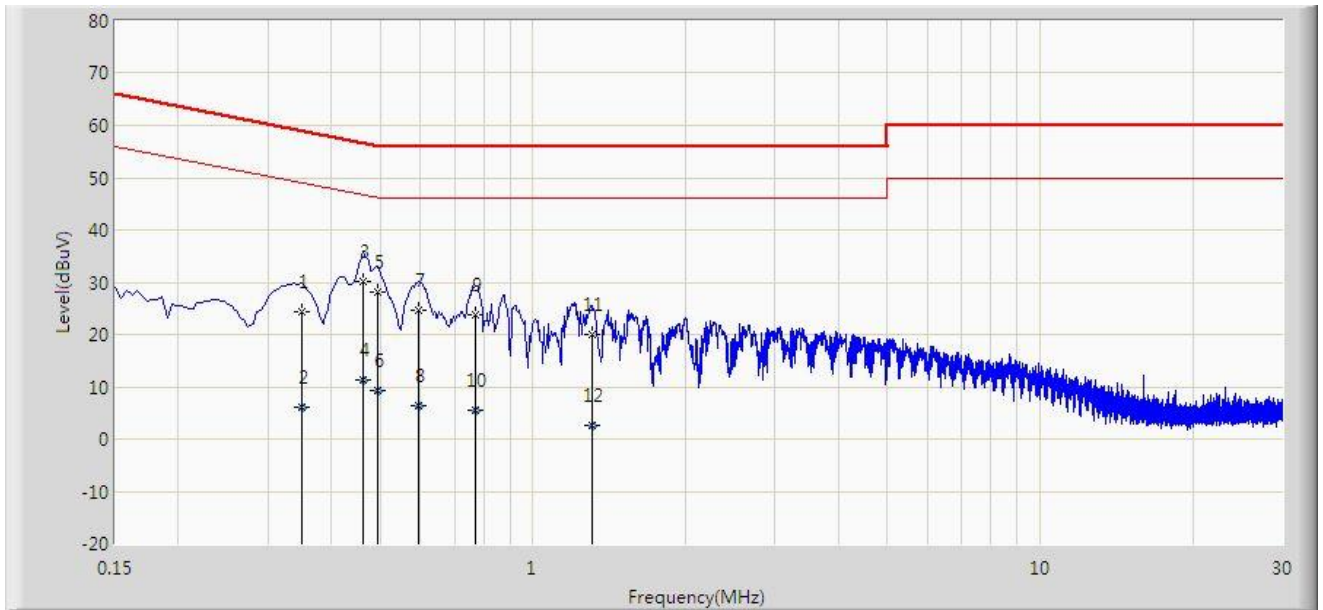

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.350	24.389	14.846	-34.573	58.962	9.543	QP
2			0.350	6.178	-3.365	-42.785	48.962	9.543	AV
3		*	0.462	30.239	20.681	-26.414	56.653	9.557	QP
4			0.462	11.197	1.640	-35.455	46.653	9.557	AV
5			0.494	28.141	18.581	-27.960	56.100	9.559	QP
6			0.494	9.332	-0.227	-36.768	46.100	9.559	AV
7			0.594	24.556	14.996	-31.444	56.000	9.560	QP
8			0.594	6.249	-3.311	-39.751	46.000	9.560	AV
9			0.770	23.740	14.180	-32.260	56.000	9.560	QP
10			0.770	5.583	-3.977	-40.417	46.000	9.560	AV
11			1.306	19.962	10.402	-36.038	56.000	9.560	QP
12			1.306	2.551	-7.009	-43.449	46.000	9.560	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

6. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to "2106RSU032-UT" file.

Appendix B - EUT Photograph

Refer to "2106RSU032-UE" file.