



Band-edge Compliance


DH5 - Channel 00 (2402MHz)

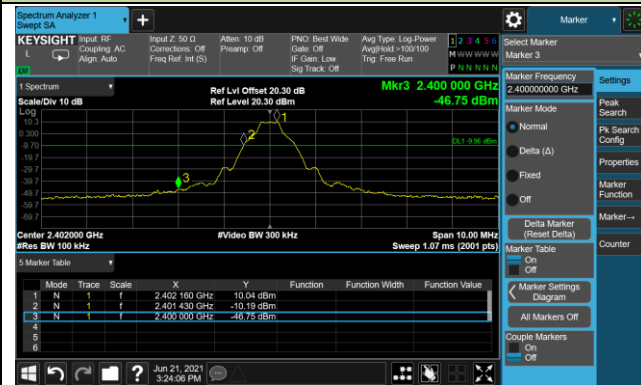

DH5 - Channel 78 (2480MHz)

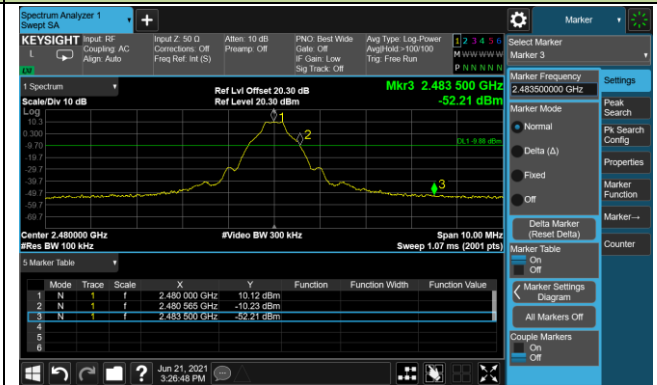


2DH5 - Channel 00 (2402MHz)

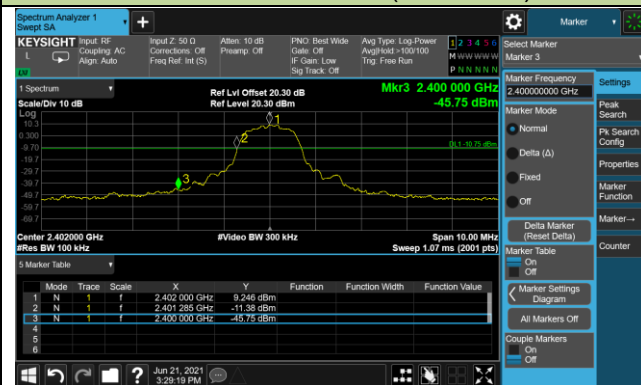

2DH5 - Channel 78 (2480MHz)



3DH5 - Channel 00 (2402MHz)

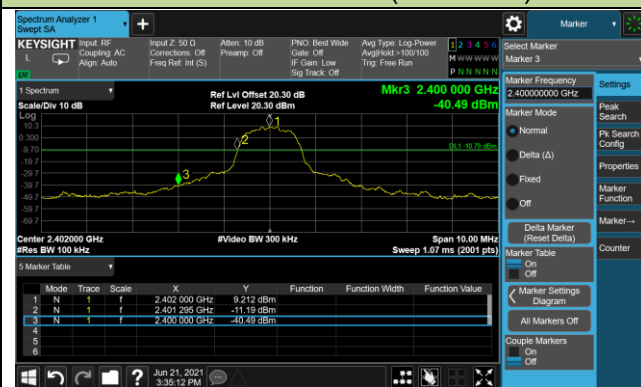


3DH5 - Channel 78 (2480MHz)




Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

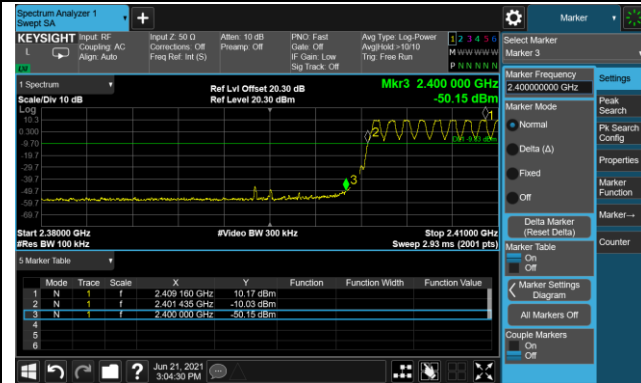


DH5 - Channel 78 (2480MHz)

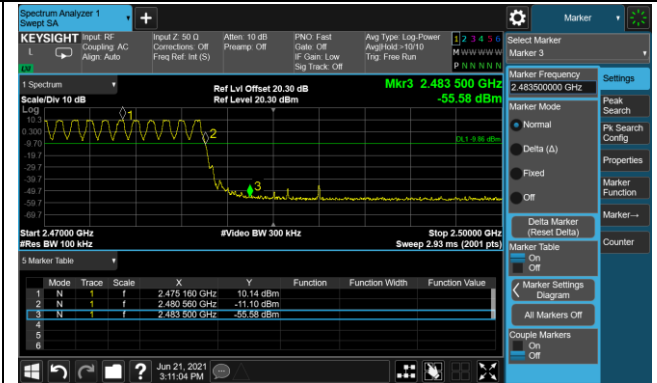


2DH5 - Channel 00 (2402MHz)

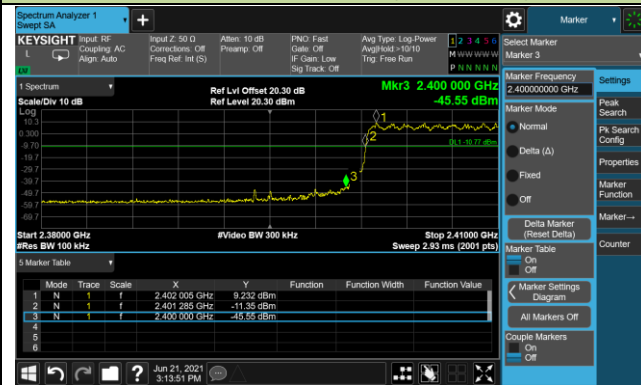


2DH5 - Channel 78 (2480MHz)

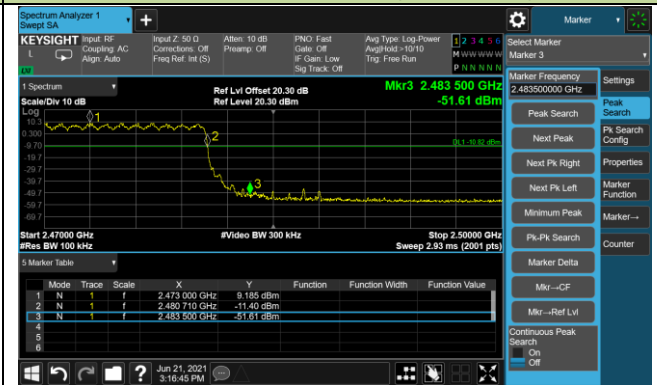

3DH5 - Channel 00 (2402MHz)

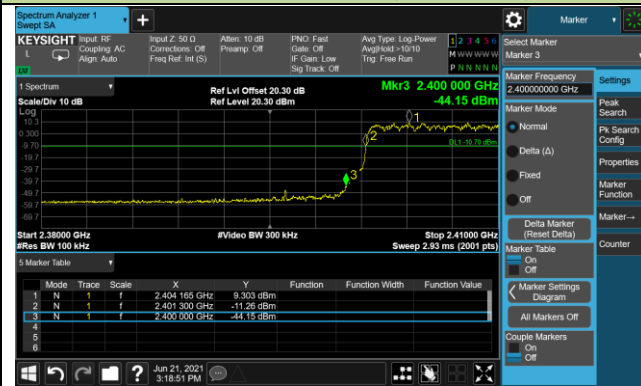

3DH5 - Channel 78 (2480MHz)

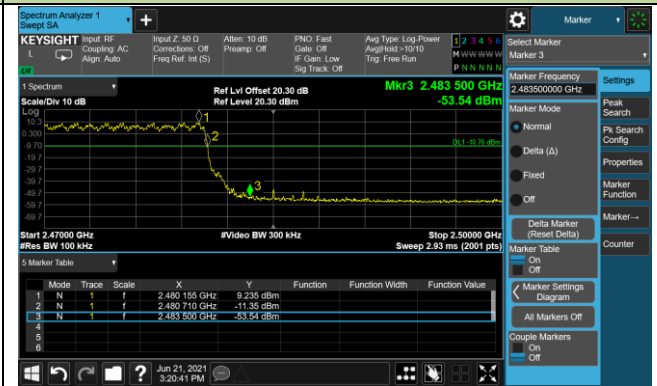

5.8. Conducted Spurious Emissions Measurement

5.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


5.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

5.8.3. Test Setting

1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

5.8.4. Test Setup

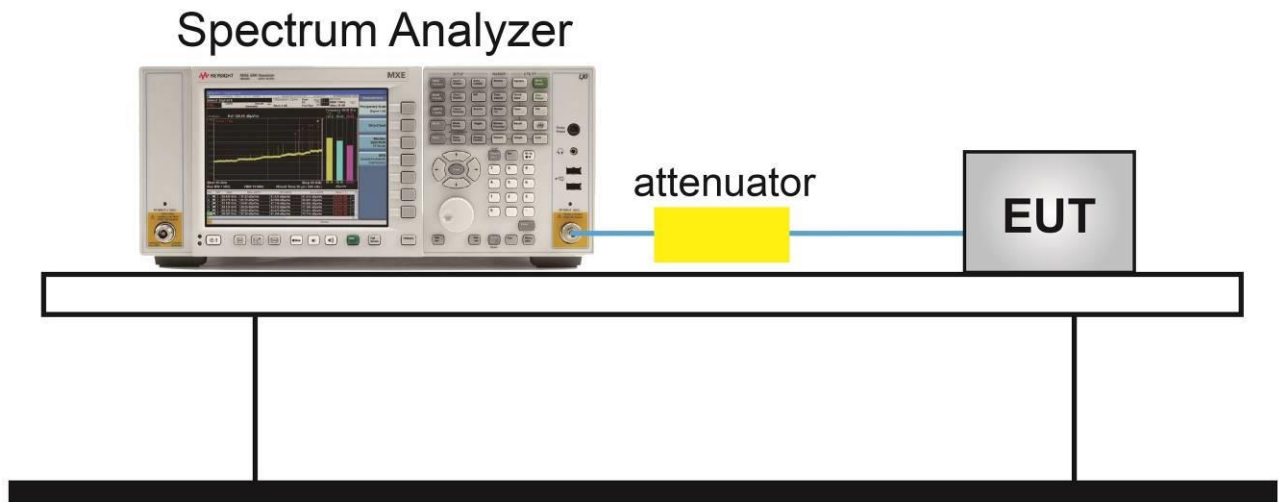

5.8.5. Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2021/06/24		

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions



Channel 00 (2402MHz)



Channel 39 (2441MHz)




Channel 78 (2480MHz)

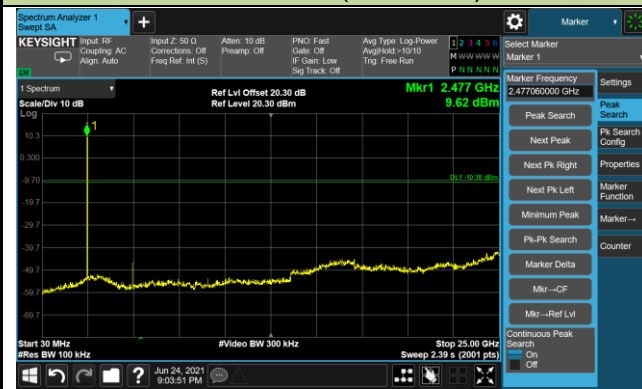


2DH5 Conducted Spurious Emissions



Channel 00 (2402MHz)

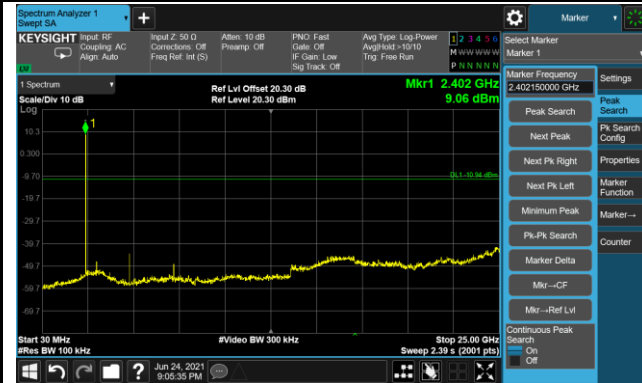

Channel 39 (2441MHz)

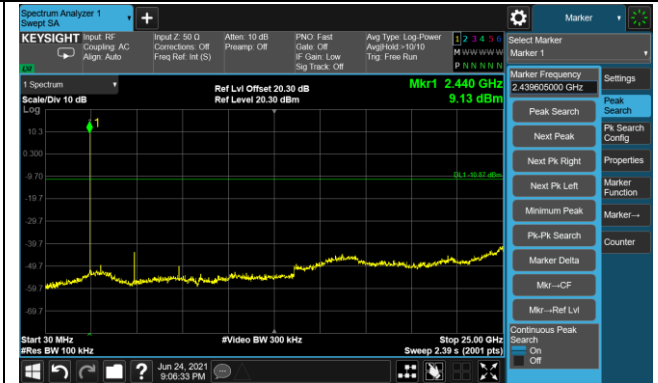

Channel 78 (2480MHz)

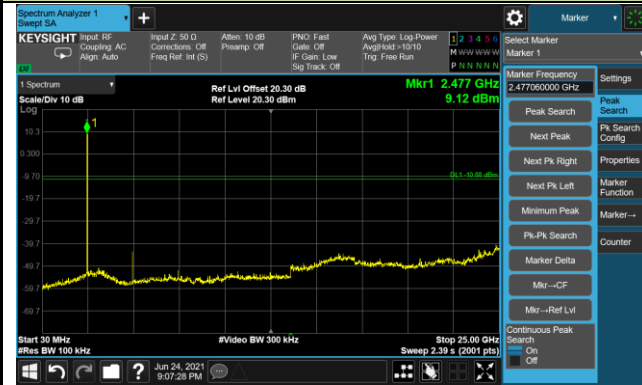

3DH5 Conducted Spurious Emissions



Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)

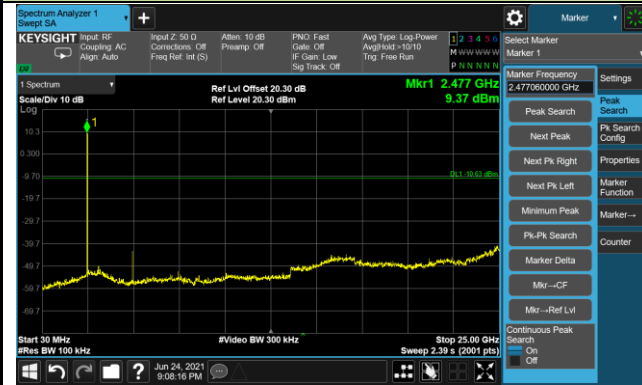

5.9. Radiated Spurious Emission Measurement

5.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.4 & 6.5 & 6.6

5.9.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = As specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = Auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

5.9.4. Test Setup

Below 1GHz Test Setup:

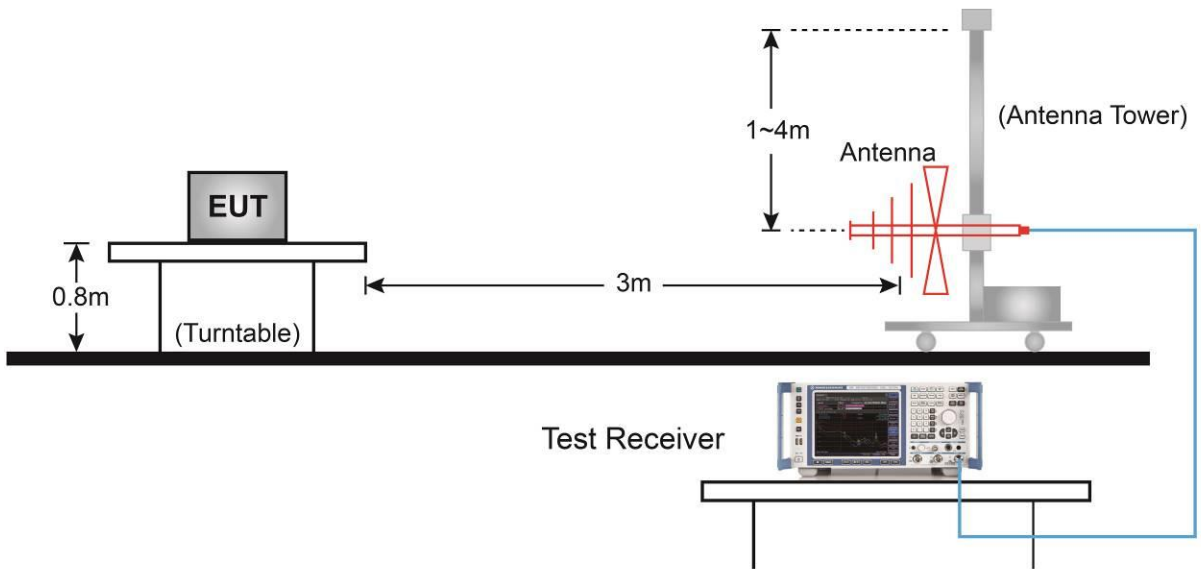

Above 1GHz Test Setup:

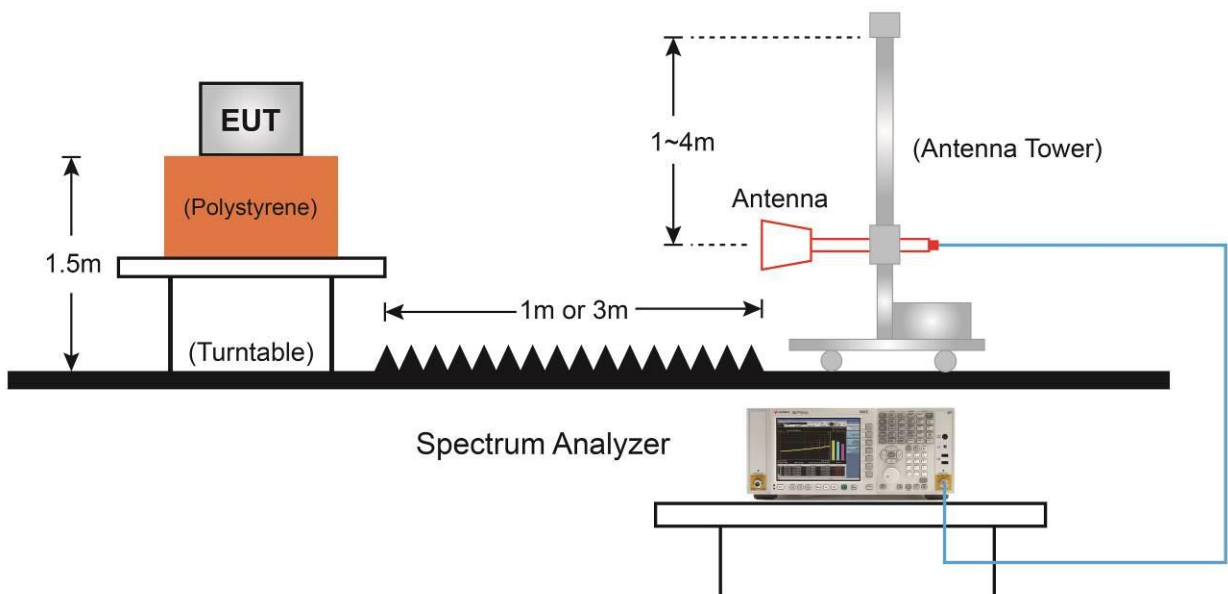

5.9.5. Test Result

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	DH5	Test Date	2021/06/21
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7205.0	53.2	-2.2	51.0	68.2	-17.2	Peak	Horizontal
8140.0	45.1	0.0	45.1	74.0	-28.9	Peak	Horizontal
10962.0	42.1	5.1	47.2	74.0	-26.8	Peak	Horizontal
7205.0	54.3	-2.2	52.1	68.2	-16.1	Peak	Vertical
8242.0	45.4	-0.6	44.8	74.0	-29.2	Peak	Vertical
11438.0	43.2	5.5	48.7	74.0	-25.3	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	DH5	Test Date	2021/06/21
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3660.5	57.0	-12.5	44.5	74.0	-29.5	Peak	Horizontal
7324.0	53.8	-1.7	52.1	74.0	-21.9	Peak	Horizontal
11429.5	42.4	5.5	47.9	74.0	-26.1	Peak	Horizontal
3660.5	57.0	-12.5	44.5	74.0	-29.5	Peak	Vertical
7324.0	54.1	-1.7	52.4	74.0	-21.6	Peak	Vertical
10681.5	43.4	3.9	47.3	74.0	-26.7	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	DH5	Test Date	2021/06/21
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3720.0	54.2	-12.4	41.8	74.0	-32.2	Peak	Horizontal
7443.0	54.3	-1.1	53.2	74.0	-20.8	Peak	Horizontal
7443.0	50.8	-1.1	49.7	54.0	-4.3	Average	Horizontal
10860.0	42.9	4.9	47.8	74.0	-26.2	Peak	Horizontal
3720.0	56.0	-12.4	43.6	74.0	-30.4	Peak	Vertical
7443.0	53.3	-1.1	52.2	74.0	-21.8	Peak	Vertical
11412.5	42.8	5.3	48.1	74.0	-25.9	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	2DH5	Test Date	2021/06/21
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7205.0	52.5	-2.2	50.3	68.2	-17.9	Peak	Horizontal
7205.0	49.1	-2.2	46.9	54.0	-7.1	Average	Horizontal
8165.5	45.2	0.0	45.2	74.0	-28.8	Peak	Horizontal
11429.5	43.9	5.5	49.4	74.0	-24.6	Peak	Horizontal
7205.0	54.9	-2.2	52.7	68.2	-15.5	Peak	Vertical
7205.0	51.2	-2.2	49.0	54.0	-5.0	Average	Vertical
8216.5	46.4	-0.5	45.9	74.0	-28.1	Peak	Vertical
11174.5	44.0	5.0	49.0	74.0	-25.0	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	2DH5	Test Date	2021/06/21
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3660.5	56.1	-12.5	43.6	74.0	-30.4	Peak	Horizontal
7324.0	53.0	-1.7	51.3	74.0	-22.7	Peak	Horizontal
11055.5	43.1	5.6	48.7	74.0	-25.3	Peak	Horizontal
3660.5	56.5	-12.5	44.0	74.0	-30.0	Peak	Vertical
7324.0	54.1	-1.7	52.4	74.0	-21.6	Peak	Vertical
11089.5	43.0	4.9	47.9	74.0	-26.1	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	2DH5	Test Date	2021/06/21
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3720.0	55.2	-12.4	42.8	74.0	-31.2	Peak	Horizontal
7443.0	54.0	-1.1	52.9	74.0	-21.1	Peak	Horizontal
11421.0	43.9	5.6	49.5	74.0	-24.5	Peak	Horizontal
3720.0	55.2	-12.4	42.8	74.0	-31.2	Peak	Vertical
7443.0	52.6	-1.1	51.5	74.0	-22.5	Peak	Vertical
11149.0	43.5	5.0	48.5	74.0	-25.5	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	3DH5	Test Date	2021/06/21
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
7205.0	51.6	-2.2	49.4	68.2	-18.8	Peak	Horizontal
7205.0	49.7	-2.2	47.5	54.0	-6.5	Average	Horizontal
7468.5	46.6	-1.0	45.6	74.0	-28.4	Peak	Horizontal
11259.5	43.5	4.9	48.4	74.0	-25.6	Peak	Horizontal
7434.5	45.9	-1.1	44.8	74.0	-29.2	Peak	Vertical
8106.0	46.2	0.2	46.4	74.0	-27.6	Peak	Vertical
10877.0	45.4	4.8	50.2	74.0	-23.8	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	3DH5	Test Date	2021/06/21
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3660.5	58.3	-12.5	45.8	74.0	-28.2	Peak	Horizontal
7324.0	52.5	-1.7	50.8	74.0	-23.2	Peak	Horizontal
10902.5	45.8	4.7	50.5	74.0	-23.5	Peak	Horizontal
3720.0	58.6	-12.4	46.2	74.0	-27.8	Peak	Vertical
7443.0	53.5	-1.1	52.4	74.0	-21.6	Peak	Vertical
11438.0	44.5	5.5	50.0	74.0	-24.0	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Yien Qian
Test Mode	3DH5	Test Date	2021/06/21
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3720.0	55.4	-12.4	43.0	74.0	-31.0	Peak	Horizontal
7443.0	51.3	-1.1	50.2	74.0	-23.8	Peak	Horizontal
11081.0	44.6	5.1	49.7	74.0	-24.3	Peak	Horizontal
3720.0	55.4	-12.4	43.0	74.0	-31.0	Peak	Vertical
7443.0	52.2	-1.1	51.1	74.0	-22.9	Peak	Vertical
10902.5	45.1	4.7	49.8	74.0	-24.2	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: SIP-AC1	Time: 2021/06/20
Limit: FCC_Part15.209_RE(3m)	Engineer: Mero Zhou
Probe: SIP-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: By Battery
Test Mode: Transmit by BT at channel 2402MHz	

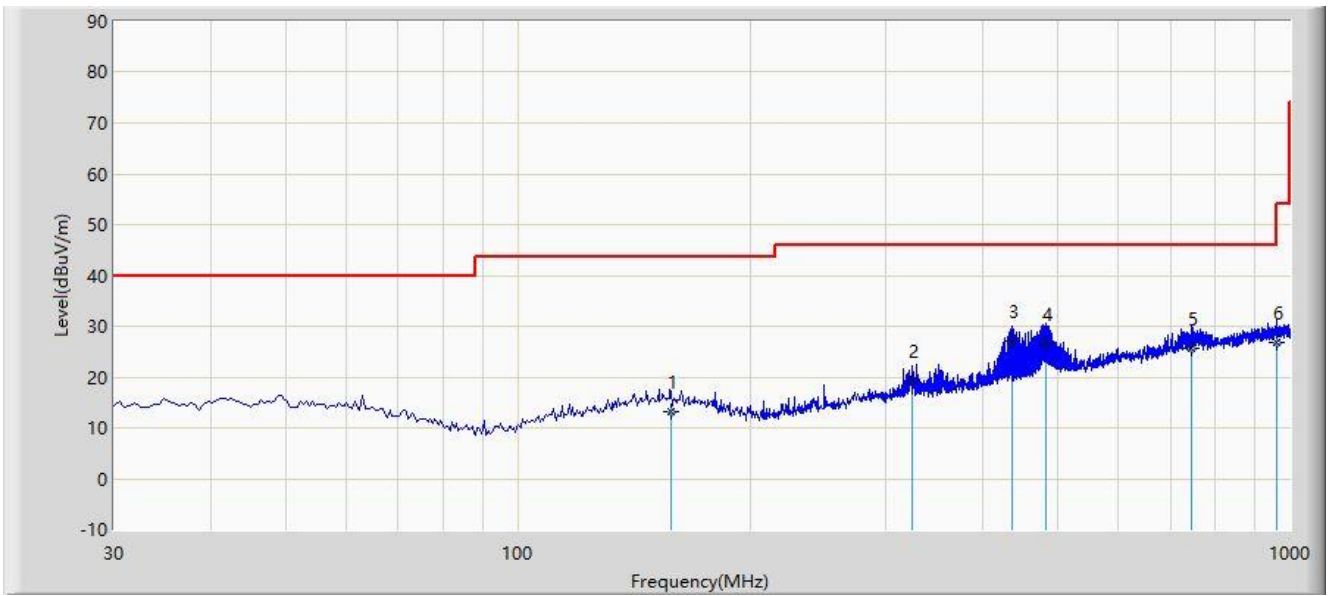

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			158.040	13.315	-4.710	-30.185	43.500	18.025	QP
2			323.910	19.380	0.420	-26.620	46.000	18.960	QP
3		*	435.945	26.969	5.190	-19.031	46.000	21.778	QP
4			483.960	26.546	4.090	-19.454	46.000	22.456	QP
5			746.345	25.684	-1.860	-20.316	46.000	27.543	QP
6			961.020	26.904	-2.570	-27.096	54.000	29.475	QP


Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: SIP-AC1	Time: 2021/06/20
Limit: FCC_Part15.209_RE(3m)	Engineer: Mero Zhou
Probe: SIP-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: By Battery
Test Mode: Transmit by BT at channel 2402MHz	

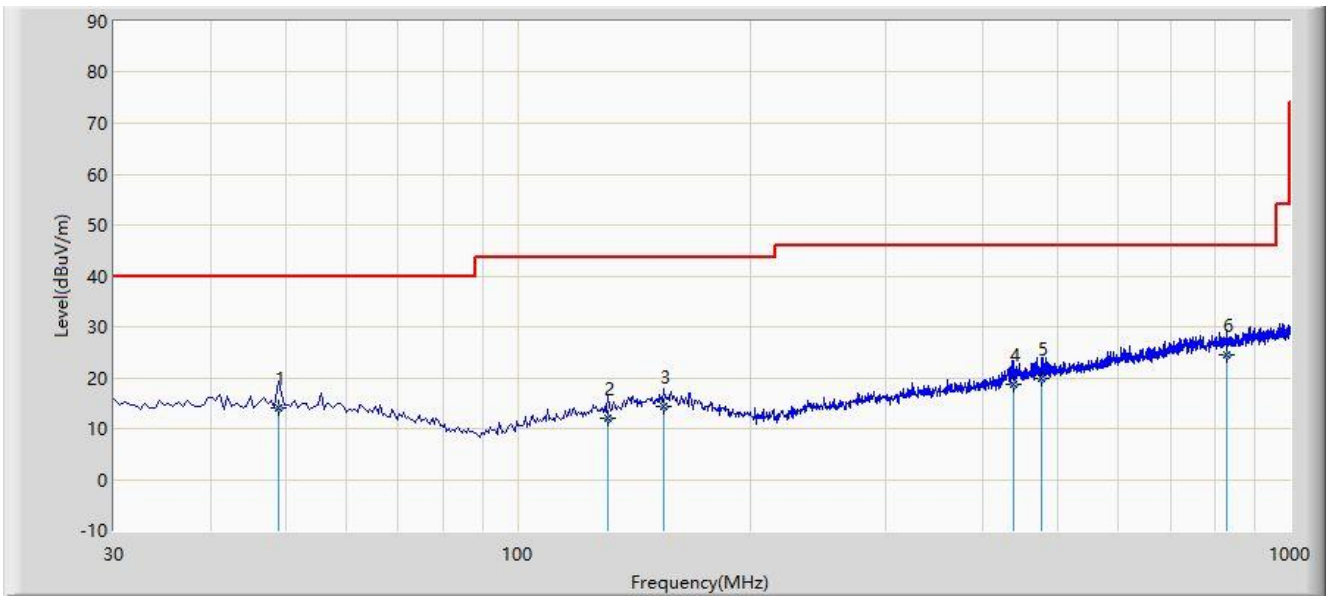

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			48.915	14.185	-3.550	-25.815	40.000	17.736	QP
2			130.880	11.943	-4.580	-31.557	43.500	16.523	QP
3			154.645	14.482	-3.590	-29.018	43.500	18.072	QP
4			437.885	18.684	-3.150	-27.316	46.000	21.834	QP
5			476.200	19.850	-2.520	-26.150	46.000	22.370	QP
6		*	829.280	24.349	-3.750	-21.651	46.000	28.099	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

5.10. Radiated Restricted Band Edge Measurement

5.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.10.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.6 & 6.10

5.10.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

5.10.4. Test Setup

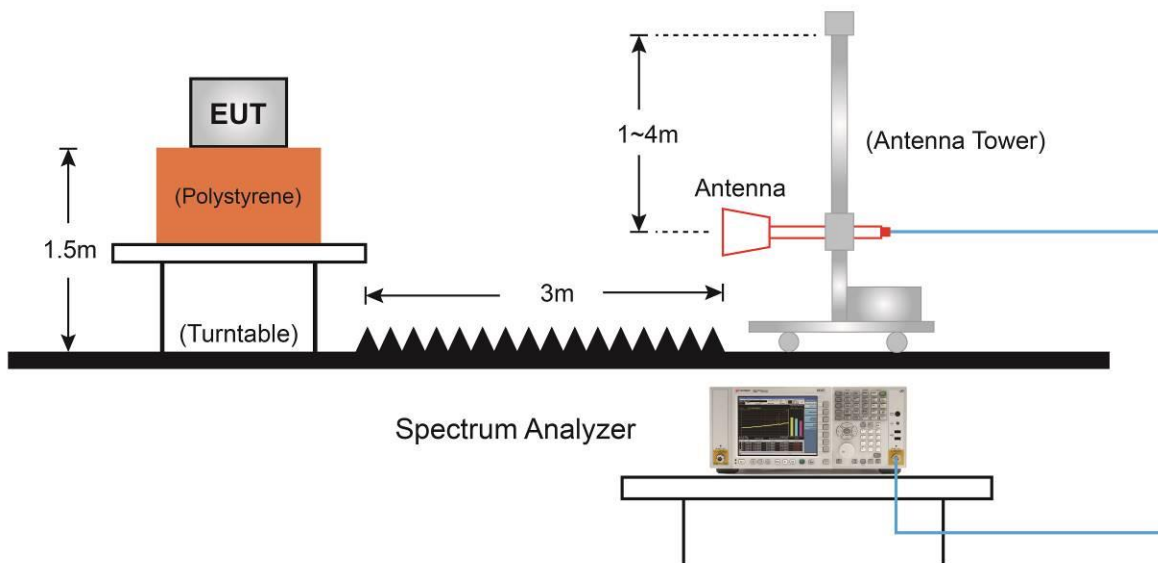

5.10.5. Test Result

Site: SIP-AC2	Time: 2021/06/20 - 11:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 DH5 at Channel 2402MHz	

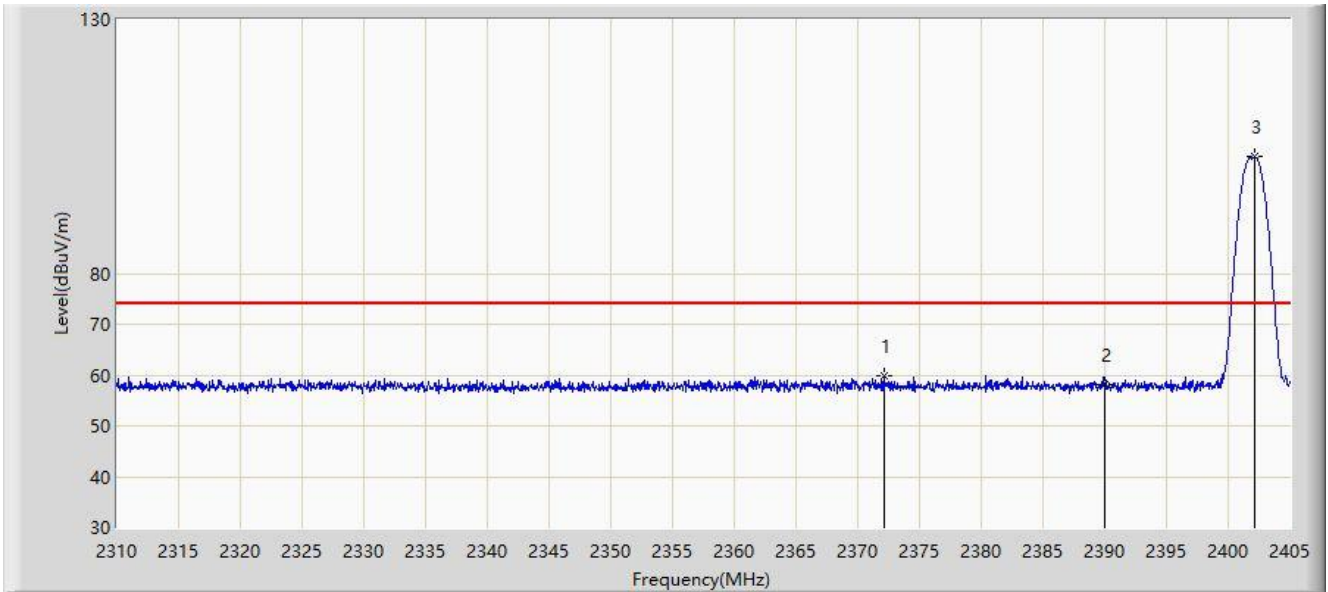


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.130	59.748	27.251	-14.252	74.000	32.497	PK
2			2390.000	58.231	25.827	-15.769	74.000	32.404	PK
3		*	2402.150	102.912	70.546	N/A	N/A	32.365	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 11:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 DH5 at Channel 2402MHz	

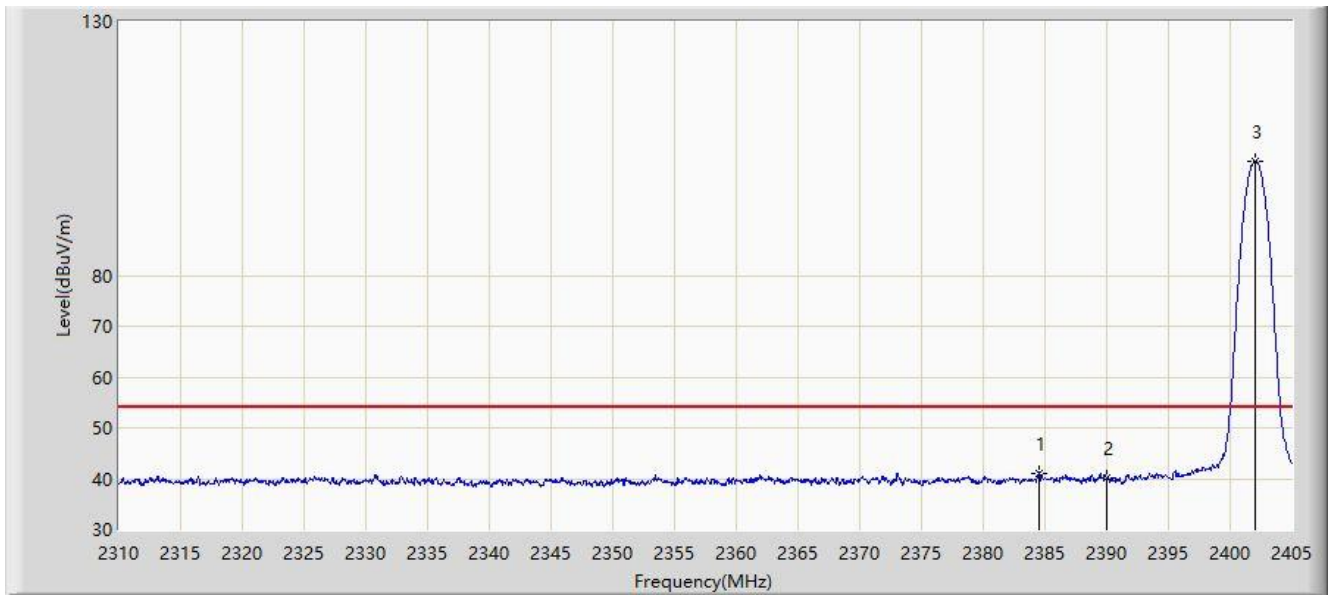


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.480	41.034	8.593	-12.966	54.000	32.441	AV
2			2390.000	40.029	7.625	-13.971	54.000	32.404	AV
3		*	2402.008	102.529	70.163	N/A	N/A	32.366	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 11:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 DH5 at Channel 2402MHz	

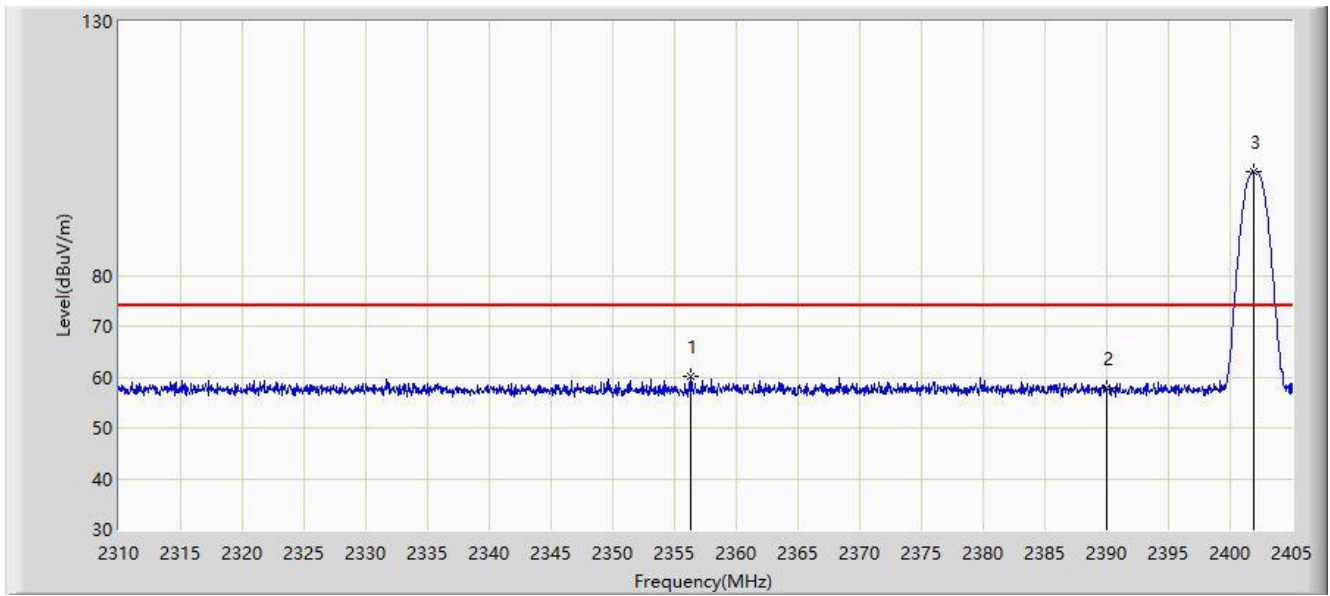


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2356.360	60.213	27.729	-13.787	74.000	32.484	PK
2			2390.000	57.937	25.533	-16.063	74.000	32.404	PK
3		*	2401.865	100.319	67.953	N/A	N/A	32.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 DH5 at Channel 2402MHz	

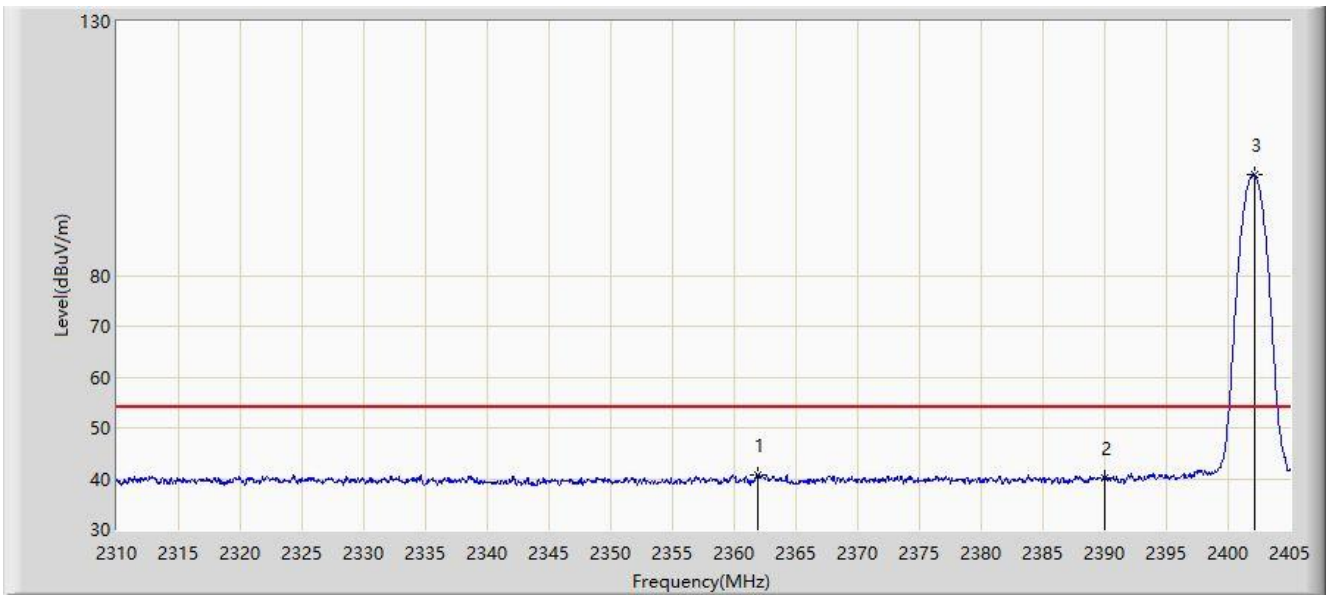


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.870	40.867	8.355	-13.133	54.000	32.512	AV
2			2390.000	40.009	7.605	-13.991	54.000	32.404	AV
3		*	2402.150	99.735	67.369	N/A	N/A	32.365	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 DH5 at Channel 2480MHz	

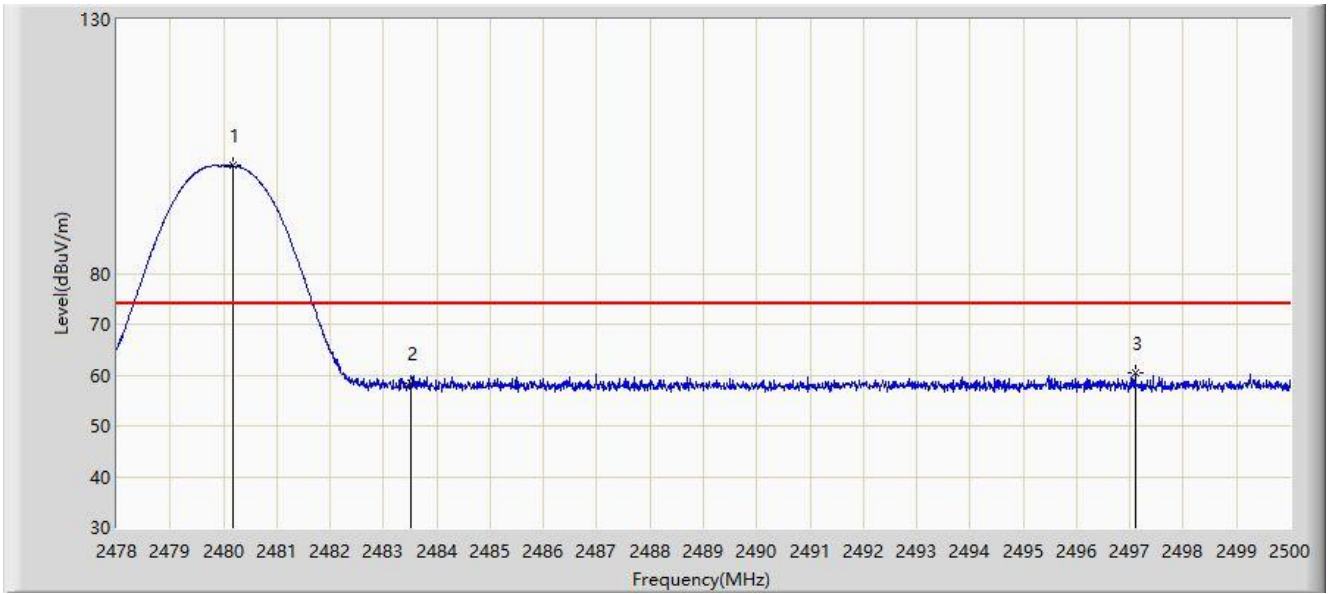


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.178	101.163	68.977	N/A	N/A	32.186	PK
2			2483.500	58.352	26.157	-15.648	74.000	32.195	PK
3			2497.096	60.370	28.138	-13.630	74.000	32.231	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 DH5 at Channel 2480MHz	

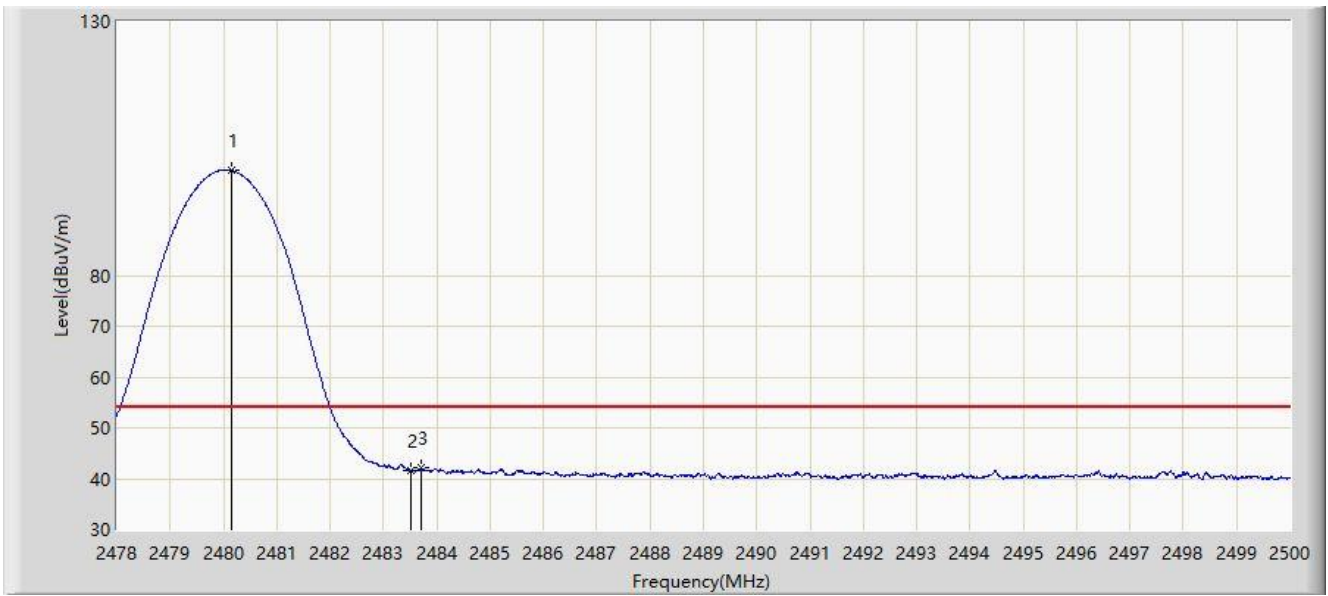


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.145	100.684	68.498	N/A	N/A	32.186	AV
2			2483.500	41.480	9.285	-12.520	54.000	32.195	AV
3			2483.709	42.095	9.899	-11.905	54.000	32.196	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 DH5 at Channel 2480MHz	

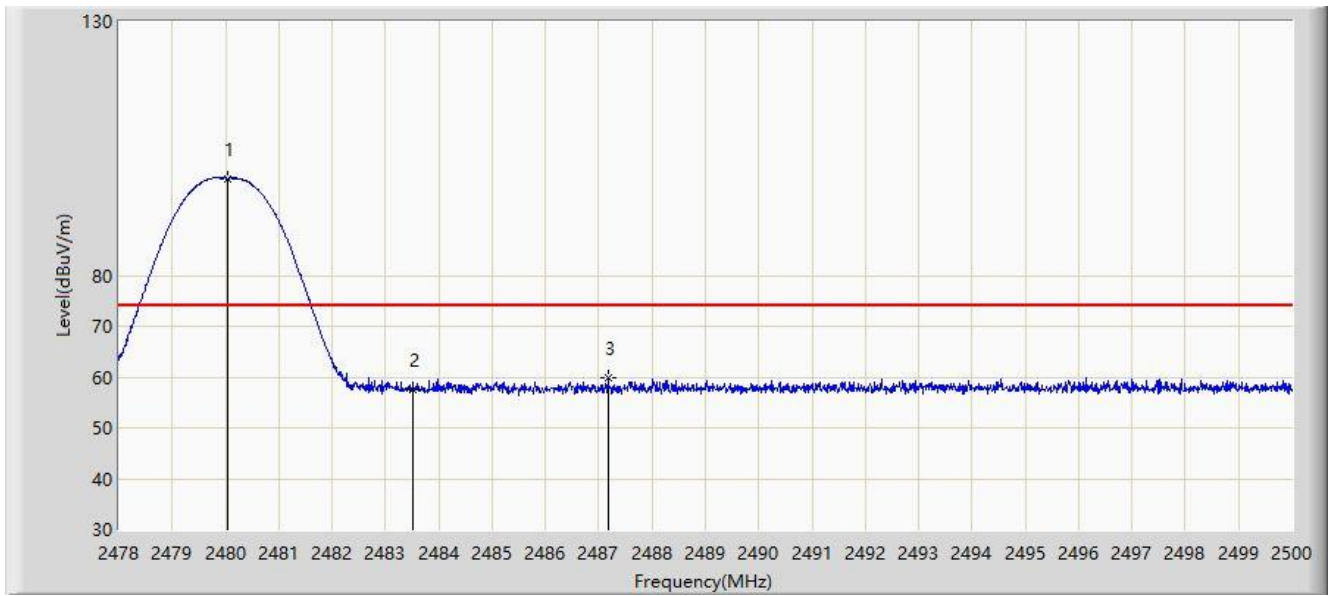


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	99.123	66.937	N/A	N/A	32.186	PK
2			2483.500	57.406	25.211	-16.594	74.000	32.195	PK
3			2487.174	59.995	27.790	-14.005	74.000	32.205	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 DH5 at Channel 2480MHz	

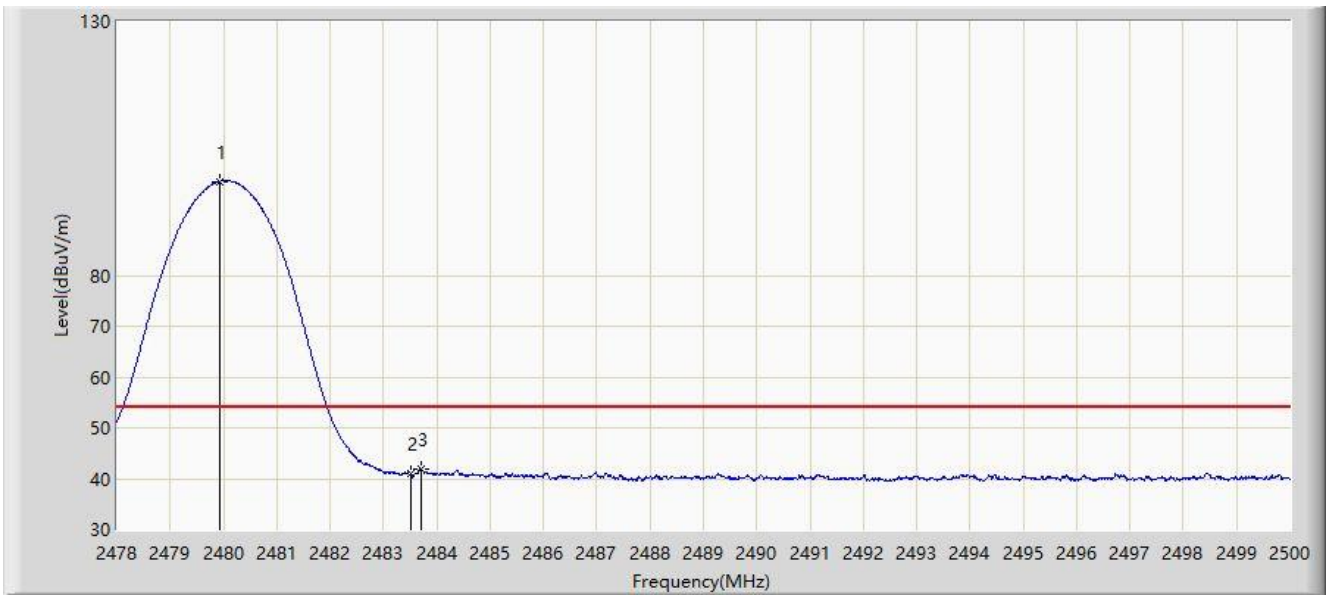


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.925	98.488	66.302	N/A	N/A	32.185	AV
2			2483.500	41.029	8.834	-12.971	54.000	32.195	AV
3			2483.698	41.772	9.576	-12.228	54.000	32.196	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 2DH5 at Channel 2402MHz	

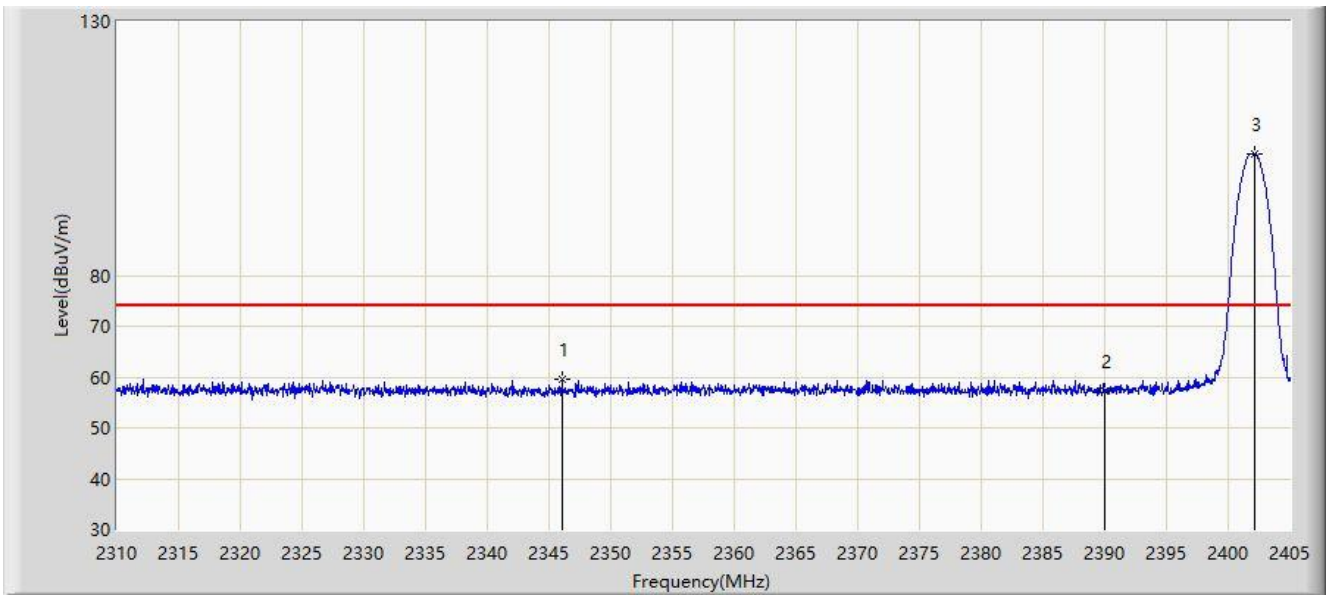


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2346.052	59.449	27.053	-14.551	74.000	32.396	PK
2			2390.000	57.185	24.781	-16.815	74.000	32.404	PK
3		*	2402.150	104.014	71.648	N/A	N/A	32.365	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 2DH5 at Channel 2402MHz	

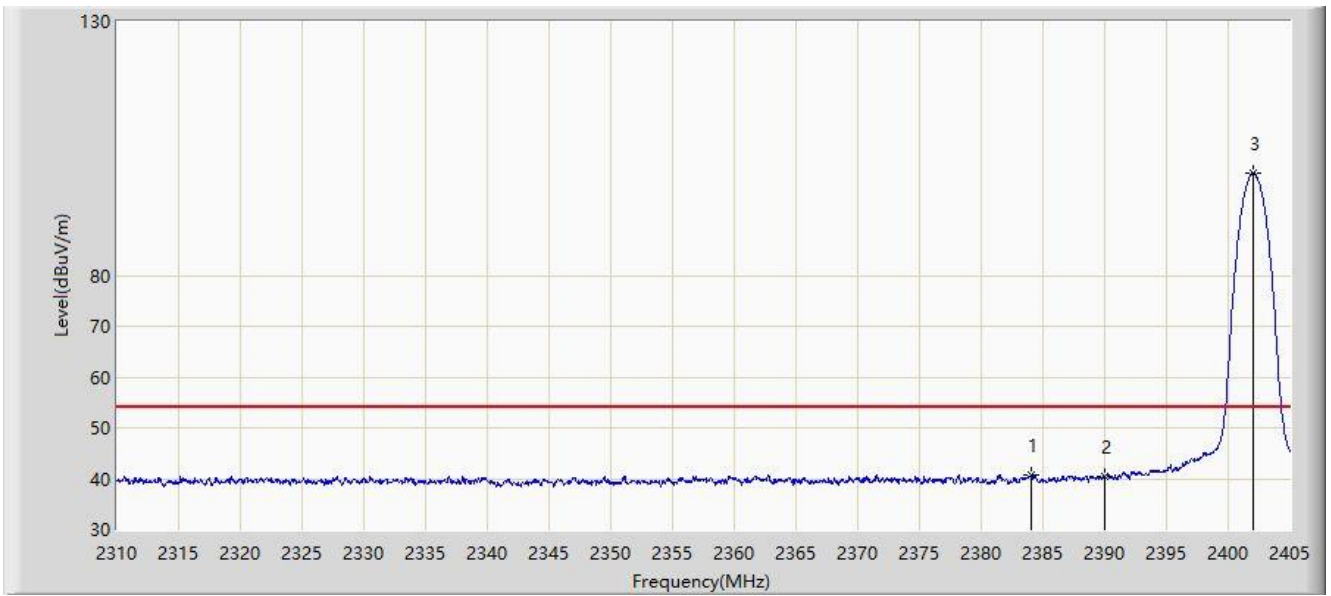


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.005	40.752	8.308	-13.248	54.000	32.444	AV
2			2390.000	40.502	8.098	-13.498	54.000	32.404	AV
3		*	2402.008	100.144	67.778	N/A	N/A	32.366	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 2DH5 at Channel 2402MHz	

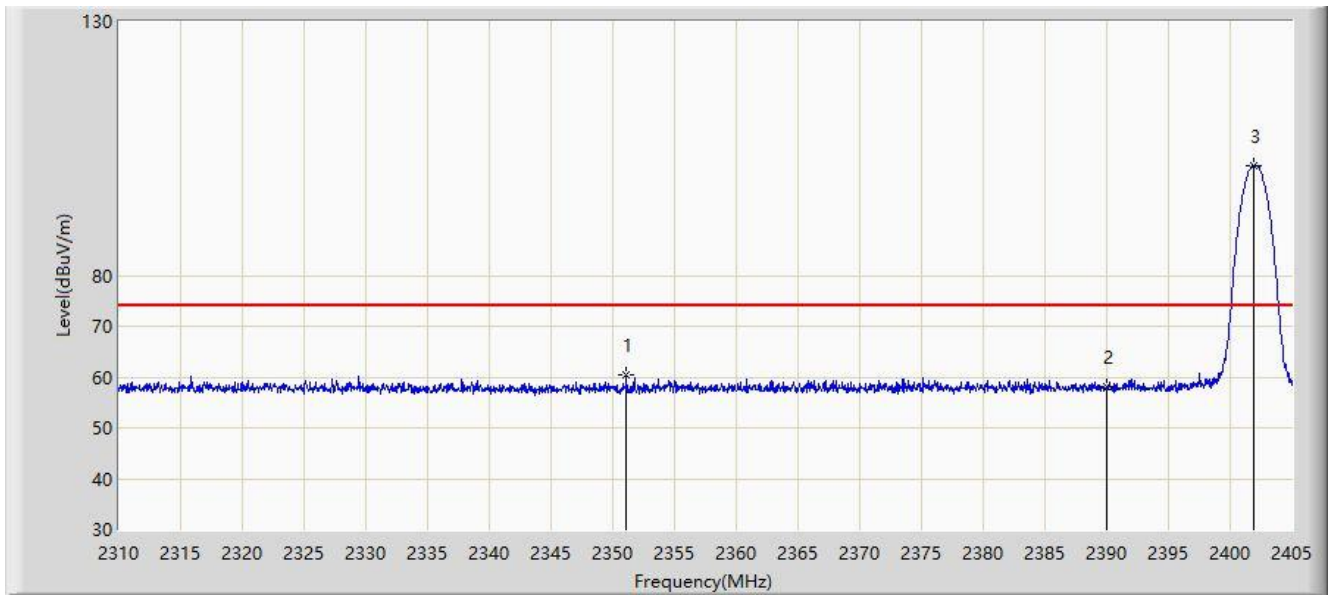


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2351.087	60.384	27.945	-13.616	74.000	32.439	PK
2			2390.000	58.026	25.622	-15.974	74.000	32.404	PK
3		*	2401.865	101.588	69.222	N/A	N/A	32.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 2DH5 at Channel 2402MHz	

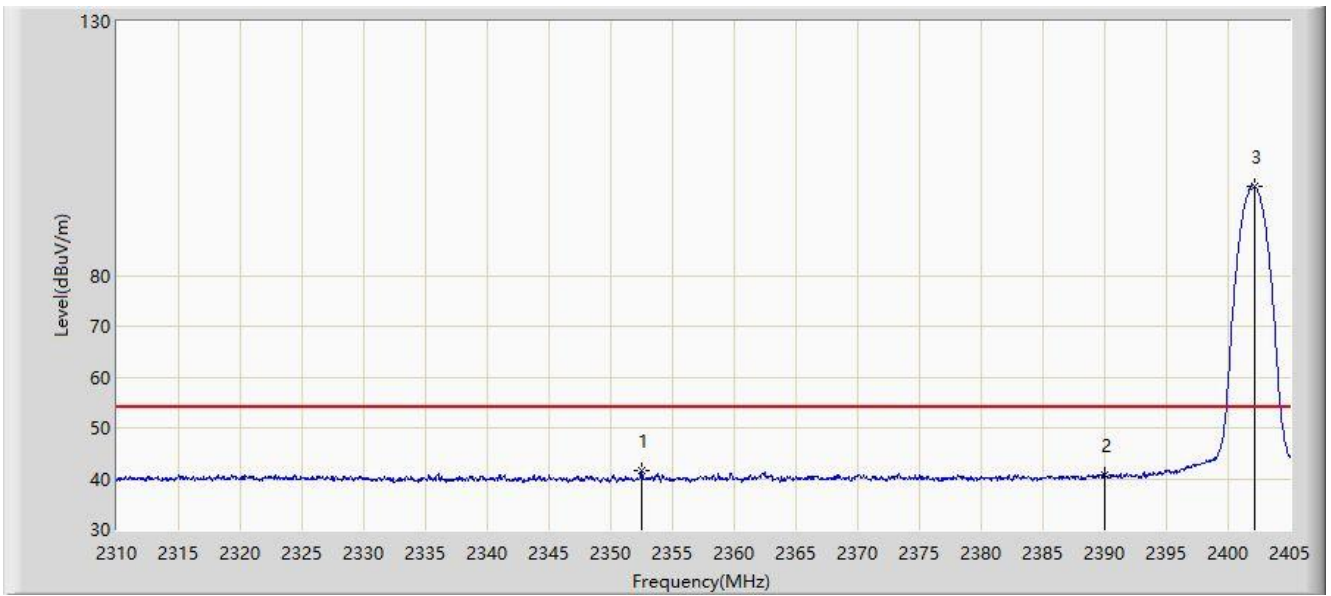


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2352.465	41.626	9.175	-12.374	54.000	32.450	AV
2			2390.000	40.661	8.257	-13.339	54.000	32.404	AV
3		*	2402.150	97.566	65.200	N/A	N/A	32.365	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 2DH5 at Channel 2480MHz	

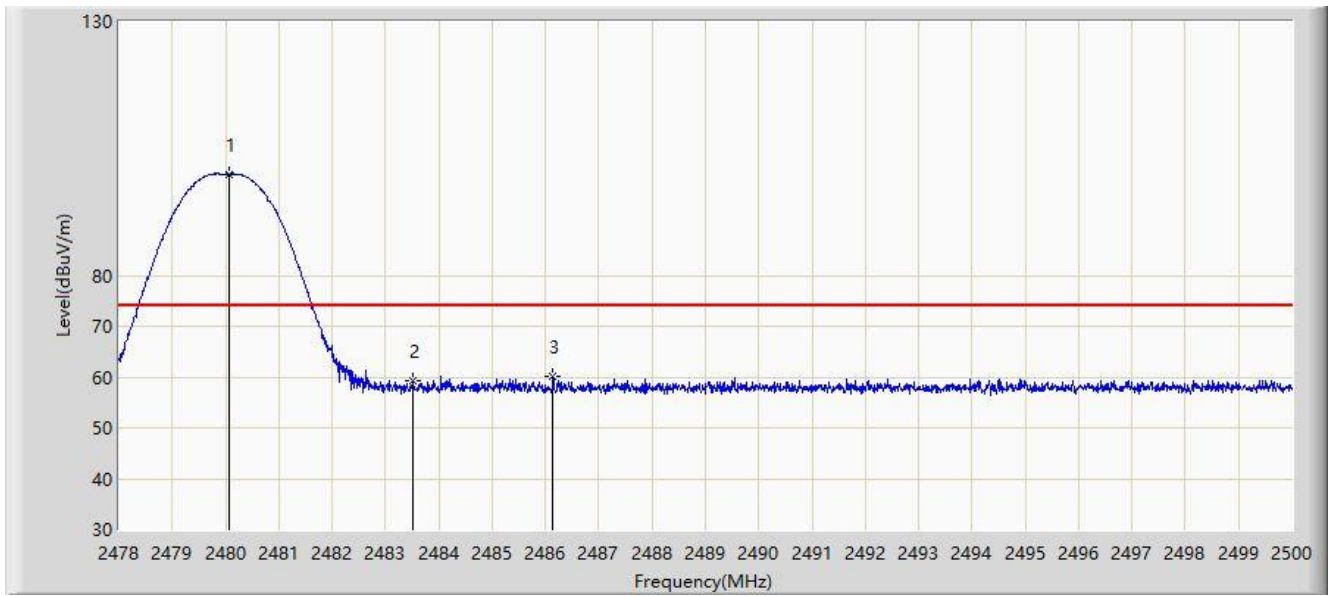


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	99.949	67.763	N/A	N/A	32.186	PK
2			2483.500	59.216	27.021	-14.784	74.000	32.195	PK
3			2486.140	60.109	27.907	-13.891	74.000	32.202	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 2DH5 at Channel 2480MHz	

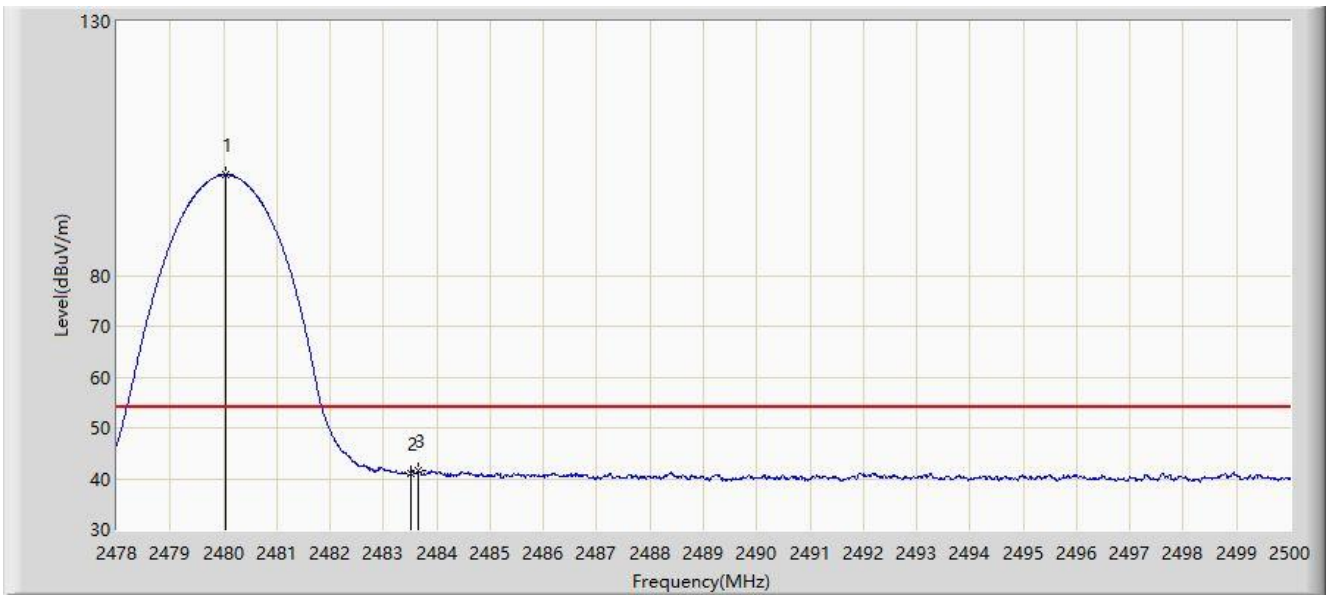


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	99.762	67.576	N/A	N/A	32.186	AV
2			2483.500	41.016	8.821	-12.984	54.000	32.195	AV
3			2483.654	41.588	9.392	-12.412	54.000	32.196	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 12:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 2DH5 at Channel 2480MHz	

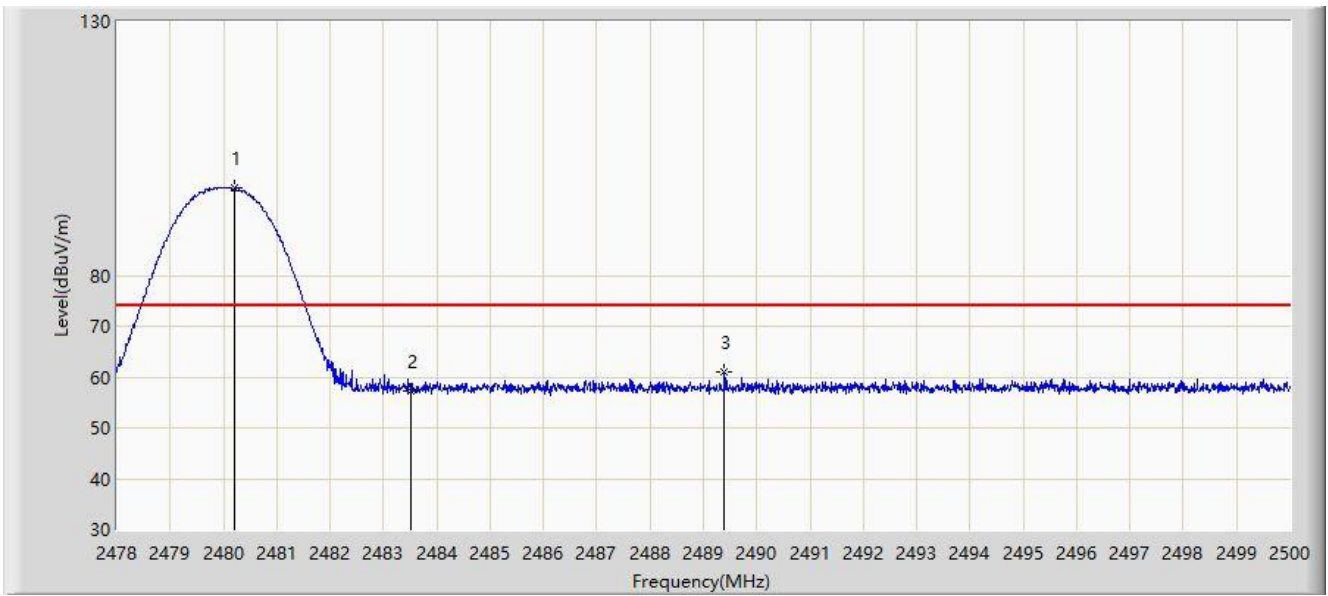


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.211	97.237	65.051	N/A	N/A	32.186	PK
2			2483.500	57.306	25.111	-16.694	74.000	32.195	PK
3			2489.385	61.102	28.891	-12.898	74.000	32.211	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 2DH5 at Channel 2480MHz	

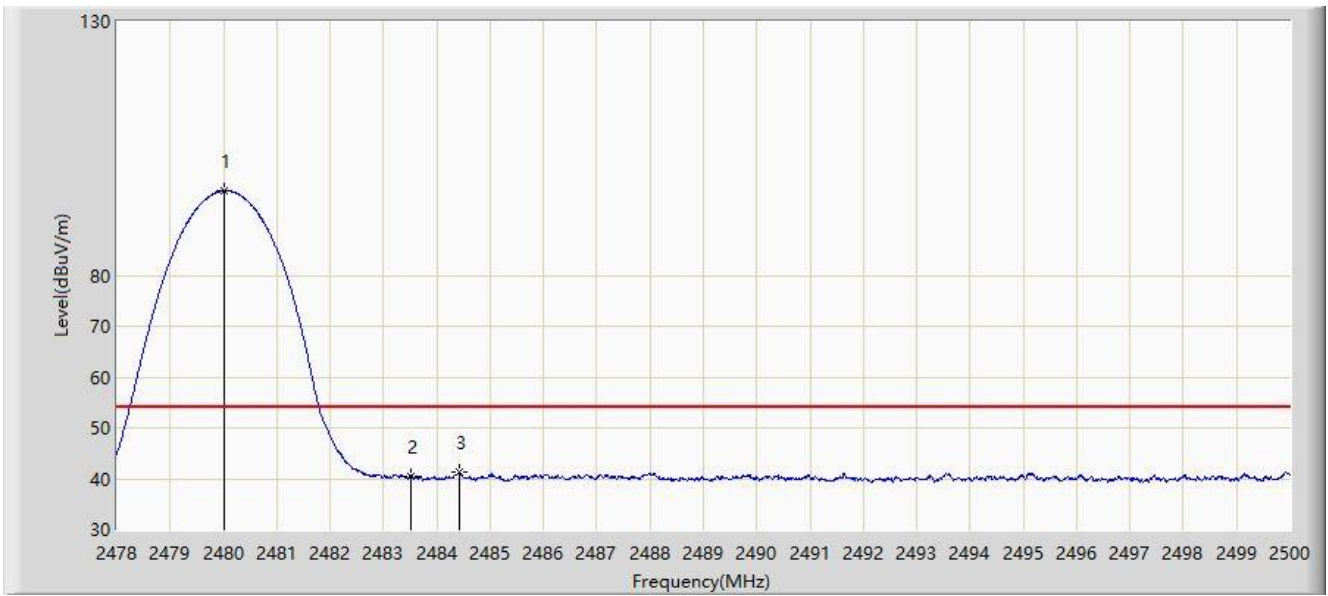


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	96.635	64.449	N/A	N/A	32.186	AV
2			2483.500	40.505	8.310	-13.495	54.000	32.195	AV
3			2484.424	41.165	8.967	-12.835	54.000	32.198	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 3DH5 at Channel 2402MHz	

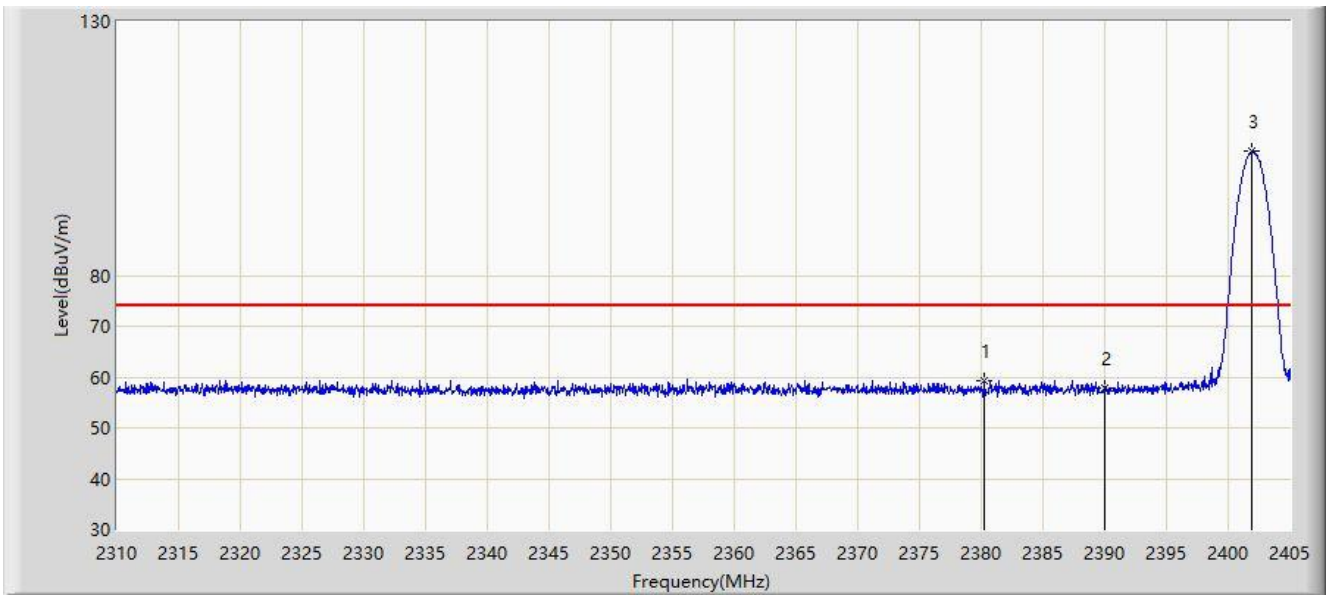


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2380.205	59.355	26.886	-14.645	74.000	32.469	PK
2			2390.000	57.959	25.555	-16.041	74.000	32.404	PK
3		*	2401.960	104.399	72.033	N/A	N/A	32.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 3DH5 at Channel 2402MHz	

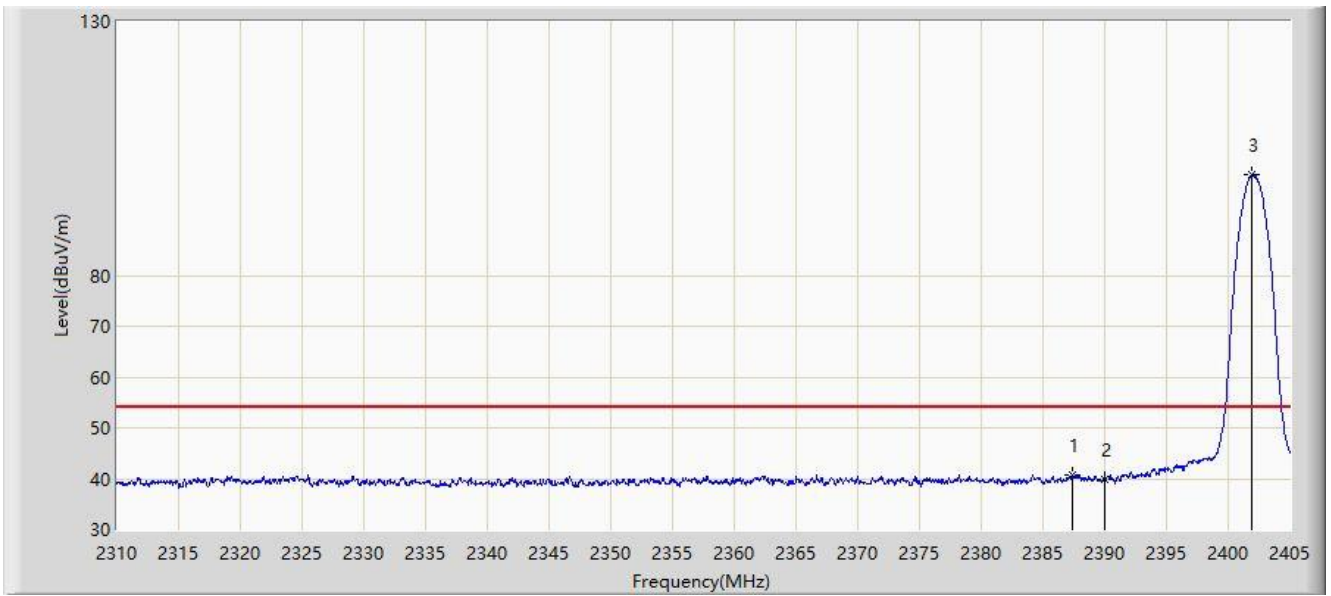


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.377	40.715	8.293	-13.285	54.000	32.421	AV
2			2390.000	39.863	7.459	-14.137	54.000	32.404	AV
3		*	2401.913	99.827	67.461	N/A	N/A	32.366	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 3DH5 at Channel 2402MHz	

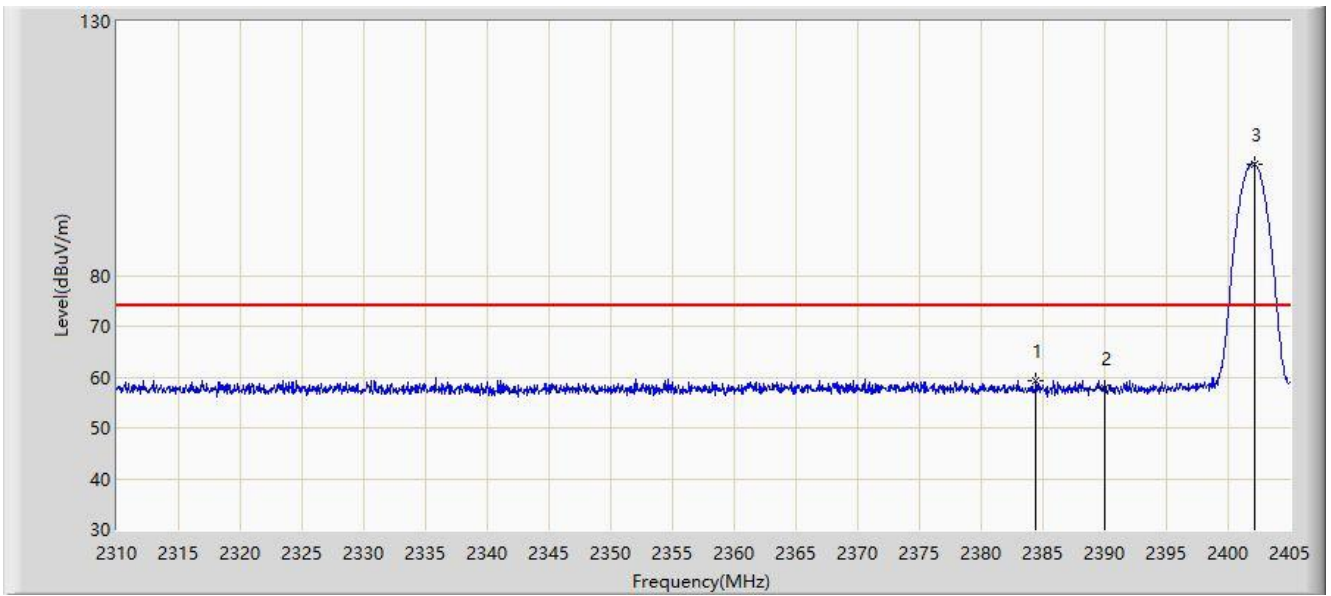


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.433	59.234	26.793	-14.766	74.000	32.441	PK
2			2390.000	57.918	25.514	-16.082	74.000	32.404	PK
3		*	2402.150	101.951	69.585	N/A	N/A	32.365	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 3DH5 at Channel 2402MHz	

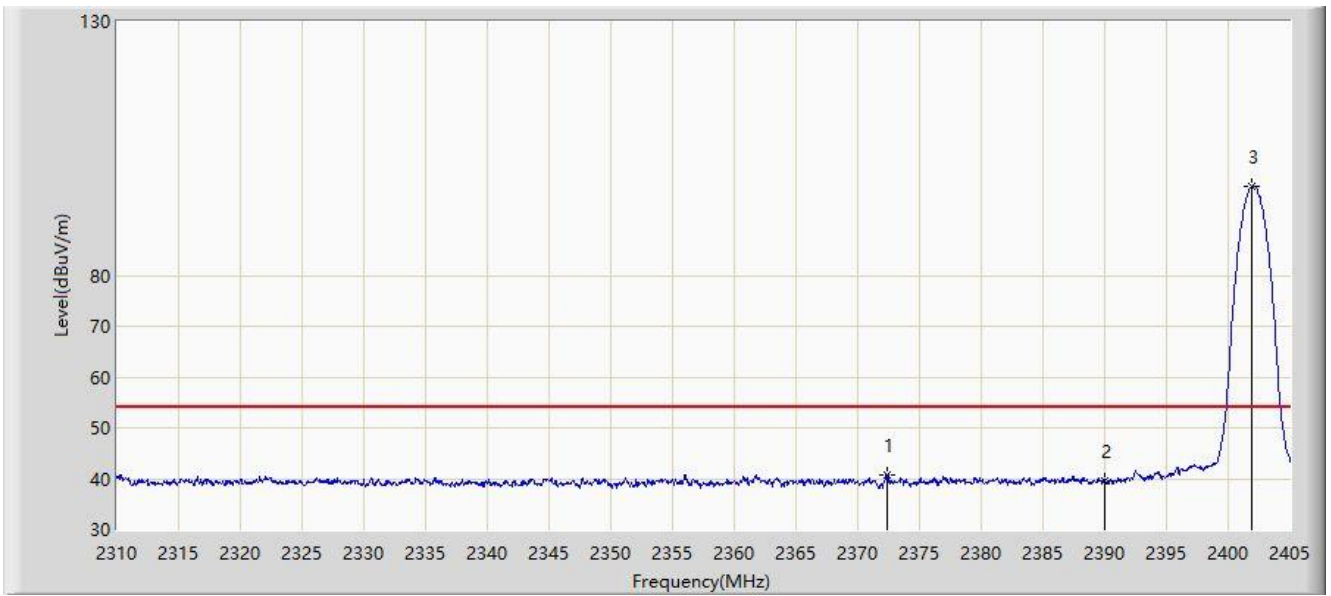


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.415	40.756	8.259	-13.244	54.000	32.496	AV
2			2390.000	39.621	7.217	-14.379	54.000	32.404	AV
3		*	2401.913	97.562	65.196	N/A	N/A	32.366	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 3DH5 at Channel 2480MHz	

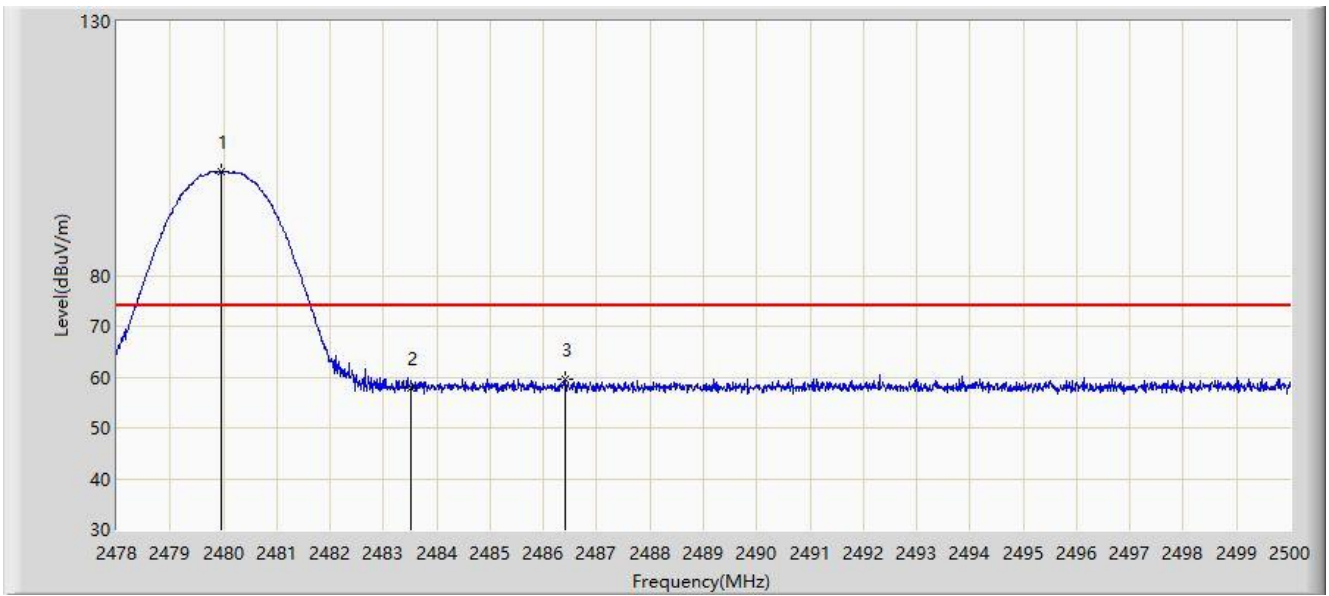


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.969	100.390	68.204	N/A	N/A	32.186	PK
2			2483.500	57.918	25.723	-16.082	74.000	32.195	PK
3			2486.404	59.651	27.448	-14.349	74.000	32.203	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 3DH5 at Channel 2480MHz	

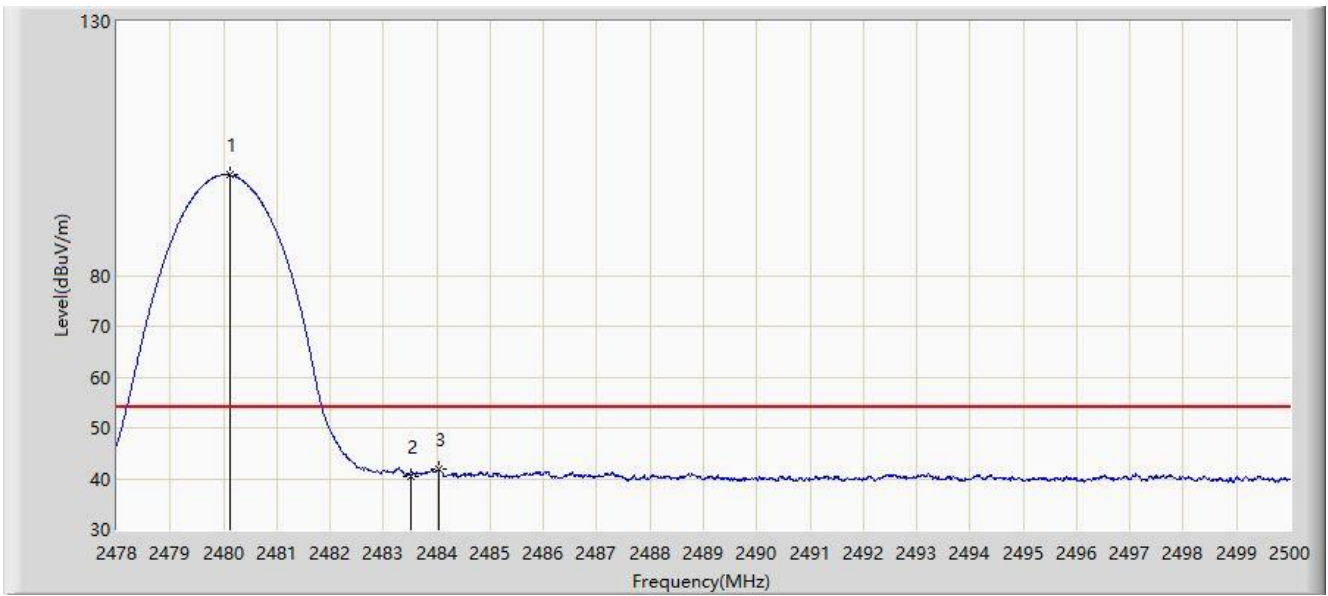


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.112	99.775	67.589	N/A	N/A	32.186	AV
2			2483.500	40.567	8.372	-13.433	54.000	32.195	AV
3			2484.050	41.749	9.552	-12.251	54.000	32.196	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 3DH5 at Channel 2480MHz	

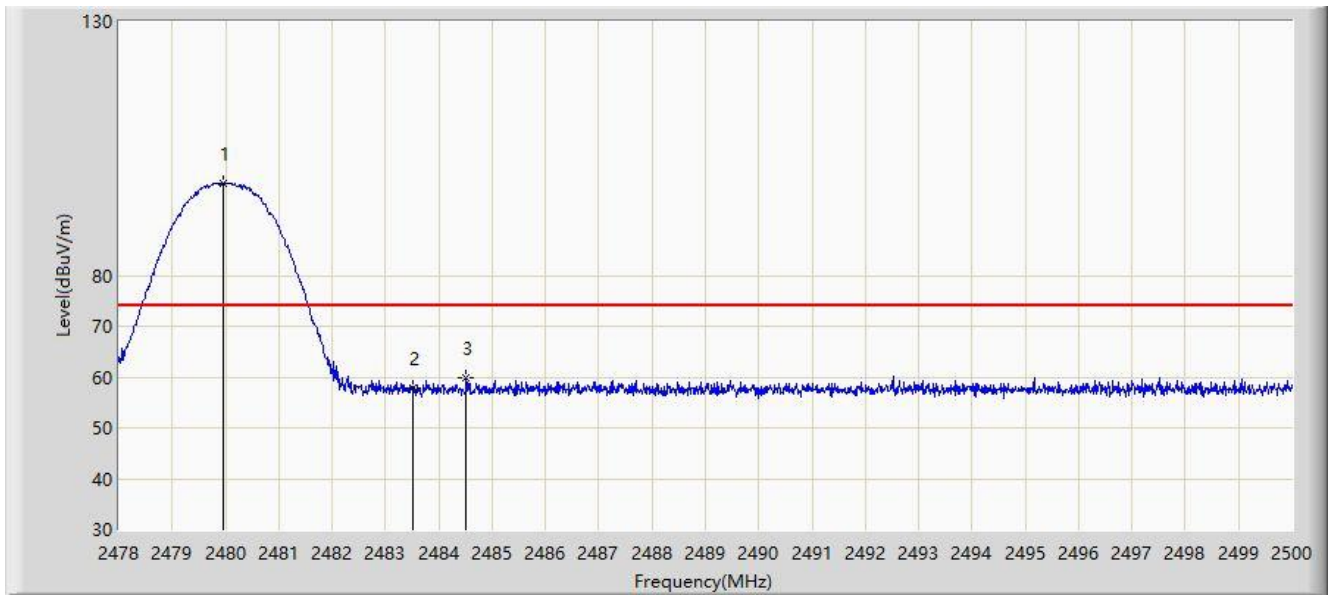


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.969	97.989	65.803	N/A	N/A	32.186	PK
2			2483.500	57.797	25.602	-16.203	74.000	32.195	PK
3			2484.512	59.751	27.553	-14.249	74.000	32.198	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: SIP-AC2	Time: 2021/06/20 - 13:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: True Wireless Earphone	Power: Powered by Battery
Test Mode: Transmit by BT3.0 3DH5 at Channel 2480MHz	

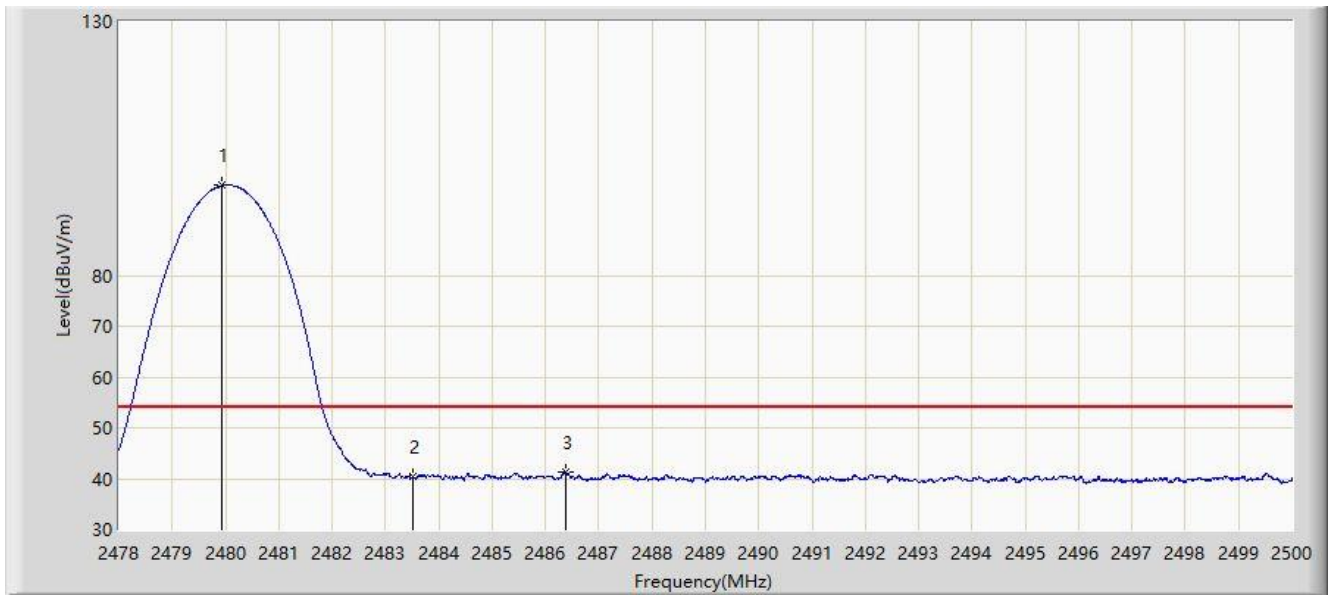

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.936	97.708	65.522	N/A	N/A	32.185	AV
2			2483.500	40.366	8.171	-13.634	54.000	32.195	AV
3			2486.371	41.267	9.064	-12.733	54.000	32.203	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

5.11. AC Conducted Emissions Measurement


5.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

5.11.2. Test Setup

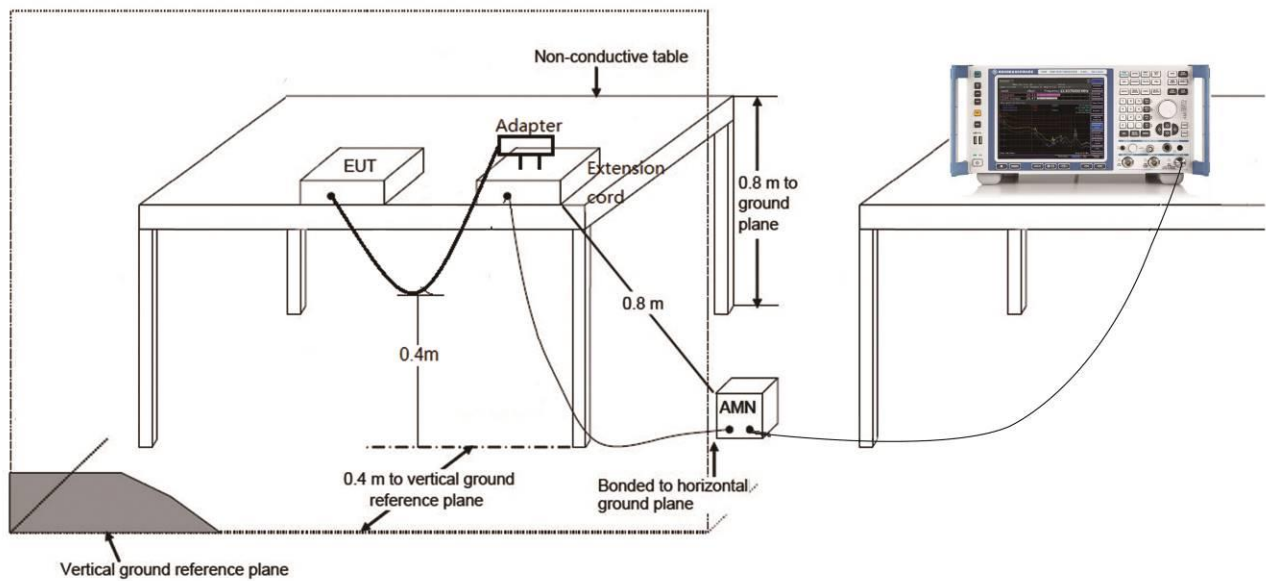

5.11.3. Test Result

Site: SIP-SR2	Time: 2021/06/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Wayen Wang
Probe: SIP-SR2-ENV216_101684_With Connector	Polarity: Line
EUT: True Wireless Earphone	Power: AC 120V/60Hz
Test Mode 1	

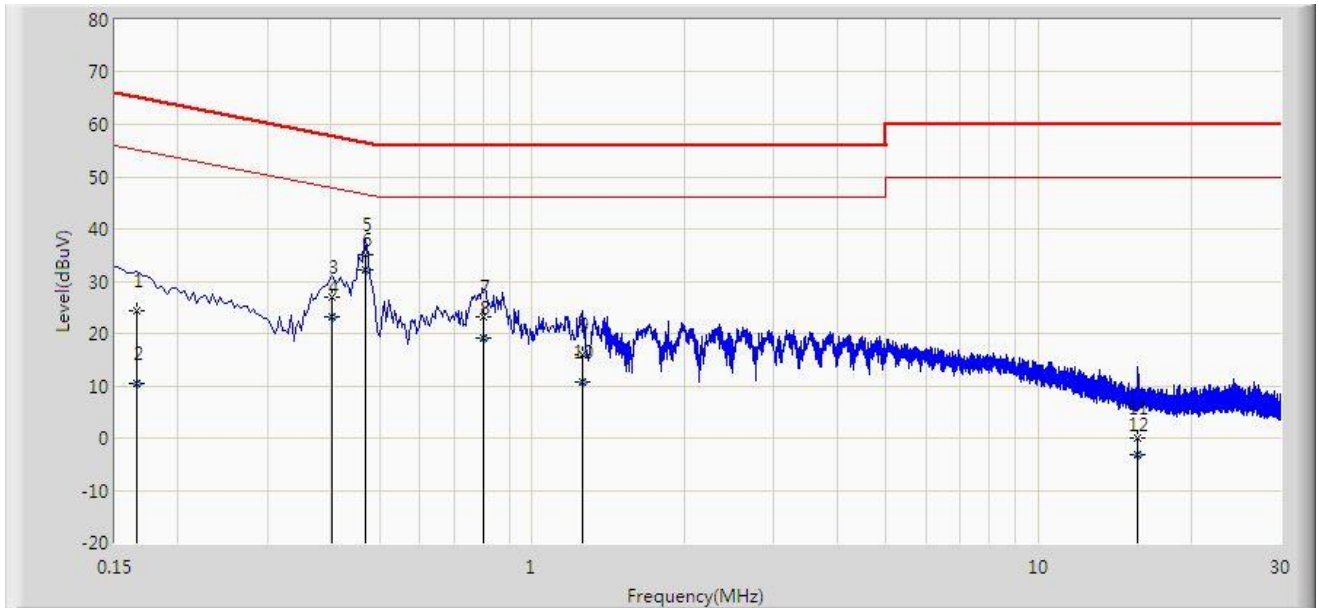


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.166	24.422	14.968	-40.737	65.158	9.453	QP
2			0.166	10.316	0.863	-44.842	55.158	9.453	AV
3			0.402	27.029	17.476	-30.783	57.812	9.553	QP
4			0.402	23.203	13.650	-24.608	47.812	9.553	AV
5			0.470	35.058	25.500	-21.456	56.514	9.558	QP
6		*	0.470	32.258	22.700	-14.256	46.514	9.558	AV
7			0.802	23.213	13.653	-32.787	56.000	9.560	QP
8			0.802	19.097	9.537	-26.903	46.000	9.560	AV
9			1.254	15.970	6.410	-40.030	56.000	9.560	QP
10			1.254	10.770	1.210	-35.230	46.000	9.560	AV
11			15.726	0.095	-10.097	-59.905	60.000	10.192	QP
12			15.726	-3.149	-13.341	-53.149	50.000	10.192	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Time: 2021/06/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Wayen Wang
Probe: SIP-SR2-ENV216_101684_With Connector	Polarity: Neutral
EUT: True Wireless Earphone	Power: AC 120V/60Hz
Test Mode 1	

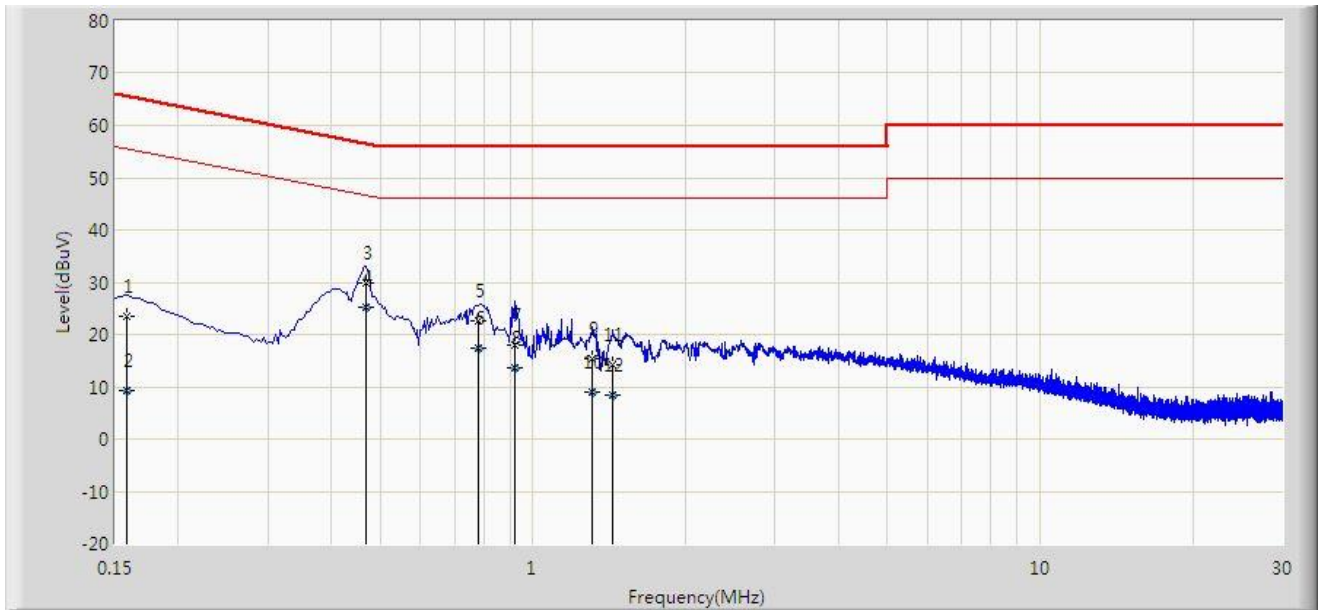

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	23.420	13.988	-42.149	65.568	9.432	QP
2			0.158	9.317	-0.115	-46.252	55.568	9.432	AV
3			0.470	29.797	20.259	-26.720	56.516	9.538	QP
4		*	0.470	25.167	15.629	-21.350	46.516	9.538	AV
5			0.782	22.603	13.063	-33.397	56.000	9.540	QP
6			0.782	17.466	7.926	-28.534	46.000	9.540	AV
7			0.922	17.915	8.385	-38.085	56.000	9.530	QP
8			0.922	13.598	4.068	-32.402	46.000	9.530	AV
9			1.306	15.354	5.811	-40.646	56.000	9.543	QP
10			1.306	8.895	-0.648	-37.105	46.000	9.543	AV
11			1.438	14.139	4.585	-41.861	56.000	9.554	QP
12			1.438	8.385	-1.169	-37.615	46.000	9.554	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

6. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2106RSU033-UT" file.

Appendix B - EUT Photograph

Refer to "2106RSU033-UE" file.