


Number of Hops in Sweep Time


DH1-2402MHz




DH1-2480MHz

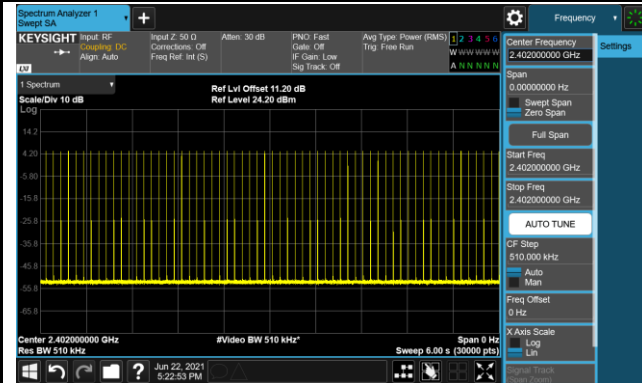


DH3-2402MHz

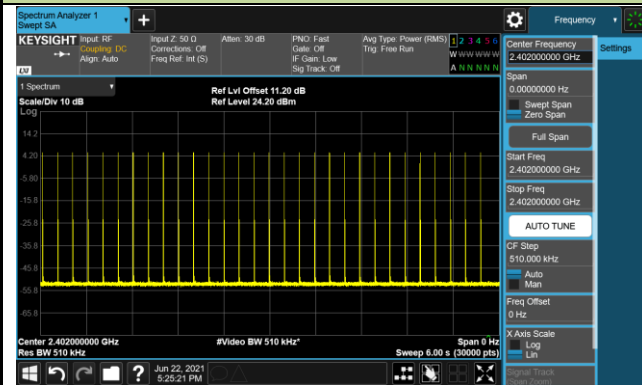


DH3-2480MHz

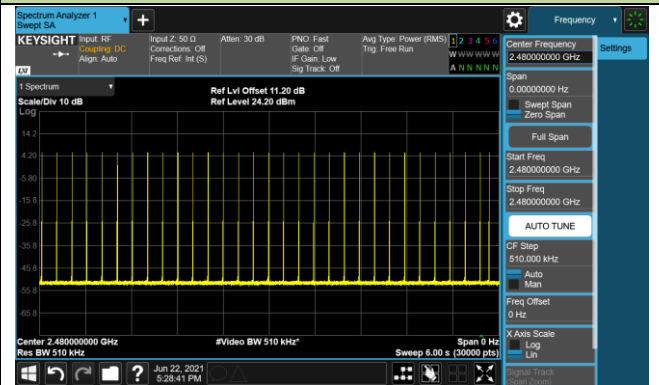

DH5-2402MHz

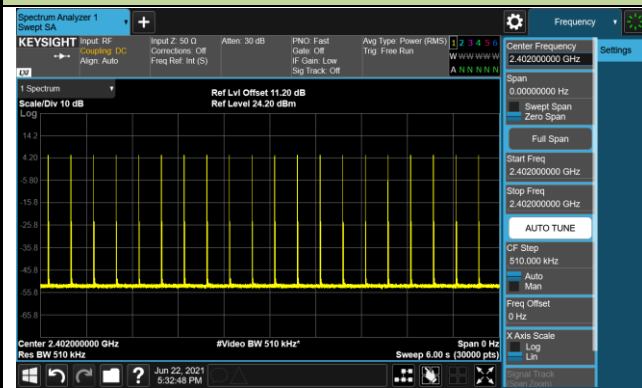

DH5-2480MHz

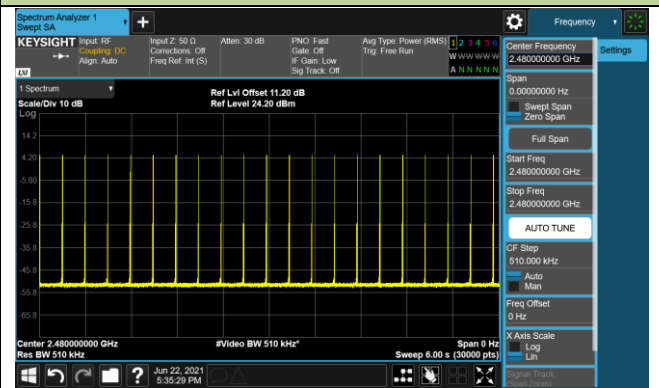

5.7. Band-edge Compliance Measurement

5.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.


5.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.10.4

5.7.3. Test Setting

1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

5.7.4. Test Setup

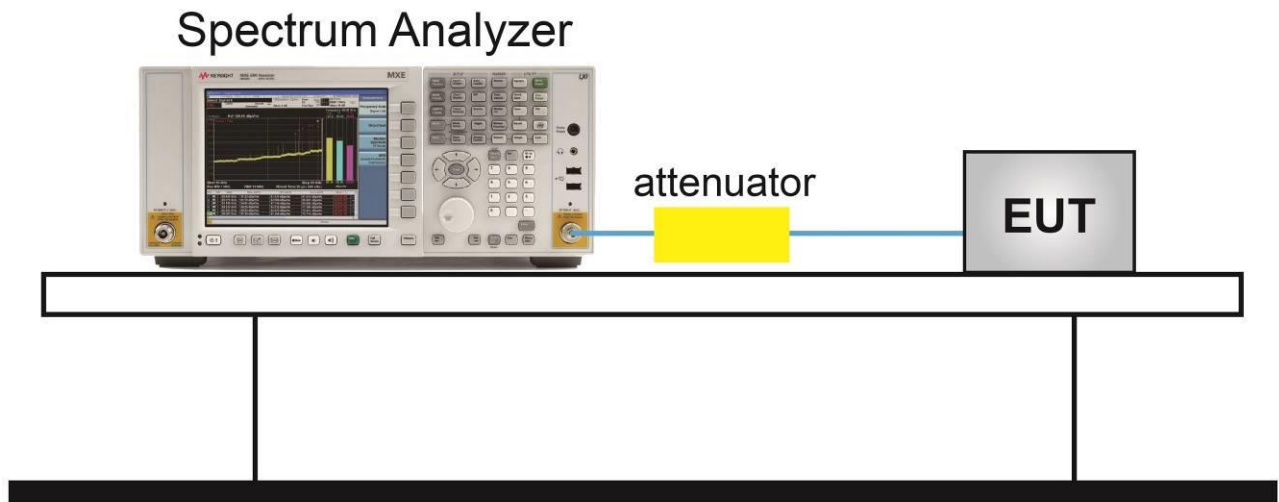


5.7.5. Test Result

Test Site	WZ-SR5	Test Engineer	Bella Chen
Test Date	2021/06/22 ~ 2021/06/23		


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
DH5	00	2402	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	78	2480	20dBc	Pass

Band-edge Compliance


DH5 - Channel 00 (2402MHz)

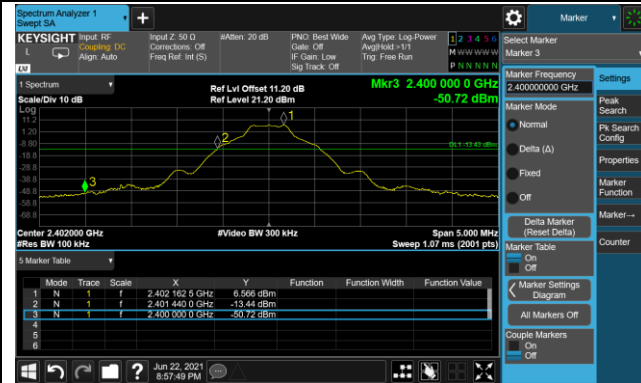


DH5 - Channel 78 (2480MHz)

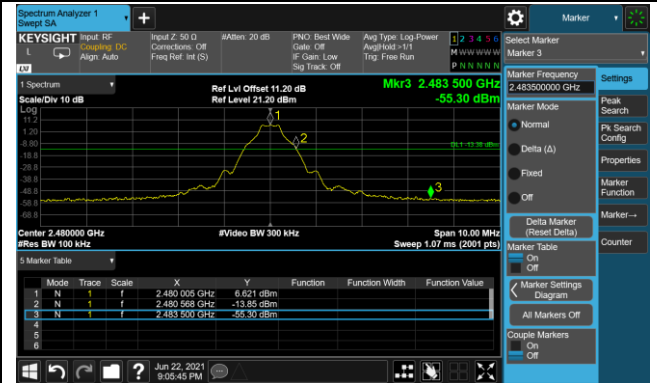


2DH5 - Channel 00 (2402MHz)

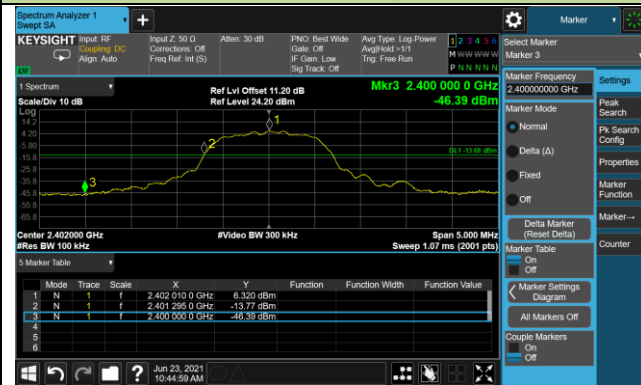


2DH5 - Channel 78 (2480MHz)

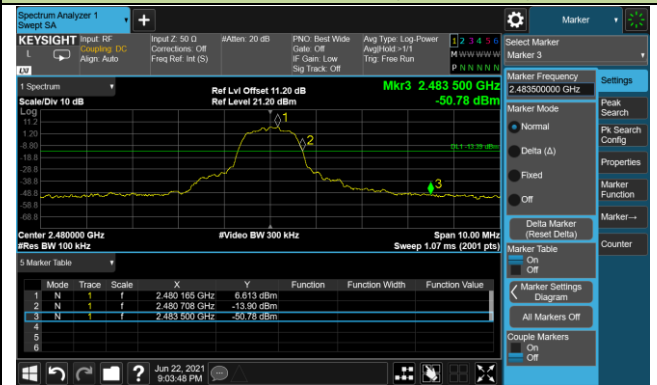

3DH5 - Channel 00 (2402MHz)

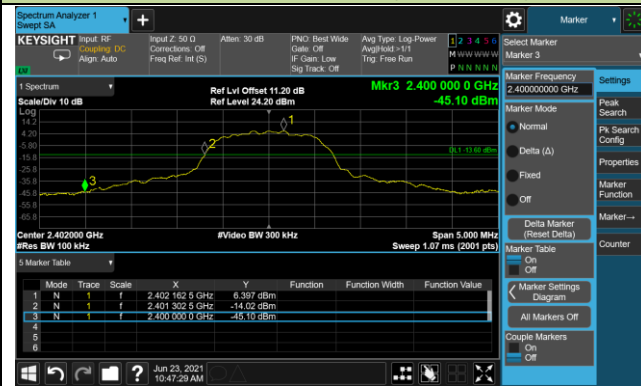


3DH5 - Channel 78 (2480MHz)

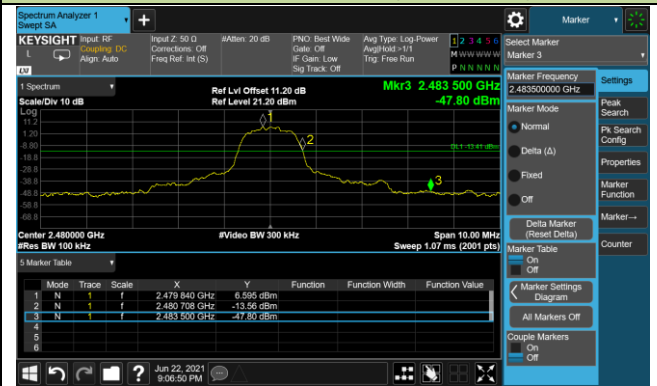


Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

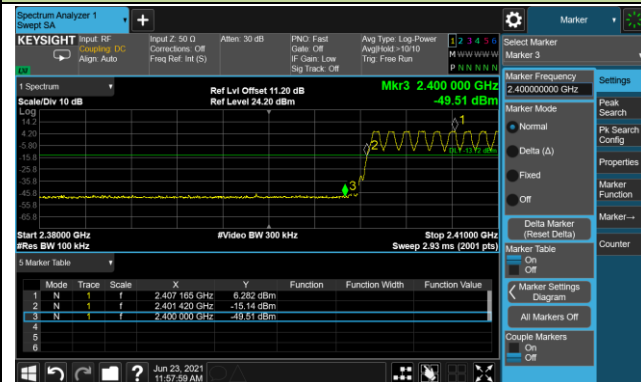


DH5 - Channel 78 (2480MHz)

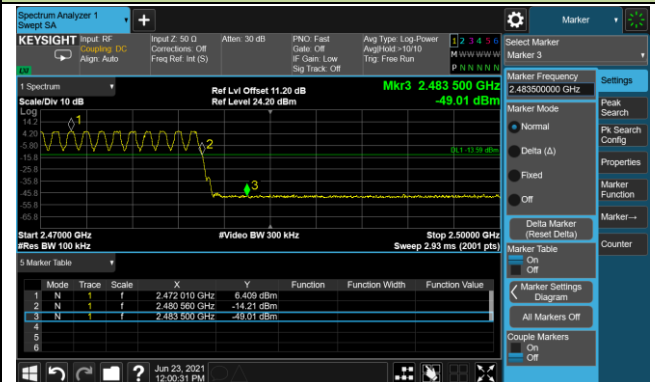


2DH5 - Channel 00 (2402MHz)

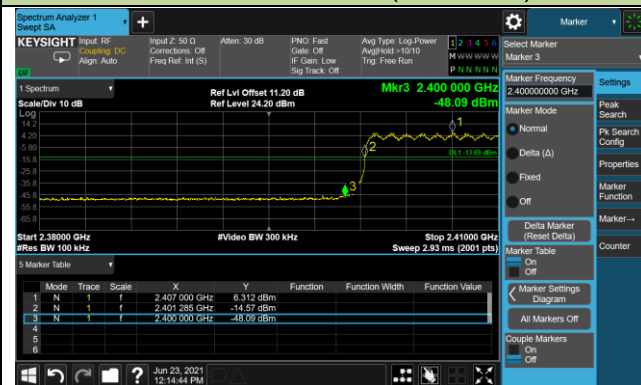


2DH5 - Channel 78 (2480MHz)

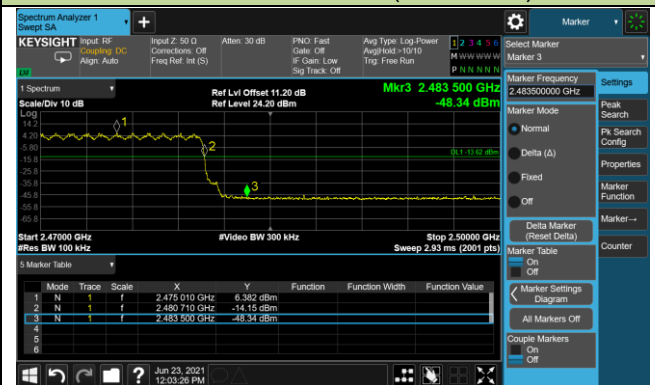

3DH5 - Channel 00 (2402MHz)

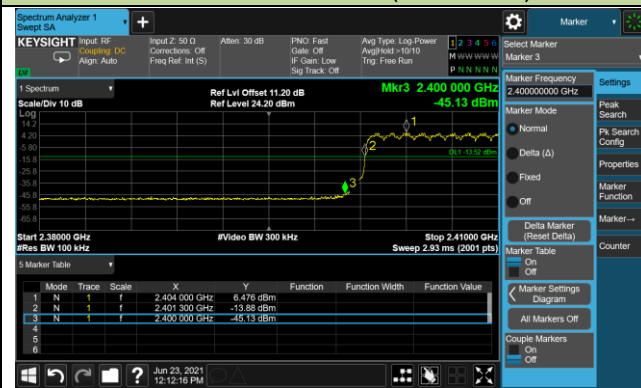

3DH5 - Channel 78 (2480MHz)

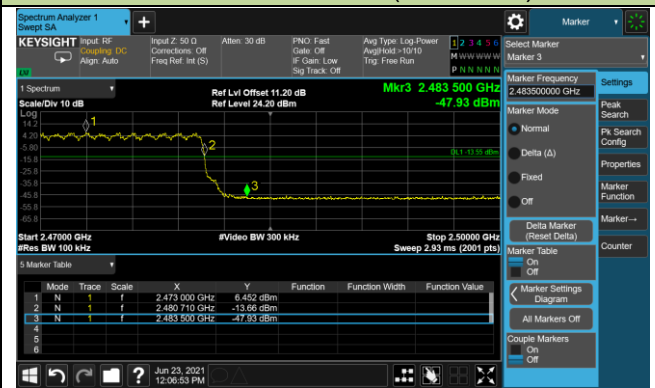

5.8. Conducted Spurious Emissions Measurement

5.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


5.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

5.8.3. Test Setting

1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

5.8.4. Test Setup

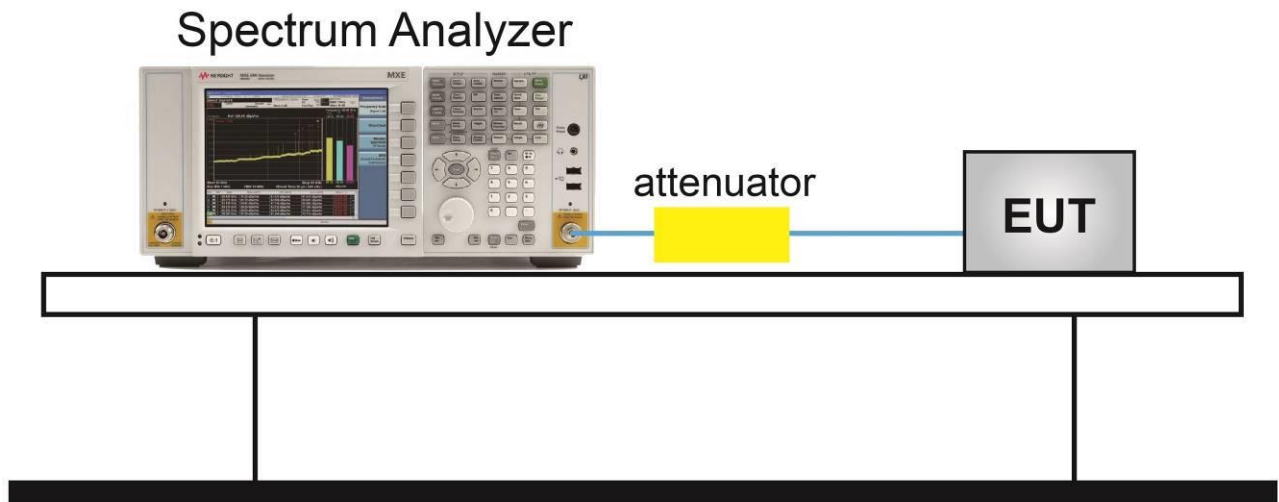


5.8.5. Test Result

Test Site	WZ-SR5	Test Engineer	Bella Chen
Test Date	2021/06/23		


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)

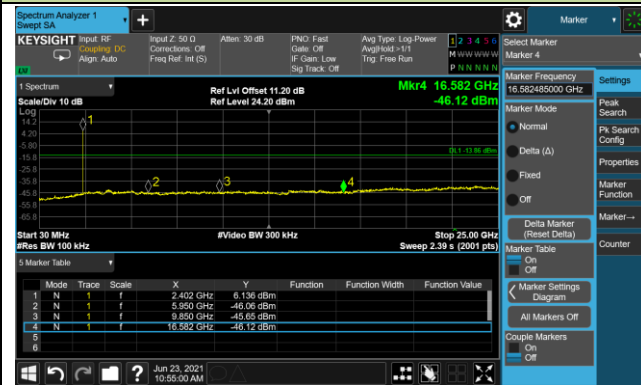


Channel 78 (2480MHz)

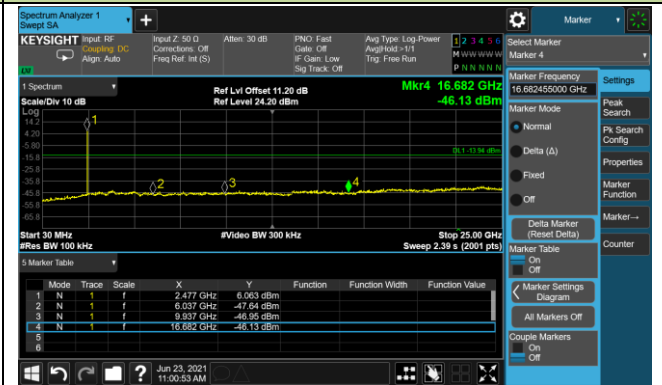


2DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)

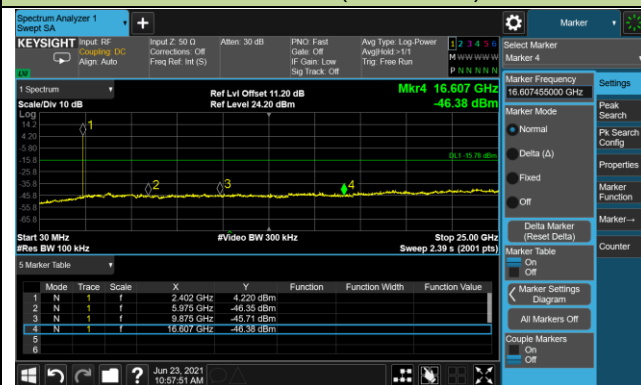


Channel 78 (2480MHz)

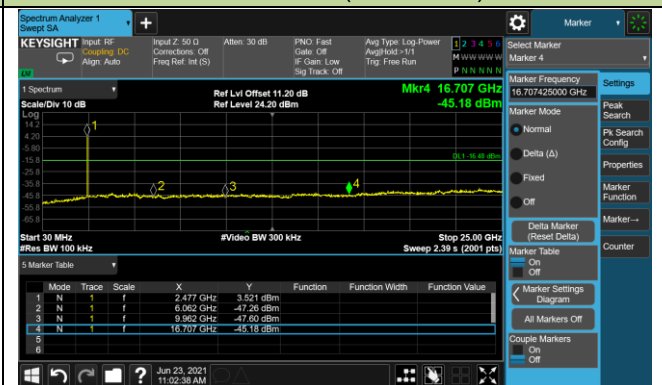


3DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)

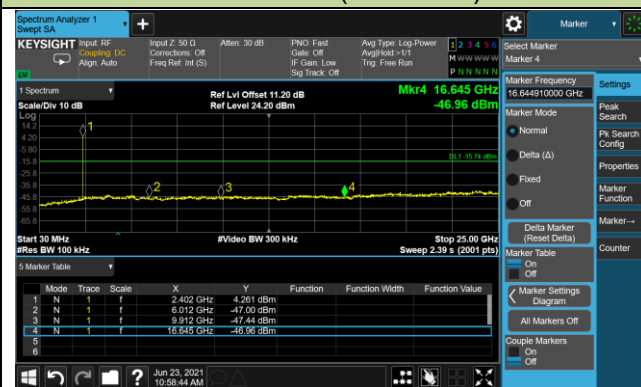

Channel 78 (2480MHz)

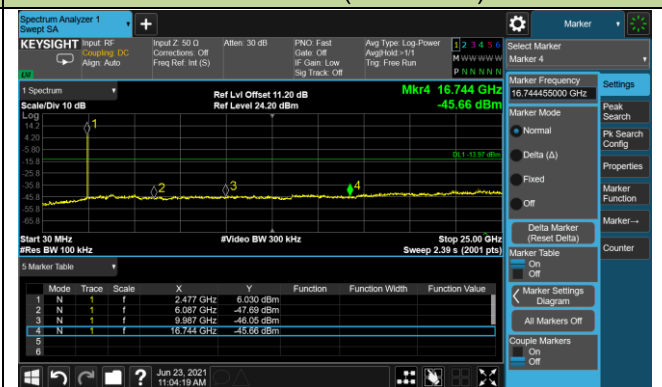

5.9. Radiated Spurious Emission Measurement

5.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.4 & 6.5 & 6.6

5.9.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = As specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = Auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

5.9.4. Test Setup

Below 1GHz Test Setup:

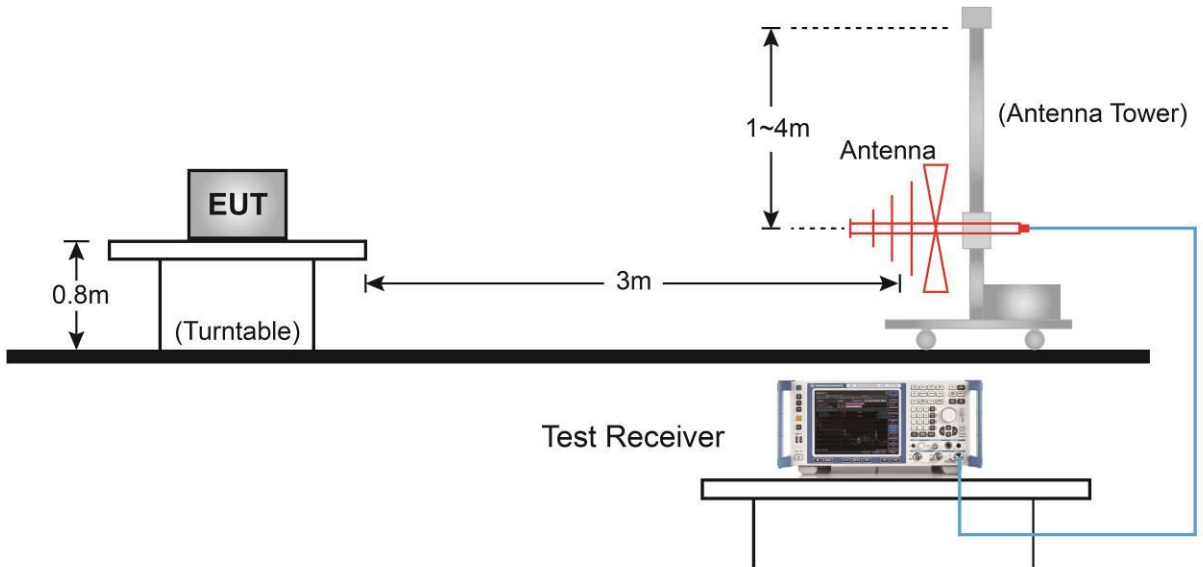

Above 1GHz Test Setup:

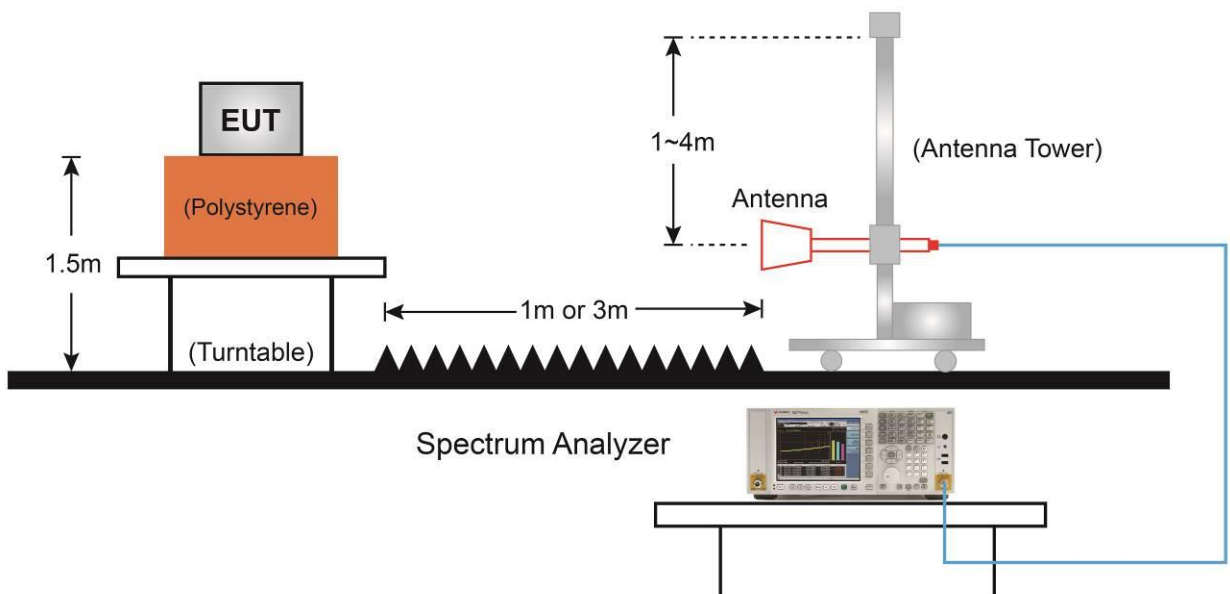

5.9.5. Test Result

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	DH5	Test Date	2021/06/22
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
4774.0	38.1	3.5	41.6	74.0	-32.4	Peak	Horizontal
7553.5	38.2	8.5	46.7	74.0	-27.3	Peak	Horizontal
8471.5	37.8	9.4	47.2	74.0	-26.8	Peak	Horizontal
4774.0	37.9	3.5	41.4	74.0	-32.6	Peak	Vertical
7468.5	37.9	8.5	46.4	74.0	-27.6	Peak	Vertical
8157.0	38.0	9.1	47.1	74.0	-26.9	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	DH5	Test Date	2021/06/22
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
4833.5	37.9	3.4	41.3	74.0	-32.7	Peak	Horizontal
7324.0	42.7	8.6	51.3	74.0	-22.7	Peak	Horizontal
8310.0	38.1	8.9	47.0	74.0	-27.0	Peak	Horizontal
4918.5	37.9	3.6	41.5	74.0	-32.5	Peak	Vertical
7324.0	45.8	8.6	54.4	74.0	-19.6	Peak	Vertical
7324.0	42.1	8.6	50.7	54.0	-3.3	Average	Vertical
8420.5	38.1	9.2	47.3	74.0	-26.7	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	DH5	Test Date	2021/06/22
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
5037.5	38.0	4.0	42.0	74.0	-32.0	Peak	Horizontal
7443.0	44.3	8.5	52.8	74.0	-21.2	Peak	Horizontal
8378.0	38.3	9.0	47.3	74.0	-26.7	Peak	Horizontal
4918.5	38.4	3.6	42.0	74.0	-32.0	Peak	Vertical
7443.0	45.5	8.5	54.0	74.0	-20.0	Peak	Vertical
7443.0	41.7	8.5	50.2	54.0	-3.8	Average	Vertical
8106.0	37.8	9.2	47.0	74.0	-27.0	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	2DH5	Test Date	2021/06/22
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
4842.0	38.2	3.4	41.6	74.0	-32.4	Peak	Horizontal
7477.0	38.6	8.6	47.2	74.0	-26.8	Peak	Horizontal
8471.5	37.8	9.4	47.2	74.0	-26.8	Peak	Horizontal
5071.5	38.0	4.1	42.1	74.0	-31.9	Peak	Vertical
7553.5	39.4	8.5	47.9	74.0	-26.1	Peak	Vertical
8471.5	39.3	9.4	48.7	74.0	-25.3	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	2DH5	Test Date	2021/06/22
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
5020.5	37.9	4.0	41.9	74.0	-32.1	Peak	Horizontal
7324.0	41.8	8.6	50.4	74.0	-23.6	Peak	Horizontal
8157.0	38.3	9.1	47.4	74.0	-26.6	Peak	Horizontal
4842.0	38.5	3.4	41.9	74.0	-32.1	Peak	Vertical
7324.0	46.2	8.6	54.8	74.0	-19.2	Peak	Vertical
7324.0	40.6	8.6	49.2	54.0	-4.8	Average	Vertical
8463.0	38.0	9.3	47.3	74.0	-26.7	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	2DH5	Test Date	2021/06/22
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
5046.0	37.5	4.0	41.5	74.0	-32.5	Peak	Horizontal
7443.0	42.8	8.5	51.3	74.0	-22.7	Peak	Horizontal
8267.5	37.5	9.0	46.5	74.0	-27.5	Peak	Horizontal
4944.0	38.6	3.7	42.3	74.0	-31.7	Peak	Vertical
7443.0	45.5	8.5	54.0	74.0	-20.0	Peak	Vertical
7443.0	40.2	8.5	48.7	54.0	-5.3	Average	Vertical
8063.5	38.5	9.3	47.8	74.0	-26.2	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	3DH5	Test Date	2021/06/23
Test Channel	00		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
5114.0	38.0	4.2	42.2	74.0	-31.8	Peak	Horizontal
7579.0	39.0	8.5	47.5	74.0	-26.5	Peak	Horizontal
8429.0	38.8	9.2	48.0	74.0	-26.0	Peak	Horizontal
4782.5	38.0	3.5	41.5	74.0	-32.5	Peak	Vertical
7443.0	38.3	8.5	46.8	74.0	-27.2	Peak	Vertical
8446.0	38.1	9.2	47.3	74.0	-26.7	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	3DH5	Test Date	2021/06/23
Test Channel	39		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
4884.5	38.2	3.4	41.6	74.0	-32.4	Peak	Horizontal
7324.0	41.9	8.6	50.5	74.0	-23.5	Peak	Horizontal
8063.5	38.7	9.3	48.0	74.0	-26.0	Peak	Horizontal
5105.5	37.6	4.2	41.8	74.0	-32.2	Peak	Vertical
7324.0	45.3	8.6	53.9	74.0	-20.1	Peak	Vertical
7324.0	40.0	8.6	48.6	54.0	-5.4	Average	Vertical
8199.5	37.7	9.1	46.8	74.0	-27.2	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Tommy Tang
Test Mode	3DH5	Test Date	2021/06/23
Test Channel	78		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
5097.0	37.2	4.2	41.4	74.0	-32.6	Peak	Horizontal
7443.0	43.0	8.5	51.5	74.0	-22.5	Peak	Horizontal
8420.5	37.6	9.2	46.8	74.0	-27.2	Peak	Horizontal
4799.5	38.6	3.5	42.1	74.0	-31.9	Peak	Vertical
7443.0	46.0	8.5	54.5	74.0	-19.5	Peak	Vertical
7443.0	39.7	8.5	48.2	54.0	-5.8	Average	Vertical
8463.0	38.6	9.3	47.9	74.0	-26.1	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC1	Time: 2021/06/23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

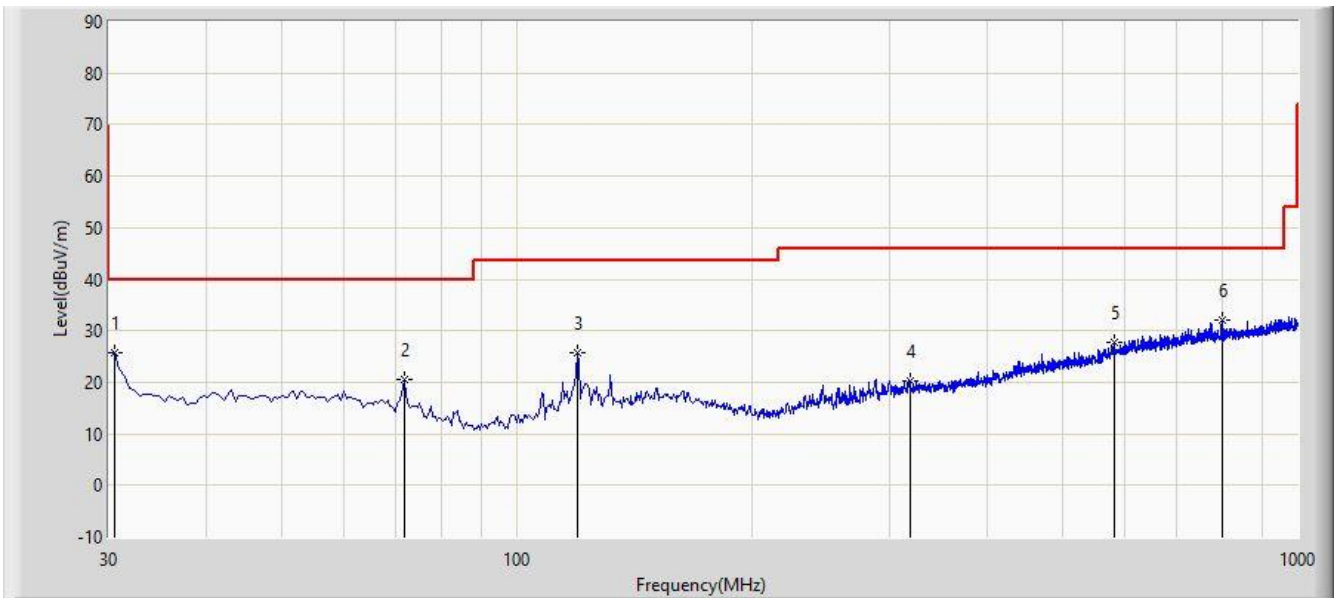

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		30.485	25.615	8.942	-14.385	40.000	16.674	PK
2		71.710	20.441	4.943	-19.559	40.000	15.498	PK
3		119.725	25.727	10.014	-17.773	43.500	15.714	PK
4		318.575	20.392	1.486	-25.608	46.000	18.905	PK
5		582.900	27.713	2.661	-18.287	46.000	25.052	PK
6	*	802.120	32.102	3.743	-13.898	46.000	28.359	PK

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

Site: WZ-AC1	Time: 2021/06/23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

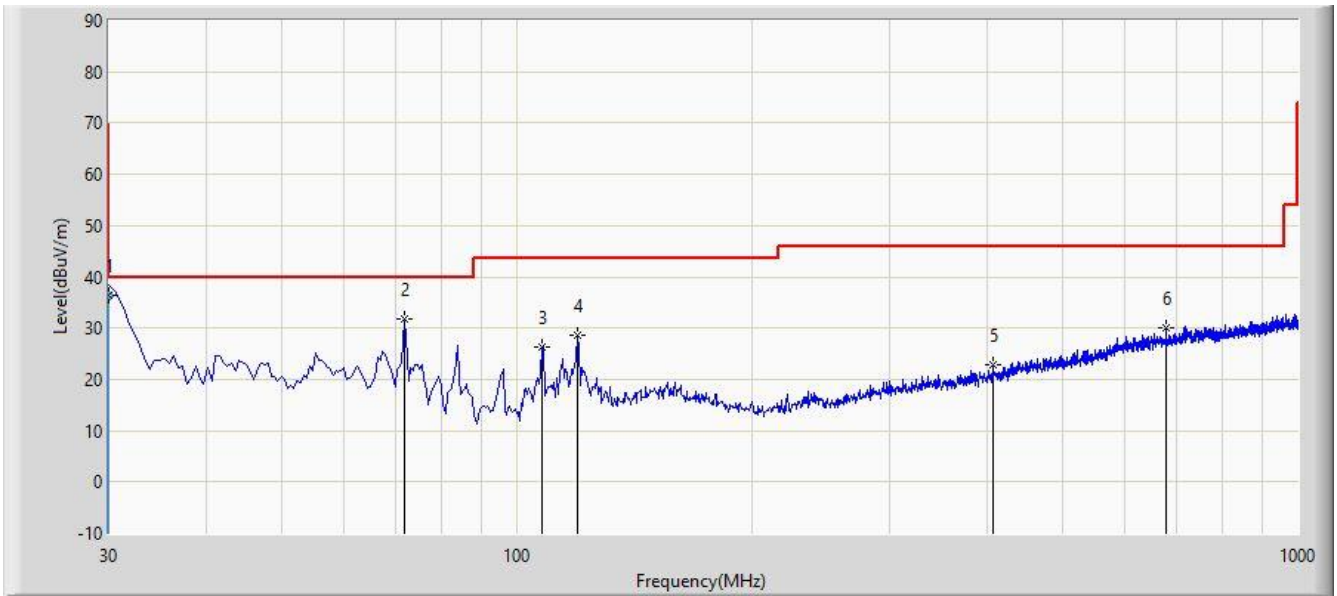

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	30.000	36.529	19.900	-3.471	40.000	16.629	QP
2		71.710	31.820	16.322	-8.180	40.000	15.498	PK
3		107.600	26.338	11.790	-17.162	43.500	14.548	PK
4		119.725	28.507	12.794	-14.993	43.500	15.714	PK
5		406.845	22.719	1.867	-23.281	46.000	20.851	PK
6		677.475	29.925	3.376	-16.075	46.000	26.549	PK

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

5.10. Radiated Restricted Band Edge Measurement

5.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.10.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.6 & 6.10

5.10.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

5.10.4. Test Setup

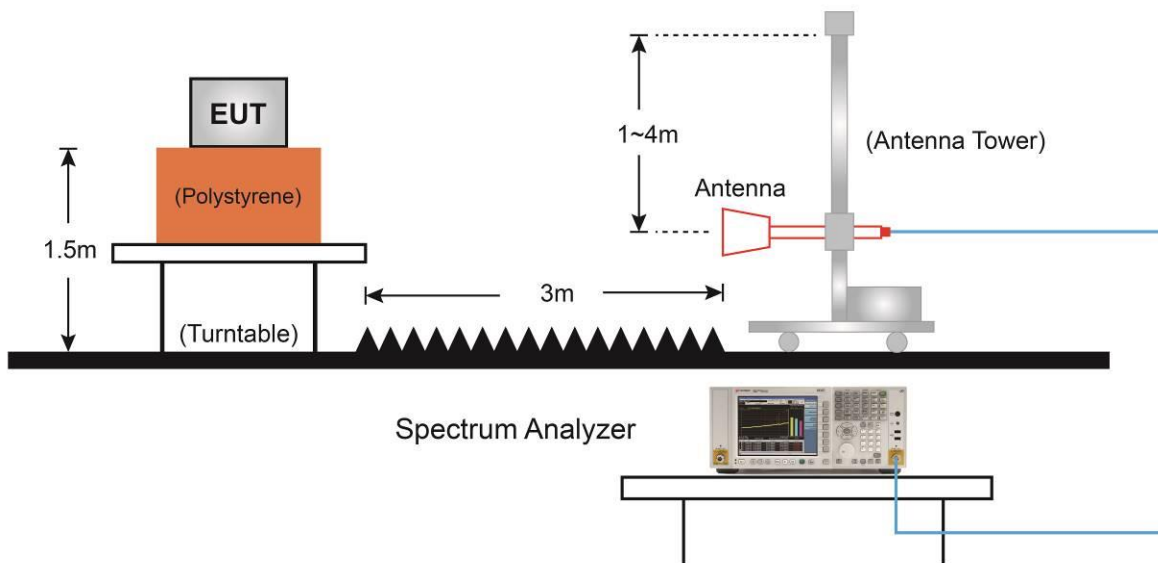

5.10.5. Test Result

Site: WZ-AC1	Time: 2021/06/22 - 20:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at Channel 2402MHz	

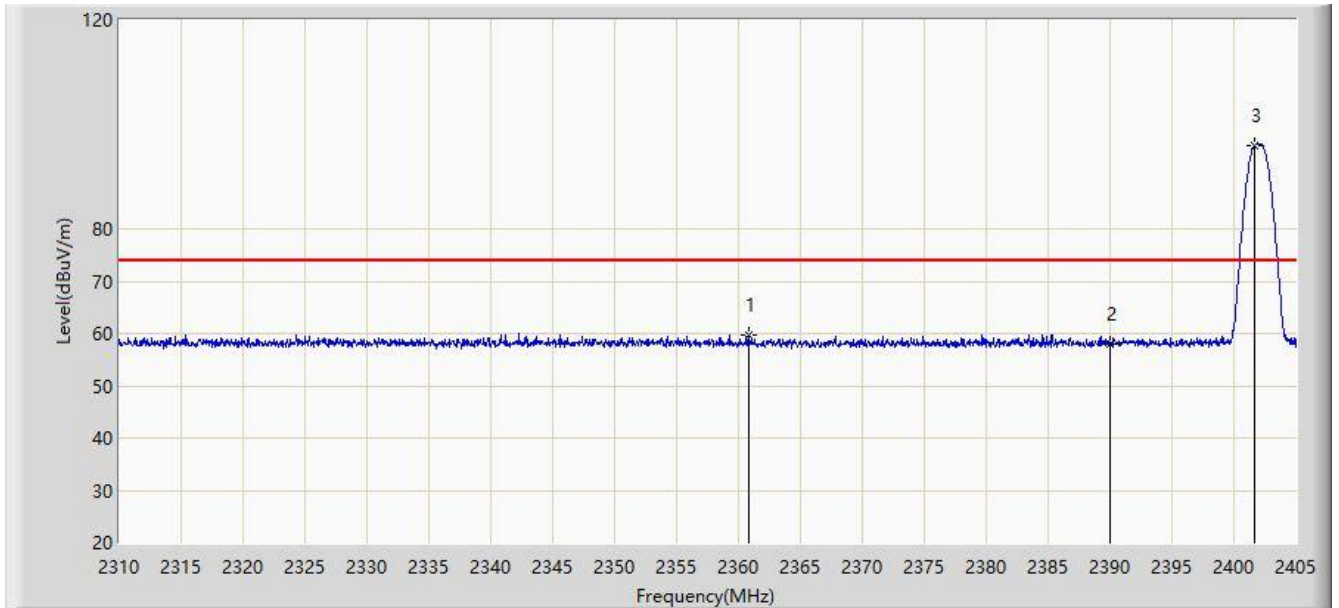


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2360.873	59.628	28.538	-14.372	74.000	31.090	PK
2			2390.000	58.075	27.042	-15.925	74.000	31.034	PK
3		*	2401.675	95.941	64.932	N/A	N/A	31.009	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at Channel 2402MHz	

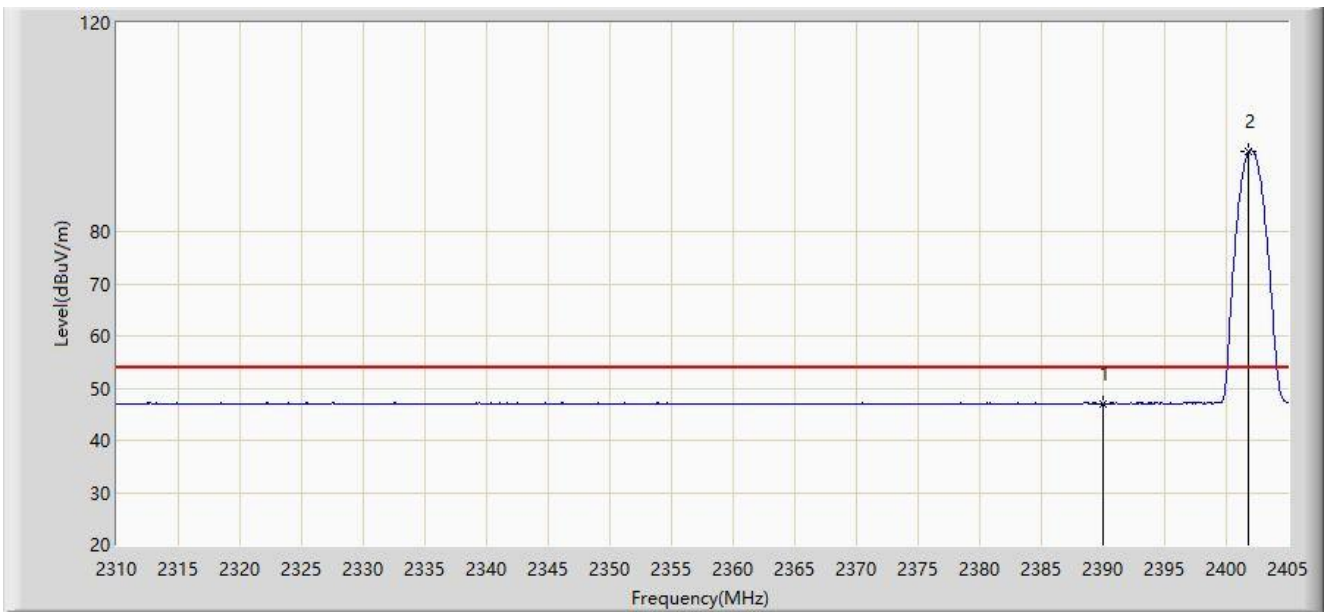


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.975	15.942	-7.025	54.000	31.034	AV
2		*	2401.817	95.316	64.307	N/A	N/A	31.009	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at Channel 2402MHz	

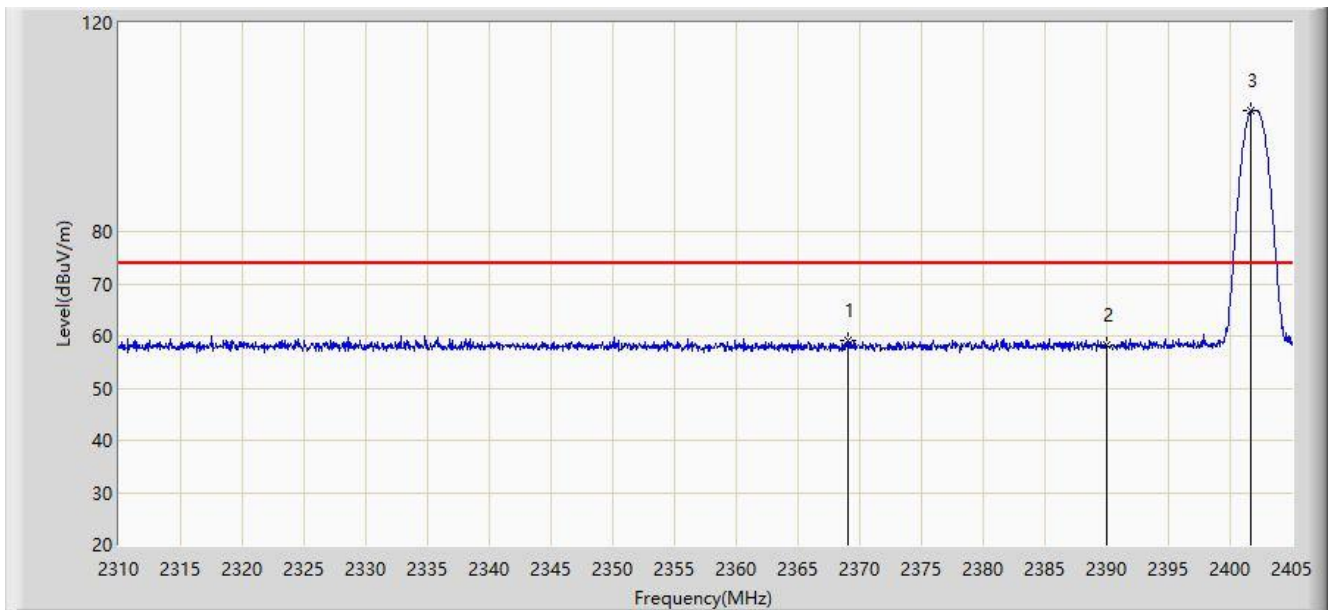


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.995	59.188	28.134	-14.812	74.000	31.054	PK
2			2390.000	58.335	27.302	-15.665	74.000	31.034	PK
3		*	2401.722	103.104	72.095	N/A	N/A	31.008	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at Channel 2402MHz	

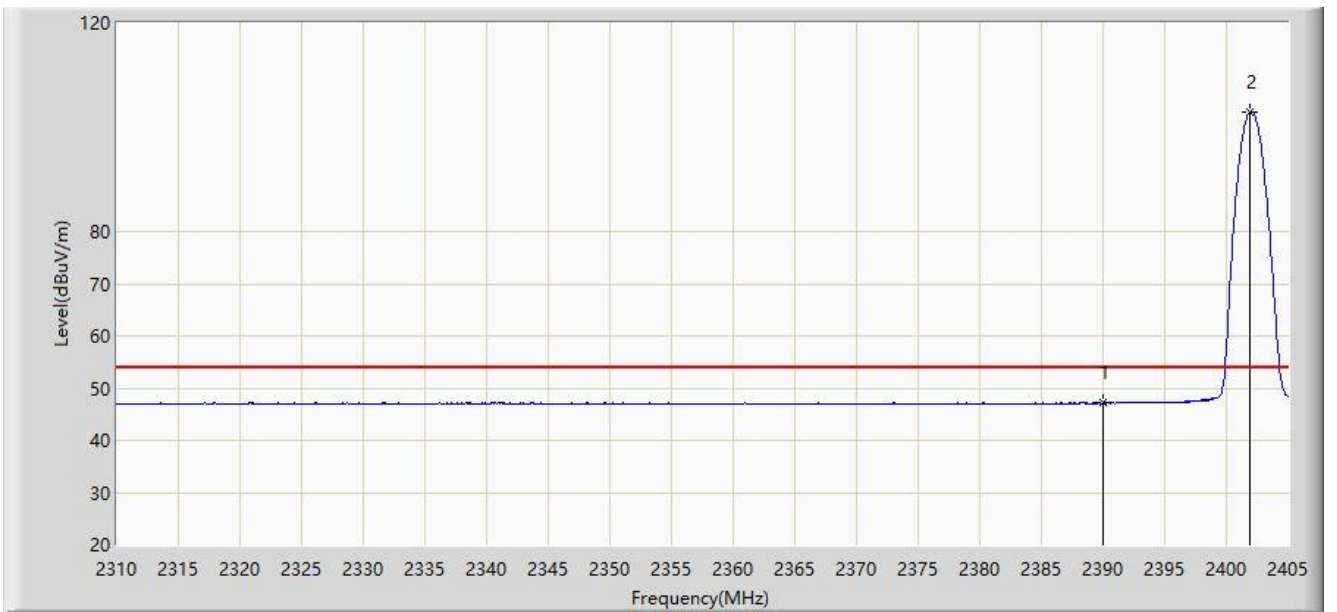


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.132	16.099	-6.868	54.000	31.034	AV
2		*	2401.865	102.819	71.810	N/A	N/A	31.009	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at Channel 2480MHz	

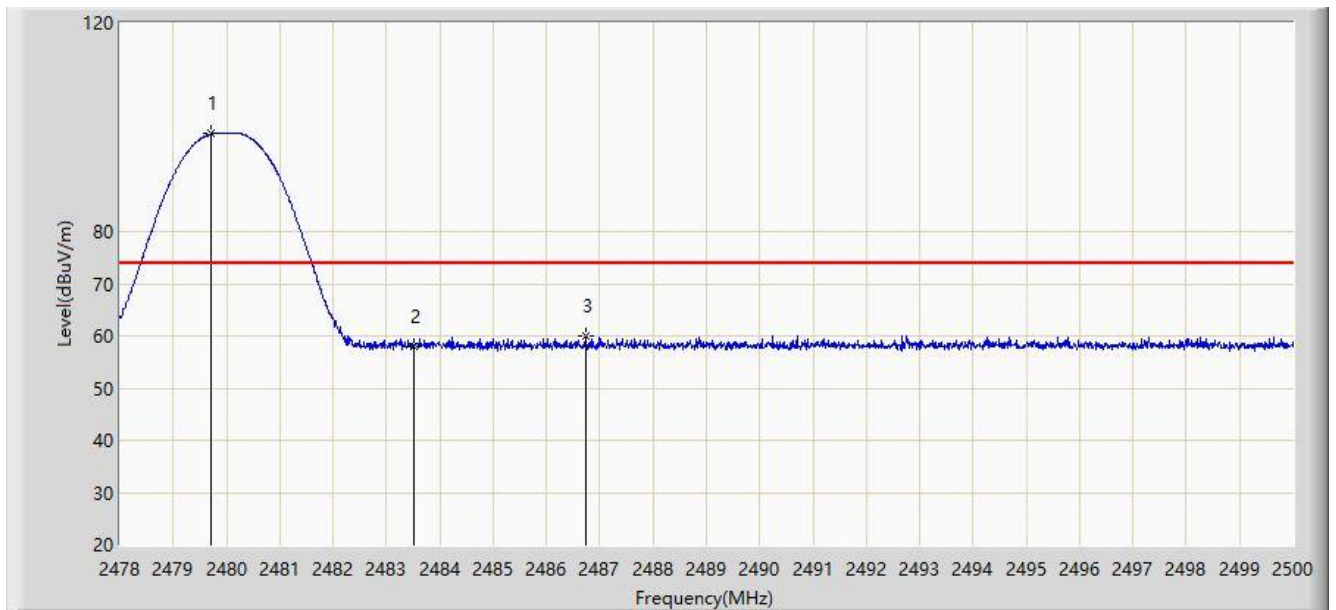


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.705	98.729	67.853	N/A	N/A	30.876	PK
2			2483.500	57.864	26.976	-16.136	74.000	30.888	PK
3			2486.734	59.971	29.073	-14.029	74.000	30.898	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at Channel 2480MHz	

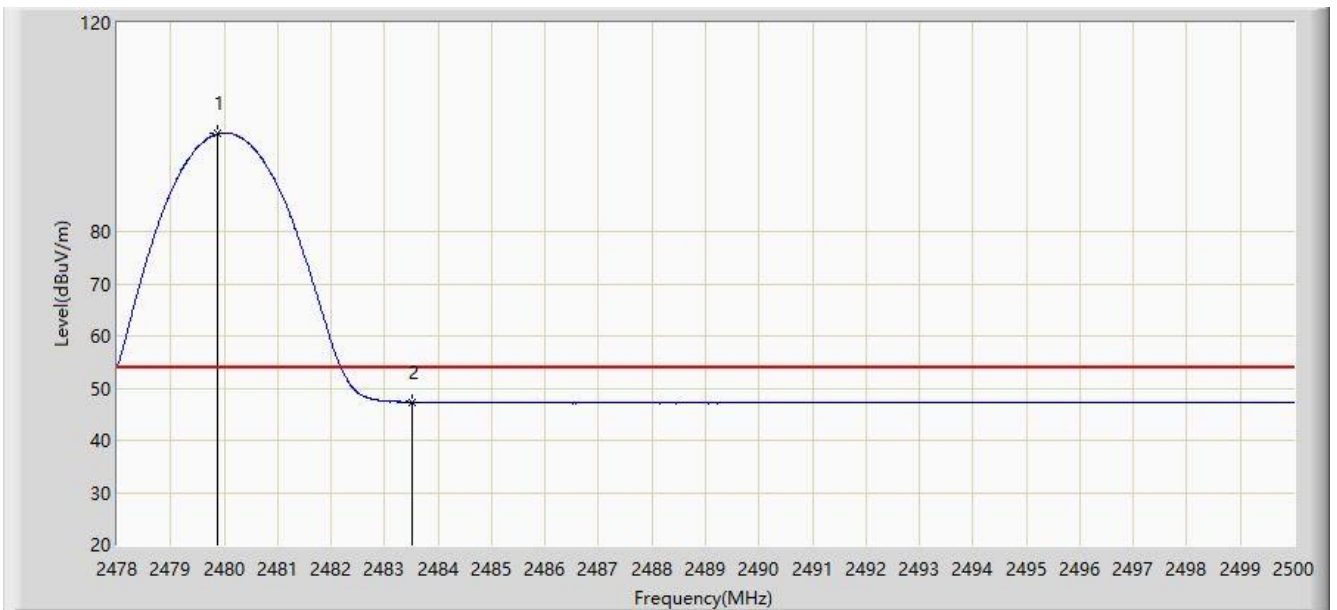


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.881	98.740	67.864	N/A	N/A	30.876	AV
2			2483.500	47.309	16.421	-6.691	54.000	30.888	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at Channel 2480MHz	

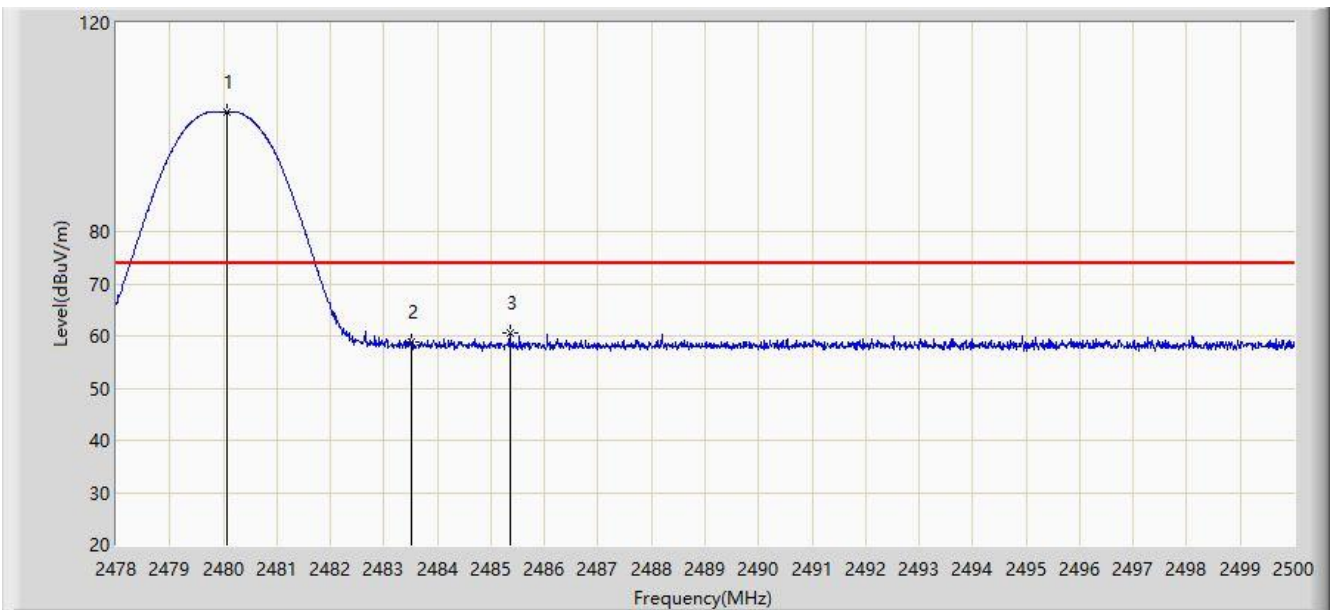


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	102.981	72.104	N/A	N/A	30.877	PK
2			2483.500	58.971	28.083	-15.029	74.000	30.888	PK
3			2485.348	60.539	29.645	-13.461	74.000	30.894	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by DH5 at Channel 2480MHz	

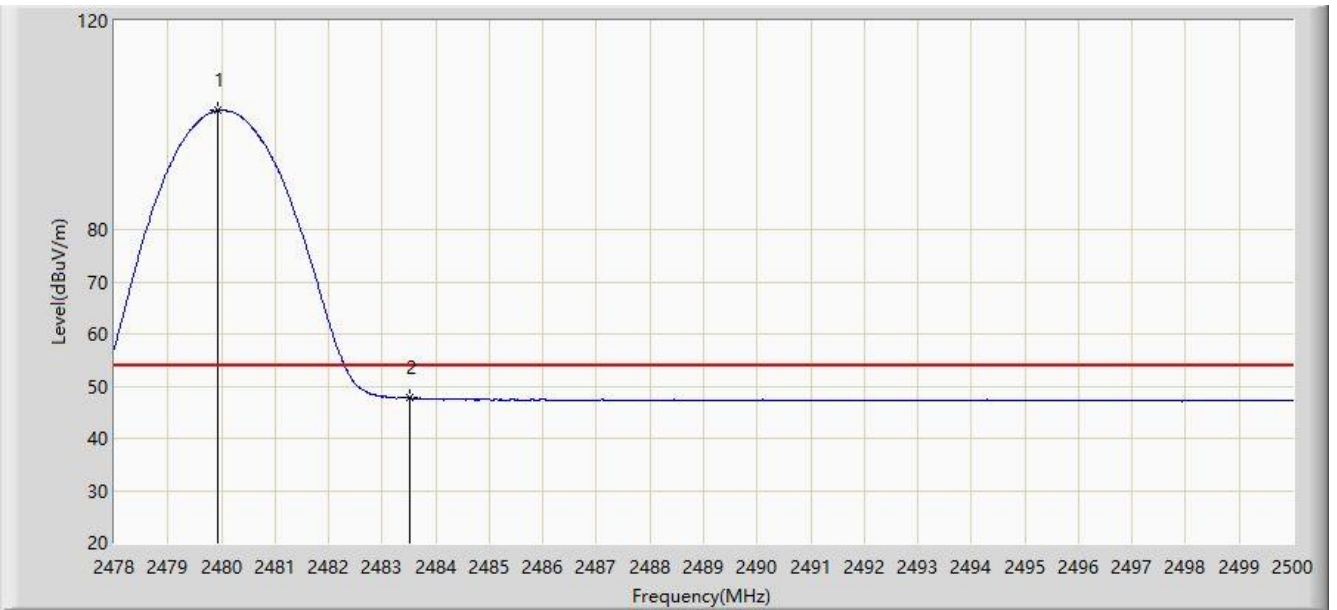


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.925	102.777	71.900	N/A	N/A	30.876	AV
2			2483.500	47.785	16.897	-6.215	54.000	30.888	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 2-DH5 at Channel 2402MHz	

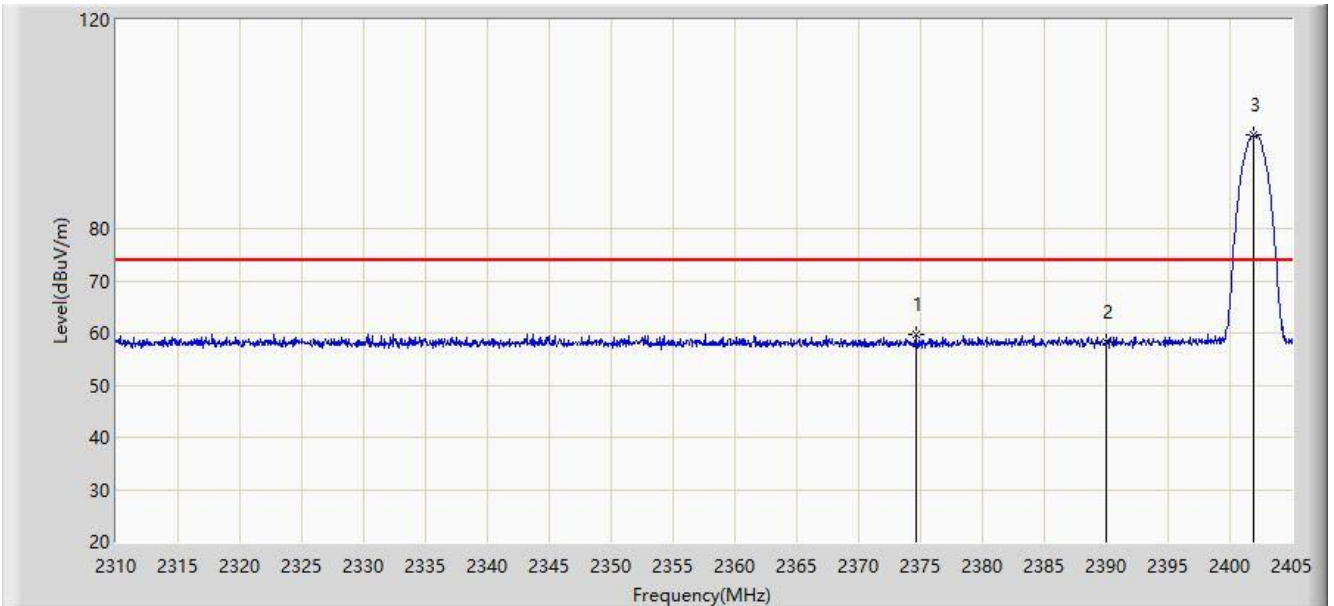


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.647	59.714	28.667	-14.286	74.000	31.047	PK
2			2390.000	58.369	27.336	-15.631	74.000	31.034	PK
3		*	2401.960	97.851	66.843	N/A	N/A	31.008	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 2-DH5 at Channel 2402MHz	

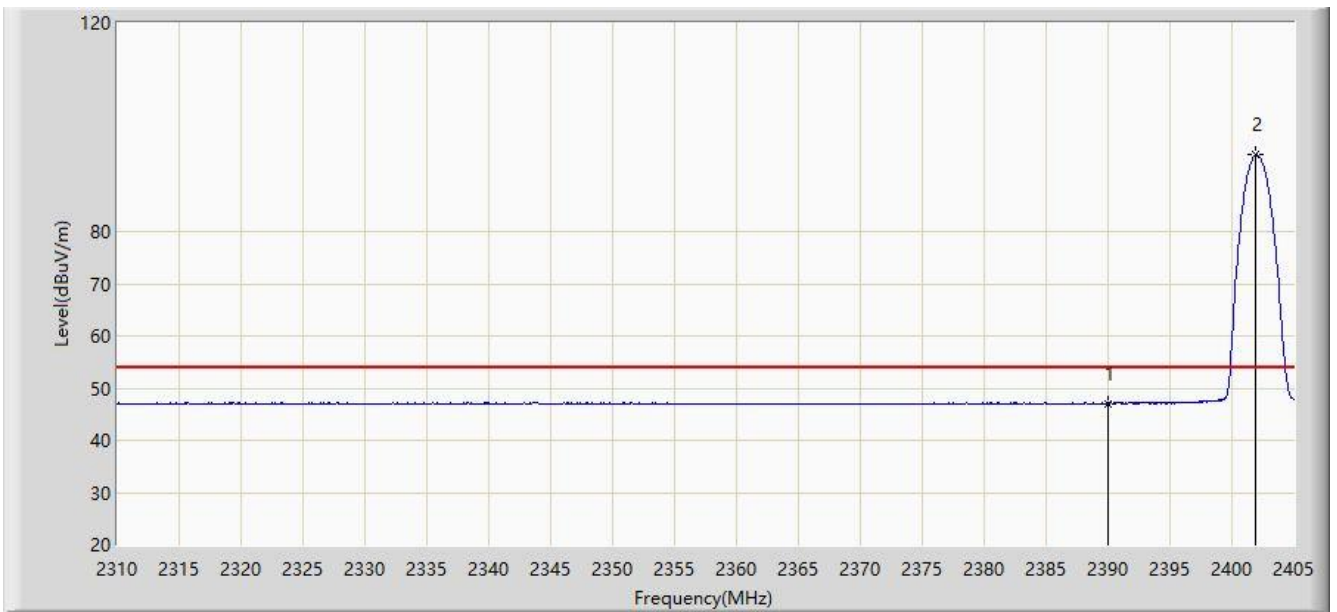


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.101	16.068	-6.899	54.000	31.034	AV
2		*	2401.913	94.737	63.729	N/A	N/A	31.009	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 2-DH5 at Channel 2402MHz	

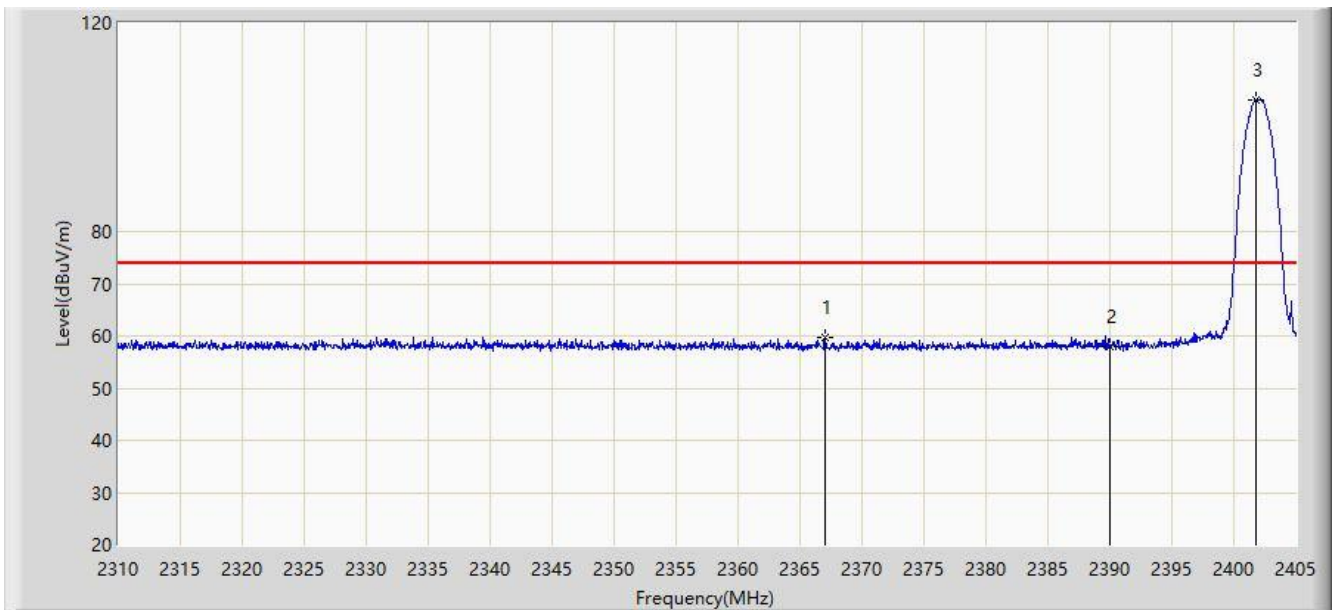


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.000	59.742	28.685	-14.258	74.000	31.057	PK
2			2390.000	57.873	26.840	-16.127	74.000	31.034	PK
3		*	2401.817	105.296	74.287	N/A	N/A	31.009	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 2-DH5 at Channel 2402MHz	

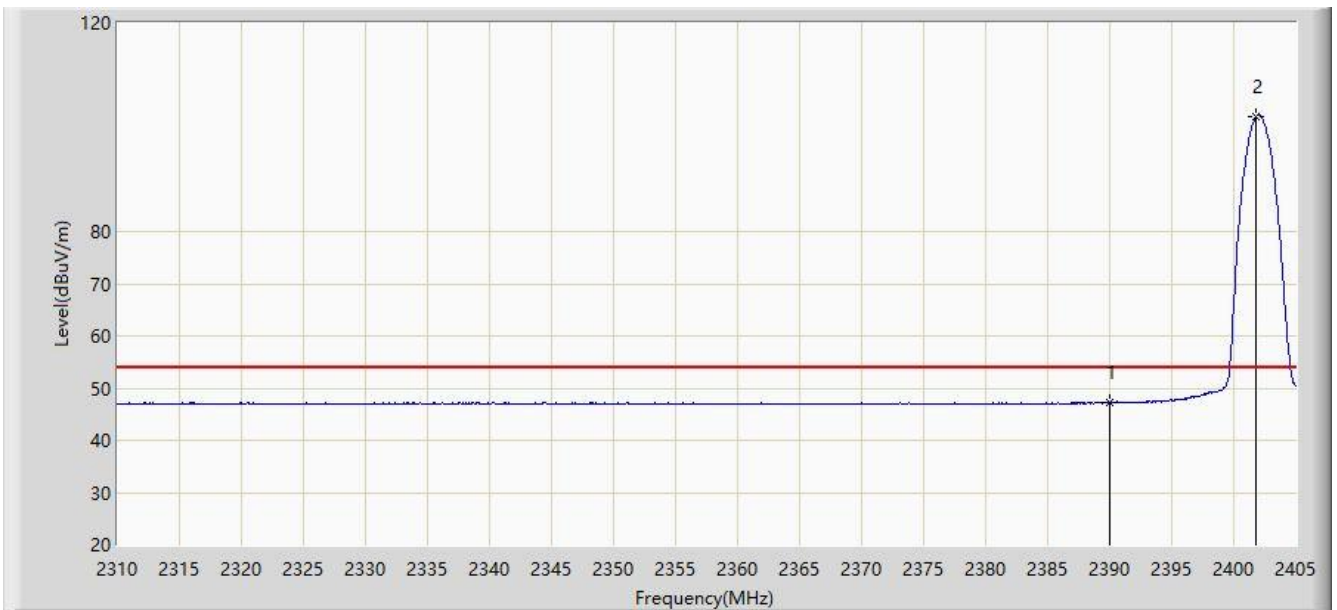


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.172	16.139	-6.828	54.000	31.034	AV
2		*	2401.817	102.152	71.143	N/A	N/A	31.009	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 2-DH5 at Channel 2480MHz	

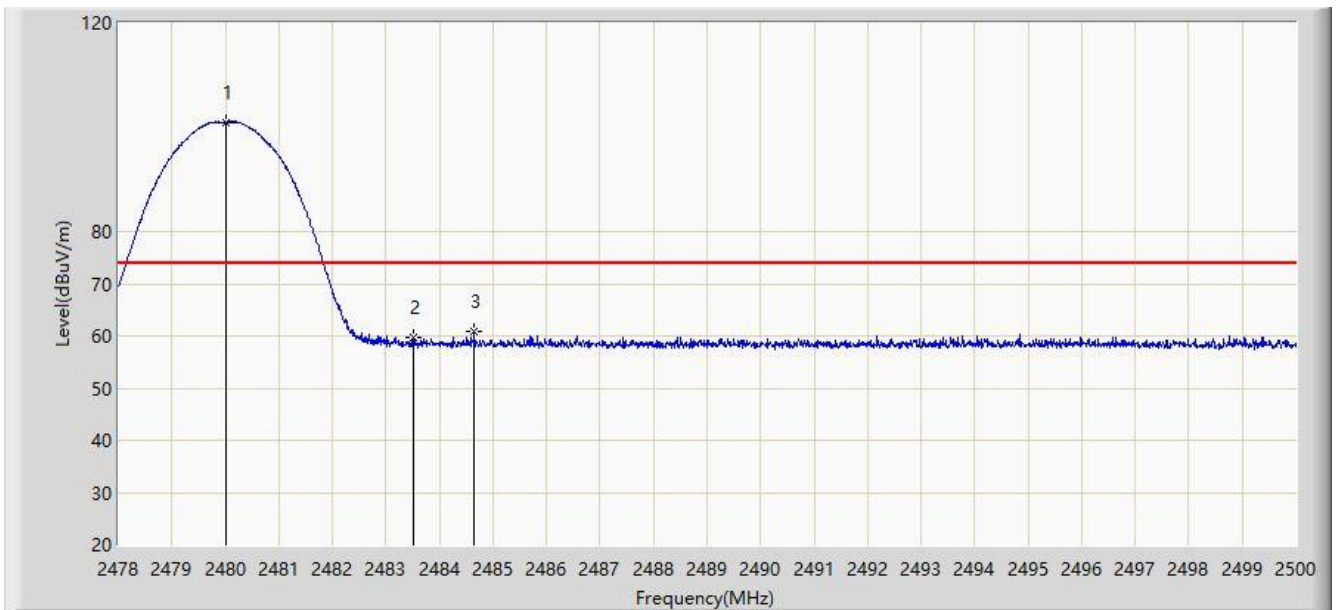


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	100.965	70.088	N/A	N/A	30.877	PK
2			2483.500	59.647	28.759	-14.353	74.000	30.888	PK
3			2484.655	60.748	29.856	-13.252	74.000	30.891	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 2-DH5 at Channel 2480MHz	

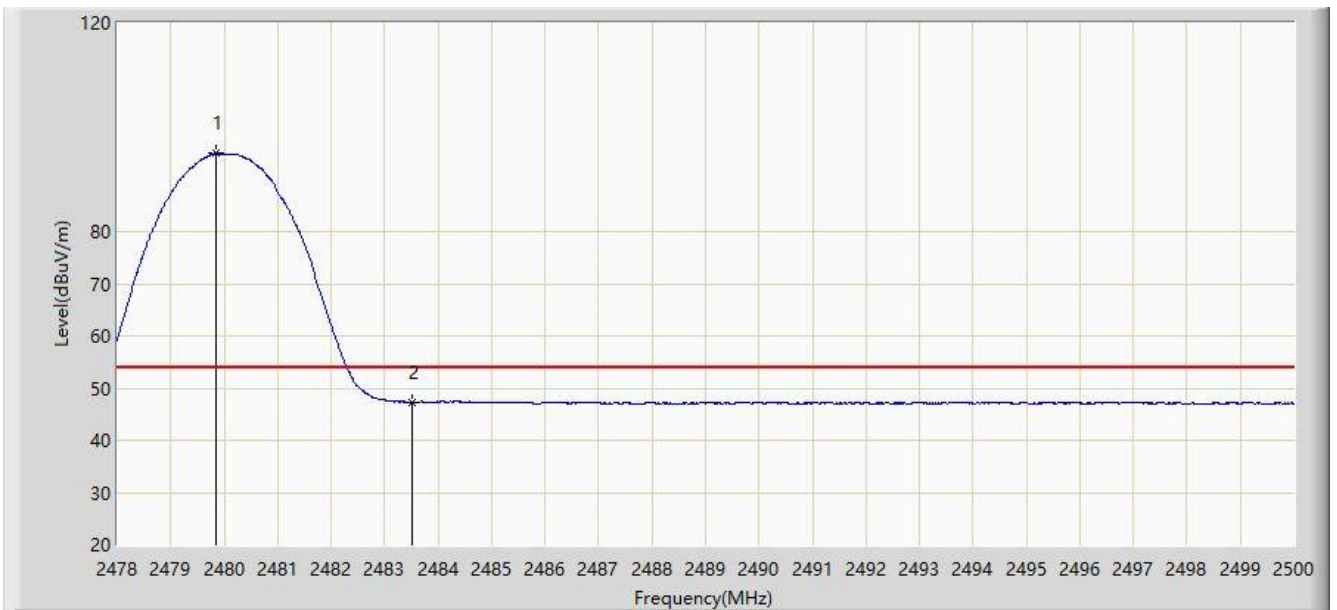


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.837	95.009	64.133	N/A	N/A	30.876	AV
2			2483.500	47.323	16.435	-6.677	54.000	30.888	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 2-DH5 at Channel 2480MHz	

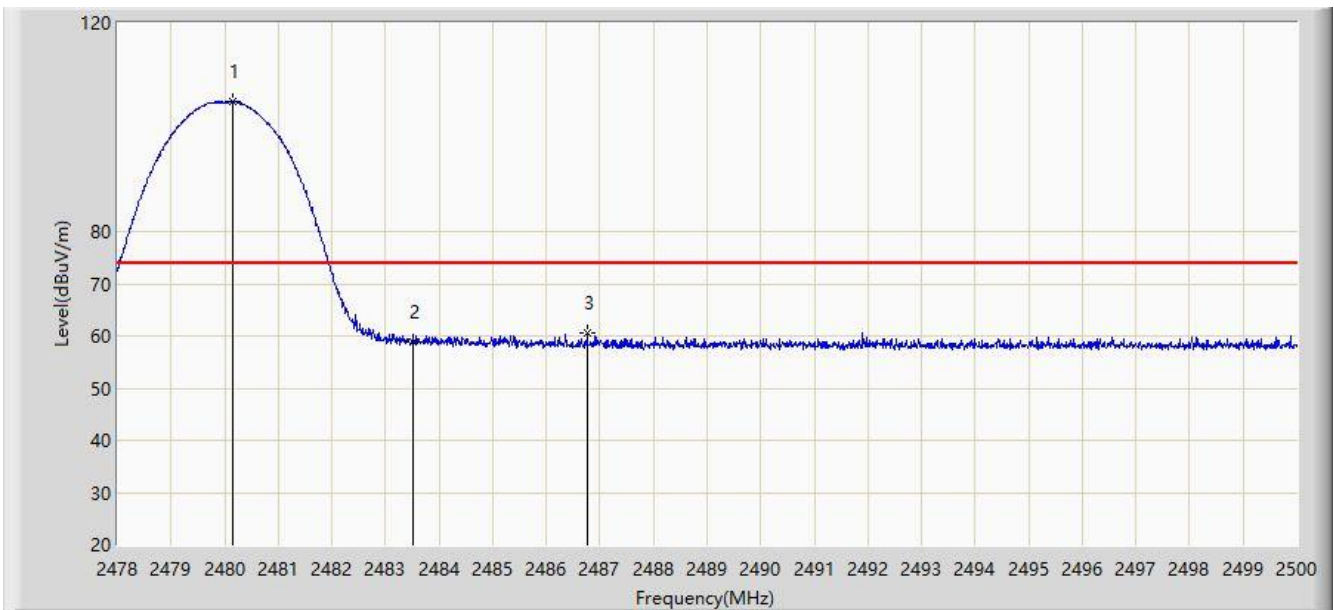


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.156	104.941	74.064	N/A	N/A	30.877	PK
2			2483.500	58.698	27.810	-15.302	74.000	30.888	PK
3			2486.767	60.632	29.734	-13.368	74.000	30.898	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 2-DH5 at Channel 2480MHz	

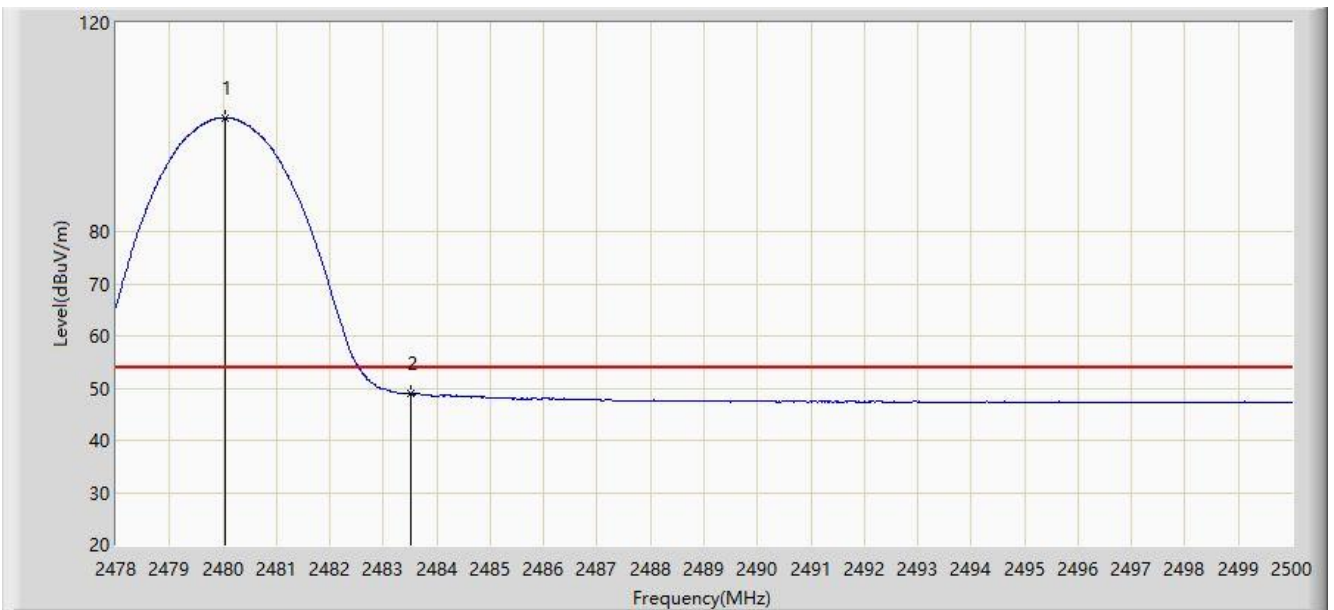


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	101.875	70.998	N/A	N/A	30.877	AV
2			2483.500	48.953	18.065	-5.047	54.000	30.888	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 3-DH5 at Channel 2402MHz	

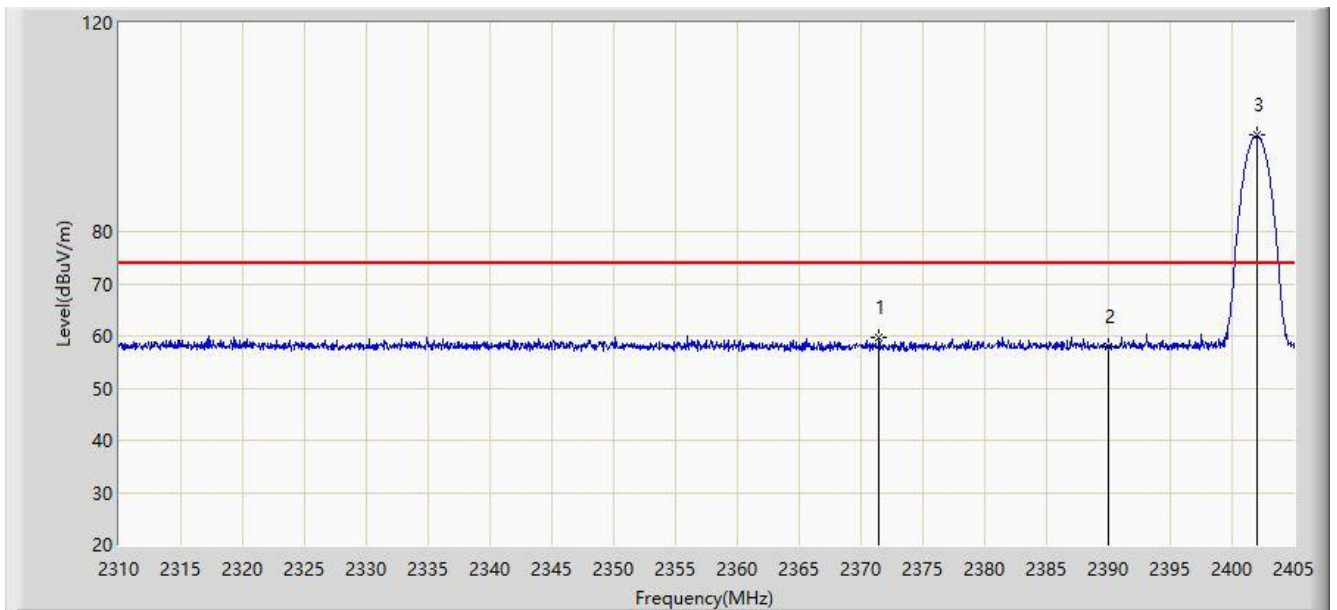


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2371.465	59.738	28.687	-14.262	74.000	31.051	PK
2			2390.000	57.836	26.803	-16.164	74.000	31.034	PK
3		*	2402.055	98.446	67.438	N/A	N/A	31.008	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 3-DH5 at Channel 2402MHz	

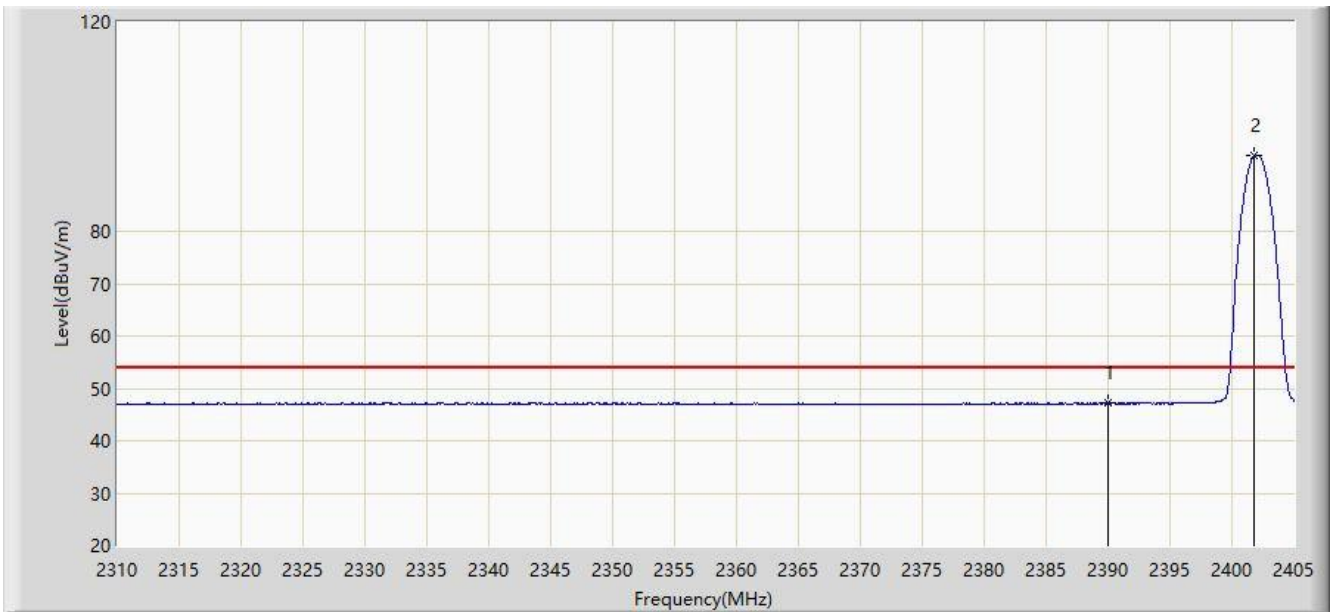


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.108	16.075	-6.892	54.000	31.034	AV
2		*	2401.817	94.465	63.456	N/A	N/A	31.009	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 3-DH5 at Channel 2402MHz	

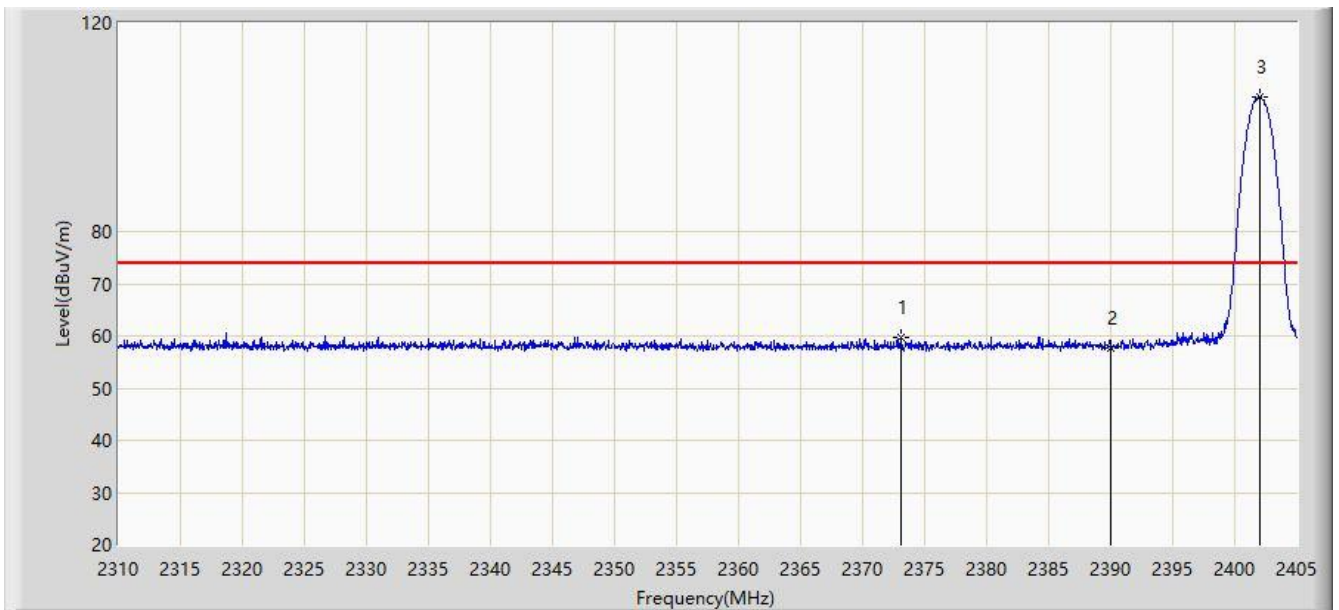


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.080	59.660	28.611	-14.340	74.000	31.049	PK
2			2390.000	57.727	26.694	-16.273	74.000	31.034	PK
3		*	2402.008	105.910	74.902	N/A	N/A	31.008	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 3-DH5 at Channel 2402MHz	

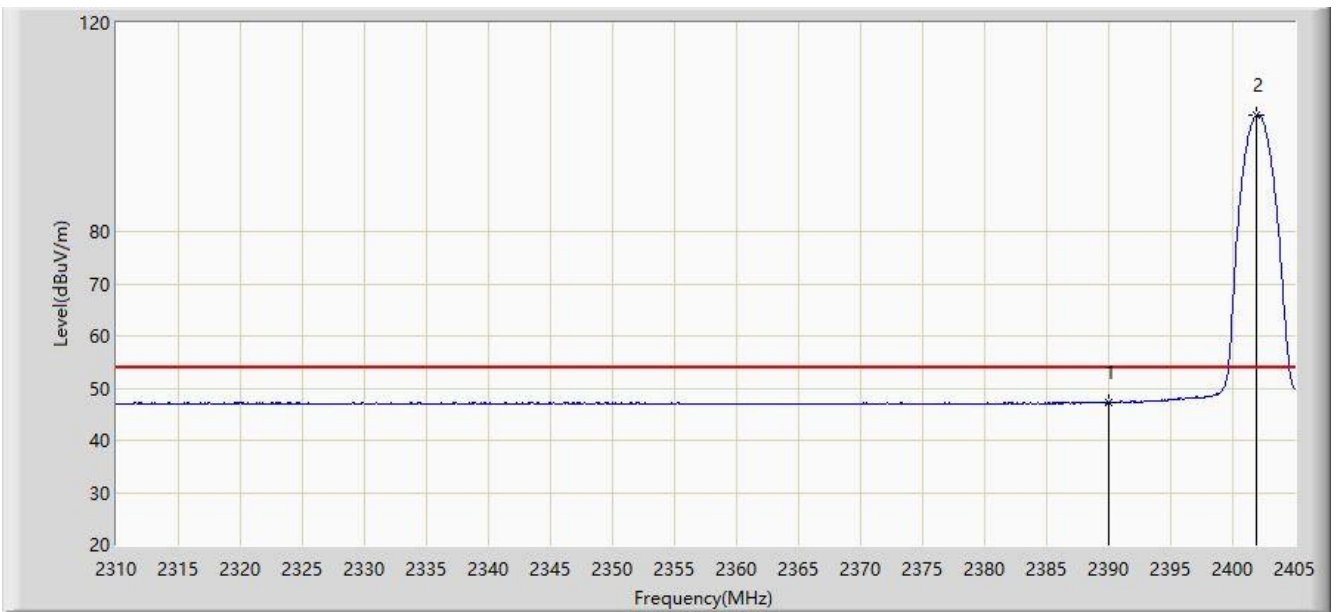


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.159	16.126	-6.841	54.000	31.034	AV
2		*	2401.865	102.229	71.220	N/A	N/A	31.009	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 3-DH5 at Channel 2480MHz	

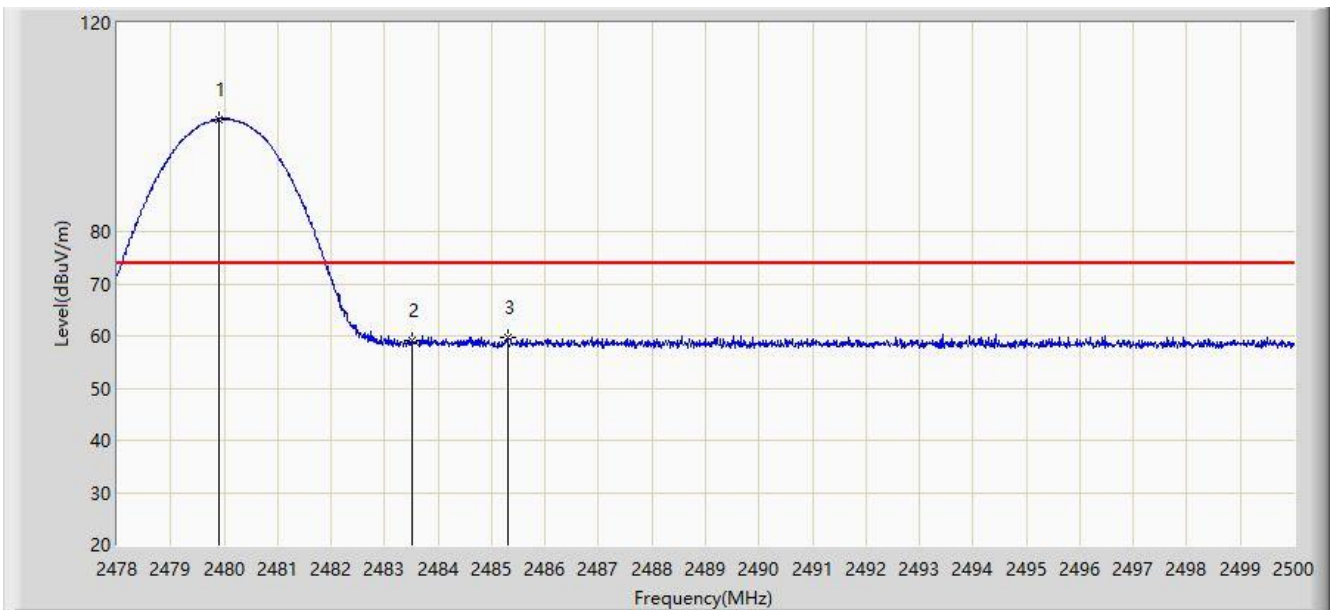


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	101.565	70.689	N/A	N/A	30.876	PK
2			2483.500	59.165	28.277	-14.835	74.000	30.888	PK
3			2485.293	59.628	28.734	-14.372	74.000	30.894	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 3-DH5 at Channel 2480MHz	

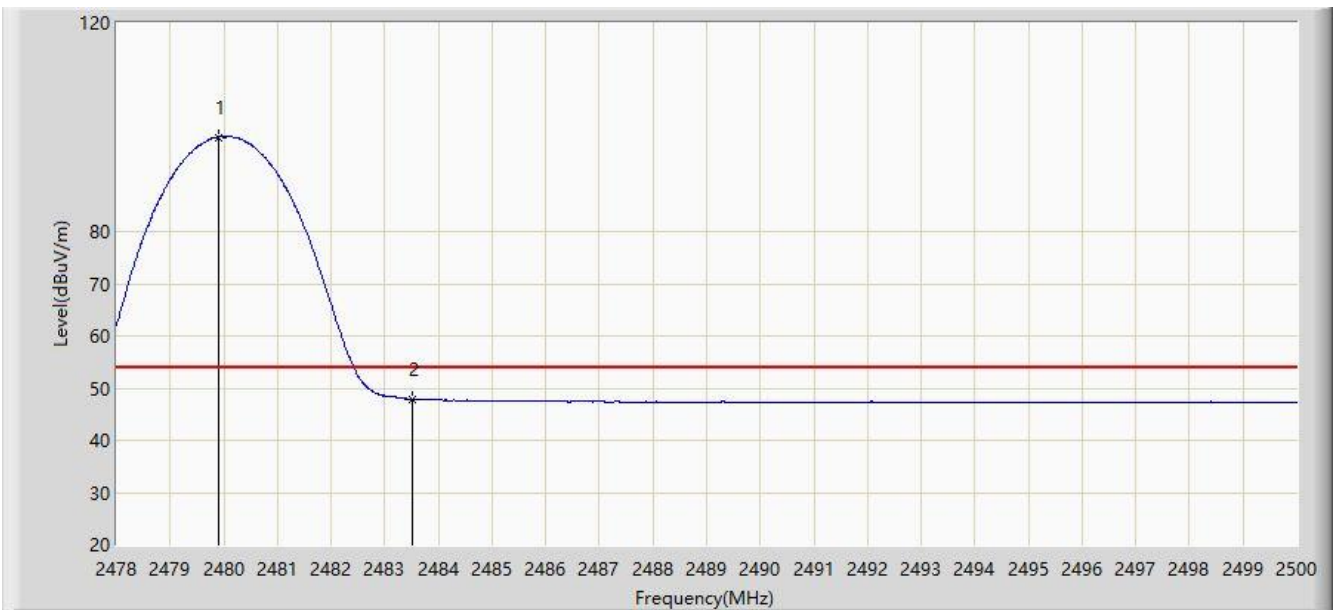


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.892	98.109	67.233	N/A	N/A	30.876	AV
2			2483.500	47.920	17.032	-6.080	54.000	30.888	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 3-DH5 at Channel 2480MHz	

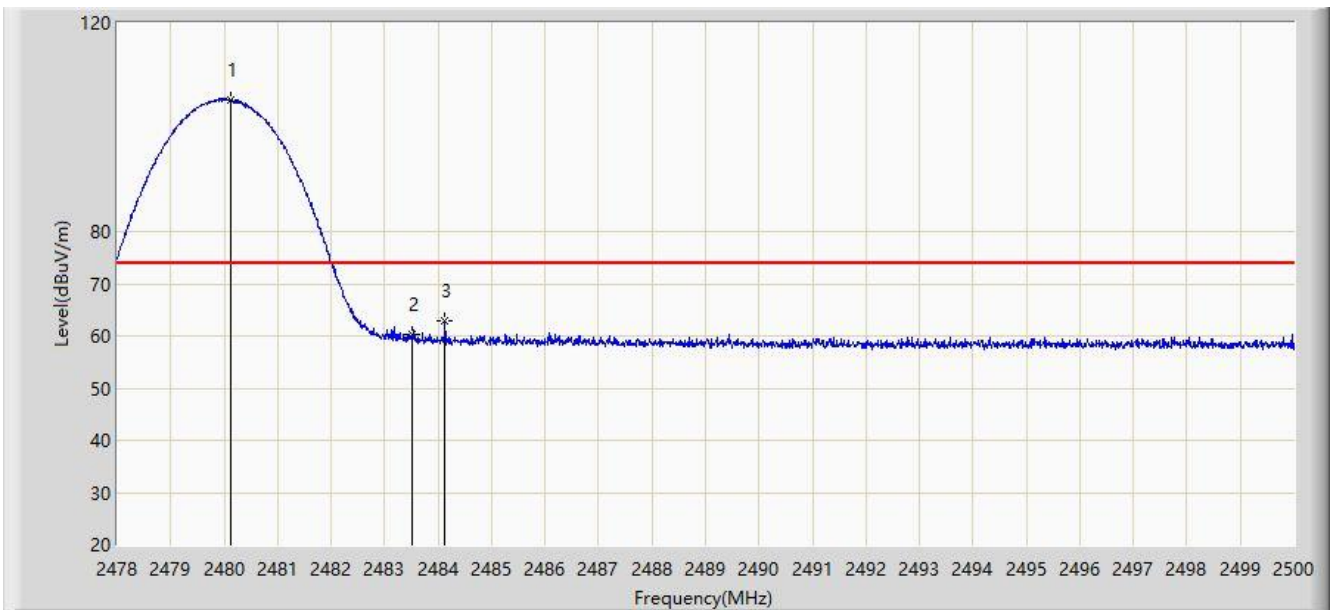


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.112	105.330	74.453	N/A	N/A	30.877	PK
2			2483.500	60.222	29.334	-13.778	74.000	30.888	PK
3			2484.127	62.823	31.933	-11.177	74.000	30.890	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/06/22 - 21:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Headphones	Power: By Battery
Test Mode: Transmit by 3-DH5 at Channel 2480MHz	

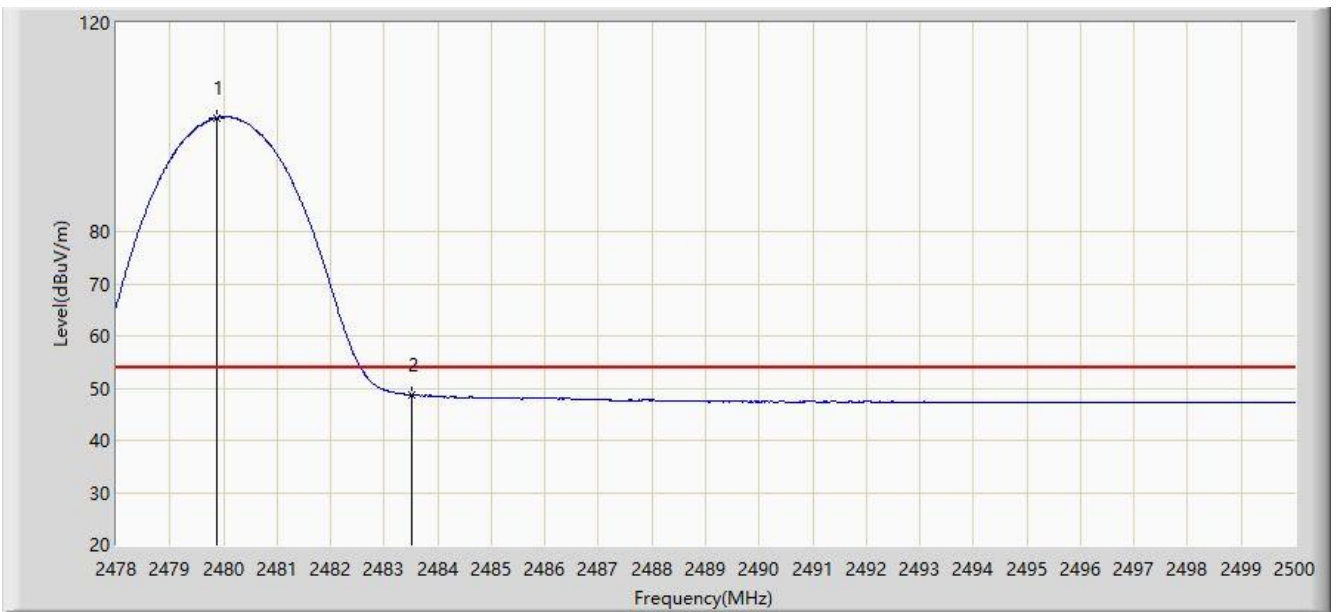

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.870	101.843	70.967	N/A	N/A	30.876	AV
2			2483.500	48.739	17.851	-5.261	54.000	30.888	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

5.11. AC Conducted Emissions Measurement


5.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

5.11.2. Test Setup

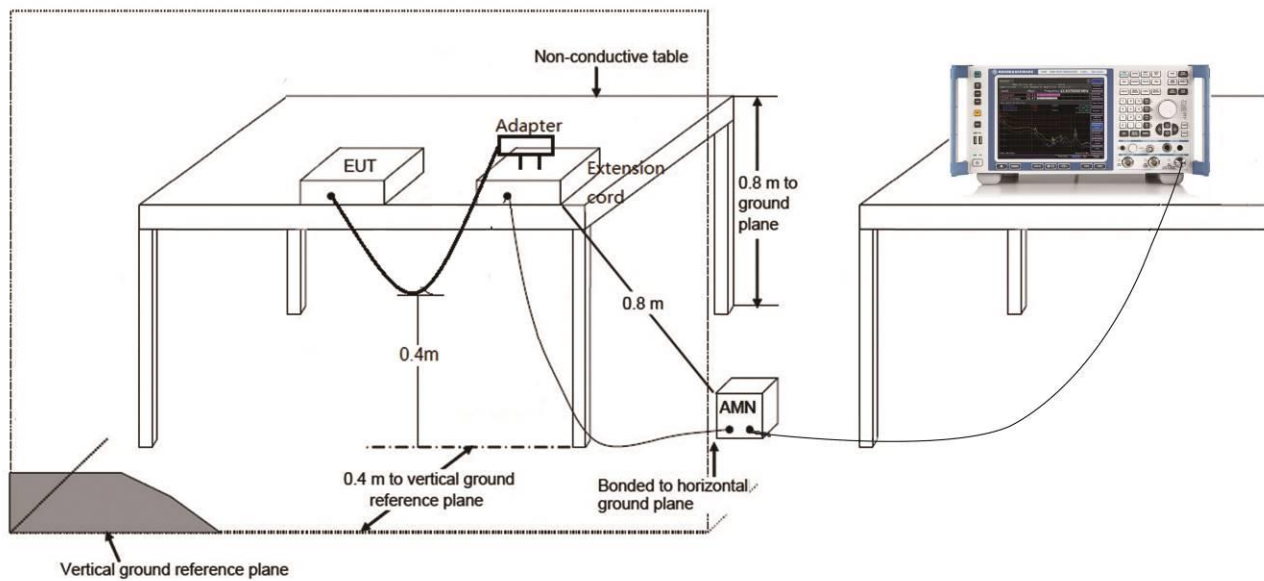

5.11.3. Test Result

Site: WZ-SR2	Time: 2021/06/24 - 17:19
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter Off	Polarity: Line
EUT: Wireless Headphones	Power: AC 120V/60Hz
Test Mode 1	

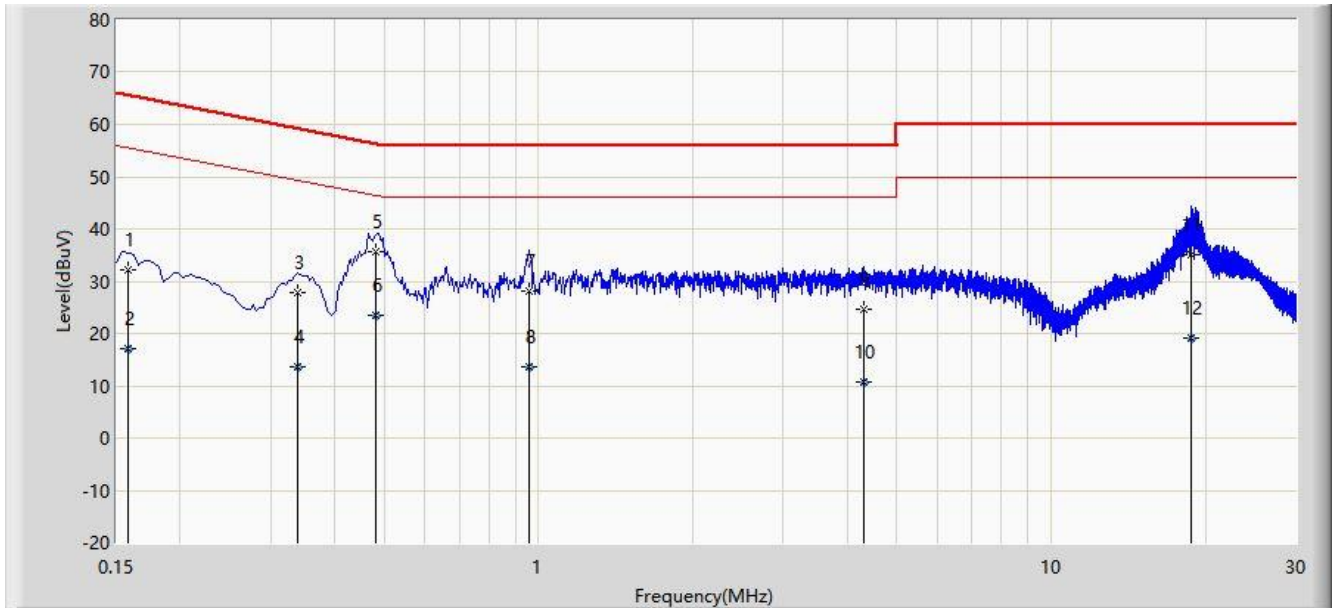


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	32.165	22.177	-33.403	65.568	9.988	QP
2			0.158	17.078	7.090	-38.490	55.568	9.988	AV
3			0.338	27.783	17.784	-31.469	59.252	9.999	QP
4			0.338	13.563	3.564	-35.689	49.252	9.999	AV
5		*	0.482	35.549	25.536	-20.755	56.305	10.014	QP
6			0.482	23.361	13.348	-22.943	46.305	10.014	AV
7			0.958	28.056	17.981	-27.944	56.000	10.075	QP
8			0.958	13.598	3.524	-32.402	46.000	10.075	AV
9			4.298	24.667	13.792	-31.333	56.000	10.875	QP
10			4.298	10.702	-0.174	-35.298	46.000	10.875	AV
11			18.750	35.111	19.647	-24.889	60.000	15.465	QP
12			18.750	19.015	3.550	-30.985	50.000	15.465	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2021/06/24 - 17:24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter Off	Polarity: Neutral
EUT: Wireless Headphones	Power: AC 120V/60Hz
Test Mode 1	

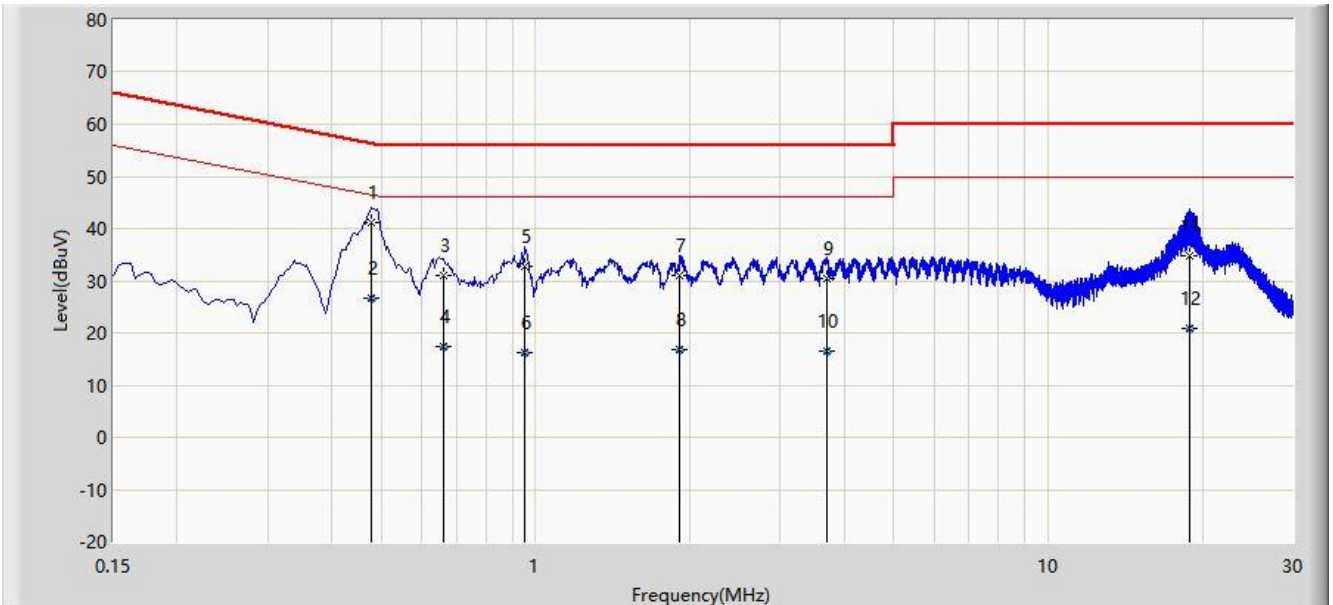

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.478	41.091	31.043	-15.283	56.374	10.048	QP
2			0.478	26.796	16.748	-19.577	46.374	10.048	AV
3			0.662	31.003	20.938	-24.997	56.000	10.065	QP
4			0.662	17.266	7.202	-28.734	46.000	10.065	AV
5			0.950	32.898	22.803	-23.102	56.000	10.095	QP
6			0.950	16.176	6.081	-29.824	46.000	10.095	AV
7			1.914	30.935	20.744	-25.065	56.000	10.192	QP
8			1.914	16.940	6.748	-29.060	46.000	10.192	AV
9			3.706	30.376	19.659	-25.624	56.000	10.717	QP
10			3.706	16.446	5.728	-29.554	46.000	10.717	AV
11			18.902	34.782	19.396	-25.218	60.000	15.386	QP
12			18.902	20.945	5.559	-29.055	50.000	15.386	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

6. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2106RSU001-UT" file.

Appendix B - EUT Photograph

Refer to "2106RSU001-UE" file.