



Top Antenna Proprietary Mode - 2Mbps Out-of-Band Emissions

Channel 24 (2478MHz)

100kHz PSD Reference Level

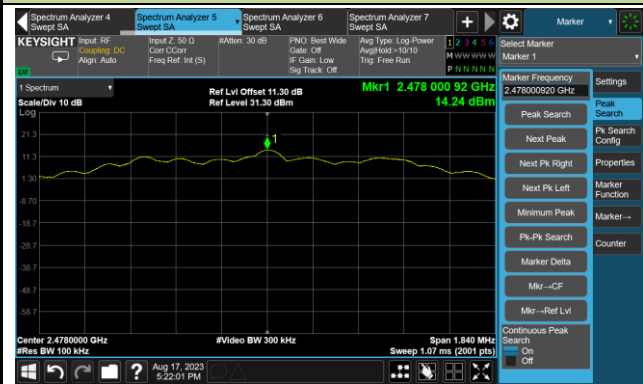

High Band Edge

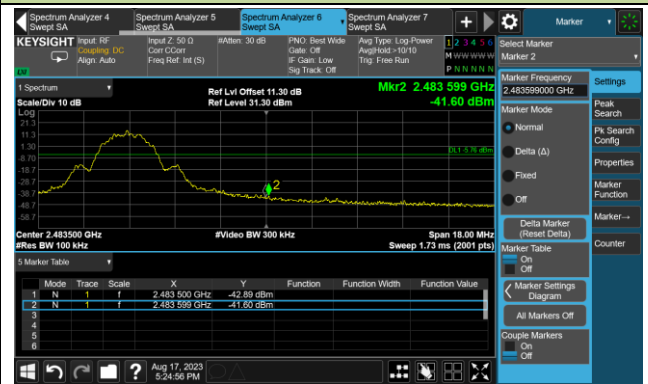


Spurious Emission 30MHz ~ 25GHz




Side Antenna BLE - 1Mbps Out-of-Band Emissions

Channel 00 (2402MHz)


100kHz PSD Reference Level

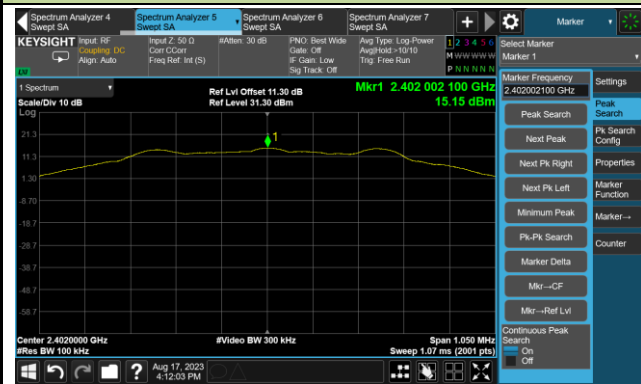

Low Band Edge

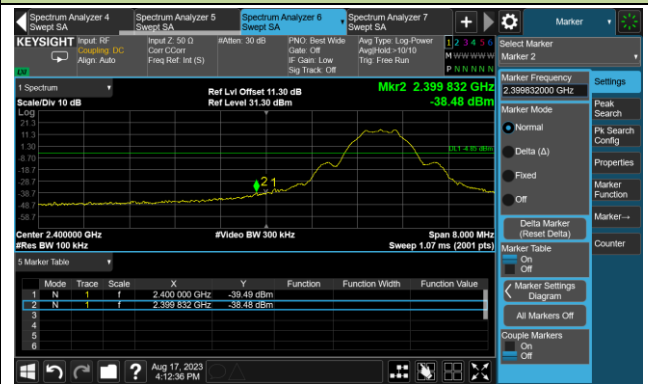


Spurious Emission 30MHz ~ 25GHz

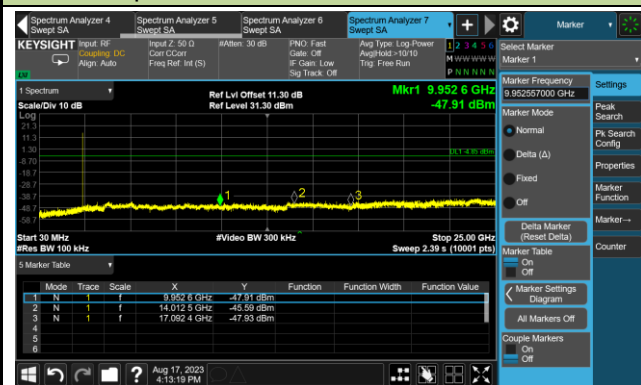


Channel 01 (2426MHz)

100kHz PSD Reference Level

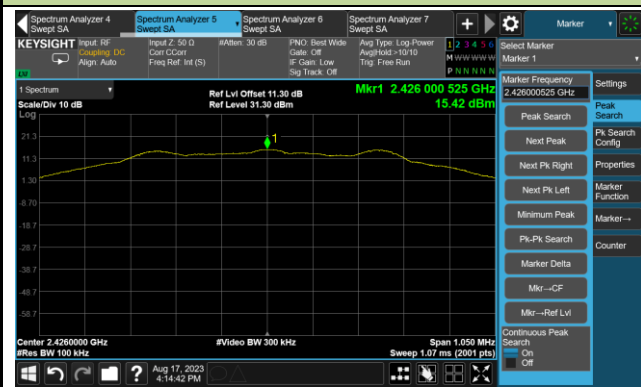


Spurious Emission 30MHz ~ 25GHz

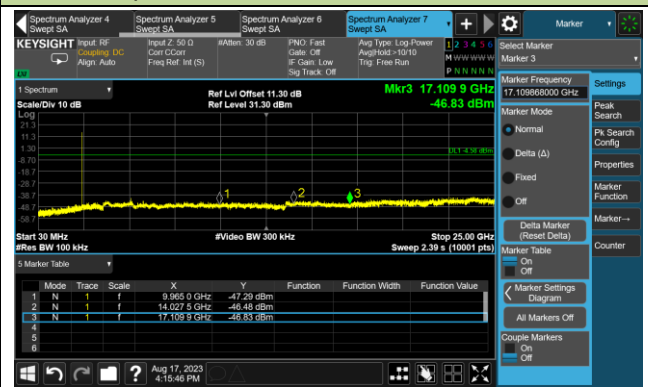


Side Antenna BLE - 1Mbps Out-of-Band Emissions

Channel 02 (2480MHz)


100kHz PSD Reference Level

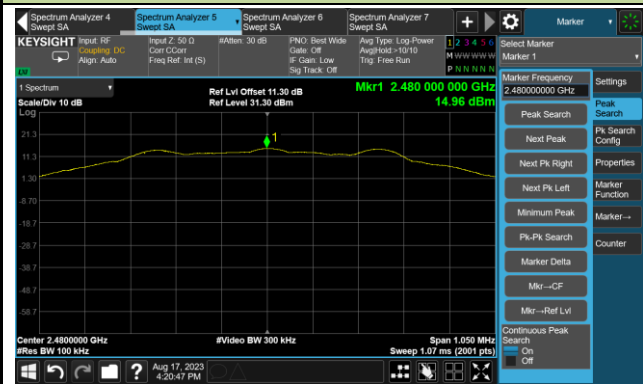

High Band Edge

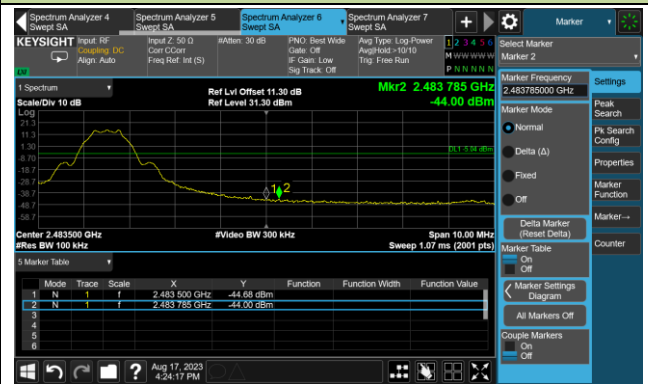


Spurious Emission 30MHz ~ 25GHz

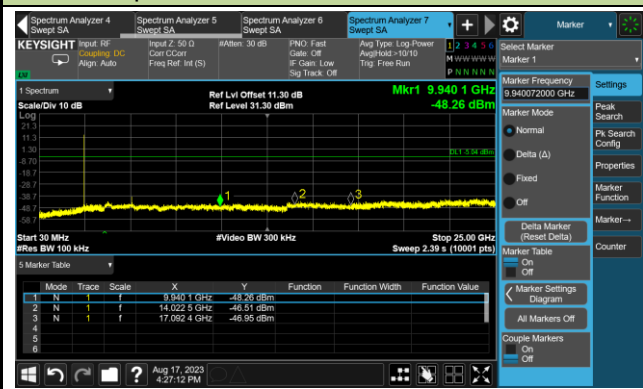


Side Antenna Proprietary Mode - 1Mbps Out-of-Band Emissions

Channel 00 (2402MHz)


100kHz PSD Reference Level

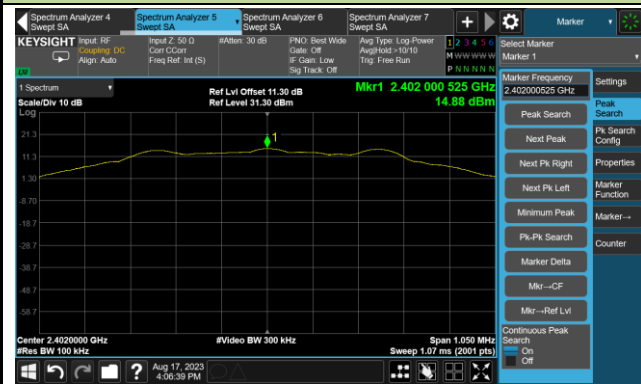

Low Band Edge

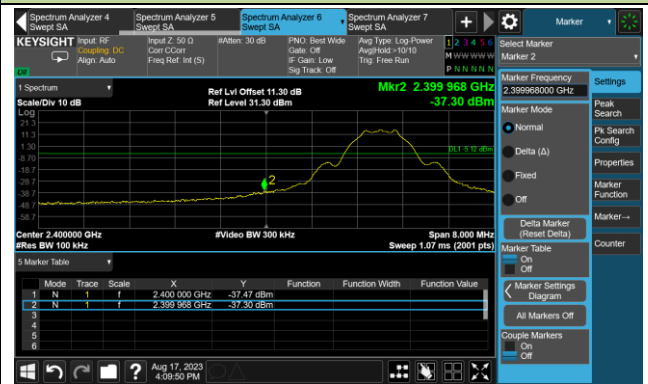


Spurious Emission 30MHz ~ 25GHz

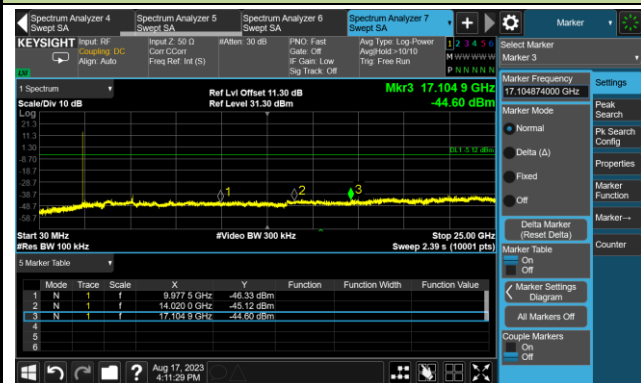


Channel 01 (2426MHz)

100kHz PSD Reference Level

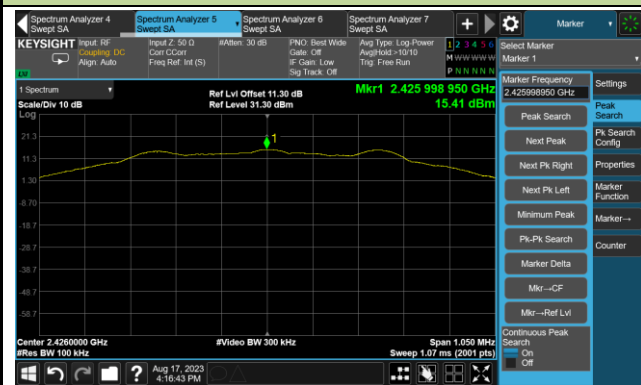


Spurious Emission 30MHz ~ 25GHz

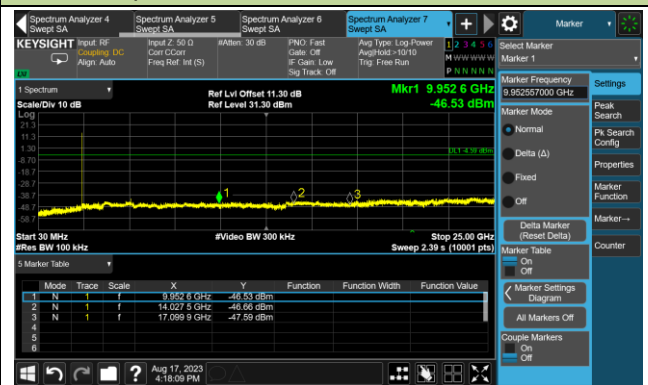


Side Antenna Proprietary Mode - 1Mbps Out-of-Band Emissions

Channel 02 (2480MHz)


100kHz PSD Reference Level

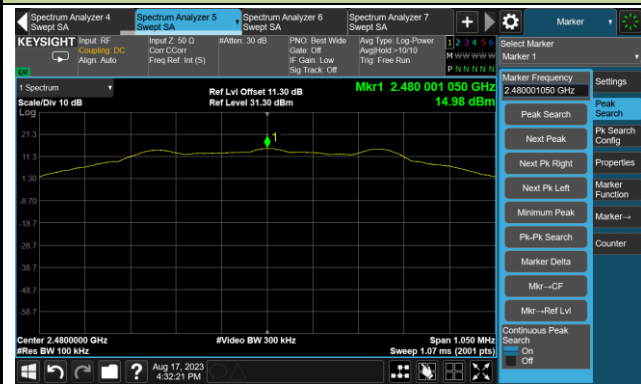

High Band Edge

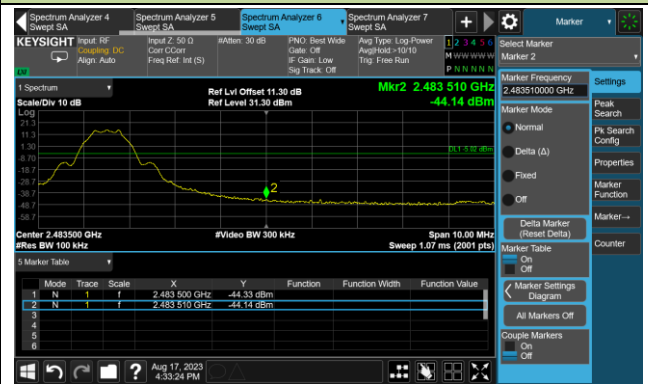


Spurious Emission 30MHz ~ 25GHz

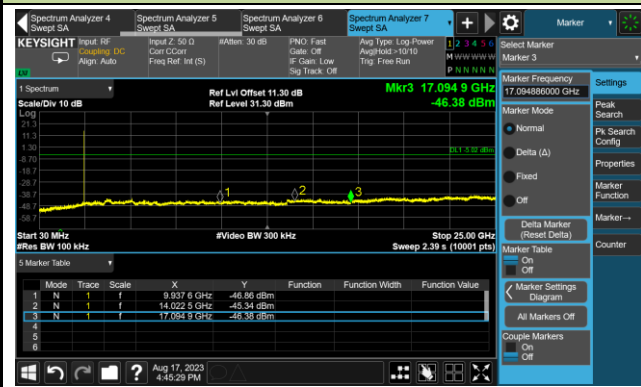

Side Antenna Proprietary Mode - 2Mbps Out-of-Band Emissions

Channel 01 (2404MHz)


100kHz PSD Reference Level

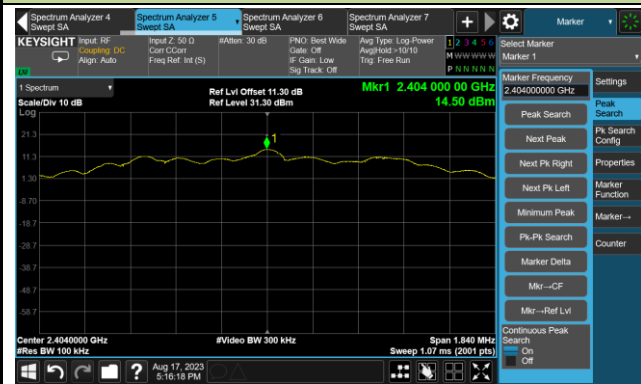

Low Band Edge




Spurious Emission 30MHz ~ 25GHz

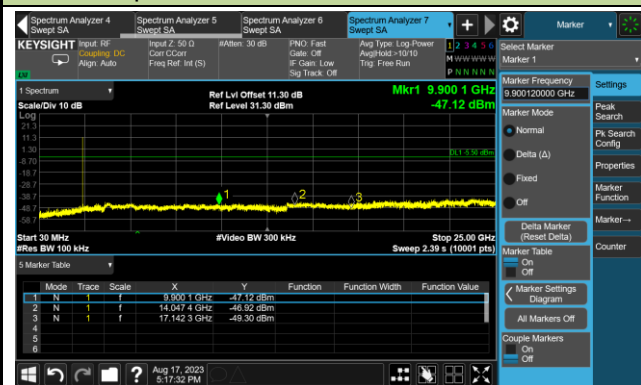


Channel 13 (2444MHz)

100kHz PSD Reference Level

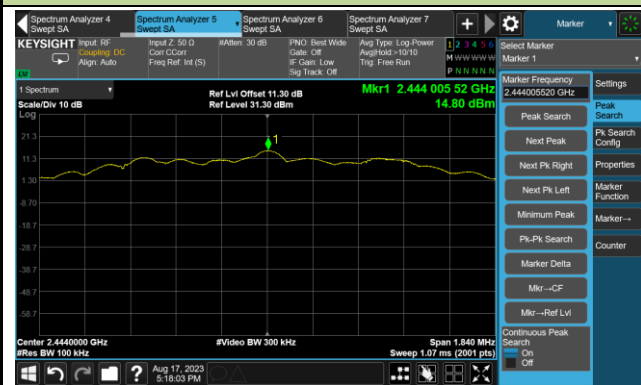


Spurious Emission 30MHz ~ 25GHz

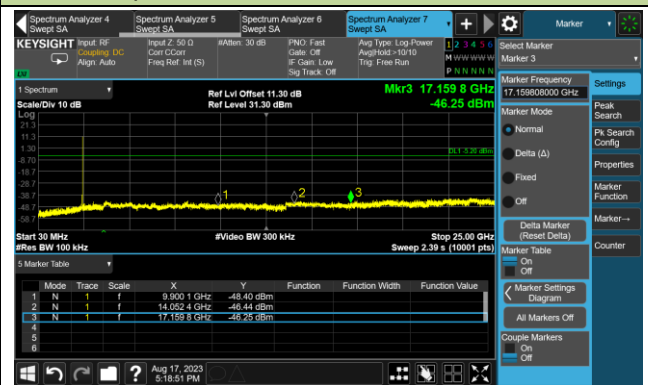


Side Antenna Proprietary Mode - 2Mbps Out-of-Band Emissions

Channel 24 (2478MHz)


100kHz PSD Reference Level

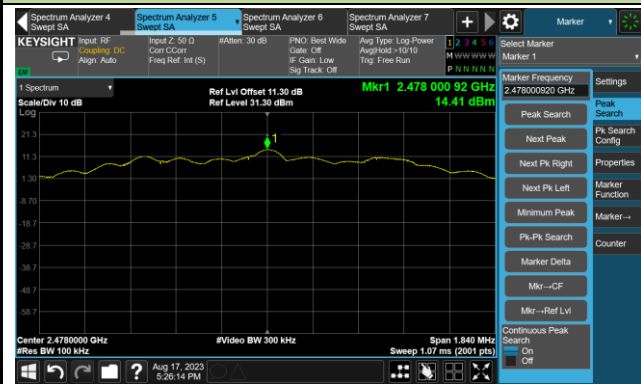

High Band Edge

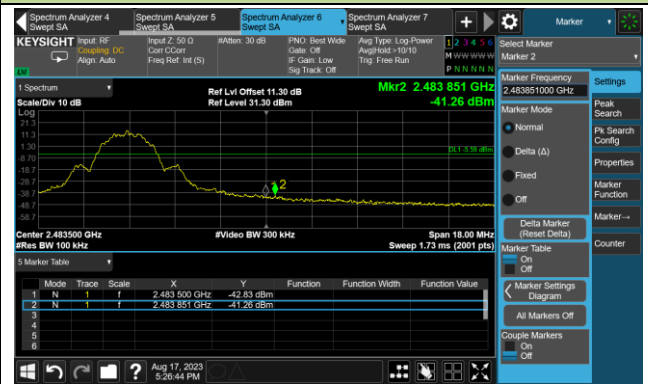

Spurious Emission 30MHz ~ 25GHz

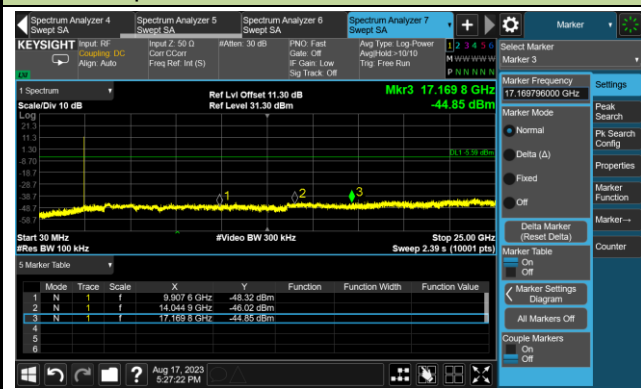

A.6 Radiated Spurious Emission Test Result

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-08-16~2023-08-17	Test Mode	Top Antenna BLE - 1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
00	7502.5	36.3	8.4	44.7	74.0	-29.3	Peak	Horizontal
	8412.0	36.1	8.9	45.0	74.0	-29.0	Peak	Horizontal
	12305.0	37.0	12.1	49.1	74.0	-24.9	Peak	Horizontal
	7562.0	36.4	8.3	44.7	74.0	-29.3	Peak	Vertical
	8446.0	36.0	9.0	45.0	74.0	-29.0	Peak	Vertical
	11506.0	36.0	13.0	49.0	74.0	-25.0	Peak	Vertical
01	7698.0	36.8	8.1	44.9	74.0	-29.1	Peak	Horizontal
	8344.0	36.7	8.6	45.3	74.0	-28.7	Peak	Horizontal
	11480.5	35.8	13.0	48.8	74.0	-25.2	Peak	Horizontal
	7485.5	35.8	8.5	44.3	74.0	-29.7	Peak	Vertical
	8327.0	34.9	8.6	43.5	74.0	-30.5	Peak	Vertical
	12313.5	35.9	12.2	48.1	74.0	-25.9	Peak	Vertical
02	7417.5	36.4	8.3	44.7	74.0	-29.3	Peak	Horizontal
	8165.5	35.3	8.9	44.2	74.0	-29.8	Peak	Horizontal
	11166.0	35.6	13.1	48.7	74.0	-25.3	Peak	Horizontal
	7451.5	36.7	8.5	45.2	74.0	-28.8	Peak	Vertical
	8250.5	37.0	8.6	45.6	74.0	-28.4	Peak	Vertical
	11183.0	36.3	12.8	49.1	74.0	-24.9	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-08-16~2023-08-17	Test Mode	Top Antenna Proprietary Mode - 1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	7562.0	35.5	8.3	43.8	74.0	-30.2	Peak	Horizontal
	8463.0	36.0	9.2	45.2	74.0	-28.8	Peak	Horizontal
	11472.0	36.3	12.8	49.1	74.0	-24.9	Peak	Horizontal
	7383.5	36.9	8.4	45.3	74.0	-28.7	Peak	Vertical
	8157.0	35.8	9.1	44.9	74.0	-29.1	Peak	Vertical
	11557.0	36.6	12.7	49.3	74.0	-24.7	Peak	Vertical
01	7689.5	35.9	8.0	43.9	74.0	-30.1	Peak	Horizontal
	8395.0	35.4	8.8	44.2	74.0	-29.8	Peak	Horizontal
	12135.0	36.3	12.3	48.6	74.0	-25.4	Peak	Horizontal
	7358.0	36.6	8.4	45.0	74.0	-29.0	Peak	Vertical
	8140.0	35.2	9.0	44.2	74.0	-29.8	Peak	Vertical
	11429.5	35.7	13.0	48.7	74.0	-25.3	Peak	Vertical
02	7443.0	36.2	8.4	44.6	74.0	-29.4	Peak	Horizontal
	8106.0	36.4	9.1	45.5	74.0	-28.5	Peak	Horizontal
	10987.5	34.9	13.8	48.7	74.0	-25.3	Peak	Horizontal
	7417.5	36.0	8.3	44.3	74.0	-29.7	Peak	Vertical
	8454.5	35.7	9.2	44.9	74.0	-29.1	Peak	Vertical
	10979.0	35.3	13.6	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-08-16~2023-08-17	Test Mode	Top Antenna Proprietary Mode - 2Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7477.0	35.8	8.5	44.3	74.0	-29.7	Peak	Horizontal
	8242.0	35.4	8.6	44.0	74.0	-30.0	Peak	Horizontal
	11098.0	35.9	13.4	49.3	74.0	-24.7	Peak	Horizontal
	7613.0	36.4	8.2	44.6	74.0	-29.4	Peak	Vertical
	8293.0	35.4	8.6	44.0	74.0	-30.0	Peak	Vertical
	12084.0	36.3	12.3	48.6	74.0	-25.4	Peak	Vertical
13	7392.0	36.4	8.4	44.8	74.0	-29.2	Peak	Horizontal
	8165.5	35.3	8.9	44.2	74.0	-29.8	Peak	Horizontal
	11489.0	36.0	13.2	49.2	74.0	-24.8	Peak	Horizontal
	7307.0	36.4	8.2	44.6	74.0	-29.4	Peak	Vertical
	8097.5	35.5	9.2	44.7	74.0	-29.3	Peak	Vertical
	11922.5	37.0	12.2	49.2	74.0	-24.8	Peak	Vertical
24	7400.5	35.9	8.3	44.2	74.0	-29.8	Peak	Horizontal
	8140.0	35.6	9.0	44.6	74.0	-29.4	Peak	Horizontal
	11081.0	35.9	13.5	49.4	74.0	-24.6	Peak	Horizontal
	7383.5	36.2	8.4	44.6	74.0	-29.4	Peak	Vertical
	8182.5	35.6	8.7	44.3	74.0	-29.7	Peak	Vertical
	11489.0	35.2	13.2	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-08-16~2023-08-17	Test Mode	Side Antenna BLE - 1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	8157.0	34.0	9.1	43.1	74.0	-30.9	Peak	Horizontal
	11098.0	34.5	13.4	47.9	74.0	-26.1	Peak	Horizontal
	12279.5	34.8	12.2	47.0	74.0	-27.0	Peak	Horizontal
	9432.0	34.0	12.2	46.2	74.0	-27.8	Peak	Vertical
	10783.5	33.5	13.8	47.3	74.0	-26.7	Peak	Vertical
	12381.5	35.0	12.1	47.1	74.0	-26.9	Peak	Vertical
01	9389.5	35.0	12.1	47.1	74.0	-26.9	Peak	Horizontal
	10885.5	33.9	13.6	47.5	74.0	-26.5	Peak	Horizontal
	12305.0	35.0	12.1	47.1	74.0	-26.9	Peak	Horizontal
	9406.5	34.1	12.1	46.2	74.0	-27.8	Peak	Vertical
	10792.0	33.5	14.0	47.5	74.0	-26.5	Peak	Vertical
	12288.0	35.4	12.1	47.5	74.0	-26.5	Peak	Vertical
02	8403.5	37.0	8.9	45.9	74.0	-28.1	Peak	Horizontal
	11523.0	36.5	12.9	49.4	74.0	-24.6	Peak	Horizontal
	15679.5	35.9	12.1	48.0	74.0	-26.0	Peak	Horizontal
	8446.0	36.6	9.0	45.6	74.0	-28.4	Peak	Vertical
	12279.5	37.1	12.2	49.3	74.0	-24.7	Peak	Vertical
	15671.0	36.9	12.0	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-08-16~2023-08-17	Test Mode	Side Antenna Proprietary Mode - 1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	8089.0	37.1	9.0	46.1	74.0	-27.9	Peak	Horizontal
	11540.0	37.0	12.8	49.8	74.0	-24.2	Peak	Horizontal
	15586.0	35.3	12.4	47.7	74.0	-26.3	Peak	Horizontal
	8437.5	35.3	8.9	44.2	74.0	-29.8	Peak	Vertical
	11489.0	36.5	13.2	49.7	74.0	-24.3	Peak	Vertical
	15934.5	36.2	12.0	48.2	74.0	-25.8	Peak	Vertical
01	7281.5	41.8	8.4	50.2	74.0	-23.8	Peak	Horizontal
	8403.5	36.4	8.9	45.3	74.0	-28.7	Peak	Horizontal
	11523.0	36.2	12.9	49.1	74.0	-24.9	Peak	Horizontal
	7647.0	36.6	8.2	44.8	74.0	-29.2	Peak	Vertical
	8446.0	36.0	9.0	45.0	74.0	-29.0	Peak	Vertical
	12313.5	37.2	12.2	49.4	74.0	-24.6	Peak	Vertical
02	7443.0	37.1	8.4	45.5	74.0	-28.5	Peak	Horizontal
	8454.5	36.0	9.2	45.2	74.0	-28.8	Peak	Horizontal
	11438.0	35.8	13.1	48.9	74.0	-25.1	Peak	Horizontal
	7477.0	37.0	8.5	45.5	74.0	-28.5	Peak	Vertical
	8437.5	36.3	8.9	45.2	74.0	-28.8	Peak	Vertical
	12296.5	38.4	12.1	50.5	74.0	-23.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-08-16~2023-08-17	Test Mode	Side Antenna Proprietary Mode - 2Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7638.5	35.2	8.2	43.4	74.0	-30.6	Peak	Horizontal
	8420.5	35.8	8.9	44.7	74.0	-29.3	Peak	Horizontal
	10894.0	35.6	13.6	49.2	74.0	-24.8	Peak	Horizontal
	7298.5	36.8	8.3	45.1	74.0	-28.9	Peak	Vertical
	8488.5	35.7	9.1	44.8	74.0	-29.2	Peak	Vertical
	11480.5	36.3	13.0	49.3	74.0	-24.7	Peak	Vertical
13	7332.5	39.8	8.1	47.9	74.0	-26.1	Peak	Horizontal
	8208.0	35.5	8.7	44.2	74.0	-29.8	Peak	Horizontal
	11089.5	35.6	13.4	49.0	74.0	-25.0	Peak	Horizontal
	7332.5	37.6	8.1	45.7	74.0	-28.3	Peak	Vertical
	8310.0	33.4	8.6	42.0	74.0	-32.0	Peak	Vertical
	11497.5	36.6	13.1	49.7	74.0	-24.3	Peak	Vertical
24	7434.5	37.0	8.4	45.4	74.0	-28.6	Peak	Horizontal
	8471.5	36.1	9.2	45.3	74.0	-28.7	Peak	Horizontal
	11395.5	35.9	12.9	48.8	74.0	-25.2	Peak	Horizontal
	7485.5	37.1	8.5	45.6	74.0	-28.4	Peak	Vertical
	8310.0	36.1	8.6	44.7	74.0	-29.3	Peak	Vertical
	11480.5	35.8	13.0	48.8	74.0	-25.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Top Antenna	

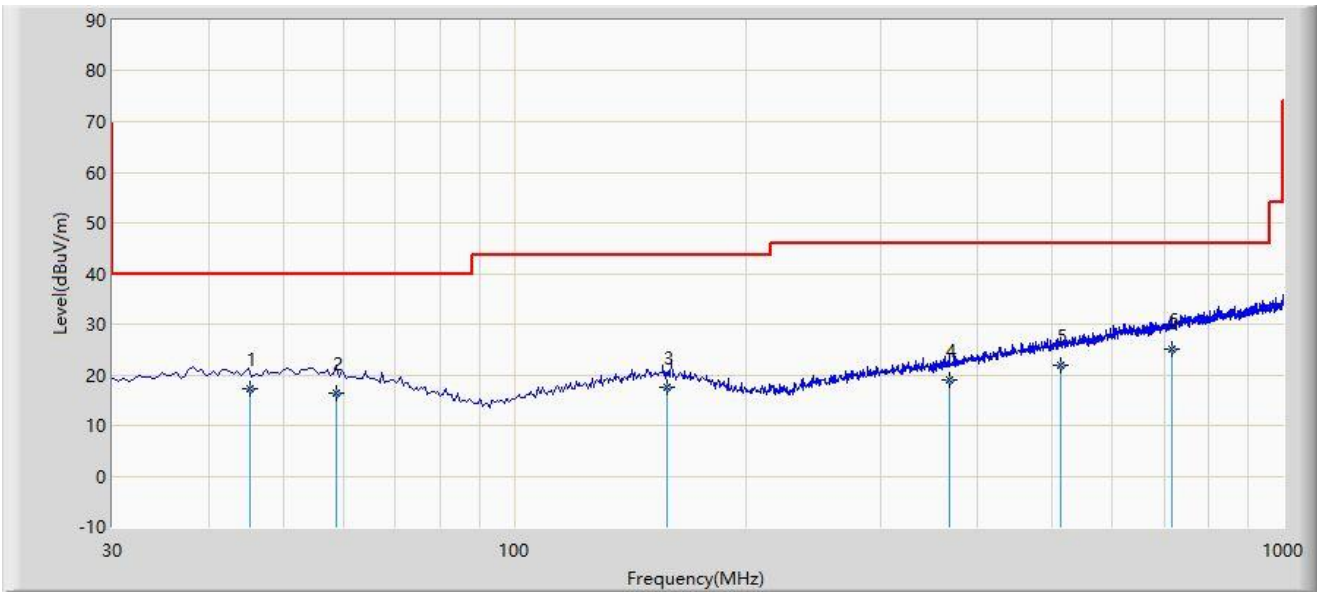

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		45.230	17.165	-1.300	-22.835	40.000	18.465	QP
2		58.780	16.439	-1.650	-23.561	40.000	18.089	QP
3		158.260	17.662	-0.620	-25.838	43.500	18.282	QP
4		368.850	18.920	-1.230	-27.080	46.000	20.149	QP
5		513.590	21.782	-1.750	-24.218	46.000	23.532	QP
6	*	716.230	25.209	-1.820	-20.791	46.000	27.029	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Top Antenna	

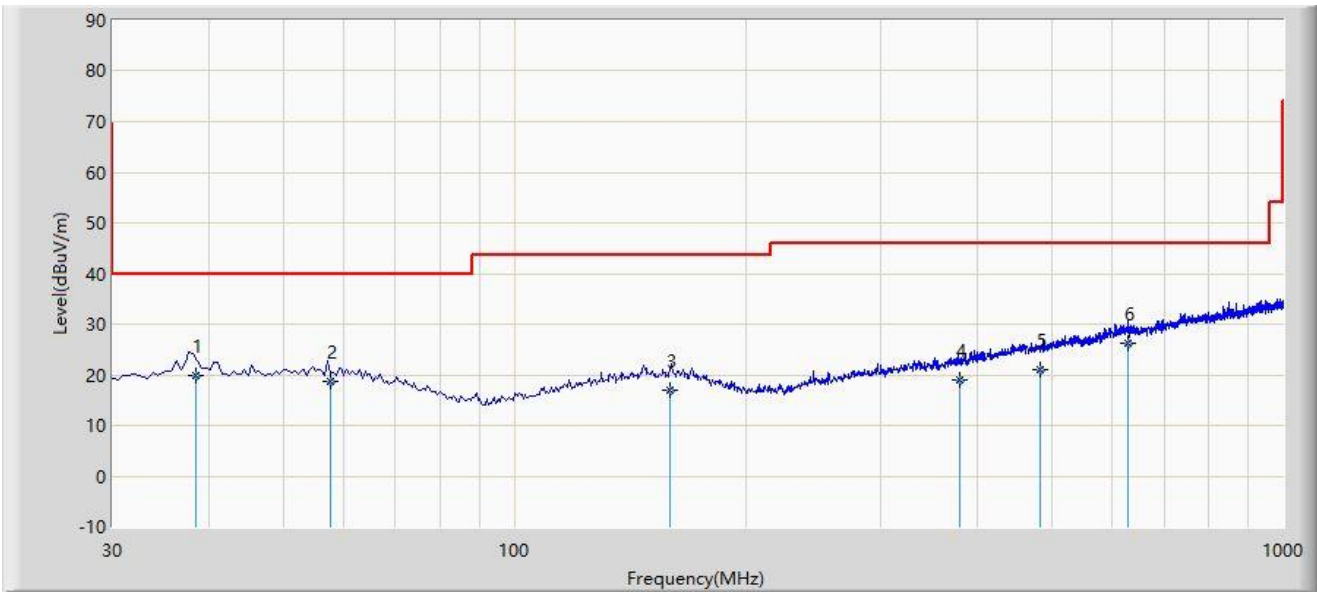

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		38.560	19.730	1.860	-20.270	40.000	17.869	QP
2		57.560	18.772	0.560	-21.228	40.000	18.212	QP
3		159.480	16.949	-1.320	-26.551	43.500	18.269	QP
4		379.010	19.080	-1.370	-26.920	46.000	20.450	QP
5		482.350	20.872	-2.120	-25.128	46.000	22.991	QP
6	*	628.720	26.109	0.110	-19.891	46.000	25.999	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Side Antenna	

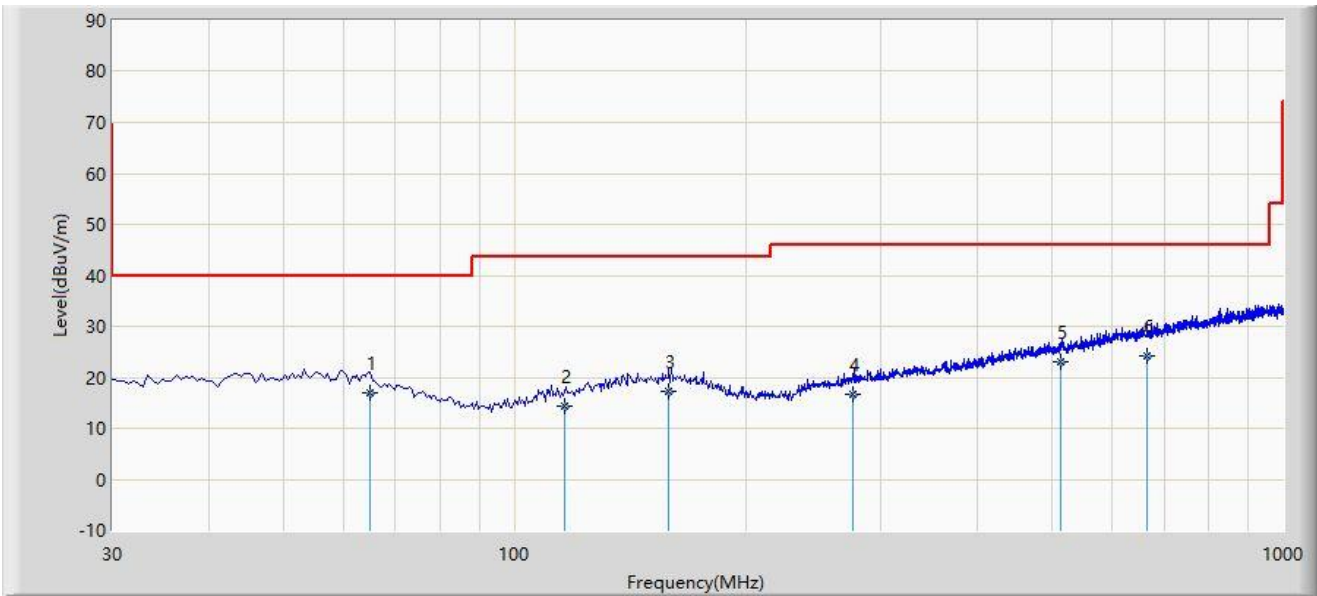

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		64.780	17.069	-0.230	-22.931	40.000	17.299	QP
2		116.420	14.366	-1.230	-29.134	43.500	15.596	QP
3		158.770	17.268	-1.010	-26.232	43.500	18.278	QP
4		276.120	16.654	-1.300	-29.346	46.000	17.954	QP
5		514.230	22.986	-0.560	-23.014	46.000	23.546	QP
6	*	665.230	24.271	-1.890	-21.729	46.000	26.161	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Side Antenna	

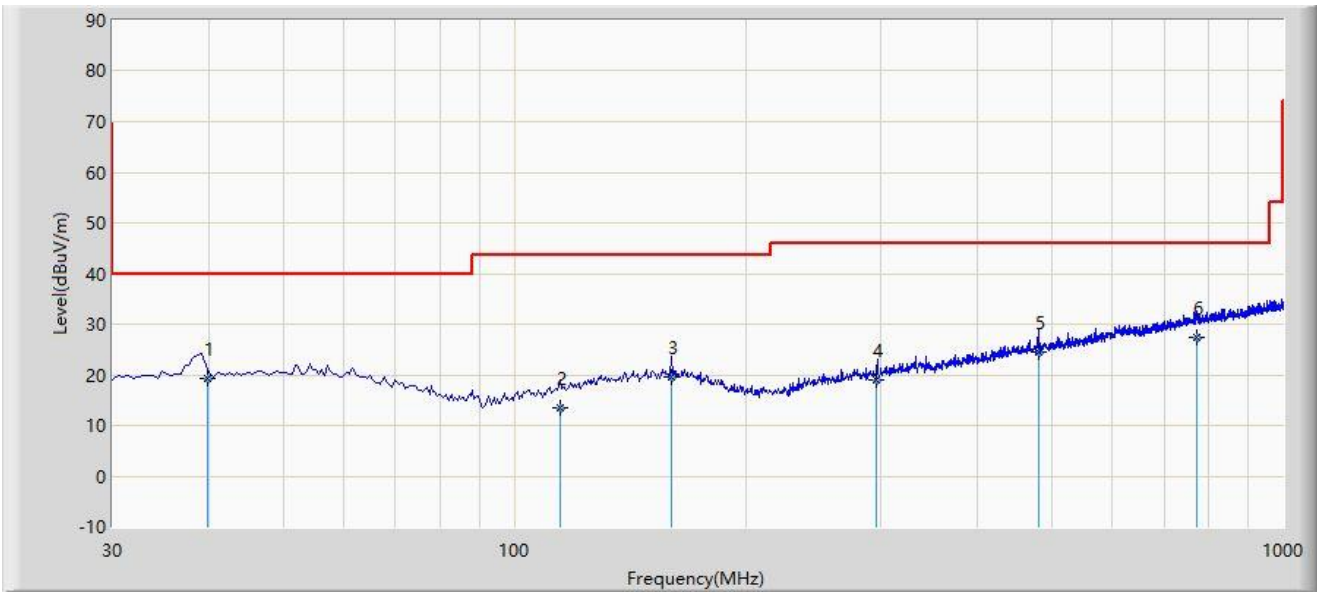

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		39.850	19.240	1.230	-20.760	40.000	18.011	QP
2		114.520	13.439	-1.980	-30.061	43.500	15.419	QP
3		159.750	19.495	1.230	-24.005	43.500	18.264	QP
4		295.660	18.922	0.520	-27.078	46.000	18.402	QP
5		480.850	24.494	1.530	-21.506	46.000	22.964	QP
6	*	772.980	27.365	-0.750	-18.635	46.000	28.115	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz for Top Antenna	

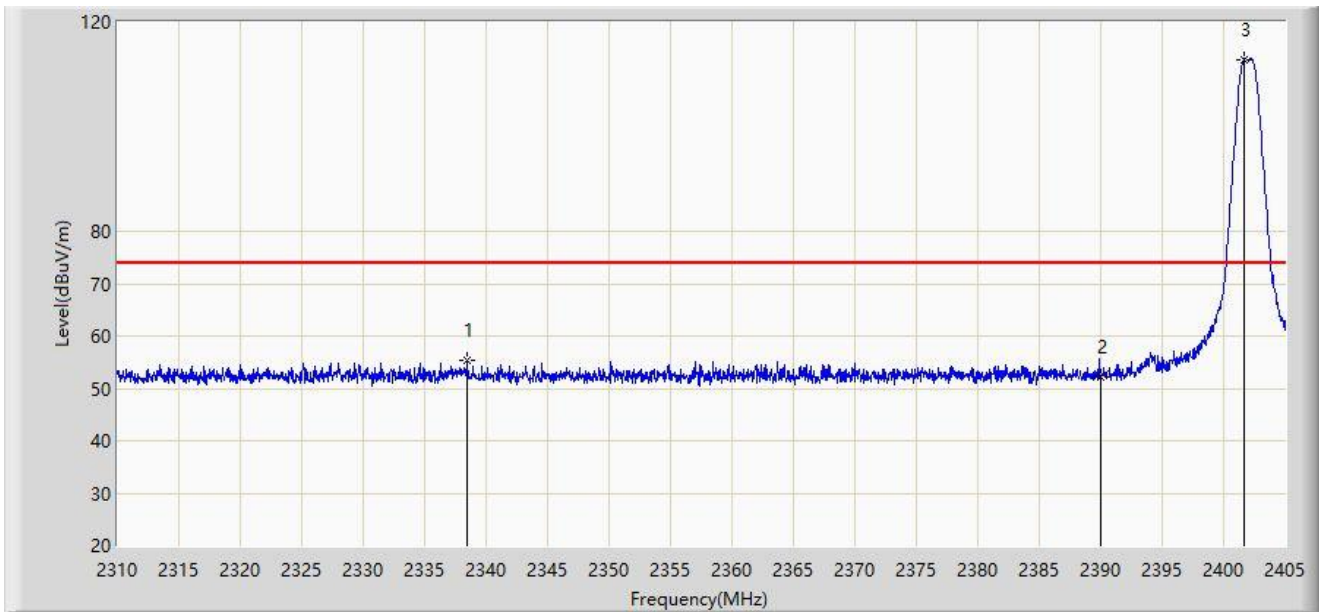


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2338.500	55.409	24.005	-18.591	74.000	31.404	PK
2		2390.000	52.299	21.141	-21.701	74.000	31.158	PK
3		2401.627	112.742	81.590	N/A	N/A	31.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz for Top Antenna	

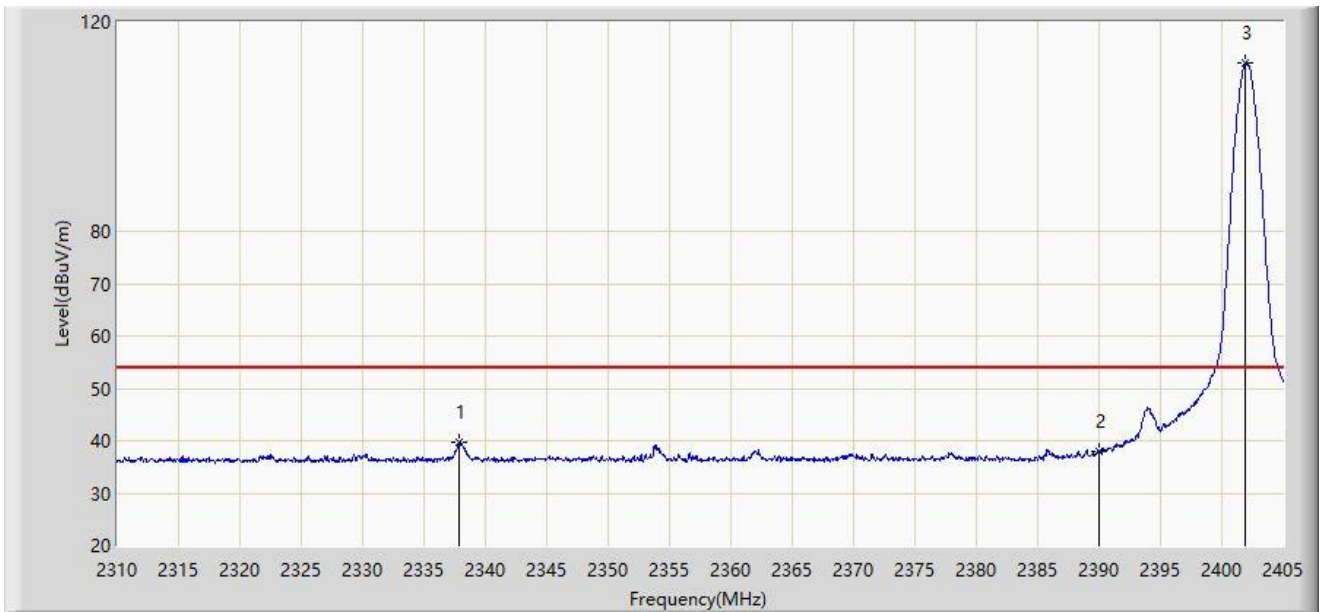


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2337.835	39.751	8.345	-14.249	54.000	31.406	AV
2		2390.000	37.829	6.671	-16.171	54.000	31.158	AV
3		2401.960	112.137	80.985	N/A	N/A	31.152	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz for Top Antenna	

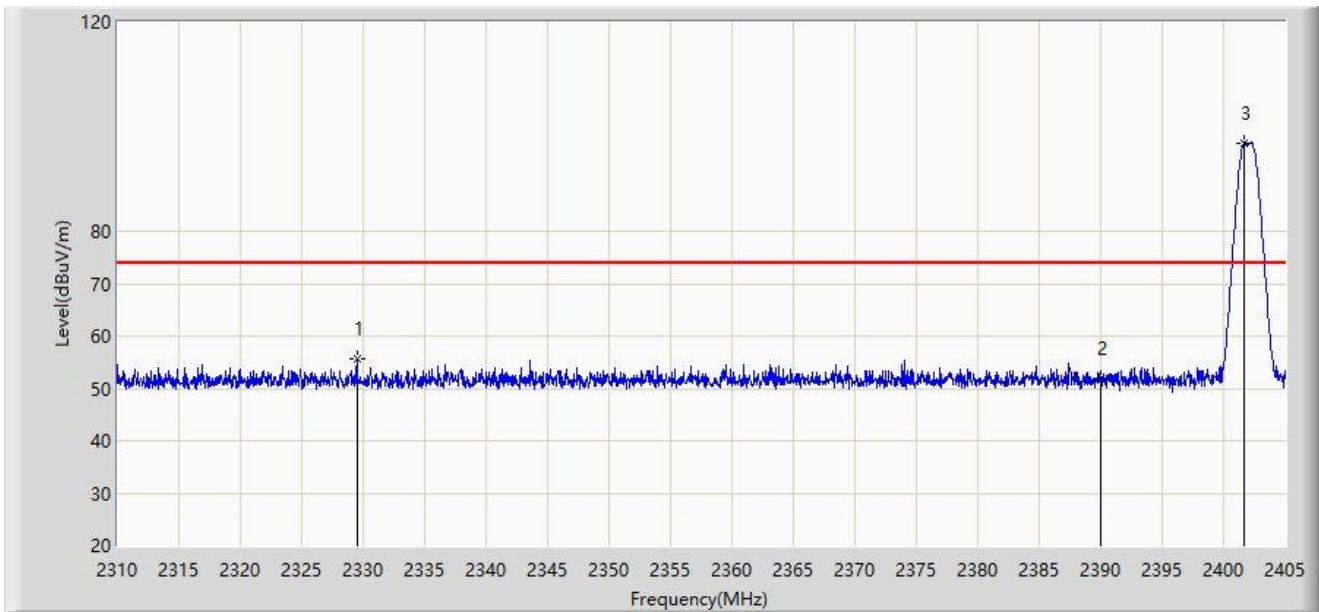


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2329.522	55.677	24.248	-18.323	74.000	31.429	PK
2		2390.000	52.016	20.858	-21.984	74.000	31.158	PK
3		2401.675	96.954	65.802	N/A	N/A	31.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz for Top Antenna	

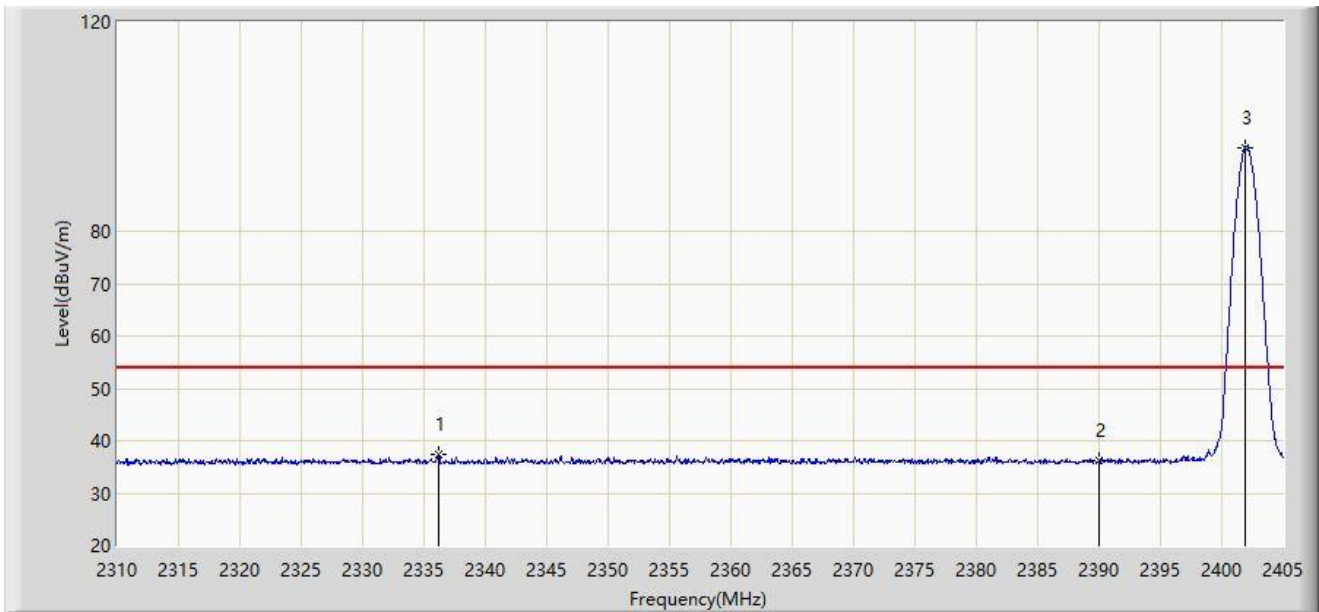


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2336.220	37.332	5.921	-16.668	54.000	31.411	AV
2		2390.000	36.174	5.016	-17.826	54.000	31.158	AV
3		2401.913	96.051	64.899	N/A	N/A	31.152	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz for Top Antenna	

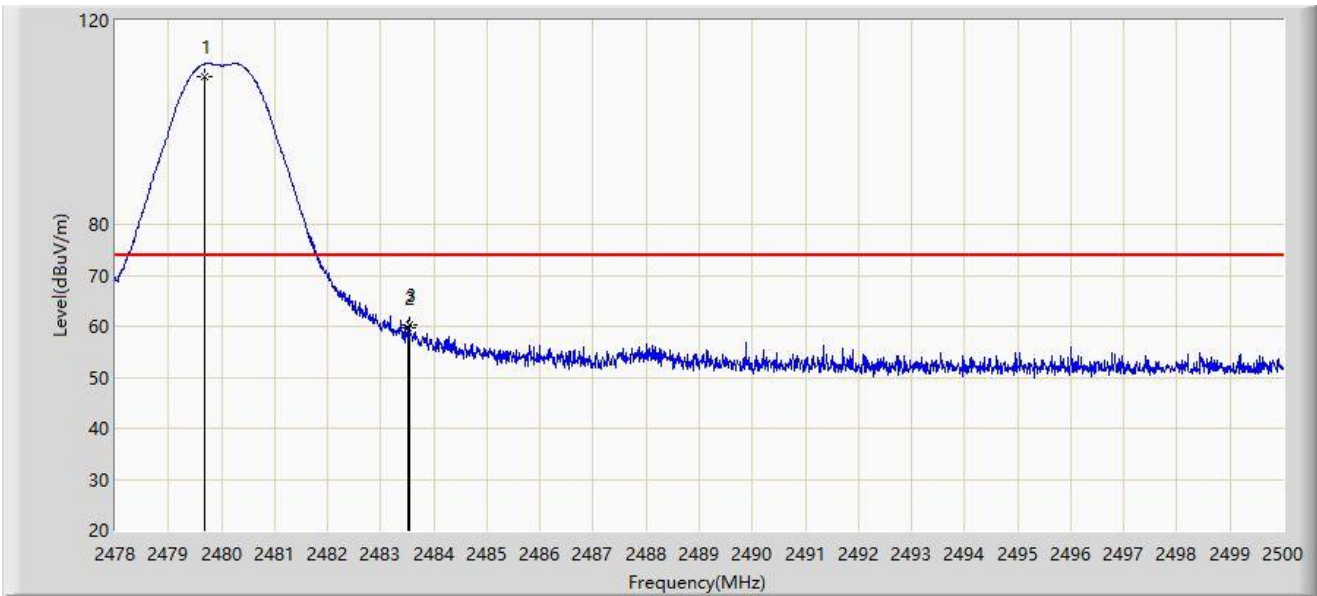


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.694	108.985	77.895	N/A	N/A	31.089	PK
2		2483.500	59.810	28.717	-14.190	74.000	31.093	PK
3	*	2483.544	60.318	29.225	-13.682	74.000	31.093	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz for Top Antenna	

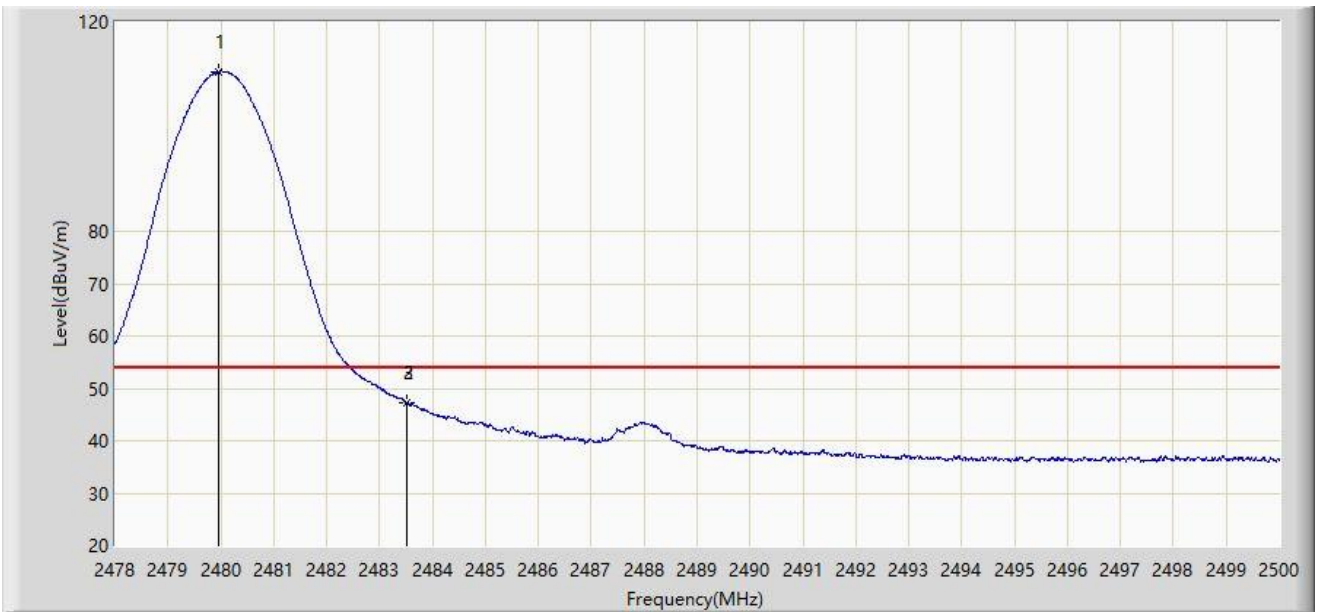


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.969	110.537	79.447	N/A	N/A	31.090	AV
2		2483.500	47.265	16.172	-6.735	54.000	31.093	AV
3	*	2483.522	47.288	16.062	-6.712	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz for Top Antenna	

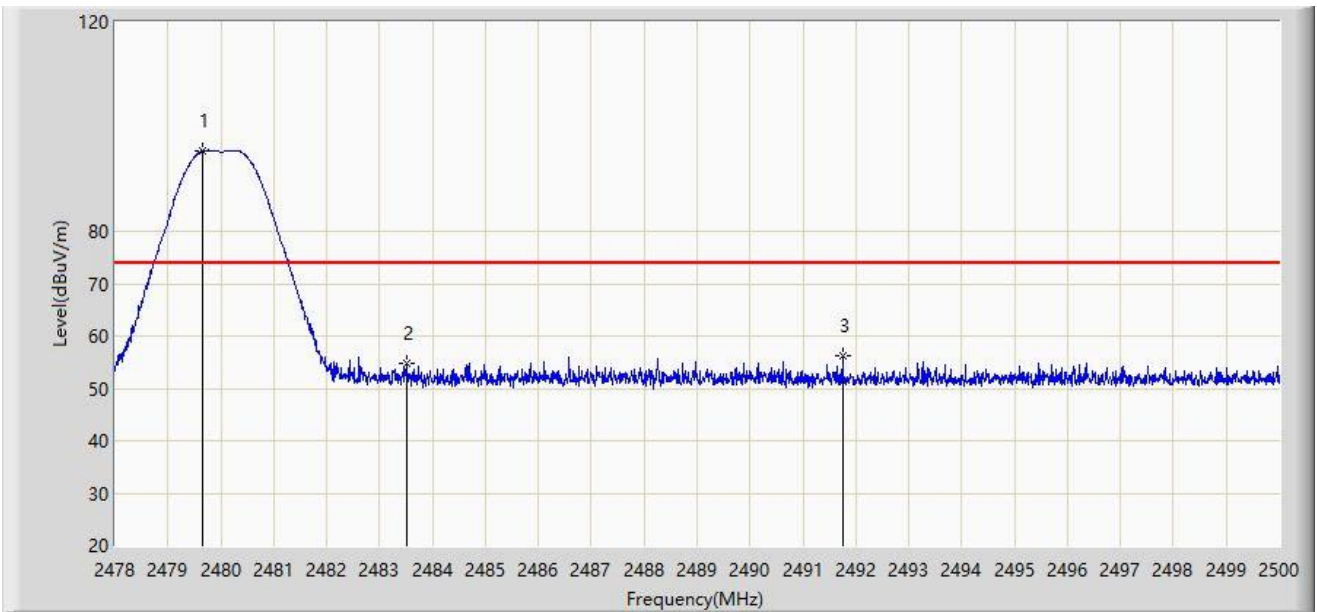


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.650	95.311	64.222	N/A	N/A	31.089	PK
2		2483.500	54.763	23.670	-19.237	74.000	31.093	PK
3	*	2491.750	56.099	24.867	-17.901	74.000	31.232	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz for Top Antenna	

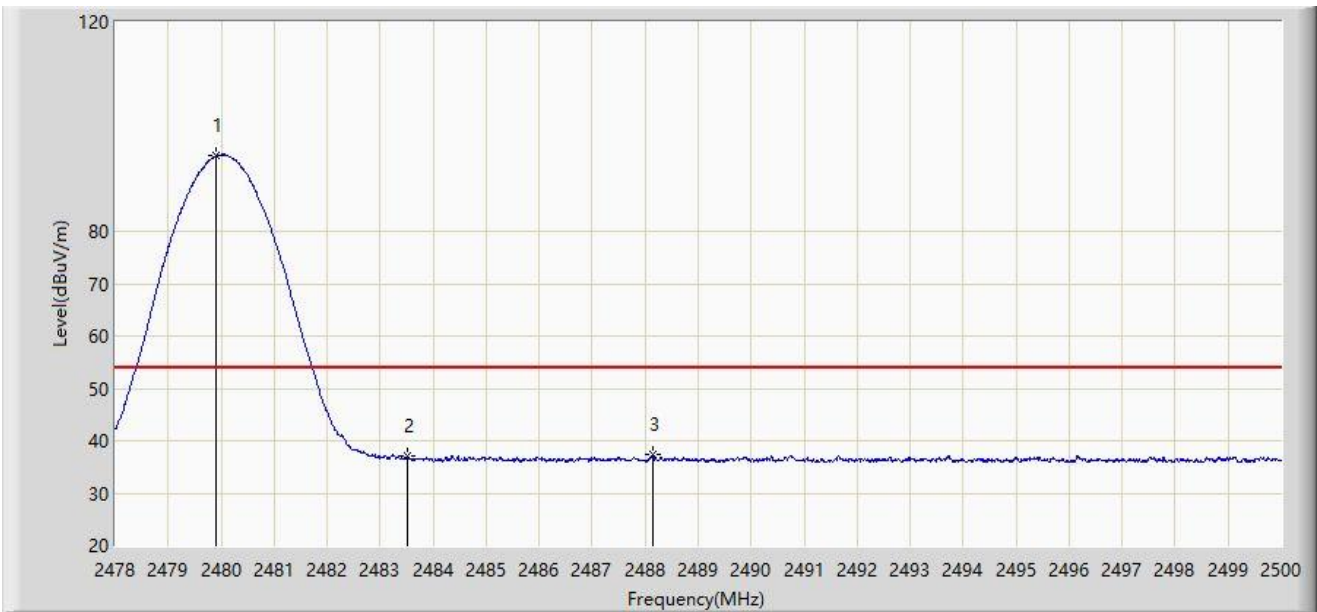


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.903	94.386	63.296	N/A	N/A	31.090	AV
2		2483.500	37.117	6.024	-16.883	54.000	31.093	AV
3	*	2488.142	37.276	6.046	-16.724	54.000	31.230	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2402MHz for Top Antenna	

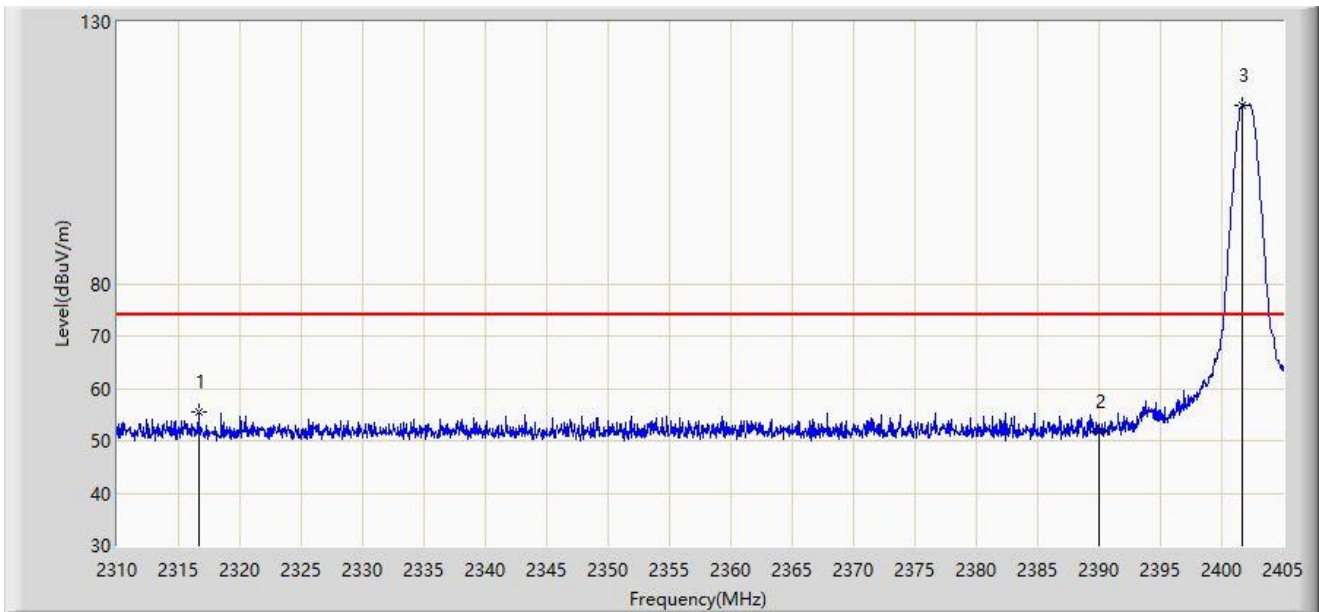


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2316.650	55.401	23.936	-18.599	74.000	31.465	PK
2		2390.000	51.633	20.475	-22.367	74.000	31.158	PK
3		2401.627	114.021	82.869	N/A	N/A	31.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2402MHz for Top Antenna	

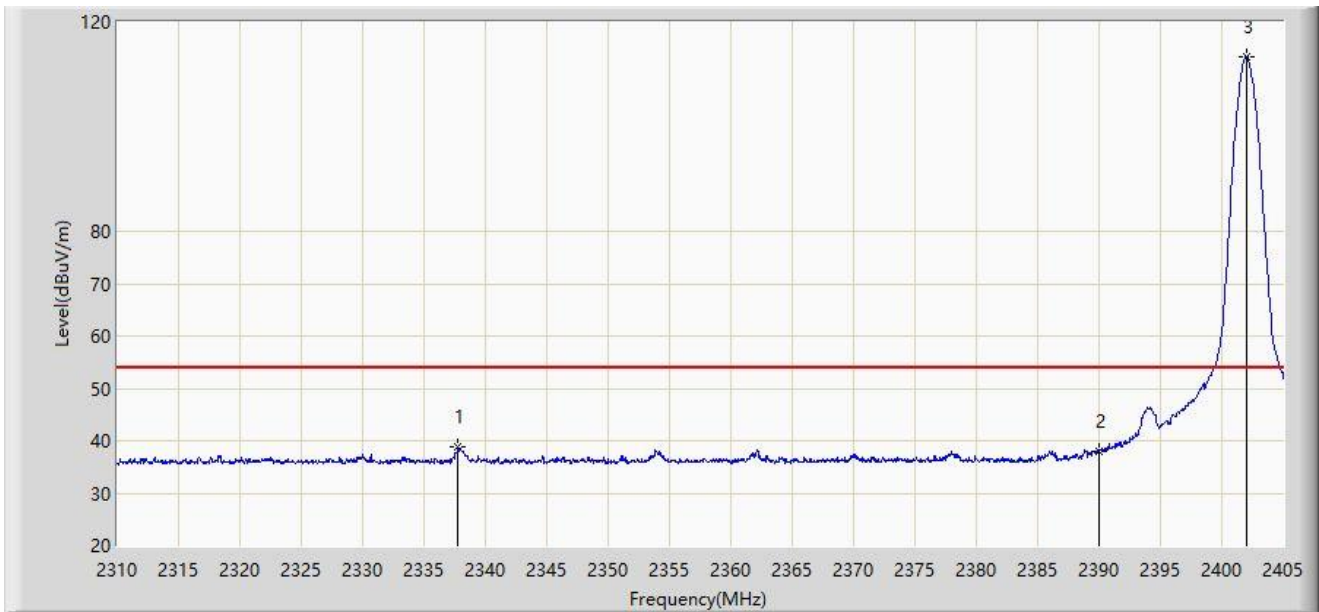


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2337.740	38.712	7.305	-15.288	54.000	31.407	AV
2		2390.000	38.010	6.852	-15.990	54.000	31.158	AV
3		2402.008	113.371	82.219	N/A	N/A	31.152	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2402MHz for Top Antenna	

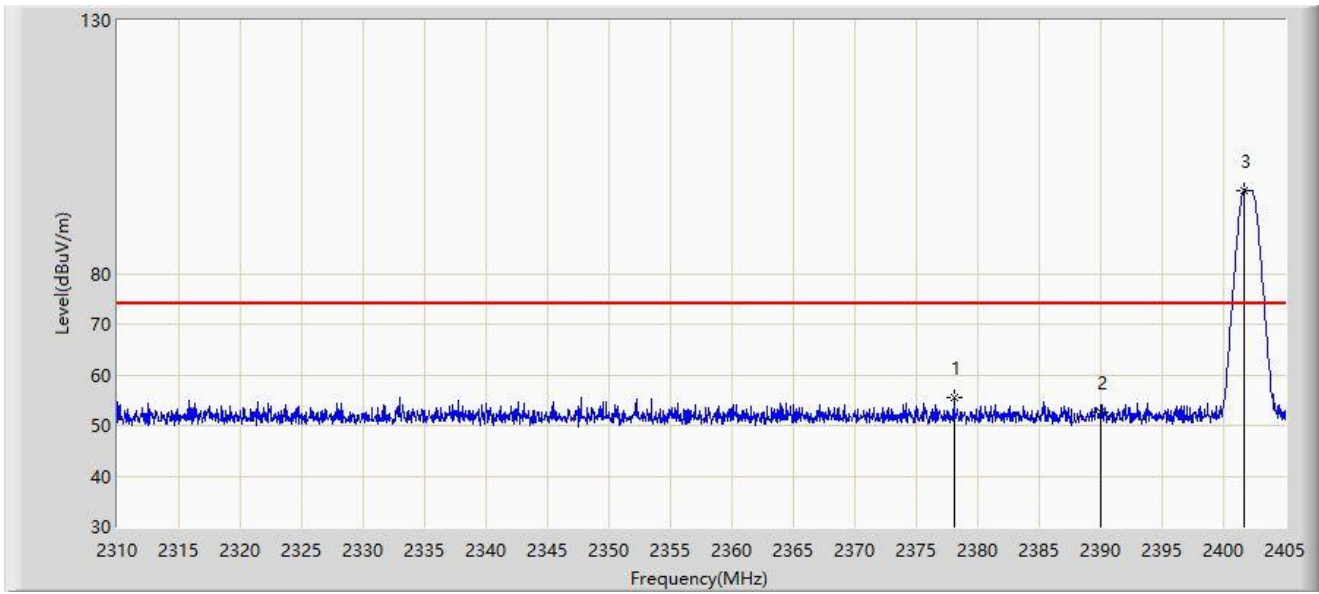


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2378.067	55.518	24.334	-18.482	74.000	31.185	PK
2		2390.000	52.681	21.523	-21.319	74.000	31.158	PK
3		2401.675	96.459	65.307	N/A	N/A	31.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2402MHz for Top Antenna	

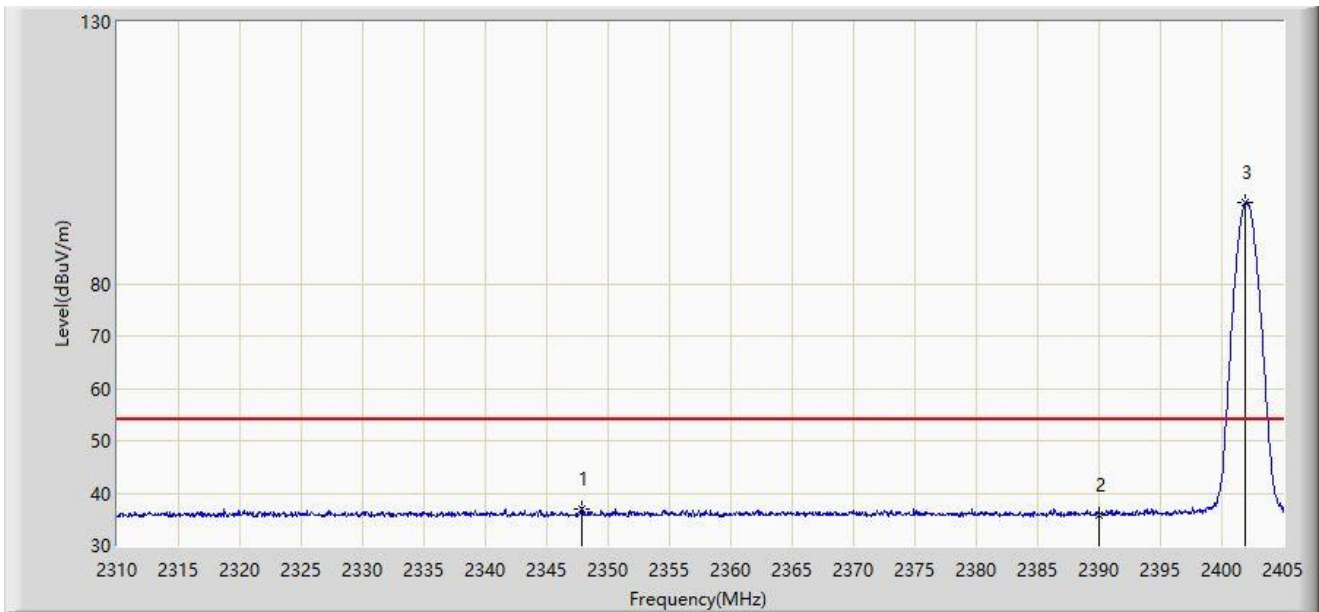


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2347.857	37.089	5.714	-16.911	54.000	31.375	AV
2		2390.000	35.788	4.630	-18.212	54.000	31.158	AV
3		2401.960	95.427	64.275	N/A	N/A	31.152	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2480MHz for Top Antenna	

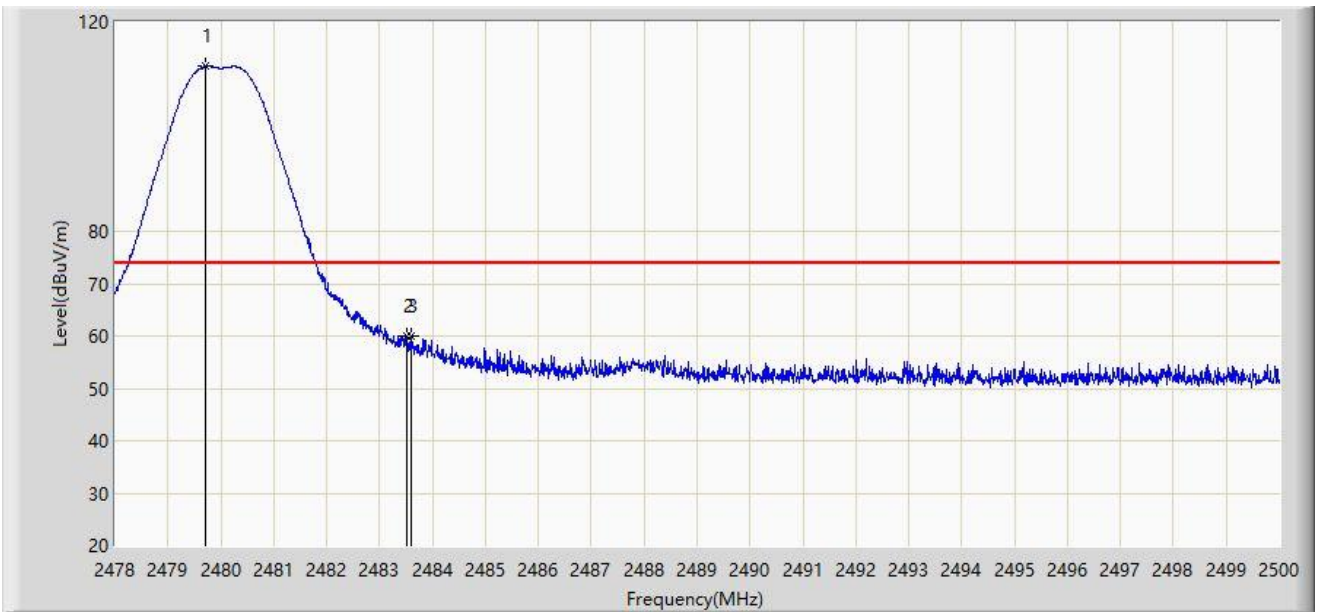

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.705	111.466	80.376	N/A	N/A	31.089	PK
2		2483.500	60.002	28.909	-13.998	74.000	31.093	PK
3	*	2483.610	60.143	28.917	-13.857	74.000	31.226	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2480MHz for Top Antenna	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.903	110.293	79.203	N/A	N/A	31.090	AV
2	*	2483.500	47.046	15.953	-6.954	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2480MHz for Top Antenna	

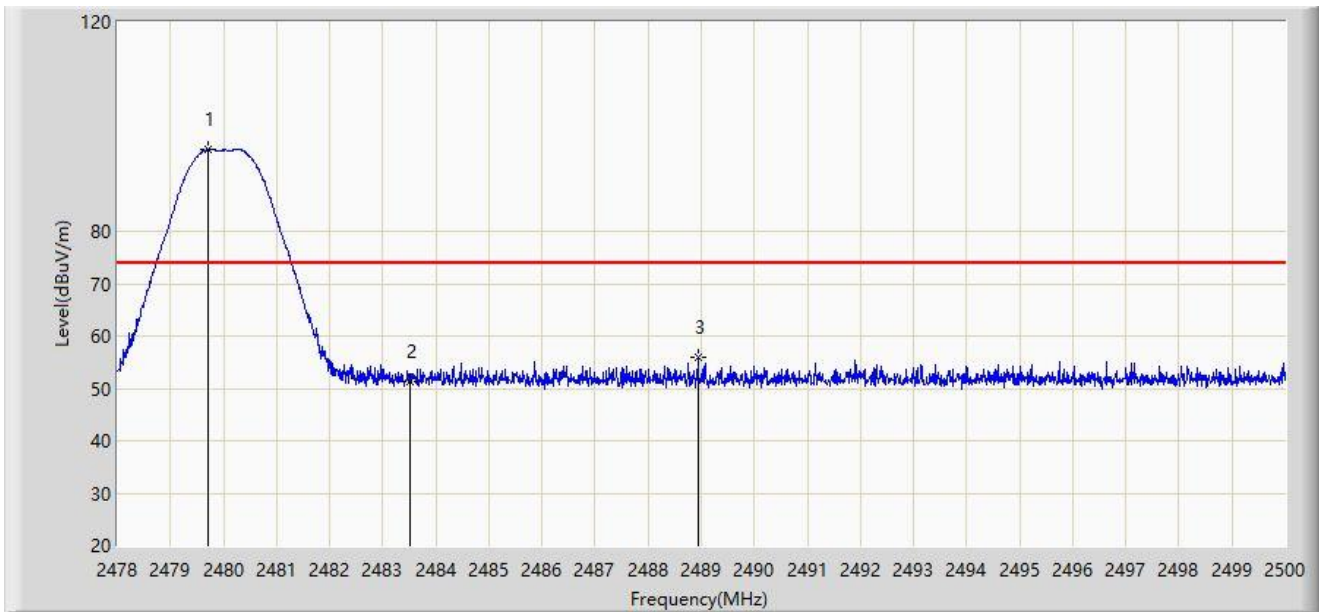


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.705	95.628	64.538	N/A	N/A	31.089	PK
2		2483.500	51.368	20.275	-22.632	74.000	31.093	PK
3	*	2488.934	55.872	24.642	-18.128	74.000	31.230	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2480MHz for Top Antenna	

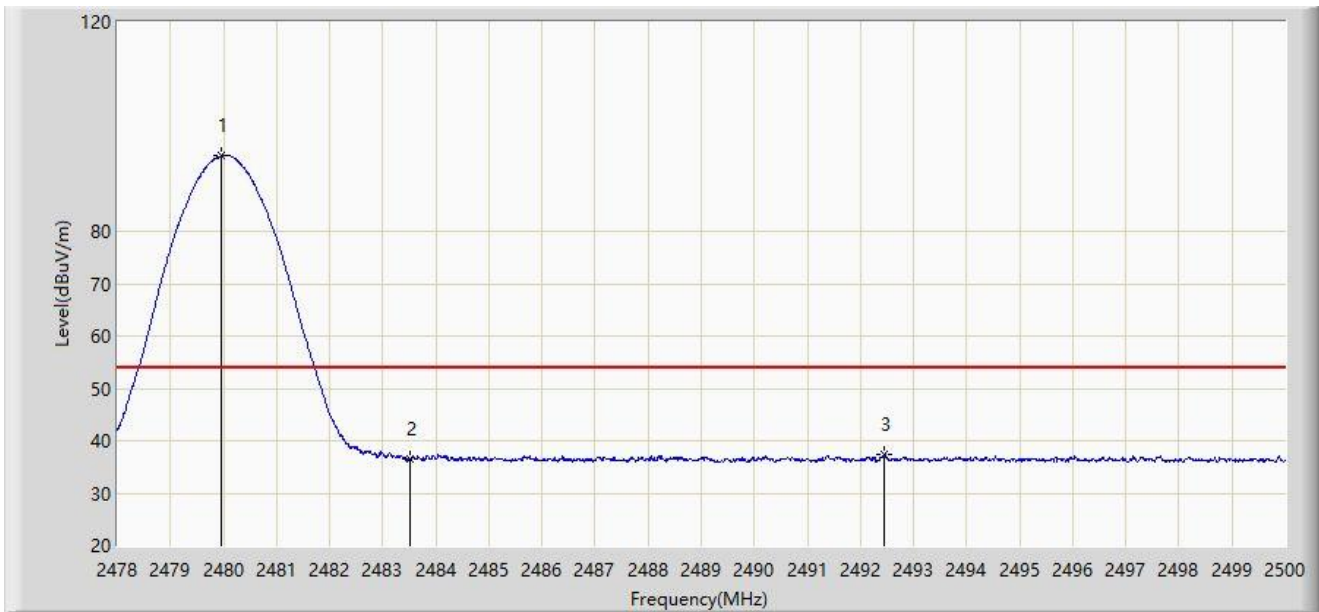


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.958	94.388	63.298	N/A	N/A	31.090	AV
2		2483.500	36.523	5.430	-17.477	54.000	31.093	AV
3	*	2492.454	37.293	6.060	-16.707	54.000	31.233	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-15
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2404MHz for Top Antenna	

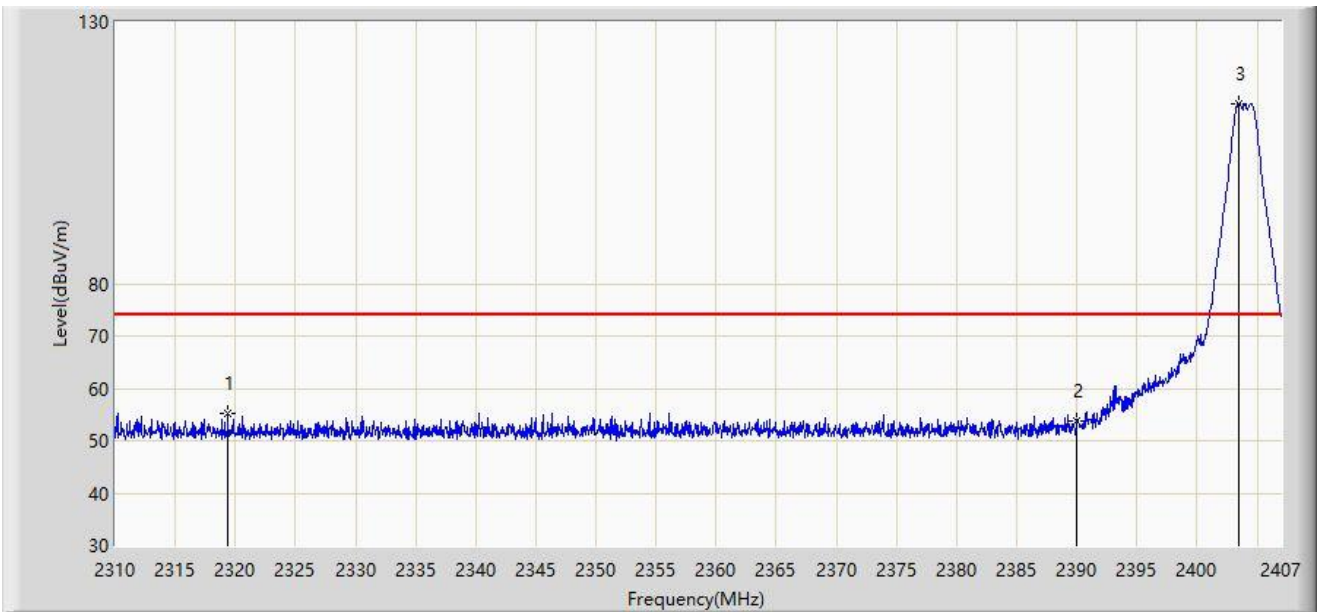


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2319.361	55.235	23.777	-18.765	74.000	31.458	PK
2		2390.000	53.875	22.717	-20.125	74.000	31.158	PK
3		2403.459	114.321	83.172	N/A	N/A	31.149	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2404MHz for Top Antenna	

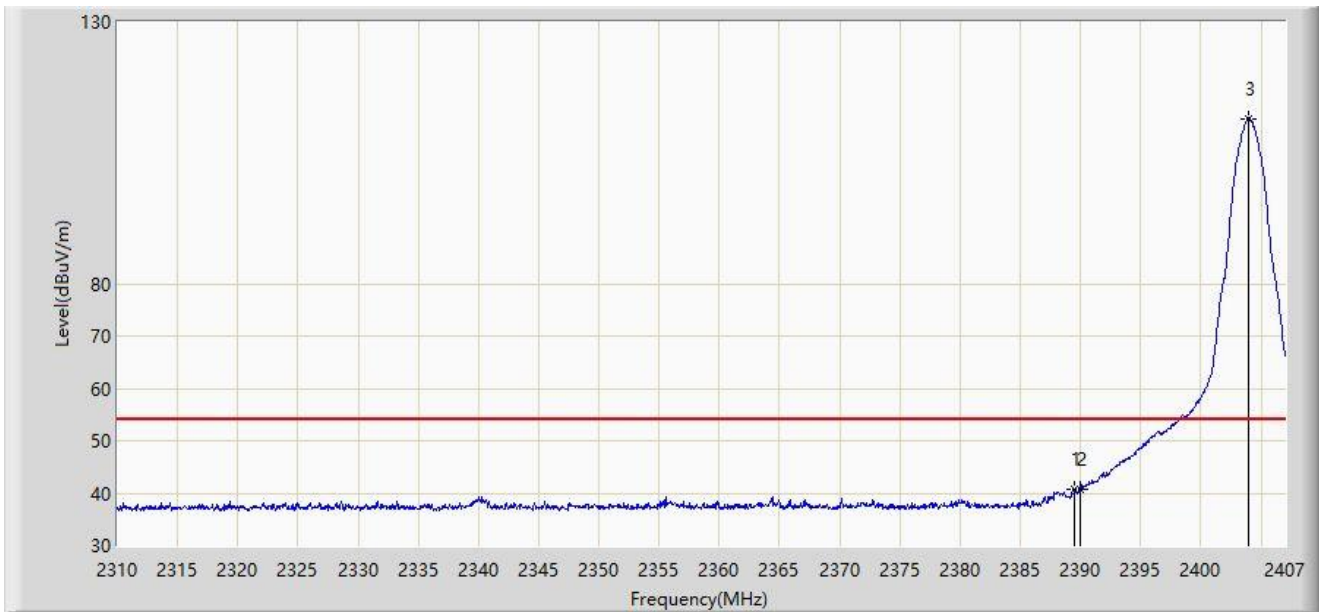


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.540	40.644	9.390	-13.356	54.000	31.254	AV
2		2390.000	40.594	9.436	-13.406	54.000	31.158	AV
3		2403.945	111.543	80.395	N/A	N/A	31.149	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2404MHz for Top Antenna	

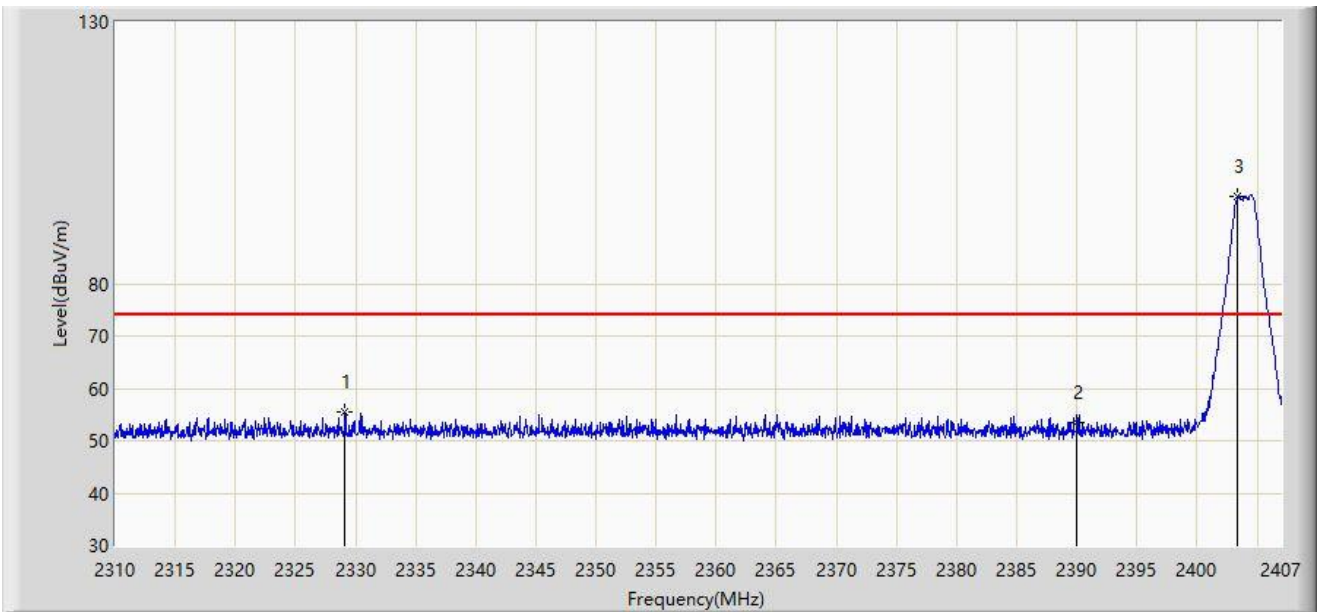


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2329.109	55.476	24.046	-18.524	74.000	31.430	PK
2		2390.000	53.565	22.407	-20.435	74.000	31.158	PK
3		2403.411	96.654	65.505	N/A	N/A	31.149	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2404MHz for Top Antenna	

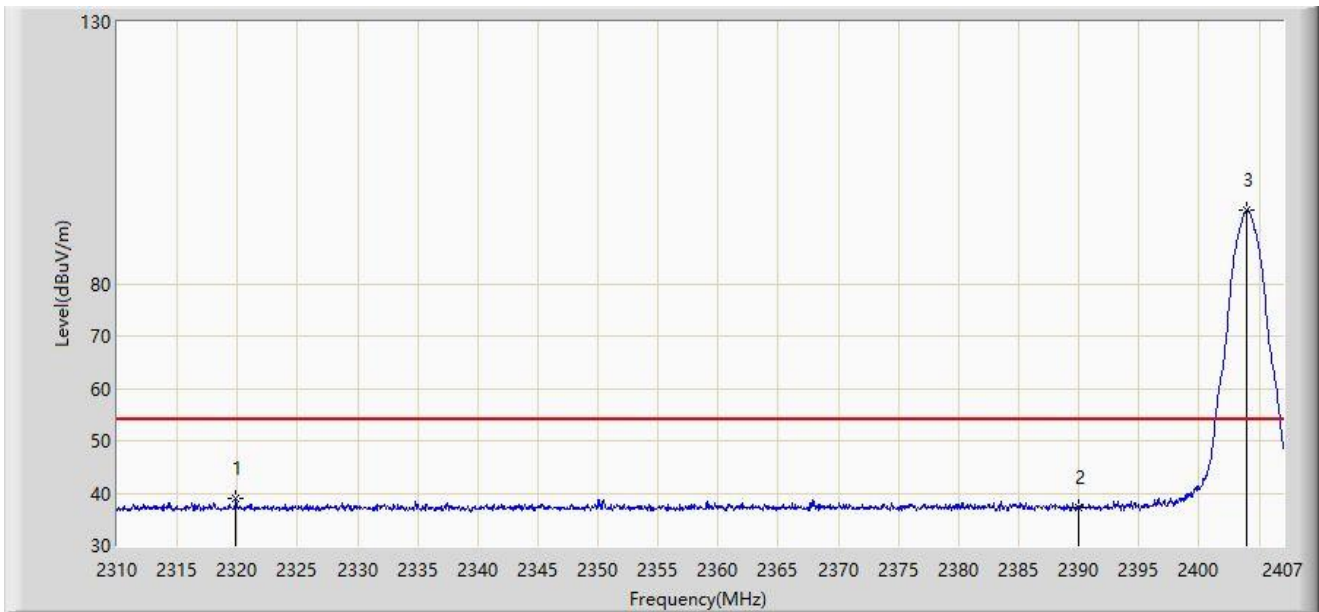


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2319.845	38.950	7.494	-15.050	54.000	31.456	AV
2		2390.000	37.206	6.048	-16.794	54.000	31.158	AV
3		2403.945	93.987	62.839	N/A	N/A	31.149	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Top Antenna	

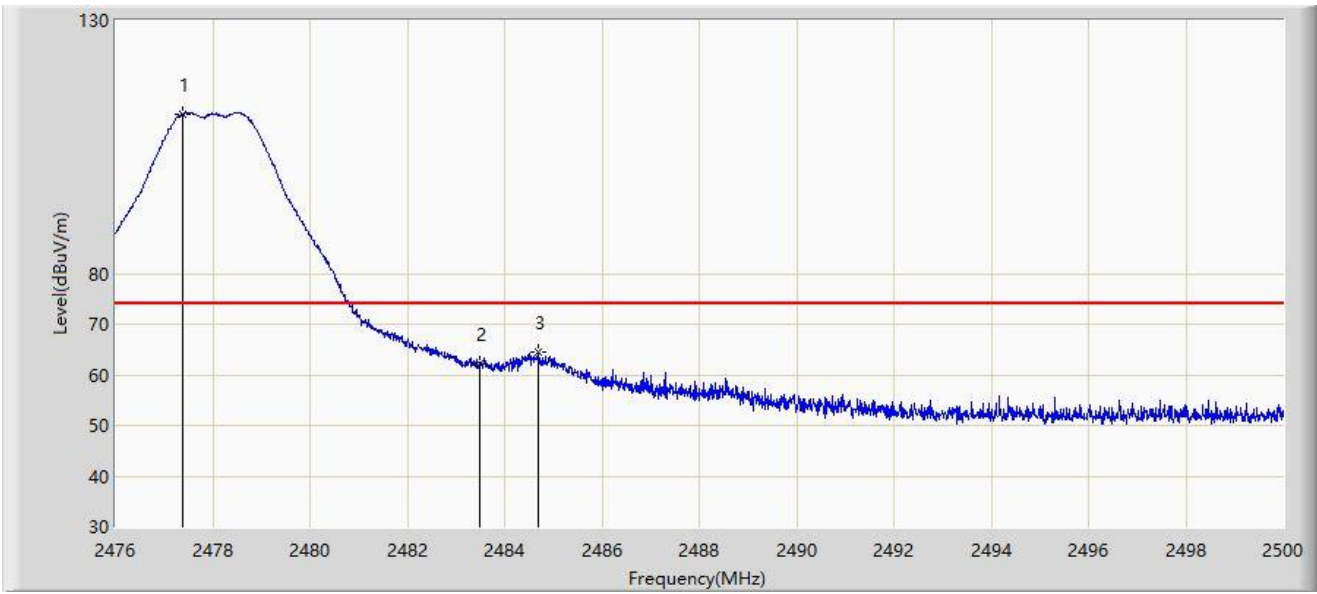


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2477.392	111.581	80.493	N/A	N/A	31.089	PK
2		2483.500	62.150	31.057	-11.850	74.000	31.093	PK
3	*	2484.688	64.430	33.336	-9.570	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Top Antenna	

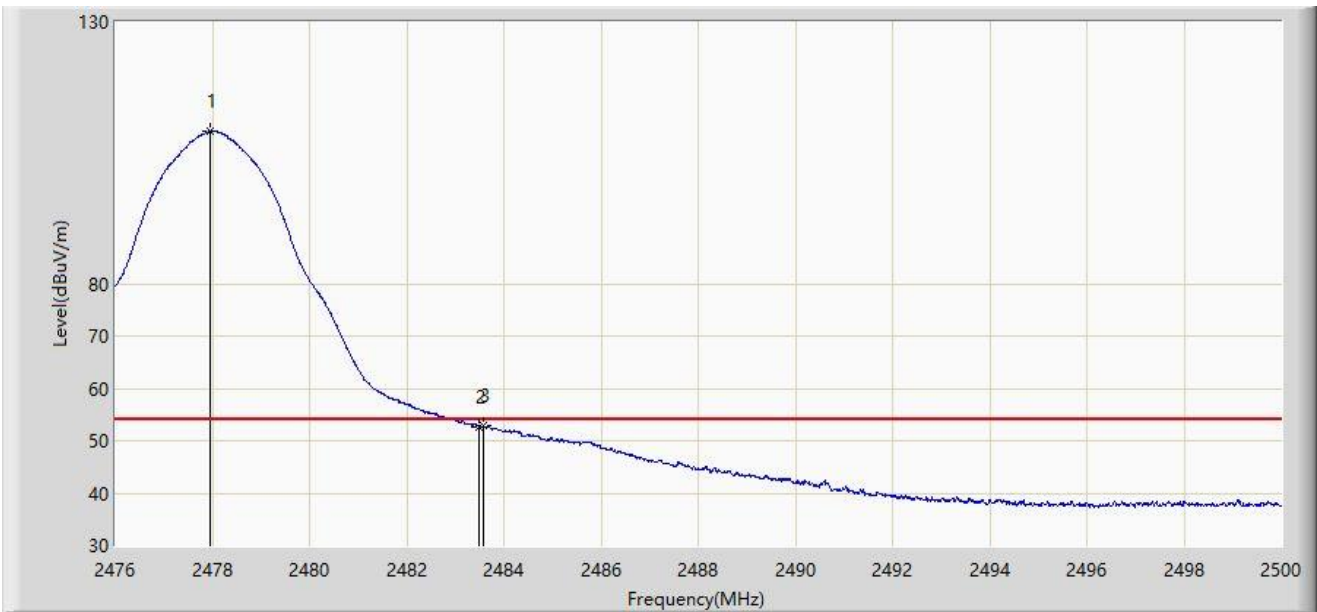


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2477.956	109.044	77.955	N/A	N/A	31.088	AV
2		2483.500	52.643	21.550	-1.357	54.000	31.093	AV
3	*	2483.572	52.765	21.539	-1.235	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Top Antenna	

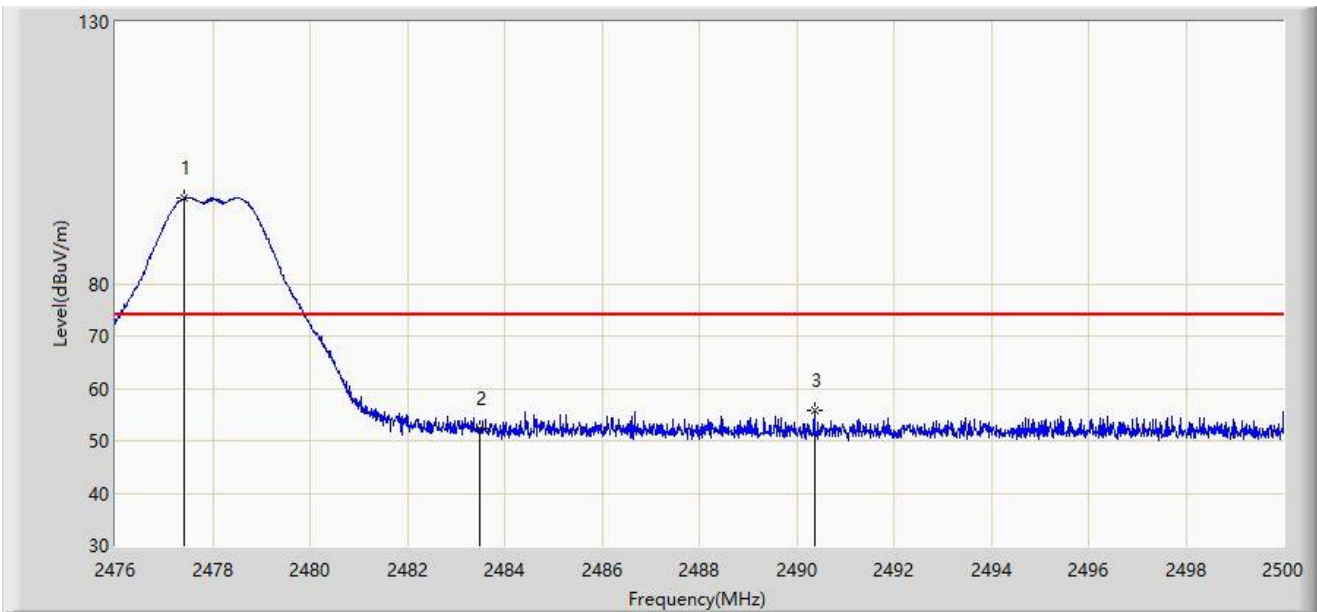


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2477.428	96.319	65.231	N/A	N/A	31.089	PK
2		2483.500	52.198	21.105	-21.802	74.000	31.093	PK
3	*	2490.364	55.934	24.703	-18.066	74.000	31.231	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Top Antenna	

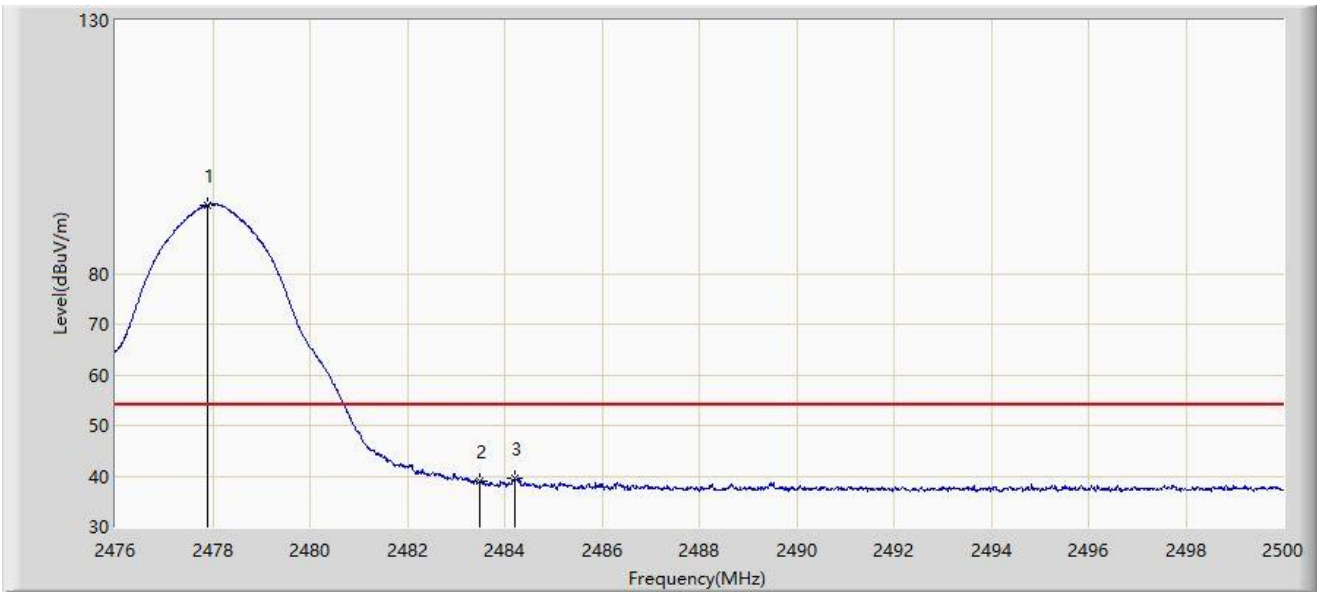


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2477.884	93.537	62.449	N/A	N/A	31.088	AV
2		2483.500	39.050	7.957	-14.950	54.000	31.093	AV
3	*	2484.220	39.476	8.383	-14.524	54.000	31.094	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz for Side Antenna	

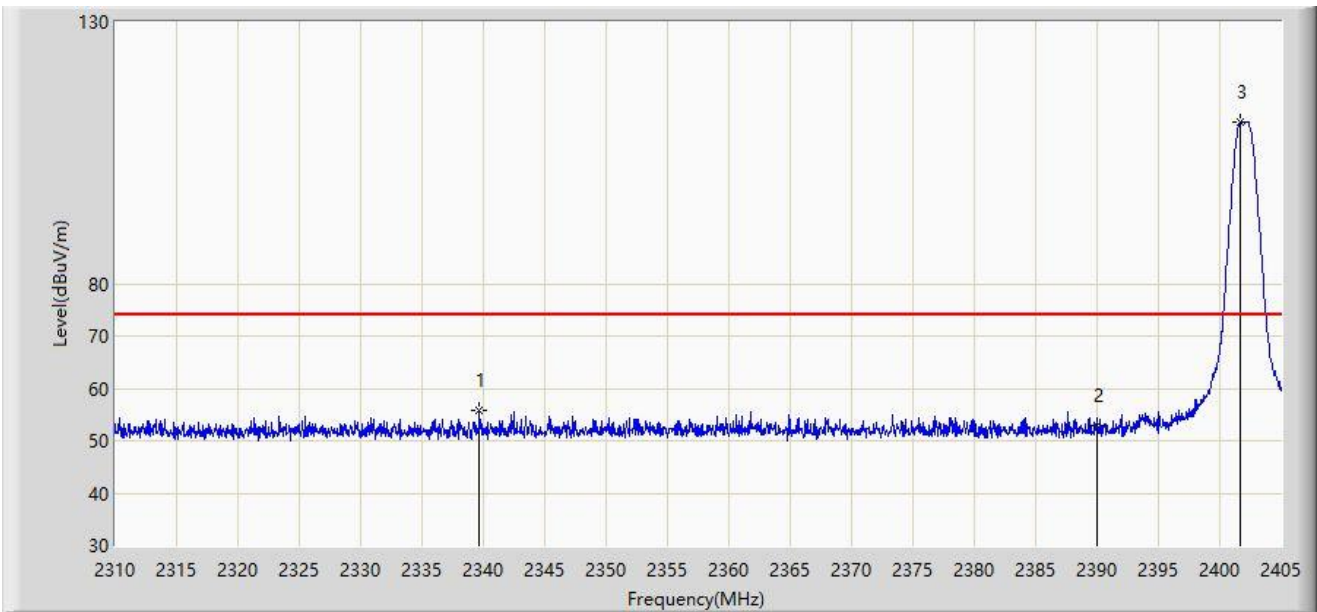


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2339.687	55.672	24.271	-18.328	74.000	31.402	PK
2		2390.000	52.849	21.691	-21.151	74.000	31.158	PK
3		2401.675	110.932	79.780	N/A	N/A	31.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz for Side Antenna	

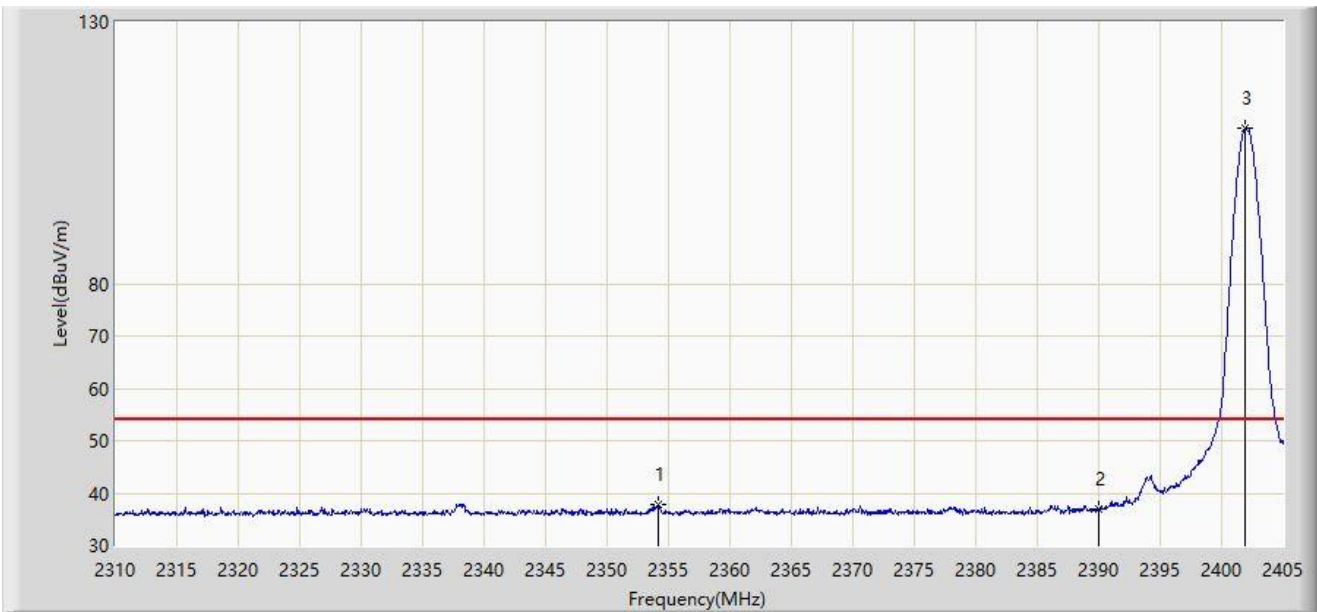


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2354.127	37.931	6.577	-16.069	54.000	31.354	AV
2		2390.000	36.866	5.708	-17.134	54.000	31.158	AV
3		2401.960	109.697	78.545	N/A	N/A	31.152	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz for Side Antenna	

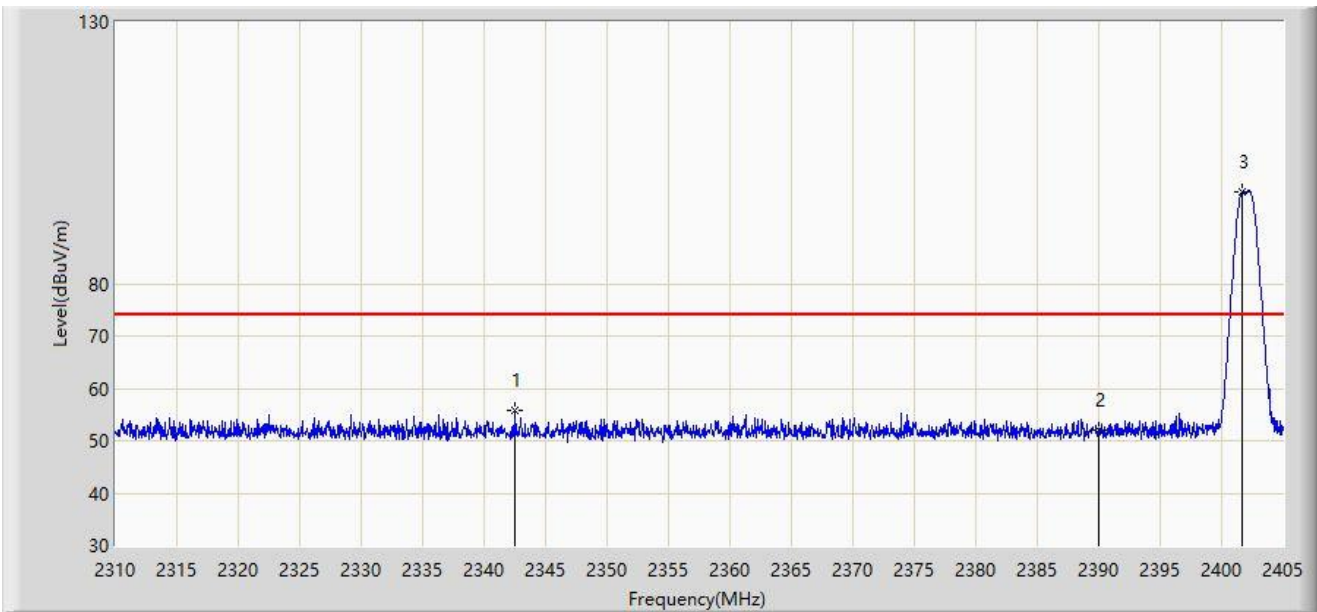


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2342.538	55.938	24.545	-18.062	74.000	31.393	PK
2		2390.000	52.087	20.833	-21.913	74.000	31.254	PK
3		2401.675	97.560	66.408	N/A	N/A	31.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2402MHz for Side Antenna	

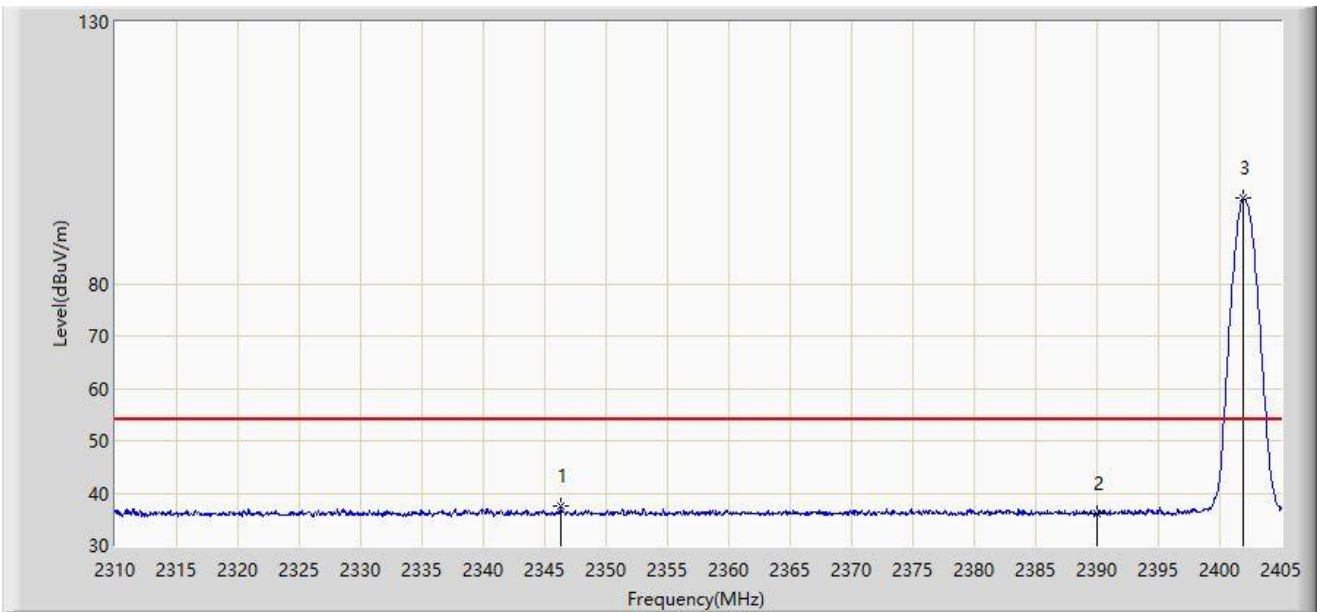


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2346.290	37.622	6.242	-16.378	54.000	31.381	AV
2		2390.000	36.022	4.864	-17.978	54.000	31.158	AV
3		2401.913	96.385	65.233	N/A	N/A	31.152	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz for Side Antenna	

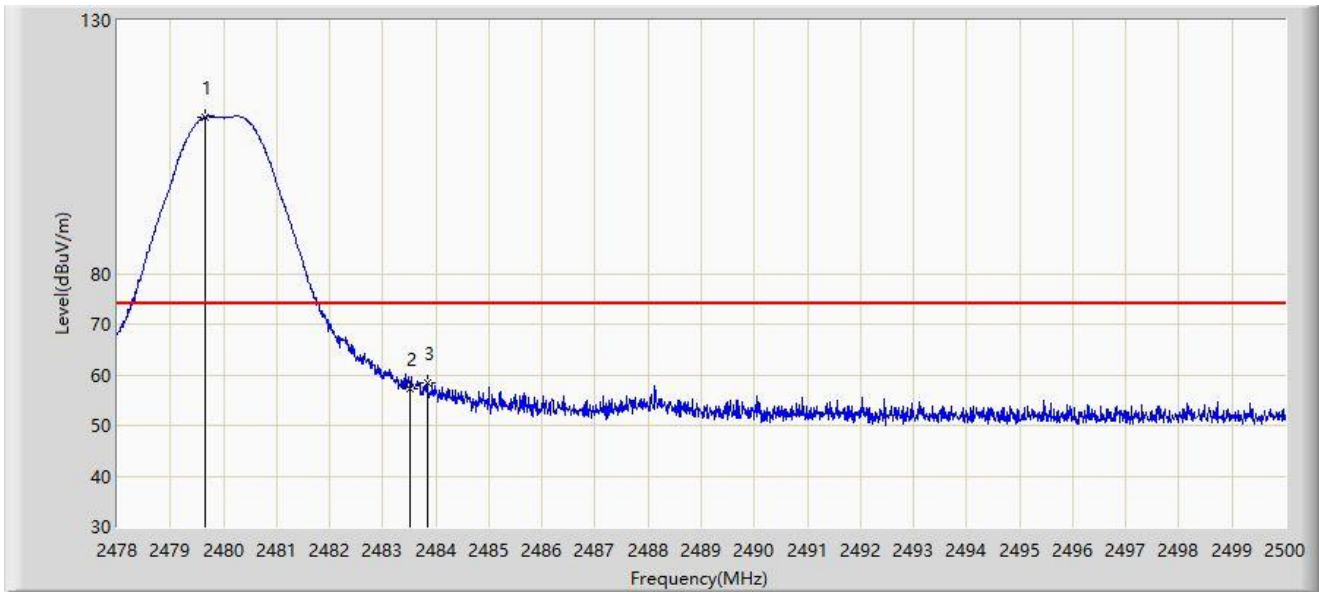


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.650	110.916	79.827	N/A	N/A	31.089	PK
2		2483.500	57.338	26.245	-16.662	74.000	31.093	PK
3	*	2483.841	58.502	27.409	-15.498	74.000	31.093	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz for Side Antenna	

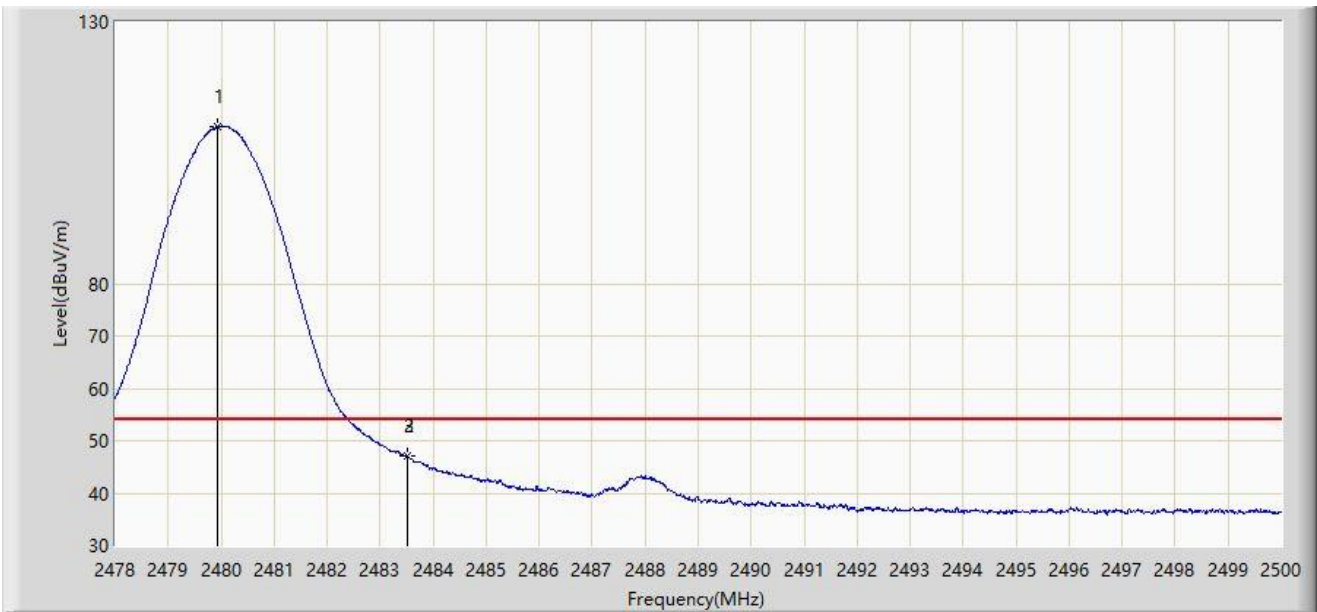


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.925	109.994	78.904	N/A	N/A	31.090	AV
2		2483.500	47.089	15.996	-6.911	54.000	31.093	AV
3	*	2483.511	47.105	15.879	-6.895	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz for Side Antenna	

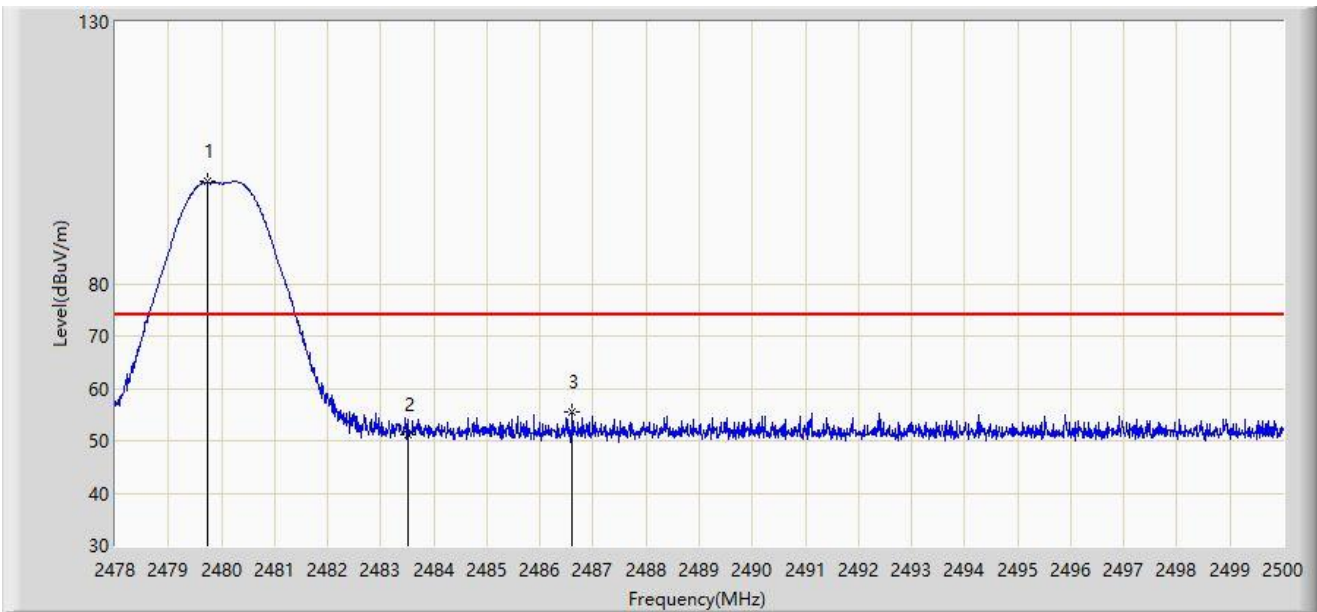

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.738	99.440	68.350	N/A	N/A	31.089	PK
2		2483.500	51.052	19.959	-22.948	74.000	31.093	PK
3	*	2486.613	55.429	24.200	-18.571	74.000	31.229	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at 2480MHz for Side Antenna	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.936	98.523	67.433	N/A	N/A	31.090	AV
2	*	2483.500	37.561	6.468	-16.439	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2402MHz for Side Antenna	

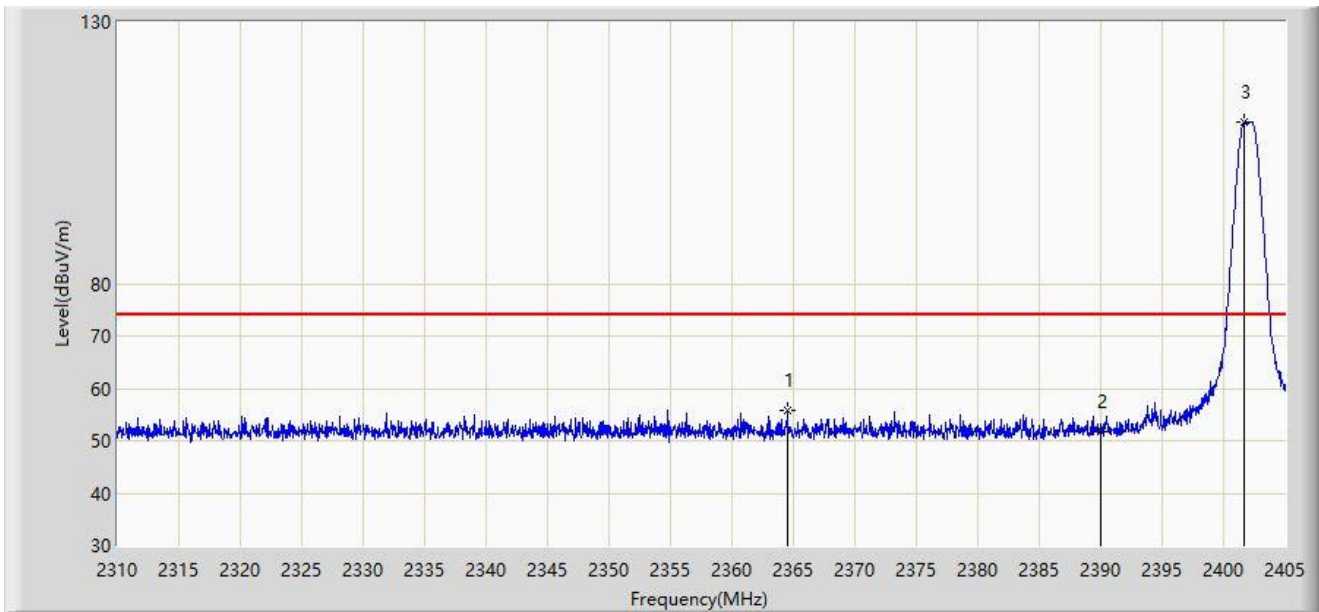

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2364.530	55.709	24.383	-18.291	74.000	31.326	PK
2		2390.000	51.873	20.715	-22.127	74.000	31.158	PK
3		2401.722	110.949	79.797	N/A	N/A	31.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2402MHz for Side Antenna	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2338.167	38.083	6.678	-15.917	54.000	31.405	AV
2		2390.000	36.789	5.631	-17.211	54.000	31.158	AV
3		2401.913	109.790	78.638	N/A	N/A	31.152	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2402MHz for Side Antenna	

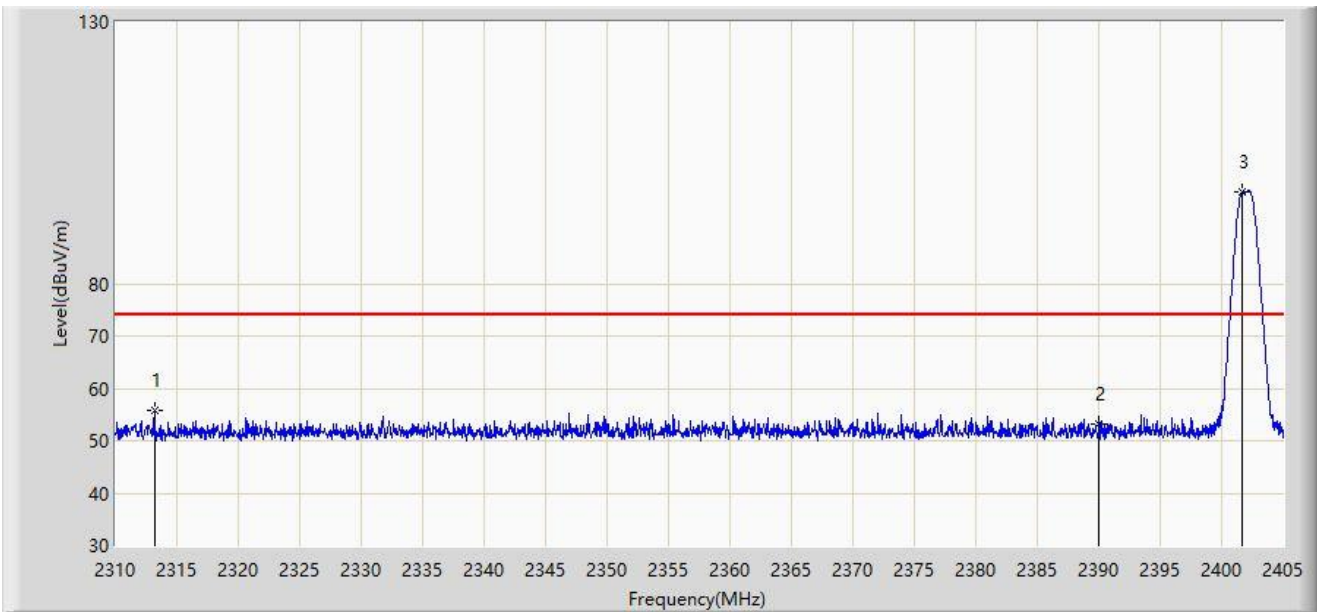


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2313.183	55.843	24.368	-18.157	74.000	31.474	PK
2		2390.000	53.329	22.171	-20.671	74.000	31.158	PK
3		2401.675	97.635	66.483	N/A	N/A	31.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2402MHz for Side Antenna	

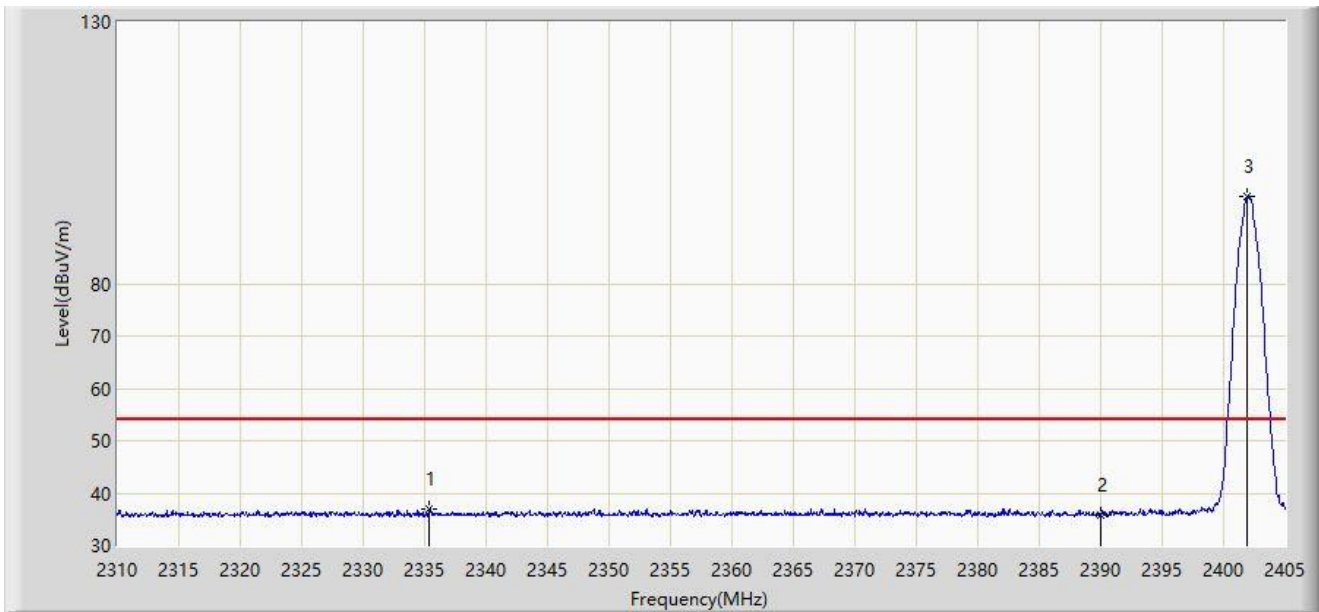


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2335.413	37.017	5.604	-16.983	54.000	31.413	AV
2		2390.000	35.741	4.583	-18.259	54.000	31.158	AV
3		2401.960	96.710	65.558	N/A	N/A	31.152	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2480MHz for Side Antenna	

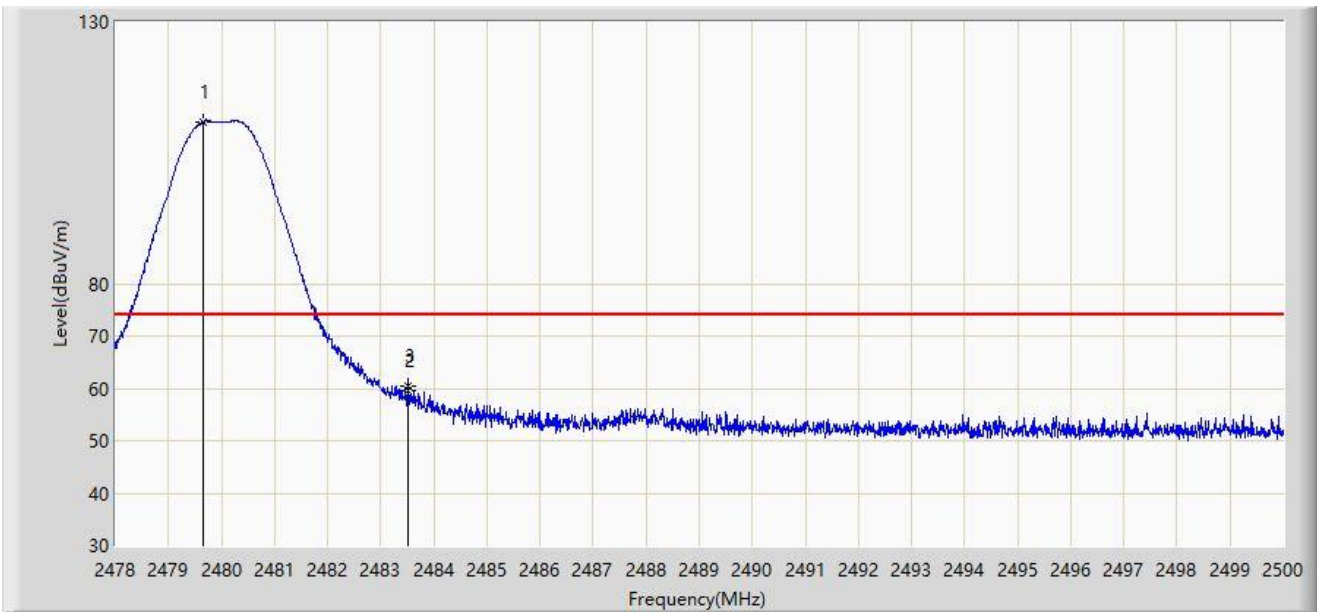


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.650	110.949	79.860	N/A	N/A	31.089	PK
2		2483.500	59.586	28.493	-14.414	74.000	31.093	PK
3	*	2483.511	60.401	29.175	-13.599	74.000	31.226	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2480MHz for Side Antenna	

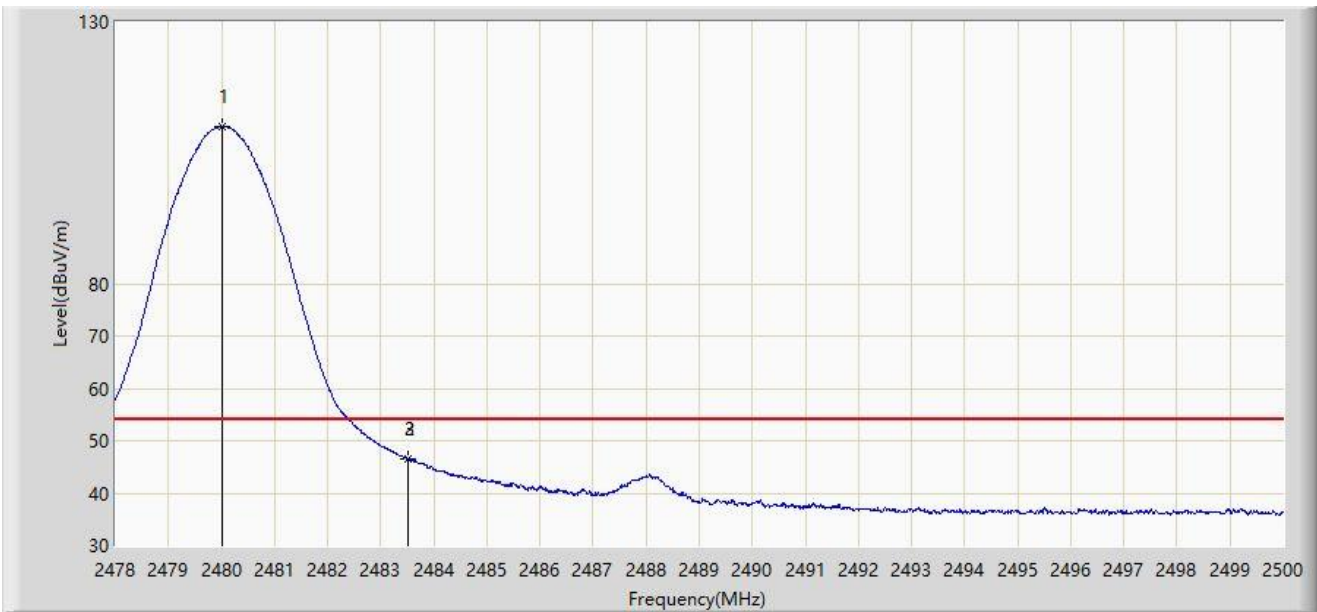


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.002	109.979	78.889	N/A	N/A	31.090	AV
2		2483.500	46.534	15.441	-7.466	54.000	31.093	AV
3	*	2483.522	46.558	15.332	-7.442	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2480MHz for Side Antenna	

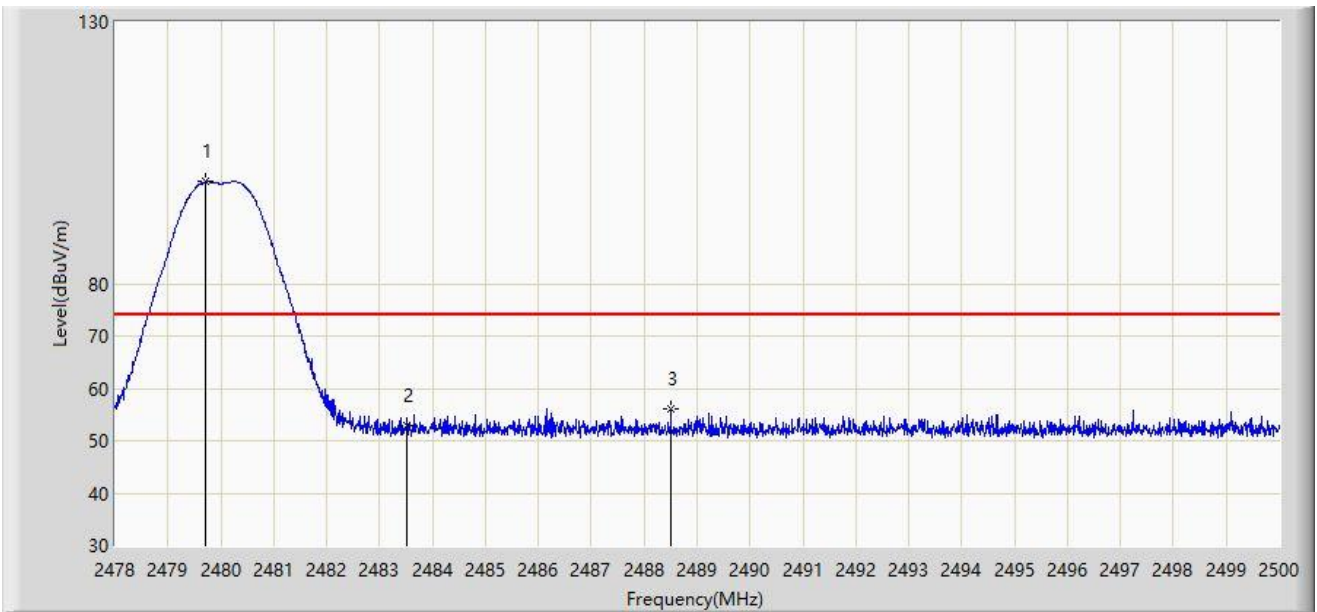


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.716	99.439	68.349	N/A	N/A	31.089	PK
2		2483.500	52.814	21.721	-21.186	74.000	31.093	PK
3	*	2488.505	56.209	24.979	-17.791	74.000	31.230	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 1Mbps at 2480MHz for Side Antenna	

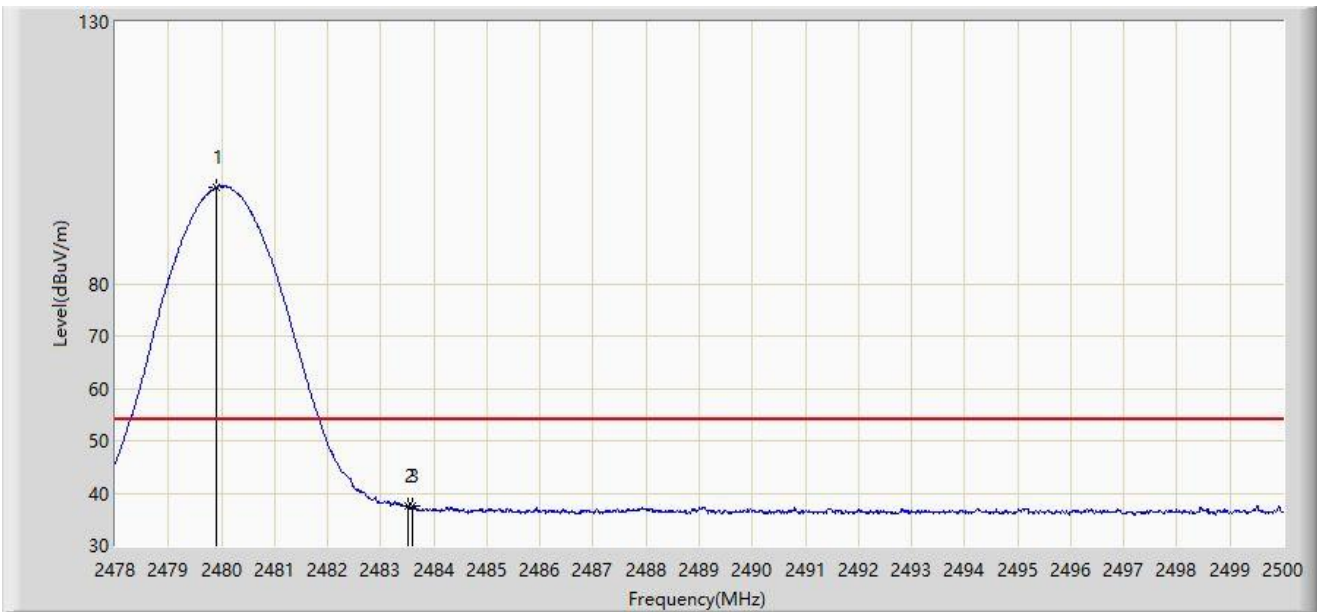


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.914	98.495	67.405	N/A	N/A	31.090	AV
2		2483.500	37.446	6.353	-16.554	54.000	31.093	AV
3	*	2483.599	37.562	6.336	-16.438	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2404MHz for Side Antenna	

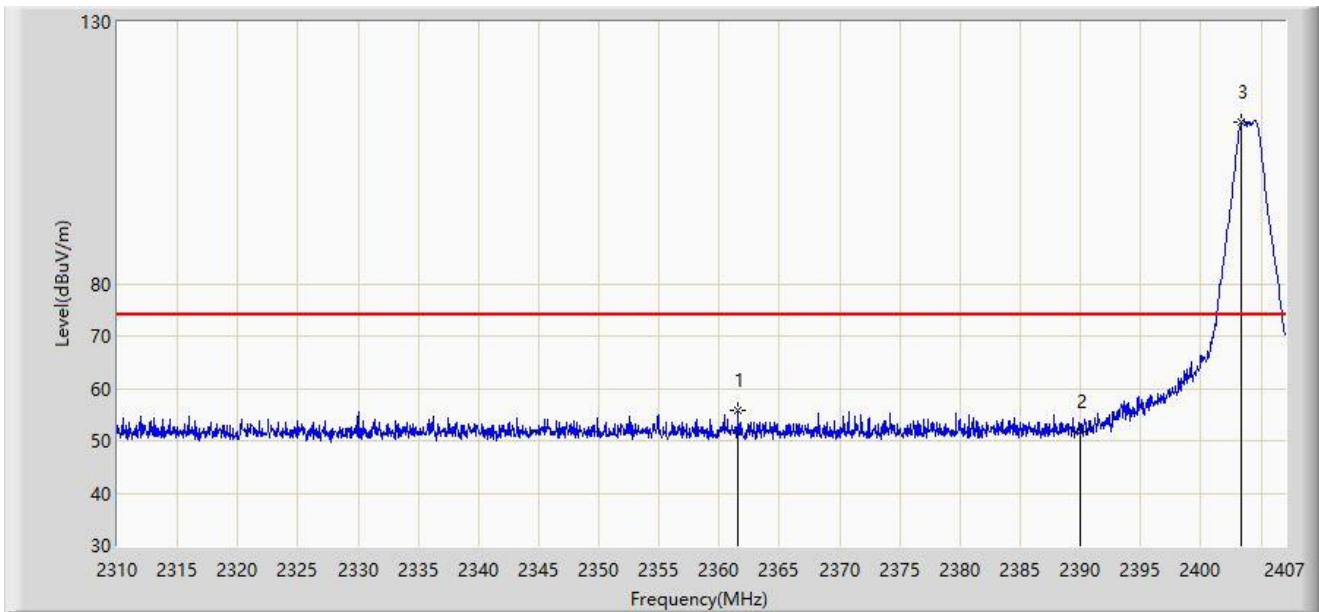


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2361.555	55.937	24.605	-18.063	74.000	31.332	PK
2		2390.000	51.607	20.449	-22.393	74.000	31.158	PK
3		2403.411	111.002	79.853	N/A	N/A	31.149	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2404MHz for Side Antenna	

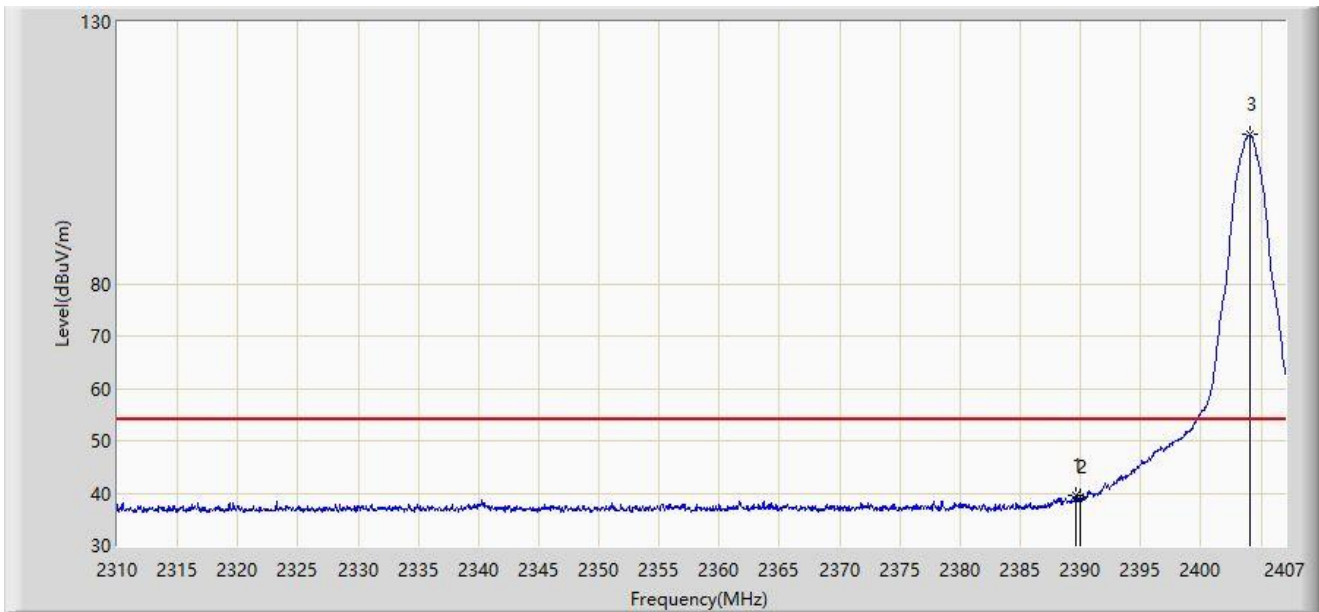


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.588	39.488	8.234	-14.512	54.000	31.254	AV
2		2390.000	39.417	8.259	-14.583	54.000	31.158	AV
3		2404.042	108.450	77.302	N/A	N/A	31.148	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2404MHz for Side Antenna	

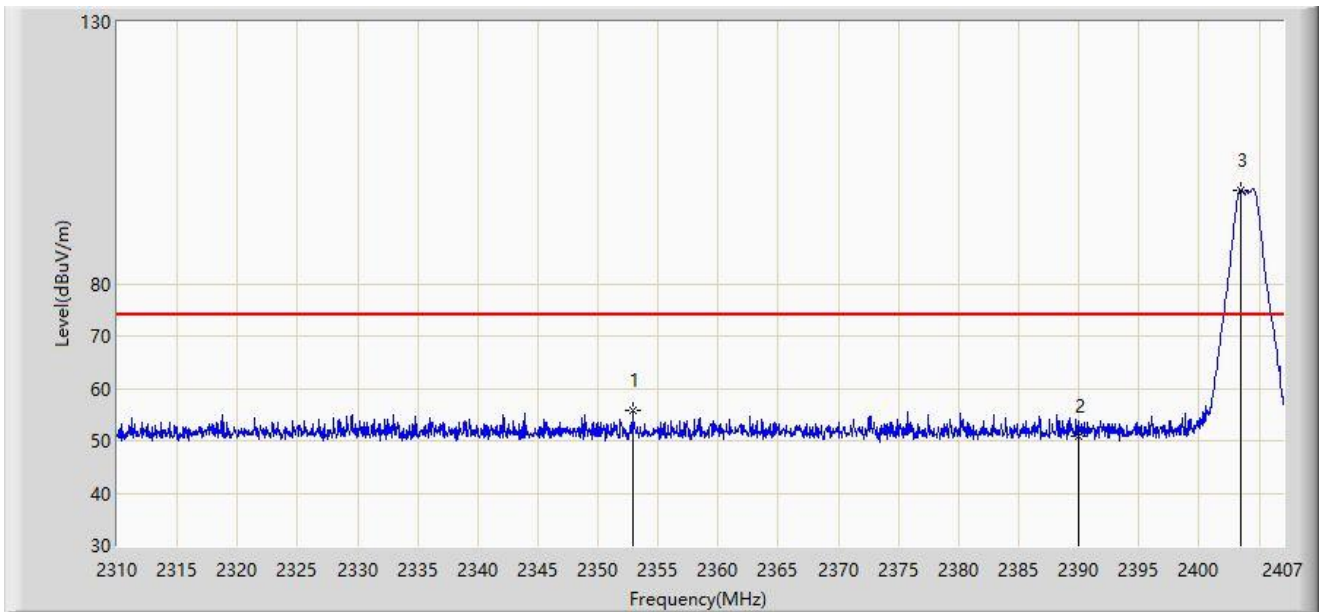


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2352.874	55.692	24.334	-18.308	74.000	31.359	PK
2		2390.000	50.812	19.654	-23.188	74.000	31.158	PK
3		2403.459	97.960	66.811	N/A	N/A	31.149	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2404MHz for Side Antenna	

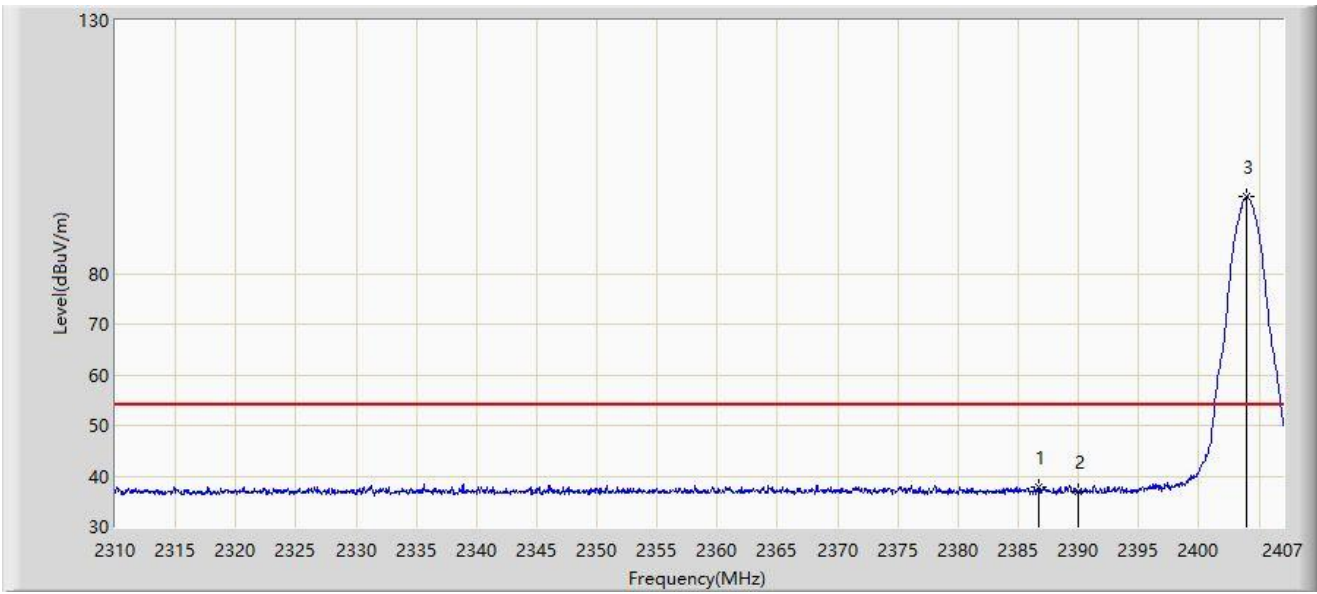


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.727	37.774	6.614	-16.226	54.000	31.160	AV
2		2390.000	37.010	5.852	-16.990	54.000	31.158	AV
3		2403.945	95.114	63.966	N/A	N/A	31.149	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Side Antenna	

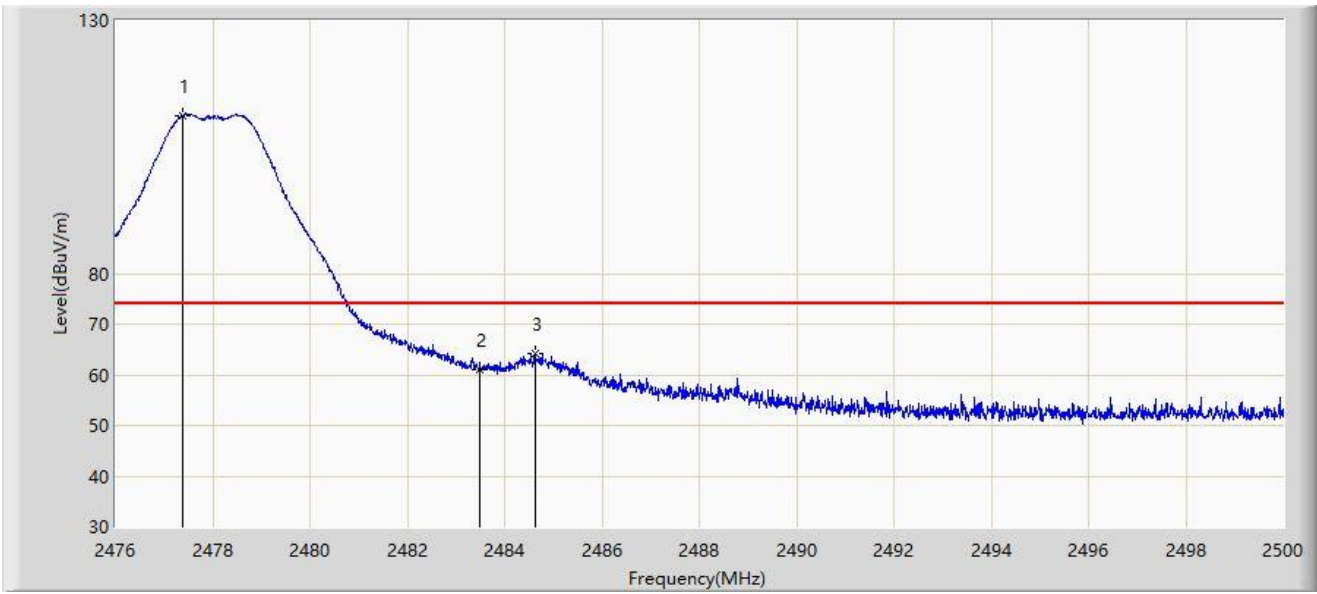


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2477.392	111.225	80.137	N/A	N/A	31.089	PK
2		2483.500	61.016	29.923	-12.984	74.000	31.093	PK
3	*	2484.628	64.317	33.223	-9.683	74.000	31.094	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Side Antenna	

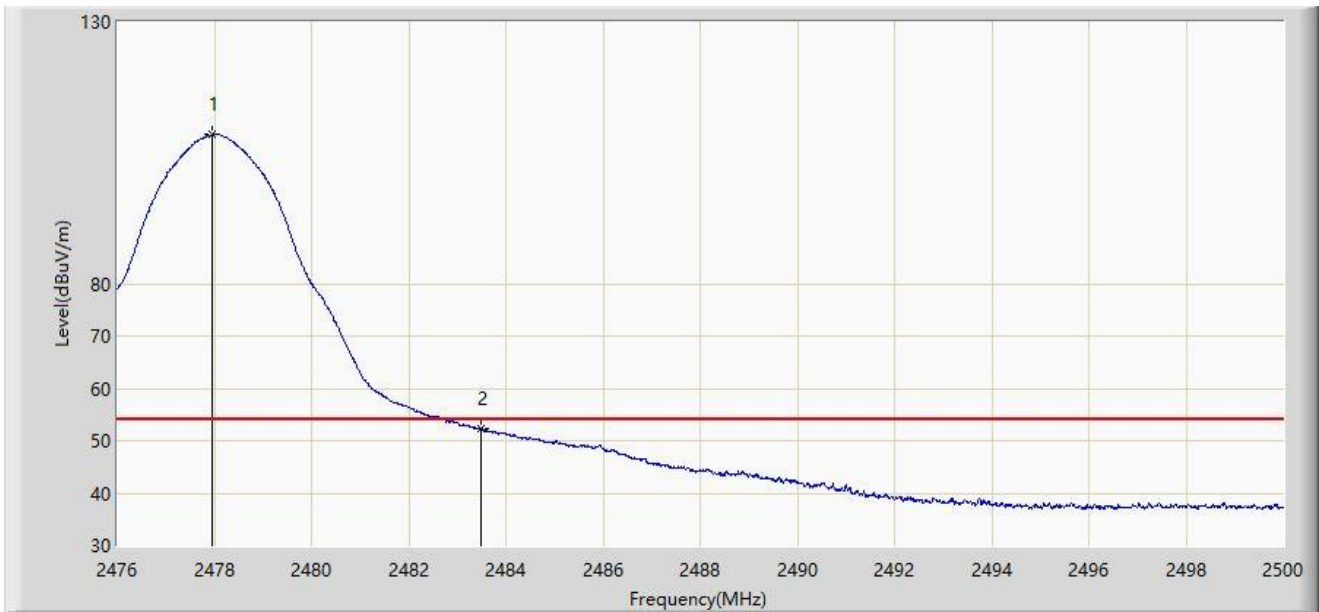


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2477.944	108.424	77.335	N/A	N/A	31.088	AV
2	*	2483.500	52.211	21.118	-1.789	54.000	31.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Side Antenna	

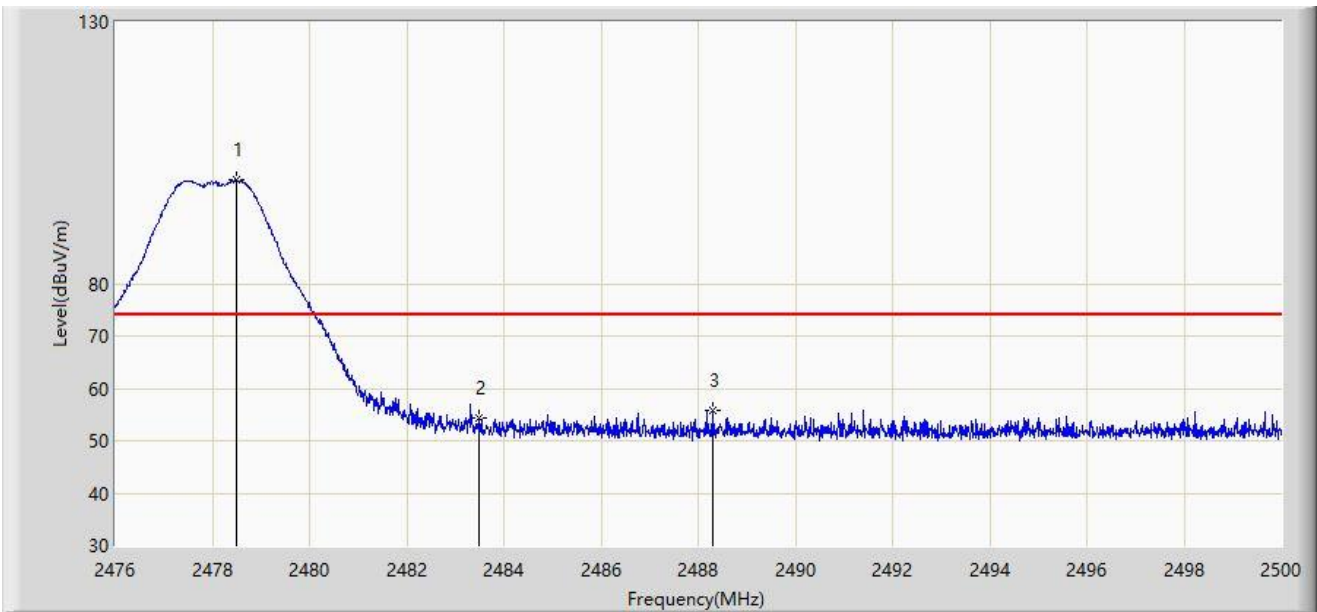


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2478.484	99.730	68.641	N/A	N/A	31.089	PK
2		2483.500	54.312	23.219	-19.688	74.000	31.093	PK
3	*	2488.300	55.816	24.586	-18.184	74.000	31.230	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-08-16
Limit: FCC_2.4G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wireless Receiver	Power: By Battery
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz for Side Antenna	

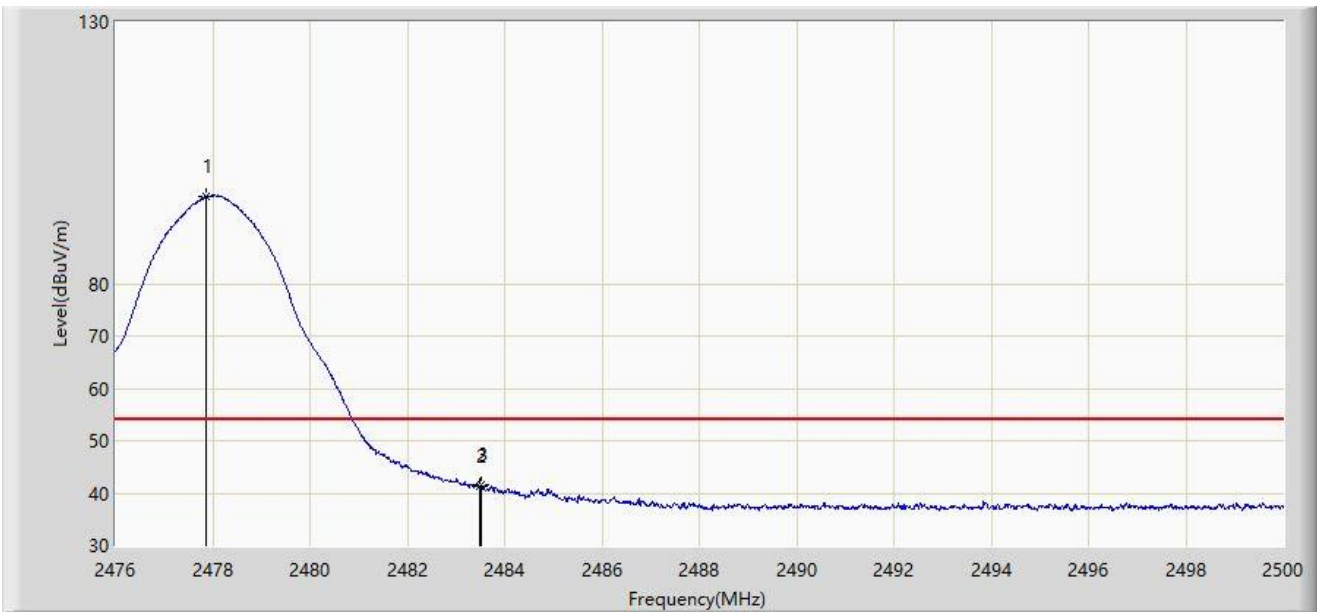

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2477.872	96.615	65.527	N/A	N/A	31.088	AV
2		2483.500	41.217	10.124	-12.783	54.000	31.093	AV
3	*	2483.512	41.613	10.387	-12.387	54.000	31.226	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Time: 2023-08-30
Temperature: 23.2°C	Humidity: 57.7%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: Wireless Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz	

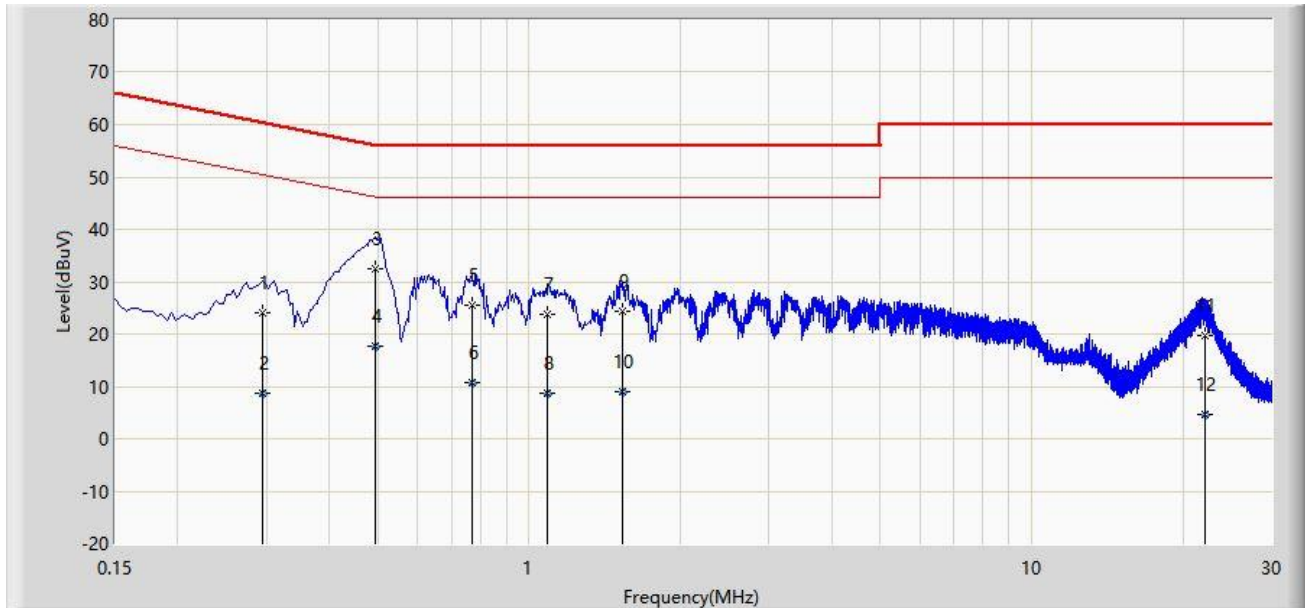


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.294	24.030	14.210	-36.380	60.411	9.821	QP
2		0.294	8.770	-1.050	-41.640	50.411	9.821	AV
3	*	0.494	32.511	22.583	-23.590	56.100	9.928	QP
4		0.494	17.576	7.648	-28.524	46.100	9.928	AV
5		0.770	25.545	15.456	-30.455	56.000	10.089	QP
6		0.770	10.639	0.550	-35.361	46.000	10.089	AV
7		1.090	23.693	13.453	-32.307	56.000	10.240	QP
8		1.090	8.555	-1.685	-37.445	46.000	10.240	AV
9		1.534	24.318	14.017	-31.682	56.000	10.301	QP
10		1.534	8.971	-1.330	-37.029	46.000	10.301	AV
11		22.098	19.816	8.217	-40.184	60.000	11.599	QP
12		22.098	4.712	-6.886	-45.288	50.000	11.599	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Time: 2023-08-30
Temperature: 23.2°C	Humidity: 57.7%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: Wireless Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Proprietary Mode 2Mbps at 2478MHz	

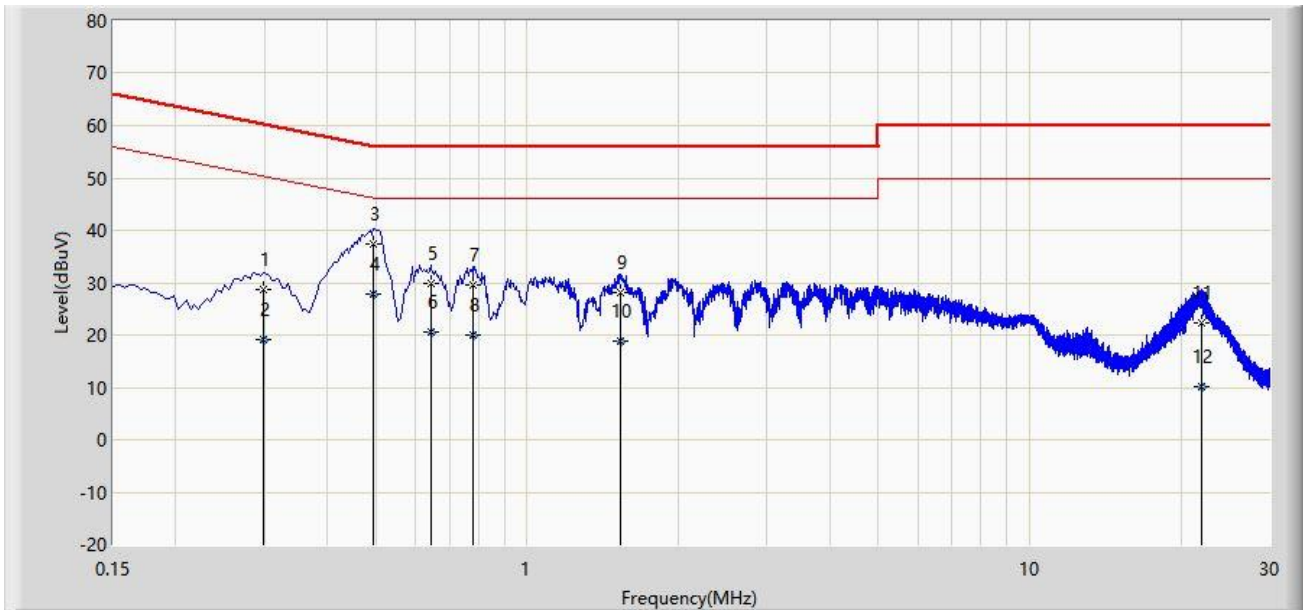

No	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1		0.298	28.596	18.767	-31.702	60.298	9.830	QP
2		0.298	19.268	9.439	-31.030	50.298	9.830	AV
3		0.494	37.396	27.458	-18.704	56.100	9.938	QP
4	*	0.494	27.802	17.864	-18.299	46.100	9.938	AV
5		0.642	29.746	19.725	-26.254	56.000	10.020	QP
6		0.642	20.490	10.469	-25.510	46.000	10.020	AV
7		0.778	29.450	19.346	-26.550	56.000	10.104	QP
8		0.778	19.936	9.832	-26.064	46.000	10.104	AV
9		1.534	27.982	17.659	-28.018	56.000	10.323	QP
10		1.534	18.742	8.418	-27.258	46.000	10.323	AV
11		22.018	22.317	10.432	-37.683	60.000	11.885	QP
12		22.018	10.012	-1.873	-39.988	50.000	11.885	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B - Test Setup Photograph

Refer to "2308RSU030-UT" file.

Appendix C - EUT Photograph

Refer to "2308RSU030-UE" file.

_____ The End _____