



## Channel 01 (2426MHz)

## 100kHz PSD Reference Level

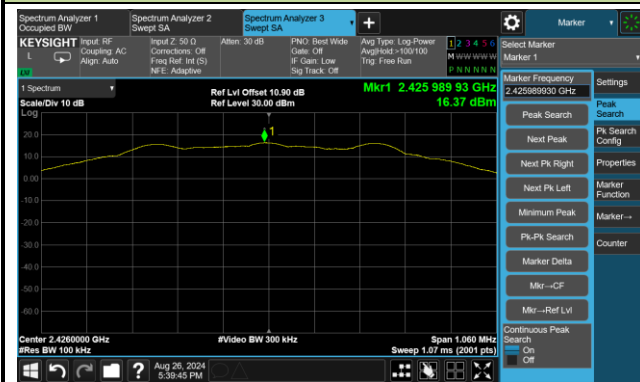


## Spurious Emission 30MHz ~ 25GHz

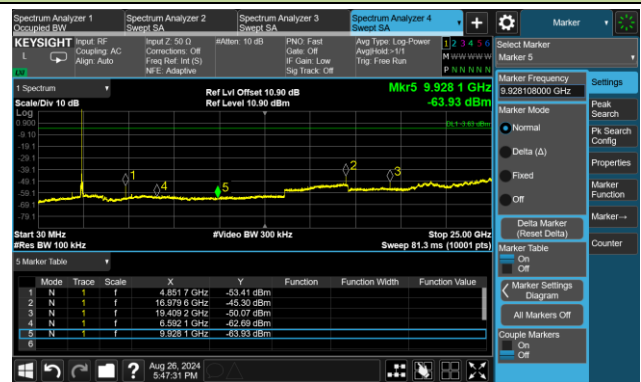


## Channel 02 (2480MHz)


## 100kHz PSD Reference Level

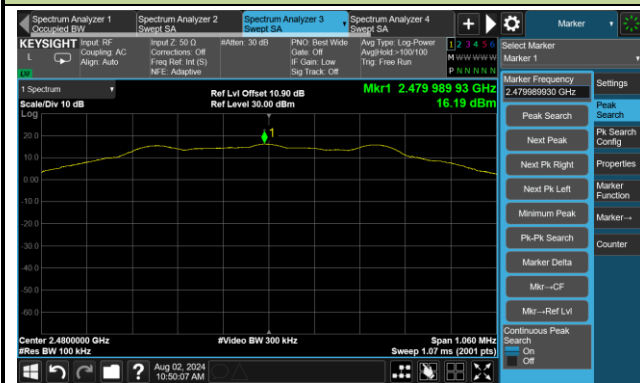

## High Band Edge

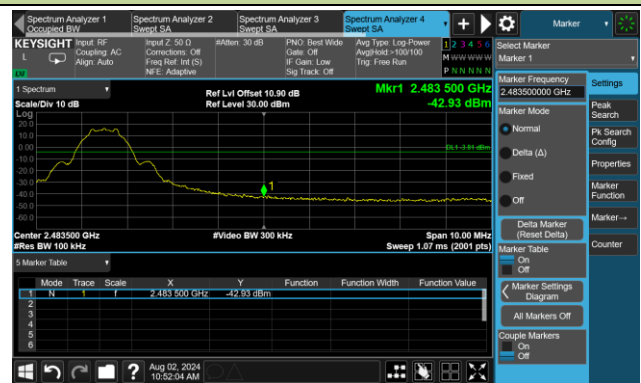


## Spurious Emission 30MHz ~ 25GHz

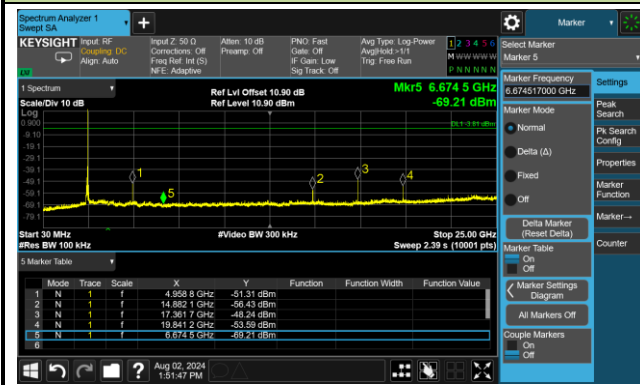

# Proprietary-2Mbps Out-of-Band Emissions

## Channel 01 (2404MHz)


### 100kHz PSD Reference Level

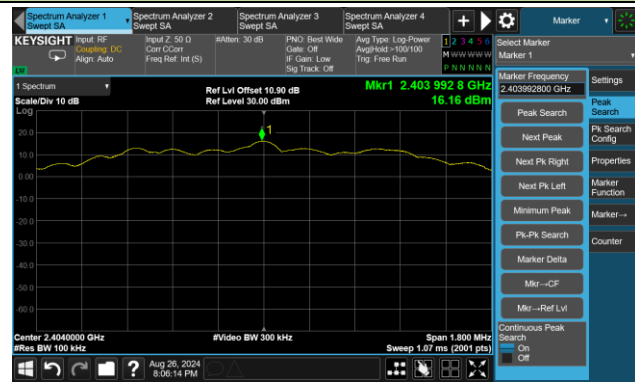

### Low Band Edge




### Spurious Emission 30MHz ~ 25GHz

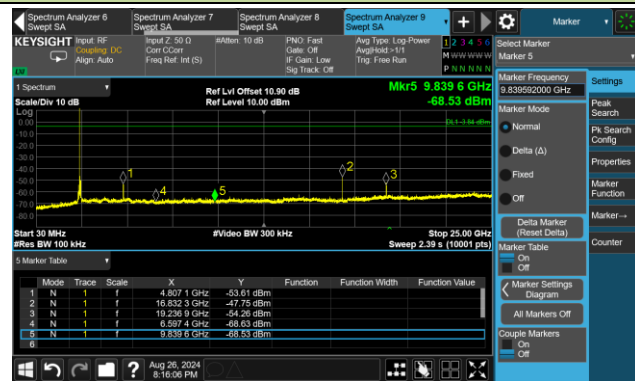


## Channel 13 (2444MHz)

### 100kHz PSD Reference Level

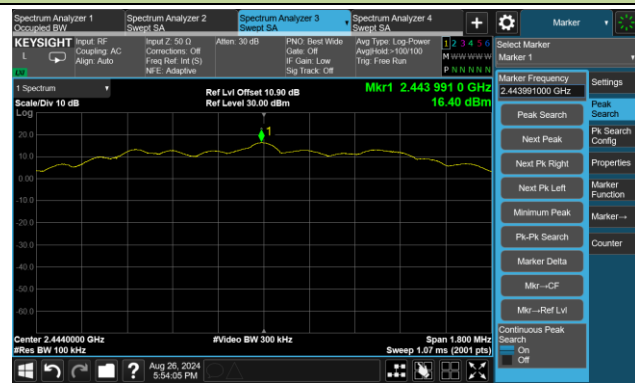


### Spurious Emission 30MHz ~ 25GHz

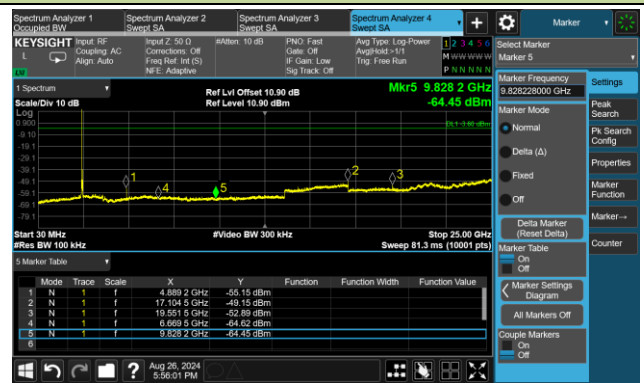

## Channel 24 (2478MHz)


### 100kHz PSD Reference Level

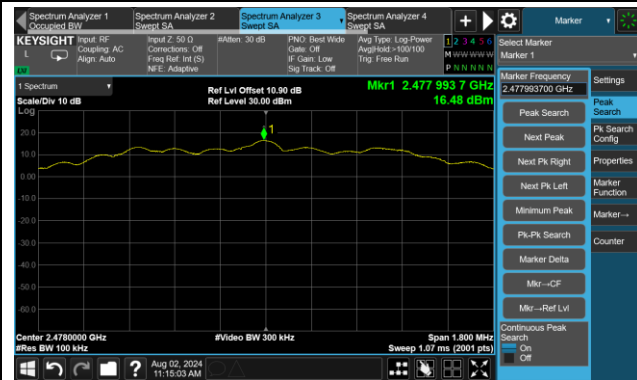

### High Band Edge



### Spurious Emission 30MHz ~ 25GHz

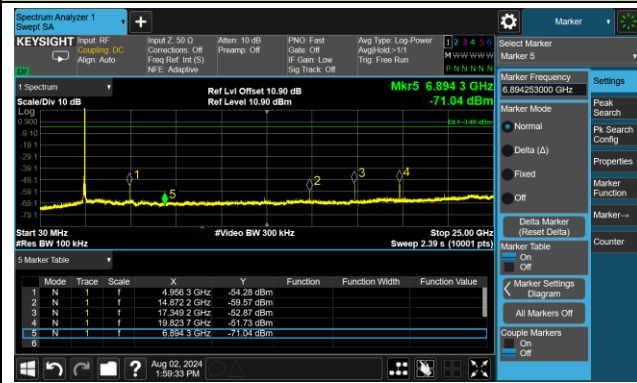

### A.6 Radiated Spurious Emission Test Result

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Test Site | WJ-AC2                                                                                                                                                                            | Test Engineer | Carl Jiang |
| Test Date | 2024-07-22                                                                                                                                                                        | Test Mode:    | BLE-1Mbps  |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 00           | 4804.600        | 43.5                 | 0.0           | 43.5                   | 74.0           | -30.5       | Peak     | Horizontal   |
|              | 11385.300       | 41.7                 | 5.5           | 47.2                   | 74.0           | -26.8       | Peak     | Horizontal   |
|              | 12109.500       | 43.4                 | 5.1           | 48.5                   | 74.0           | -25.5       | Peak     | Horizontal   |
|              | 4804.600        | 43.4                 | 0.0           | 43.4                   | 74.0           | -30.6       | Peak     | Vertical     |
|              | 11645.400       | 42.1                 | 4.9           | 47.0                   | 74.0           | -27.0       | Peak     | Vertical     |
|              | 12053.400       | 43.1                 | 5.2           | 48.3                   | 74.0           | -25.7       | Peak     | Vertical     |
| 19           | 4879.400        | 49.1                 | 0.0           | 49.1                   | 74.0           | -24.9       | Peak     | Horizontal   |
|              | 7485.500        | 40.9                 | 5.2           | 46.1                   | 74.0           | -27.9       | Peak     | Horizontal   |
|              | 11451.600       | 41.5                 | 5.3           | 46.8                   | 74.0           | -27.2       | Peak     | Horizontal   |
|              | 7320.600        | 40.5                 | 5.0           | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |
|              | 11324.100       | 40.4                 | 5.4           | 45.8                   | 74.0           | -28.2       | Peak     | Vertical     |
|              | 11650.500       | 42.1                 | 4.9           | 47.0                   | 74.0           | -27.0       | Peak     | Vertical     |
| 39           | 4959.300        | 44.3                 | 0.1           | 44.4                   | 74.0           | -29.6       | Peak     | Horizontal   |
|              | 11749.100       | 41.9                 | 4.7           | 46.6                   | 74.0           | -27.4       | Peak     | Horizontal   |
|              | 12398.500       | 45.1                 | 4.7           | 49.8                   | 74.0           | -24.2       | Peak     | Horizontal   |
|              | 7441.300        | 40.5                 | 5.0           | 45.5                   | 74.0           | -28.5       | Peak     | Vertical     |
|              | 11681.100       | 41.3                 | 4.8           | 46.1                   | 74.0           | -27.9       | Peak     | Vertical     |
|              | 12146.900       | 42.3                 | 5.0           | 47.3                   | 74.0           | -26.7       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |            |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| Test Site | WJ-AC2, WZ-AC2                                                                                                                                                                    | Test Engineer | Carl Jiang |
| Test Date | 2024-07-22 ~ 2024-08-26                                                                                                                                                           | Test Mode:    | BLE-2Mbps  |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |            |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 4806.300        | 41.6                 | 3.7           | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
|              | 8252.200        | 32.0                 | 10.6          | 42.6                   | 74.0           | -31.4       | Peak     | Horizontal   |
|              | 11489.000       | 30.2                 | 17.5          | 47.8                   | 74.0           | -26.2       | Peak     | Horizontal   |
|              | 5413.200        | 33.3                 | 3.8           | 37.1                   | 74.0           | -36.9       | Peak     | Vertical     |
|              | 7534.800        | 31.4                 | 11.4          | 42.8                   | 74.0           | -31.2       | Peak     | Vertical     |
|              | 11470.300       | 30.0                 | 17.4          | 47.4                   | 74.0           | -26.7       | Peak     | Vertical     |
| 19           | 4879.400        | 46.0                 | 0.0           | 46.0                   | 74.0           | -28.0       | Peak     | Horizontal   |
|              | 7322.300        | 44.9                 | 5.0           | 49.9                   | 74.0           | -24.1       | Peak     | Horizontal   |
|              | 15563.900       | 29.2                 | 6.0           | 35.2                   | 54.0           | -18.8       | Average  | Horizontal   |
|              | 15563.900       | 46.2                 | 6.0           | 52.2                   | 74.0           | -21.8       | Peak     | Horizontal   |
|              | 3854.300        | 42.2                 | -1.4          | 40.8                   | 74.0           | -33.2       | Peak     | Vertical     |
|              | 11470.300       | 41.7                 | 5.4           | 47.1                   | 74.0           | -26.9       | Peak     | Vertical     |
|              | 12197.900       | 43.8                 | 5.0           | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
| 38           | 4955.900        | 43.0                 | 0.1           | 43.1                   | 74.0           | -30.9       | Peak     | Horizontal   |
|              | 11424.400       | 42.2                 | 5.4           | 47.6                   | 74.0           | -26.4       | Peak     | Horizontal   |
|              | 12388.300       | 45.7                 | 4.7           | 50.4                   | 74.0           | -23.6       | Peak     | Horizontal   |
|              | 7436.200        | 39.5                 | 5.0           | 44.5                   | 74.0           | -29.5       | Peak     | Vertical     |
|              | 11669.200       | 42.6                 | 4.8           | 47.4                   | 74.0           | -26.6       | Peak     | Vertical     |
|              | 12398.500       | 43.0                 | 4.7           | 47.7                   | 74.0           | -26.3       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |                   |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------|
| Test Site | WJ-AC2, WZ-AC2                                                                                                                                                                    | Test Engineer | Carl Jiang        |
| Test Date | 2024-08-03 ~ 2024-08-26                                                                                                                                                           | Test Mode:    | Proprietary-1Mbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                   |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 00           | 4009            | 38.3                 | 1.4           | 39.7                   | 74.0           | -34.3       | Peak     | Horizontal   |
|              | 4825            | 38.6                 | 3.7           | 42.3                   | 74.0           | -31.7       | Peak     | Horizontal   |
|              | 11031.7         | 36.9                 | 15.0          | 51.9                   | 74.0           | -22.1       | Peak     | Horizontal   |
|              | 3942.7          | 38.2                 | 1.2           | 39.4                   | 74.0           | -34.6       | Peak     | Vertical     |
|              | 4923.6          | 36.9                 | 3.8           | 40.7                   | 74.0           | -33.3       | Peak     | Vertical     |
|              | 11349.6         | 36.2                 | 14.3          | 50.5                   | 74.0           | -23.5       | Peak     | Vertical     |
| 01           | 4852.200        | 41.4                 | 3.6           | 45.0                   | 74.0           | -29.1       | Peak     | Horizontal   |
|              | 7278.100        | 34.6                 | 11.1          | 45.7                   | 74.0           | -28.3       | Peak     | Horizontal   |
|              | 11256.100       | 31.3                 | 17.0          | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
|              | 4105.900        | 34.8                 | 1.1           | 35.9                   | 74.0           | -38.1       | Peak     | Vertical     |
|              | 4852.200        | 35.5                 | 3.6           | 39.1                   | 74.0           | -35.0       | Peak     | Vertical     |
|              | 11618.200       | 30.8                 | 17.2          | 48.0                   | 74.0           | -26.0       | Peak     | Vertical     |
| 02           | 7439.600        | 45.0                 | 5.0           | 50.0                   | 74.0           | -24.0       | Peak     | Horizontal   |
|              | 11670.900       | 43.0                 | 4.8           | 47.8                   | 74.0           | -26.2       | Peak     | Horizontal   |
|              | 12398.500       | 40.0                 | 4.7           | 44.7                   | 54.0           | -9.3        | Average  | Horizontal   |
|              | 7405.600        | 39.4                 | 5.3           | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
|              | 11064.000       | 42.8                 | 5.2           | 48.0                   | 74.0           | -26.0       | Peak     | Vertical     |
|              | 12026.200       | 42.5                 | 5.1           | 47.6                   | 74.0           | -26.4       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |                   |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------|
| Test Site | WJ-AC2, WZ-AC2                                                                                                                                                                    | Test Engineer | Carl Jiang        |
| Test Date | 2024-08-03 ~ 2024-08-26                                                                                                                                                           | Test Mode:    | Proprietary-2Mbps |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                   |


| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 4808.000        | 41.8                 | 3.7           | 45.5                   | 74.0           | -28.6       | Peak     | Horizontal   |
|              | 8177.400        | 31.3                 | 11.1          | 42.3                   | 74.0           | -31.7       | Peak     | Horizontal   |
|              | 11487.300       | 30.6                 | 17.5          | 48.1                   | 74.0           | -25.9       | Peak     | Horizontal   |
|              | 4806.300        | 36.9                 | 3.7           | 40.6                   | 74.0           | -33.4       | Peak     | Horizontal   |
|              | 7516.100        | 31.0                 | 11.3          | 42.2                   | 74.0           | -31.8       | Peak     | Vertical     |
|              | 11159.200       | 29.8                 | 16.7          | 46.5                   | 74.0           | -27.5       | Peak     | Vertical     |
|              | 4808.000        | 41.8                 | 3.7           | 45.5                   | 74.0           | -28.6       | Peak     | Vertical     |
| 13           | 4887.900        | 39.5                 | 3.4           | 42.9                   | 74.0           | -31.1       | Peak     | Horizontal   |
|              | 7465.100        | 31.3                 | 11.5          | 42.8                   | 74.0           | -31.2       | Peak     | Horizontal   |
|              | 11647.100       | 30.3                 | 17.6          | 48.0                   | 74.0           | -26.0       | Peak     | Horizontal   |
|              | 3570.400        | 36.1                 | -0.3          | 35.9                   | 68.2           | -32.3       | Peak     | Vertical     |
|              | 4887.900        | 34.2                 | 3.4           | 37.5                   | 74.0           | -36.5       | Peak     | Vertical     |
|              | 11771.200       | 30.7                 | 17.0          | 47.7                   | 74.0           | -26.3       | Peak     | Vertical     |
| 24           | 4955.900        | 43.5                 | 0.1           | 43.6                   | 74.0           | -30.4       | Peak     | Horizontal   |
|              | 10831.100       | 41.0                 | 5.3           | 46.3                   | 74.0           | -27.7       | Peak     | Horizontal   |
|              | 12393.400       | 44.8                 | 4.7           | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
|              | 5046.000        | 41.3                 | 0.1           | 41.4                   | 74.0           | -32.6       | Peak     | Vertical     |
|              | 11024.900       | 41.6                 | 5.1           | 46.7                   | 74.0           | -27.3       | Peak     | Vertical     |
|              | 11958.200       | 42.7                 | 5.2           | 47.9                   | 74.0           | -26.1       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Result of Radiated Emission below 1GHz:

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC1                        | Test Date      | 2024-07-23    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 21.5°C /65.3% |
| Factor        | AC1 9163-25-1000MHz           | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By battery    |
| Test Mode     | Transmit by BLE-1M at 2480MHz |                |               |

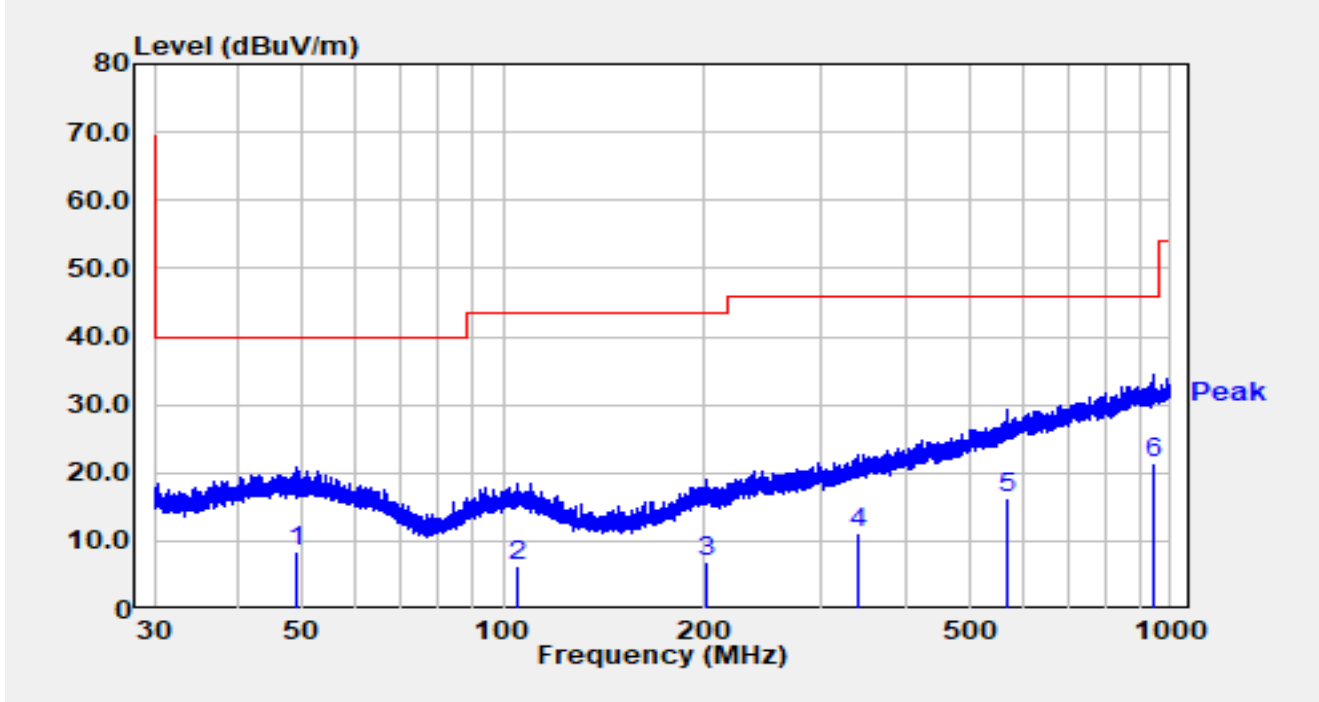


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 48.809          | -11.20         | 19.69      | 8.49                 | -31.51      | 40.00          | QP       |
| 2  |      | 104.720         | -11.50         | 17.96      | 6.46                 | -37.04      | 43.50          | QP       |
| 3  |      | 201.888         | -10.90         | 17.94      | 7.04                 | -36.46      | 43.50          | QP       |
| 4  |      | 338.994         | -10.70         | 21.98      | 11.28                | -34.72      | 46.00          | QP       |
| 5  |      | 570.210         | -10.00         | 26.27      | 16.27                | -29.73      | 46.00          | QP       |
| 6  | *    | 942.791         | -9.70          | 31.00      | 21.30                | -24.70      | 46.00          | QP       |

#### Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC1                        | Test Date      | 2024-07-23    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 21.5°C /65.3% |
| Factor        | AC1 9163-25-1000MHz           | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By battery    |
| Test Mode     | Transmit by BLE-1M at 2480MHz |                |               |

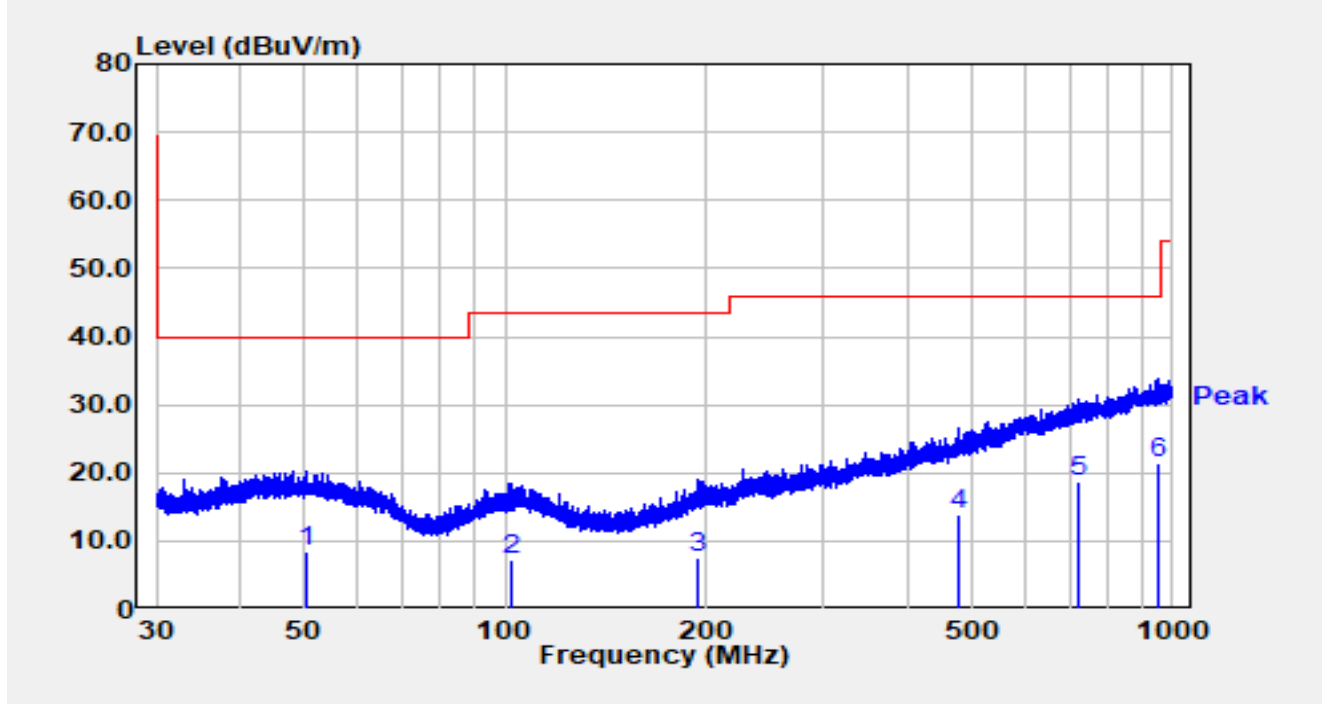


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 50.232          | -11.10         | 19.66      | 8.56                 | -31.44      | 40.00          | QP       |
| 2  |      | 101.751         | -10.50         | 17.80      | 7.30                 | -36.20      | 43.50          | QP       |
| 3  |      | 194.931         | -10.20         | 17.62      | 7.42                 | -36.08      | 43.50          | QP       |
| 4  |      | 479.518         | -10.50         | 24.54      | 14.04                | -31.96      | 46.00          | QP       |
| 5  |      | 720.462         | -9.70          | 28.51      | 18.81                | -27.19      | 46.00          | QP       |
| 6  | *    | 951.093         | -9.70          | 31.07      | 21.37                | -24.63      | 46.00          | QP       |

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

### A.7 Radiated Restricted Band Edge Test Result

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-07-22    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.1°C /65.7% |
| Factor        | 07105 1-18G                   | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 1M at 2402MHz |                |               |

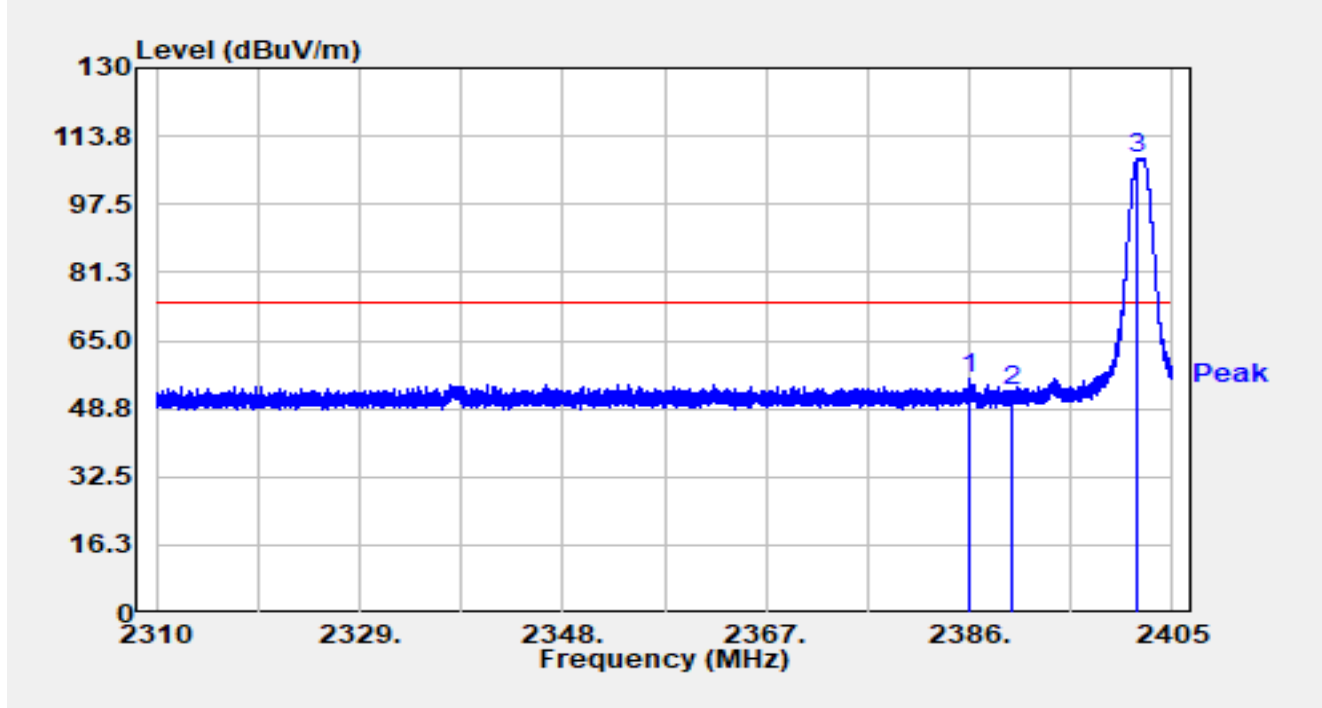


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2386.010        | 26.20          | 29.58      | 55.78                | -18.22      | 74.00          | Peak     |
| 2  |      | 2390.000        | 23.18          | 29.59      | 52.77                | -21.23      | 74.00          | Peak     |
| 3  |      | 2401.751        | 78.78          | 29.64      | 108.42               | N/A         | N/A            | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-07-22    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.1°C /65.7% |
| Factor        | 07105 1-18G                   | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 1M at 2402MHz |                |               |

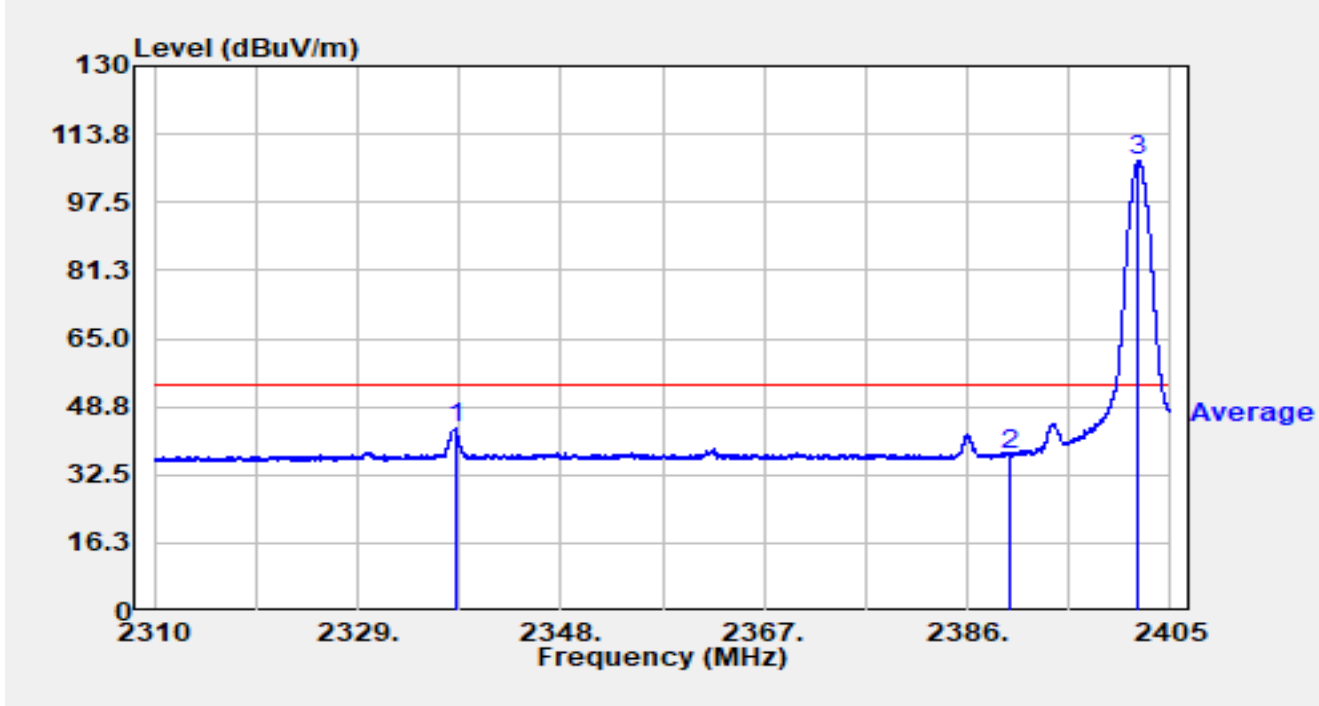


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2338.167        | 14.08          | 29.48      | 43.55                | -10.45      | 54.00          | Average  |
| 2  |      | 2390.000        | 7.82           | 29.59      | 37.41                | -16.59      | 54.00          | Average  |
| 3  |      | 2402.036        | 77.92          | 29.64      | 107.56               | N/A         | N/A            | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-07-22    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.1°C /65.7% |
| Factor        | 07105 1-18G                   | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 1M at 2402MHz |                |               |

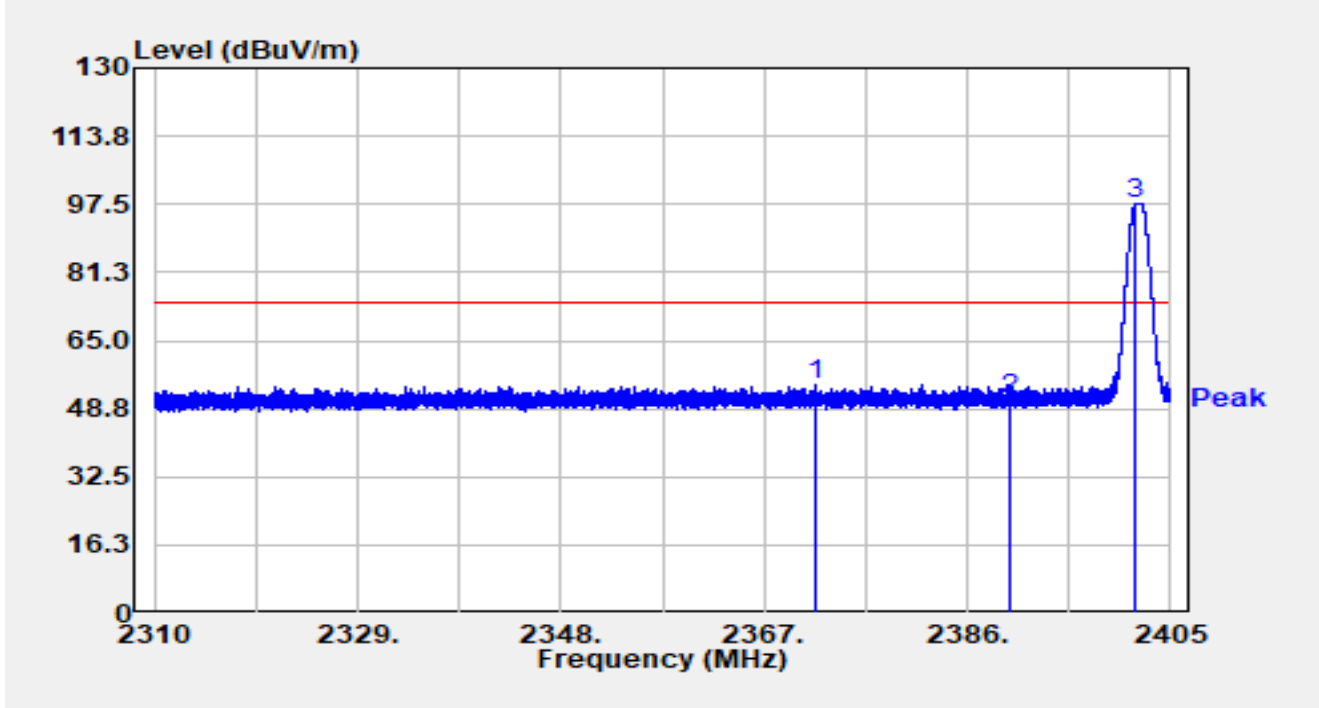


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2371.779        | 24.77          | 29.56      | 54.33                | -19.67      | 74.00          | Peak     |
| 2  |      | 2390.000        | 21.35          | 29.59      | 50.94                | -23.06      | 74.00          | Peak     |
| 3  |      | 2401.741        | 68.12          | 29.64      | 97.76                | N/A         | N/A            | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-07-22    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.1°C /65.7% |
| Factor        | 07105 1-18G                   | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 1M at 2402MHz |                |               |

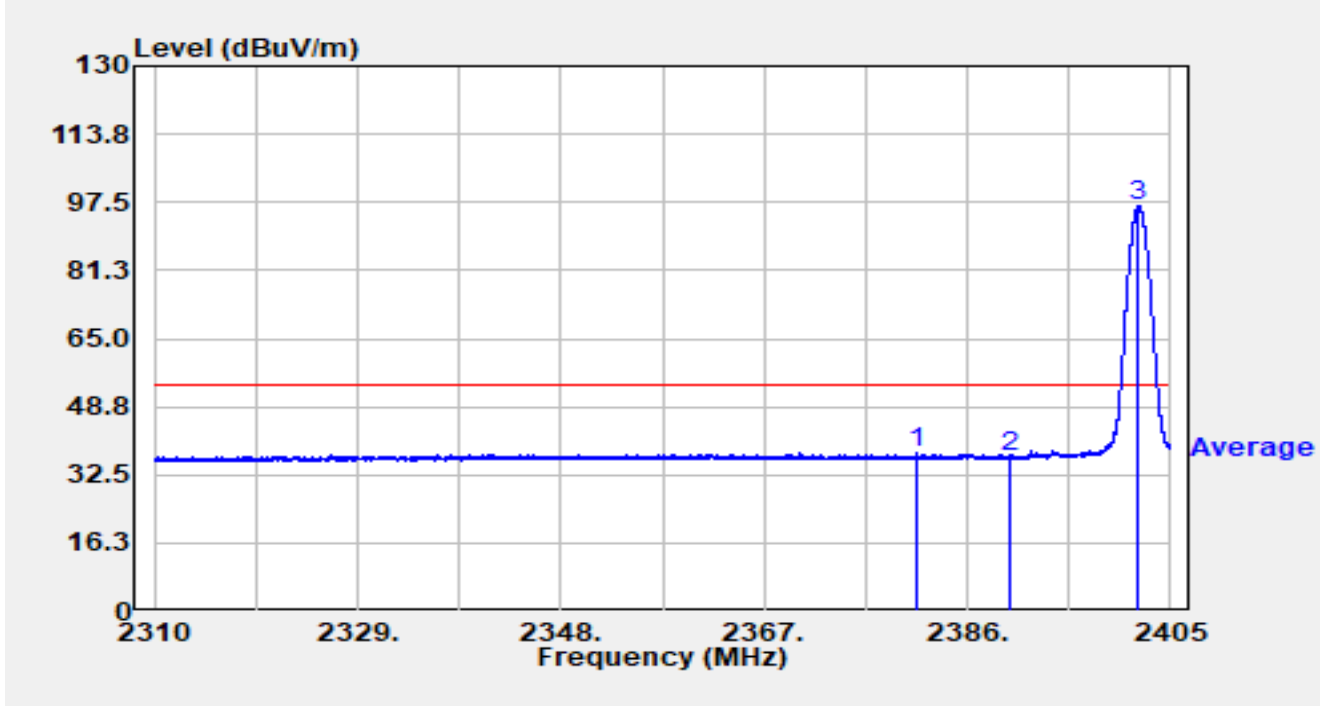


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2381.184        | 8.08           | 29.57      | 37.64                | -16.36      | 54.00          | Average  |
| 2  |      | 2390.000        | 7.10           | 29.59      | 36.69                | -17.31      | 54.00          | Average  |
| 3  |      | 2402.036        | 67.17          | 29.64      | 96.81                | N/A         | N/A            | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-07-22    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.1°C /65.7% |
| Factor        | 07105 1-18G                   | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 1M at 2480MHz |                |               |

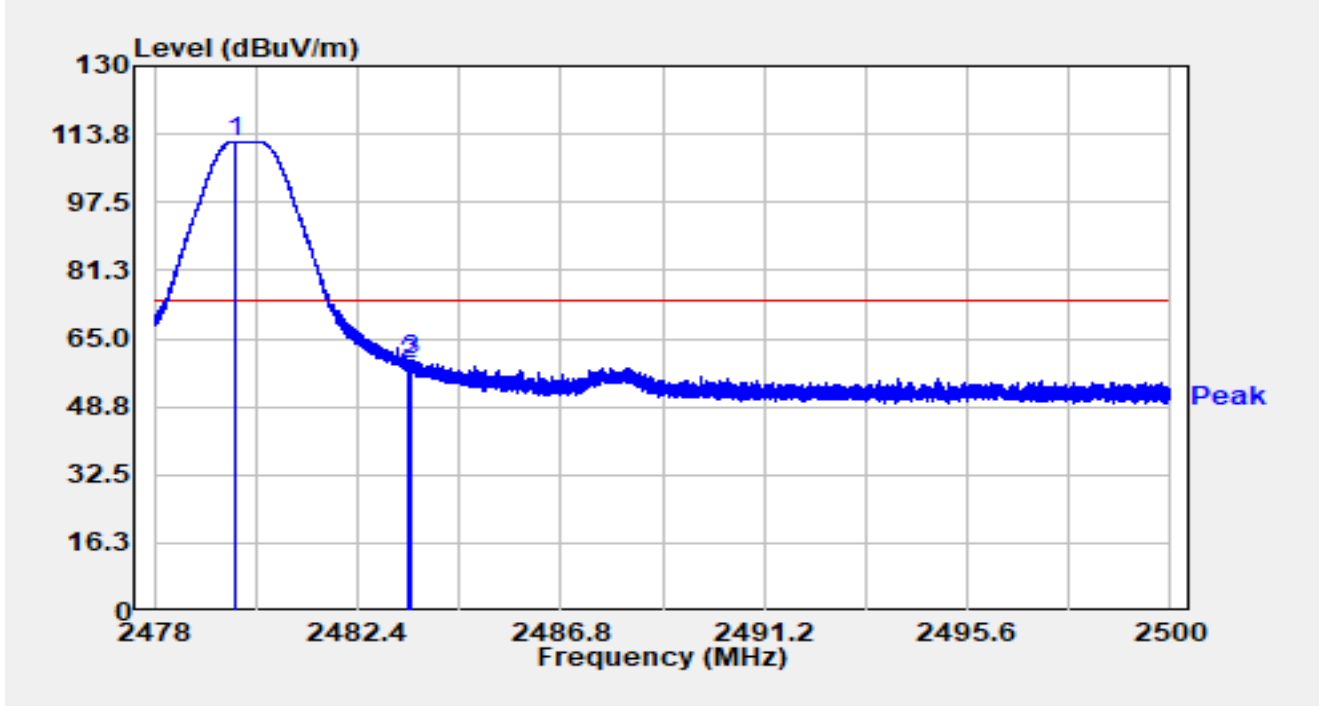


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.753        | 82.33          | 29.75      | 112.08               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 29.02          | 29.76      | 58.79                | -15.21      | 74.00          | Peak     |
| 3  | *    | 2483.544        | 29.96          | 29.76      | 59.72                | -14.28      | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-07-22    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.1°C /65.7% |
| Factor        | 07105 1-18G                   | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 1M at 2480MHz |                |               |

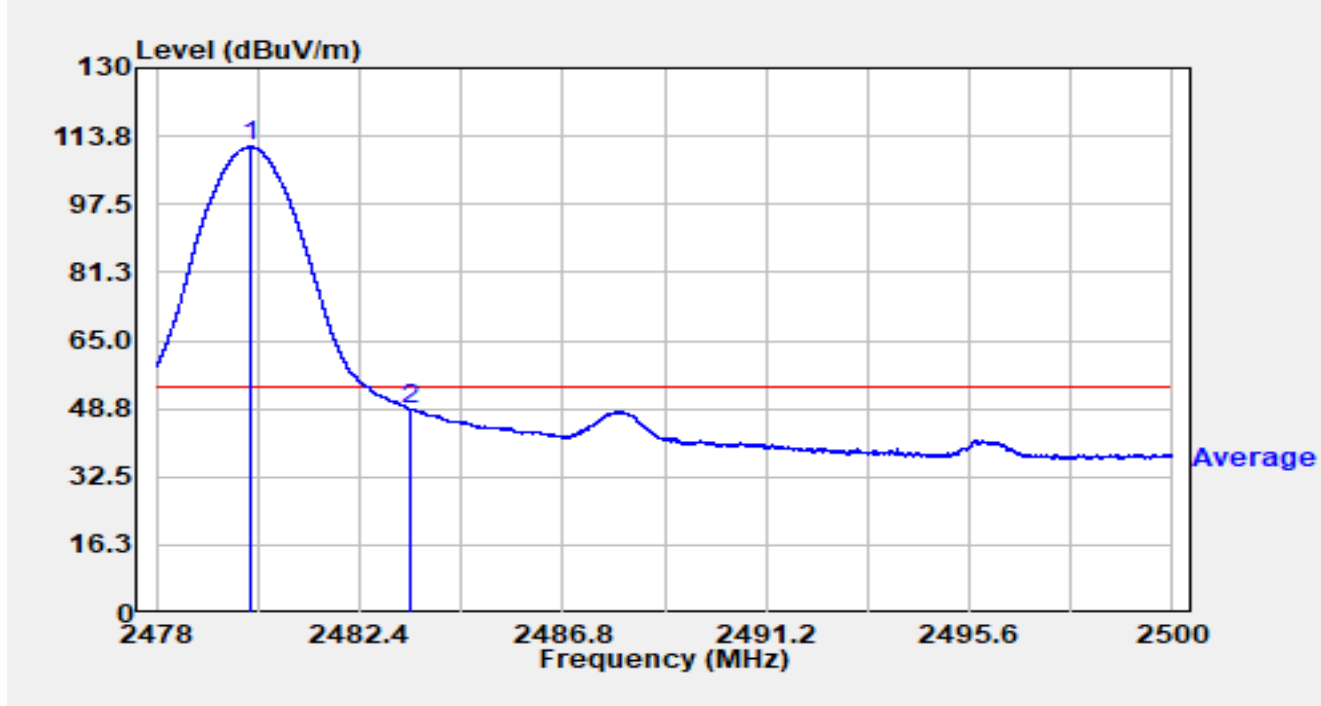


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.055        | 81.39          | 29.75      | 111.14               | N/A         | N/A            | Average  |
| 2  | *    | 2483.500        | 19.00          | 29.76      | 48.76                | -5.24       | 54.00          | Average  |

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-07-22    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.1°C /65.7% |
| Factor        | 07105 1-18G                   | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 1M at 2480MHz |                |               |

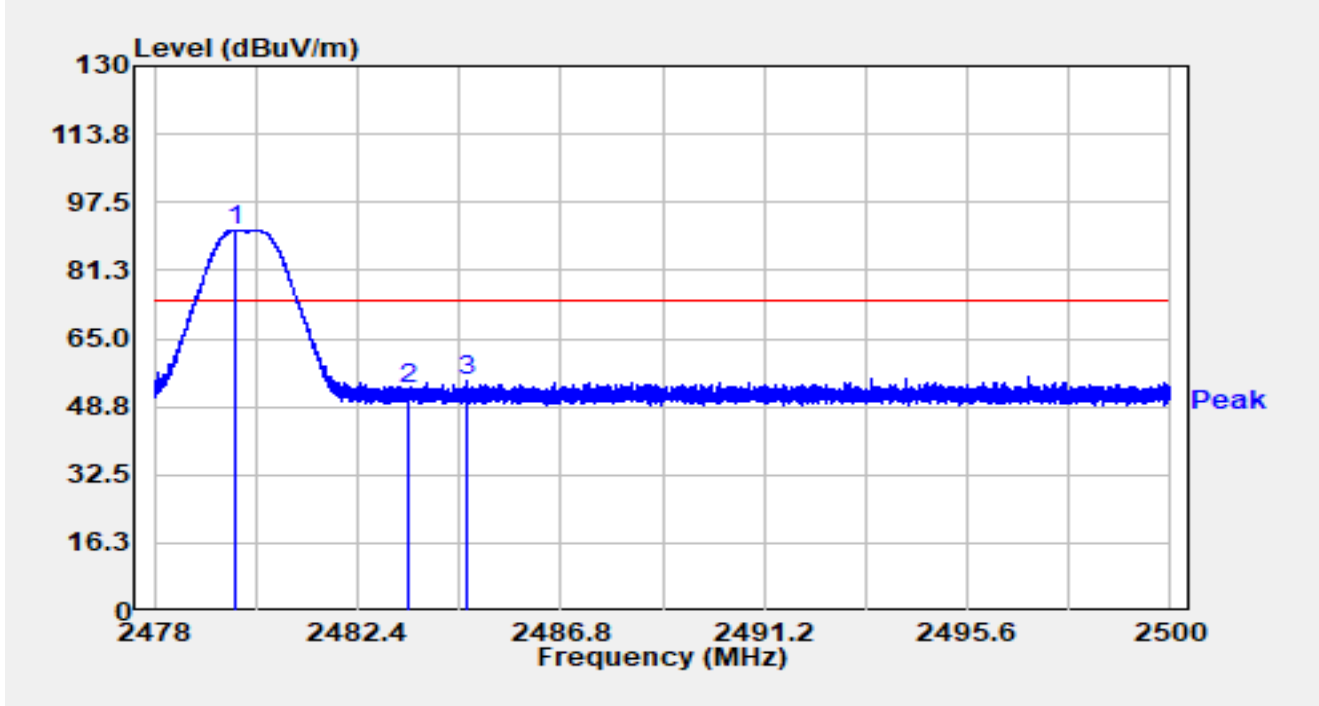


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2479.762        | 61.25          | 29.75      | 91.00                | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 23.06          | 29.76      | 52.83                | -21.17      | 74.00          | Peak     |
| 3  | *    | 2484.789        | 25.35          | 29.77      | 55.12                | -18.88      | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-07-22    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.1°C /65.7% |
| Factor        | 07105 1-18G                   | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 1M at 2480MHz |                |               |

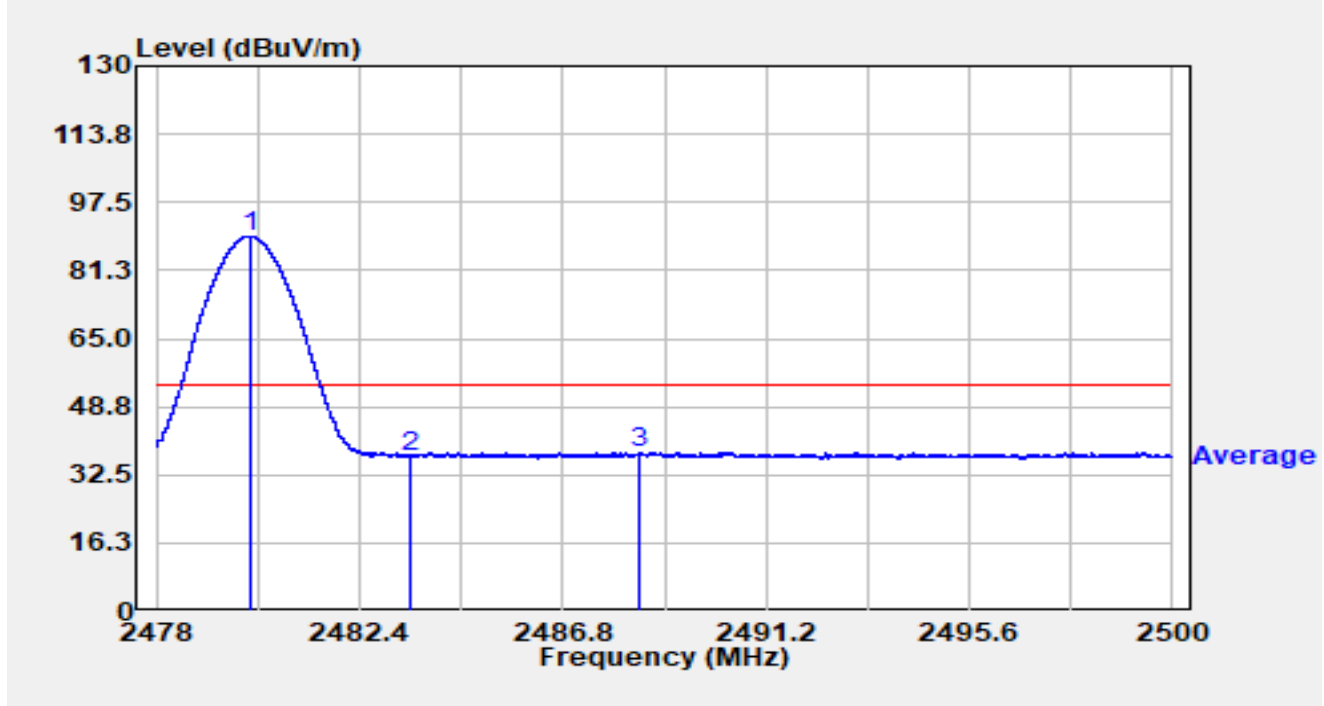


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2480.024        | 59.64          | 29.75      | 89.40                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 7.16           | 29.76      | 36.92                | -17.08      | 54.00          | Average  |
| 3  | *    | 2488.454        | 8.09           | 29.78      | 37.87                | -16.13      | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WZ-AC2                        | Test Date      | 2024-08-26    |
| Test Engineer | Dick Shen                     | Temp./Humidity | 25.7°C /50.3% |
| Factor        | BBHA 9120D_1457_1-18GHz       | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE-2M at 2404MHz |                |               |

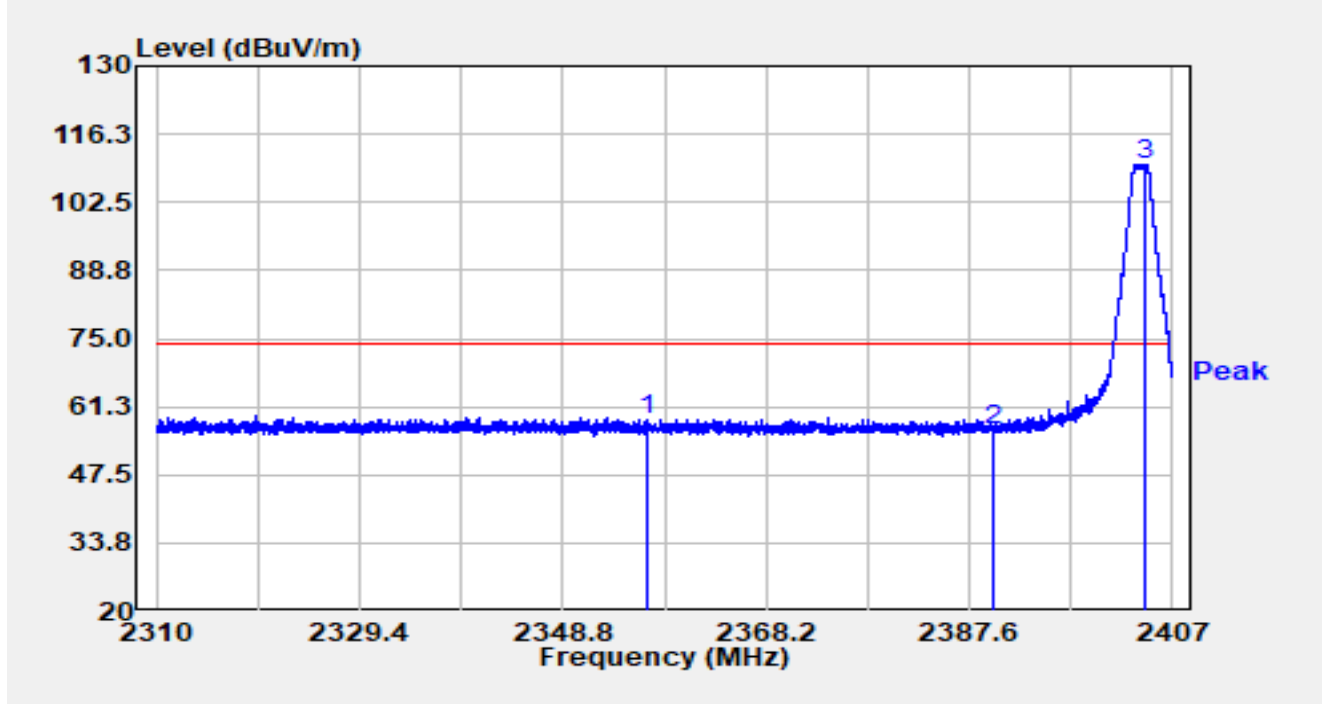


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2356.735        | 26.02          | 32.72      | 58.74                | -15.26      | 74.00          | Peak     |
| 2  |      | 2390.000        | 23.96          | 32.53      | 56.48                | -17.52      | 74.00          | Peak     |
| 3  |      | 2404.468        | 77.64          | 32.48      | 110.12               | N/A         | N/A            | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WZ-AC2                        | Test Date      | 2024-08-26    |
| Test Engineer | Dick Shen                     | Temp./Humidity | 25.7°C /50.3% |
| Factor        | BBHA 9120D_1457_1-18GHz       | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE-2M at 2404MHz |                |               |

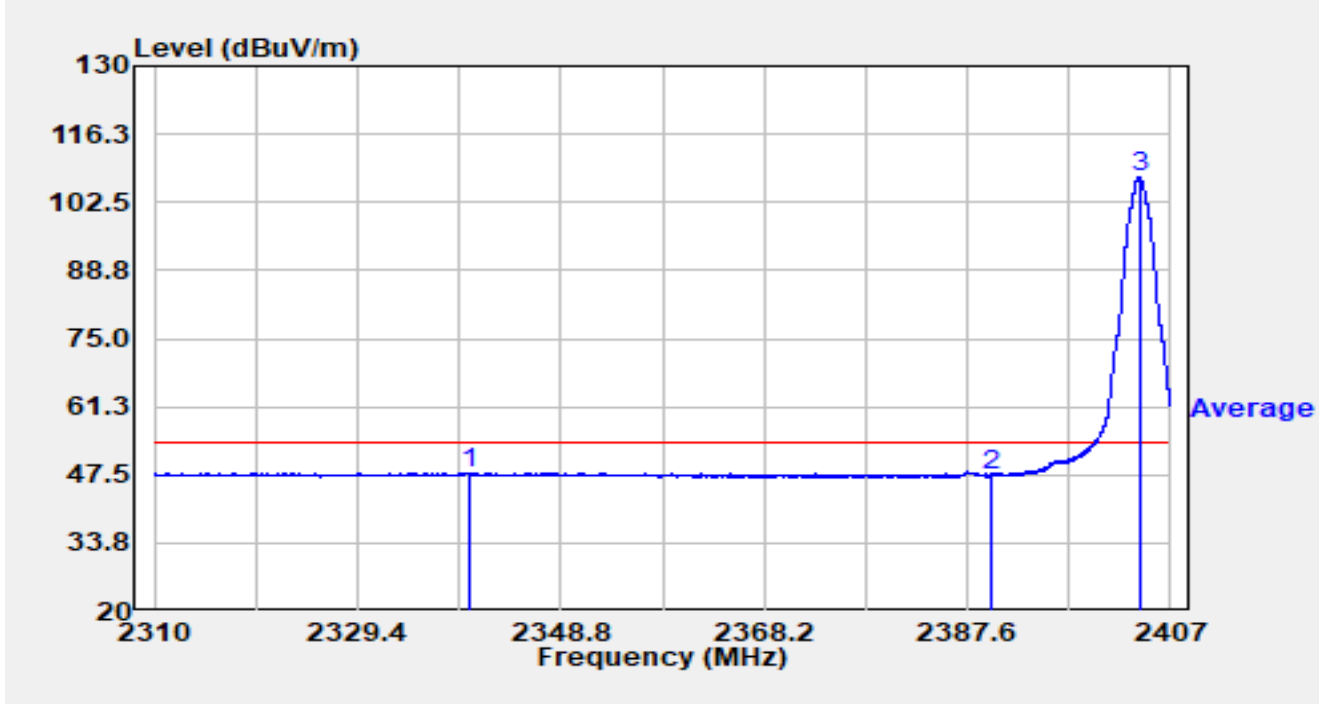


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2340.070        | 15.21          | 32.77      | 47.98                | -6.02       | 54.00          | Average  |
| 2  |      | 2390.000        | 14.86          | 32.53      | 47.38                | -6.62       | 54.00          | Average  |
| 3  |      | 2404.032        | 75.23          | 32.48      | 107.71               | N/A         | N/A            | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WZ-AC2                        | Test Date      | 2024-08-26    |
| Test Engineer | Dick Shen                     | Temp./Humidity | 25.7°C /50.3% |
| Factor        | BBHA 9120D_1457_1-18GHz       | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE-2M at 2404MHz |                |               |

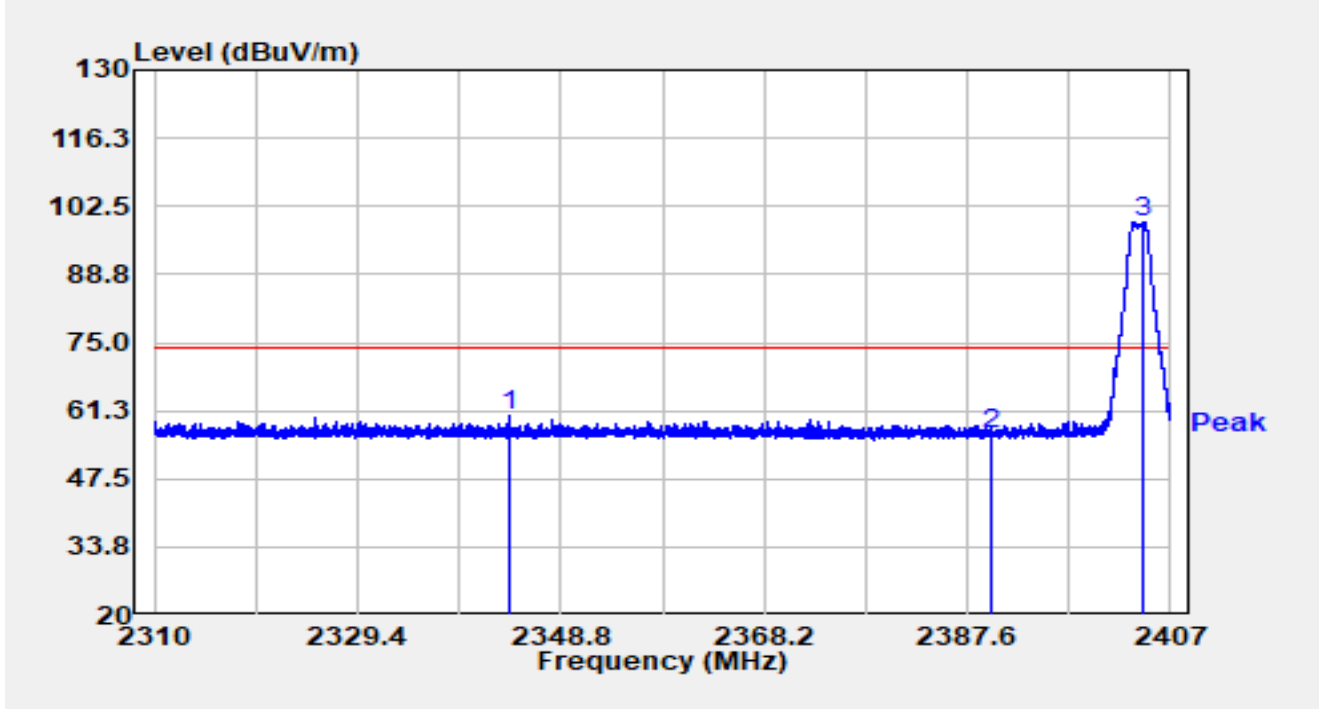


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2343.814        | 27.35          | 32.78      | 60.13                | -13.87      | 74.00          | Peak     |
| 2  |      | 2390.000        | 23.85          | 32.53      | 56.38                | -17.62      | 74.00          | Peak     |
| 3  |      | 2404.478        | 66.92          | 32.48      | 99.41                | N/A         | N/A            | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WZ-AC2                        | Test Date      | 2024-08-26    |
| Test Engineer | Dick Shen                     | Temp./Humidity | 25.7°C /50.3% |
| Factor        | BBHA 9120D_1457_1-18GHz       | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE-2M at 2404MHz |                |               |

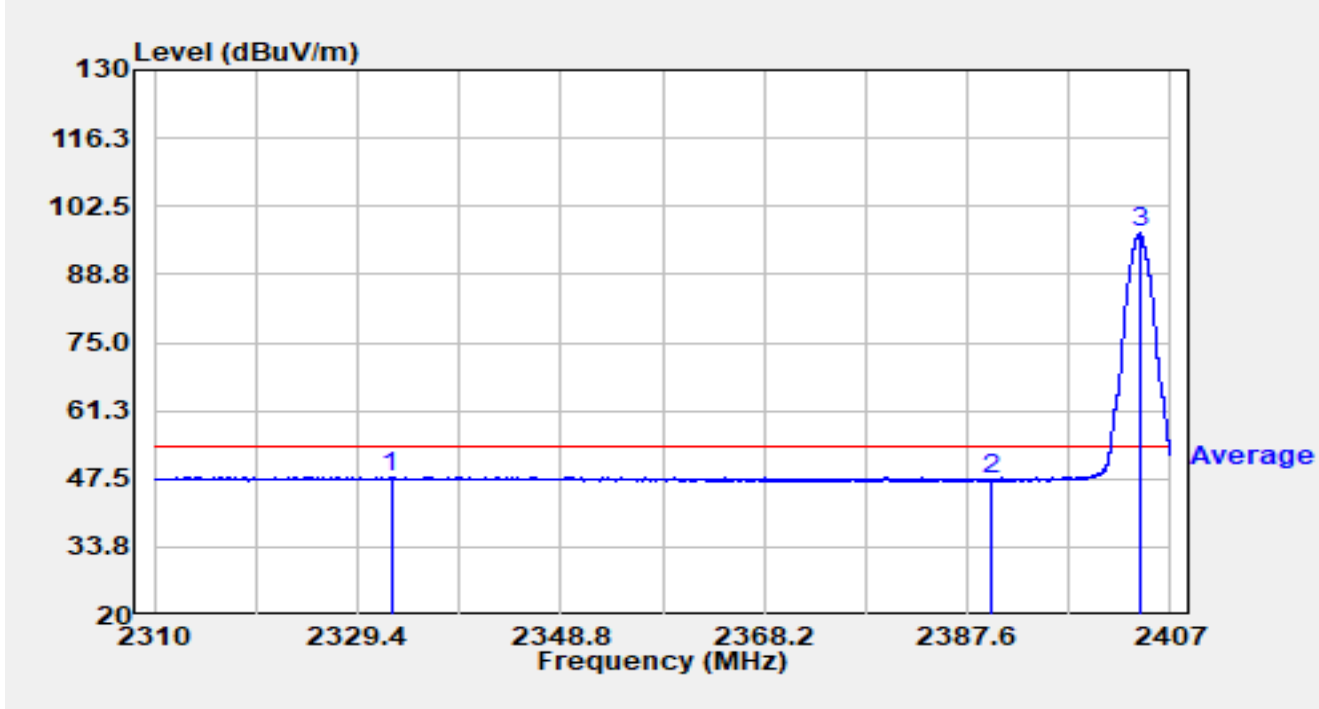


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2332.591        | 15.23          | 32.77      | 48.00                | -6.00       | 54.00          | Average  |
| 2  |      | 2390.000        | 14.82          | 32.53      | 47.35                | -6.65       | 54.00          | Average  |
| 3  |      | 2404.022        | 64.53          | 32.48      | 97.01                | N/A         | N/A            | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                   | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 2M at 2478MHz |                |               |

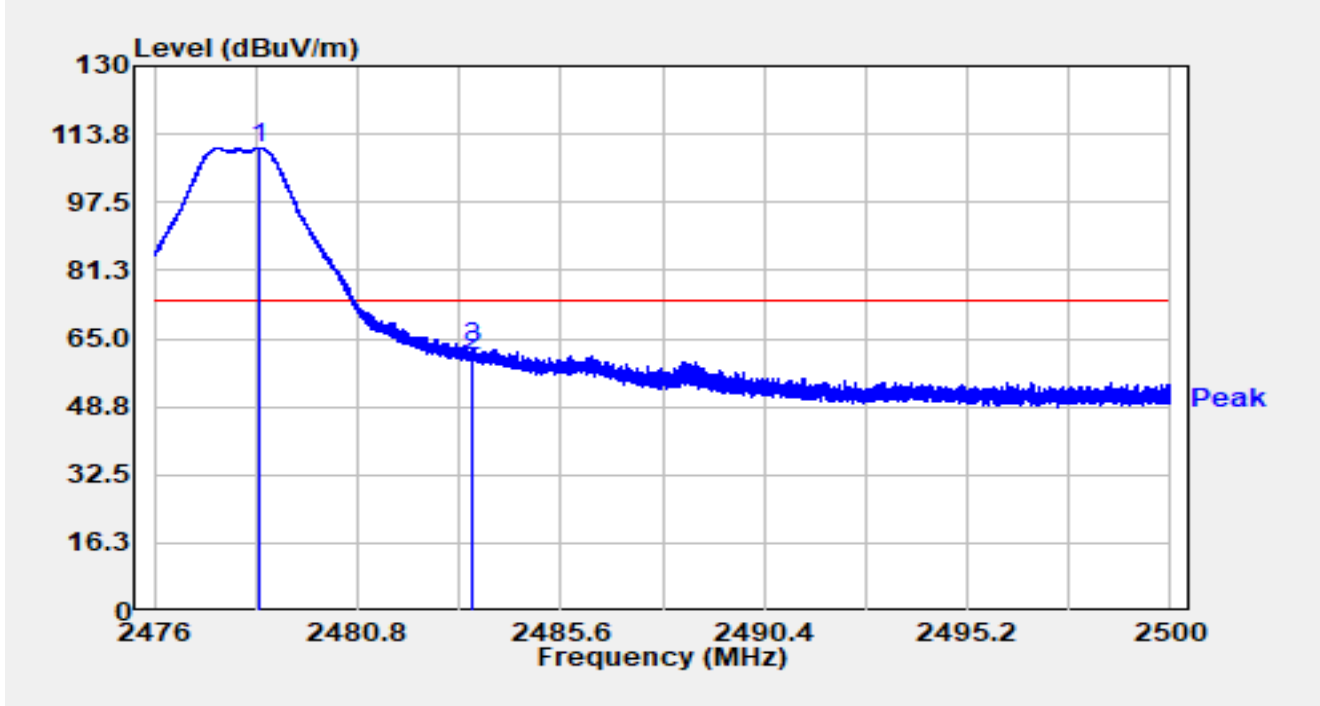


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2478.498        | 80.66          | 29.75      | 110.41               | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 30.95          | 29.76      | 60.71                | -13.29      | 74.00          | Peak     |
| 3  | *    | 2483.529        | 32.83          | 29.76      | 62.59                | -11.41      | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                   | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 2M at 2478MHz |                |               |

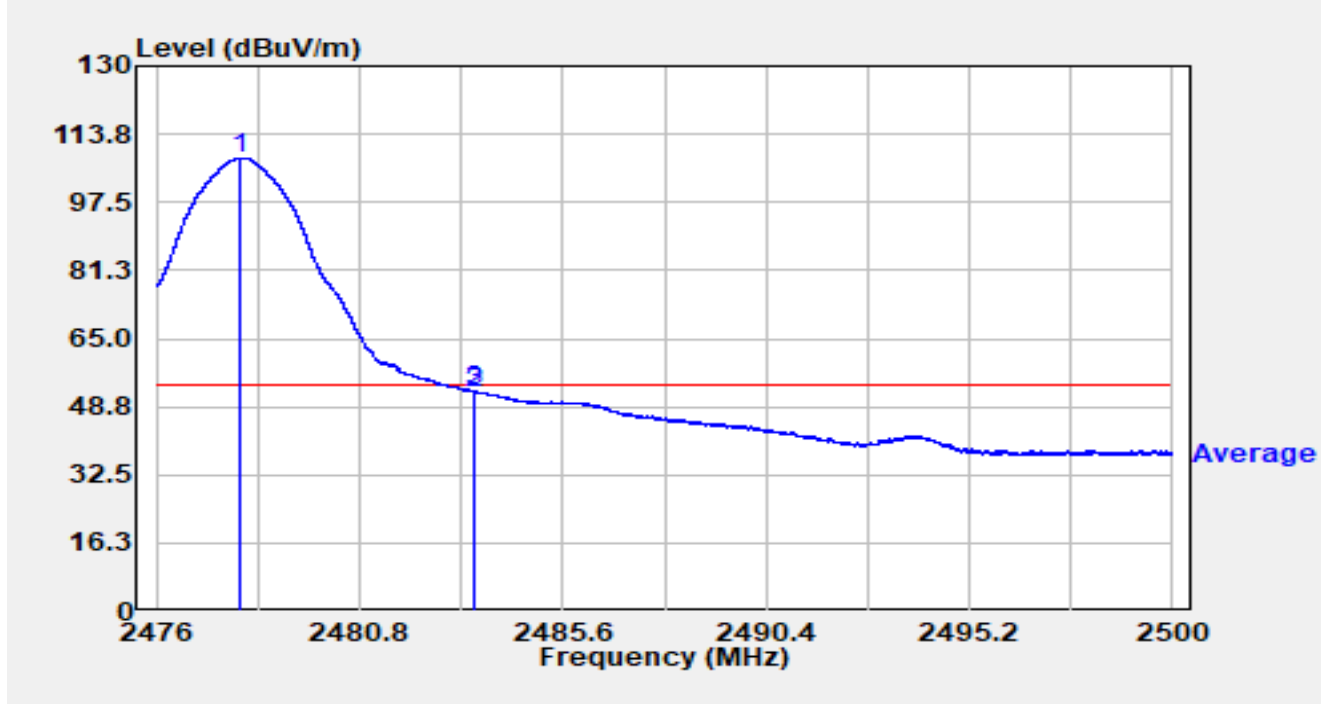


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2477.999        | 78.40          | 29.74      | 108.15               | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 22.48          | 29.76      | 52.24                | -1.76       | 54.00          | Average  |
| 3  | *    | 2483.529        | 22.60          | 29.76      | 52.37                | -1.63       | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                   | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 2M at 2478MHz |                |               |

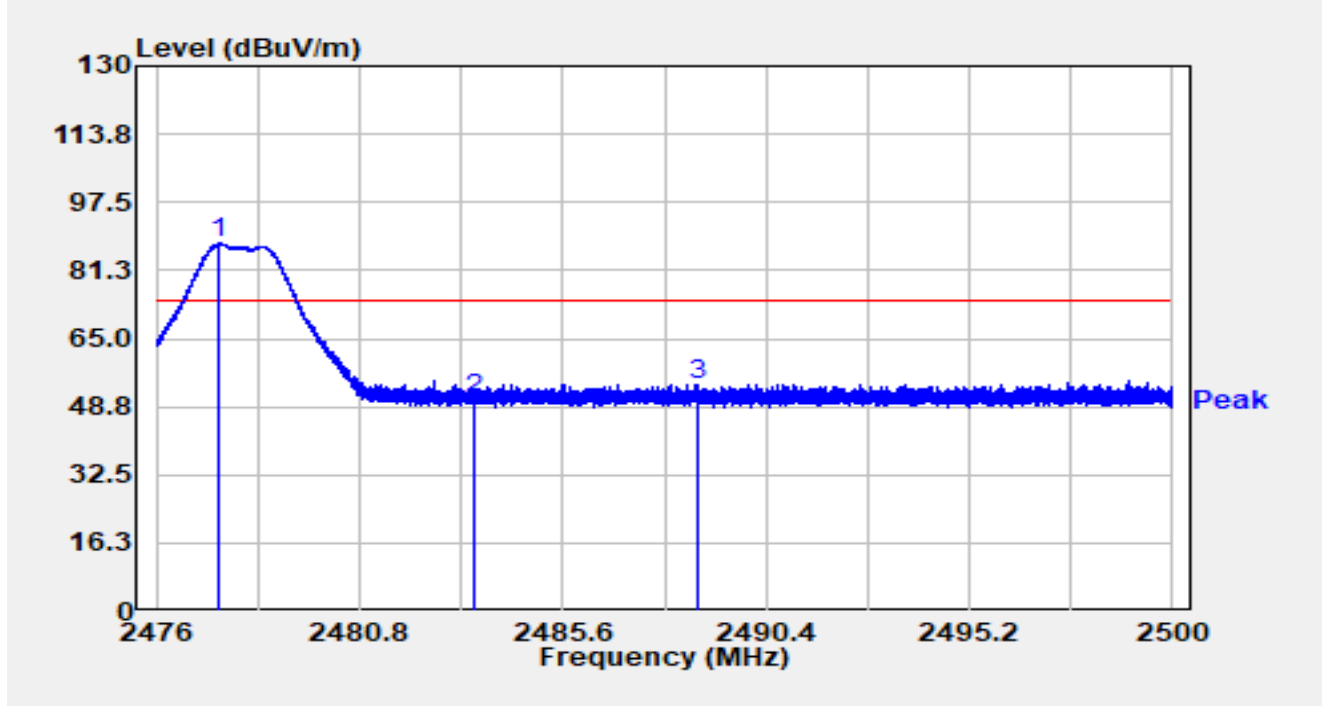


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2477.481        | 57.93          | 29.74      | 87.67                | N/A         | N/A            | Peak     |
| 2  |      | 2483.500        | 20.87          | 29.76      | 50.63                | -23.37      | 74.00          | Peak     |
| 3  | *    | 2488.797        | 24.34          | 29.78      | 54.13                | -19.87      | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                               |                |               |
|---------------|-------------------------------|----------------|---------------|
| Site          | WJ-AC2                        | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                    | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                   | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone    | Test Voltage   | By Battery    |
| Test Mode     | Transmit by BLE 2M at 2478MHz |                |               |

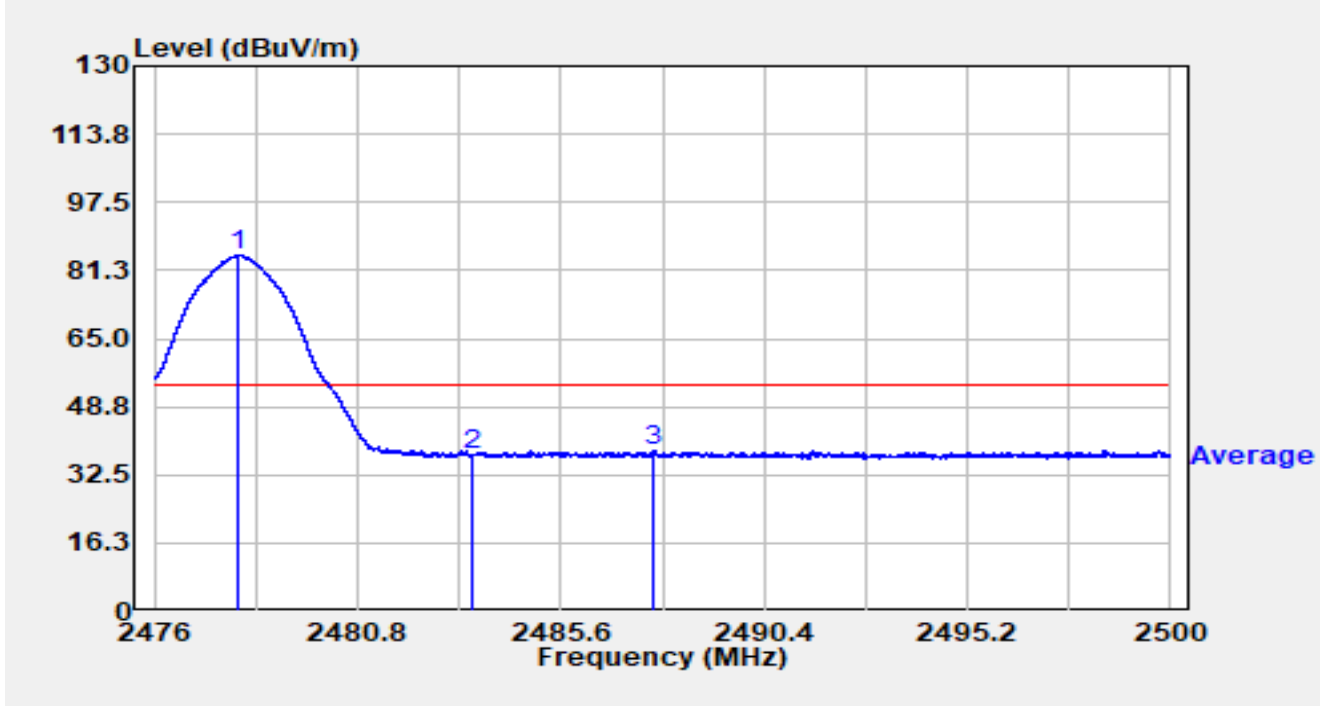


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2477.978        | 55.03          | 29.74      | 84.78                | N/A         | N/A            | Average  |
| 2  |      | 2483.500        | 7.48           | 29.76      | 37.25                | -16.75      | 54.00          | Average  |
| 3  | *    | 2487.806        | 8.69           | 29.78      | 38.47                | -15.53      | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 1M at 2402MHz |                |               |

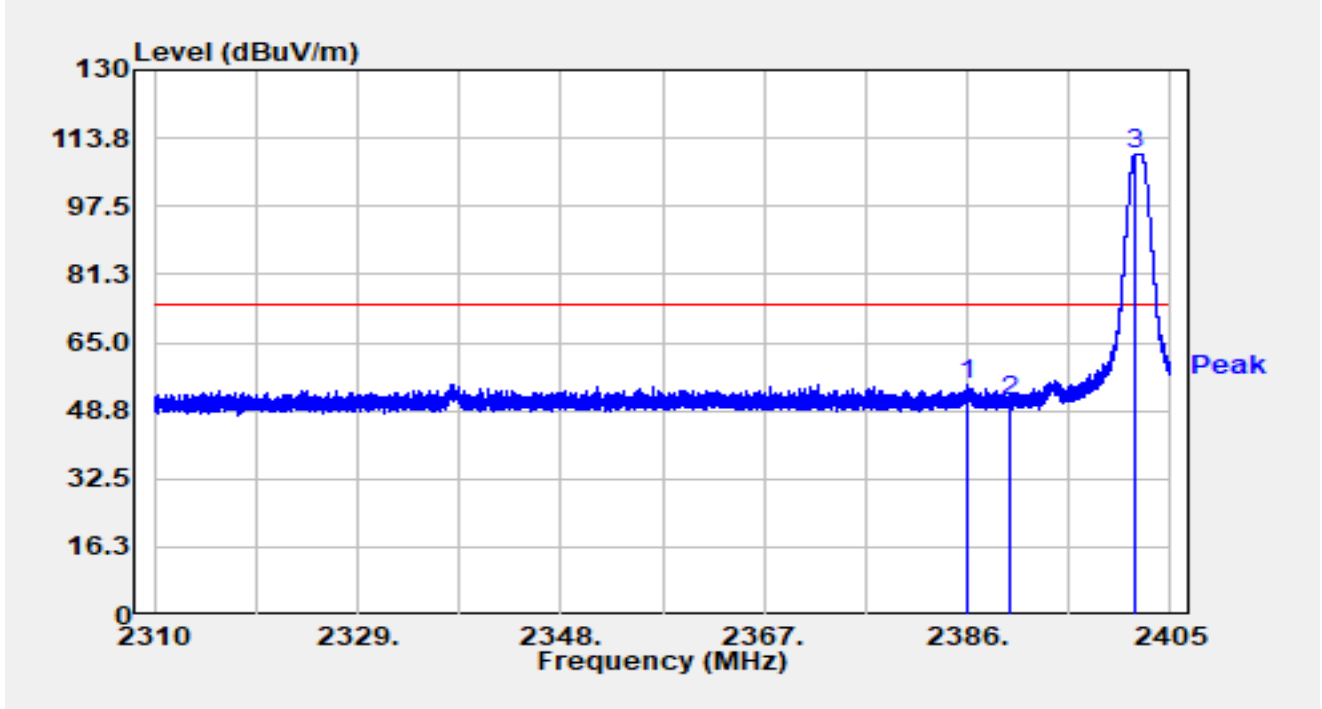


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2386.010        | 25.28          | 29.58      | 54.86                | -19.14      | 74.00          | Peak     |
| 2  |      | 2390.000        | 21.47          | 29.59      | 51.07                | -22.93      | 74.00          | Peak     |
| 3  | *    | 2401.741        | 80.45          | 29.64      | 110.09               | 36.09       | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 1M at 2402MHz |                |               |

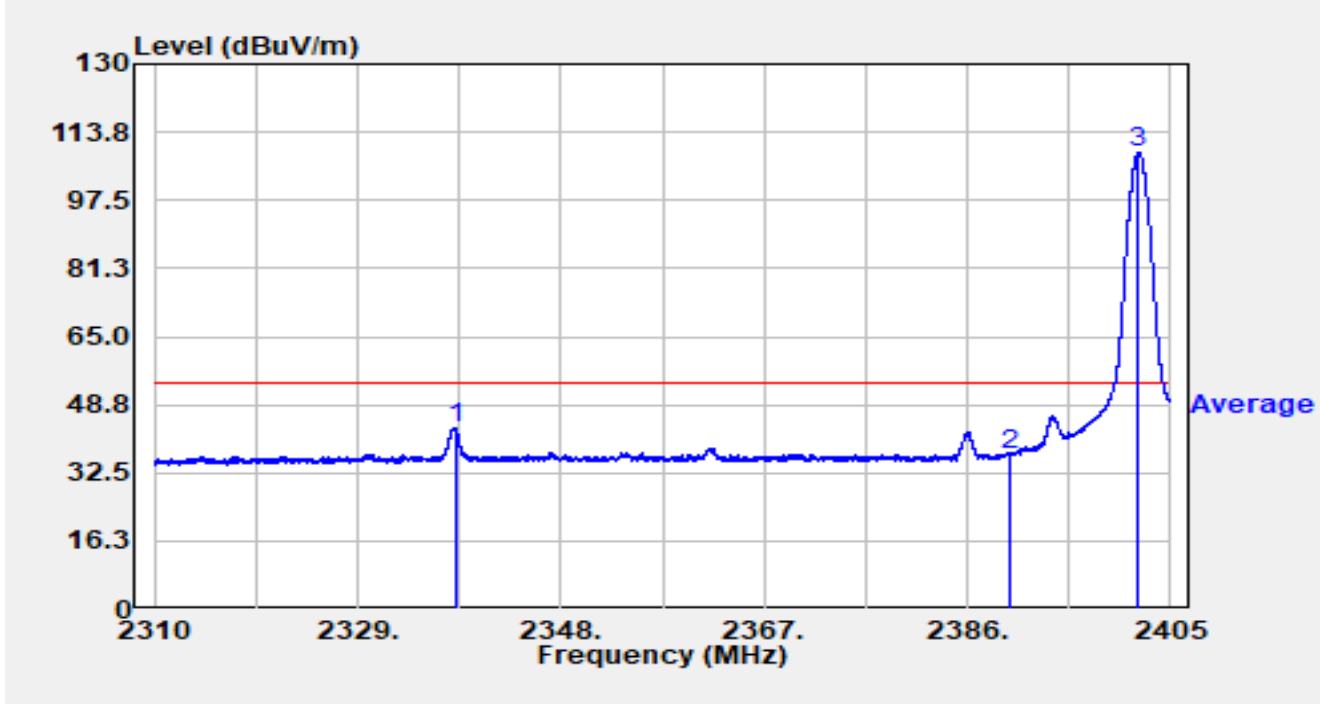


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2338.101        | 13.92          | 29.48      | 43.40                | -10.60      | 54.00          | Average  |
| 2  |      | 2390.000        | 7.31           | 29.59      | 36.90                | -17.10      | 54.00          | Average  |
| 3  | *    | 2402.017        | 79.40          | 29.64      | 109.04               | 55.04       | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 1M at 2402MHz |                |               |

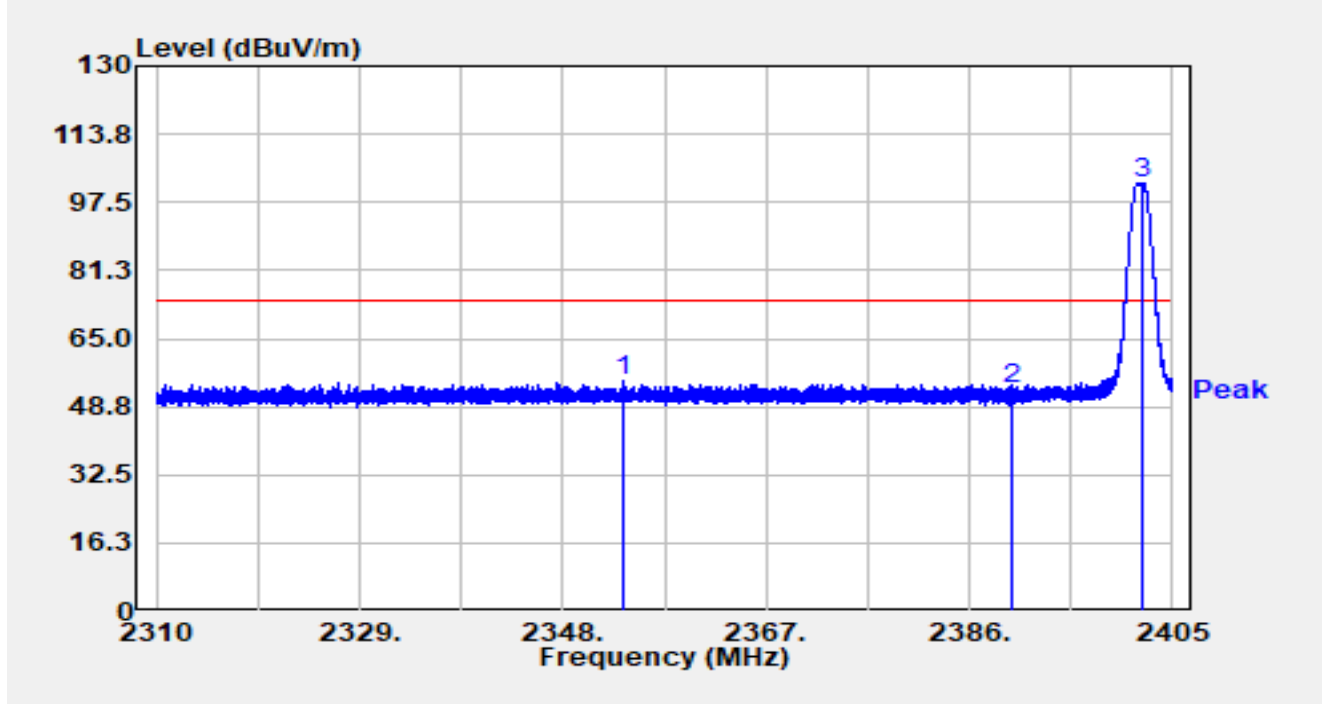


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2353.595        | 25.43          | 29.53      | 54.96                | -19.04      | 74.00          | Peak     |
| 2  |      | 2390.000        | 23.28          | 29.59      | 52.87                | -21.13      | 74.00          | Peak     |
| 3  | *    | 2402.245        | 72.50          | 29.64      | 102.14               | 28.14       | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 1M at 2402MHz |                |               |

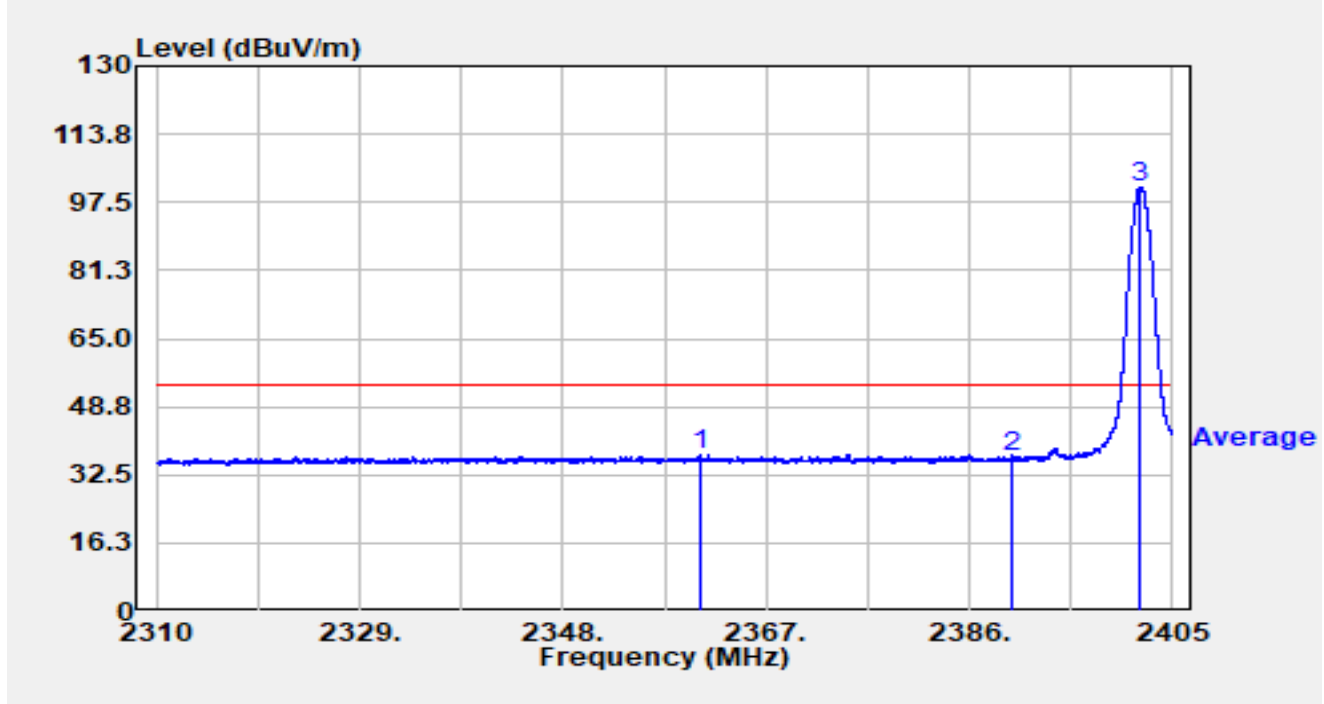


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2360.759        | 7.75           | 29.54      | 37.30                | -16.70      | 54.00          | Average  |
| 2  |      | 2390.000        | 7.40           | 29.59      | 36.99                | -17.01      | 54.00          | Average  |
| 3  | *    | 2402.027        | 71.62          | 29.64      | 101.26               | 47.26       | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 1M at 2480MHz |                |               |

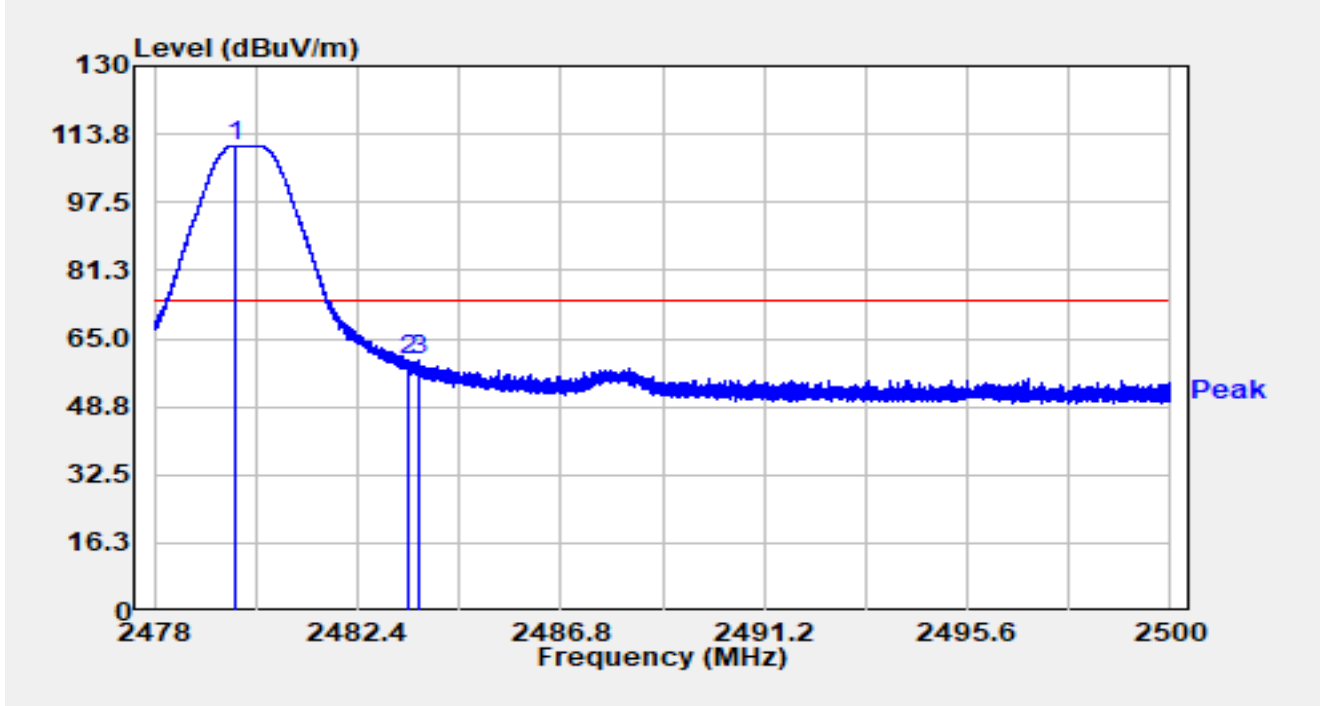


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2479.745        | 81.34          | 29.75      | 111.09               | 37.09       | 74.00          | Peak     |
| 2  |      | 2483.500        | 29.92          | 29.76      | 59.69                | -14.31      | 74.00          | Peak     |
| 3  |      | 2483.718        | 30.13          | 29.76      | 59.89                | -14.11      | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 1M at 2480MHz |                |               |

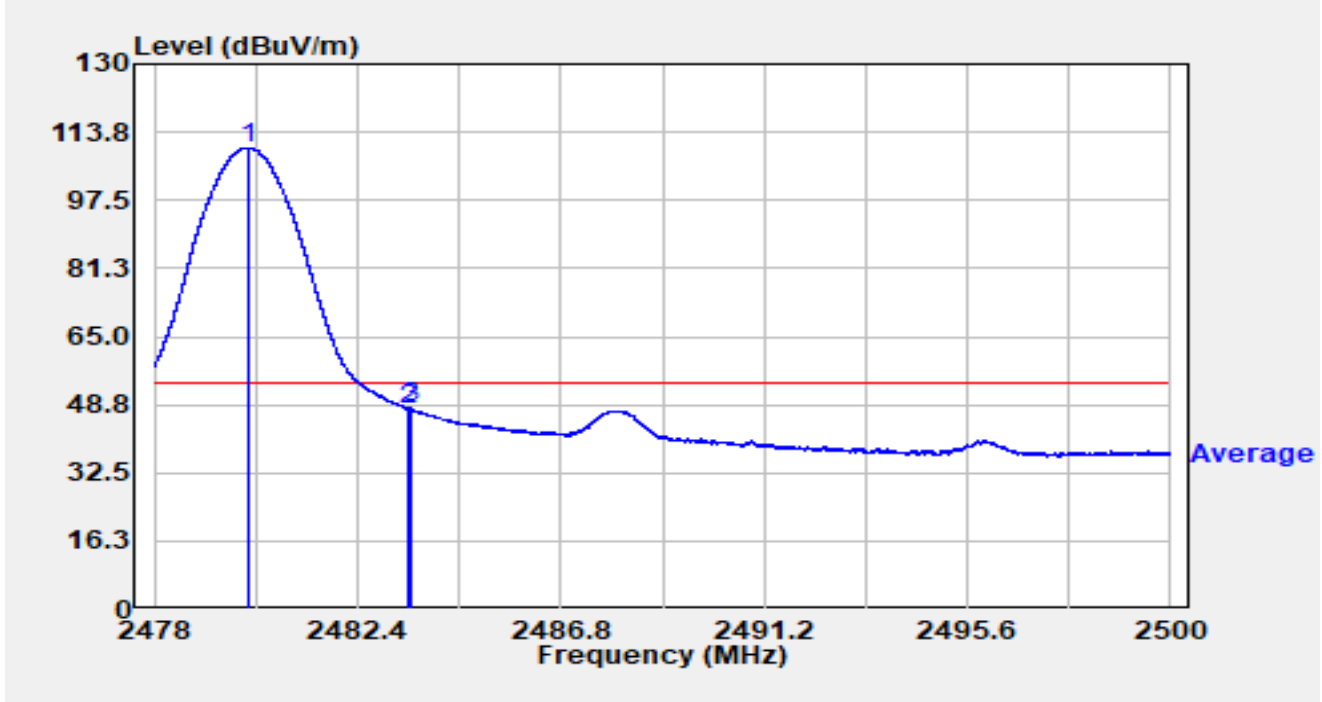


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2480.017        | 80.34          | 29.75      | 110.09               | 56.09       | 54.00          | Average  |
| 2  |      | 2483.500        | 18.05          | 29.76      | 47.81                | -6.19       | 54.00          | Average  |
| 3  |      | 2483.570        | 18.13          | 29.76      | 47.89                | -6.11       | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 1M at 2480MHz |                |               |

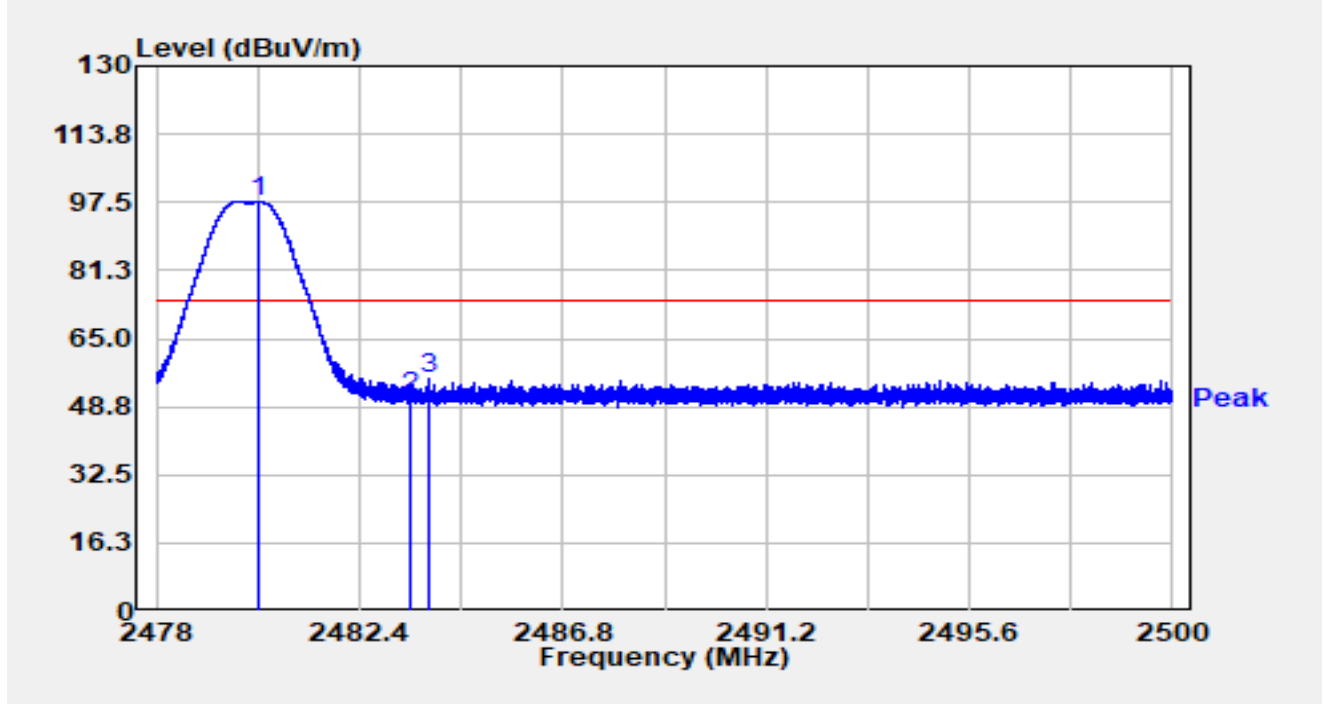


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2480.229        | 67.88          | 29.75      | 97.63                | 23.63       | 74.00          | Peak     |
| 2  |      | 2483.500        | 21.19          | 29.76      | 50.96                | -23.04      | 74.00          | Peak     |
| 3  |      | 2483.883        | 25.63          | 29.77      | 55.39                | -18.61      | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 1M at 2480MHz |                |               |

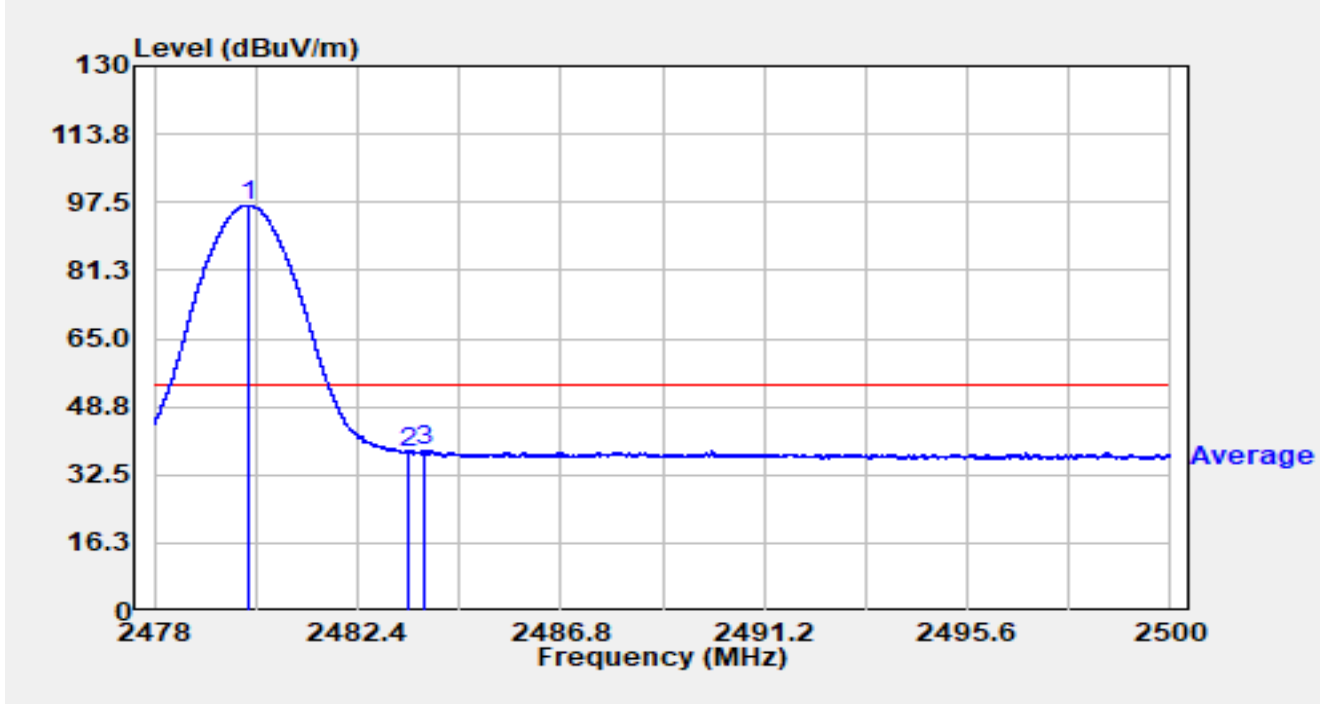


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2480.020        | 67.07          | 29.75      | 96.83                | 42.83       | 54.00          | Average  |
| 2  |      | 2483.500        | 8.14           | 29.76      | 37.91                | -16.09      | 54.00          | Average  |
| 3  |      | 2483.863        | 8.48           | 29.77      | 38.24                | -15.76      | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WZ-AC2                                | Test Date      | 2024-08-26    |
| Test Engineer | Dick Shen                             | Temp./Humidity | 25.7°C /50.3% |
| Factor        | BBHA 9120D_1457_1-18GHz               | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 2M at 2404MHz |                |               |

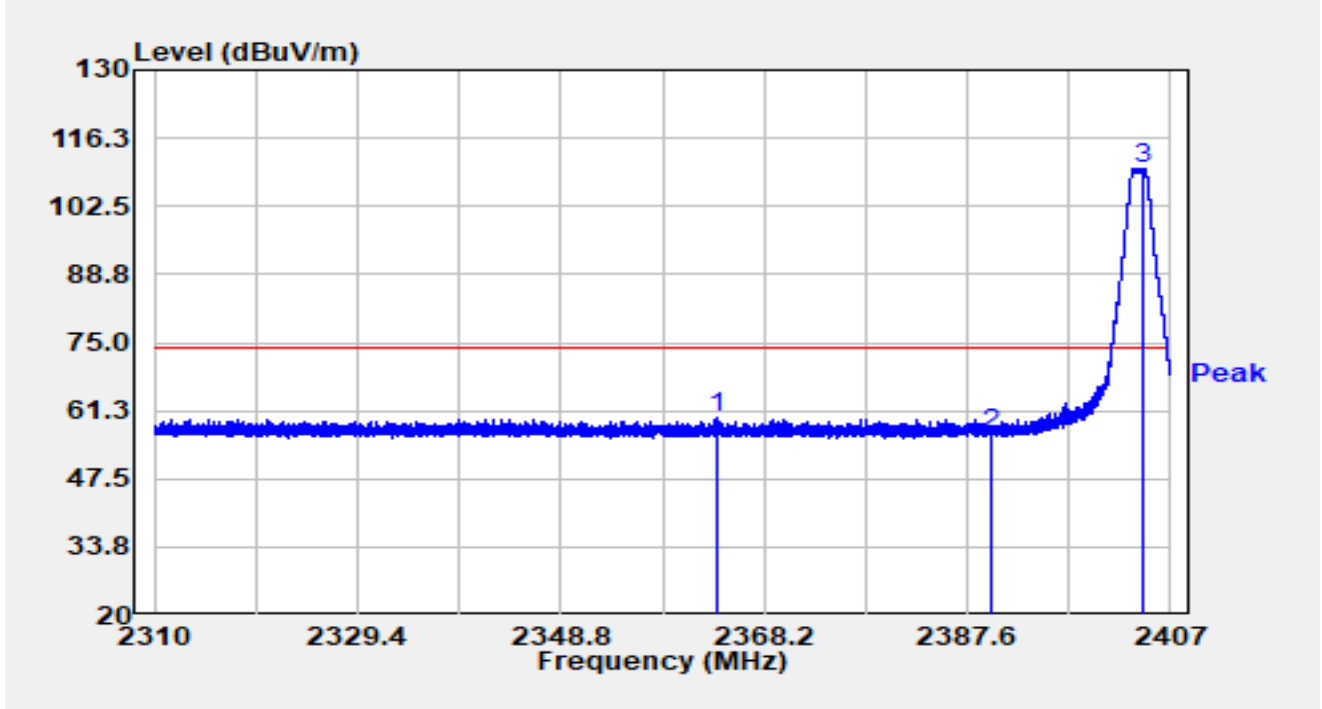


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2363.728        | 27.26          | 32.67      | 59.93                | -14.07      | 74.00          | Peak     |
| 2  |      | 2390.000        | 23.81          | 32.53      | 56.34                | -17.66      | 74.00          | Peak     |
| 3  |      | 2404.488        | 77.68          | 32.48      | 110.16               | N/A         | N/A            | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WZ-AC2                                | Test Date      | 2024-08-26    |
| Test Engineer | Dick Shen                             | Temp./Humidity | 25.7°C /50.3% |
| Factor        | BBHA 9120D_1457_1-18GHz               | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 2M at 2404MHz |                |               |

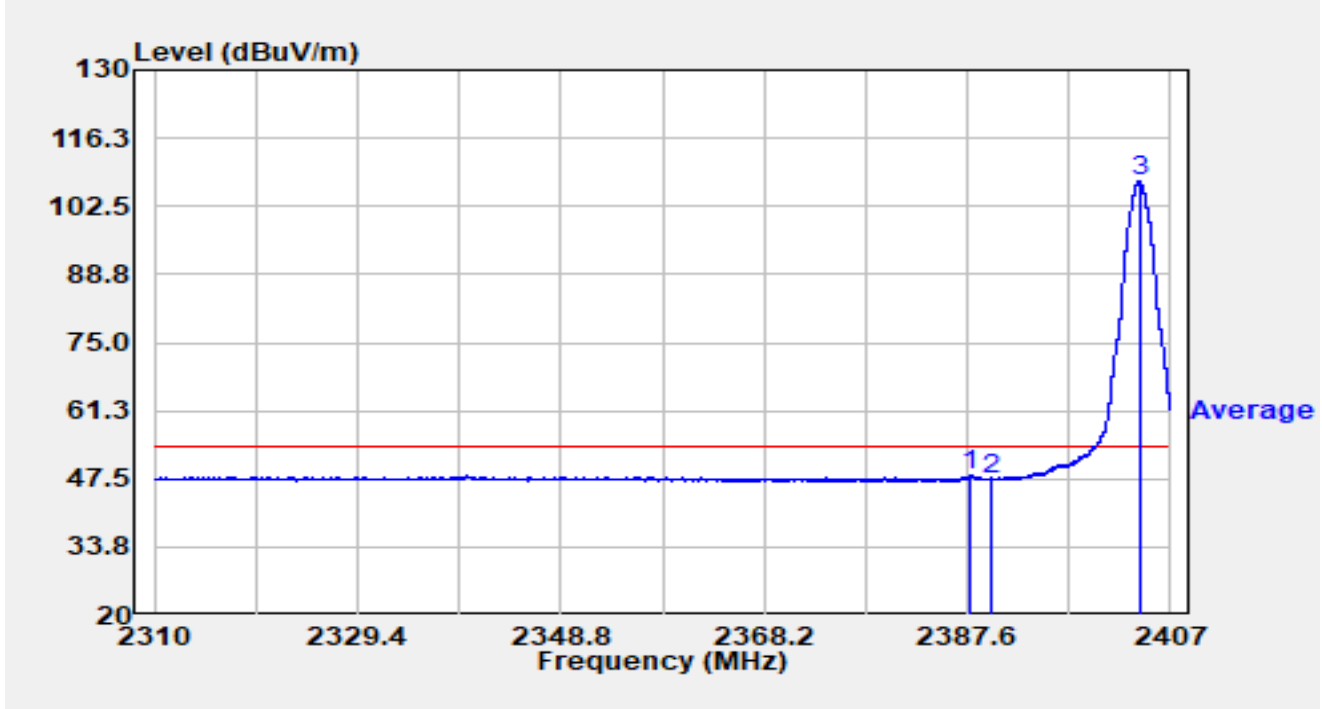


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2387.901        | 15.68          | 32.53      | 48.21                | -5.79       | 54.00          | Average  |
| 2  |      | 2390.000        | 15.06          | 32.53      | 47.59                | -6.41       | 54.00          | Average  |
| 3  |      | 2404.003        | 75.29          | 32.48      | 107.78               | N/A         | N/A            | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WZ-AC2                                | Test Date      | 2024-08-26    |
| Test Engineer | Dick Shen                             | Temp./Humidity | 25.7°C /50.3% |
| Factor        | BBHA 9120D_1457_1-18GHz               | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 2M at 2404MHz |                |               |

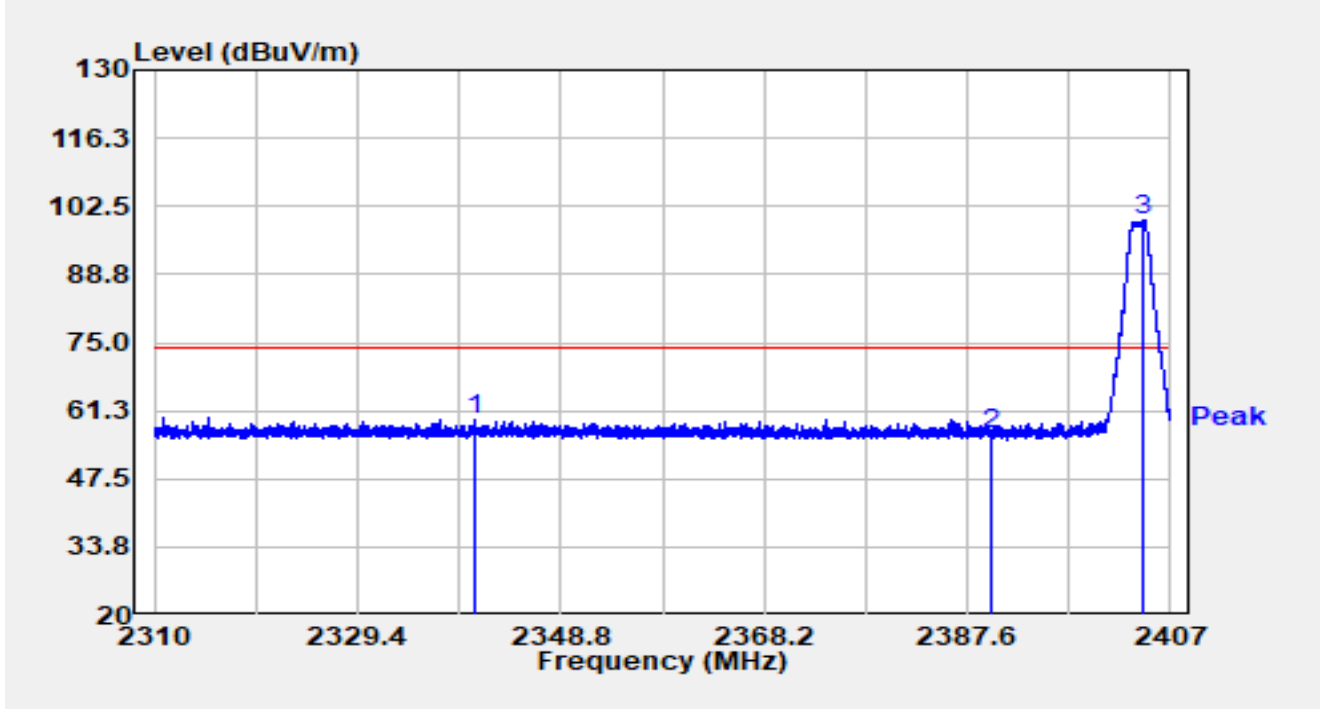


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2340.662        | 26.78          | 32.77      | 59.55                | -14.45      | 74.00          | Peak     |
| 2  |      | 2390.000        | 24.13          | 32.53      | 56.66                | -17.34      | 74.00          | Peak     |
| 3  |      | 2404.488        | 67.03          | 32.48      | 99.52                | N/A         | N/A            | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WZ-AC2                                | Test Date      | 2024-08-26    |
| Test Engineer | Dick Shen                             | Temp./Humidity | 25.7°C /50.3% |
| Factor        | BBHA 9120D_1457_1-18GHz               | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 2M at 2404MHz |                |               |

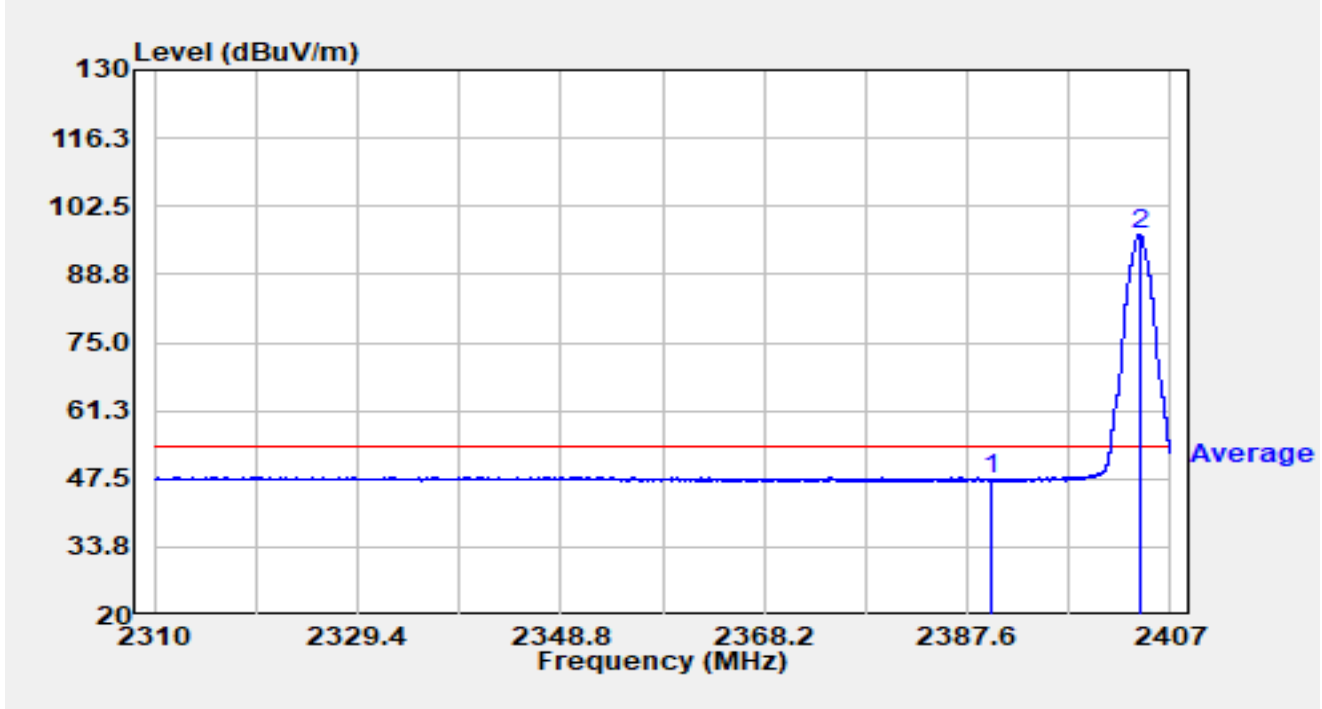


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2390.000        | 14.81          | 32.53      | 47.33                | -6.67       | 54.00          | Average  |
| 2  |      | 2404.071        | 64.47          | 32.48      | 96.95                | N/A         | N/A            | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 2M at 2478MHz |                |               |

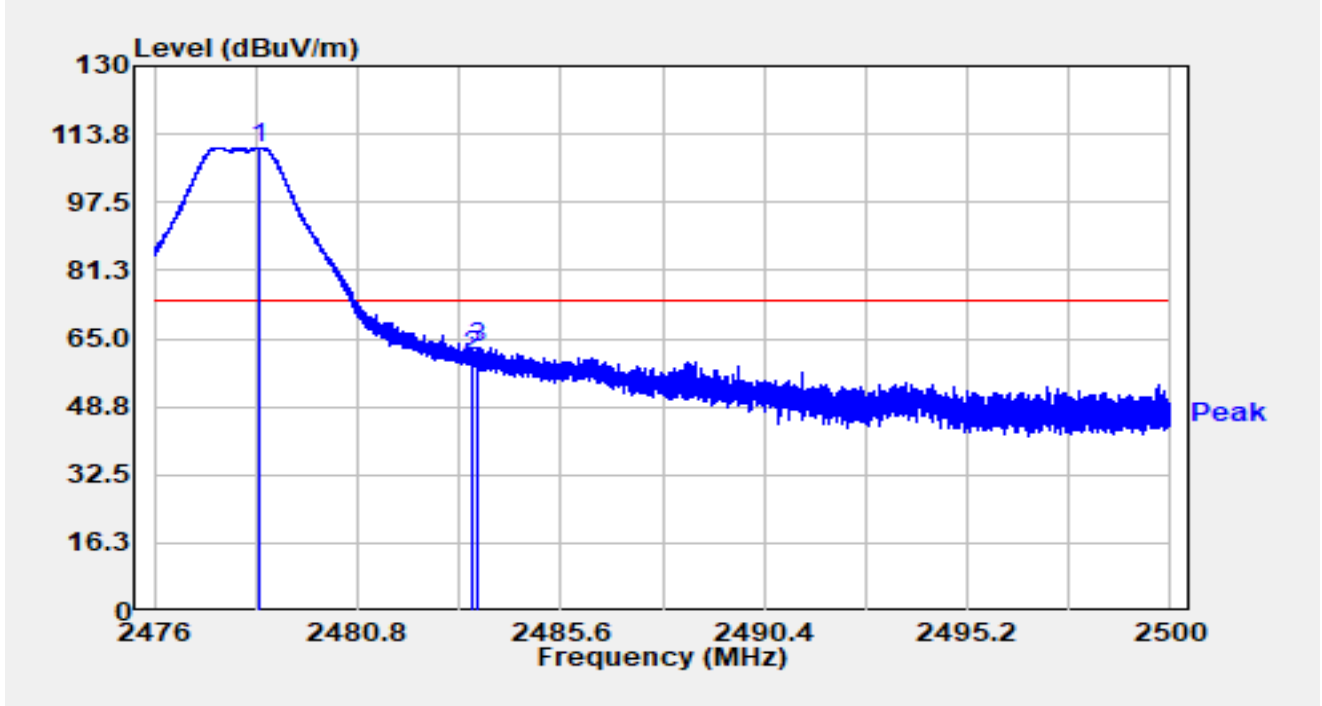


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2478.491        | 80.86          | 29.75      | 110.60               | 36.60       | 74.00          | Peak     |
| 2  |      | 2483.500        | 31.28          | 29.76      | 61.04                | -12.96      | 74.00          | Peak     |
| 3  |      | 2483.651        | 33.19          | 29.76      | 62.95                | -11.05      | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Horizontal    |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 2M at 2478MHz |                |               |

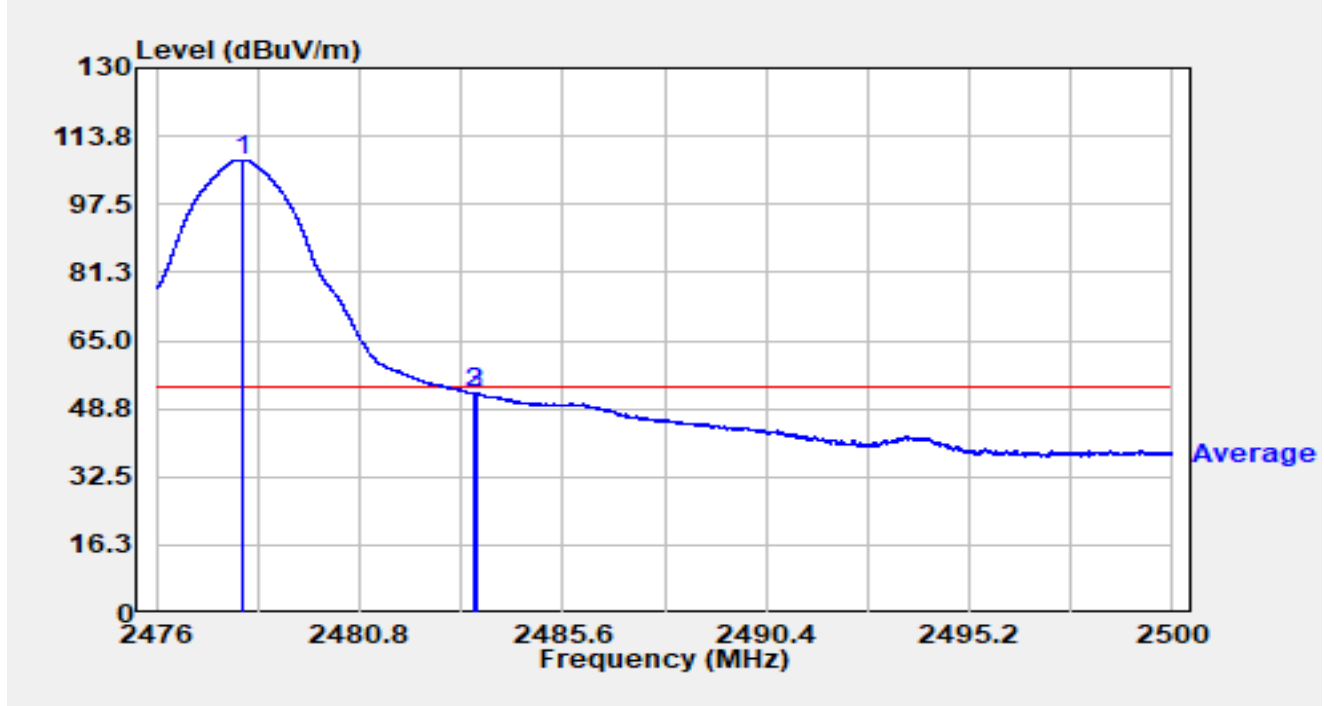


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2478.035        | 78.42          | 29.74      | 108.16               | 54.16       | 54.00          | Average  |
| 2  |      | 2483.500        | 22.60          | 29.76      | 52.36                | -1.64       | 54.00          | Average  |
| 3  |      | 2483.538        | 22.73          | 29.76      | 52.49                | -1.51       | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 2M at 2478MHz |                |               |

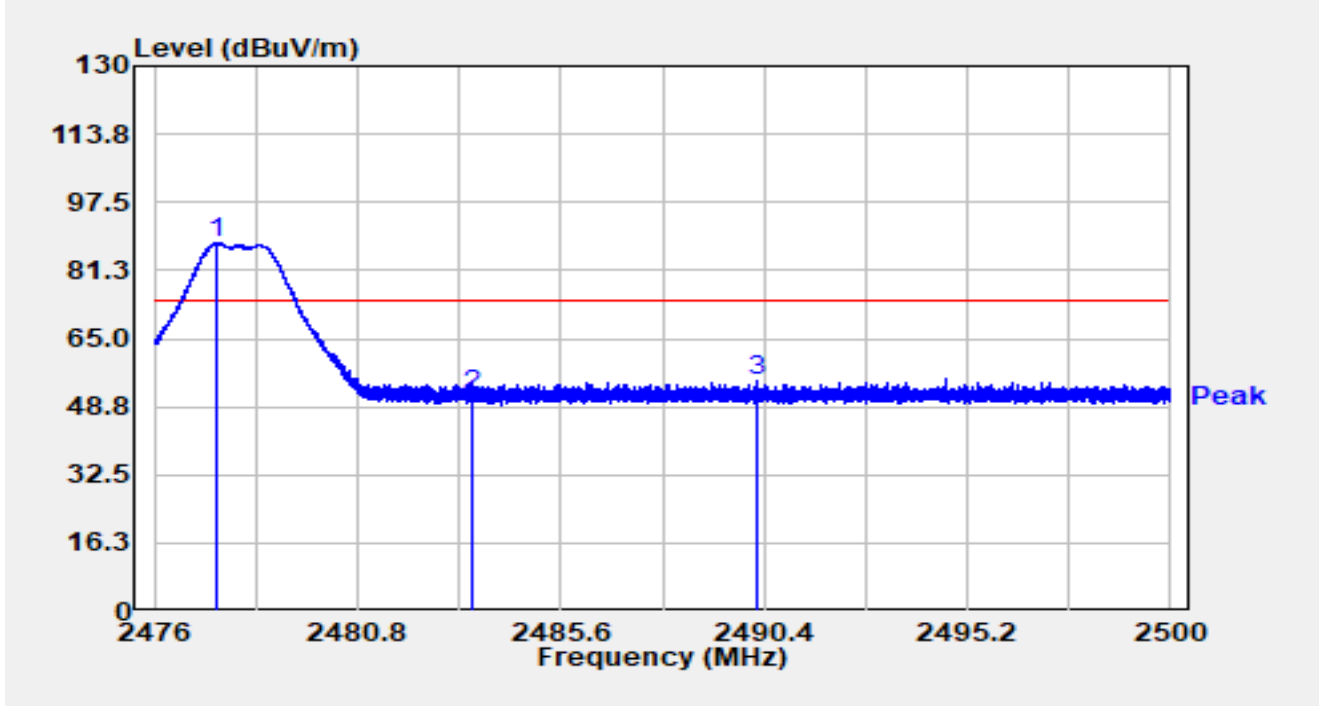


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2477.483        | 57.98          | 29.74      | 87.73                | 13.73       | 74.00          | Peak     |
| 2  |      | 2483.500        | 21.86          | 29.76      | 51.62                | -22.38      | 74.00          | Peak     |
| 3  |      | 2490.227        | 24.98          | 29.79      | 54.77                | -19.23      | 74.00          | Peak     |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WJ-AC2                                | Test Date      | 2024-08-03    |
| Test Engineer | Carl Jiang                            | Temp./Humidity | 27.2°C /65.4% |
| Factor        | 07105 1-18G                           | Polarity       | Vertical      |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | By Battery    |
| Test Mode     | Transmit by Proprietary 2M at 2478MHz |                |               |

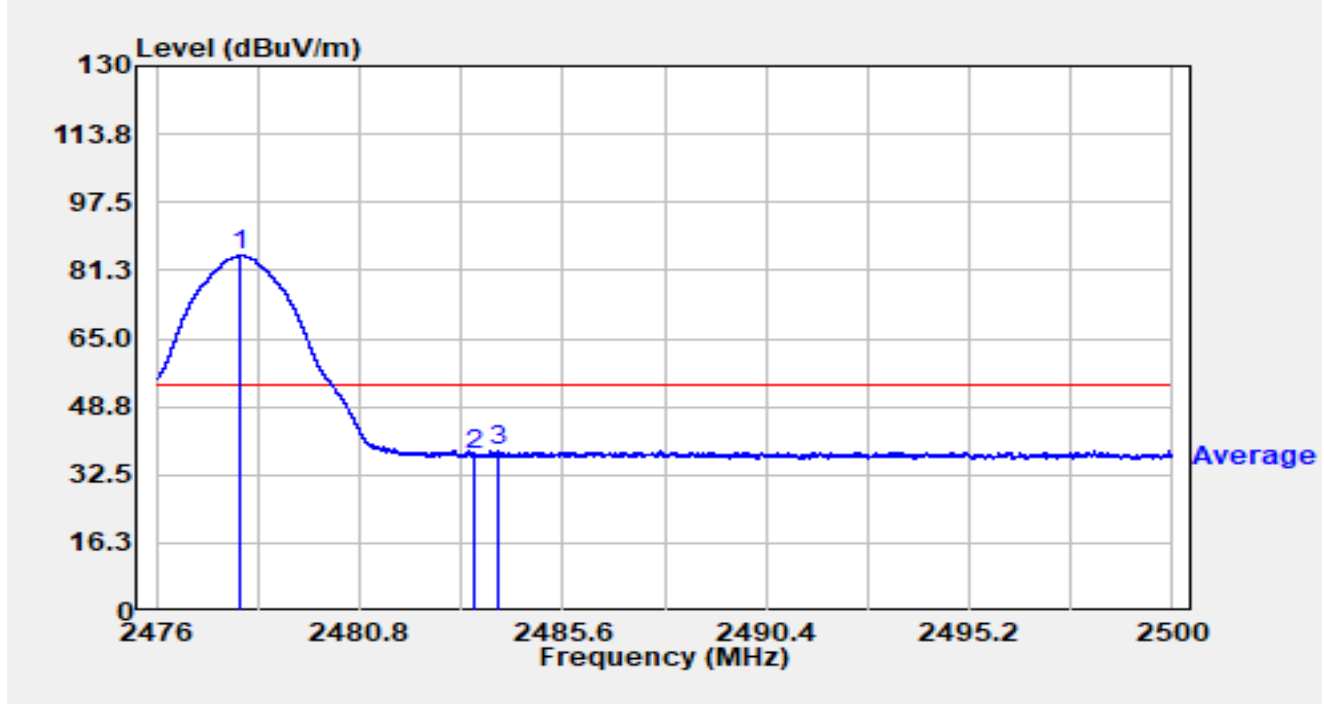


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2477.994        | 55.18          | 29.74      | 84.93                | 30.93       | 54.00          | Average  |
| 2  |      | 2483.500        | 7.48           | 29.76      | 37.24                | -16.76      | 54.00          | Average  |
| 3  |      | 2484.073        | 8.41           | 29.77      | 38.18                | -15.82      | 54.00          | Average  |

Notes:

1. " \*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

### A.8 AC Conducted Emissions Test Result

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WZ-SR2                                | Test Date      | 2024-08-09    |
| Test Engineer | Linda Wei                             | Temp./Humidity | 24.3°C /52.6% |
| Factor        | ENV216_101683_L1_Filter Off_C         | Polarity       | Line1         |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | AC 120V/60Hz  |
| Test Mode     | Transmit by Proprietary 2M at 2478MHz |                |               |

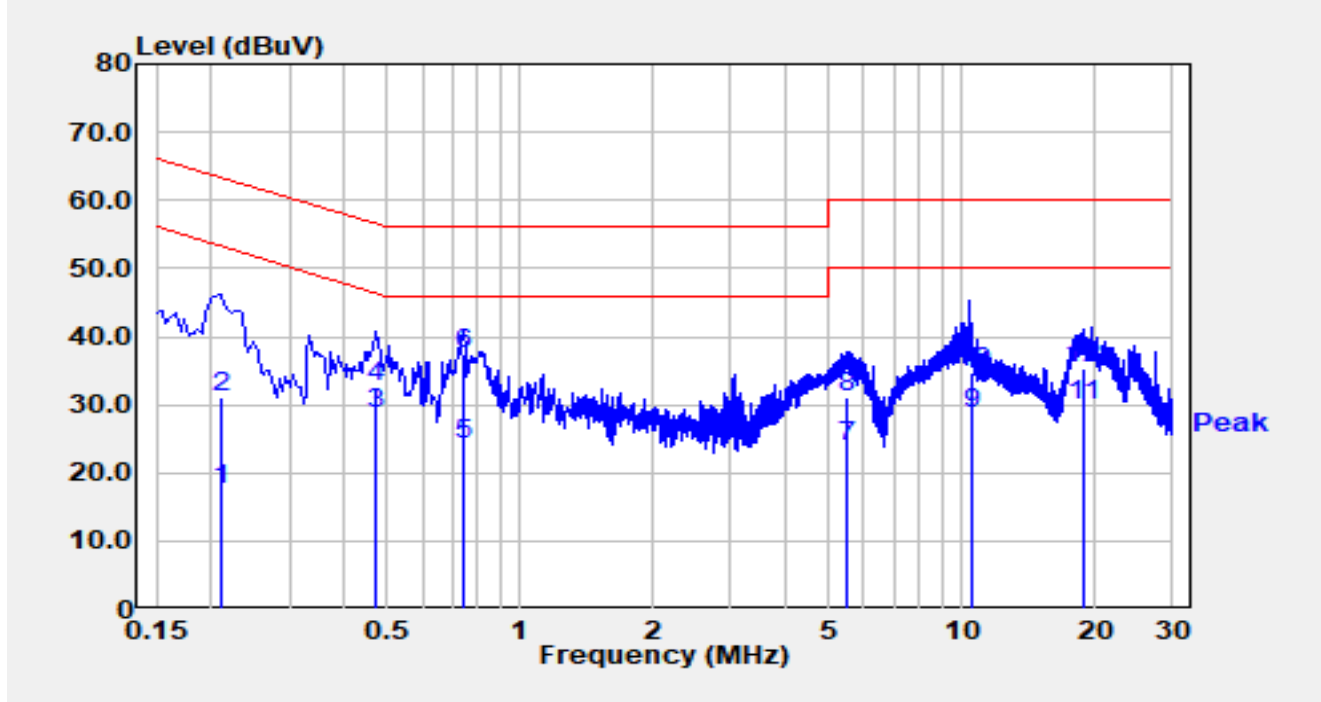

| No | Mark | Frequency (MHz) | Reading (dBm) | C.F (dB) | Measurement (dBm) | Margin (dB) | Limit (dBm) | Detector |
|----|------|-----------------|---------------|----------|-------------------|-------------|-------------|----------|
| 1  |      | 0.211           | 7.60          | 9.82     | 17.42             | -35.75      | 53.17       | Average  |
| 2  |      | 0.211           | 21.40         | 9.82     | 31.22             | -31.95      | 63.17       | QP       |
| 3  | *    | 0.469           | 18.70         | 9.91     | 28.61             | -17.92      | 46.53       | Average  |
| 4  |      | 0.469           | 22.60         | 9.91     | 32.51             | -24.02      | 56.53       | QP       |
| 5  |      | 0.746           | 14.00         | 10.02    | 24.02             | -21.98      | 46.00       | Average  |
| 6  |      | 0.746           | 27.30         | 10.02    | 37.32             | -18.68      | 56.00       | QP       |
| 7  |      | 5.520           | 13.50         | 10.21    | 23.71             | -26.29      | 50.00       | Average  |
| 8  |      | 5.520           | 20.80         | 10.21    | 31.01             | -28.99      | 60.00       | QP       |
| 9  |      | 10.480          | 18.20         | 10.38    | 28.58             | -21.42      | 50.00       | Average  |
| 10 |      | 10.480          | 24.40         | 10.38    | 34.78             | -25.22      | 60.00       | QP       |
| 11 |      | 18.770          | 19.10         | 10.90    | 30.00             | -20.00      | 50.00       | Average  |
| 12 |      | 18.770          | 24.50         | 10.90    | 35.40             | -24.60      | 60.00       | QP       |


Notes:

1. " \*", means this data is the worst emission level.

2. C.F (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB).

3. Measurement (dBm) = Reading (dBm) + C.F (dB).

|               |                                       |                |               |
|---------------|---------------------------------------|----------------|---------------|
| Site          | WZ-SR2                                | Test Date      | 2024-08-09    |
| Test Engineer | Linda Wei                             | Temp./Humidity | 24.3°C /52.6% |
| Factor        | ENV216_101683_N_Filter Off_C          | Polarity       | Neutral       |
| EUT           | Wireless Stereo Microphone            | Test Voltage   | AC 120V/60Hz  |
| Test Mode     | Transmit by Proprietary 2M at 2478MHz |                |               |

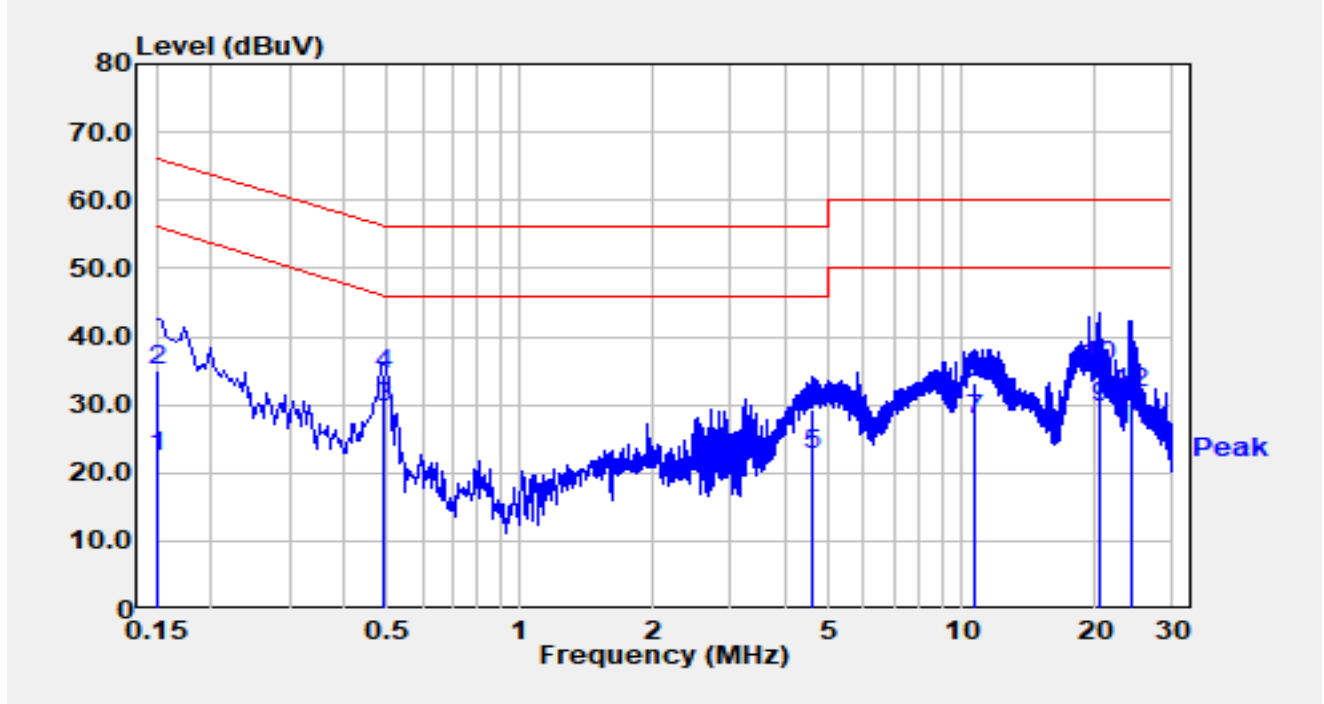

| No | Mark | Frequency (MHz) | Reading (dBm) | C.F (dB) | Measurement (dBm) | Margin (dB) | Limit (dBm) | Detector |
|----|------|-----------------|---------------|----------|-------------------|-------------|-------------|----------|
| 1  |      | 0.151           | 12.20         | 10.13    | 22.33             | -33.61      | 55.94       | Average  |
| 2  |      | 0.151           | 24.90         | 10.13    | 35.03             | -30.91      | 65.94       | QP       |
| 3  | *    | 0.491           | 19.30         | 10.17    | 29.47             | -16.69      | 46.15       | Average  |
| 4  |      | 0.491           | 24.40         | 10.17    | 34.57             | -21.59      | 56.15       | QP       |
| 5  |      | 4.580           | 12.10         | 10.44    | 22.54             | -23.46      | 46.00       | Average  |
| 6  |      | 4.580           | 18.90         | 10.44    | 29.34             | -26.66      | 56.00       | QP       |
| 7  |      | 10.730          | 17.00         | 10.65    | 27.65             | -22.35      | 50.00       | Average  |
| 8  |      | 10.730          | 22.70         | 10.65    | 33.35             | -26.65      | 60.00       | QP       |
| 9  |      | 20.400          | 18.50         | 11.22    | 29.72             | -20.28      | 50.00       | Average  |
| 10 |      | 20.400          | 24.40         | 11.22    | 35.62             | -24.38      | 60.00       | QP       |
| 11 |      | 24.080          | 15.20         | 11.13    | 26.33             | -23.67      | 50.00       | Average  |
| 12 |      | 24.080          | 20.70         | 11.13    | 31.83             | -28.17      | 60.00       | QP       |

Notes:

1. " \*", means this data is the worst emission level.

2. C.F (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB).

3. Measurement (dBm) = Reading (dBm) + C.F (dB).

## **Appendix B - Test Setup Photograph**

Refer to “2407RSU040-UT” file.

## Appendix C - EUT Photograph

Refer to “2407RSU040-UE” file.

---

The End

---