



Necessary Bandwidth - STD Mode, 35mW, 951.875 MHz


Step 1

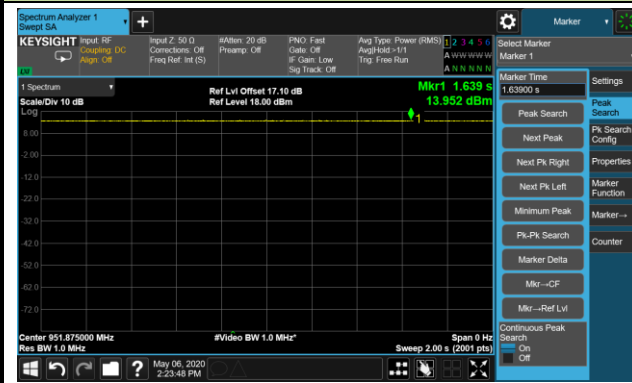

Step 2

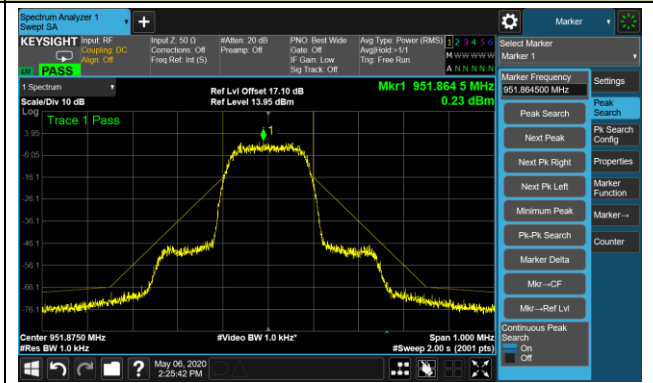


Step 3

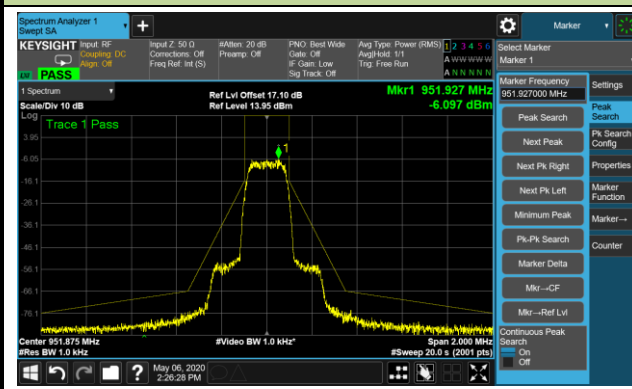


Necessary Bandwidth - STD Mode, 35mW, 952.975MHz



Step 1

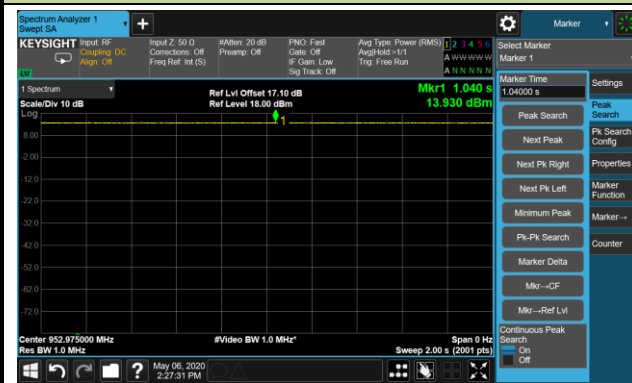

Step 2

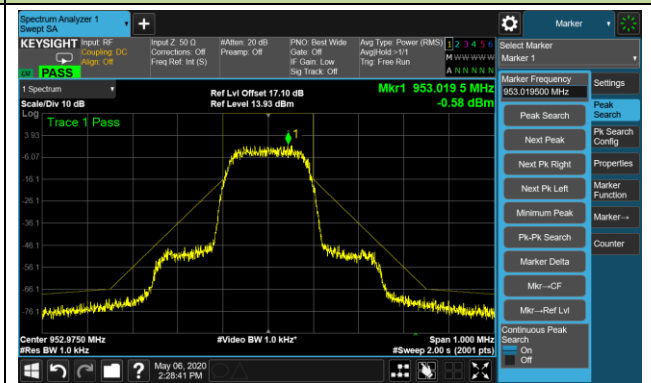


Step 3

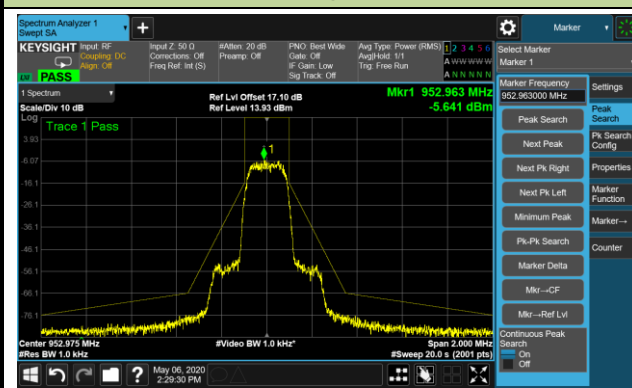


Necessary Bandwidth - STD Mode, 35mW, 956.125MHz



Step 1

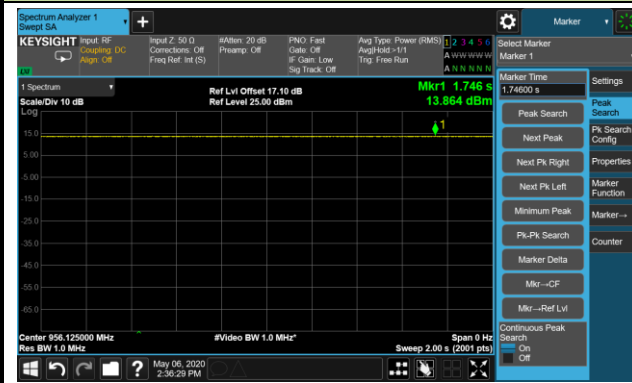

Step 2

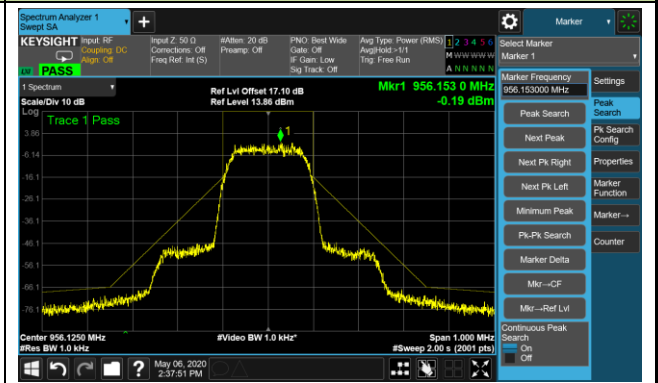

Step 3

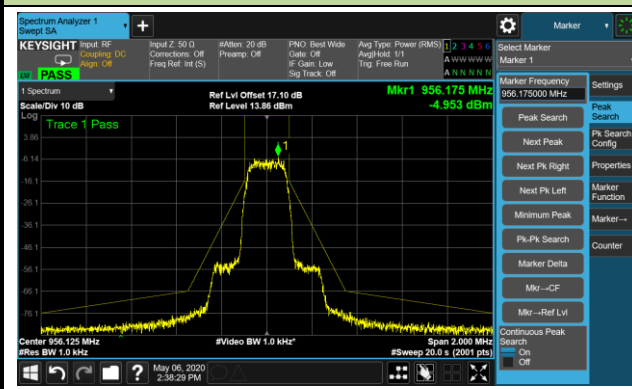


Necessary Bandwidth - STD Mode, 35mW, 956.575MHz



Step 1



Step 2

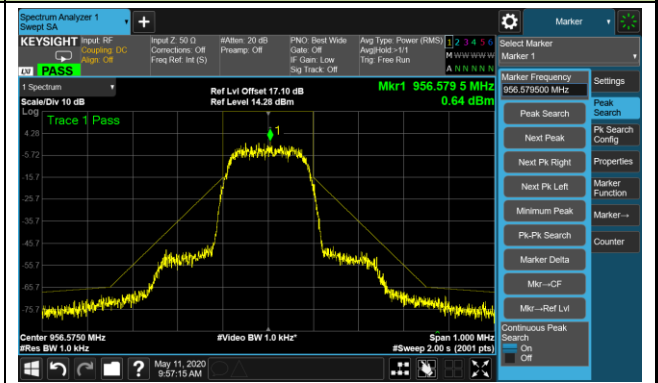


Step 3

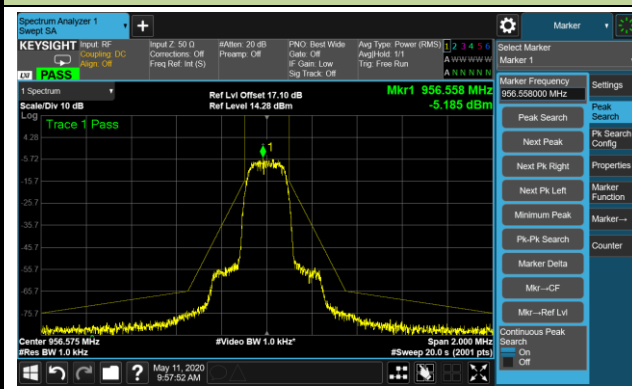


Necessary Bandwidth - STD Mode, 35mW, 959.725MHz



Step 1

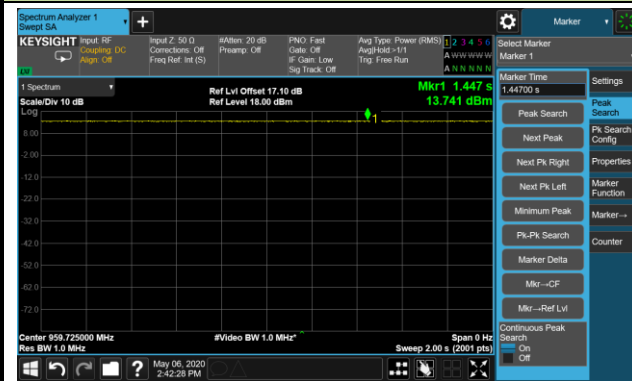

Step 2

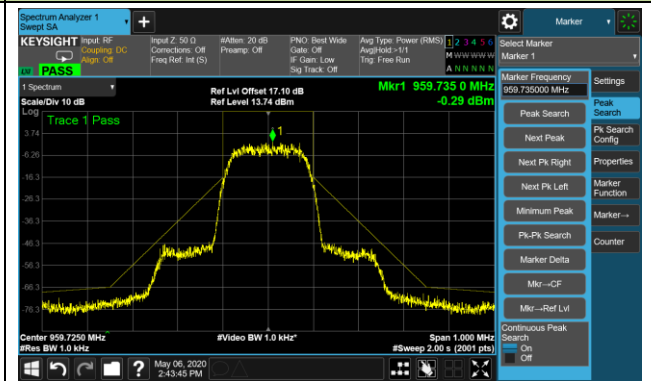


Step 3

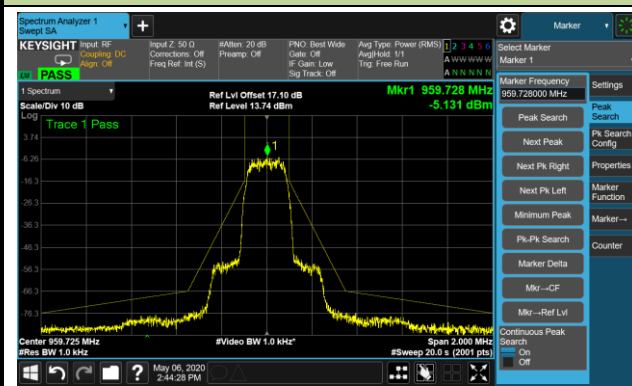


Necessary Bandwidth - HD Mode, 2mW, 941.625MHz



Step 1

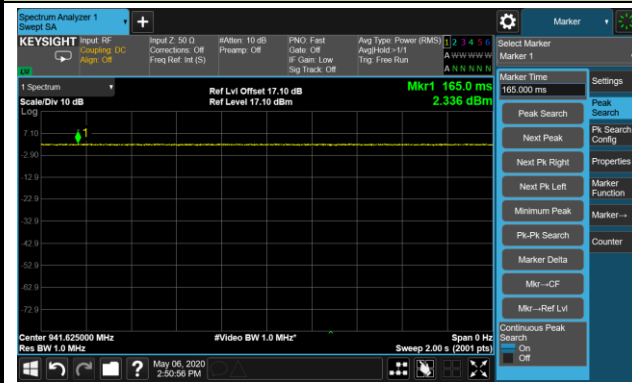

Step 2

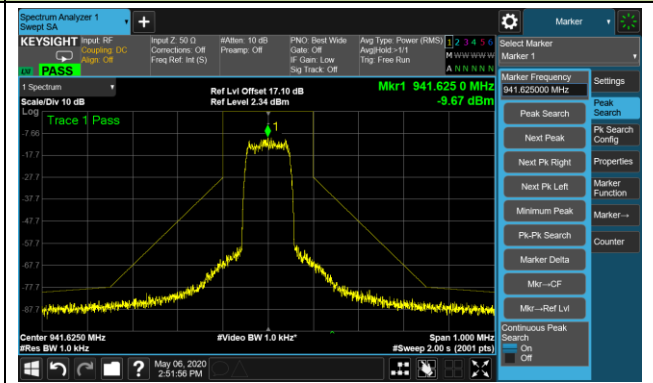


Step 3

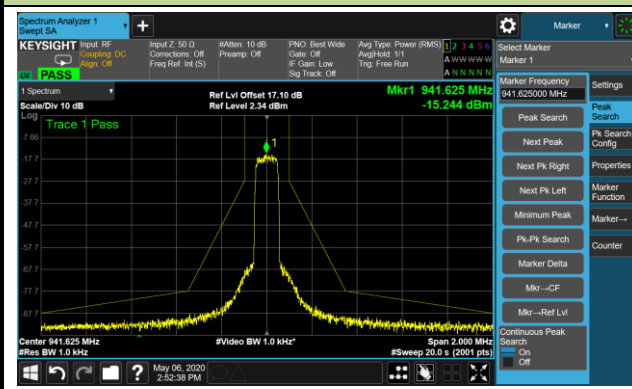


Necessary Bandwidth - HD Mode, 2mW, 946.750MHz



Step 1

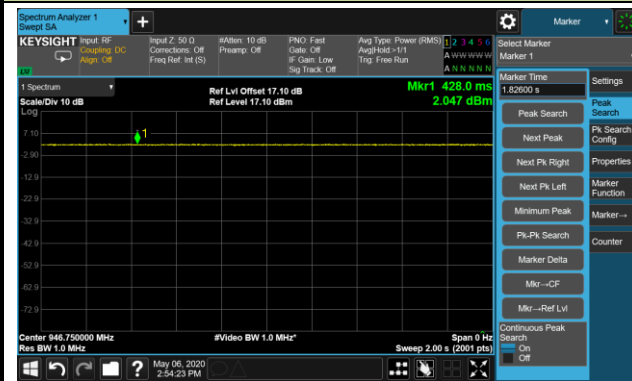

Step 2

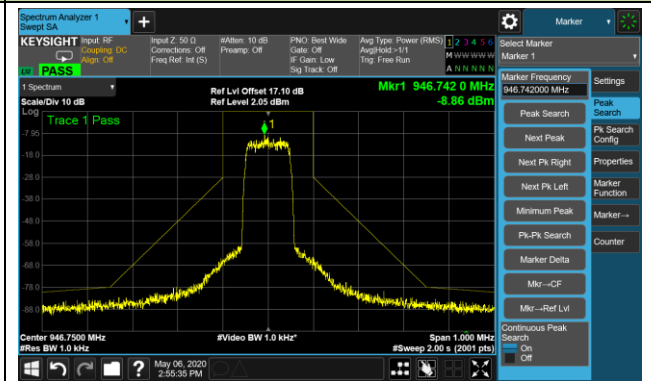


Step 3

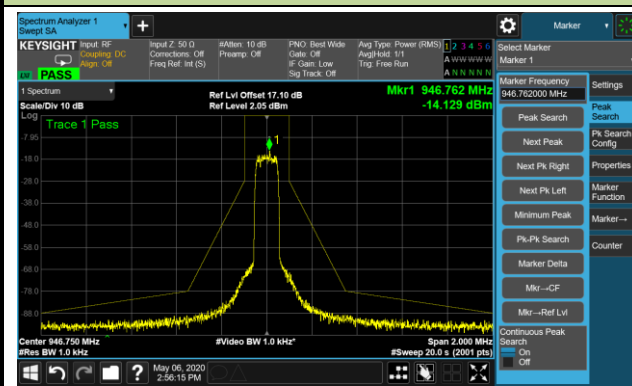


Necessary Bandwidth - HD Mode, 2mW, 951.875 MHz


Step 1

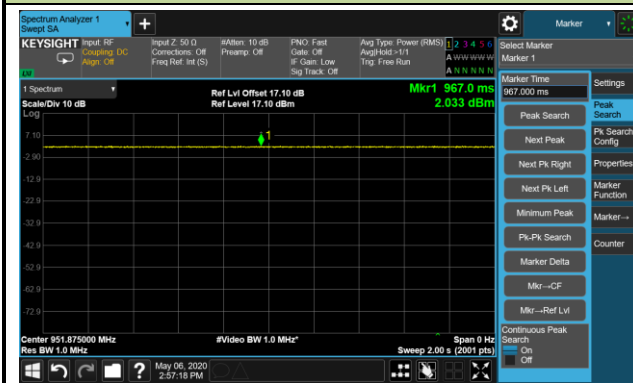

Step 2

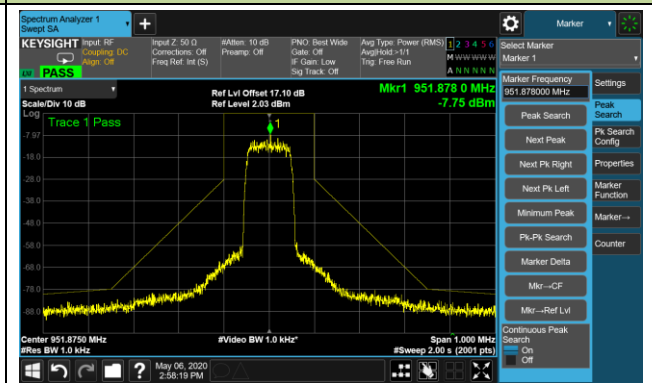


Step 3

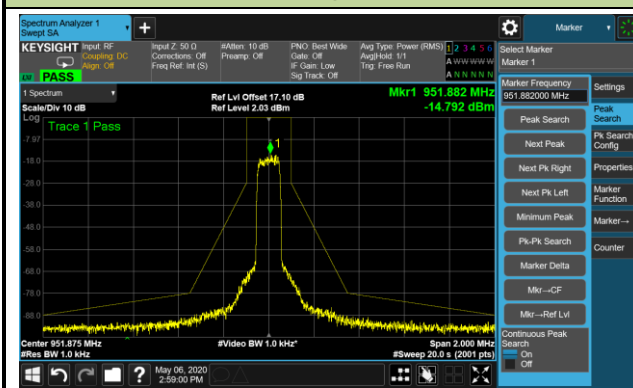


Necessary Bandwidth - HD Mode, 2mW, 952.975MHz


Step 1

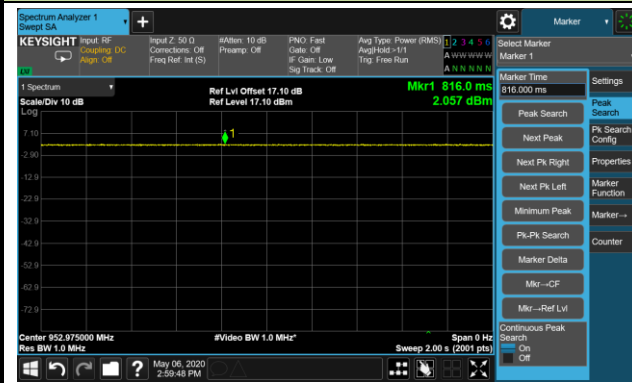

Step 2

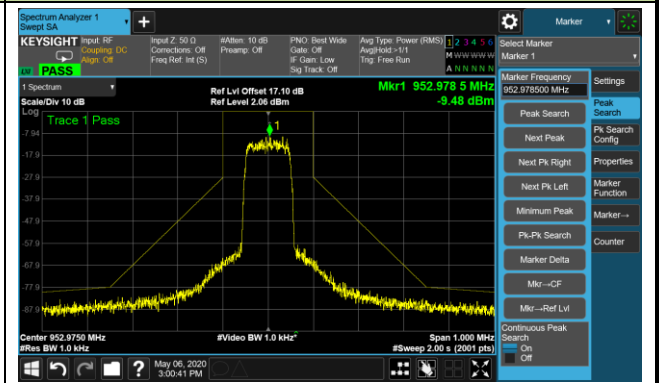


Step 3

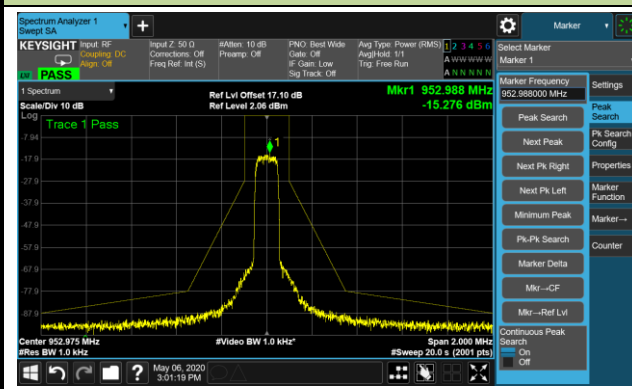


Necessary Bandwidth - HD Mode, 2mW, 956.125MHz



Step 1

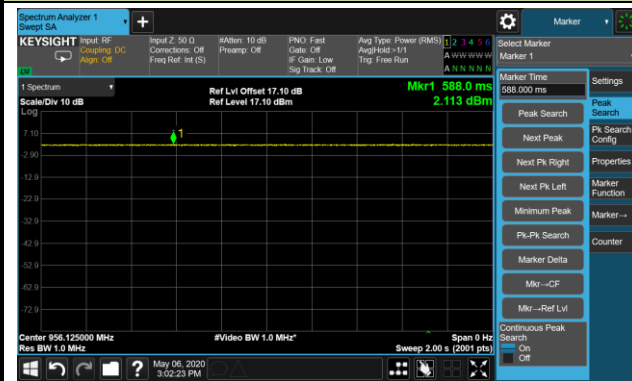

Step 2

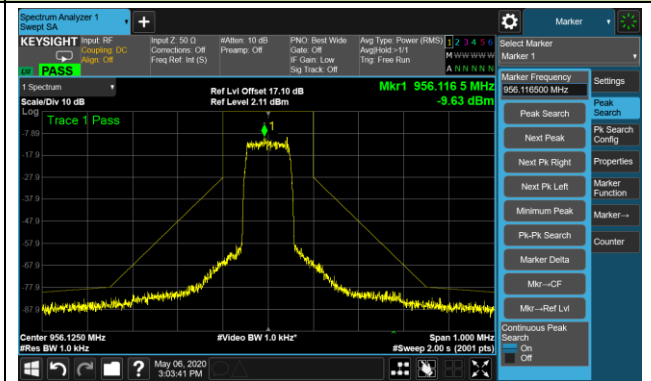


Step 3

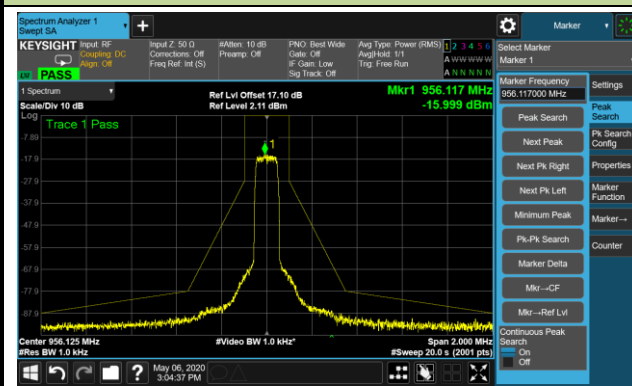


Necessary Bandwidth - HD Mode, 2mW, 956.575MHz



Step 1

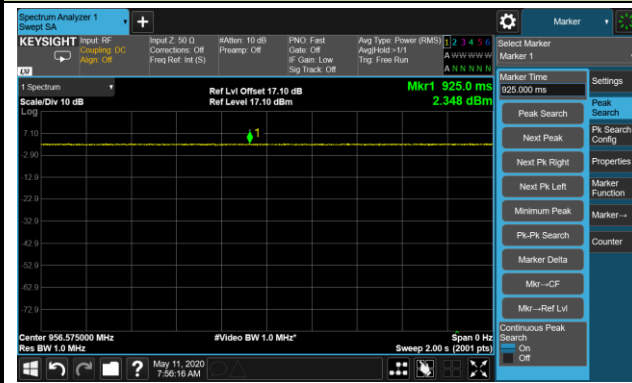

Step 2

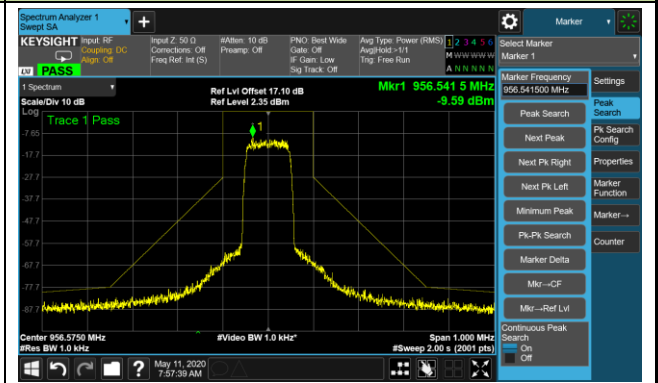


Step 3

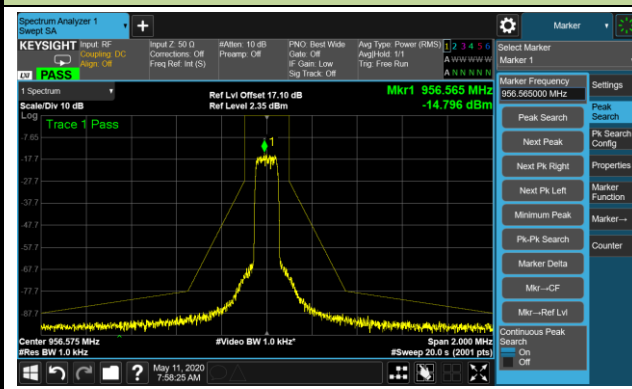


Necessary Bandwidth - HD Mode, 2mW, 959.725MHz



Step 1

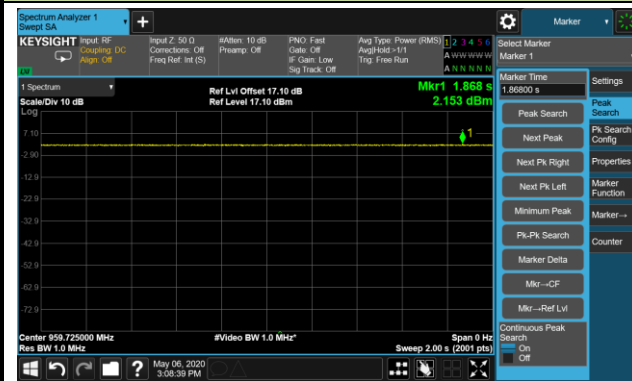

Step 2

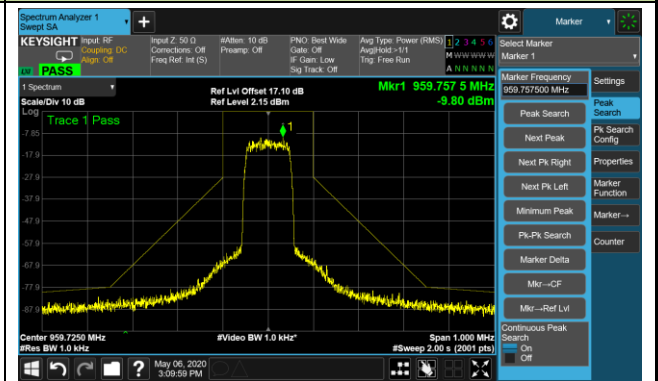

Step 3

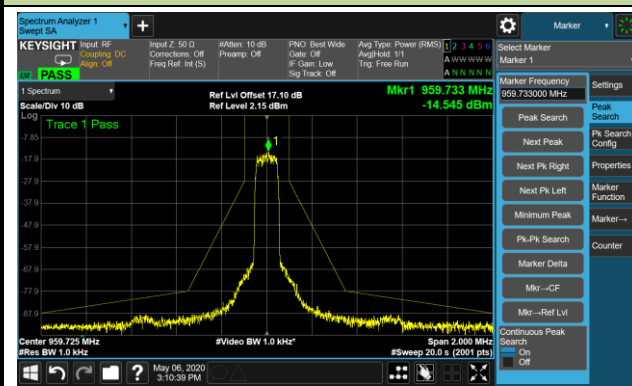

6.7. Radiated Spurious Emissions Measurement

6.7.1. Test Limit

According to FCC Part 74.861(e)(7), beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2.

State	Frequency Range		
	47MHz to 74MHz, 87.5MHz to 137MHz 174MHz to 230MHz, 470MHz to 862MHz	Other Frequencies below 1000MHz	Frequencies above 1000MHz
Operation	4nW	250nW	1uW
Standby	2nW	2nW	20nW

6.7.2. Test Procedure Used

ETSI EN 300 422-1 V1.4.2 clause 8.4.2.

6.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
25 ~ 30 MHz	9 kHz
30 ~ 1000 MHz	100 kHz
1000 ~ 6000 MHz	1 MHz

Emissions shall be investigated up to the 10th harmonic of the fundamental.


Compliance with the emission limits shall be demonstrated using a RMS Average detector.

All significant broadband and narrowband signals found in the preliminary sweeps were measured using a peak detector at a test distance of 3 meters.


At each frequency at which a component is detected, the sample shall be rotated to obtain maximum response and the effective radiated power of that component determined by a substitution measurement.

6.7.4. Test Setup

Below 1GHz Test Setup:

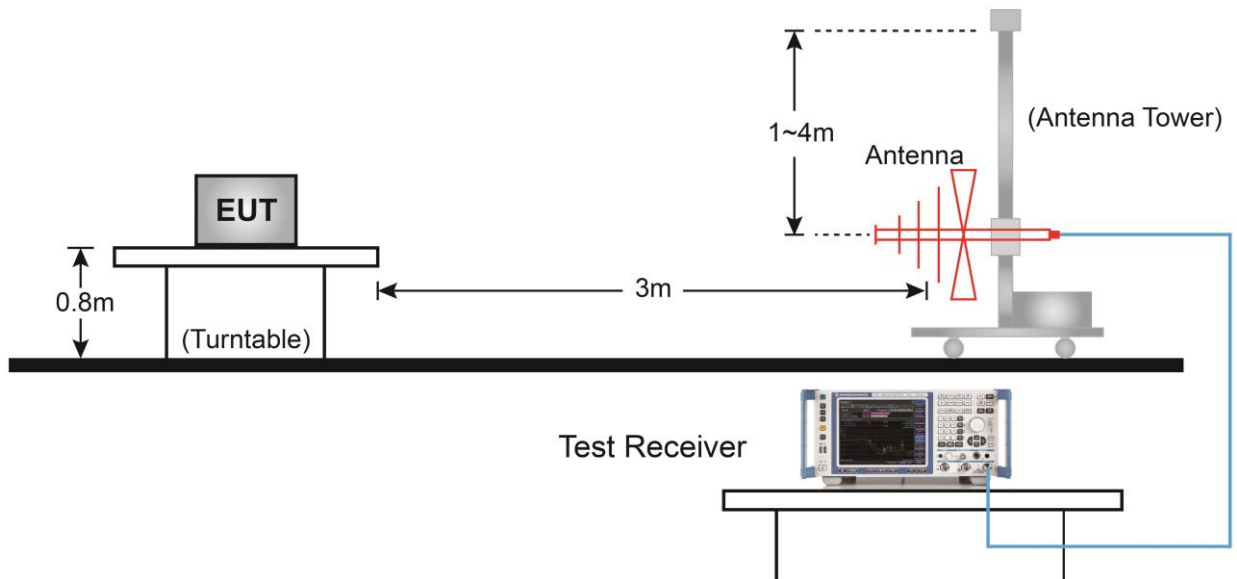

Above 1GHz Test Setup:

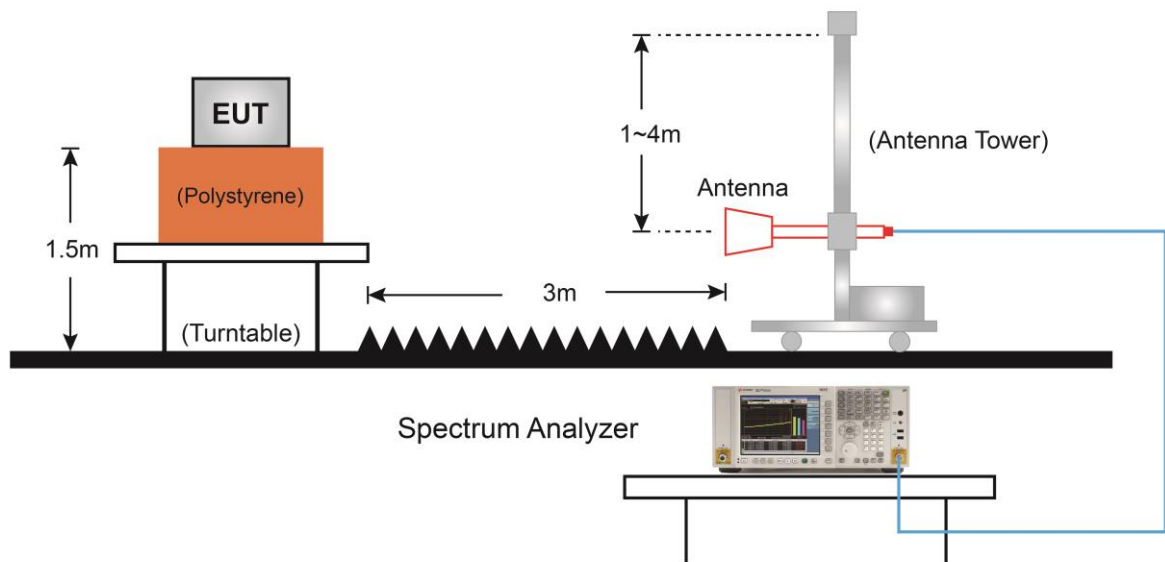

6.7.5. Test Result

Test Site	AC1	Temperature	25°C
Test Engineer	Buter Shi	Relative Humidity	54%
Test Mode	STD Mode, 35mW	Test Date	2020/05/16

Test Channel (MHz)	Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
941.625	2824.9	H	-66.3	0.7	11.1	-55.9	-30.0	-25.9
	3766.5	H	-67.1	0.8	12.3	-55.6	-30.0	-25.6
	7533.0	H	-57.7	1.2	11.6	-47.3	-30.0	-17.3
	2824.9	V	-63.9	0.7	11.1	-53.5	-30.0	-23.5
	3766.5	V	-65.1	0.8	12.3	-53.6	-30.0	-23.6
	7533.0	V	-56.4	1.2	11.6	-46.0	-30.0	-16.0
946.750	2480.3	H	-67.5	0.6	10.7	-57.5	-30.0	-27.5
	3787.0	H	-67.0	0.8	12.3	-55.5	-30.0	-25.5
	7574.0	H	-60.0	1.1	11.7	-49.4	-30.0	-19.4
	2480.3	V	-66.4	0.6	10.7	-56.4	-30.0	-26.4
	3787.0	V	-66.7	0.8	12.3	-55.2	-30.0	-25.2
	7574.0	V	-57.9	1.1	11.7	-47.3	-30.0	-17.3
951.875	2855.6	H	-67.7	0.7	11.1	-57.3	-30.0	-27.3
	3807.5	H	-67.9	0.8	12.3	-56.4	-30.0	-26.4
	7663.0	H	-59.5	1.1	12.0	-48.6	-30.0	-18.6
	2855.6	V	-67.5	0.7	11.1	-57.1	-30.0	-27.1
	3807.5	V	-67.8	0.8	12.3	-56.3	-30.0	-26.3
	7663.0	V	-60.2	1.1	12.0	-49.3	-30.0	-19.3

Note 1: $EIRP (dBm) = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBi)}$

Note 2: $Margin (dB) = EIRP (dBm) - Limit (dBm)$

Note 3: All data in this table is based on peak detection. Due to peak detection will yield amplitudes equal to or greater than amplitudes measured with the RMS detector. Thus, the data measured using the peak detector of a spectrum analyzer or EMI receiver will represent the worst-case results.

Test Site	AC1	Temperature	25°C
Test Engineer	Buter Shi	Relative Humidity	54%
Test Mode	STD Mode, 35mW	Test Date	2020/05/16

Test Channel (MHz)	Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
952.975	2858.9	H	-67.5	0.7	11.1	-57.1	-30.0	-27.1
	3811.9	H	-68.0	0.8	12.3	-56.5	-30.0	-26.5
	7623.8	H	-58.1	1.2	11.9	-47.4	-30.0	-17.4
	2858.9	V	-67.6	0.7	11.1	-57.2	-30.0	-27.2
	3811.9	V	-67.6	0.8	12.3	-56.1	-30.0	-26.1
	7623.8	V	-59.6	1.2	11.9	-48.9	-30.0	-18.9
956.125	2868.4	H	-67.4	0.7	11.1	-57.0	-30.0	-27.0
	3824.5	H	-68.0	0.8	12.3	-56.5	-30.0	-26.5
	7649.0	H	-59.6	1.2	11.9	-48.9	-30.0	-18.9
	2868.4	V	-67.4	0.7	11.1	-57.0	-30.0	-27.0
	3824.5	V	-67.8	0.8	12.3	-56.3	-30.0	-26.3
	7649.0	V	-59.4	1.2	11.9	-48.7	-30.0	-18.7
956.575	2869.7	H	-67.5	0.7	11.1	-57.1	-30.0	-27.1
	3826.3	H	-67.8	0.8	12.3	-56.3	-30.0	-26.3
	7652.6	H	-59.1	1.2	11.9	-48.4	-30.0	-18.4
	2869.7	V	-67.2	0.7	11.1	-56.8	-30.0	-26.8
	3826.3	V	-68.4	0.8	12.3	-56.9	-30.0	-26.9
	7652.6	V	-59.1	1.2	11.9	-48.4	-30.0	-18.4
959.725	2879.2	H	-67.0	0.7	11.1	-56.6	-30.0	-26.6
	3838.9	H	-67.5	0.8	12.3	-56.0	-30.0	-26.0
	7677.8	H	-59.0	1.1	12.0	-48.1	-30.0	-18.1
	2879.2	V	-67.3	0.7	11.1	-56.9	-30.0	-26.9
	3838.9	V	-68.3	0.8	12.3	-56.8	-30.0	-26.8
	7677.8	V	-59.6	1.1	12.0	-48.7	-30.0	-18.7

Note 1: $EIRP (dBm) = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBi)}$

Note 2: $Margin (dB) = EIRP (dBm) - Limit (dBm)$

Note 3: All data in this table is based on peak detection. Due to peak detection will yield amplitudes equal to or greater than amplitudes measured with the RMS detector. Thus, the data measured using the peak detector of a spectrum analyzer or EMI receiver will represent the worst-case results.

Test Site	AC1	Temperature	25°C
Test Engineer	Buter Shi	Relative Humidity	54%
Test Mode	HD Mode	Test Date	2020/05/16

Test Channel (MHz)	Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
941.625	2824.9	H	-66.7	0.7	11.1	-56.3	-30.0	-26.3
	3766.5	H	-66.6	0.8	12.3	-55.1	-30.0	-25.1
	7533.0	H	-57.6	1.2	11.6	-47.2	-30.0	-17.2
	2824.9	V	-67.4	0.7	11.1	-57.0	-30.0	-27.0
	3766.5	V	-67.6	0.8	12.3	-56.1	-30.0	-26.1
	7533.0	V	-58.2	1.2	11.6	-47.8	-30.0	-17.8
946.750	2480.3	H	-67.7	0.6	10.7	-57.7	-30.0	-27.7
	3787.0	H	-67.4	0.8	12.3	-55.9	-30.0	-25.9
	7574.0	H	-59.2	1.1	11.7	-48.6	-30.0	-18.6
	2480.3	V	-67.1	0.6	10.7	-57.1	-30.0	-27.1
	3787.0	V	-67.1	0.8	12.3	-55.6	-30.0	-25.6
	7574.0	V	-57.9	1.1	11.7	-47.3	-30.0	-17.3
951.875	2855.6	H	-67.3	0.7	11.1	-56.9	-30.0	-26.9
	3807.5	H	-68.0	0.8	12.3	-56.5	-30.0	-26.5
	7663.0	H	-59.5	1.1	12.0	-48.6	-30.0	-18.6
	2855.6	V	-67.0	0.7	11.1	-56.6	-30.0	-26.6
	3807.5	V	-67.8	0.8	12.3	-56.3	-30.0	-26.3
	7663.0	V	-59.9	1.1	12.0	-49.0	-30.0	-19.0

Note 1: $EIRP (dBm) = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBi)}$

Note 2: $Margin (dB) = EIRP (dBm) - Limit (dBm)$

Note 3: All data in this table is based on peak detection. Due to peak detection will yield amplitudes equal to or greater than amplitudes measured with the RMS detector. Thus, the data measured using the peak detector of a spectrum analyzer or EMI receiver will represent the worst-case results.

Test Site	AC1	Temperature	25°C
Test Engineer	Buter Shi	Relative Humidity	54%
Test Mode	HD Mode	Test Date	2020/05/16

Test Channel (MHz)	Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
952.975	2858.9	H	-66.8	0.7	11.1	-56.4	-30.0	-26.4
	3811.9	H	-67.8	0.8	12.3	-56.3	-30.0	-26.3
	7623.8	H	-58.7	1.2	11.9	-48.0	-30.0	-18.0
	2858.9	V	-67.4	0.7	11.1	-57.0	-30.0	-27.0
	3811.9	V	-67.3	0.8	12.3	-55.8	-30.0	-25.8
	7623.8	V	-58.6	1.2	11.9	-47.9	-30.0	-17.9
956.125	2868.4	H	-67.0	0.7	11.1	-56.6	-30.0	-26.6
	3824.5	H	-67.7	0.8	12.3	-56.2	-30.0	-26.2
	7649.0	H	-59.5	1.2	11.9	-48.8	-30.0	-18.8
	2868.4	V	-67.4	0.7	11.1	-57.0	-30.0	-27.0
	3824.5	V	-68.3	0.8	12.3	-56.8	-30.0	-26.8
	7649.0	V	-58.2	1.2	11.9	-47.5	-30.0	-17.5
956.575	2869.7	H	-67.2	0.7	11.1	-56.8	-30.0	-26.8
	3826.3	H	-67.6	0.8	12.3	-56.1	-30.0	-26.1
	7652.6	H	-59.1	1.2	11.9	-48.4	-30.0	-18.4
	2869.7	V	-66.4	0.7	11.1	-56.0	-30.0	-26.0
	3826.3	V	-67.5	0.8	12.3	-56.0	-30.0	-26.0
	7652.6	V	-58.7	1.2	11.9	-48.0	-30.0	-18.0
959.725	2879.2	H	-67.2	0.7	11.1	-56.8	-30.0	-26.8
	3838.9	H	-68.5	0.8	12.3	-57.0	-30.0	-27.0
	7677.8	H	-59.3	1.1	12.0	-48.4	-30.0	-18.4
	2879.2	V	-66.3	0.7	11.1	-55.9	-30.0	-25.9
	3838.9	V	-68.4	0.8	12.3	-56.9	-30.0	-26.9
	7677.8	V	-58.6	1.1	12.0	-47.7	-30.0	-17.7

Note 1: $EIRP (dBm) = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBi)}$

Note 2: $Margin (dB) = EIRP (dBm) - Limit (dBm)$

Note 3: All data in this table is based on peak detection. Due to peak detection will yield amplitudes equal to or greater than amplitudes measured with the RMS detector. Thus, the data measured using the peak detector of a spectrum analyzer or EMI receiver will represent the worst-case results.

7. CONCLUSION

The data collected relate only the item(s) tested and show that the unit compliance with all the requirements of Parts 74H of the FCC Rules.

The End

Appendix A – Test Setup Photograph

Refer to “ 2004RSU052-UT” file.

Appendix B – EUT Photograph

Refer to “2004RSU052-UE” file.