
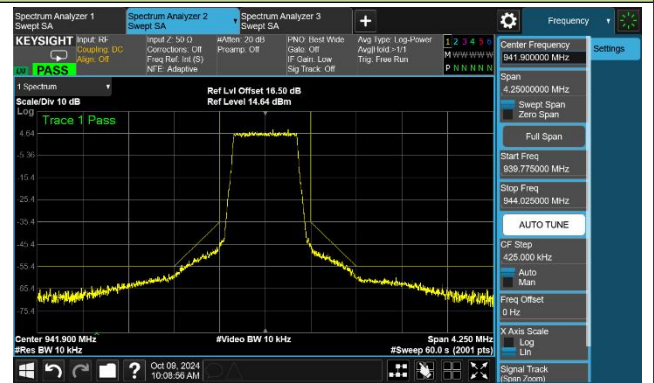


Channel 941.900MHz


[illegible][illegible]

Port C


Channel 953.250MHz

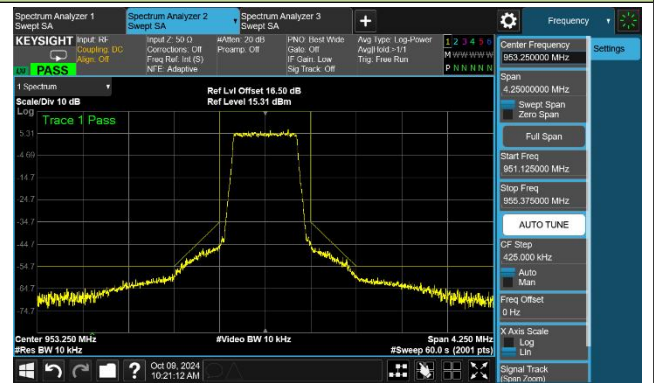

Channel 955.850MHz

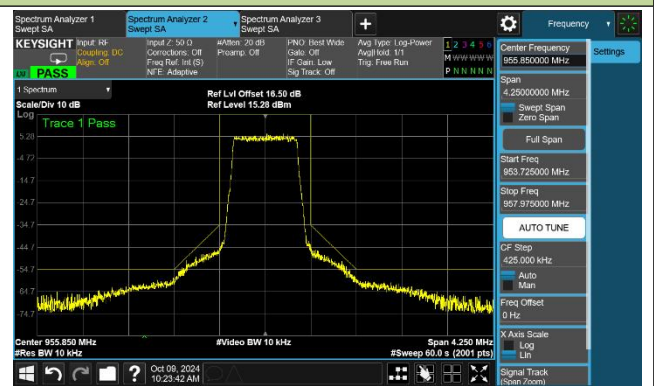


Channel 956.850MHz

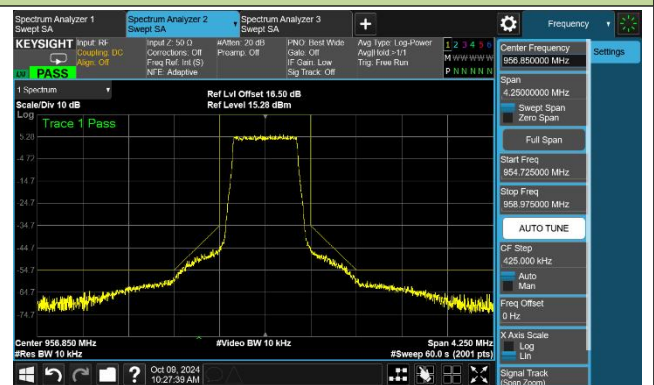

Channel 959.450MHz

Channel 941.900MHz

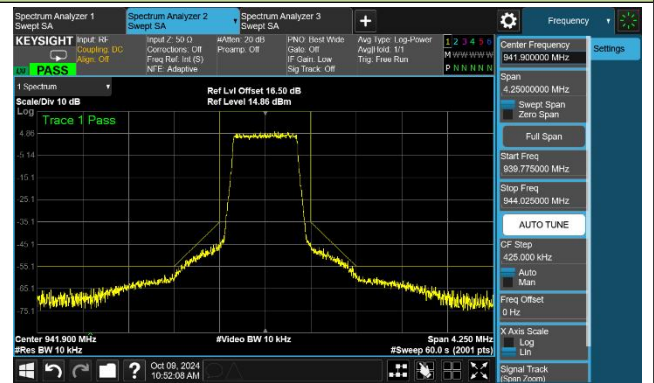

The screenshot displays the Keysight Spectrum Analyzer 1 interface. The main display shows a signal trace with a peak at 946.750 MHz. The y-axis is labeled 'Scale/Div 10 dB' and ranges from -7.5 to 5.3. The x-axis is labeled '#Video BW 10 kHz' and ranges from -10 to 10. The signal trace is labeled 'Trace 1 Pass'. The interface includes a top menu bar with 'Spectrum Analyzer 1', 'Spectrum Analyzer 2', and 'Spectrum Analyzer 3'. The left sidebar contains '1 Spectrum' and 'Scale/Div 10 dB'. The right sidebar contains 'Center Frequency 946.750000 MHz', 'Span 4.2500000 MHz', 'Start Freq 944.625000 MHz', 'Stop Freq 948.875000 MHz', 'AUTO TUNE', 'GF Step 425.000 MHz', 'Auto Man', 'Freq Offset 0.0 Hz', 'X Axis Scale Log Lin', and 'Signal Track'. The bottom status bar shows 'Oct 09, 2024 10:48:26 AM' and 'SRes: BW 10 kHz'.

The screenshot displays a Keysight Spectrum Analyzer interface. At the top, three tabs are visible: "Spectrum Analyzer 1", "Spectrum Analyzer 2", and "Spectrum Analyzer 3". The "KEYSIGHT" logo is on the left. The main display area shows a spectrum plot with a yellow trace. A sharp peak is visible at 951.600 MHz, with a resolution bandwidth (RBW) of 10 kHz. The plot is labeled "Trace 1 Pass". The y-axis represents power in dBm, ranging from -70.0 to -2.0. The x-axis represents frequency in MHz, ranging from 949.0 to 953.0. The plot is titled "Ref Lvl Offset 18.50 dB" and "Ref Level 15.25 dBm".


On the right side, there are several control panels:

- Frequency:** Center Frequency is set to 951.600000 MHz. The span is 4.2500000 MHz. The start frequency is 949.075000 MHz, and the stop frequency is 953.725000 MHz. The resolution bandwidth (RBW) is 10 Hz.
- Span:** Full Span, Sweep Span, Zero Span, and Auto Tune buttons are present.
- GP Step:** Set to 425.0000 MHz.
- Auto Man:** A toggle switch set to "Auto".
- Freq Offset:** Set to 0 Hz.
- XAxis Scale:** Log and Lin buttons are present.
- Signal Trn:** A button for signal tracing.


At the bottom, the Windows taskbar is visible, showing the date and time as "Oct 09, 2024 10:45:01 AM".

Port D


Channel 953.250MHz

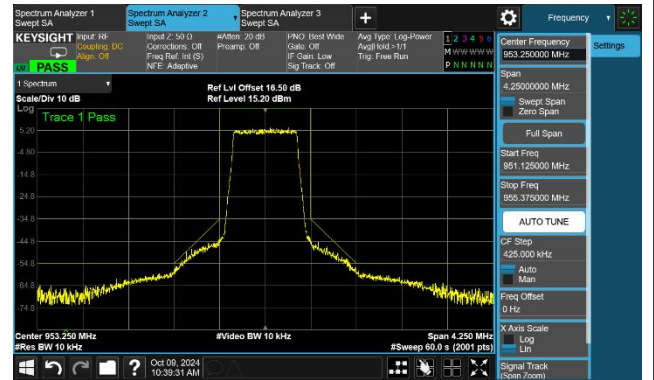

Channel 955.850MHz

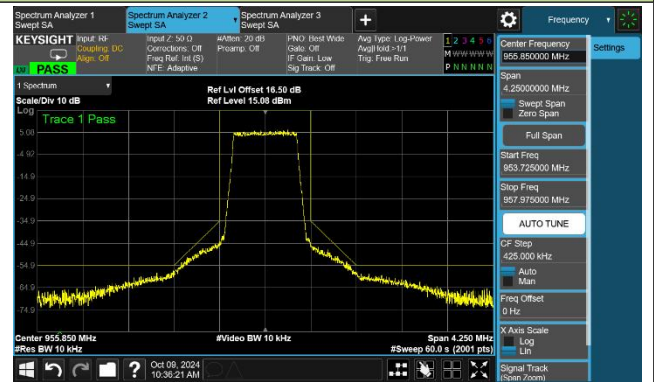

Channel 956.850MHz

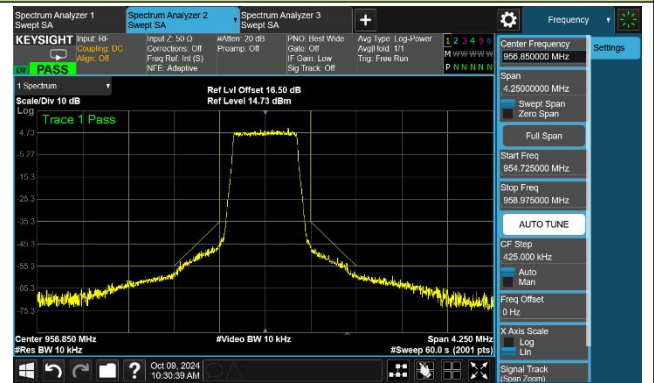

Channel 959.450MHz

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-09~ 2024-10-11	Test Mode	Mode 11

Port A

Channel 941.625MHz



Channel 946.750 MHz




Channel 951.875 MHz




Port A


Channel 952.975MHz

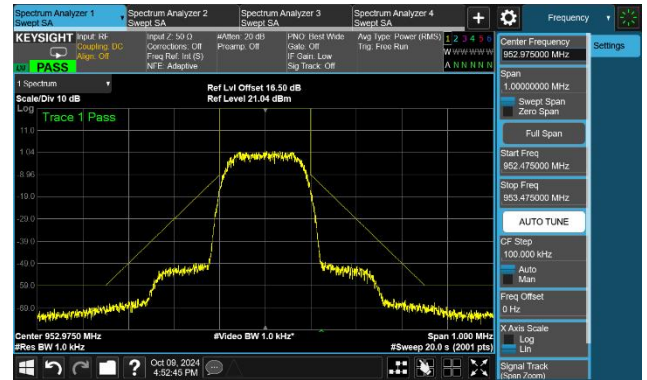


Channel 956.125MHz

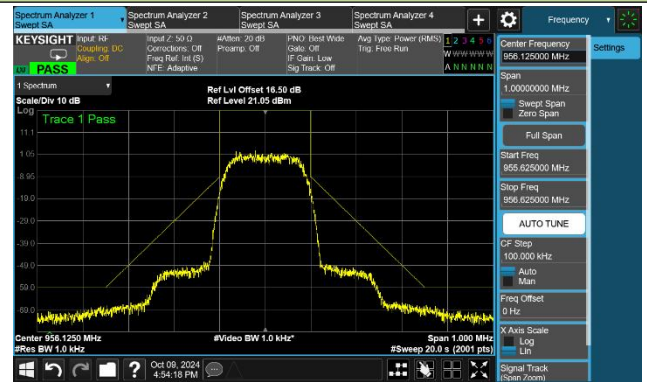

Channel 956.575MHz

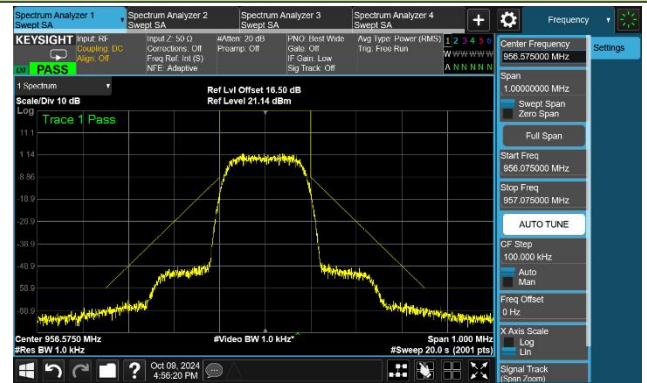


Channel 959.725MHz

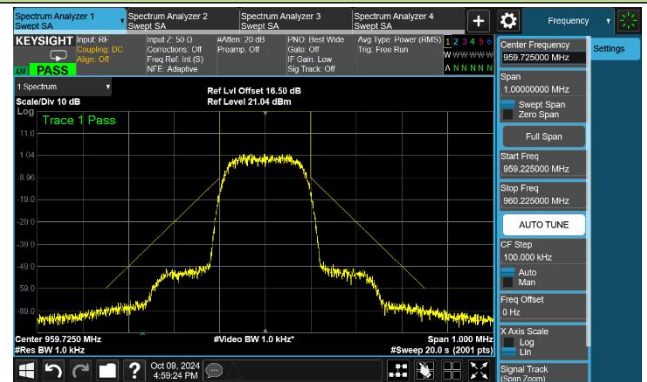


Port B


Channel 941.625MHz

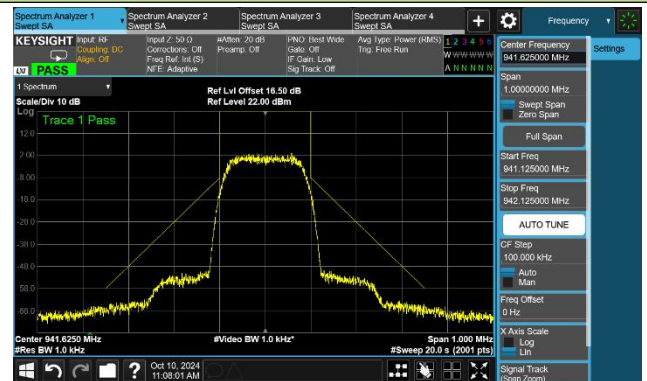


Channel 946.750 MHz

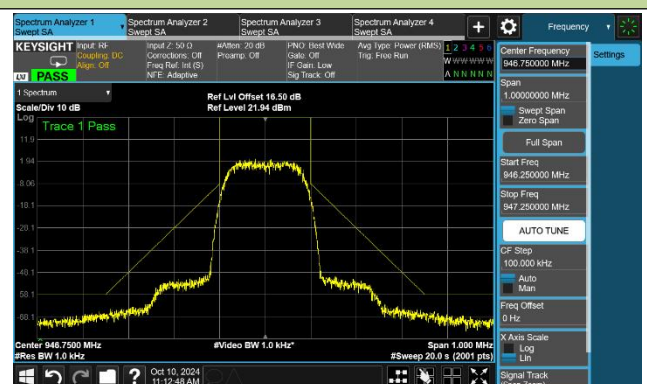

Channel 951.875 MHz

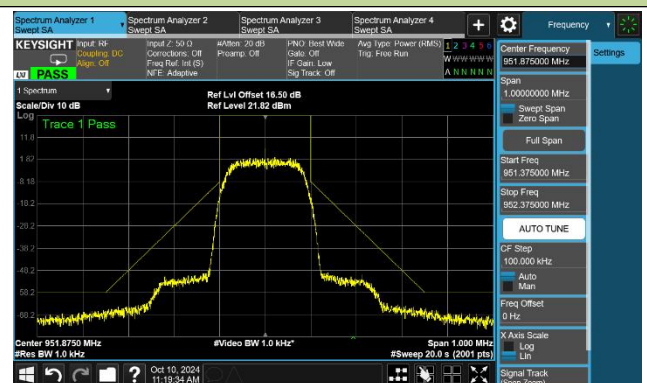


Channel 952.975MHz

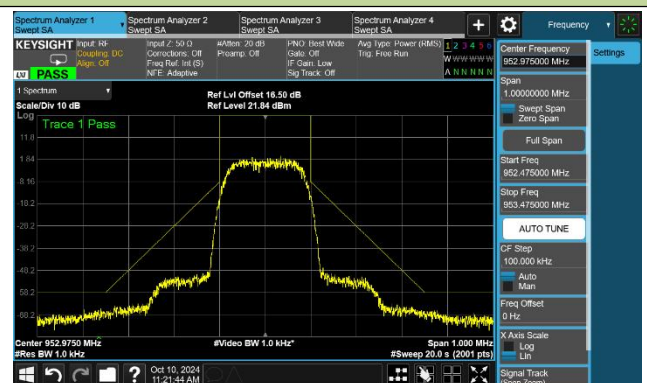


Port B


Channel 956.125MHz

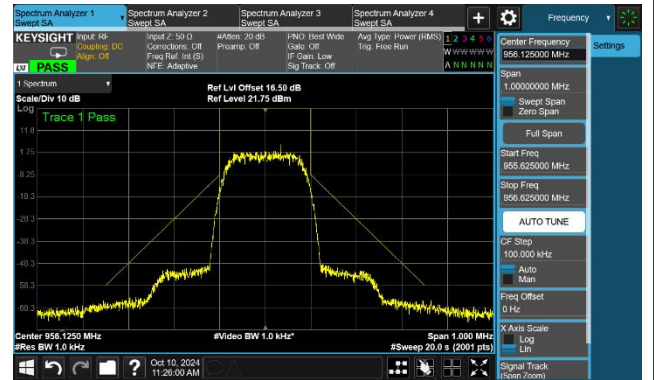

Channel 956.575MHz

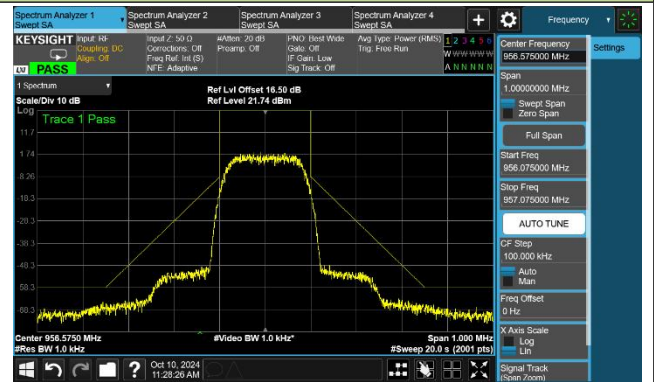


Channel 959.725MHz

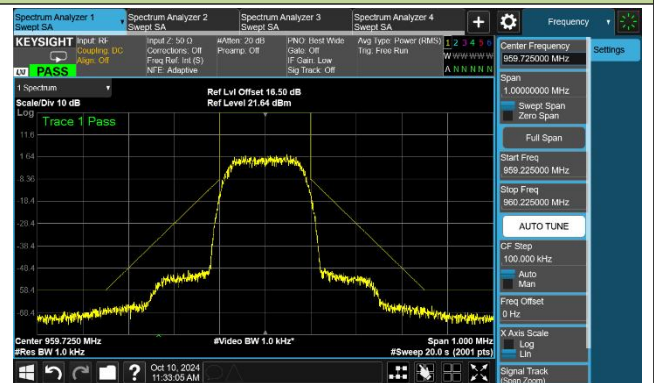


Port C


Channel 941.625MHz

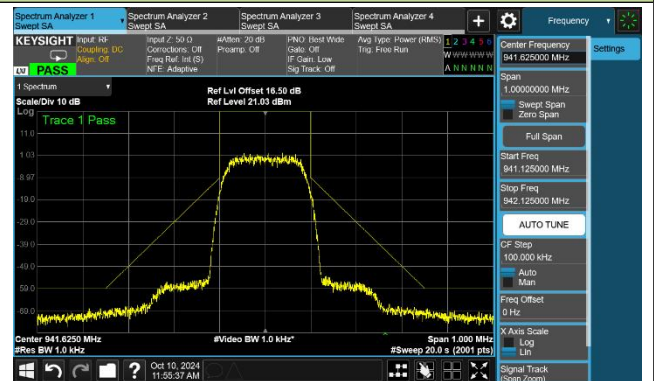


Channel 946.750 MHz

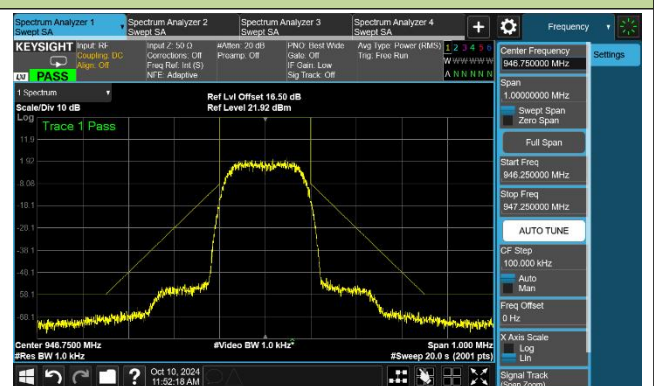

Channel 951.875 MHz

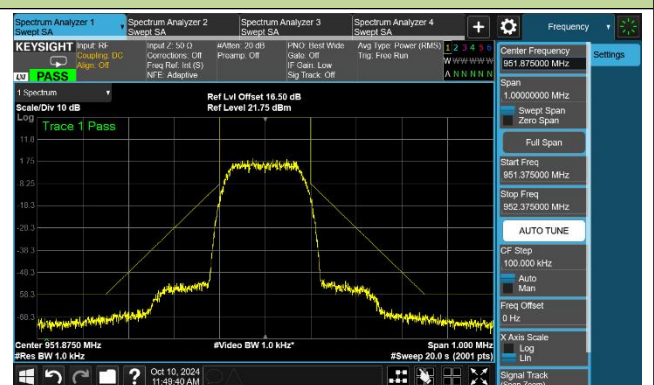


Channel 952.975MHz

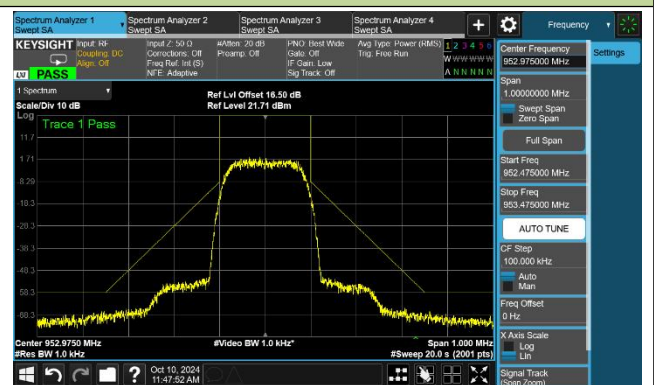


Port C


Channel 956.125MHz

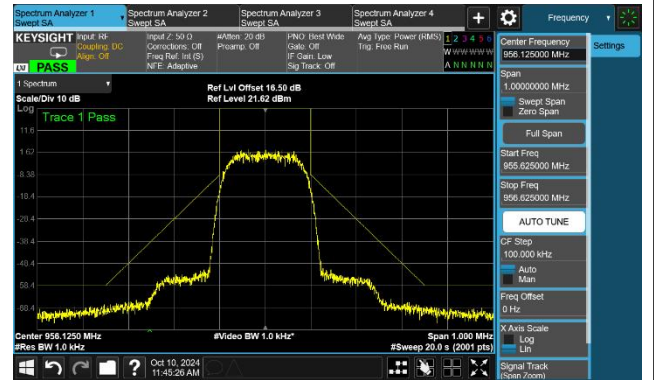

Channel 956.575MHz


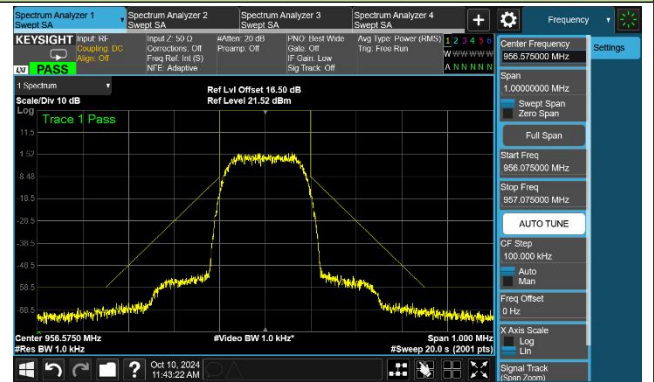


Channel 959.725MHz

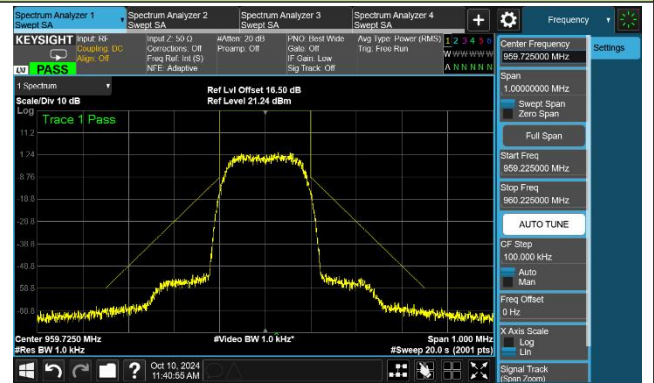


Port D


Channel 941.625MHz

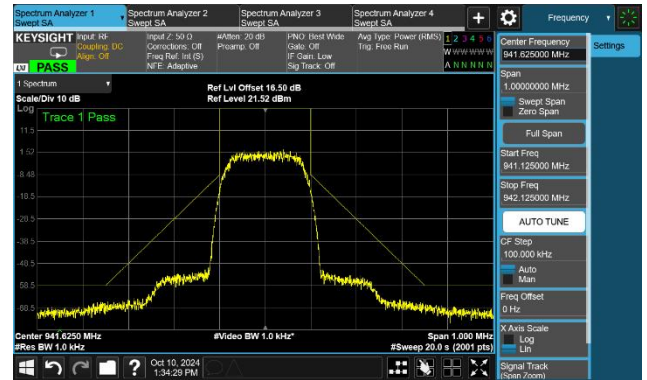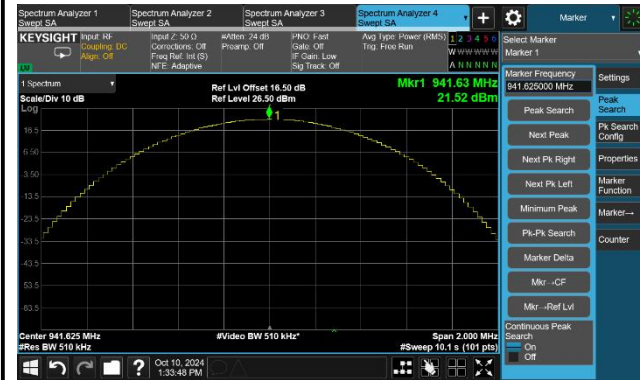


Channel 946.750 MHz

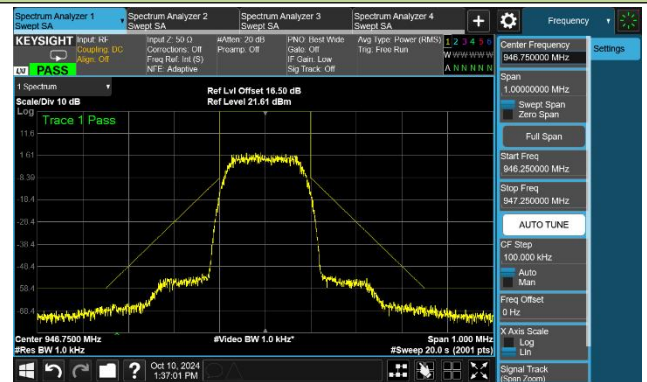

Channel 951.875 MHz


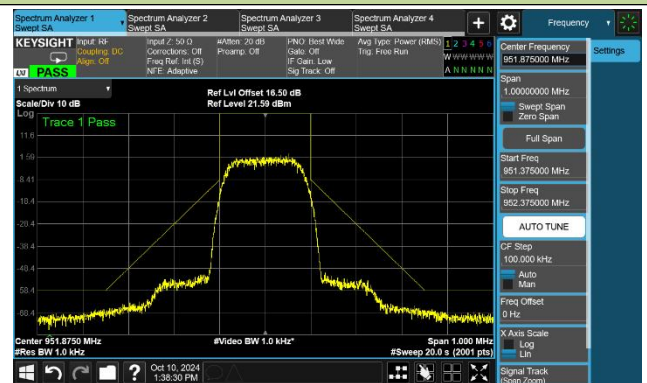


Channel 952.975MHz

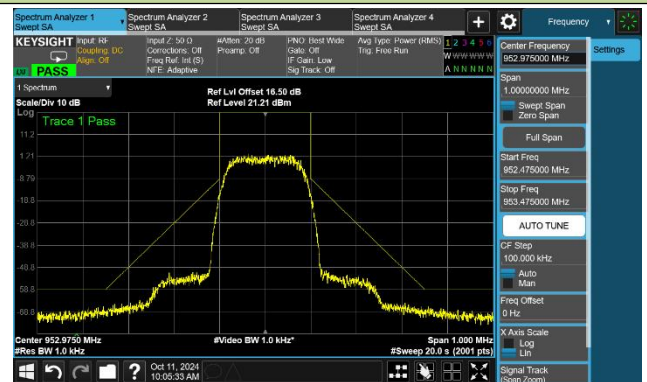


Port D


Channel 956.125MHz

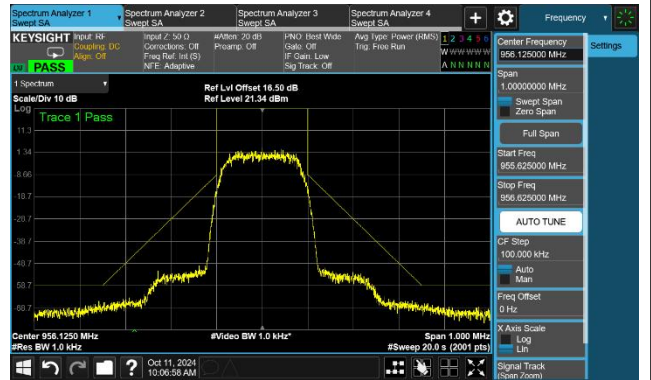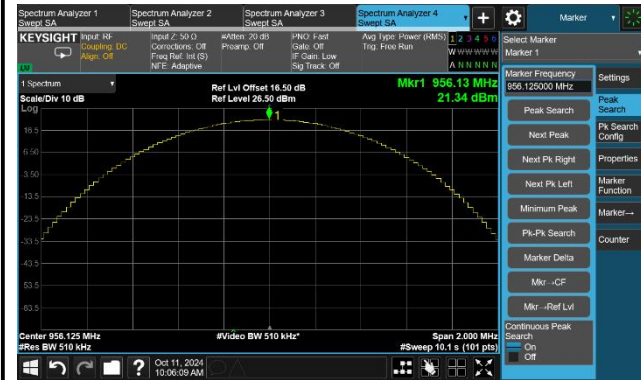

Channel 956.575MHz

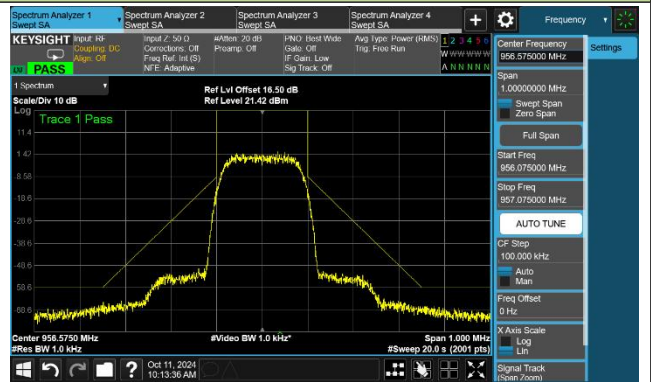

Channel 959.725MHz

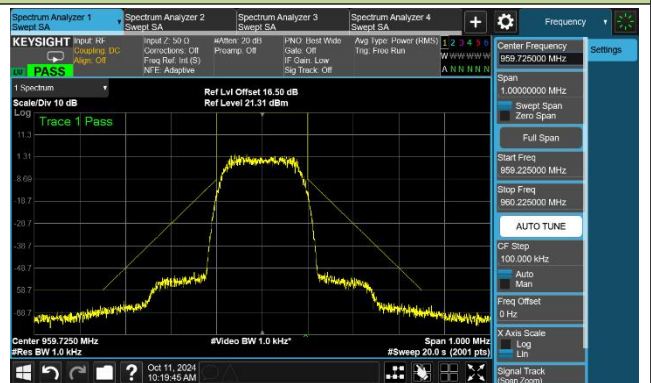

A.4 Radiated Spurious Emissions Test Result

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-08-26 ~ 2024-08-21	Test Mode	Mode 1 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	53.668	-104.9	30.0	-74.9	-54.0	-20.9	Peak	Horizontal
	712.298	-103.1	37.4	-65.7	-54.0	-11.7	Peak	Horizontal
	97.027	-105.1	39.1	-66.0	-54.0	-12.0	Peak	Vertical
	701.628	-102.8	37.0	-65.8	-54.0	-11.8	Peak	Vertical
	1181.800	-39.6	7.2	-32.4	-30.0	-2.4	RMS	Horizontal
	7654.600	-73.4	23.1	-50.3	-30.0	-20.3	Peak	Horizontal
	1181.800	-40.5	7.8	-32.7	-30.0	-2.7	RMS	Vertical
	8029.000	-74.5	23.4	-51.1	-30.0	-21.1	Peak	Vertical
946.750	52.019	-105.7	30.7	-75.0	-54.0	-21.0	Peak	Horizontal
	769.916	-102.2	37.1	-65.1	-54.0	-11.1	Peak	Horizontal
	99.355	-105.1	38.5	-66.6	-54.0	-12.6	Peak	Vertical
	745.472	-103.7	37.4	-66.3	-54.0	-12.3	Peak	Vertical
	1187.200	-39.8	7.2	-32.6	-30.0	-2.6	RMS	Horizontal
	7540.300	-75.0	23.4	-51.6	-30.0	-21.6	Peak	Horizontal
	1187.200	-40.0	7.7	-32.3	-30.0	-2.3	RMS	Vertical
	7067.800	-75.6	22.3	-53.3	-30.0	-23.3	Peak	Vertical
951.875	50.855	-104.9	30.8	-74.1	-54.0	-20.1	Peak	Horizontal
	728.885	-103.6	38.0	-65.6	-54.0	-11.6	Peak	Horizontal
	95.669	-104.5	39.0	-65.5	-54.0	-11.5	Peak	Vertical
	746.345	-103.3	37.5	-65.8	-54.0	-11.8	Peak	Vertical
	1191.700	-39.6	7.1	-32.5	-30.0	-2.5	RMS	Horizontal
	1748.800	-49.2	8.1	-41.1	-30.0	-11.1	Peak	Horizontal
	1191.700	-40.0	7.3	-32.7	-30.0	-2.7	RMS	Vertical
	7245.100	-74.6	23.1	-51.5	-30.0	-21.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	53.765	-104.8	29.9	-74.9	-54.0	-20.9	Peak	Horizontal
	721.416	-102.5	37.6	-64.9	-54.0	-10.9	Peak	Horizontal
	96.445	-104.9	39.3	-65.6	-54.0	-11.6	Peak	Vertical
	722.677	-102.0	37.0	-65.0	-54.0	-11.0	Peak	Vertical
	1192.600	-42.0	7.0	-35.0	-30.0	-5.0	RMS	Horizontal
	1740.700	-63.9	8.1	-55.8	-30.0	-25.8	Peak	Horizontal
	1192.600	-43.5	7.2	-36.3	-30.0	-6.3	RMS	Vertical
	7096.600	-75.1	22.4	-52.7	-30.0	-22.7	Peak	Vertical
956.125	53.183	-103.4	30.3	-73.1	-54.0	-19.1	Peak	Horizontal
	739.167	-103.2	37.7	-65.5	-54.0	-11.5	Peak	Horizontal
	94.311	-104.1	39.1	-65.0	-54.0	-11.0	Peak	Vertical
	678.542	-103.5	36.5	-67.0	-54.0	-13.0	Peak	Vertical
	1196.200	-42.0	6.9	-35.1	-30.0	-5.1	RMS	Horizontal
	7576.300	-74.6	23.1	-51.5	-30.0	-21.5	Peak	Horizontal
	1196.200	-45.0	6.9	-38.1	-30.0	-8.1	Peak	Vertical
	1912.600	-66.6	7.6	-59.0	-30.0	-29.0	Peak	Vertical
956.575	56.966	-104.3	28.5	-75.8	-54.0	-21.8	Peak	Horizontal
	737.033	-103.6	37.7	-65.9	-54.0	-11.9	Peak	Horizontal
	95.863	-105.0	39.2	-65.8	-54.0	-11.8	Peak	Vertical
	716.566	-102.5	36.8	-65.7	-54.0	-11.7	Peak	Vertical
	1197.100	-42.6	6.9	-35.7	-30.0	-5.7	RMS	Horizontal
	8722.000	-74.5	25.4	-49.1	-30.0	-19.1	Peak	Horizontal
	1196.200	-45.3	6.9	-38.4	-30.0	-8.4	Peak	Vertical
	7655.500	-73.4	22.5	-50.9	-30.0	-20.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	51.534	-104.9	30.7	-74.2	-54.0	-20.2	Peak	Horizontal
	719.767	-101.1	37.8	-63.3	-54.0	-9.3	Peak	Horizontal
	95.378	-104.5	38.8	-65.7	-54.0	-11.7	Peak	Vertical
	719.767	-100.4	36.9	-63.5	-54.0	-9.5	Peak	Vertical
	1199.800	-43.8	6.8	-37.0	-30.0	-7.0	Peak	Horizontal
	7348.600	-75.1	23.0	-52.1	-30.0	-22.1	Peak	Horizontal
	1199.800	-47.3	6.6	-40.7	-30.0	-10.7	Peak	Vertical
	8704.900	-74.9	24.9	-50.0	-30.0	-20.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-08-16 ~ 2024-08-21	Test Mode	Mode 1 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	51.631	-104.6	30.7	-73.9	-54.0	-19.9	Peak	Horizontal
	738.488	-104.0	37.7	-66.3	-54.0	-12.3	Peak	Horizontal
	93.826	-103.1	39.0	-64.1	-54.0	-10.1	Peak	Vertical
	701.628	-102.1	37.0	-65.1	-54.0	-11.1	Peak	Vertical
	1181.800	-42.1	7.2	-34.9	-30.0	-4.9	RMS	Horizontal
	7058.800	-73.8	22.5	-51.3	-30.0	-21.3	Peak	Horizontal
	1181.800	-42.9	7.8	-35.1	-30.0	-5.1	RMS	Vertical
	7627.600	-74.9	22.6	-52.3	-30.0	-22.3	Peak	Vertical
946.750	51.534	-105.2	30.7	-74.5	-54.0	-20.5	Peak	Horizontal
	723.453	-104.0	37.9	-66.1	-54.0	-12.1	Peak	Horizontal
	92.371	-103.0	37.9	-65.1	-54.0	-11.1	Peak	Vertical
	585.616	-103.3	35.6	-67.7	-54.0	-13.7	Peak	Vertical
	1187.200	-43.0	7.2	-35.8	-30.0	-5.8	RMS	Horizontal
	7079.500	-75.4	22.8	-52.6	-30.0	-22.6	Peak	Horizontal
	1187.200	-43.6	7.7	-35.9	-30.0	-5.9	RMS	Vertical
	7432.300	-75.0	23.1	-51.9	-30.0	-21.9	Peak	Vertical
951.875	54.347	-105.1	29.5	-75.6	-54.0	-21.6	Peak	Horizontal
	706.090	-103.8	37.3	-66.5	-54.0	-12.5	Peak	Horizontal
	94.020	-104.9	39.1	-65.8	-54.0	-11.8	Peak	Vertical
	702.986	-103.3	36.8	-66.5	-54.0	-12.5	Peak	Vertical
	1191.700	-44.3	7.1	-37.2	-30.0	-7.2	Peak	Horizontal
	7563.700	-74.0	23.1	-50.9	-30.0	-20.9	Peak	Horizontal
	1191.700	-45.0	7.3	-37.7	-30.0	-7.7	Peak	Vertical
	7640.200	-74.5	22.6	-51.9	-30.0	-21.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	58.227	-104.4	27.9	-76.5	-54.0	-22.5	Peak	Horizontal
	723.841	-103.7	37.9	-65.8	-54.0	-11.8	Peak	Horizontal
	97.124	-103.8	39.1	-64.7	-54.0	-10.7	Peak	Vertical
	753.426	-103.8	37.6	-66.2	-54.0	-12.2	Peak	Vertical
	1193.500	-45.5	7.0	-38.5	-30.0	-8.5	Peak	Horizontal
	8694.100	-74.7	25.2	-49.5	-30.0	-19.5	Peak	Horizontal
	1192.600	-46.1	7.2	-38.9	-30.0	-8.9	Peak	Vertical
	7433.200	-75.1	23.1	-52.0	-30.0	-22.0	Peak	Vertical
956.125	52.213	-105.1	30.6	-74.5	-54.0	-20.5	Peak	Horizontal
	705.799	-103.2	37.3	-65.9	-54.0	-11.9	Peak	Horizontal
	94.020	-105.0	39.1	-65.9	-54.0	-11.9	Peak	Vertical
	692.122	-103.5	37.0	-66.5	-54.0	-12.5	Peak	Vertical
	1196.200	-45.4	6.9	-38.5	-30.0	-8.5	Peak	Horizontal
	7613.200	-74.0	22.6	-51.4	-30.0	-21.4	Peak	Horizontal
	1196.200	-45.9	6.9	-39.0	-30.0	-9.0	Peak	Vertical
	7351.300	-75.1	22.7	-52.4	-30.0	-22.4	Peak	Vertical
956.575	51.049	-104.4	30.8	-73.6	-54.0	-19.6	Peak	Horizontal
	716.663	-103.0	37.7	-65.3	-54.0	-11.3	Peak	Horizontal
	97.221	-104.7	39.1	-65.6	-54.0	-11.6	Peak	Vertical
	686.884	-103.2	36.6	-66.6	-54.0	-12.6	Peak	Vertical
	1196.200	-45.2	6.9	-38.3	-30.0	-8.3	Peak	Horizontal
	8035.300	-75.7	23.8	-51.9	-30.0	-21.9	Peak	Horizontal
	1196.200	-46.0	6.9	-39.1	-30.0	-9.1	Peak	Vertical
	7984.900	-73.8	23.4	-50.4	-30.0	-20.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	54.929	-105.0	29.3	-75.7	-54.0	-21.7	Peak	Horizontal
	719.670	-95.8	37.8	-58.0	-54.0	-4.0	RMS	Horizontal
	92.662	-102.4	38.1	-64.3	-54.0	-10.3	Peak	Vertical
	719.767	-93.7	36.9	-56.8	-54.0	-2.8	RMS	Vertical
	1199.800	-46.9	6.8	-40.1	-30.0	-10.1	Peak	Horizontal
	7762.600	-73.9	22.9	-51.0	-30.0	-21.0	Peak	Horizontal
	1199.800	-47.6	6.6	-41.0	-30.0	-11.0	Peak	Vertical
	7982.200	-75.2	23.4	-51.8	-30.0	-21.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-08-16 ~ 2024-08-21	Test Mode	Mode 1 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	68.679	-98.9	29.9	-69.0	-54.0	-15.0	Peak	Horizontal
	851.035	-102.6	35.9	-66.7	-54.0	-12.7	Peak	Horizontal
	701.761	-97.6	31.3	-66.3	-54.0	-12.3	Peak	Vertical
	848.949	-100.5	35.7	-64.8	-54.0	-10.8	Peak	Vertical
	1181.800	-59.2	7.2	-52.0	-30.0	-22.0	Peak	Horizontal
	7083.100	-75.2	22.9	-52.3	-30.0	-22.3	Peak	Horizontal
	1181.800	-57.5	7.8	-49.7	-30.0	-19.7	Peak	Vertical
	2438.200	-57.0	9.6	-47.4	-30.0	-17.4	Peak	Vertical
946.750	706.948	-100.7	30.9	-69.8	-54.0	-15.8	Peak	Horizontal
	837.712	-101.6	35.7	-65.9	-54.0	-11.9	Peak	Horizontal
	706.948	-96.9	31.3	-65.6	-54.0	-11.6	Peak	Vertical
	853.127	-100.3	35.7	-64.6	-54.0	-10.6	Peak	Vertical
	1186.300	-58.8	7.2	-51.6	-30.0	-21.6	Peak	Horizontal
	2480.500	-65.4	9.8	-55.6	-30.0	-25.6	Peak	Horizontal
	1187.200	-57.3	7.7	-49.6	-30.0	-19.6	Peak	Vertical
	8061.400	-74.4	23.3	-51.1	-30.0	-21.1	Peak	Vertical
951.875	711.923	-99.8	31.4	-68.4	-54.0	-14.4	Peak	Horizontal
	849.545	-102.2	35.9	-66.3	-54.0	-12.3	Peak	Horizontal
	711.923	-96.2	31.5	-64.7	-54.0	-10.7	Peak	Vertical
	845.384	-100.0	35.6	-64.4	-54.0	-10.4	Peak	Vertical
	1191.700	-59.1	7.1	-52.0	-30.0	-22.0	Peak	Horizontal
	6032.800	-73.7	17.8	-55.9	-30.0	-25.9	Peak	Horizontal
	1742.500	-55.6	7.9	-47.7	-30.0	-17.7	Peak	Vertical
	7013.800	-74.6	21.9	-52.7	-30.0	-22.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	713.172	-99.8	31.5	-68.3	-54.0	-14.3	Peak	Horizontal
	848.949	-103.4	35.9	-67.5	-54.0	-13.5	Peak	Horizontal
	713.172	-96.0	31.6	-64.4	-54.0	-10.4	Peak	Vertical
	857.025	-99.7	35.7	-64.0	-54.0	-10.0	Peak	Vertical
	1193.500	-59.1	7.0	-52.1	-30.0	-22.1	Peak	Horizontal
	6560.200	-74.9	20.4	-54.5	-30.0	-24.5	Peak	Horizontal
	1192.600	-57.1	7.2	-49.9	-30.0	-19.9	Peak	Vertical
	6108.400	-74.3	18.0	-56.3	-30.0	-26.3	Peak	Vertical
956.125	68.655	-98.5	29.9	-68.6	-54.0	-14.6	Peak	Horizontal
	716.180	-98.6	31.8	-66.8	-54.0	-12.8	Peak	Horizontal
	716.180	-94.8	31.7	-63.1	-54.0	-9.1	Peak	Vertical
	849.843	-100.4	35.7	-64.7	-54.0	-10.7	Peak	Vertical
	1196.200	-59.3	6.9	-52.4	-30.0	-22.4	Peak	Horizontal
	7186.600	-75.4	23.2	-52.2	-30.0	-22.2	Peak	Horizontal
	1196.200	-58.4	6.9	-51.5	-30.0	-21.5	Peak	Vertical
	7231.600	-75.2	23.0	-52.2	-30.0	-22.2	Peak	Vertical
956.575	68.631	-98.6	29.9	-68.7	-54.0	-14.7	Peak	Horizontal
	716.682	-97.6	31.8	-65.8	-54.0	-11.8	Peak	Horizontal
	198.032	-101.4	28.7	-72.7	-54.0	-18.7	Peak	Vertical
	716.682	-95.0	31.8	-63.2	-54.0	-9.2	Peak	Vertical
	1197.100	-59.6	6.9	-52.7	-30.0	-22.7	Peak	Horizontal
	7471.000	-75.1	23.3	-51.8	-30.0	-21.8	Peak	Horizontal
	1196.200	-58.3	6.9	-51.4	-30.0	-21.4	Peak	Vertical
	7723.000	-74.3	22.3	-52.0	-30.0	-22.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	719.957	-96.7	32.1	-64.6	-54.0	-10.6	Peak	Horizontal
	841.244	-102.2	35.7	-66.5	-54.0	-12.5	Peak	Horizontal
	719.957	-94.5	32.1	-62.4	-54.0	-8.4	Peak	Vertical
	847.165	-99.8	35.7	-64.1	-54.0	-10.1	Peak	Vertical
	1919.800	-67.5	7.8	-59.7	-30.0	-29.7	Peak	Horizontal
	7424.200	-74.8	23.2	-51.6	-30.0	-21.6	Peak	Horizontal
	1199.800	-62.1	6.8	-55.3	-30.0	-25.3	Peak	Vertical
	7545.700	-74.2	23.5	-50.7	-30.0	-20.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Barry Wu
Test Date	2024-08-16 ~ 2024-08-21	Test Mode	Mode 1 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	68.703	-99.7	29.9	-69.8	-54.0	-15.8	Peak	Horizontal
	834.779	-101.1	35.7	-65.4	-54.0	-11.4	Peak	Horizontal
	198.032	-100.5	28.7	-71.8	-54.0	-17.8	Peak	Vertical
	721.473	-99.1	32.1	-67.0	-54.0	-13.0	Peak	Vertical
	1181.800	-43.3	7.2	-36.1	-30.0	-6.1	RMS	Horizontal
	1883.800	-56.6	7.1	-49.5	-30.0	-19.5	Peak	Horizontal
	1181.800	-43.0	7.8	-35.2	-30.0	-5.2	RMS	Vertical
	1883.800	-58.6	6.9	-51.7	-30.0	-21.7	Peak	Vertical
946.750	68.655	-99.2	29.9	-69.3	-54.0	-15.3	Peak	Horizontal
	827.203	-103.2	35.6	-67.6	-54.0	-13.6	Peak	Horizontal
	198.032	-100.3	28.7	-71.6	-54.0	-17.6	Peak	Vertical
	706.948	-97.9	31.3	-66.6	-54.0	-12.6	Peak	Vertical
	1187.200	-43.9	7.2	-36.7	-30.0	-6.7	RMS	Horizontal
	1893.700	-57.4	7.4	-50.0	-30.0	-20.0	Peak	Horizontal
	1187.200	-43.7	7.7	-36.0	-30.0	-6.0	RMS	Vertical
	1893.700	-58.7	7.1	-51.6	-30.0	-21.6	Peak	Vertical
951.875	711.923	-97.5	31.4	-66.1	-54.0	-12.1	Peak	Horizontal
	838.006	-102.8	35.7	-67.1	-54.0	-13.1	Peak	Horizontal
	198.032	-100.3	28.7	-71.6	-54.0	-17.6	Peak	Vertical
	711.923	-94.2	31.5	-62.7	-54.0	-8.7	Peak	Vertical
	1191.700	-45.6	7.1	-38.5	-30.0	-8.5	Peak	Horizontal
	1903.600	-59.8	7.7	-52.1	-30.0	-22.1	Peak	Horizontal
	1191.700	-45.8	7.3	-38.5	-30.0	-8.5	Peak	Vertical
	1903.600	-59.7	7.4	-52.3	-30.0	-22.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	713.172	-96.8	31.5	-65.3	-54.0	-11.3	Peak	Horizontal
	840.949	-102.1	35.7	-66.4	-54.0	-12.4	Peak	Horizontal
	713.172	-93.4	31.6	-61.8	-54.0	-7.8	Peak	Vertical
	840.065	-100.0	35.4	-64.6	-54.0	-10.6	Peak	Vertical
	1193.500	-46.0	7.0	-39.0	-30.0	-9.0	Peak	Horizontal
	1906.300	-59.5	7.8	-51.7	-30.0	-21.7	Peak	Horizontal
	1193.500	-45.9	7.1	-38.8	-30.0	-8.8	Peak	Vertical
	1906.300	-57.7	7.5	-50.2	-30.0	-20.2	Peak	Vertical
956.125	716.180	-95.6	31.8	-63.8	-54.0	-9.8	Peak	Horizontal
	835.658	-102.9	35.8	-67.1	-54.0	-13.1	Peak	Horizontal
	716.180	-94.1	31.7	-62.4	-54.0	-8.4	RMS	Vertical
	851.334	-100.5	35.7	-64.8	-54.0	-10.8	Peak	Vertical
	1196.200	-46.8	6.9	-39.9	-30.0	-9.9	Peak	Horizontal
	1912.600	-58.6	8.0	-50.6	-30.0	-20.6	Peak	Horizontal
	1196.200	-47.0	6.9	-40.1	-30.0	-10.1	Peak	Vertical
	1912.600	-58.4	7.6	-50.8	-30.0	-20.8	Peak	Vertical
956.575	716.682	-95.7	31.8	-63.9	-54.0	-9.9	Peak	Horizontal
	830.109	-102.7	35.7	-67.0	-54.0	-13.0	Peak	Horizontal
	716.682	-92.0	31.8	-60.2	-54.0	-6.2	Peak	Vertical
	831.857	-100.9	35.2	-65.7	-54.0	-11.7	Peak	Vertical
	1196.200	-46.9	6.9	-40.0	-30.0	-10.0	Peak	Horizontal
	1913.500	-58.7	8.0	-50.7	-30.0	-20.7	Peak	Horizontal
	1197.100	-47.2	6.8	-40.4	-30.0	-10.4	Peak	Vertical
	1913.500	-58.2	7.7	-50.5	-30.0	-20.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	719.957	-93.7	32.1	-61.6	-54.0	-7.6	Peak	Horizontal
	848.949	-102.3	35.9	-66.4	-54.0	-12.4	Peak	Horizontal
	719.957	-89.6	32.1	-57.5	-54.0	-3.5	Peak	Vertical
	856.724	-101.5	35.7	-65.8	-54.0	-11.8	Peak	Vertical
	1199.800	-48.7	6.8	-41.9	-30.0	-11.9	Peak	Horizontal
	1919.800	-59.6	8.1	-51.5	-30.0	-21.5	Peak	Horizontal
	1199.800	-49.0	6.6	-42.4	-30.0	-12.4	Peak	Vertical
	1919.800	-58.8	7.8	-51.0	-30.0	-21.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-08-22 ~ 2024-08-23	Test Mode	Mode 2 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975 + 942.325 + 942.675	61.913	-102.1	31.8	-70.3	-54.0	-16.3	Peak	Horizontal
	836.361	-101.6	35.8	-65.8	-54.0	-11.8	Peak	Horizontal
	702.016	-99.3	31.3	-68.0	-54.0	-14.0	Peak	Vertical
	841.599	-100.9	35.5	-65.4	-54.0	-11.4	Peak	Vertical
	1181.800	-31.4	-7.1	-38.5	-30.0	-8.5	RMS	Horizontal
	7090.300	-55.3	7.2	-48.1	-30.0	-18.1	Peak	Horizontal
	1181.800	-29.5	-7.1	-36.6	-30.0	-6.6	RMS	Vertical
	1422.100	-48.7	-5.5	-54.2	-30.0	-24.2	Peak	Vertical
946.750 + 947.100 + 947.450 + 947.800	60.264	-102.6	31.8	-70.8	-54.0	-16.8	Peak	Horizontal
	847.419	-100.8	35.9	-64.9	-54.0	-10.9	Peak	Horizontal
	707.060	-98.7	31.3	-67.4	-54.0	-13.4	Peak	Vertical
	841.114	-99.7	35.5	-64.2	-54.0	-10.2	Peak	Vertical
	1187.200	-31.5	-7.4	-38.9	-30.0	-8.9	Peak	Horizontal
	8701.300	-56.8	9.8	-47.0	-30.0	-17.0	Peak	Horizontal
	1187.200	-30.5	-7.5	-38.0	-30.0	-8.0	RMS	Vertical
	1427.500	-50.7	-5.5	-56.2	-30.0	-26.2	Peak	Vertical
951.875 + 951.525 + 951.175 + 950.825	60.361	-102.6	31.8	-70.8	-54.0	-16.8	Peak	Horizontal
	847.710	-100.7	35.9	-64.8	-54.0	-10.8	Peak	Horizontal
	711.522	-98.4	31.5	-66.9	-54.0	-12.9	Peak	Vertical
	854.112	-101.1	35.7	-65.4	-54.0	-11.4	Peak	Vertical
	1191.700	-31.3	-7.3	-38.6	-30.0	-8.6	Peak	Horizontal
	8418.700	-56.1	9.0	-47.1	-30.0	-17.1	Peak	Horizontal
	1191.700	-29.9	-7.5	-37.4	-30.0	-7.4	Peak	Vertical
	8408.800	-56.5	9.1	-47.4	-30.0	-17.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975 + 953.325 + 953.675 + 954.025	65.405	-102.2	31.0	-71.2	-54.0	-17.2	Peak	Horizontal
	835.100	-101.3	35.7	-65.6	-54.0	-11.6	Peak	Horizontal
	713.365	-97.9	31.6	-66.3	-54.0	-12.3	Peak	Vertical
	850.038	-101.2	35.7	-65.5	-54.0	-11.5	Peak	Vertical
	1193.500	-31.6	-7.3	-38.9	-30.0	-8.9	Peak	Horizontal
	8683.300	-57.2	9.6	-47.6	-30.0	-17.6	Peak	Horizontal
	1193.500	-30.6	-7.6	-38.2	-30.0	-8.2	Peak	Vertical
	1908.100	-48.2	-3.2	-51.4	-30.0	-21.4	Peak	Vertical
956.125 + 955.775 + 955.425 + 955.075	62.204	-102.8	31.7	-71.1	-54.0	-17.1	Peak	Horizontal
	848.583	-101.6	35.9	-65.7	-54.0	-11.7	Peak	Horizontal
	715.790	-97.7	31.7	-66.0	-54.0	-12.0	Peak	Vertical
	847.322	-100.9	35.7	-65.2	-54.0	-11.2	Peak	Vertical
	1196.200	-32.6	-7.3	-39.9	-30.0	-9.9	Peak	Horizontal
	8682.400	-56.9	9.6	-47.3	-30.0	-17.3	Peak	Horizontal
	1196.200	-30.7	-7.6	-38.3	-30.0	-8.3	Peak	Vertical
	8817.400	-56.5	9.6	-46.9	-30.0	-16.9	Peak	Vertical
956.575 + 956.925 + 957.275 + 957.625	57.839	-103.2	31.6	-71.6	-54.0	-17.6	Peak	Horizontal
	717.633	-99.2	31.9	-67.3	-54.0	-13.3	Peak	Horizontal
	716.954	-97.1	31.8	-65.3	-54.0	-11.3	Peak	Vertical
	851.590	-101.0	35.7	-65.3	-54.0	-11.3	Peak	Vertical
	1197.100	-32.9	-7.3	-40.2	-30.0	-10.2	Peak	Horizontal
	8958.700	-56.8	9.4	-47.4	-30.0	-17.4	Peak	Horizontal
	1197.100	-30.9	-7.6	-38.5	-30.0	-8.5	Peak	Vertical
	8949.700	-56.9	9.1	-47.8	-30.0	-17.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725 + 959.375 + 959.025 + 958.675	59.876	-102.8	31.8	-71.0	-54.0	-17.0	Peak	Horizontal
	718.603	-98.4	31.9	-66.5	-54.0	-12.5	Peak	Horizontal
	719.379	-97.5	32.0	-65.5	-54.0	-11.5	Peak	Vertical
	848.292	-101.3	35.7	-65.6	-54.0	-11.6	Peak	Vertical
	1199.800	-33.3	-7.3	-40.6	-30.0	-10.6	Peak	Horizontal
	8603.200	-56.9	9.2	-47.7	-30.0	-17.7	Peak	Horizontal
	1199.800	-31.1	-7.7	-38.8	-30.0	-8.8	Peak	Vertical
	8424.100	-56.7	8.9	-47.8	-30.0	-17.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-08-21 ~ 2024-08-24	Test Mode	Mode 3 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	51.922	-105.5	30.7	-74.8	-54.0	-20.8	Peak	Horizontal
	701.628	-99.9	37.4	-62.5	-54.0	-8.5	Peak	Horizontal
	102.944	-104.4	38.2	-66.2	-54.0	-12.2	Peak	Vertical
	701.628	-96.0	37.0	-59.0	-54.0	-5.0	RMS	Vertical
	1181.800	-38.0	7.2	-30.8	-30.0	-0.8	RMS	Horizontal
	1883.800	-49.7	7.1	-42.6	-30.0	-12.6	Peak	Horizontal
	1181.800	-42.1	7.8	-34.3	-30.0	-4.3	RMS	Vertical
	1882.900	-47.9	6.9	-41.0	-30.0	-11.0	Peak	Vertical
946.750	50.661	-105.5	30.9	-74.6	-54.0	-20.6	Peak	Horizontal
	706.769	-98.5	37.2	-61.3	-54.0	-7.3	Peak	Horizontal
	96.251	-105.6	39.4	-66.2	-54.0	-12.2	Peak	Vertical
	706.769	-96.2	36.8	-59.4	-54.0	-5.4	RMS	Vertical
	1187.200	-37.8	7.2	-30.6	-30.0	-0.6	RMS	Horizontal
	1893.700	-50.1	7.4	-42.7	-30.0	-12.7	Peak	Horizontal
	1187.200	-40.1	7.7	-32.4	-30.0	-2.4	RMS	Vertical
	1893.700	-48.0	7.1	-40.9	-30.0	-10.9	Peak	Vertical
951.875	49.400	-105.6	31.6	-74.0	-54.0	-20.0	Peak	Horizontal
	711.813	-96.9	37.5	-59.4	-54.0	-5.4	RMS	Horizontal
	98.191	-105.0	39.3	-65.7	-54.0	-11.7	Peak	Vertical
	711.910	-96.0	36.8	-59.2	-54.0	-5.2	RMS	Vertical
	1191.700	-29.6	-7.3	-36.9	-30.0	-6.9	Peak	Horizontal
	1903.600	-35.2	-3.3	-38.5	-30.0	-8.5	Peak	Horizontal
	1191.700	-29.4	-7.5	-36.9	-30.0	-6.9	Peak	Vertical
	1903.600	-38.4	-3.2	-41.6	-30.0	-11.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	52.407	-105.7	30.6	-75.1	-54.0	-21.1	Peak	Horizontal
	712.880	-96.2	37.5	-58.7	-54.0	-4.7	RMS	Horizontal
	101.780	-103.9	38.3	-65.6	-54.0	-11.6	Peak	Vertical
	712.977	-96.1	37.0	-59.1	-54.0	-5.1	RMS	Vertical
	1193.500	-27.8	-7.3	-35.1	-30.0	-5.1	RMS	Horizontal
	1906.300	-40.0	-3.3	-43.3	-30.0	-13.3	Peak	Horizontal
	1192.600	-25.8	-7.6	-33.4	-30.0	-3.4	RMS	Vertical
	1906.300	-40.1	-3.2	-43.3	-30.0	-13.3	Peak	Vertical
956.125	53.280	-104.6	30.3	-74.3	-54.0	-20.3	Peak	Horizontal
	716.178	-96.4	37.5	-58.9	-54.0	-4.9	RMS	Horizontal
	102.556	-104.4	38.4	-66.0	-54.0	-12.0	Peak	Vertical
	716.081	-95.9	36.8	-59.1	-54.0	-5.1	RMS	Vertical
	1196.200	-29.7	-7.3	-37.0	-30.0	-7.0	RMS	Horizontal
	1912.600	-39.5	-3.2	-42.7	-30.0	-12.7	Peak	Horizontal
	1196.200	-26.8	-7.6	-34.4	-30.0	-4.4	RMS	Vertical
	1912.600	-40.3	-3.1	-43.4	-30.0	-13.4	Peak	Vertical
956.575	52.407	-104.8	30.6	-74.2	-54.0	-20.2	Peak	Horizontal
	716.663	-96.8	37.7	-59.1	-54.0	-5.1	RMS	Horizontal
	98.288	-103.9	39.2	-64.7	-54.0	-10.7	Peak	Vertical
	716.663	-99.6	36.8	-62.8	-54.0	-8.8	RMS	Vertical
	1196.200	-29.8	-7.3	-37.1	-30.0	-7.1	Peak	Horizontal
	1913.500	-40.9	-3.2	-44.1	-30.0	-14.1	Peak	Horizontal
	1196.200	-27.1	-7.6	-34.7	-30.0	-4.7	RMS	Vertical
	1912.600	-41.8	-3.1	-44.9	-30.0	-14.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	52.989	-105.1	30.4	-74.7	-54.0	-20.7	Peak	Horizontal
	719.670	-95.4	37.8	-57.6	-54.0	-3.6	RMS	Horizontal
	95.960	-105.0	39.2	-65.8	-54.0	-11.8	Peak	Vertical
	719.767	-97.1	36.9	-60.2	-54.0	-6.2	RMS	Vertical
	1199.800	-30.3	-7.3	-37.6	-30.0	-7.6	Peak	Horizontal
	1918.900	-39.7	-3.2	-42.9	-30.0	-12.9	Peak	Horizontal
	1199.800	-27.7	-7.7	-35.4	-30.0	-5.4	RMS	Vertical
	1919.800	-40.8	-3.0	-43.8	-30.0	-13.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC2	Test Engineer	
Test Date	2024-08-21 ~ 2024-08-24	Test Mode	Mode 3 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	55.899	-105.0	28.9	-76.1	-54.0	-22.1	Peak	Horizontal
	701.628	-98.9	37.4	-61.5	-54.0	-7.5	RMS	Horizontal
	98.676	-105.2	39.0	-66.2	-54.0	-12.2	Peak	Vertical
	701.628	-96.9	37.0	-59.9	-54.0	-5.9	RMS	Vertical
	1181.800	-33.5	-7.1	-40.6	-30.0	-10.6	Peak	Horizontal
	1882.900	-45.3	-3.9	-49.2	-30.0	-19.2	Peak	Horizontal
	1181.800	-33.0	-7.1	-40.1	-30.0	-10.1	Peak	Vertical
	1882.900	-44.6	-3.4	-48.0	-30.0	-18.0	Peak	Vertical
946.750	52.795	-105.4	30.5	-74.9	-54.0	-20.9	Peak	Horizontal
	706.769	-98.3	37.2	-61.1	-54.0	-7.1	RMS	Horizontal
	99.064	-104.2	38.9	-65.3	-54.0	-11.3	Peak	Vertical
	706.769	-97.0	36.8	-60.2	-54.0	-6.2	RMS	Vertical
	1187.200	-35.5	-7.4	-42.9	-30.0	-12.9	Peak	Horizontal
	1893.700	-48.6	-3.6	-52.2	-30.0	-22.2	Peak	Horizontal
	1186.300	-34.7	-7.4	-42.1	-30.0	-12.1	Peak	Vertical
	1893.700	-45.3	-3.3	-48.6	-30.0	-18.6	Peak	Vertical
951.875	52.795	-105.2	30.5	-74.7	-54.0	-20.7	Peak	Horizontal
	711.910	-98.6	37.5	-61.1	-54.0	-7.1	RMS	Horizontal
	97.318	-104.9	39.1	-65.8	-54.0	-11.8	Peak	Vertical
	712.007	-97.9	36.8	-61.1	-54.0	-7.1	RMS	Vertical
	1191.700	-36.7	-7.3	-44.0	-30.0	-14.0	Peak	Horizontal
	1903.600	-48.8	-3.3	-52.1	-30.0	-22.1	Peak	Horizontal
	1191.700	-36.1	-7.5	-43.6	-30.0	-13.6	Peak	Vertical
	1903.600	-47.8	-3.2	-51.0	-30.0	-21.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	50.273	-105.2	31.0	-74.2	-54.0	-20.2	Peak	Horizontal
	712.977	-96.7	37.6	-59.1	-54.0	-5.1	RMS	Horizontal
	97.221	-104.7	39.1	-65.6	-54.0	-11.6	Peak	Vertical
	712.880	-97.5	36.9	-60.6	-54.0	-6.6	RMS	Vertical
	1193.500	-35.9	-7.3	-43.2	-30.0	-13.2	Peak	Horizontal
	2337.400	-49.0	-1.8	-50.8	-30.0	-20.8	Peak	Horizontal
	1193.500	-35.5	-7.6	-43.1	-30.0	-13.1	Peak	Vertical
	2332.900	-46.3	-1.7	-48.0	-30.0	-18.0	Peak	Vertical
956.125	51.243	-105.1	30.7	-74.4	-54.0	-20.4	Peak	Horizontal
	716.178	-96.2	37.5	-58.7	-54.0	-4.7	RMS	Horizontal
	104.011	-104.2	38.1	-66.1	-54.0	-12.1	Peak	Vertical
	716.081	-96.6	36.8	-59.8	-54.0	-5.8	RMS	Vertical
	1196.200	-37.3	-7.3	-44.6	-30.0	-14.6	Peak	Horizontal
	1912.600	-47.2	-3.2	-50.4	-30.0	-20.4	Peak	Horizontal
	1196.200	-36.9	-7.6	-44.5	-30.0	-14.5	Peak	Vertical
	1912.600	-47.4	-3.1	-50.5	-30.0	-20.5	Peak	Vertical
956.575	55.123	-105.0	29.2	-75.8	-54.0	-21.8	Peak	Horizontal
	716.566	-98.0	37.6	-60.4	-54.0	-6.4	RMS	Horizontal
	97.609	-105.7	39.2	-66.5	-54.0	-12.5	Peak	Vertical
	716.663	-95.7	36.8	-58.9	-54.0	-4.9	RMS	Vertical
	1197.100	-37.4	-7.3	-44.7	-30.0	-14.7	Peak	Horizontal
	1912.600	-49.9	-3.2	-53.1	-30.0	-23.1	Peak	Horizontal
	1196.200	-36.8	-7.6	-44.4	-30.0	-14.4	Peak	Vertical
	1913.500	-45.8	-3.1	-48.9	-30.0	-18.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	52.601	-106.0	30.5	-75.5	-54.0	-21.5	Peak	Horizontal
	719.670	-98.4	37.8	-60.6	-54.0	-6.6	RMS	Horizontal
	96.736	-105.6	39.2	-66.4	-54.0	-12.4	Peak	Vertical
	719.670	-96.0	36.8	-59.2	-54.0	-5.2	RMS	Vertical
	1199.800	-38.4	-7.3	-45.7	-30.0	-15.7	Peak	Horizontal
	1919.800	-47.5	-3.2	-50.7	-30.0	-20.7	Peak	Horizontal
	1199.800	-37.5	-7.7	-45.2	-30.0	-15.2	Peak	Vertical
	1919.800	-45.6	-3.0	-48.6	-30.0	-18.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC2	Test Engineer	
Test Date	2024-08-21 ~ 2024-08-24	Test Mode	Mode 3 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	52.019	-104.3	30.7	-73.6	-54.0	-19.6	Peak	Horizontal
	701.628	-98.3	37.4	-60.9	-54.0	-6.9	RMS	Horizontal
	98.094	-105.6	39.3	-66.3	-54.0	-12.3	Peak	Vertical
	701.725	-99.9	37.0	-62.9	-54.0	-8.9	RMS	Vertical
	1181.800	-31.1	-7.1	-38.2	-30.0	-8.2	Peak	Horizontal
	1882.900	-44.0	-3.9	-47.9	-30.0	-17.9	Peak	Horizontal
	1181.800	-29.3	-7.1	-36.4	-30.0	-6.4	RMS	Vertical
	1882.900	-41.9	-3.4	-45.3	-30.0	-15.3	Peak	Vertical
946.750	53.474	-105.5	30.2	-75.3	-54.0	-21.3	Peak	Horizontal
	706.672	-100.2	37.2	-63.0	-54.0	-9.0	RMS	Horizontal
	103.138	-104.8	38.2	-66.6	-54.0	-12.6	Peak	Vertical
	706.769	-97.5	36.8	-60.7	-54.0	-6.7	RMS	Vertical
	1186.300	-32.1	-7.3	-39.4	-30.0	-9.4	Peak	Horizontal
	1893.700	-44.2	-3.6	-47.8	-30.0	-17.8	Peak	Horizontal
	1186.300	-30.1	-7.4	-37.5	-30.0	-7.5	Peak	Vertical
	1893.700	-44.4	-3.3	-47.7	-30.0	-17.7	Peak	Vertical
951.875	52.892	-105.0	30.4	-74.6	-54.0	-20.6	Peak	Horizontal
	711.813	-96.9	37.5	-59.4	-54.0	-5.4	RMS	Horizontal
	97.124	-105.0	39.1	-65.9	-54.0	-11.9	Peak	Vertical
	711.813	-96.9	36.8	-60.1	-54.0	-6.1	RMS	Vertical
	1191.700	-33.1	-7.3	-40.4	-30.0	-10.4	Peak	Horizontal
	1903.600	-44.9	-3.3	-48.2	-30.0	-18.2	Peak	Horizontal
	1191.700	-31.1	-7.5	-38.6	-30.0	-8.6	Peak	Vertical
	1904.500	-47.0	-3.2	-50.2	-30.0	-20.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	50.176	-105.5	31.1	-74.4	-54.0	-20.4	Peak	Horizontal
	712.977	-96.3	37.6	-58.7	-54.0	-4.7	RMS	Horizontal
	96.833	-104.5	39.2	-65.3	-54.0	-11.3	Peak	Vertical
	712.880	-97.1	36.9	-60.2	-54.0	-6.2	RMS	Vertical
	1192.600	-33.6	-7.3	-40.9	-30.0	-10.9	Peak	Horizontal
	1906.300	-47.0	-3.3	-50.3	-30.0	-20.3	Peak	Horizontal
	1192.600	-31.4	-7.6	-39.0	-30.0	-9.0	Peak	Vertical
	1906.300	-45.3	-3.2	-48.5	-30.0	-18.5	Peak	Vertical
956.125	48.042	-104.8	31.5	-73.3	-54.0	-19.3	Peak	Horizontal
	716.081	-98.3	37.5	-60.8	-54.0	-6.8	RMS	Horizontal
	95.960	-104.9	39.2	-65.7	-54.0	-11.7	Peak	Vertical
	716.081	-97.5	36.8	-60.7	-54.0	-6.7	RMS	Vertical
	1196.200	-34.8	-7.3	-42.1	-30.0	-12.1	Peak	Horizontal
	1912.600	-43.9	-3.2	-47.1	-30.0	-17.1	Peak	Horizontal
	1196.200	-32.1	-7.6	-39.7	-30.0	-9.7	Peak	Vertical
	1911.700	-45.6	-3.1	-48.7	-30.0	-18.7	Peak	Vertical
956.575	55.414	-104.1	29.1	-75.0	-54.0	-21.0	Peak	Horizontal
	711.328	-104.3	37.6	-66.7	-54.0	-12.7	Peak	Horizontal
	96.251	-105.0	39.4	-65.6	-54.0	-11.6	Peak	Vertical
	716.663	-98.5	36.8	-61.7	-54.0	-7.7	RMS	Vertical
	1196.200	-35.0	-7.3	-42.3	-30.0	-12.3	Peak	Horizontal
	1913.500	-43.6	-3.2	-46.8	-30.0	-16.8	Peak	Horizontal
	1196.200	-32.4	-7.6	-40.0	-30.0	-10.0	Peak	Vertical
	1912.600	-44.7	-3.1	-47.8	-30.0	-17.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	54.541	-105.9	29.4	-76.5	-54.0	-22.5	Peak	Horizontal
	719.670	-98.2	37.8	-60.4	-54.0	-6.4	RMS	Horizontal
	99.258	-104.6	38.7	-65.9	-54.0	-11.9	Peak	Vertical
	719.670	-97.0	36.8	-60.2	-54.0	-6.2	RMS	Vertical
	1199.800	-36.5	-7.3	-43.8	-30.0	-13.8	Peak	Horizontal
	1919.800	-44.1	-3.2	-47.3	-30.0	-17.3	Peak	Horizontal
	1199.800	-33.5	-7.7	-41.2	-30.0	-11.2	Peak	Vertical
	1919.800	-45.4	-3.0	-48.4	-30.0	-18.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC2	Test Engineer	
Test Date	2024-08-21 ~ 2024-08-24	Test Mode	Mode 3 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	51.825	-105.4	30.7	-74.7	-54.0	-20.7	RMS	Horizontal
	701.628	-96.7	37.4	-59.3	-54.0	-5.3	Peak	Horizontal
	97.706	-104.6	39.2	-65.4	-54.0	-11.4	Peak	Vertical
	701.628	-104.2	37.0	-67.2	-54.0	-13.2	RMS	Vertical
	1181.800	-35.4	-7.1	-42.5	-30.0	-12.5	Peak	Horizontal
	1883.800	-39.2	-3.9	-43.1	-30.0	-13.1	Peak	Horizontal
	1181.800	-35.8	-7.1	-42.9	-30.0	-12.9	Peak	Vertical
	1882.900	-37.5	-3.4	-40.9	-30.0	-10.9	Peak	Vertical
946.750	51.049	-106.0	30.8	-75.2	-54.0	-21.2	Peak	Horizontal
	706.672	-94.9	37.2	-57.7	-54.0	-3.7	Peak	Horizontal
	98.385	-105.4	39.2	-66.2	-54.0	-12.2	Peak	Vertical
	706.672	-99.4	36.8	-62.6	-54.0	-8.6	RMS	Vertical
	1186.300	-37.0	-7.3	-44.3	-30.0	-14.3	Peak	Horizontal
	1892.800	-37.7	-3.6	-41.3	-30.0	-11.3	Peak	Horizontal
	1186.300	-37.1	-7.4	-44.5	-30.0	-14.5	Peak	Vertical
	1893.700	-35.6	-3.3	-38.9	-30.0	-8.9	Peak	Vertical
951.875	52.019	-104.9	30.7	-74.2	-54.0	-20.2	Peak	Horizontal
	711.813	-97.9	37.5	-60.4	-54.0	-6.4	RMS	Horizontal
	98.191	-105.5	39.3	-66.2	-54.0	-12.2	Peak	Vertical
	711.910	-98.2	36.8	-61.4	-54.0	-7.4	RMS	Vertical
	1191.700	-38.7	-7.3	-46.0	-30.0	-16.0	Peak	Horizontal
	1903.600	-36.9	-3.3	-40.2	-30.0	-10.2	Peak	Horizontal
	1191.700	-38.0	-7.5	-45.5	-30.0	-15.5	Peak	Vertical
	1903.600	-34.7	-3.2	-37.9	-30.0	-7.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	53.280	-106.0	30.3	-75.7	-54.0	-21.7	Peak	Horizontal
	712.977	-99.2	37.6	-61.6	-54.0	-7.6	RMS	Horizontal
	98.094	-102.4	39.3	-63.1	-54.0	-9.1	Peak	Vertical
	643.234	-103.5	35.6	-67.9	-54.0	-13.9	Peak	Vertical
	1192.600	-39.9	-7.3	-47.2	-30.0	-17.2	Peak	Horizontal
	1906.300	-37.7	-3.3	-41.0	-30.0	-11.0	Peak	Horizontal
	1193.500	-37.9	-7.6	-45.5	-30.0	-15.5	Peak	Vertical
	1905.400	-34.8	-3.2	-38.0	-30.0	-8.0	Peak	Vertical
956.125	53.377	-105.5	30.2	-75.3	-54.0	-21.3	Peak	Horizontal
	716.178	-97.8	37.5	-60.3	-54.0	-6.3	RMS	Horizontal
	94.602	-104.7	39.0	-65.7	-54.0	-11.7	Peak	Vertical
	716.178	-96.0	36.8	-59.2	-54.0	-5.2	RMS	Vertical
	1196.200	-40.9	-7.3	-48.2	-30.0	-18.2	Peak	Horizontal
	1912.600	-37.3	-3.2	-40.5	-30.0	-10.5	Peak	Horizontal
	1196.200	-38.9	-7.6	-46.5	-30.0	-16.5	Peak	Vertical
	1912.600	-36.0	-3.1	-39.1	-30.0	-9.1	Peak	Vertical
956.575	52.601	-106.2	30.5	-75.7	-54.0	-21.7	Peak	Horizontal
	716.566	-98.9	37.6	-61.3	-54.0	-7.3	RMS	Horizontal
	96.251	-105.3	39.4	-65.9	-54.0	-11.9	Peak	Vertical
	716.663	-98.4	36.8	-61.6	-54.0	-7.6	RMS	Vertical
	1196.200	-40.7	-7.3	-48.0	-30.0	-18.0	Peak	Horizontal
	1912.600	-37.4	-3.2	-40.6	-30.0	-10.6	Peak	Horizontal
	1196.200	-39.4	-7.6	-47.0	-30.0	-17.0	Peak	Vertical
	1913.500	-36.9	-3.1	-40.0	-30.0	-10.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	52.116	-105.6	30.6	-75.0	-54.0	-21.0	Peak	Horizontal
	719.670	-98.5	37.8	-60.7	-54.0	-6.7	RMS	Horizontal
	99.161	-104.4	38.8	-65.6	-54.0	-11.6	Peak	Vertical
	719.670	-95.6	36.8	-58.8	-54.0	-4.8	RMS	Vertical
	1199.800	-41.9	-7.3	-49.2	-30.0	-19.2	Peak	Horizontal
	1918.900	-38.4	-3.2	-41.6	-30.0	-11.6	Peak	Horizontal
	1199.800	-39.5	-7.7	-47.2	-30.0	-17.2	Peak	Vertical
	1918.900	-35.9	-3.0	-38.9	-30.0	-8.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-08-23	Test Mode	Mode 4 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975 + 942.325 + 942.675	56.093	-101.6	31.3	-70.3	-54.0	-16.3	Peak	Horizontal
	702.792	-96.7	30.7	-66.0	-54.0	-12.0	Peak	Horizontal
	702.695	-92.4	31.4	-61.0	-54.0	-7.0	Peak	Vertical
	851.299	-101.1	35.7	-65.4	-54.0	-11.4	Peak	Vertical
	1181.800	-30.1	-7.1	-37.2	-30.0	-7.2	RMS	Horizontal
	2331.100	-41.6	-2.1	-43.7	-30.0	-13.7	Peak	Horizontal
	1181.800	-27.8	-7.1	-34.9	-30.0	-4.9	RMS	Vertical
	1422.100	-46.4	-5.5	-51.9	-30.0	-21.9	Peak	Vertical
946.750 + 947.100 + 947.450 + 947.800	54.638	-102.0	31.1	-70.9	-54.0	-16.9	Peak	Horizontal
	707.157	-93.0	30.9	-62.1	-54.0	-8.1	Peak	Horizontal
	707.836	-99.8	31.4	-68.4	-54.0	-14.4	RMS	Vertical
	855.373	-100.5	35.7	-64.8	-54.0	-10.8	Peak	Vertical
	1186.300	-31.6	-7.3	-38.9	-30.0	-8.9	Peak	Horizontal
	1894.600	-49.9	-3.6	-53.5	-30.0	-23.5	Peak	Horizontal
	1187.200	-29.9	-7.5	-37.4	-30.0	-7.4	Peak	Vertical
	1895.500	-47.1	-3.3	-50.4	-30.0	-20.4	Peak	Vertical
951.875 + 951.525 + 951.175 + 950.825	57.160	-103.1	31.5	-71.6	-54.0	-17.6	Peak	Horizontal
	711.522	-92.7	31.3	-61.4	-54.0	-7.4	Peak	Horizontal
	710.843	-98.6	31.5	-67.1	-54.0	-13.1	RMS	Vertical
	848.001	-100.8	35.6	-65.2	-54.0	-11.2	Peak	Vertical
	1191.700	-31.6	-7.3	-38.9	-30.0	-8.9	Peak	Horizontal
	8938.000	-57.5	9.6	-47.9	-30.0	-17.9	Peak	Horizontal
	1191.700	-30.6	-7.5	-38.1	-30.0	-8.1	Peak	Vertical
	8580.700	-56.9	9.2	-47.7	-30.0	-17.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975 + 953.325 + 953.675 + 954.025	61.428	-102.9	31.8	-71.1	-54.0	-17.1	Peak	Horizontal
	713.268	-94.3	31.6	-62.7	-54.0	-8.7	Peak	Horizontal
	713.268	-98.8	31.6	-67.2	-54.0	-13.2	RMS	Vertical
	853.336	-101.6	35.7	-65.9	-54.0	-11.9	Peak	Vertical
	1193.500	-31.9	-7.3	-39.2	-30.0	-9.2	Peak	Horizontal
	1726.300	-45.7	-4.0	-49.7	-30.0	-19.7	Peak	Horizontal
	1193.500	-30.6	-7.6	-38.2	-30.0	-8.2	Peak	Vertical
	1908.100	-48.2	-3.2	-51.4	-30.0	-21.4	Peak	Vertical
956.125 + 955.775 + 955.425 + 955.075	64.435	-102.8	31.2	-71.6	-54.0	-17.6	Peak	Horizontal
	715.111	-100.2	31.7	-68.5	-54.0	-14.5	RMS	Horizontal
	715.790	-98.4	31.7	-66.7	-54.0	-12.7	RMS	Vertical
	847.710	-100.9	35.6	-65.3	-54.0	-11.3	Peak	Vertical
	1196.200	-33.1	-7.3	-40.4	-30.0	-10.4	Peak	Horizontal
	8432.200	-55.3	9.1	-46.2	-30.0	-16.2	Peak	Horizontal
	1196.200	-31.3	-7.6	-38.9	-30.0	-8.9	Peak	Vertical
	1910.800	-50.9	-3.1	-54.0	-30.0	-24.0	Peak	Vertical
956.575 + 956.925 + 957.275 + 957.625	59.682	-103.0	31.8	-71.2	-54.0	-17.2	Peak	Horizontal
	716.954	-100.2	31.9	-68.3	-54.0	-14.3	RMS	Horizontal
	716.954	-97.8	31.8	-66.0	-54.0	-12.0	RMS	Vertical
	822.490	-100.1	35.2	-64.9	-54.0	-10.9	Peak	Vertical
	1197.100	-33.4	-7.3	-40.7	-30.0	-10.7	Peak	Horizontal
	8708.500	-57.6	9.9	-47.7	-30.0	-17.7	Peak	Horizontal
	1197.100	-31.9	-7.6	-39.5	-30.0	-9.5	Peak	Vertical
	1780.300	-44.3	-4.2	-48.5	-30.0	-18.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725 + 959.375 + 959.025 + 958.675	62.010	-102.6	31.7	-70.9	-54.0	-16.9	Peak	Horizontal
	719.379	-98.7	32.0	-66.7	-54.0	-12.7	RMS	Horizontal
	719.282	-97.6	32.0	-65.6	-54.0	-11.6	RMS	Vertical
	854.694	-101.2	35.7	-65.5	-54.0	-11.5	Peak	Vertical
	1199.800	-34.8	-7.3	-42.1	-30.0	-12.1	Peak	Horizontal
	1917.100	-50.1	-3.2	-53.3	-30.0	-23.3	Peak	Horizontal
	1199.800	-32.6	-7.7	-40.3	-30.0	-10.3	Peak	Vertical
	1917.100	-50.6	-3.0	-53.6	-30.0	-23.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-11 ~ 2024-11-12	Test Mode	Mode 5

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975	61.428	-104.9	25.7	-79.2	-54.0	-25.2	Peak	Horizontal
	701.919	-96.7	35.7	-61.0	-54.0	-7.0	RMS	Horizontal
	109.928	-103.1	29.6	-73.5	-54.0	-19.5	Peak	Vertical
	702.016	-95.7	34.9	-60.8	-54.0	-6.8	RMS	Vertical
	1181.800	-42.6	4.1	-38.5	-30.0	-8.5	Peak	Horizontal
	1883.800	-48.0	5.3	-42.7	-30.0	-12.7	Peak	Horizontal
	1181.800	-47.5	5.5	-42.0	-30.0	-12.0	Peak	Vertical
	1883.800	-46.8	5.4	-41.4	-30.0	-11.4	Peak	Vertical
946.750 + 947.100	198.004	-99.5	27.7	-71.8	-54.0	-17.8	Peak	Horizontal
	706.672	-96.0	36.3	-59.7	-54.0	-5.7	RMS	Horizontal
	109.928	-103.0	29.6	-73.4	-54.0	-19.4	Peak	Vertical
	706.769	-93.5	35.0	-58.5	-54.0	-4.5	RMS	Vertical
	1187.200	-45.1	4.2	-40.9	-30.0	-10.9	Peak	Horizontal
	1893.700	-48.2	5.3	-42.9	-30.0	-12.9	Peak	Horizontal
	1187.200	-49.3	6.0	-43.3	-30.0	-13.3	Peak	Vertical
	1893.700	-46.4	5.4	-41.0	-30.0	-11.0	Peak	Vertical
951.875 + 951.525	209.353	-99.7	27.7	-72.0	-54.0	-18.0	Peak	Horizontal
	711.522	-95.3	37.0	-58.3	-54.0	-4.3	RMS	Horizontal
	112.935	-104.3	30.3	-74.0	-54.0	-20.0	Peak	Vertical
	711.813	-94.1	35.8	-58.3	-54.0	-4.3	RMS	Vertical
	1191.700	-46.9	4.3	-42.6	-30.0	-12.6	Peak	Horizontal
	1903.600	-47.5	5.3	-42.2	-30.0	-12.2	Peak	Horizontal
	1191.700	-50.9	6.1	-44.8	-30.0	-14.8	Peak	Vertical
	1903.600	-46.3	5.5	-40.8	-30.0	-10.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975 + 953.325	207.898	-100.4	27.8	-72.6	-54.0	-18.6	Peak	Horizontal
	713.268	-93.0	37.0	-56.0	-54.0	-2.0	RMS	Horizontal
	115.360	-103.6	30.6	-73.0	-54.0	-19.0	Peak	Vertical
	713.268	-92.0	36.1	-55.9	-54.0	-1.9	RMS	Vertical
	1193.500	-46.5	4.3	-42.2	-30.0	-12.2	Peak	Horizontal
	1907.200	-51.3	5.4	-45.9	-30.0	-15.9	Peak	Horizontal
	1193.500	-51.6	6.1	-45.5	-30.0	-15.5	Peak	Vertical
	1906.300	-47.8	5.7	-42.1	-30.0	-12.1	Peak	Vertical
956.125 + 955.775	208.383	-99.7	27.9	-71.8	-54.0	-17.8	Peak	Horizontal
	715.790	-92.9	37.5	-55.4	-54.0	-1.4	RMS	Horizontal
	108.376	-104.9	30.0	-74.9	-54.0	-20.9	Peak	Vertical
	715.790	-91.5	36.3	-55.2	-54.0	-1.2	RMS	Vertical
	1196.200	-47.9	4.3	-43.6	-30.0	-13.6	Peak	Horizontal
	1911.700	-49.4	5.5	-43.9	-30.0	-13.9	Peak	Horizontal
	1196.200	-53.0	6.1	-46.9	-30.0	-16.9	Peak	Vertical
	1912.600	-48.9	6.1	-42.8	-30.0	-12.8	Peak	Vertical
956.575 + 956.925	110.025	-98.5	19.4	-79.1	-54.0	-25.1	Peak	Horizontal
	716.857	-92.7	37.7	-55.0	-54.0	-1.0	RMS	Horizontal
	95.184	-104.8	29.9	-74.9	-54.0	-20.9	Peak	Vertical
	716.857	-92.3	36.5	-55.8	-54.0	-1.8	RMS	Vertical
	1197.100	-48.0	4.4	-43.6	-30.0	-13.6	Peak	Horizontal
	1914.400	-46.9	5.5	-41.4	-30.0	-11.4	Peak	Horizontal
	1197.100	-54.2	6.1	-48.1	-30.0	-18.1	Peak	Vertical
	1913.500	-47.8	6.2	-41.6	-30.0	-11.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725 + 959.375	552.539	-99.2	32.7	-66.5	-54.0	-12.5	Peak	Horizontal
	719.767	-92.3	37.6	-54.7	-54.0	-0.7	RMS	Horizontal
	109.443	-103.7	29.8	-73.9	-54.0	-19.9	Peak	Vertical
	719.767	-93.2	36.6	-56.6	-54.0	-2.6	RMS	Vertical
	1199.800	-48.4	4.4	-44.0	-30.0	-14.0	Peak	Horizontal
	1918.900	-48.4	5.6	-42.8	-30.0	-12.8	Peak	Horizontal
	1199.800	-52.4	6.1	-46.3	-30.0	-16.3	Peak	Vertical
	1919.800	-45.8	6.5	-39.3	-30.0	-9.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-11 ~ 2024-11-12	Test Mode	Mode 6

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975	194.415	-100.8	28.1	-72.7	-54.0	-18.7	Peak	Horizontal
	701.919	-99.0	35.7	-63.3	-54.0	-9.3	RMS	Horizontal
	114.099	-103.9	30.7	-73.2	-54.0	-19.2	Peak	Vertical
	702.016	-98.3	34.9	-63.4	-54.0	-9.4	RMS	Vertical
	1181.800	-47.0	4.1	-42.9	-30.0	-12.9	Peak	Horizontal
	1422.100	-59.8	4.9	-54.9	-30.0	-24.9	Peak	Horizontal
	1181.800	-53.4	5.5	-47.9	-30.0	-17.9	Peak	Vertical
	7876.000	-68.1	22.2	-45.9	-30.0	-15.9	Peak	Vertical
946.750 + 947.100	195.967	-102.1	28.1	-74.0	-54.0	-20.0	Peak	Horizontal
	706.963	-97.0	36.4	-60.6	-54.0	-6.6	RMS	Horizontal
	114.972	-103.3	30.7	-72.6	-54.0	-18.6	Peak	Vertical
	707.060	-93.5	35.0	-58.5	-54.0	-4.5	RMS	Vertical
	1187.200	-50.0	4.2	-45.8	-30.0	-15.8	Peak	Horizontal
	7954.300	-68.4	22.7	-45.7	-30.0	-15.7	Peak	Horizontal
	1187.200	-55.4	6.0	-49.4	-30.0	-19.4	Peak	Vertical
	7261.300	-67.8	21.9	-45.9	-30.0	-15.9	Peak	Vertical
951.875 + 951.525	211.002	-101.7	28.2	-73.5	-54.0	-19.5	Peak	Horizontal
	711.619	-94.0	37.0	-57.0	-54.0	-3.0	RMS	Horizontal
	110.510	-102.0	29.7	-72.3	-54.0	-18.3	Peak	Vertical
	711.619	-94.1	35.7	-58.4	-54.0	-4.4	RMS	Vertical
	1191.700	-48.9	4.3	-44.6	-30.0	-14.6	Peak	Horizontal
	7291.900	-68.4	22.1	-46.3	-30.0	-16.3	Peak	Horizontal
	1191.700	-54.1	6.1	-48.0	-30.0	-18.0	Peak	Vertical
	7512.400	-67.9	21.9	-46.0	-30.0	-16.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975 + 953.325	205.376	-99.7	27.2	-72.5	-54.0	-18.5	Peak	Horizontal
	713.268	-94.6	37.0	-57.6	-54.0	-3.6	RMS	Horizontal
	91.498	-103.1	31.1	-72.0	-54.0	-18.0	Peak	Vertical
	713.268	-92.6	36.1	-56.5	-54.0	-2.5	RMS	Vertical
	1193.500	-50.5	4.3	-46.2	-30.0	-16.2	Peak	Horizontal
	7947.100	-67.2	22.4	-44.8	-30.0	-14.8	Peak	Horizontal
	1193.500	-56.6	6.1	-50.5	-30.0	-20.5	Peak	Vertical
	8006.500	-68.8	23.0	-45.8	-30.0	-15.8	Peak	Vertical
956.125 + 955.775	198.004	-100.2	27.7	-72.5	-54.0	-18.5	Peak	Horizontal
	715.790	-95.2	37.5	-57.7	-54.0	-3.7	RMS	Horizontal
	91.498	-104.7	31.1	-73.6	-54.0	-19.6	Peak	Vertical
	715.790	-94.2	36.3	-57.9	-54.0	-3.9	RMS	Vertical
	1196.200	-49.5	4.3	-45.2	-30.0	-15.2	Peak	Horizontal
	7454.800	-68.3	22.3	-46.0	-30.0	-16.0	Peak	Horizontal
	1196.200	-55.7	6.1	-49.6	-30.0	-19.6	Peak	Vertical
	7546.600	-67.9	22.3	-45.6	-30.0	-15.6	Peak	Vertical
956.575 + 956.925	49.691	-104.4	26.5	-77.9	-54.0	-23.9	Peak	Horizontal
	716.954	-93.8	37.8	-56.0	-54.0	-2.0	RMS	Horizontal
	94.214	-104.4	29.7	-74.7	-54.0	-20.7	Peak	Vertical
	716.857	-93.8	36.5	-57.3	-54.0	-3.3	RMS	Vertical
	1197.100	-51.7	4.4	-47.3	-30.0	-17.3	Peak	Horizontal
	7447.600	-68.7	22.1	-46.6	-30.0	-16.6	Peak	Horizontal
	1197.100	-56.8	6.1	-50.7	-30.0	-20.7	Peak	Vertical
	7492.600	-68.6	22.5	-46.1	-30.0	-16.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725 + 959.375	109.928	-98.0	19.3	-78.7	-54.0	-24.7	Peak	Horizontal
	719.379	-95.4	37.5	-57.9	-54.0	-3.9	RMS	Horizontal
	105.660	-104.2	29.9	-74.3	-54.0	-20.3	Peak	Vertical
	719.476	-94.9	36.7	-58.2	-54.0	-4.2	RMS	Vertical
	1199.800	-51.7	4.4	-47.3	-30.0	-17.3	Peak	Horizontal
	8087.500	-68.4	21.9	-46.5	-30.0	-16.5	Peak	Horizontal
	1199.800	-56.1	6.1	-50.0	-30.0	-20.0	Peak	Vertical
	7302.700	-68.9	21.9	-47.0	-30.0	-17.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Edith Yu
Test Date	2024-09-11 ~ 2024-09-13	Test Mode	Mode 7 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	178.895	-101.8	28.5	-73.3	-54.0	-19.3	Peak	Horizontal
	701.531	-100.2	35.8	-64.4	-54.0	-10.4	RMS	Horizontal
	90.819	-94.9	31.0	-63.9	-54.0	-9.9	Peak	Vertical
	701.822	-90.1	35.0	-55.1	-54.0	-1.1	Peak	Vertical
	1182.700	-43.2	5.9	-37.3	-30.0	-7.3	RMS	Horizontal
	1884.700	-57.4	4.8	-52.6	-30.0	-22.6	Peak	Horizontal
	1182.700	-41.7	6.6	-35.1	-30.0	-5.1	Peak	Vertical
	1884.700	-60.5	6.4	-54.1	-30.0	-24.1	Peak	Vertical
946.750	177.634	-101.3	28.3	-73.0	-54.0	-19.0	Peak	Horizontal
	706.769	-95.7	36.4	-59.3	-54.0	-5.3	RMS	Horizontal
	90.722	-96.5	30.9	-65.6	-54.0	-11.6	Peak	Vertical
	706.769	-96.4	35.0	-61.4	-54.0	-7.4	RMS	Vertical
	1187.200	-42.1	5.8	-36.3	-30.0	-6.3	Peak	Horizontal
	1894.600	-56.0	5.1	-50.9	-30.0	-20.9	Peak	Horizontal
	1187.200	-43.1	6.5	-36.6	-30.0	-6.6	Peak	Vertical
	1894.600	-61.4	6.4	-55.0	-30.0	-25.0	Peak	Vertical
951.600	179.089	-101.2	28.6	-72.6	-54.0	-18.6	Peak	Horizontal
	711.619	-94.4	37.0	-57.4	-54.0	-3.4	RMS	Horizontal
	91.304	-98.0	31.3	-66.7	-54.0	-12.7	Peak	Vertical
	711.328	-92.2	35.7	-56.5	-54.0	-2.5	RMS	Vertical
	1192.600	-44.8	5.7	-39.1	-30.0	-9.1	Peak	Horizontal
	1903.600	-57.4	5.4	-52.0	-30.0	-22.0	Peak	Horizontal
	1192.600	-46.5	6.4	-40.1	-30.0	-10.1	Peak	Vertical
	1903.600	-61.2	6.4	-54.8	-30.0	-24.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	178.410	-102.4	28.3	-74.1	-54.0	-20.1	Peak	Horizontal
	713.559	-93.6	37.0	-56.6	-54.0	-2.6	RMS	Horizontal
	90.722	-95.2	30.9	-64.3	-54.0	-10.3	Peak	Vertical
	713.268	-93.6	36.1	-57.5	-54.0	-3.5	RMS	Vertical
	1194.400	-45.4	5.7	-39.7	-30.0	-9.7	Peak	Horizontal
	1907.200	-57.1	5.5	-51.6	-30.0	-21.6	Peak	Horizontal
	1193.500	-47.1	6.4	-40.7	-30.0	-10.7	Peak	Vertical
	1907.200	-60.5	6.5	-54.0	-30.0	-24.0	Peak	Vertical
955.850	178.992	-99.6	28.5	-71.1	-54.0	-17.1	Peak	Horizontal
	715.693	-92.7	37.5	-55.2	-54.0	-1.2	RMS	Horizontal
	90.819	-98.1	31.0	-67.1	-54.0	-13.1	Peak	Vertical
	715.790	-92.7	36.3	-56.4	-54.0	-2.4	RMS	Vertical
	1196.200	-46.1	5.7	-40.4	-30.0	-10.4	Peak	Horizontal
	1911.700	-54.5	5.6	-48.9	-30.0	-18.9	Peak	Horizontal
	1196.200	-47.9	6.3	-41.6	-30.0	-11.6	Peak	Vertical
	1912.600	-60.0	6.5	-53.5	-30.0	-23.5	Peak	Vertical
956.850	178.895	-100.8	28.5	-72.3	-54.0	-18.3	Peak	Horizontal
	716.566	-94.4	37.6	-56.8	-54.0	-2.8	RMS	Horizontal
	90.819	-96.7	31.0	-65.7	-54.0	-11.7	Peak	Vertical
	716.760	-92.1	36.4	-55.7	-54.0	-1.7	RMS	Vertical
	1197.100	-46.1	5.7	-40.4	-30.0	-10.4	Peak	Horizontal
	1914.400	-55.0	5.7	-49.3	-30.0	-19.3	Peak	Horizontal
	1197.100	-48.2	6.3	-41.9	-30.0	-11.9	Peak	Vertical
	1914.400	-60.7	6.5	-54.2	-30.0	-24.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	178.701	-101.2	28.4	-72.8	-54.0	-18.8	Peak	Horizontal
	719.185	-93.0	37.4	-55.6	-54.0	-1.6	RMS	Horizontal
	90.819	-97.7	31.0	-66.7	-54.0	-12.7	Peak	Vertical
	719.379	-91.7	36.7	-55.0	-54.0	-1.0	RMS	Vertical
	1199.800	-47.0	5.6	-41.4	-30.0	-11.4	Peak	Horizontal
	1919.800	-53.7	5.7	-48.0	-30.0	-18.0	Peak	Horizontal
	1199.800	-48.9	6.2	-42.7	-30.0	-12.7	Peak	Vertical
	1919.800	-61.8	6.5	-55.3	-30.0	-25.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 8 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	110.025	-96.3	23.6	-72.7	-54.0	-18.7	Peak	Horizontal
	701.919	-99.7	37.0	-62.7	-54.0	-8.7	Peak	Horizontal
	99.840	-103.4	37.9	-65.5	-54.0	-11.5	Peak	Vertical
	701.725	-102.7	36.6	-66.1	-54.0	-12.1	RMS	Vertical
	1181.800	-45.0	7.2	-37.8	-30.0	-7.8	Peak	Horizontal
	1883.800	-58.0	7.1	-50.9	-30.0	-20.9	Peak	Horizontal
	1181.800	-46.5	7.8	-38.7	-30.0	-8.7	Peak	Vertical
	1883.800	-53.6	6.9	-46.7	-30.0	-16.7	Peak	Vertical
946.750	214.688	-103.1	31.4	-71.7	-54.0	-17.7	Peak	Horizontal
	706.672	-98.2	36.8	-61.4	-54.0	-7.4	Peak	Horizontal
	110.025	-98.9	33.4	-65.5	-54.0	-11.5	Peak	Vertical
	706.769	-103.0	36.4	-66.6	-54.0	-12.6	RMS	Vertical
	1186.300	-46.0	7.2	-38.8	-30.0	-8.8	Peak	Horizontal
	1893.700	-57.4	7.4	-50.0	-30.0	-20.0	Peak	Horizontal
	1186.300	-47.5	7.7	-39.8	-30.0	-9.8	Peak	Vertical
	1893.700	-56.1	7.1	-49.0	-30.0	-19.0	Peak	Vertical
951.600	213.815	-103.5	31.3	-72.2	-54.0	-18.2	Peak	Horizontal
	711.522	-102.6	37.2	-65.4	-54.0	-11.4	RMS	Horizontal
	110.025	-99.4	33.4	-66.0	-54.0	-12.0	Peak	Vertical
	711.425	-101.1	36.4	-64.7	-54.0	-10.7	RMS	Vertical
	1191.700	-47.8	7.1	-40.7	-30.0	-10.7	Peak	Horizontal
	1902.700	-59.9	7.7	-52.2	-30.0	-22.2	Peak	Horizontal
	1191.700	-50.3	7.3	-43.0	-30.0	-13.0	Peak	Vertical
	1903.600	-54.4	7.4	-47.0	-30.0	-17.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	110.025	-95.9	23.6	-72.3	-54.0	-18.3	Peak	Horizontal
	713.268	-100.1	37.3	-62.8	-54.0	-8.8	RMS	Horizontal
	110.025	-98.9	33.4	-65.5	-54.0	-11.5	Peak	Vertical
	713.171	-101.6	36.6	-65.0	-54.0	-11.0	RMS	Vertical
	1193.500	-48.4	7.0	-41.4	-30.0	-11.4	Peak	Horizontal
	1906.300	-58.3	7.8	-50.5	-30.0	-20.5	Peak	Horizontal
	1193.500	-51.0	7.1	-43.9	-30.0	-13.9	Peak	Vertical
	1906.300	-52.6	7.5	-45.1	-30.0	-15.1	Peak	Vertical
955.850	216.240	-104.0	31.6	-72.4	-54.0	-18.4	Peak	Horizontal
	715.887	-104.1	37.1	-67.0	-54.0	-13.0	RMS	Horizontal
	110.025	-98.4	33.4	-65.0	-54.0	-11.0	Peak	Vertical
	715.693	-99.2	36.5	-62.7	-54.0	-8.7	RMS	Vertical
	1196.200	-49.0	6.9	-42.1	-30.0	-12.1	Peak	Horizontal
	1911.700	-58.2	7.9	-50.3	-30.0	-20.3	Peak	Horizontal
	1196.200	-51.5	6.9	-44.6	-30.0	-14.6	Peak	Vertical
	1911.700	-54.2	7.6	-46.6	-30.0	-16.6	Peak	Vertical
956.850	110.025	-94.6	23.6	-71.0	-54.0	-17.0	Peak	Horizontal
	716.760	-104.0	37.3	-66.7	-54.0	-12.7	RMS	Horizontal
	110.025	-98.4	33.4	-65.0	-54.0	-11.0	Peak	Vertical
	716.857	-98.7	36.5	-62.2	-54.0	-8.2	RMS	Vertical
	1197.100	-49.1	6.9	-42.2	-30.0	-12.2	Peak	Horizontal
	1913.500	-58.6	8.0	-50.6	-30.0	-20.6	Peak	Horizontal
	1197.100	-51.4	6.8	-44.6	-30.0	-14.6	Peak	Vertical
	1913.500	-52.9	7.7	-45.2	-30.0	-15.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	110.025	-95.1	23.6	-71.5	-54.0	-17.5	Peak	Horizontal
	719.573	-103.7	37.4	-66.3	-54.0	-12.3	RMS	Horizontal
	101.780	-103.8	38.2	-65.6	-54.0	-11.6	Peak	Vertical
	719.379	-97.7	36.4	-61.3	-54.0	-7.3	RMS	Vertical
	1199.800	-50.2	6.8	-43.4	-30.0	-13.4	Peak	Horizontal
	1918.900	-60.6	8.1	-52.5	-30.0	-22.5	Peak	Horizontal
	1199.800	-51.4	6.6	-44.8	-30.0	-14.8	Peak	Vertical
	1918.900	-53.6	7.8	-45.8	-30.0	-15.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 8 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	110.025	-95.2	23.6	-71.6	-54.0	-17.6	Peak	Horizontal
	701.919	-105.3	37.0	-68.3	-54.0	-14.3	RMS	Horizontal
	110.025	-99.4	33.4	-66.0	-54.0	-12.0	Peak	Vertical
	701.822	-99.1	36.6	-62.5	-54.0	-8.5	RMS	Vertical
	1181.800	-48.4	7.2	-41.2	-30.0	-11.2	Peak	Horizontal
	1883.800	-60.1	7.1	-53.0	-30.0	-23.0	Peak	Horizontal
	1181.800	-46.5	7.8	-38.7	-30.0	-8.7	Peak	Vertical
	1883.800	-52.9	6.9	-46.0	-30.0	-16.0	Peak	Vertical
946.750	110.025	-94.8	23.6	-71.2	-54.0	-17.2	Peak	Horizontal
	706.866	-102.1	36.8	-65.3	-54.0	-11.3	RMS	Horizontal
	110.025	-98.9	33.4	-65.5	-54.0	-11.5	Peak	Vertical
	706.672	-98.2	36.4	-61.8	-54.0	-7.8	RMS	Vertical
	1186.300	-51.4	7.2	-44.2	-30.0	-14.2	Peak	Horizontal
	1893.700	-57.1	7.4	-49.7	-30.0	-19.7	Peak	Horizontal
	1186.300	-49.4	7.7	-41.7	-30.0	-11.7	Peak	Vertical
	1893.700	-55.5	7.1	-48.4	-30.0	-18.4	Peak	Vertical
951.600	110.025	-98.4	33.4	-65.0	-54.0	-11.0	Peak	Horizontal
	711.522	-99.2	36.4	-62.8	-54.0	-8.8	RMS	Horizontal
	110.025	-98.4	33.4	-65.0	-54.0	-11.0	Peak	Vertical
	711.522	-99.2	36.4	-62.8	-54.0	-8.8	RMS	Vertical
	1191.700	-53.7	7.1	-46.6	-30.0	-16.6	Peak	Horizontal
	1902.700	-59.5	7.7	-51.8	-30.0	-21.8	Peak	Horizontal
	1191.700	-52.3	7.3	-45.0	-30.0	-15.0	Peak	Vertical
	1902.700	-63.1	7.4	-55.7	-30.0	-25.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	110.025	-95.5	23.6	-71.9	-54.0	-17.9	Peak	Horizontal
	713.171	-101.2	37.2	-64.0	-54.0	-10.0	RMS	Horizontal
	110.025	-98.6	33.4	-65.2	-54.0	-11.2	Peak	Vertical
	713.268	-98.4	36.6	-61.8	-54.0	-7.8	RMS	Vertical
	1193.500	-53.6	7.0	-46.6	-30.0	-16.6	Peak	Horizontal
	1906.300	-62.6	7.8	-54.8	-30.0	-24.8	Peak	Horizontal
	1193.500	-53.0	7.1	-45.9	-30.0	-15.9	Peak	Vertical
	1906.300	-58.7	7.5	-51.2	-30.0	-21.2	Peak	Vertical
955.850	110.025	-95.0	23.6	-71.4	-54.0	-17.4	Peak	Horizontal
	715.790	-99.7	37.1	-62.6	-54.0	-8.6	RMS	Horizontal
	110.025	-98.0	33.4	-64.6	-54.0	-10.6	Peak	Vertical
	715.693	-95.7	36.5	-59.2	-54.0	-5.2	RMS	Vertical
	1196.200	-53.2	6.9	-46.3	-30.0	-16.3	Peak	Horizontal
	1911.700	-60.4	7.9	-52.5	-30.0	-22.5	Peak	Horizontal
	1196.200	-52.9	6.9	-46.0	-30.0	-16.0	Peak	Vertical
	1911.700	-61.8	7.6	-54.2	-30.0	-24.2	Peak	Vertical
956.850	110.025	-95.9	23.6	-72.3	-54.0	-18.3	Peak	Horizontal
	716.954	-99.2	37.4	-61.8	-54.0	-7.8	RMS	Horizontal
	102.459	-104.0	38.3	-65.7	-54.0	-11.7	Peak	Vertical
	716.954	-100.0	36.5	-63.5	-54.0	-9.5	RMS	Vertical
	1197.100	-54.2	6.9	-47.3	-30.0	-17.3	Peak	Horizontal
	1913.500	-58.9	8.0	-50.9	-30.0	-20.9	Peak	Horizontal
	1197.100	-53.2	6.8	-46.4	-30.0	-16.4	Peak	Vertical
	1913.500	-59.2	7.7	-51.5	-30.0	-21.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	110.025	-95.7	23.6	-72.1	-54.0	-18.1	Peak	Horizontal
	719.573	-97.7	37.4	-60.3	-54.0	-6.3	RMS	Horizontal
	96.154	-105.0	39.3	-65.7	-54.0	-11.7	Peak	Vertical
	719.282	-95.2	36.4	-58.8	-54.0	-4.8	RMS	Vertical
	1199.800	-54.8	6.8	-48.0	-30.0	-18.0	Peak	Horizontal
	1918.900	-59.1	8.1	-51.0	-30.0	-21.0	Peak	Horizontal
	1199.800	-55.0	6.6	-48.4	-30.0	-18.4	Peak	Vertical
	1918.900	-63.2	7.8	-55.4	-30.0	-25.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 8 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	110.025	-95.3	23.6	-71.7	-54.0	-17.7	Peak	Horizontal
	701.919	-102.1	37.0	-65.1	-54.0	-11.1	RMS	Horizontal
	110.025	-98.5	33.4	-65.1	-54.0	-11.1	Peak	Vertical
	701.822	-100.4	36.6	-63.8	-54.0	-9.8	Peak	Vertical
	1181.800	-55.5	7.2	-48.3	-30.0	-18.3	Peak	Horizontal
	1883.800	-53.3	7.1	-46.2	-30.0	-16.2	Peak	Horizontal
	1181.800	-55.5	7.2	-48.3	-30.0	-18.3	Peak	Vertical
	1883.800	-53.3	7.1	-46.2	-30.0	-16.2	Peak	Vertical
946.750	110.025	-94.9	23.6	-71.3	-54.0	-17.3	Peak	Horizontal
	706.672	-99.2	36.8	-62.4	-54.0	-8.4	RMS	Horizontal
	96.348	-104.7	39.2	-65.5	-54.0	-11.5	Peak	Vertical
	706.672	-100.0	36.4	-63.6	-54.0	-9.6	Peak	Vertical
	1186.300	-56.9	7.2	-49.7	-30.0	-19.7	Peak	Horizontal
	1893.700	-55.3	7.4	-47.9	-30.0	-17.9	Peak	Horizontal
	1187.200	-62.8	7.7	-55.1	-30.0	-25.1	Peak	Vertical
	1893.700	-56.9	7.1	-49.8	-30.0	-19.8	Peak	Vertical
951.600	48.333	-103.1	31.3	-71.8	-54.0	-17.8	Peak	Horizontal
	711.619	-97.7	37.2	-60.5	-54.0	-6.5	RMS	Horizontal
	93.050	-103.0	38.4	-64.6	-54.0	-10.6	Peak	Vertical
	711.619	-98.2	36.4	-61.8	-54.0	-7.8	Peak	Vertical
	1191.700	-58.4	7.1	-51.3	-30.0	-21.3	Peak	Horizontal
	1902.700	-57.4	7.7	-49.7	-30.0	-19.7	Peak	Horizontal
	1191.700	-64.5	7.3	-57.2	-30.0	-27.2	Peak	Vertical
	1902.700	-57.0	7.4	-49.6	-30.0	-19.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	212.651	-103.9	31.0	-72.9	-54.0	-18.9	Peak	Horizontal
	713.074	-99.9	37.2	-62.7	-54.0	-8.7	RMS	Horizontal
	95.960	-103.9	39.1	-64.8	-54.0	-10.8	Peak	Vertical
	713.268	-99.5	36.6	-62.9	-54.0	-8.9	Peak	Vertical
	1193.500	-58.5	7.0	-51.5	-30.0	-21.5	Peak	Horizontal
	1906.300	-57.4	7.8	-49.6	-30.0	-19.6	Peak	Horizontal
	1193.500	-64.3	7.1	-57.2	-30.0	-27.2	Peak	Vertical
	1906.300	-58.6	7.5	-51.1	-30.0	-21.1	Peak	Vertical
955.850	48.236	-103.9	31.3	-72.6	-54.0	-18.6	Peak	Horizontal
	715.984	-98.8	37.1	-61.7	-54.0	-7.7	RMS	Horizontal
	98.191	-104.8	39.1	-65.7	-54.0	-11.7	Peak	Vertical
	715.596	-101.7	36.6	-65.1	-54.0	-11.1	RMS	Vertical
	1195.300	-58.5	6.9	-51.6	-30.0	-21.6	Peak	Horizontal
	1911.700	-60.4	7.9	-52.5	-30.0	-22.5	Peak	Horizontal
	1911.700	-58.1	7.6	-50.5	-30.0	-20.5	Peak	Vertical
	7988.500	-73.0	23.4	-49.6	-30.0	-19.6	Peak	Vertical
956.850	48.721	-104.8	31.4	-73.4	-54.0	-19.4	Peak	Horizontal
	716.857	-98.7	37.4	-61.3	-54.0	-7.3	RMS	Horizontal
	98.870	-104.4	38.8	-65.6	-54.0	-11.6	Peak	Vertical
	716.663	-99.7	36.4	-63.3	-54.0	-9.3	RMS	Vertical
	1197.100	-58.4	6.9	-51.5	-30.0	-21.5	Peak	Horizontal
	1913.500	-59.6	8.0	-51.6	-30.0	-21.6	Peak	Horizontal
	1913.500	-56.6	7.7	-48.9	-30.0	-18.9	Peak	Vertical
	7181.200	-72.6	22.9	-49.7	-30.0	-19.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	51.146	-104.5	30.6	-73.9	-54.0	-19.9	Peak	Horizontal
	719.282	-98.1	37.5	-60.6	-54.0	-6.6	RMS	Horizontal
	97.803	-104.6	39.1	-65.5	-54.0	-11.5	Peak	Vertical
	719.573	-104.9	36.4	-68.5	-54.0	-14.5	RMS	Vertical
	1918.900	-58.7	8.1	-50.6	-30.0	-20.6	Peak	Horizontal
	7322.500	-73.1	23.3	-49.8	-30.0	-19.8	Peak	Horizontal
	1918.900	-56.5	7.8	-48.7	-30.0	-18.7	Peak	Vertical
	5047.300	-70.6	15.8	-54.8	-30.0	-24.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 8 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	50.564	-103.7	30.8	-72.9	-54.0	-18.9	Peak	Horizontal
	701.822	-100.2	37.0	-63.2	-54.0	-9.2	RMS	Horizontal
	97.027	-104.1	39.0	-65.1	-54.0	-11.1	Peak	Vertical
	762.932	-103.2	37.8	-65.4	-54.0	-11.4	Peak	Vertical
	1181.800	-38.7	7.2	-31.5	-30.0	-1.5	RMS	Horizontal
	1883.800	-44.8	7.1	-37.7	-30.0	-7.7	Peak	Horizontal
	1181.800	-49.0	7.8	-41.2	-30.0	-11.2	Peak	Vertical
	1883.800	-46.2	6.9	-39.3	-30.0	-9.3	Peak	Vertical
946.750	49.691	-104.1	31.3	-72.8	-54.0	-18.8	Peak	Horizontal
	706.672	-96.8	36.8	-60.0	-54.0	-6.0	RMS	Horizontal
	90.819	-101.1	36.9	-64.2	-54.0	-10.2	Peak	Vertical
	838.398	-102.6	38.8	-63.8	-54.0	-9.8	Peak	Vertical
	1186.300	-41.2	7.2	-34.0	-30.0	-4.0	RMS	Horizontal
	1893.700	-45.3	7.4	-37.9	-30.0	-7.9	Peak	Horizontal
	1186.300	-50.2	7.7	-42.5	-30.0	-12.5	Peak	Vertical
	1893.700	-46.3	7.1	-39.2	-30.0	-9.2	Peak	Vertical
951.600	51.146	-103.8	30.6	-73.2	-54.0	-19.2	Peak	Horizontal
	711.716	-98.2	37.2	-61.0	-54.0	-7.0	RMS	Horizontal
	93.244	-103.2	38.5	-64.7	-54.0	-10.7	Peak	Vertical
	822.587	-102.2	38.2	-64.0	-54.0	-10.0	Peak	Vertical
	1191.700	-42.9	7.1	-35.8	-30.0	-5.8	RMS	Horizontal
	1902.700	-44.5	7.7	-36.8	-30.0	-6.8	Peak	Horizontal
	1191.700	-52.0	7.3	-44.7	-30.0	-14.7	Peak	Vertical
	1902.700	-46.7	7.4	-39.3	-30.0	-9.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	50.952	-104.0	30.7	-73.3	-54.0	-19.3	Peak	Horizontal
	713.365	-95.5	37.3	-58.2	-54.0	-4.2	RMS	Horizontal
	92.759	-103.7	38.1	-65.6	-54.0	-11.6	Peak	Vertical
	809.783	-102.1	37.4	-64.7	-54.0	-10.7	Peak	Vertical
	1193.500	-43.8	7.0	-36.8	-30.0	-6.8	RMS	Horizontal
	1906.300	-44.4	7.8	-36.6	-30.0	-6.6	Peak	Horizontal
	1193.500	-52.9	7.1	-45.8	-30.0	-15.8	Peak	Vertical
	1906.300	-45.3	7.5	-37.8	-30.0	-7.8	Peak	Vertical
955.850	110.025	-98.0	23.6	-74.4	-54.0	-20.4	Peak	Horizontal
	713.365	-95.4	37.3	-58.1	-54.0	-4.1	RMS	Horizontal
	103.720	-103.0	38.0	-65.0	-54.0	-11.0	Peak	Vertical
	822.393	-102.1	38.2	-63.9	-54.0	-9.9	Peak	Vertical
	1196.200	-43.7	6.9	-36.8	-30.0	-6.8	RMS	Horizontal
	1911.700	-46.6	7.9	-38.7	-30.0	-8.7	Peak	Horizontal
	1196.200	-53.1	6.9	-46.2	-30.0	-16.2	Peak	Vertical
	1911.700	-46.7	7.6	-39.1	-30.0	-9.1	Peak	Vertical
956.850	49.109	-105.0	31.4	-73.6	-54.0	-19.6	Peak	Horizontal
	715.596	-99.8	37.0	-62.8	-54.0	-8.8	RMS	Horizontal
	97.124	-104.9	39.0	-65.9	-54.0	-11.9	Peak	Vertical
	715.693	-100.7	36.5	-64.2	-54.0	-10.2	Peak	Vertical
	1197.100	-43.0	6.9	-36.1	-30.0	-6.1	RMS	Horizontal
	1913.500	-45.7	8.0	-37.7	-30.0	-7.7	Peak	Horizontal
	1197.100	-54.0	6.8	-47.2	-30.0	-17.2	Peak	Vertical
	1913.500	-49.4	7.7	-41.7	-30.0	-11.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	110.025	-88.6	23.6	-65.0	-54.0	-11.0	Peak	Horizontal
	716.663	-95.0	37.3	-57.7	-54.0	-3.7	RMS	Horizontal
	93.729	-104.0	38.8	-65.2	-54.0	-11.2	Peak	Vertical
	771.468	-102.9	37.4	-65.5	-54.0	-11.5	Peak	Vertical
	1198.900	-43.2	6.8	-36.4	-30.0	-6.4	Peak	Horizontal
	1918.900	-44.9	8.1	-36.8	-30.0	-6.8	Peak	Horizontal
	1199.800	-54.6	6.6	-48.0	-30.0	-18.0	Peak	Vertical
	1918.900	-44.4	7.8	-36.6	-30.0	-6.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-08-22 ~ 2024-08-23	Test Mode	Mode 9 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	701.761	-99.0	30.6	-68.4	-54.0	-14.4	Peak	Horizontal
	835.072	-104.0	35.7	-68.3	-54.0	-14.3	Peak	Horizontal
	688.115	-97.9	30.6	-67.3	-54.0	-13.3	Peak	Vertical
	702.007	-95.9	31.3	-64.6	-54.0	-10.6	Peak	Vertical
	1181.800	-30.1	-7.1	-37.2	-30.0	-7.2	Peak	Horizontal
	1883.800	-45.2	-3.9	-49.1	-30.0	-19.1	Peak	Horizontal
	1181.800	-28.8	-7.1	-35.9	-30.0	-5.9	RMS	Vertical
	1883.800	-47.9	-3.4	-51.3	-30.0	-21.3	Peak	Vertical
946.750	707.196	-98.0	30.9	-67.1	-54.0	-13.1	Peak	Horizontal
	841.834	-103.9	35.8	-68.1	-54.0	-14.1	Peak	Horizontal
	706.700	-96.3	31.3	-65.0	-54.0	-11.0	Peak	Vertical
	848.949	-101.7	35.7	-66.0	-54.0	-12.0	Peak	Vertical
	1187.200	-31.7	-7.4	-39.1	-30.0	-9.1	Peak	Horizontal
	1893.700	-47.6	-3.6	-51.2	-30.0	-21.2	Peak	Horizontal
	1187.200	-30.3	-7.5	-37.8	-30.0	-7.8	Peak	Vertical
	1893.700	-45.8	-3.3	-49.1	-30.0	-19.1	Peak	Vertical
951.600	711.674	-98.6	31.3	-67.3	-54.0	-13.3	Peak	Horizontal
	841.834	-103.7	35.8	-67.9	-54.0	-13.9	Peak	Horizontal
	711.424	-93.5	31.5	-62.0	-54.0	-8.0	Peak	Vertical
	849.843	-101.7	35.7	-66.0	-54.0	-12.0	Peak	Vertical
	1191.700	-32.5	-7.3	-39.8	-30.0	-9.8	Peak	Horizontal
	1903.600	-46.8	-3.3	-50.1	-30.0	-20.1	Peak	Horizontal
	1191.700	-30.6	-7.5	-38.1	-30.0	-8.1	Peak	Vertical
	1903.600	-47.1	-3.2	-50.3	-30.0	-20.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	688.115	-99.3	29.5	-69.8	-54.0	-15.8	Peak	Horizontal
	713.423	-99.3	31.6	-67.7	-54.0	-13.7	Peak	Horizontal
	688.115	-97.1	30.6	-66.5	-54.0	-12.5	Peak	Vertical
	713.423	-94.8	31.6	-63.2	-54.0	-9.2	Peak	Vertical
	1193.500	-32.1	-7.3	-39.4	-30.0	-9.4	Peak	Horizontal
	1906.300	-44.7	-3.3	-48.0	-30.0	-18.0	Peak	Horizontal
	1193.500	-31.2	-7.6	-38.8	-30.0	-8.8	Peak	Vertical
	1906.300	-44.9	-3.2	-48.1	-30.0	-18.1	Peak	Vertical
955.850	715.929	-98.7	31.8	-66.9	-54.0	-12.9	Peak	Horizontal
	833.317	-103.8	35.9	-67.9	-54.0	-13.9	Peak	Horizontal
	688.115	-98.2	30.6	-67.6	-54.0	-13.6	Peak	Vertical
	715.678	-93.8	31.7	-62.1	-54.0	-8.1	Peak	Vertical
	1196.200	-33.4	-7.3	-40.7	-30.0	-10.7	Peak	Horizontal
	1911.700	-46.0	-3.2	-49.2	-30.0	-19.2	Peak	Horizontal
	1196.200	-31.9	-7.6	-39.5	-30.0	-9.5	Peak	Vertical
	1911.700	-44.5	-3.1	-47.6	-30.0	-17.6	Peak	Vertical
956.850	716.682	-95.1	31.8	-63.3	-54.0	-9.3	Peak	Horizontal
	851.334	-103.4	35.9	-67.5	-54.0	-13.5	Peak	Horizontal
	688.115	-96.9	30.6	-66.3	-54.0	-12.3	Peak	Vertical
	716.431	-92.8	31.8	-61.0	-54.0	-7.0	Peak	Vertical
	1197.100	-33.9	-7.3	-41.2	-30.0	-11.2	Peak	Horizontal
	1913.500	-47.1	-3.2	-50.3	-30.0	-20.3	Peak	Horizontal
	1197.100	-32.3	-7.6	-39.9	-30.0	-9.9	Peak	Vertical
	1913.500	-47.3	-3.1	-50.4	-30.0	-20.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	719.200	-96.8	32.0	-64.8	-54.0	-10.8	Peak	Horizontal
	830.691	-103.5	35.8	-67.7	-54.0	-13.7	Peak	Horizontal
	688.115	-97.2	30.6	-66.6	-54.0	-12.6	Peak	Vertical
	719.704	-99.4	32.0	-67.4	-54.0	-13.4	RMS	Vertical
	1199.800	-34.6	-7.3	-41.9	-30.0	-11.9	Peak	Horizontal
	1918.900	-47.8	-3.2	-51.0	-30.0	-21.0	Peak	Horizontal
	1199.800	-32.8	-7.7	-40.5	-30.0	-10.5	Peak	Vertical
	1918.900	-43.3	-3.0	-46.3	-30.0	-16.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-08-22 ~ 2024-08-23	Test Mode	Mode 9 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	68.631	-102.5	29.9	-72.6	-54.0	-18.6	Peak	Horizontal
	834.194	-103.1	35.7	-67.4	-54.0	-13.4	Peak	Horizontal
	198.032	-101.2	28.7	-72.5	-54.0	-18.5	Peak	Vertical
	701.761	-96.5	31.3	-65.2	-54.0	-11.2	Peak	Vertical
	1181.800	-38.3	-7.1	-45.4	-30.0	-15.4	Peak	Horizontal
	1884.700	-49.9	-3.9	-53.8	-30.0	-23.8	Peak	Horizontal
	1181.800	-38.1	-7.1	-45.2	-30.0	-15.2	Peak	Vertical
	1422.100	-45.0	-5.5	-50.5	-30.0	-20.5	Peak	Vertical
946.750	706.700	-98.6	30.8	-67.8	-54.0	-13.8	Peak	Horizontal
	834.779	-104.4	35.7	-68.7	-54.0	-14.7	Peak	Horizontal
	706.700	-93.8	31.3	-62.5	-54.0	-8.5	Peak	Vertical
	838.300	-102.2	35.3	-66.9	-54.0	-12.9	Peak	Vertical
	1187.200	-39.8	-7.4	-47.2	-30.0	-17.2	Peak	Horizontal
	1893.700	-50.5	-3.6	-54.1	-30.0	-24.1	Peak	Horizontal
	1187.200	-40.0	-7.5	-47.5	-30.0	-17.5	Peak	Vertical
	1426.600	-47.2	-5.5	-52.7	-30.0	-22.7	Peak	Vertical
951.600	711.424	-97.7	31.3	-66.4	-54.0	-12.4	Peak	Horizontal
	853.426	-103.4	35.8	-67.6	-54.0	-13.6	Peak	Horizontal
	198.032	-100.9	28.7	-72.2	-54.0	-18.2	Peak	Vertical
	711.674	-99.4	31.5	-67.9	-54.0	-13.9	RMS	Vertical
	1191.700	-40.8	-7.3	-48.1	-30.0	-18.1	Peak	Horizontal
	1432.000	-50.1	-5.3	-55.4	-30.0	-25.4	Peak	Horizontal
	1191.700	-40.6	-7.5	-48.1	-30.0	-18.1	Peak	Vertical
	1432.000	-49.1	-5.4	-54.5	-30.0	-24.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	712.922	-92.6	31.5	-61.1	-54.0	-7.1	Peak	Horizontal
	831.566	-103.4	35.9	-67.5	-54.0	-13.5	Peak	Horizontal
	198.032	-100.5	28.7	-71.8	-54.0	-17.8	Peak	Vertical
	713.423	-101.2	31.6	-69.6	-54.0	-15.6	RMS	Vertical
	1193.500	-41.4	-7.3	-48.7	-30.0	-18.7	Peak	Horizontal
	1433.800	-50.2	-5.3	-55.5	-30.0	-25.5	Peak	Horizontal
	1193.500	-40.6	-7.6	-48.2	-30.0	-18.2	Peak	Vertical
	1433.800	-48.8	-5.3	-54.1	-30.0	-24.1	Peak	Vertical
955.850	715.929	-95.6	31.8	-63.8	-54.0	-9.8	Peak	Horizontal
	837.712	-104.1	35.7	-68.4	-54.0	-14.4	Peak	Horizontal
	715.678	-97.1	31.7	-65.4	-54.0	-11.4	RMS	Vertical
	847.759	-103.2	35.6	-67.6	-54.0	-13.6	Peak	Vertical
	1195.300	-42.7	-7.3	-50.0	-30.0	-20.0	Peak	Horizontal
	1435.600	-51.5	-5.2	-56.7	-30.0	-26.7	Peak	Horizontal
	1196.200	-41.6	-7.6	-49.2	-30.0	-19.2	Peak	Vertical
	1436.500	-48.9	-5.3	-54.2	-30.0	-24.2	Peak	Vertical
956.850	716.933	-93.3	31.9	-61.4	-54.0	-7.4	Peak	Horizontal
	827.784	-103.8	35.7	-68.1	-54.0	-14.1	Peak	Horizontal
	198.032	-101.1	28.7	-72.4	-54.0	-18.4	Peak	Vertical
	716.682	-97.8	31.8	-66.0	-54.0	-12.0	RMS	Vertical
	1197.100	-42.7	-7.3	-50.0	-30.0	-20.0	Peak	Horizontal
	1436.500	-49.3	-5.2	-54.5	-30.0	-24.5	Peak	Horizontal
	1197.100	-41.0	-7.6	-48.6	-30.0	-18.6	Peak	Vertical
	1436.500	-48.4	-5.3	-53.7	-30.0	-23.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	719.200	-93.6	32.0	-61.6	-54.0	-7.6	Peak	Horizontal
	837.712	-102.9	35.7	-67.2	-54.0	-13.2	Peak	Horizontal
	719.452	-97.7	32.0	-65.7	-54.0	-11.7	RMS	Vertical
	845.384	-103.6	35.6	-68.0	-54.0	-14.0	Peak	Vertical
	1199.800	-43.5	-7.3	-50.8	-30.0	-20.8	Peak	Horizontal
	4620.700	-53.5	4.0	-49.5	-30.0	-19.5	Peak	Horizontal
	1199.800	-41.9	-7.7	-49.6	-30.0	-19.6	Peak	Vertical
	1440.100	-49.0	-5.2	-54.2	-30.0	-24.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-08-22 ~ 2024-08-23	Test Mode	Mode 9 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	47.460	-101.9	32.2	-69.7	-54.0	-15.7	Peak	Horizontal
	830.832	-101.6	35.8	-65.8	-54.0	-11.8	Peak	Horizontal
	183.842	-101.8	29.2	-72.6	-54.0	-18.6	Peak	Vertical
	701.822	-97.1	31.3	-65.8	-54.0	-11.8	Peak	Vertical
	1181.800	-37.9	-7.1	-45.0	-30.0	-15.0	Peak	Horizontal
	8049.700	-55.2	8.3	-46.9	-30.0	-16.9	Peak	Horizontal
	1181.800	-34.0	-7.1	-41.1	-30.0	-11.1	Peak	Vertical
	1422.100	-47.2	-5.5	-52.7	-30.0	-22.7	Peak	Vertical
946.750	706.866	-97.7	30.8	-66.9	-54.0	-12.9	Peak	Horizontal
	856.149	-100.8	35.6	-65.2	-54.0	-11.2	Peak	Horizontal
	189.468	-101.9	29.6	-72.3	-54.0	-18.3	Peak	Vertical
	706.769	-95.6	31.3	-64.3	-54.0	-10.3	Peak	Vertical
	1186.300	-39.0	-7.3	-46.3	-30.0	-16.3	Peak	Horizontal
	1893.700	-52.5	-3.6	-56.1	-30.0	-26.1	Peak	Horizontal
	1187.200	-35.4	-7.5	-42.9	-30.0	-12.9	Peak	Vertical
	1426.600	-48.7	-5.5	-54.2	-30.0	-24.2	Peak	Vertical
951.600	711.619	-98.7	31.3	-67.4	-54.0	-13.4	Peak	Horizontal
	841.987	-101.3	35.8	-65.5	-54.0	-11.5	Peak	Horizontal
	711.425	-93.3	31.5	-61.8	-54.0	-7.8	Peak	Vertical
	836.458	-100.2	35.3	-64.9	-54.0	-10.9	Peak	Vertical
	1191.700	-39.6	-7.3	-46.9	-30.0	-16.9	Peak	Horizontal
	4905.100	-53.3	4.9	-48.4	-30.0	-18.4	Peak	Horizontal
	1191.700	-36.3	-7.5	-43.8	-30.0	-13.8	Peak	Vertical
	7130.800	-55.6	7.2	-48.4	-30.0	-18.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	713.268	-97.5	31.6	-65.9	-54.0	-11.9	Peak	Horizontal
	829.280	-101.1	35.7	-65.4	-54.0	-11.4	Peak	Horizontal
	190.632	-101.7	29.4	-72.3	-54.0	-18.3	Peak	Vertical
	713.462	-93.5	31.6	-61.9	-54.0	-7.9	Peak	Vertical
	1191.700	-36.3	-7.3	-43.6	-30.0	-13.6	Peak	Horizontal
	1906.300	-50.0	-3.3	-53.3	-30.0	-23.3	Peak	Horizontal
	1193.500	-37.0	-7.6	-44.6	-30.0	-14.6	Peak	Vertical
	8424.100	-56.6	8.9	-47.7	-30.0	-17.7	Peak	Vertical
955.850	715.790	-96.0	31.8	-64.2	-54.0	-10.2	Peak	Horizontal
	836.652	-101.4	35.8	-65.6	-54.0	-11.6	Peak	Horizontal
	715.790	-93.1	31.7	-61.4	-54.0	-7.4	Peak	Vertical
	839.950	-100.4	35.4	-65.0	-54.0	-11.0	Peak	Vertical
	1196.200	-40.8	-7.3	-48.1	-30.0	-18.1	Peak	Horizontal
	8698.600	-56.8	9.8	-47.0	-30.0	-17.0	Peak	Horizontal
	1196.200	-37.6	-7.6	-45.2	-30.0	-15.2	Peak	Vertical
	1911.700	-51.4	-3.1	-54.5	-30.0	-24.5	Peak	Vertical
956.850	716.566	-96.3	31.8	-64.5	-54.0	-10.5	Peak	Horizontal
	850.329	-101.8	35.9	-65.9	-54.0	-11.9	Peak	Horizontal
	182.969	-101.6	29.1	-72.5	-54.0	-18.5	RMS	Vertical
	717.245	-103.2	31.8	-71.4	-54.0	-17.4	Peak	Vertical
	1197.100	-41.1	-7.3	-48.4	-30.0	-18.4	Peak	Horizontal
	4326.400	-54.8	4.4	-50.4	-30.0	-20.4	Peak	Horizontal
	1197.100	-37.7	-7.6	-45.3	-30.0	-15.3	Peak	Vertical
	1913.500	-51.9	-3.1	-55.0	-30.0	-25.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	719.573	-94.8	32.0	-62.8	-54.0	-8.8	Peak	Horizontal
	843.830	-101.1	35.8	-65.3	-54.0	-11.3	Peak	Horizontal
	719.476	-100.9	32.0	-68.9	-54.0	-14.9	RMS	Vertical
	849.844	-101.7	35.7	-66.0	-54.0	-12.0	Peak	Vertical
	1199.800	-42.9	-7.3	-50.2	-30.0	-20.2	Peak	Horizontal
	1918.900	-51.6	-3.2	-54.8	-30.0	-24.8	Peak	Horizontal
	1199.800	-40.0	-7.7	-47.7	-30.0	-17.7	Peak	Vertical
	6417.100	-54.2	5.9	-48.3	-30.0	-18.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-08-22 ~ 2024-08-23	Test Mode	Mode 9 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	701.822	-99.7	30.6	-69.1	-54.0	-15.1	Peak	Horizontal
	849.553	-101.4	35.9	-65.5	-54.0	-11.5	Peak	Horizontal
	701.919	-92.8	31.3	-61.5	-54.0	-7.5	Peak	Vertical
	852.657	-100.7	35.7	-65.0	-54.0	-11.0	Peak	Vertical
	1181.800	-41.1	-7.1	-48.2	-30.0	-18.2	Peak	Horizontal
	1883.800	-43.9	-3.9	-47.8	-30.0	-17.8	Peak	Horizontal
	1181.800	-40.3	-7.1	-47.4	-30.0	-17.4	Peak	Vertical
	1883.800	-43.8	-3.4	-47.2	-30.0	-17.2	Peak	Vertical
946.750	706.769	-95.8	30.8	-65.0	-54.0	-11.0	Peak	Horizontal
	833.257	-101.1	35.9	-65.2	-54.0	-11.2	Peak	Horizontal
	706.575	-100.5	31.3	-69.2	-54.0	-15.2	RMS	Vertical
	859.738	-100.4	35.7	-64.7	-54.0	-10.7	Peak	Vertical
	1185.400	-43.2	-7.3	-50.5	-30.0	-20.5	Peak	Horizontal
	1891.000	-43.3	-3.7	-47.0	-30.0	-17.0	Peak	Horizontal
	1186.300	-42.2	-7.4	-49.6	-30.0	-19.6	Peak	Vertical
	1891.900	-42.4	-3.4	-45.8	-30.0	-15.8	Peak	Vertical
951.600	711.716	-97.5	31.3	-66.2	-54.0	-12.2	Peak	Horizontal
	854.694	-101.2	35.7	-65.5	-54.0	-11.5	Peak	Horizontal
	711.716	-99.8	31.5	-68.3	-14.2	-54.1	RMS	Vertical
	841.793	-101.4	35.5	-65.9	-11.8	-54.1	Peak	Vertical
	1191.700	-44.6	-7.3	-51.9	-30.0	-21.9	Peak	Horizontal
	1903.600	-45.3	-3.3	-48.6	-30.0	-18.6	Peak	Horizontal
	1191.700	-43.1	-7.5	-50.6	-30.0	-20.6	Peak	Vertical
	1903.600	-44.1	-3.2	-47.3	-30.0	-17.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	713.074	-93.8	31.5	-62.3	-54.0	-8.3	Peak	Horizontal
	846.449	-101.6	36.0	-65.6	-54.0	-11.6	Peak	Horizontal
	712.783	-100.3	31.6	-68.7	-54.0	-14.7	RMS	Vertical
	855.470	-101.4	35.7	-65.7	-54.0	-11.7	Peak	Vertical
	1193.500	-45.7	-7.3	-53.0	-30.0	-23.0	Peak	Horizontal
	1907.200	-44.0	-3.3	-47.3	-30.0	-17.3	Peak	Horizontal
	1193.500	-43.4	-7.6	-51.0	-30.0	-21.0	Peak	Vertical
	1907.200	-43.5	-3.2	-46.7	-30.0	-16.7	Peak	Vertical
955.850	715.596	-95.1	31.8	-63.3	-54.0	-9.3	Peak	Horizontal
	847.031	-101.7	36.0	-65.7	-54.0	-11.7	Peak	Horizontal
	715.887	-98.4	31.7	-66.7	-54.0	-12.7	RMS	Vertical
	858.574	-100.9	35.7	-65.2	-54.0	-11.2	Peak	Vertical
	1195.300	-46.8	-7.3	-54.1	-30.0	-24.1	Peak	Horizontal
	1911.700	-45.8	-3.2	-49.0	-30.0	-19.0	Peak	Horizontal
	1196.200	-44.1	-7.6	-51.7	-30.0	-21.7	Peak	Vertical
	1911.700	-44.4	-3.1	-47.5	-30.0	-17.5	Peak	Vertical
956.850	717.148	-95.0	31.9	-63.1	-54.0	-9.1	Peak	Horizontal
	858.477	-99.7	35.5	-64.2	-54.0	-10.2	Peak	Horizontal
	717.051	-100.6	31.8	-68.8	-54.0	-14.8	RMS	Vertical
	856.246	-100.6	35.7	-64.9	-54.0	-10.9	Peak	Vertical
	1197.100	-46.3	-7.3	-53.6	-30.0	-23.6	Peak	Horizontal
	1913.500	-46.0	-3.2	-49.2	-30.0	-19.2	Peak	Horizontal
	1197.100	-44.7	-7.6	-52.3	-30.0	-22.3	Peak	Vertical
	1913.500	-42.9	-3.1	-46.0	-30.0	-16.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	719.379	-94.4	32.0	-62.4	-54.0	-8.4	Peak	Horizontal
	840.338	-100.9	35.7	-65.2	-54.0	-11.2	Peak	Horizontal
	719.379	-100.0	32.0	-68.0	-54.0	-14.0	RMS	Vertical
	858.768	-100.7	35.7	-65.0	-54.0	-11.0	Peak	Vertical
	1199.800	-47.4	-7.3	-54.7	-30.0	-24.7	Peak	Horizontal
	1919.800	-47.8	-3.2	-51.0	-30.0	-21.0	Peak	Horizontal
	1199.800	-44.2	-7.7	-51.9	-30.0	-21.9	Peak	Vertical
	1918.900	-43.1	-3.0	-46.1	-30.0	-16.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-11 ~ 2024-11-12	Test Mode	Mode 10

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	211.875	-96.3	27.8	-68.5	-54.0	-14.5	Peak	Horizontal
	701.822	-95.3	35.7	-59.6	-54.0	-5.6	Peak	Horizontal
	116.136	-103.6	30.3	-73.3	-54.0	-19.3	Peak	Vertical
	702.210	-92.8	34.8	-58.0	-54.0	-4.0	Peak	Vertical
	1181.800	-48.0	4.1	-43.9	-30.0	-13.9	Peak	Horizontal
	1422.100	-58.1	4.9	-53.2	-30.0	-23.2	Peak	Horizontal
	1182.700	-50.1	5.6	-44.5	-30.0	-14.5	Peak	Vertical
	1884.700	-57.2	5.4	-51.8	-30.0	-21.8	Peak	Vertical
946.750	210.420	-100.1	28.1	-72.0	-54.0	-18.0	Peak	Horizontal
	706.672	-95.0	36.3	-58.7	-54.0	-4.7	RMS	Horizontal
	104.205	-96.4	29.9	-66.5	-54.0	-12.5	Peak	Vertical
	706.575	-94.5	35.1	-59.4	-54.0	-5.4	RMS	Vertical
	1191.700	-47.7	4.3	-43.4	-30.0	-13.4	Peak	Horizontal
	2854.900	-58.5	9.9	-48.6	-30.0	-18.6	Peak	Horizontal
	1191.700	-52.2	6.1	-46.1	-30.0	-16.1	Peak	Vertical
	1903.600	-58.8	5.5	-53.3	-30.0	-23.3	Peak	Vertical
951.600	198.004	-100.5	27.7	-72.8	-54.0	-18.8	Peak	Horizontal
	711.619	-96.2	37.0	-59.2	-54.0	-5.2	RMS	Horizontal
	91.886	-104.2	30.8	-73.4	-54.0	-19.4	Peak	Vertical
	711.813	-92.1	35.8	-56.3	-54.0	-2.3	RMS	Vertical
	1193.500	-49.1	4.3	-44.8	-30.0	-14.8	Peak	Horizontal
	2859.400	-62.7	9.9	-52.8	-30.0	-22.8	Peak	Horizontal
	1193.500	-52.5	6.1	-46.4	-30.0	-16.4	Peak	Vertical
	1906.300	-53.6	5.7	-47.9	-30.0	-17.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250	210.420	-96.4	27.9	-68.5	-54.0	-14.5	Peak	Horizontal
	712.977	-98.6	37.0	-61.6	-54.0	-7.6	Peak	Horizontal
	112.353	-102.9	30.0	-72.9	-54.0	-18.9	Peak	Vertical
	713.171	-92.0	36.1	-55.9	-54.0	-1.9	Peak	Vertical
	1187.200	-45.3	4.2	-41.1	-30.0	-11.1	Peak	Horizontal
	2840.500	-59.0	10.1	-48.9	-30.0	-18.9	Peak	Horizontal
	1187.200	-50.8	6.0	-44.8	-30.0	-14.8	Peak	Vertical
	1893.700	-55.5	5.4	-50.1	-30.0	-20.1	Peak	Vertical
955.850	210.420	-102.2	28.1	-74.1	-54.0	-20.1	Peak	Horizontal
	715.984	-94.0	37.5	-56.5	-54.0	-2.5	RMS	Horizontal
	110.025	-103.5	29.6	-73.9	-54.0	-19.9	Peak	Vertical
	715.596	-93.5	36.3	-57.2	-54.0	-3.2	RMS	Vertical
	1196.200	-49.6	4.3	-45.3	-30.0	-15.3	Peak	Horizontal
	2867.500	-62.8	9.8	-53.0	-30.0	-23.0	Peak	Horizontal
	1196.200	-53.0	6.1	-46.9	-30.0	-16.9	Peak	Vertical
	1911.700	-59.3	6.1	-53.2	-30.0	-23.2	Peak	Vertical
956.850	198.004	-99.3	27.7	-71.6	-54.0	-17.6	Peak	Horizontal
	716.857	-94.1	37.7	-56.4	-54.0	-2.4	RMS	Horizontal
	96.251	-104.0	29.9	-74.1	-54.0	-20.1	Peak	Vertical
	717.245	-92.5	36.5	-56.0	-54.0	-2.0	RMS	Vertical
	1197.100	-49.0	4.4	-44.6	-30.0	-14.6	Peak	Horizontal
	1913.500	-60.2	5.5	-54.7	-30.0	-24.7	Peak	Horizontal
	1197.100	-53.2	6.1	-47.1	-30.0	-17.1	Peak	Vertical
	1914.400	-53.1	6.2	-46.9	-30.0	-16.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450	207.898	-101.9	27.8	-74.1	-54.0	-20.1	Peak	Horizontal
	719.282	-95.3	37.4	-57.9	-54.0	-3.9	RMS	Horizontal
	101.392	-103.5	29.6	-73.9	-54.0	-19.9	Peak	Vertical
	719.379	-91.9	36.7	-55.2	-54.0	-1.2	RMS	Vertical
	1199.800	-51.6	4.4	-47.2	-30.0	-17.2	Peak	Horizontal
	2878.300	-61.7	9.7	-52.0	-30.0	-22.0	Peak	Horizontal
	1199.800	-53.7	6.1	-47.6	-30.0	-17.6	Peak	Vertical
	1918.900	-59.0	6.5	-52.5	-30.0	-22.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 11 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	110.025	-97.3	23.6	-73.7	-54.0	-19.7	Peak	Horizontal
	701.628	-99.8	37.0	-62.8	-54.0	-8.8	RMS	Horizontal
	92.274	-103.1	37.7	-65.4	-54.0	-11.4	Peak	Vertical
	701.628	-99.4	36.6	-62.8	-54.0	-8.8	RMS	Vertical
	1181.800	-41.9	7.2	-34.7	-30.0	-4.7	RMS	Horizontal
	1882.900	-56.2	7.1	-49.1	-30.0	-19.1	Peak	Horizontal
	1181.800	-43.0	7.8	-35.2	-30.0	-5.2	RMS	Vertical
	1882.900	-52.9	6.9	-46.0	-30.0	-16.0	Peak	Vertical
946.750	213.330	-103.3	31.2	-72.1	-54.0	-18.1	Peak	Horizontal
	706.672	-102.3	36.8	-65.5	-54.0	-11.5	RMS	Horizontal
	96.833	-104.9	39.1	-65.8	-54.0	-11.8	Peak	Vertical
	706.672	-98.1	36.4	-61.7	-54.0	-7.7	RMS	Vertical
	1186.300	-43.2	7.2	-36.0	-30.0	-6.0	RMS	Horizontal
	1892.800	-56.4	7.4	-49.0	-30.0	-19.0	Peak	Horizontal
	1186.300	-45.1	7.7	-37.4	-30.0	-7.4	RMS	Vertical
	1893.700	-53.4	7.1	-46.3	-30.0	-16.3	Peak	Vertical
951.875	110.025	-98.3	23.6	-74.7	-54.0	-20.7	Peak	Horizontal
	711.813	-105.1	37.2	-67.9	-54.0	-13.9	RMS	Horizontal
	92.177	-102.7	37.5	-65.2	-54.0	-11.2	Peak	Vertical
	711.813	-100.0	36.4	-63.6	-54.0	-9.6	RMS	Vertical
	1191.700	-43.6	7.1	-36.5	-30.0	-6.5	Peak	Horizontal
	1903.600	-56.4	7.7	-48.7	-30.0	-18.7	Peak	Horizontal
	1191.700	-46.0	7.3	-38.7	-30.0	-8.7	Peak	Vertical
	1903.600	-52.5	7.4	-45.1	-30.0	-15.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	110.025	-98.0	23.6	-74.4	-54.0	-20.4	Peak	Horizontal
	712.977	-105.5	37.2	-68.3	-54.0	-14.3	RMS	Horizontal
	97.221	-104.3	39.0	-65.3	-54.0	-11.3	Peak	Vertical
	712.880	-101.3	36.5	-64.8	-54.0	-10.8	RMS	Vertical
	1192.600	-44.1	7.0	-37.1	-30.0	-7.1	Peak	Horizontal
	1906.300	-56.7	7.8	-48.9	-30.0	-18.9	Peak	Horizontal
	1192.600	-46.7	7.2	-39.5	-30.0	-9.5	Peak	Vertical
	1906.300	-51.9	7.5	-44.4	-30.0	-14.4	Peak	Vertical
956.125	49.303	-104.6	31.5	-73.1	-54.0	-19.1	Peak	Horizontal
	716.081	-106.1	37.1	-69.0	-54.0	-15.0	RMS	Horizontal
	94.408	-104.3	38.9	-65.4	-54.0	-11.4	Peak	Vertical
	716.081	-101.7	36.4	-65.3	-54.0	-11.3	RMS	Vertical
	1196.200	-44.6	6.9	-37.7	-30.0	-7.7	Peak	Horizontal
	1911.700	-56.5	7.9	-48.6	-30.0	-18.6	Peak	Horizontal
	1196.200	-46.8	6.9	-39.9	-30.0	-9.9	Peak	Vertical
	1912.600	-53.9	7.6	-46.3	-30.0	-16.3	Peak	Vertical
956.575	110.025	-97.0	23.6	-73.4	-54.0	-19.4	Peak	Horizontal
	716.566	-105.8	37.2	-68.6	-54.0	-14.6	RMS	Horizontal
	96.251	-104.3	39.3	-65.0	-54.0	-11.0	Peak	Vertical
	716.469	-102.7	36.4	-66.3	-54.0	-12.3	RMS	Vertical
	1196.200	-44.8	6.9	-37.9	-30.0	-7.9	Peak	Horizontal
	1913.500	-56.6	8.0	-48.6	-30.0	-18.6	Peak	Horizontal
	1196.200	-46.9	6.9	-40.0	-30.0	-10.0	Peak	Vertical
	5739.400	-60.4	16.6	-43.8	-30.0	-13.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	49.012	-104.0	31.4	-72.6	-54.0	-18.6	Peak	Horizontal
	719.767	-105.1	37.4	-67.7	-54.0	-13.7	RMS	Horizontal
	92.080	-102.7	37.4	-65.3	-54.0	-11.3	Peak	Vertical
	719.670	-101.4	36.5	-64.9	-54.0	-10.9	RMS	Vertical
	1199.800	-45.7	6.8	-38.9	-30.0	-8.9	Peak	Horizontal
	1918.900	-57.4	8.1	-49.3	-30.0	-19.3	Peak	Horizontal
	1199.800	-47.1	6.6	-40.5	-30.0	-10.5	Peak	Vertical
	1918.900	-52.6	7.8	-44.8	-30.0	-14.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 11 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	110.025	-97.8	23.6	-74.2	-54.0	-20.2	Peak	Horizontal
	701.628	-102.3	37.0	-65.3	-54.0	-11.3	Peak	Horizontal
	92.080	-102.3	37.4	-64.9	-54.0	-10.9	Peak	Vertical
	701.628	-106.2	36.6	-69.6	-54.0	-15.6	RMS	Vertical
	1181.800	-44.1	7.2	-36.9	-30.0	-6.9	Peak	Horizontal
	1882.900	-56.3	7.1	-49.2	-30.0	-19.2	Peak	Horizontal
	1181.800	-44.1	7.8	-36.3	-30.0	-6.3	RMS	Vertical
	1882.900	-54.1	6.9	-47.2	-30.0	-17.2	Peak	Vertical
946.750	49.109	-103.6	31.4	-72.2	-54.0	-18.2	Peak	Horizontal
	706.672	-101.0	36.8	-64.2	-54.0	-10.2	Peak	Horizontal
	95.960	-103.8	39.1	-64.7	-54.0	-10.7	Peak	Vertical
	706.769	-104.6	36.4	-68.2	-54.0	-14.2	RMS	Vertical
	1186.300	-46.8	7.2	-39.6	-30.0	-9.6	Peak	Horizontal
	1892.800	-56.1	7.4	-48.7	-30.0	-18.7	Peak	Horizontal
	1186.300	-45.4	7.7	-37.7	-30.0	-7.7	Peak	Vertical
	1893.700	-54.8	7.1	-47.7	-30.0	-17.7	Peak	Vertical
951.875	110.025	-98.5	23.6	-74.9	-54.0	-20.9	Peak	Horizontal
	711.813	-98.5	37.2	-61.3	-54.0	-7.3	Peak	Horizontal
	98.676	-104.3	38.9	-65.4	-54.0	-11.4	Peak	Vertical
	711.910	-101.5	36.4	-65.1	-54.0	-11.1	RMS	Vertical
	1191.700	-49.2	7.1	-42.1	-30.0	-12.1	Peak	Horizontal
	1903.600	-59.7	7.7	-52.0	-30.0	-22.0	Peak	Horizontal
	1191.700	-48.2	7.3	-40.9	-30.0	-10.9	Peak	Vertical
	1903.600	-56.0	7.4	-48.6	-30.0	-18.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	212.942	-102.6	31.1	-71.5	-54.0	-17.5	Peak	Horizontal
	712.977	-107.2	37.2	-70.0	-54.0	-16.0	RMS	Horizontal
	94.117	-104.5	39.0	-65.5	-54.0	-11.5	Peak	Vertical
	712.977	-101.7	36.6	-65.1	-54.0	-11.1	RMS	Vertical
	1192.600	-49.7	7.0	-42.7	-30.0	-12.7	Peak	Horizontal
	1905.400	-61.5	7.7	-53.8	-30.0	-23.8	Peak	Horizontal
	1192.600	-49.0	7.2	-41.8	-30.0	-11.8	Peak	Vertical
	1906.300	-58.9	7.5	-51.4	-30.0	-21.4	Peak	Vertical
956.125	110.025	-97.5	23.6	-73.9	-54.0	-19.9	Peak	Horizontal
	715.984	-105.3	37.1	-68.2	-54.0	-14.2	RMS	Horizontal
	96.833	-103.8	39.1	-64.7	-54.0	-10.7	Peak	Vertical
	716.081	-98.3	36.4	-61.9	-54.0	-7.9	RMS	Vertical
	1196.200	-49.3	6.9	-42.4	-30.0	-12.4	Peak	Horizontal
	1912.600	-57.7	8.0	-49.7	-30.0	-19.7	Peak	Horizontal
	1196.200	-48.6	6.9	-41.7	-30.0	-11.7	Peak	Vertical
	1912.600	-60.0	7.6	-52.4	-30.0	-22.4	Peak	Vertical
956.575	216.046	-104.1	31.6	-72.5	-54.0	-18.5	Peak	Horizontal
	716.566	-104.7	37.2	-67.5	-54.0	-13.5	RMS	Horizontal
	97.997	-103.9	39.1	-64.8	-54.0	-10.8	Peak	Vertical
	716.566	-98.6	36.4	-62.2	-54.0	-8.2	RMS	Vertical
	1196.200	-48.6	6.9	-41.7	-30.0	-11.7	Peak	Horizontal
	1912.600	-58.8	8.0	-50.8	-30.0	-20.8	Peak	Horizontal
	1196.200	-49.4	6.9	-42.5	-30.0	-12.5	Peak	Vertical
	1913.500	-62.2	7.7	-54.5	-30.0	-24.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	215.367	-103.8	31.4	-72.4	-54.0	-18.4	Peak	Horizontal
	719.670	-103.7	37.4	-66.3	-54.0	-12.3	RMS	Horizontal
	93.632	-104.0	38.7	-65.3	-54.0	-11.3	Peak	Vertical
	719.670	-97.6	36.5	-61.1	-54.0	-7.1	RMS	Vertical
	1199.800	-50.9	6.8	-44.1	-30.0	-14.1	Peak	Horizontal
	1919.800	-59.9	8.1	-51.8	-30.0	-21.8	Peak	Horizontal
	1199.800	-50.5	6.6	-43.9	-30.0	-13.9	Peak	Vertical
	1918.900	-60.3	7.8	-52.5	-30.0	-22.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 11 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	93.050	-87.5	23.7	-63.8	-54.0	-9.8	Peak	Horizontal
	805.806	-102.1	36.9	-65.2	-54.0	-11.2	Peak	Horizontal
	103.041	-103.5	38.1	-65.4	-54.0	-11.4	Peak	Vertical
	765.745	-102.7	37.7	-65.0	-54.0	-11.0	Peak	Vertical
	1181.800	-51.3	7.2	-44.1	-30.0	-14.1	Peak	Horizontal
	1882.900	-51.9	7.1	-44.8	-30.0	-14.8	Peak	Horizontal
	1181.800	-58.4	7.8	-50.6	-30.0	-20.6	Peak	Vertical
	1882.900	-54.1	6.9	-47.2	-30.0	-17.2	Peak	Vertical
946.750	50.855	-102.7	30.7	-72.0	-54.0	-18.0	Peak	Horizontal
	706.769	-103.0	36.8	-66.2	-54.0	-12.2	RMS	Horizontal
	93.147	-103.8	38.4	-65.4	-54.0	-11.4	Peak	Vertical
	706.866	-101.5	36.4	-65.1	-54.0	-11.1	Peak	Vertical
	1186.300	-53.0	7.2	-45.8	-30.0	-15.8	Peak	Horizontal
	1893.700	-54.8	7.4	-47.4	-30.0	-17.4	Peak	Horizontal
	1186.300	-60.8	7.7	-53.1	-30.0	-23.1	Peak	Vertical
	1893.700	-53.9	7.1	-46.8	-30.0	-16.8	Peak	Vertical
951.875	48.333	-104.0	31.3	-72.7	-54.0	-18.7	Peak	Horizontal
	711.813	-101.6	37.2	-64.4	-54.0	-10.4	RMS	Horizontal
	97.124	-104.3	39.0	-65.3	-54.0	-11.3	Peak	Vertical
	711.910	-99.7	36.4	-63.3	-54.0	-9.3	Peak	Vertical
	1191.700	-54.4	7.1	-47.3	-30.0	-17.3	Peak	Horizontal
	1903.600	-55.0	7.7	-47.3	-30.0	-17.3	Peak	Horizontal
	1191.700	-60.7	7.3	-53.4	-30.0	-23.4	Peak	Vertical
	1903.600	-56.3	7.4	-48.9	-30.0	-18.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	215.755	-104.2	31.5	-72.7	-54.0	-18.7	Peak	Horizontal
	712.977	-98.4	37.2	-61.2	-54.0	-7.2	RMS	Horizontal
	94.214	-104.6	39.0	-65.6	-54.0	-11.6	Peak	Vertical
	712.977	-98.8	36.6	-62.2	-54.0	-8.2	Peak	Vertical
	1192.600	-54.9	7.0	-47.9	-30.0	-17.9	Peak	Horizontal
	1905.400	-56.6	7.7	-48.9	-30.0	-18.9	Peak	Horizontal
	1905.400	-55.9	7.4	-48.5	-30.0	-18.5	Peak	Vertical
	7090.300	-73.1	22.7	-50.4	-30.0	-20.4	Peak	Vertical
956.125	47.751	-104.7	31.4	-73.3	-54.0	-19.3	Peak	Horizontal
	716.081	-99.7	37.1	-62.6	-54.0	-8.6	RMS	Horizontal
	101.974	-104.0	38.4	-65.6	-54.0	-11.6	Peak	Vertical
	716.275	-100.3	36.3	-64.0	-54.0	-10.0	Peak	Vertical
	1196.200	-54.5	6.9	-47.6	-30.0	-17.6	Peak	Horizontal
	1912.600	-56.3	8.0	-48.3	-30.0	-18.3	Peak	Horizontal
	1196.200	-61.9	6.9	-55.0	-30.0	-25.0	Peak	Vertical
	1911.700	-55.5	7.6	-47.9	-30.0	-17.9	Peak	Vertical
956.575	216.046	-102.3	31.6	-70.7	-54.0	-16.7	Peak	Horizontal
	716.566	-98.1	37.2	-60.9	-54.0	-6.9	RMS	Horizontal
	99.355	-103.9	38.4	-65.5	-54.0	-11.5	Peak	Vertical
	716.566	-99.9	36.4	-63.5	-54.0	-9.5	Peak	Vertical
	1196.200	-54.8	6.9	-47.9	-30.0	-17.9	Peak	Horizontal
	1913.500	-59.0	8.0	-51.0	-30.0	-21.0	Peak	Horizontal
	1196.200	-62.4	6.9	-55.5	-30.0	-25.5	Peak	Vertical
	1912.600	-56.5	7.6	-48.9	-30.0	-18.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	110.025	-97.7	23.6	-74.1	-54.0	-20.1	Peak	Horizontal
	719.767	-99.2	37.4	-61.8	-54.0	-7.8	RMS	Horizontal
	98.191	-104.6	39.1	-65.5	-54.0	-11.5	Peak	Vertical
	719.670	-99.1	36.5	-62.6	-54.0	-8.6	Peak	Vertical
	1199.800	-57.2	6.8	-50.4	-30.0	-20.4	Peak	Horizontal
	1919.800	-58.0	8.1	-49.9	-30.0	-19.9	Peak	Horizontal
	1919.800	-55.3	7.8	-47.5	-30.0	-17.5	Peak	Vertical
	6607.900	-71.6	20.0	-51.6	-30.0	-21.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 11 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	178.216	-101.2	28.2	-73.0	-54.0	-19.0	Peak	Horizontal
	701.628	-98.2	35.7	-62.5	-54.0	-8.5	RMS	Horizontal
	91.401	-100.1	31.2	-68.9	-54.0	-14.9	Peak	Vertical
	701.628	-97.6	35.0	-62.6	-54.0	-8.6	RMS	Vertical
	1181.800	-42.8	7.2	-35.6	-30.0	-5.6	Peak	Horizontal
	1882.900	-55.5	7.1	-48.4	-30.0	-18.4	Peak	Horizontal
	1181.800	-45.2	7.8	-37.4	-30.0	-7.4	Peak	Vertical
	1882.900	-47.6	6.9	-40.7	-30.0	-10.7	Peak	Vertical
946.750	179.089	-101.9	28.6	-73.3	-54.0	-19.3	Peak	Horizontal
	706.769	-95.7	36.4	-59.3	-54.0	-5.3	RMS	Horizontal
	91.401	-99.5	31.2	-68.3	-54.0	-14.3	Peak	Vertical
	706.769	-96.4	35.0	-61.4	-54.0	-7.4	RMS	Vertical
	1186.300	-38.2	7.2	-31.0	-30.0	-1.0	RMS	Horizontal
	1893.700	-44.1	7.4	-36.7	-30.0	-6.7	Peak	Horizontal
	1186.300	-43.4	7.7	-35.7	-30.0	-5.7	Peak	Vertical
	1893.700	-46.0	7.1	-38.9	-30.0	-8.9	Peak	Vertical
951.875	178.507	-101.3	28.3	-73.0	-54.0	-19.0	Peak	Horizontal
	711.910	-97.4	37.0	-60.4	-54.0	-6.4	RMS	Horizontal
	91.304	-101.2	31.3	-69.9	-54.0	-15.9	Peak	Vertical
	711.910	-97.7	35.8	-61.9	-54.0	-7.9	RMS	Vertical
	1191.700	-40.1	7.1	-33.0	-30.0	-3.0	RMS	Horizontal
	1903.600	-43.0	7.7	-35.3	-30.0	-5.3	RMS	Horizontal
	1191.700	-46.1	7.3	-38.8	-30.0	-8.8	Peak	Vertical
	1903.600	-46.6	7.4	-39.2	-30.0	-9.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	178.507	-99.7	28.3	-71.4	-54.0	-17.4	Peak	Horizontal
	712.977	-97.1	36.9	-60.2	-54.0	-6.2	RMS	Horizontal
	91.207	-99.3	31.3	-68.0	-54.0	-14.0	Peak	Vertical
	712.977	-96.3	36.1	-60.2	-54.0	-6.2	RMS	Vertical
	1192.600	-40.1	7.0	-33.1	-30.0	-3.1	RMS	Horizontal
	1906.300	-44.0	7.8	-36.2	-30.0	-6.2	RMS	Horizontal
	1192.600	-46.4	7.2	-39.2	-30.0	-9.2	Peak	Vertical
	1906.300	-47.3	7.5	-39.8	-30.0	-9.8	Peak	Vertical
956.125	177.925	-101.0	28.2	-72.8	-54.0	-18.8	Peak	Horizontal
	716.081	-95.7	37.5	-58.2	-54.0	-4.2	RMS	Horizontal
	91.304	-99.1	31.3	-67.8	-54.0	-13.8	Peak	Vertical
	716.178	-94.7	36.4	-58.3	-54.0	-4.3	RMS	Vertical
	1196.200	-41.1	6.9	-34.2	-30.0	-4.2	RMS	Horizontal
	1912.600	-45.8	8.0	-37.8	-30.0	-7.8	RMS	Horizontal
	1196.200	-47.1	6.9	-40.2	-30.0	-10.2	Peak	Vertical
	1912.600	-46.8	7.6	-39.2	-30.0	-9.2	Peak	Vertical
956.575	179.186	-100.4	28.6	-71.8	-54.0	-17.8	Peak	Horizontal
	716.566	-94.8	37.6	-57.2	-54.0	-3.2	RMS	Horizontal
	91.886	-102.7	30.8	-71.9	-54.0	-17.9	Peak	Vertical
	716.566	-95.9	36.4	-59.5	-54.0	-5.5	RMS	Vertical
	1196.200	-41.0	6.9	-34.1	-30.0	-4.1	RMS	Horizontal
	1912.600	-44.1	8.0	-36.1	-30.0	-6.1	RMS	Horizontal
	1196.200	-47.0	6.9	-40.1	-30.0	-10.1	Peak	Vertical
	1913.500	-47.2	7.7	-39.5	-30.0	-9.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	178.992	-101.8	28.5	-73.3	-54.0	-19.3	Peak	Horizontal
	719.767	-95.1	37.6	-57.5	-54.0	-3.5	RMS	Horizontal
	91.401	-100.7	31.2	-69.5	-54.0	-15.5	Peak	Vertical
	719.767	-96.3	36.6	-59.7	-54.0	-5.7	RMS	Vertical
	1199.800	-42.2	6.8	-35.4	-30.0	-5.4	RMS	Horizontal
	1919.800	-44.8	8.1	-36.7	-30.0	-6.7	RMS	Horizontal
	1200.700	-47.9	6.5	-41.4	-30.0	-11.4	Peak	Vertical
	1919.800	-45.2	7.8	-37.4	-30.0	-7.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-09-14 ~ 2024-11-14	Test Mode	Mode 12 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625	178.604	-102.1	28.3	-73.8	-54.0	-19.8	Peak	Horizontal
	725.684	-103.0	36.8	-66.2	-54.0	-12.2	Peak	Horizontal
	91.207	-99.8	31.3	-68.5	-54.0	-14.5	Peak	Vertical
	701.628	-101.6	35.0	-66.6	-54.0	-12.6	Peak	Vertical
	1181.800	-48.1	7.2	-40.9	-30.0	-10.9	Peak	Horizontal
	7084.900	-73.9	22.9	-51.0	-30.0	-21.0	Peak	Horizontal
	1181.800	-49.7	7.8	-41.9	-30.0	-11.9	Peak	Vertical
	3576.700	-69.3	11.8	-57.5	-30.0	-27.5	Peak	Vertical
946.750	178.216	-101.0	28.2	-72.8	-54.0	-18.8	Peak	Horizontal
	706.769	-101.9	36.4	-65.5	-54.0	-11.5	Peak	Horizontal
	91.207	-100.7	31.3	-69.4	-54.0	-15.4	Peak	Vertical
	706.866	-100.8	35.0	-65.8	-54.0	-11.8	Peak	Vertical
	1186.300	-49.7	7.2	-42.5	-30.0	-12.5	Peak	Horizontal
	2286.100	-69.1	10.8	-58.3	-30.0	-28.3	Peak	Horizontal
	1186.300	-50.8	7.7	-43.1	-30.0	-13.1	Peak	Vertical
	3837.700	-69.8	12.4	-57.4	-30.0	-27.4	Peak	Vertical
951.875	179.186	-101.3	28.6	-72.7	-54.0	-18.7	Peak	Horizontal
	712.007	-100.9	36.9	-64.0	-54.0	-10.0	Peak	Horizontal
	91.013	-100.7	31.1	-69.6	-54.0	-15.6	Peak	Vertical
	711.910	-98.3	35.8	-62.5	-54.0	-8.5	Peak	Vertical
	1191.700	-51.4	7.1	-44.3	-30.0	-14.3	Peak	Horizontal
	2414.800	-62.9	10.2	-52.7	-30.0	-22.7	Peak	Horizontal
	1191.700	-52.8	7.3	-45.5	-30.0	-15.5	Peak	Vertical
	3169.000	-69.1	10.7	-58.4	-30.0	-28.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
952.975	178.701	-101.5	28.4	-73.1	-54.0	-19.1	Peak	Horizontal
	713.074	-100.2	36.9	-63.3	-54.0	-9.3	Peak	Horizontal
	92.080	-95.5	30.6	-64.9	-54.0	-10.9	Peak	Vertical
	713.074	-97.1	36.1	-61.0	-54.0	-7.0	Peak	Vertical
	1192.600	-52.2	7.0	-45.2	-30.0	-15.2	Peak	Horizontal
	3572.200	-69.1	12.0	-57.1	-30.0	-27.1	Peak	Horizontal
	1192.600	-54.0	7.2	-46.8	-30.0	-16.8	Peak	Vertical
	3593.800	-68.7	11.6	-57.1	-30.0	-27.1	Peak	Vertical
956.125	179.283	-100.4	28.6	-71.8	-54.0	-17.8	Peak	Horizontal
	716.081	-104.7	37.5	-67.2	-54.0	-13.2	RMS	Horizontal
	91.304	-98.8	31.3	-67.5	-54.0	-13.5	Peak	Vertical
	716.081	-103.2	36.3	-66.9	-54.0	-12.9	RMS	Vertical
	1196.200	-53.0	6.9	-46.1	-30.0	-16.1	Peak	Horizontal
	3671.200	-69.7	12.2	-57.5	-30.0	-27.5	Peak	Horizontal
	1196.200	-54.8	6.9	-47.9	-30.0	-17.9	Peak	Vertical
	2310.400	-69.0	10.2	-58.8	-30.0	-28.8	Peak	Vertical
956.575	179.671	-103.0	28.7	-74.3	-54.0	-20.3	Peak	Horizontal
	716.469	-104.3	37.5	-66.8	-54.0	-12.8	RMS	Horizontal
	91.595	-97.4	31.0	-66.4	-54.0	-12.4	Peak	Vertical
	716.566	-104.6	36.4	-68.2	-54.0	-14.2	RMS	Vertical
	1196.200	-53.1	6.9	-46.2	-30.0	-16.2	Peak	Horizontal
	3167.200	-68.0	10.6	-57.4	-30.0	-27.4	Peak	Horizontal
	1196.200	-54.7	6.9	-47.8	-30.0	-17.8	Peak	Vertical
	3187.900	-68.7	10.7	-58.0	-30.0	-28.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.725	178.604	-101.8	28.3	-73.5	-54.0	-19.5	Peak	Horizontal
	719.767	-103.6	37.6	-66.0	-54.0	-12.0	RMS	Horizontal
	91.401	-99.1	31.2	-67.9	-54.0	-13.9	Peak	Vertical
	719.767	-103.2	36.6	-66.6	-54.0	-12.6	RMS	Vertical
	1199.800	-54.6	6.8	-47.8	-30.0	-17.8	Peak	Horizontal
	2421.100	-61.9	10.2	-51.7	-30.0	-21.7	Peak	Horizontal
	1199.800	-55.6	6.6	-49.0	-30.0	-19.0	Peak	Vertical
	2409.400	-59.3	9.9	-49.4	-30.0	-19.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-11 ~ 2024-11-14	Test Mode	Mode 16

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900 + 942.900	228.850	-96.8	28.8	-68.0	-54.0	-14.0	Peak	Horizontal
	702.986	-97.0	35.8	-61.2	-54.0	-7.2	Peak	Horizontal
	91.886	-104.2	30.8	-73.4	-54.0	-19.4	Peak	Vertical
	702.695	-97.9	34.7	-63.2	-54.0	-9.2	Peak	Vertical
	1182.700	-49.8	4.1	-45.7	-30.0	-15.7	Peak	Horizontal
	7237.900	-69.0	22.1	-46.9	-30.0	-16.9	Peak	Horizontal
	1182.700	-53.4	5.6	-47.8	-30.0	-17.8	Peak	Vertical
	8605.000	-69.8	23.4	-46.4	-30.0	-16.4	Peak	Vertical
946.750 + 945.750	178.604	-100.2	28.3	-71.9	-54.0	-17.9	Peak	Horizontal
	707.545	-99.4	36.7	-62.7	-54.0	-8.7	RMS	Horizontal
	95.475	-103.7	29.9	-73.8	-54.0	-19.8	Peak	Vertical
	707.836	-99.3	35.1	-64.2	-54.0	-10.2	RMS	Vertical
	1186.300	-49.6	4.2	-45.4	-30.0	-15.4	Peak	Horizontal
	7428.700	-68.5	21.9	-46.6	-30.0	-16.6	Peak	Horizontal
	1186.300	-53.0	6.0	-47.0	-30.0	-17.0	Peak	Vertical
	6191.200	-69.5	18.8	-50.7	-30.0	-20.7	Peak	Vertical
951.600 + 950.600	225.843	-97.6	27.9	-69.7	-54.0	-15.7	Peak	Horizontal
	710.455	-96.7	37.0	-59.7	-54.0	-5.7	RMS	Horizontal
	91.110	-103.7	31.2	-72.5	-54.0	-18.5	Peak	Vertical
	710.358	-98.5	35.8	-62.7	-54.0	-8.7	RMS	Vertical
	1190.800	-52.1	4.2	-47.9	-30.0	-17.9	Peak	Horizontal
	8173.000	-68.4	22.3	-46.1	-30.0	-16.1	Peak	Horizontal
	1191.700	-56.1	6.1	-50.0	-30.0	-20.0	Peak	Vertical
	8641.000	-69.4	23.6	-45.8	-30.0	-15.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
953.250 + 954.250	186.558	-101.3	28.2	-73.1	-54.0	-19.1	Peak	Horizontal
	714.141	-98.2	37.2	-61.0	-54.0	-7.0	RMS	Horizontal
	95.960	-103.9	29.9	-74.0	-54.0	-20.0	Peak	Vertical
	714.238	-98.6	36.3	-62.3	-54.0	-8.3	RMS	Vertical
	1194.400	-52.7	4.3	-48.4	-30.0	-18.4	Peak	Horizontal
	7357.600	-69.1	22.2	-46.9	-30.0	-16.9	Peak	Horizontal
	1194.400	-56.5	6.1	-50.4	-30.0	-20.4	Peak	Vertical
	7023.700	-68.4	21.6	-46.8	-30.0	-16.8	Peak	Vertical
955.850 + 954.850	58.809	-105.3	25.5	-79.8	-54.0	-25.8	Peak	Horizontal
	714.335	-96.2	37.3	-58.9	-54.0	-4.9	RMS	Horizontal
	106.630	-105.4	30.0	-75.4	-54.0	-21.4	Peak	Vertical
	714.820	-95.2	36.3	-58.9	-54.0	-4.9	RMS	Vertical
	1195.300	-55.0	4.3	-50.7	-30.0	-20.7	Peak	Horizontal
	1540.000	-64.0	4.3	-59.7	-30.0	-29.7	Peak	Horizontal
	1196.200	-59.0	6.1	-52.9	-30.0	-22.9	Peak	Vertical
	1911.700	-58.9	6.1	-52.8	-30.0	-22.8	Peak	Vertical
956.850 + 957.850	177.634	-100.4	28.3	-72.1	-54.0	-18.1	Peak	Horizontal
	718.118	-95.9	37.7	-58.2	-54.0	-4.2	RMS	Horizontal
	91.692	-104.1	31.0	-73.1	-54.0	-19.1	Peak	Vertical
	717.924	-94.5	36.5	-58.0	-54.0	-4.0	RMS	Vertical
	1198.000	-52.2	4.4	-47.8	-30.0	-17.8	Peak	Horizontal
	7458.400	-69.1	22.4	-46.7	-30.0	-16.7	Peak	Horizontal
	1197.100	-57.1	6.1	-51.0	-30.0	-21.0	Peak	Vertical
	8210.800	-69.2	22.6	-46.6	-30.0	-16.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
959.450 + 958.450	50.467	-104.5	26.2	-78.3	-54.0	-24.3	Peak	Horizontal
	717.924	-95.1	37.7	-57.4	-54.0	-3.4	RMS	Horizontal
	99.064	-105.5	29.9	-75.6	-54.0	-21.6	Peak	Vertical
	718.021	-96.3	36.4	-59.9	-54.0	-5.9	RMS	Vertical
	1198.900	-52.0	4.4	-47.6	-30.0	-17.6	Peak	Horizontal
	6624.100	-68.8	20.1	-48.7	-30.0	-18.7	Peak	Horizontal
	1198.900	-57.4	6.1	-51.3	-30.0	-21.3	Peak	Vertical
	6993.100	-68.5	20.9	-47.6	-30.0	-17.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-14	Test Mode	Mode 1 with AD8C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975 + 942.325 + 942.675	225.358	-95.4	27.7	-67.7	-54.0	-13.7	Peak	Horizontal
	702.695	-99.6	35.7	-63.9	-54.0	-9.9	Peak	Horizontal
	100.034	-101.0	29.4	-71.6	-54.0	-17.6	Peak	Vertical
	702.016	-99.4	34.9	-64.5	-54.0	-10.5	Peak	Vertical
	1181.800	-46.4	4.1	-42.3	-30.0	-12.3	Peak	Horizontal
	1885.600	-60.0	5.3	-54.7	-30.0	-24.7	Peak	Horizontal
	1181.800	-49.5	5.5	-44.0	-30.0	-14.0	Peak	Vertical
	7460.200	-68.3	22.3	-46.0	-30.0	-16.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Bob Zhang
Test Date	2024-08-20 ~ 2024-08-24	Test Mode	Mode 1 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975 + 942.325 + 942.675	207.510	-100.9	27.6	-73.3	-54.0	-19.3	Peak	Horizontal
	702.695	-94.5	35.7	-58.8	-54.0	-4.8	Peak	Horizontal
	90.528	-99.8	30.8	-69.0	-54.0	-15.0	Peak	Vertical
	702.016	-94.9	34.9	-60.0	-54.0	-6.0	Peak	Vertical
	1181.800	-44.9	7.2	-37.7	-30.0	-7.7	Peak	Horizontal
	1885.600	-60.6	7.2	-53.4	-30.0	-23.4	Peak	Horizontal
	1181.800	-45.0	7.8	-37.2	-30.0	-7.2	Peak	Vertical
	1883.800	-61.9	6.9	-55.0	-30.0	-25.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-14	Test Mode	Mode 3 with AD8C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975 + 942.325 + 942.675	224.388	-95.7	27.3	-68.4	-54.0	-14.4	Peak	Horizontal
	702.307	-97.9	35.7	-62.2	-54.0	-8.2	Peak	Horizontal
	98.482	-100.3	29.8	-70.5	-54.0	-16.5	Peak	Vertical
	702.016	-96.0	34.9	-61.1	-54.0	-7.1	Peak	Vertical
	1181.800	-48.6	4.1	-44.5	-30.0	-14.5	Peak	Horizontal
	1884.700	-45.5	5.3	-40.2	-30.0	-10.2	Peak	Horizontal
	1181.800	-50.6	5.5	-45.1	-30.0	-15.1	Peak	Vertical
	1883.800	-41.1	5.4	-35.7	-30.0	-5.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-20 ~ 2024-08-24	Test Mode	Mode 3 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975 + 942.325 + 942.675	214.882	-99.7	27.2	-72.5	-54.0	-18.5	Peak	Horizontal
	702.695	-98.8	35.7	-63.1	-54.0	-9.1	RMS	Horizontal
	92.080	-100.5	30.6	-69.9	-54.0	-15.9	Peak	Vertical
	702.016	-96.9	34.9	-62.0	-54.0	-8.0	RMS	Vertical
	1181.800	-47.5	7.2	-40.3	-30.0	-10.3	Peak	Horizontal
	1885.600	-44.8	7.2	-37.6	-30.0	-7.6	Peak	Horizontal
	1181.800	-47.3	7.8	-39.5	-30.0	-9.5	Peak	Vertical
	1885.600	-46.1	6.9	-39.2	-30.0	-9.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-14	Test Mode	Mode 7 with AD8C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900	210.420	-99.4	28.1	-71.3	-54.0	-17.3	Peak	Horizontal
	701.628	-95.5	35.7	-59.8	-54.0	-5.8	Peak	Horizontal
	98.482	-100.9	29.8	-71.1	-54.0	-17.1	Peak	Vertical
	701.822	-95.0	35.0	-60.0	-54.0	-6.0	Peak	Vertical
	1182.700	-54.8	4.1	-50.7	-30.0	-20.7	Peak	Horizontal
	5332.600	-69.5	17.0	-52.5	-30.0	-22.5	Peak	Horizontal
	1182.700	-53.5	5.6	-47.9	-30.0	-17.9	Peak	Vertical
	1883.800	-56.7	5.4	-51.3	-30.0	-21.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Bob Zhang
Test Date	2024-09-13	Test Mode	Mode 8 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
657.000 + 658.000 + 659.000 + 660.000	107.115	-89.7	24.4	-65.3	-54.0	-11.3	RMS	Horizontal
	542.354	-96.8	34.5	-62.3	-54.0	-8.3	RMS	Horizontal
	107.115	-95.6	35.8	-59.8	-54.0	-5.8	RMS	Vertical
	557.389	-96.9	34.6	-62.3	-54.0	-8.3	RMS	Vertical
	1321.000	-51.4	6.6	-44.8	-30.0	-14.8	Peak	Horizontal
	3806.200	-66.0	11.4	-54.6	-30.0	-24.6	Peak	Horizontal
	1320.400	-52.0	6.4	-45.6	-30.0	-15.6	Peak	Vertical
	3085.600	-66.8	8.4	-58.4	-30.0	-28.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Bob Zhang
Test Date	2024-08-20 ~ 2024-08-24	Test Mode	Mode 9 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.900 + 942.900 + 943.900 + 944.900	193.639	-102.4	27.7	-74.7	-54.0	-20.7	Peak	Horizontal
	704.441	-94.3	36.1	-58.2	-54.0	-4.2	Peak	Horizontal
	92.468	-104.4	30.3	-74.1	-54.0	-20.1	Peak	Vertical
	702.889	-95.7	34.7	-61.0	-54.0	-7.0	Peak	Vertical
	1182.700	-53.7	7.2	-46.5	-30.0	-16.5	Peak	Horizontal
	1890.100	-49.3	7.3	-42.0	-30.0	-12.0	Peak	Horizontal
	1181.800	-50.5	7.8	-42.7	-30.0	-12.7	Peak	Vertical
	1890.100	-48.2	7.0	-41.2	-30.0	-11.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-14	Test Mode	Mode 11 with AD8C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
941.625 + 941.975 + 942.325 + 942.675	228.850	-95.7	28.8	-66.9	-54.0	-12.9	Peak	Horizontal
	702.695	-100.4	35.7	-64.7	-54.0	-10.7	Peak	Horizontal
	98.967	-99.2	29.9	-69.3	-54.0	-15.3	Peak	Vertical
	701.919	-99.4	34.9	-64.5	-54.0	-10.5	Peak	Vertical
	1181.800	-48.0	4.1	-43.9	-30.0	-13.9	Peak	Horizontal
	1885.600	-47.7	5.3	-42.4	-30.0	-12.4	Peak	Horizontal
	1181.800	-49.8	5.5	-44.3	-30.0	-14.3	Peak	Vertical
	1883.800	-42.5	5.4	-37.1	-30.0	-7.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Bob Zhang
Test Date	2024-09-13	Test Mode	Mode 11 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
657.000 + 657.350 + 657.700 + 658.050	110.025	-86.7	23.6	-63.1	-54.0	-9.1	Peak	Horizontal
	538.765	-96.9	34.6	-62.3	-54.0	-8.3	RMS	Horizontal
	110.025	-94.2	33.4	-60.8	-54.0	-6.8	RMS	Vertical
	479.983	-95.6	33.0	-62.6	-54.0	-8.6	RMS	Vertical
	1316.200	-48.1	6.4	-41.7	-30.0	-11.7	Peak	Horizontal
	3172.600	-66.0	9.6	-56.4	-30.0	-26.4	Peak	Horizontal
	1316.800	-48.9	6.5	-42.4	-30.0	-12.4	Peak	Vertical
	1972.000	-62.9	6.4	-56.5	-30.0	-26.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Appendix B – Test Setup Photograph

Refer to “2406RSU021-UT” file.

Appendix C – EUT Photograph

Refer to “2406RSU021-UE” file.

The End