

# MEASUREMENT REPORT

## FCC PART 15C


---

**FCC ID:** DD4GLXD6Z3

**Applicant:** Shure Incorporated

**Product:** Wireless Guitar Pedal Receiver

**Model No.:** GLXD6+ Z3

**Trademark:**  , **SHURE**<sup>®</sup>


**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15 Subpart C (Section 15.247)

**Test Result:** Complies


**Test Date:** July 24 ~ August 18, 2021

Reviewed By:



Jame Yuan

Approved By:



Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2107RSU040-U1	Rev. 01	Initial Report	08-21-2021	Valid

---

## CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>5</b>
1.1. Applicant.....	5
1.2. Manufacturer.....	5
1.3. Testing Facility .....	5
1.4. Product Information.....	6
1.5. Radio Specification under Test .....	6
1.6. Test Frequencies .....	7
1.7. Antennas Details.....	7
<b>2. Test Configuration .....</b>	<b>8</b>
2.1. Test Mode.....	8
2.2. Test Setup and Software.....	8
2.3. Duty Cycle .....	9
2.4. Applicable Standards .....	9
2.5. Test Environment Condition .....	9
<b>3. Antenna Requirements .....</b>	<b>10</b>
<b>4. Test Equipment Calibration Date.....</b>	<b>11</b>
<b>5. Measurement Uncertainty .....</b>	<b>14</b>
<b>6. Test Result .....</b>	<b>15</b>
6.1. Summary .....	15
6.2. 6dB Bandwidth Measurement .....	16
6.2.1. Test Limit.....	16
6.2.2. Test Procedure used .....	16
6.2.3. Test Setting .....	16
6.2.4. Test Setup .....	16
6.2.5. Test Result .....	17
6.3. Output Power Measurement .....	19
6.3.1. Test Limit.....	19
6.3.2. Test Procedure Used.....	19
6.3.3. Test Setting .....	19
6.3.4. Test Setup .....	20
6.3.5. Test Result .....	21
6.4. Power Spectral Density Measurement .....	22
6.4.1. Test Limit.....	22
6.4.2. Test Procedure Used.....	22

---

6.4.3.	Test Setting .....	22
6.4.4.	Test Setup .....	22
6.4.5.	Test Result .....	23
6.5.	Conducted Band Edge and Out-of-Band Emissions .....	25
6.5.1.	Test Limit.....	25
6.5.2.	Test Procedure Used.....	25
6.5.3.	Test Setting .....	25
6.5.4.	Test Setup .....	26
6.5.5.	Test Result .....	27
6.6.	Radiated Spurious Emission Measurement.....	36
6.6.1.	Test Limit.....	36
6.6.2.	Test Procedure Used.....	36
6.6.3.	Test Setting .....	36
6.6.4.	Test Setup .....	38
6.6.5.	Test Result .....	39
6.7.	Radiated Restricted Band Edge Measurement.....	47
6.7.1.	Test Limit.....	47
6.7.2.	Test Procedure Used.....	48
6.7.3.	Test Setting .....	48
6.7.4.	Test Setup .....	49
6.7.5.	Test Result .....	50
6.8.	AC Conducted Emissions Measurement.....	66
6.8.1.	Test Limit.....	66
6.8.2.	Test Setup .....	66
6.8.3.	Test Result .....	67
<b>7.</b>	<b>Conclusion.....</b>	<b>69</b>
	<b>Appendix A - Test Setup Photograph.....</b>	<b>70</b>
	<b>Appendix B - EUT Photograph.....</b>	<b>71</b>

## 1. General Information

### 1.1. Applicant

Shure Incorporated  
 5800 West Touhy Avenue, Niles, IL 60714-4608, USA

### 1.2. Manufacturer

Shure Incorporated  
 5800 West Touhy Avenue, Niles, IL 60714-4608, USA

### 1.3. Testing Facility

<input checked="" type="checkbox"/>	<b>Test Site – MRT Suzhou Laboratory</b>
	<b>Laboratory Location (Suzhou - Wuzhong)</b> D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	<b>Laboratory Location (Suzhou - SIP)</b> 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.01 <span style="float: right;">CNAS: L10551</span> FCC: CN1166 <span style="float: right;">ISED: CN0001</span> VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020 <input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104
<input type="checkbox"/>	<b>Test Site – MRT Shenzhen Laboratory</b>
	<b>Laboratory Location (Shenzhen)</b> 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.02 <span style="float: right;">CNAS: L10551</span> FCC: CN1284 <span style="float: right;">ISED: CN0105</span>
<input type="checkbox"/>	<b>Test Site – MRT Taiwan Laboratory</b>
	<b>Laboratory Location (Taiwan)</b> No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	<b>Laboratory Accreditations</b>
	TAF: L3261-190725 FCC: 291082, TW3261 <span style="float: right;">ISED: TW3261</span>

#### 1.4. Product Information

Product Name	Wireless Guitar Pedal Receiver
Model No.	GLXD6+ Z3
Serial No.	3AE12002409
Radio Specification	2.4GHz & 5.8GHz
Antenna Specification	Refer to clause 1.7
Power Type	AC/DC Adapter
<b>Accessories</b>	
AC/DC Adapter	Model No.: PS24US Input: 100 ~ 240V, 50/60Hz, 0.15A Output: 12.0V=0.4A

Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.

#### 1.5. Radio Specification under Test

Frequency Range	2404 ~ 2478MHz
Bandwidth Mode	Full and Half
Channel Number	36
Channel Spacing	1MHz
Type of Modulation	2-level CPM with Gaussian shaping (basically GFSK)
Antenna Number	2

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: Two RF paths and antenna are the same and only one antenna can work during normal operation, it is switchable.

### 1.6. Test Frequencies

Frequency Bands (MHz)	Test Frequency (MHz)		
	Lowest	Middle	Highest
2404 ~ 2478	2404	2442	2478

Note: Detail working frequencies refer to operation description.

### 1.7. Antennas Details

Antenna Type	Frequency Band (MHz)	Max Peak Gain (dBi)
PIFA Antenna	2404	-0.76
	2442	0.65
	2478	0.08


## 2. Test Configuration

### 2.1. Test Mode

Test Mode	Mode 1: Transmit by Full BW
	Mode 2: Transmit by Half BW

Note: Bandwidth abbreviation is BW.

### 2.2. Test Setup and Software

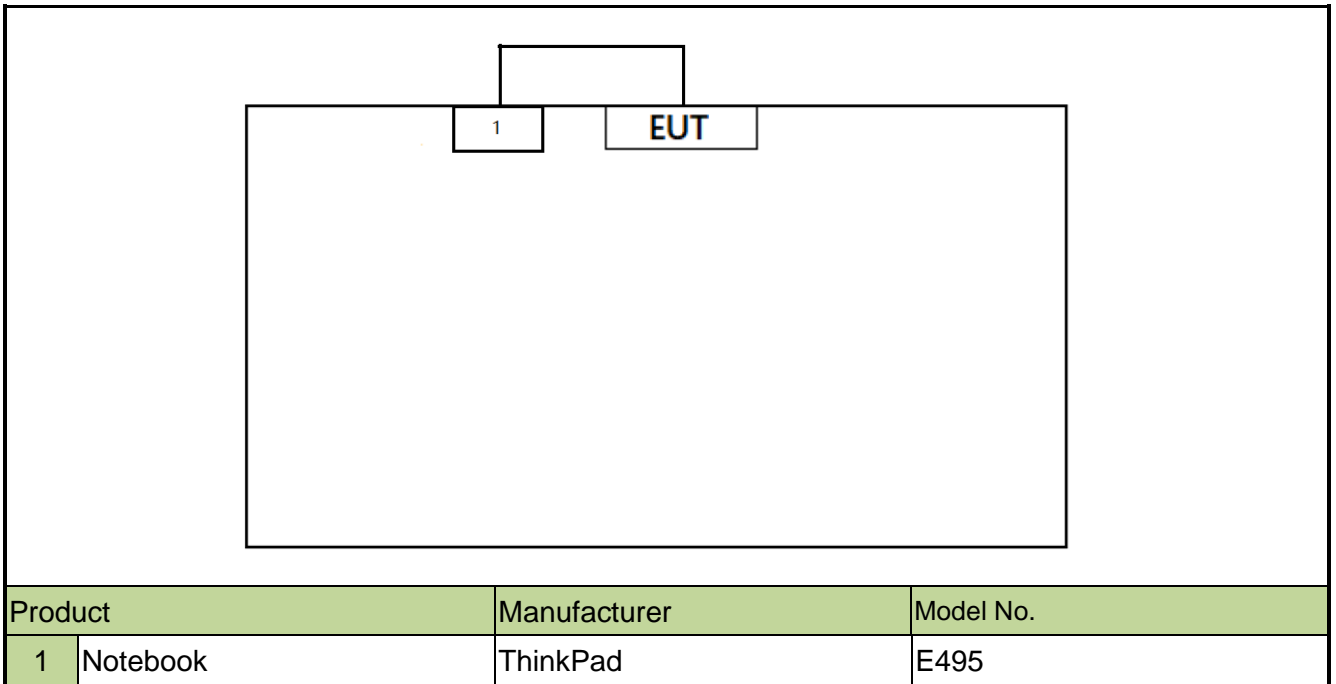

Note 1: The test utility software used during testing was “ttermpro.exe”, and the version was 4.78.


Note 2: Detail power setting refer to operation description.



### 2.3. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle (%)
Full BW	60.28
Half BW	80.39

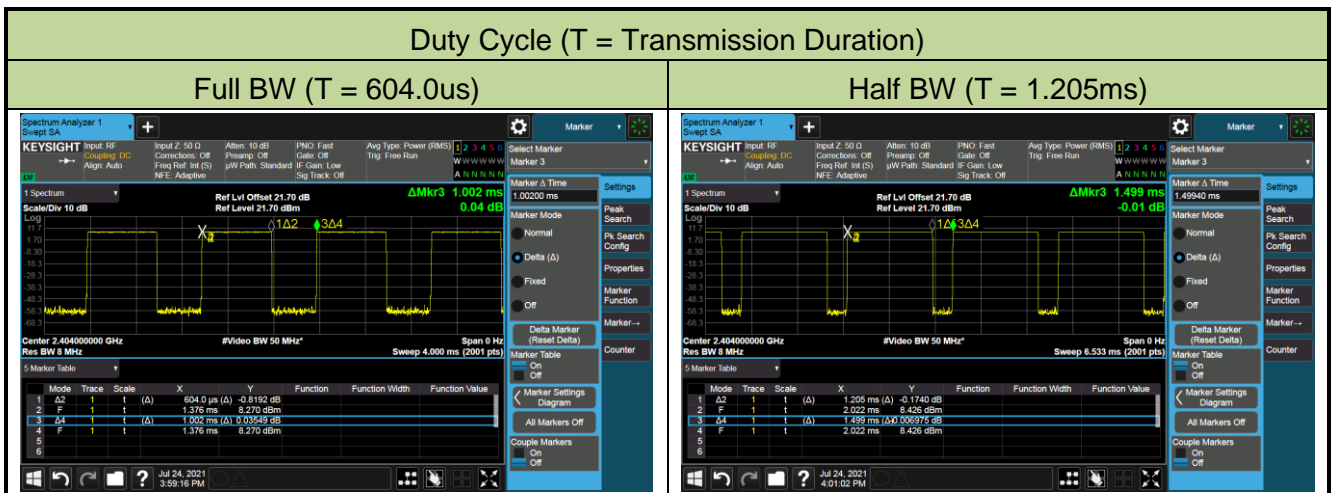

### 2.4. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013

### 2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75 %RH

### 3. Antenna Requirements

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The unit complies with the requirement of §15.203.

#### 4. Test Equipment Calibration Date

##### Conducted Emission (WZ-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2021/11/22
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2022/06/08
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2022/06/28
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

##### Conducted Emission (SIP-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/06/24
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2022/06/08
Thermal Hygrometer	testo	608-H1	MRTSUE06621	1 year	2021/12/03

##### Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/01/04
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2022/08/05
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2022/06/28
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2022/04/29

##### Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2022/05/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2021/12/08
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2022/04/29

## Radiated Emission (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/06/24
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/03/09
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/09
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021/12/24

## Radiated Emission (SIP-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/06/24
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/03/09
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2021/11/26
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2021/11/26
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/09
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/12
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24

## Radiated Emission (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/06/24
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2021/11/26
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2022/01/14
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021/12/24

## Conducted Test Equipment (WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022/04/13
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022/01/06
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2022/06/08
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2022/06/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2022/06/08
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/22
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2022/06/28
Attenuator	MVE	6dB	MRTSUE06534	N/A	N/A
Attenuator	MVE	10dB	MRTSUE06543	N/A	N/A

## Conducted Test Equipment (SIP-TR1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTSUE06603	1 year	2021/11/23
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
USB wideband power sensor	Agilent	U2021XA	MRTSUE06595	1 year	2021/09/26
USB wideband power sensor	Agilent	U2021XA	MRTSUE06596	1 year	2021/09/26
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2022/02/23
Thermal Hygrometer	testo	608-H1	MRTSUE11022	1 year	2021/11/25
Attenuator	MVE	6dB	MRTSUE06534	N/A	N/A
Attenuator	MVE	10dB	MRTSUE06543	N/A	N/A

Software	Version	Function
EMI Software	V3	EMI Test Software

## 5. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
<b>Radiated Disturbance</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 9kHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 9kHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Power Spectrum Density</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.15dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%

## 6. Test Result

### 6.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	Conducted	Pass	Section 6.2
15.247(b)(3)	Output Power		Pass	Section 6.3
15.247(e)	Power Spectral Density		Pass	Section 6.4
15.247(d)	Band Edge / Out-of-Band Emissions		Pass	Section 6.5
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass	Section 6.6 & 6.7
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass	Section 6.8

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) Test Item "Output Power" and "Conducted Band Edge and Out-of-Band Emissions" were assessed two antenna ports, any others test items were assessed the worst-case antenna port.

## 6.2. 6dB Bandwidth Measurement

### 6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 6.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8

### 6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

### 6.2.4. Test Setup

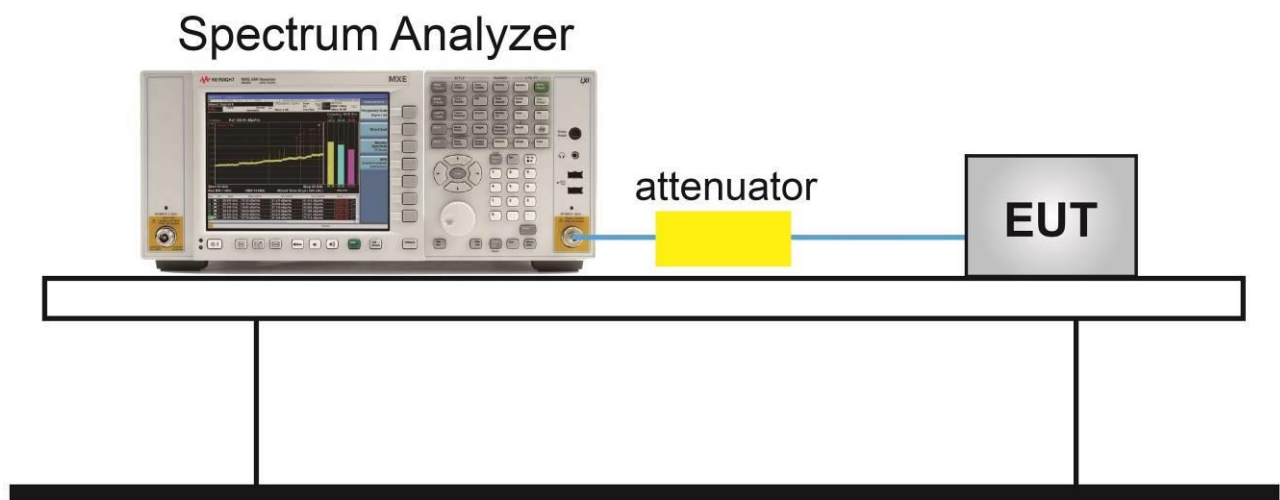



### 6.2.5. Test Result


Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2021/07/24		

Test Mode	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Full BW	2404	1.907	≥ 0.5	Pass
Full BW	2442	2.015	≥ 0.5	Pass
Full BW	2478	2.020	≥ 0.5	Pass
Half BW	2404	1.021	≥ 0.5	Pass
Half BW	2442	1.028	≥ 0.5	Pass
Half BW	2478	1.025	≥ 0.5	Pass




Half BW 6dB Bandwidth


2404MHz

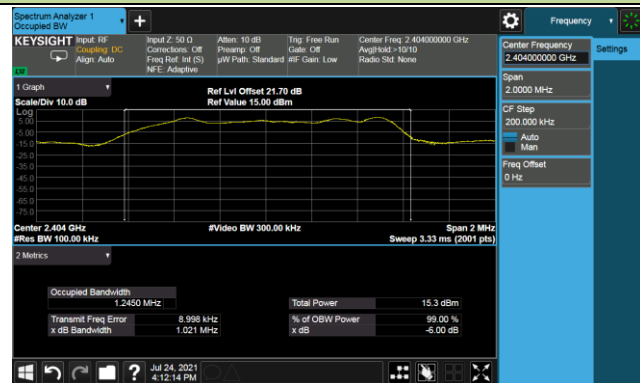

2442MHz

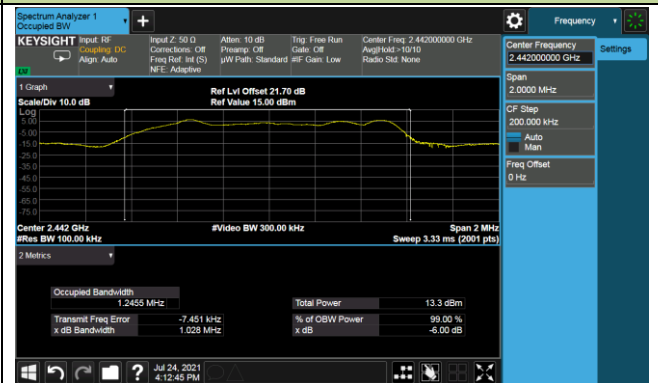

2478MHz

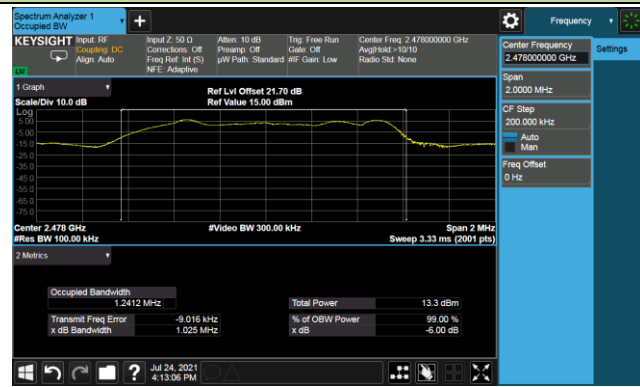

### **6.3. Output Power Measurement**

#### **6.3.1. Test Limit**

The maximum out power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **6.3.2. Test Procedure Used**

ANSI C63.10-2013 Section 11.9.1.3

ANSI C63.10-2013 Section 11.9.2.3

#### **6.3.3. Test Setting**


##### **Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)**

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

##### **Average Power Measurement**

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 6.3.4. Test Setup

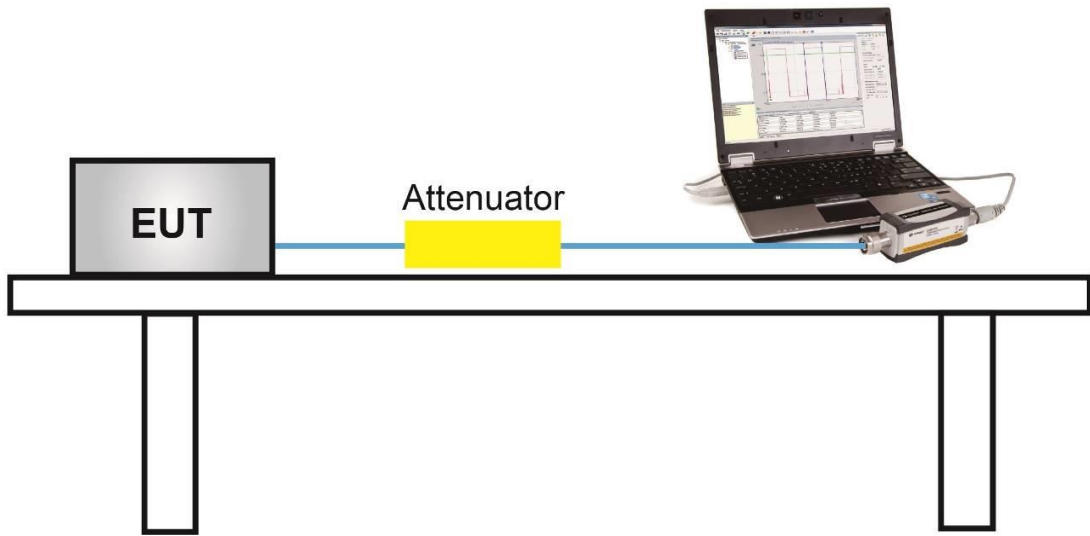

### 6.3.5. Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2021/08/02		

Test Mode	Freq. (MHz)	Peak Power (dBm)		Limit (dBm)	Result
		Ant a	Ant b		
Full BW	2404	8.81	8.31	≤ 30.00	Pass
Full BW	2442	6.98	7.86	≤ 30.00	Pass
Full BW	2478	7.02	7.49	≤ 30.00	Pass
Half BW	2404	8.59	8.36	≤ 30.00	Pass
Half BW	2442	6.79	7.88	≤ 30.00	Pass
Half BW	2478	6.81	7.46	≤ 30.00	Pass

### Test Result of Average Output Power (Reporting Only)

Test Mode	Freq. (MHz)	Average Power (dBm)		Limit (dBm)	Result
		Ant a	Ant b		
Full BW	2404	8.11	7.40	≤ 30.00	Pass
Full BW	2442	6.17	7.16	≤ 30.00	Pass
Full BW	2478	6.26	7.05	≤ 30.00	Pass
Half BW	2404	8.25	7.35	≤ 30.00	Pass
Half BW	2442	6.30	7.01	≤ 30.00	Pass
Half BW	2478	6.35	7.02	≤ 30.00	Pass

## 6.4. Power Spectral Density Measurement

### 6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


### 6.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.10.2

### 6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span  $\geq 1.5$  times the OBW
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = Peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### 6.4.4. Test Setup

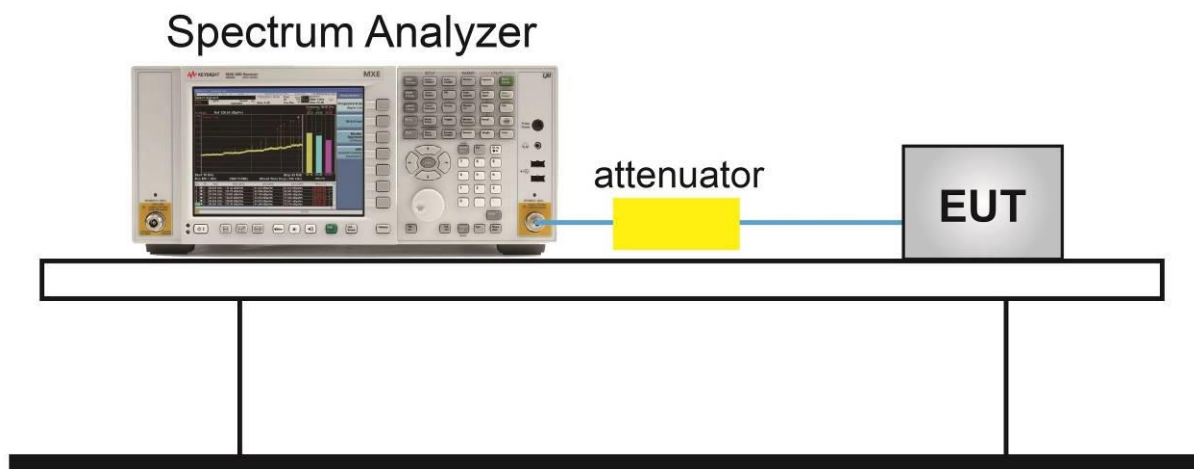


**6.4.5. Test Result**

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2021/07/24		


Test Mode	Freq. (MHz)	PKPSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
Full BW	2404	-10.82	$\leq 8.00$	Pass
Full BW	2442	-11.62	$\leq 8.00$	Pass
Full BW	2478	-12.14	$\leq 8.00$	Pass
Half BW	2404	-7.70	$\leq 8.00$	Pass
Half BW	2442	-7.73	$\leq 8.00$	Pass
Half BW	2478	-8.13	$\leq 8.00$	Pass

## Full BW PKPSD – Ant b


2404MHz

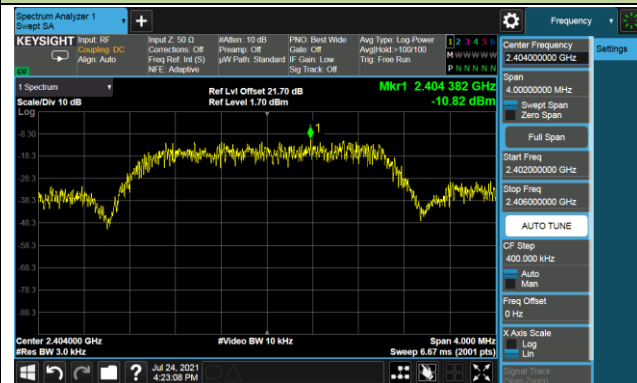

2442MHz

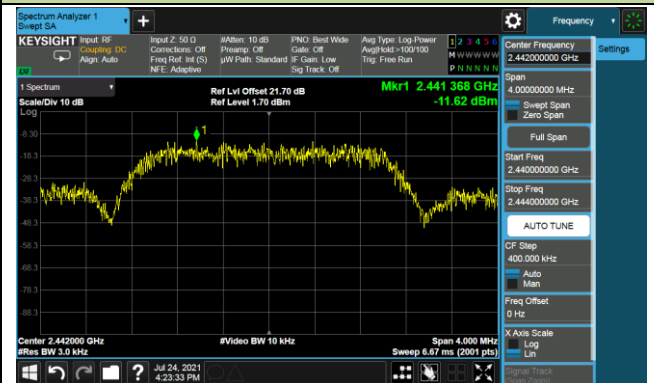


2478MHz

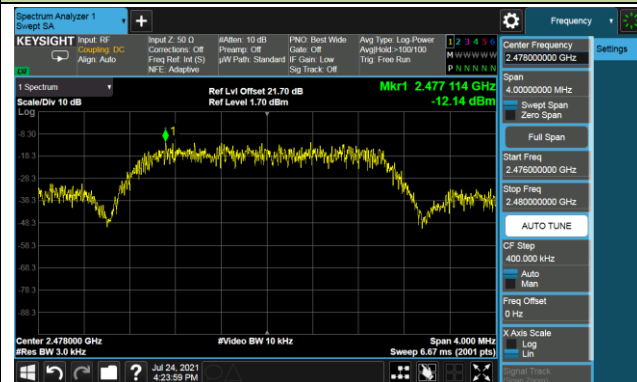


## Half BW PKPSD - Ant b

2404MHz

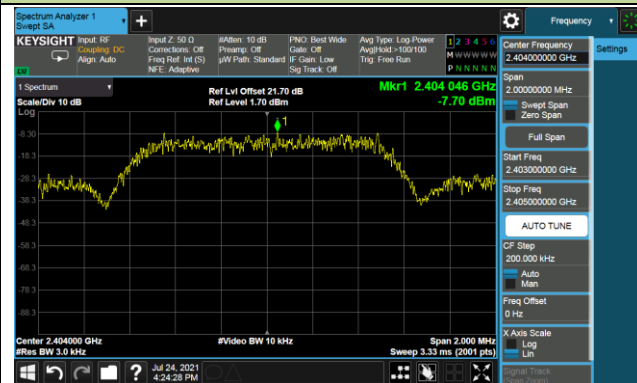

2442MHz

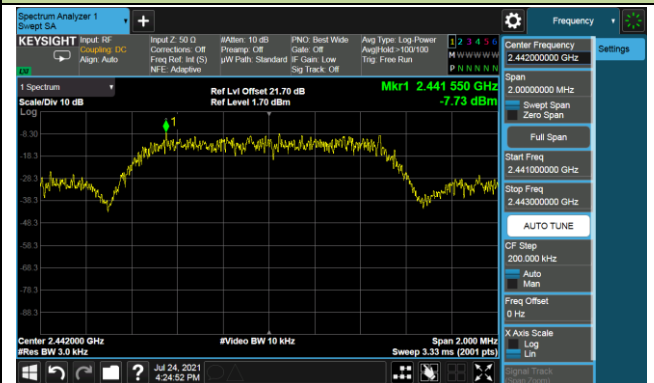

2478MHz





## **6.5. Conducted Band Edge and Out-of-Band Emissions**

### **6.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### **6.5.2. Test Procedure Used**

ANSI C63.10-2013 - Section 11.11

### **6.5.3. Test Setting**


#### **Reference level measurement**

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

#### **Emission level measurement**

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### 6.5.4. Test Setup

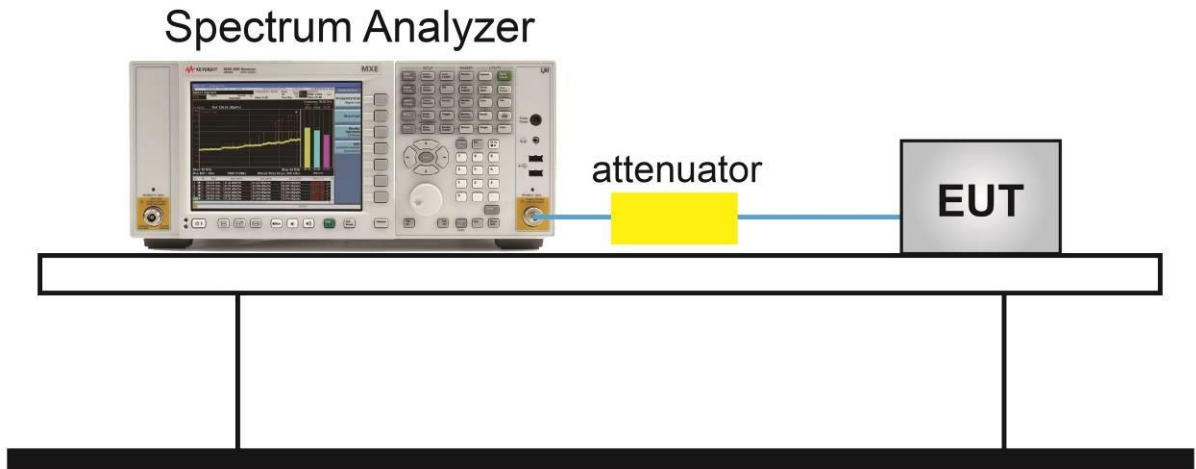

**6.5.5. Test Result**


Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2021/07/24 ~ 2021/08/13		

Test Mode	Frequency (MHz)	Limit	Result
Full BW	2404	20dBc	Pass
Full BW	2442	20dBc	Pass
Full BW	2478	20dBc	Pass
Half BW	2404	20dBc	Pass
Half BW	2442	20dBc	Pass
Half BW	2478	20dBc	Pass

### Full BW Out-of-Band Emissions - Ant a

#### 2404MHz


##### 100kHz PSD Reference Level

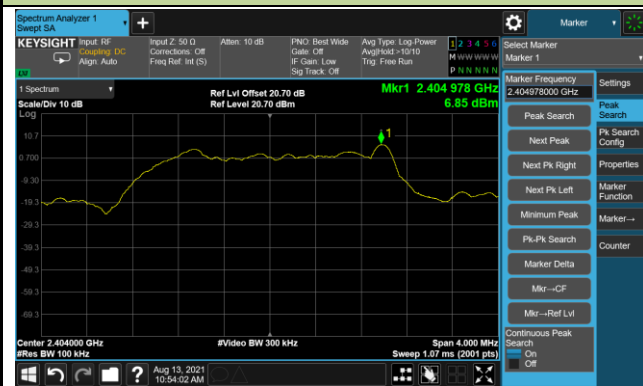

##### Low Band Edge



##### Spurious Emission

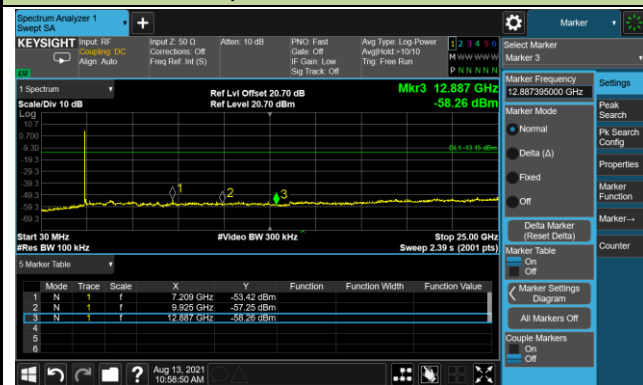

#### 2442MHz

##### 100kHz PSD Reference Level



##### Spurious Emission



### Full BW Out-of-Band Emissions - Ant a


2478MHz

100kHz PSD Reference Level

High Band Edge




Spurious Emission

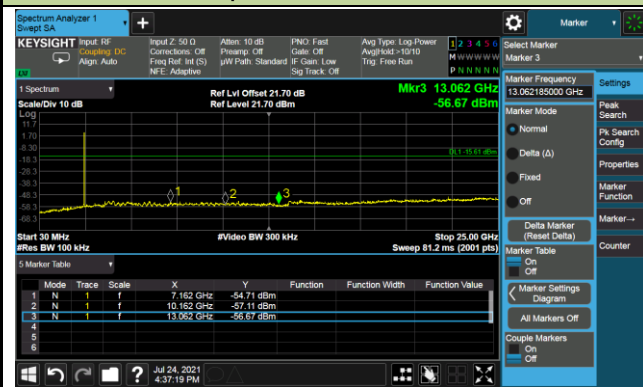

## Half BW Out-of-Band Emissions - Ant a

### 2404MHz


#### 100kHz PSD Reference Level

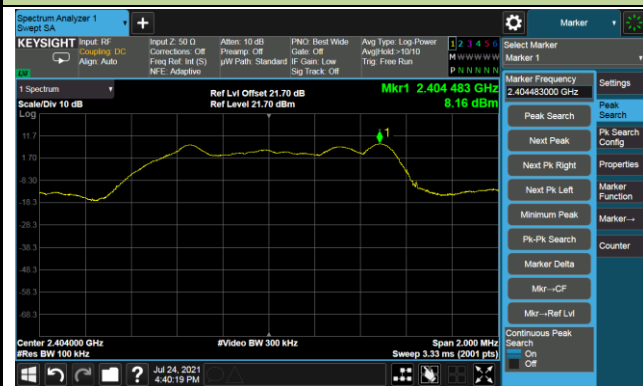

#### Low Band Edge



#### Spurious Emission

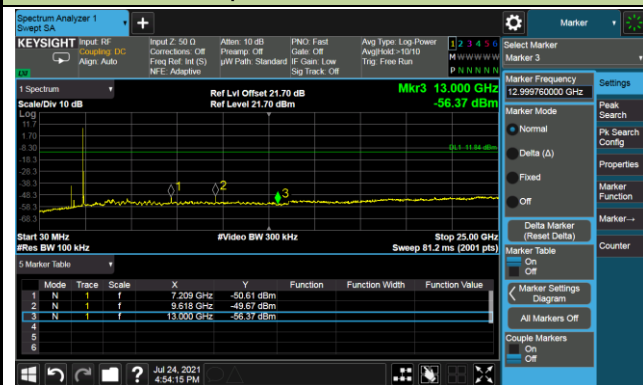

### 2442MHz

#### 100kHz PSD Reference Level



#### Spurious Emission



## Half BW Out-of-Band Emissions - Ant a 2478MHz


### 100kHz PSD Reference Level



### High Band Edge




### Spurious Emission

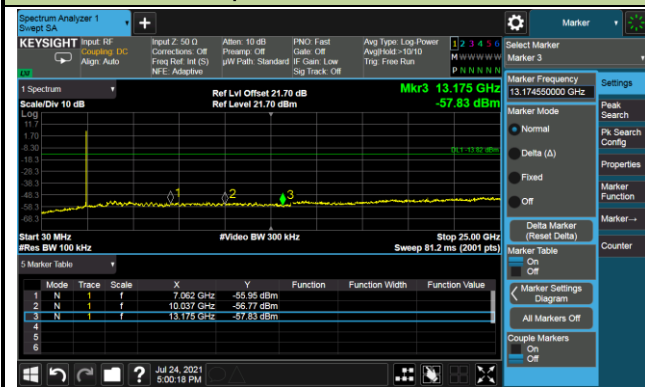

## Full BW Out-of-Band Emissions - Ant b

2404MHz


100kHz PSD Reference Level

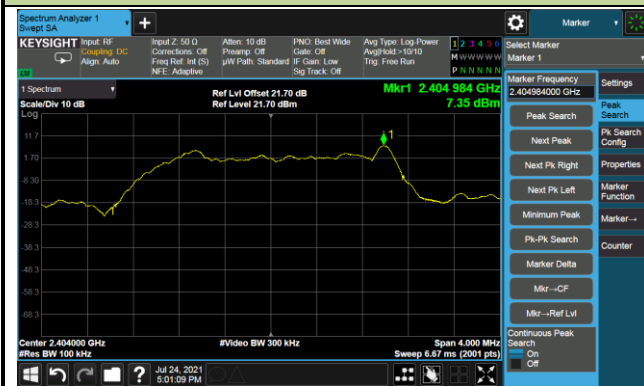

Low Band Edge



Spurious Emission

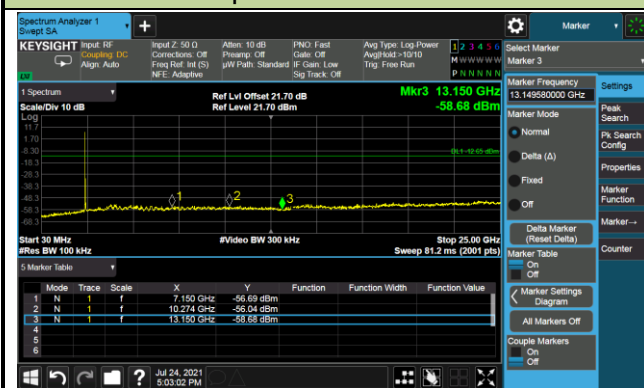

2442MHz

100kHz PSD Reference Level



Spurious Emission






### Full BW Out-of-Band Emissions - Ant b

2478MHz


#### 100kHz PSD Reference Level

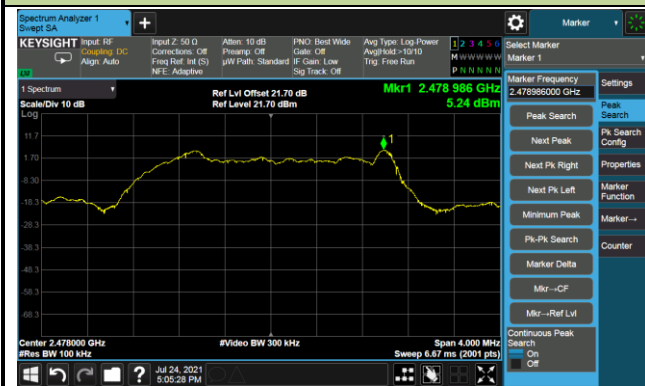

#### High Band Edge



#### Spurious Emission

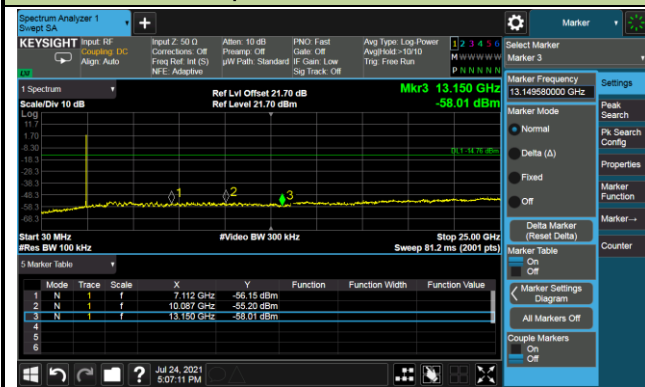

### Half BW Out-of-Band Emissions - Ant b

#### 2404MHz

##### 100kHz PSD Reference Level



##### Low Band Edge



##### Spurious Emission



#### 2442MHz

##### 100kHz PSD Reference Level



##### Spurious Emission



## Half BW Out-of-Band Emissions - Ant b

2478MHz


### 100kHz PSD Reference Level



### High Band Edge



### Spurious Emission

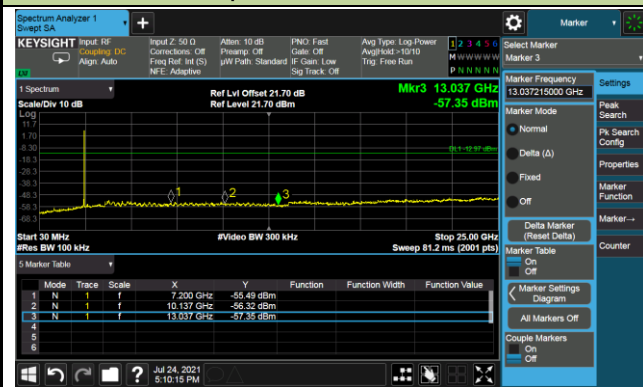

## 6.6. Radiated Spurious Emission Measurement

### 6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.6.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.4 & 6.5 & 6.6

### 6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.6.4. Test Setup

#### Below 1GHz Test Setup:

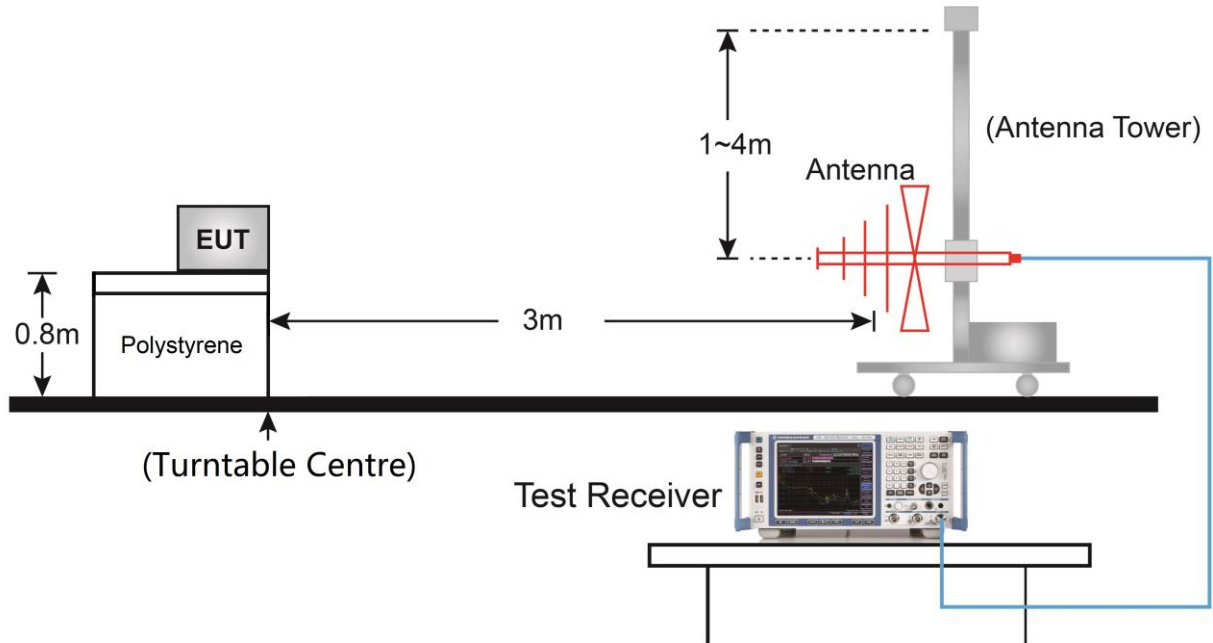

#### Above 1GHz Test Setup:

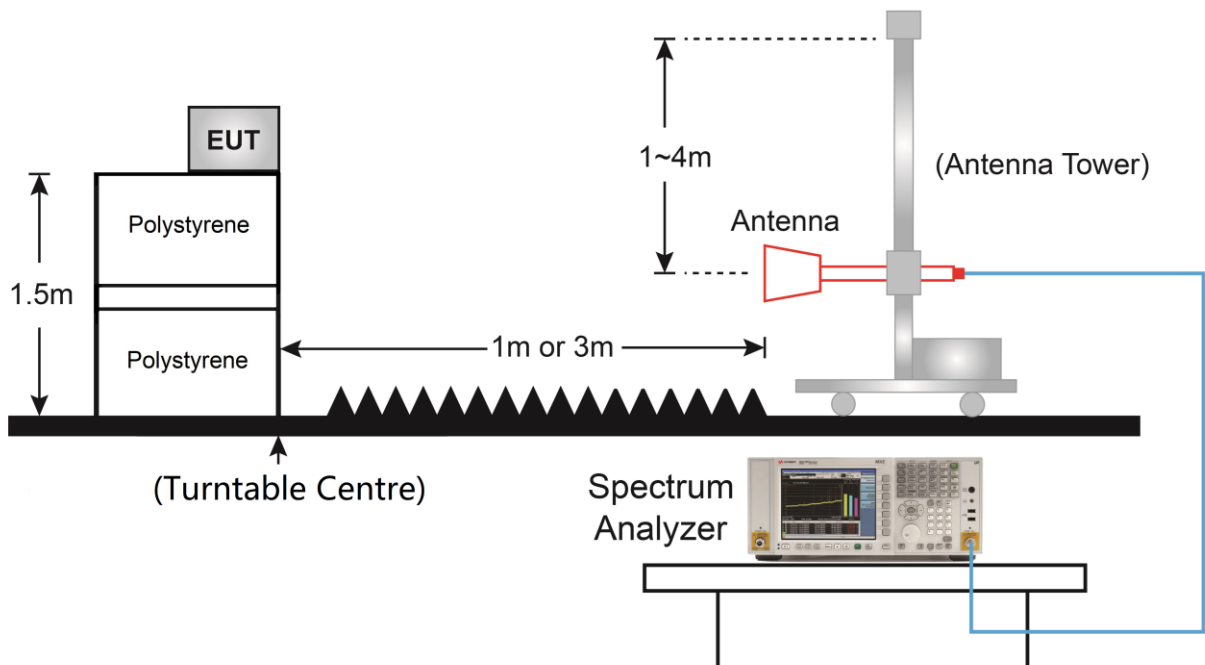

### 6.6.5. Test Result

Test Site	SIP-AC1	Test Engineer	Yien Qian
Test Date	2021/08/03	Test Frequency	2404MHz
Test Mode	Full BW		
Remark	<ol style="list-style-type: none"> <li>1. Average measurement was not performed if peak level lower than average limit.</li> <li>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</li> </ol>		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
8318.5	50.3	-6.0	44.3	74.0	-29.7	Peak	Horizontal
12135.0	49.8	-3.9	45.9	74.0	-28.1	Peak	Horizontal
15654.0	48.2	1.5	49.7	74.0	-24.3	Peak	Horizontal
8403.5	50.0	-6.0	44.0	74.0	-30.0	Peak	Vertical
11982.0	49.2	-3.9	45.3	74.0	-28.7	Peak	Vertical
15841.0	47.2	2.7	49.9	74.0	-24.1	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)  
 Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Yien Qian
Test Date	2021/08/03	Test Frequency	2442MHz
Test Mode	Full BW		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
8403.5	50.6	-6.0	44.6	74.0	-29.4	Peak	Horizontal
12356.0	49.9	-3.8	46.1	74.0	-27.9	Peak	Horizontal
15866.5	47.7	2.5	50.2	74.0	-23.8	Peak	Horizontal
8310.0	49.3	-6.1	43.2	74.0	-30.8	Peak	Vertical
11693.0	50.4	-4.6	45.8	74.0	-28.2	Peak	Vertical
15501.0	48.4	1.4	49.8	74.0	-24.2	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC1	Test Engineer	Yien Qian
Test Date	2021/08/03	Test Frequency	2478MHz
Test Mode	Full BW		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
8412.0	50.4	-6.1	44.3	74.0	-29.7	Peak	Horizontal
12373.0	49.3	-3.5	45.8	74.0	-28.2	Peak	Horizontal
15671.0	48.0	2.1	50.1	74.0	-23.9	Peak	Horizontal
8369.5	50.8	-6.0	44.8	74.0	-29.2	Peak	Vertical
12279.5	49.6	-3.6	46.0	74.0	-28.0	Peak	Vertical
15841.0	47.0	2.7	49.7	74.0	-24.3	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Yien Qian
Test Date	2021/08/03	Test Frequency	2404MHz
Test Mode	Half BW		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
7647.0	51.2	-6.9	44.3	74.0	-29.7	Peak	Horizontal
8242.0	49.9	-5.6	44.3	74.0	-29.7	Peak	Horizontal
12271.0	50.2	-3.6	46.6	74.0	-27.4	Peak	Horizontal
7689.5	52.0	-6.8	45.2	74.0	-28.8	Peak	Vertical
8242.0	51.3	-5.6	45.7	74.0	-28.3	Peak	Vertical
11523.0	49.9	-4.8	45.1	74.0	-28.9	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Yien Qian
Test Date	2021/08/03	Test Frequency	2442MHz
Test Mode	Half BW		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
7485.5	51.4	-7.4	44.0	74.0	-30.0	Peak	Horizontal
8335.5	50.4	-5.9	44.5	74.0	-29.5	Peak	Horizontal
12143.5	49.9	-3.9	46.0	74.0	-28.0	Peak	Horizontal
7664.0	50.8	-6.9	43.9	74.0	-30.1	Peak	Vertical
8191.0	50.7	-6.0	44.7	74.0	-29.3	Peak	Vertical
11956.5	50.0	-3.9	46.1	74.0	-27.9	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Yien Qian
Test Date	2021/08/03	Test Frequency	2478MHz
Test Mode	Half BW		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
8378.0	51.2	-5.9	45.3	74.0	-28.7	Peak	Horizontal
12262.5	49.6	-3.7	45.9	74.0	-28.1	Peak	Horizontal
15713.5	48.4	1.7	50.1	74.0	-23.9	Peak	Horizontal
8174.0	50.5	-5.8	44.7	74.0	-29.3	Peak	Vertical
11854.5	49.8	-4.3	45.5	74.0	-28.5	Peak	Vertical
15603.0	48.4	1.6	50.0	74.0	-24.0	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: SIP-AC1	Time: 2021/08/03 - 10:21
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yien Qian
Probe: SIP-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by Half BW at channel 2404MHz	

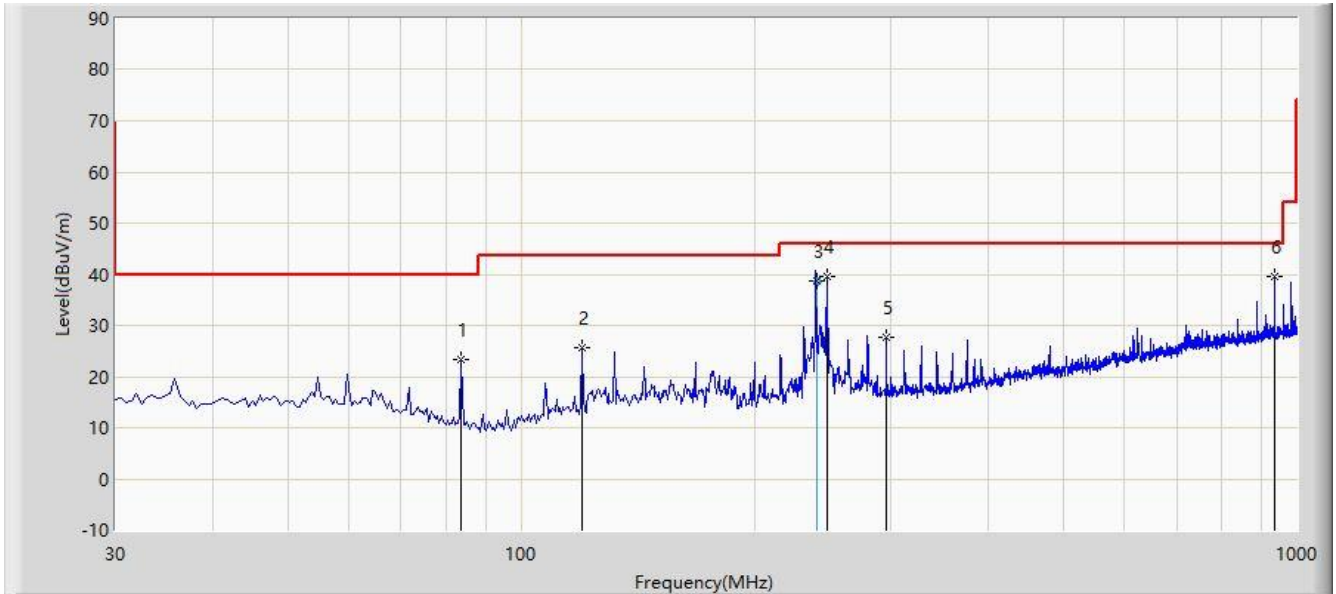

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			83.835	23.419	11.038	-16.581	40.000	12.381	PK
2			119.725	25.612	10.031	-17.888	43.500	15.581	PK
3			240.125	38.772	22.630	-7.228	46.000	16.142	QP
4			247.765	39.438	22.966	-6.562	46.000	16.472	PK
5			295.780	27.817	9.685	-18.183	46.000	18.132	PK
6		*	935.980	39.561	10.473	-6.439	46.000	29.088	PK


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: SIP-AC1	Time: 2021/08/03 - 10:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yien Qian
Probe: SIP-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by Half BW at channel 2404MHz	

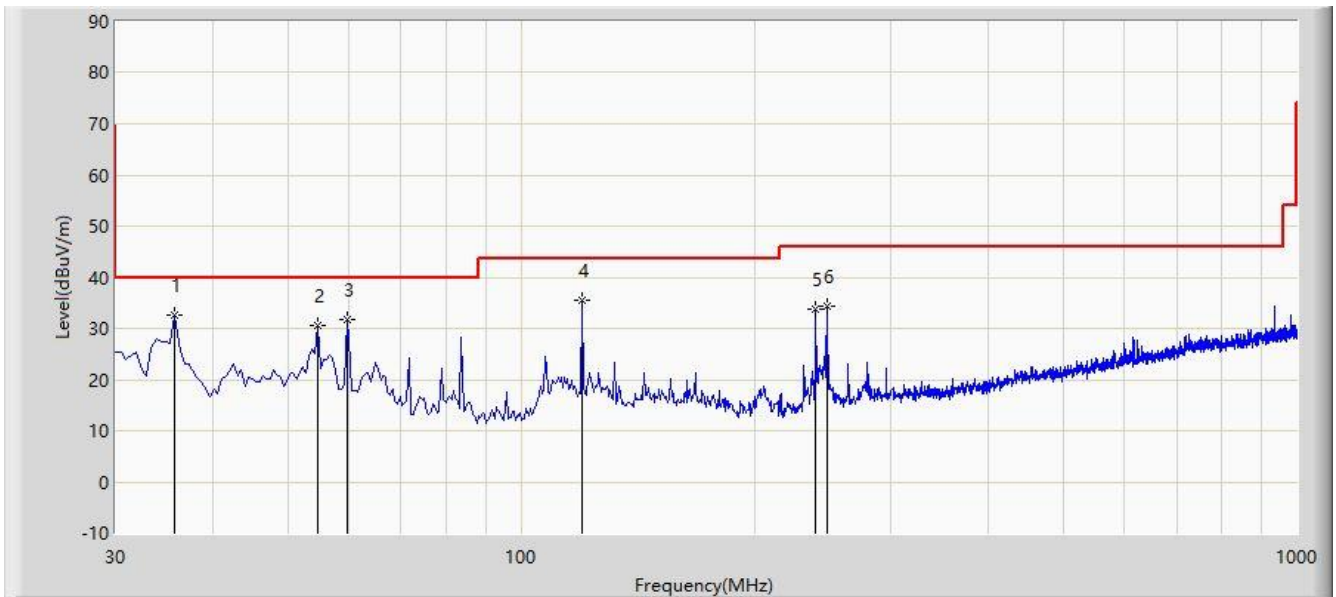

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	35.820	32.544	15.447	-7.456	40.000	17.097	PK
2			54.735	30.648	13.237	-9.352	40.000	17.411	PK
3			59.585	31.817	14.792	-8.183	40.000	17.025	PK
4			119.725	35.390	19.809	-8.110	43.500	15.581	PK
5			240.005	33.896	17.762	-12.104	46.000	16.135	PK
6			247.765	34.468	17.996	-11.532	46.000	16.472	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

## 6.7. Radiated Restricted Band Edge Measurement

### 6.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**6.7.2. Test Procedure Used**

ANSI C63.10-2013 Section 6.3

ANSI C63.10-2013 Section 6.6

ANSI C63.10-2013 Section 11.13

**6.7.3. Test Setting**

**Peak Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize



### Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 6.7.4. Test Setup

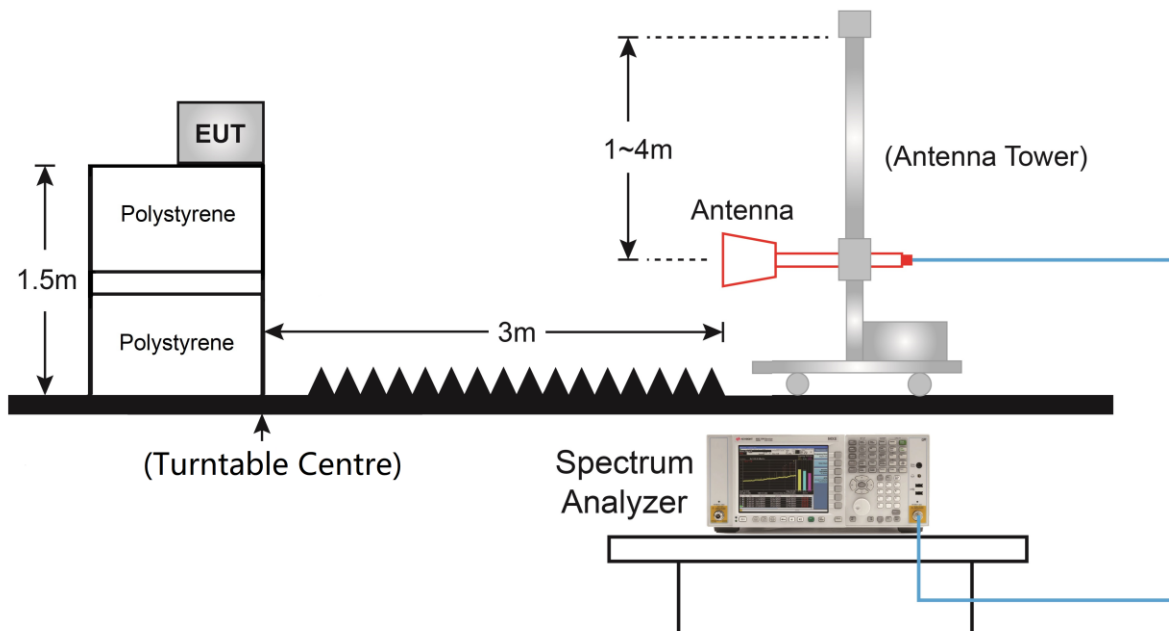

### 6.7.5. Test Result

Site: SIP-AC3	Time: 2021/08/10 - 11:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Full BW at Channel 2404MHz	

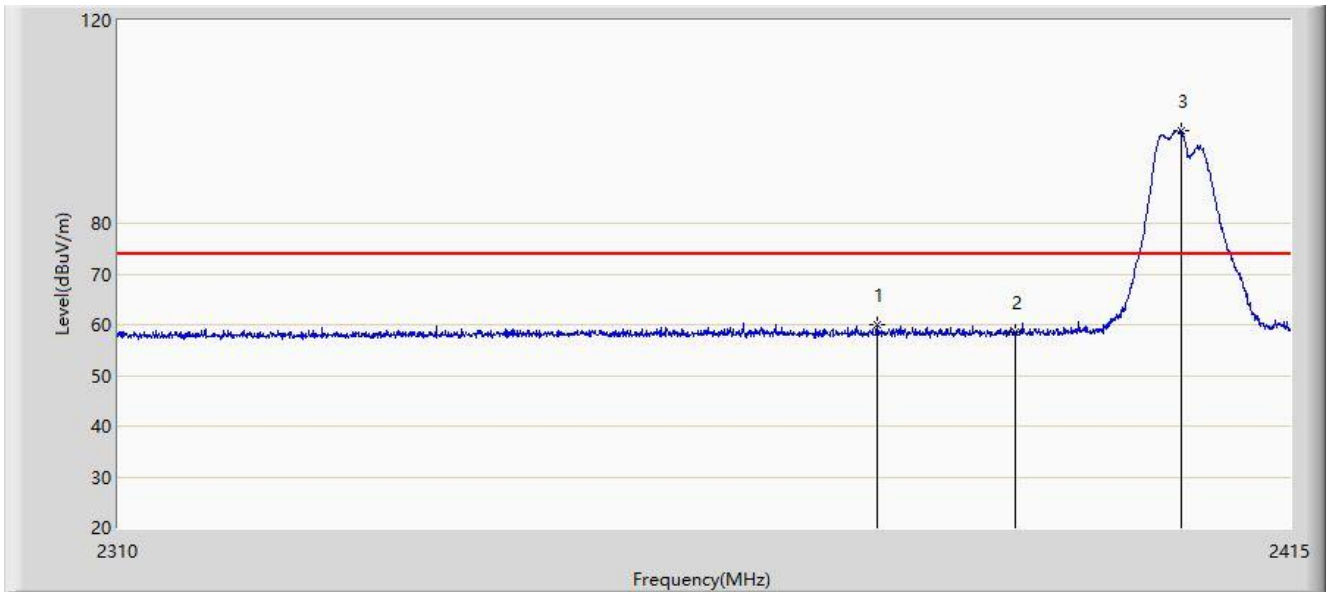


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2377.462	59.955	27.758	-14.045	74.000	32.197	PK
2			2390.000	58.558	26.293	-15.442	74.000	32.265	PK
3		*	2405.130	98.144	65.801	N/A	N/A	32.343	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 11:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Full BW at Channel 2404MHz	

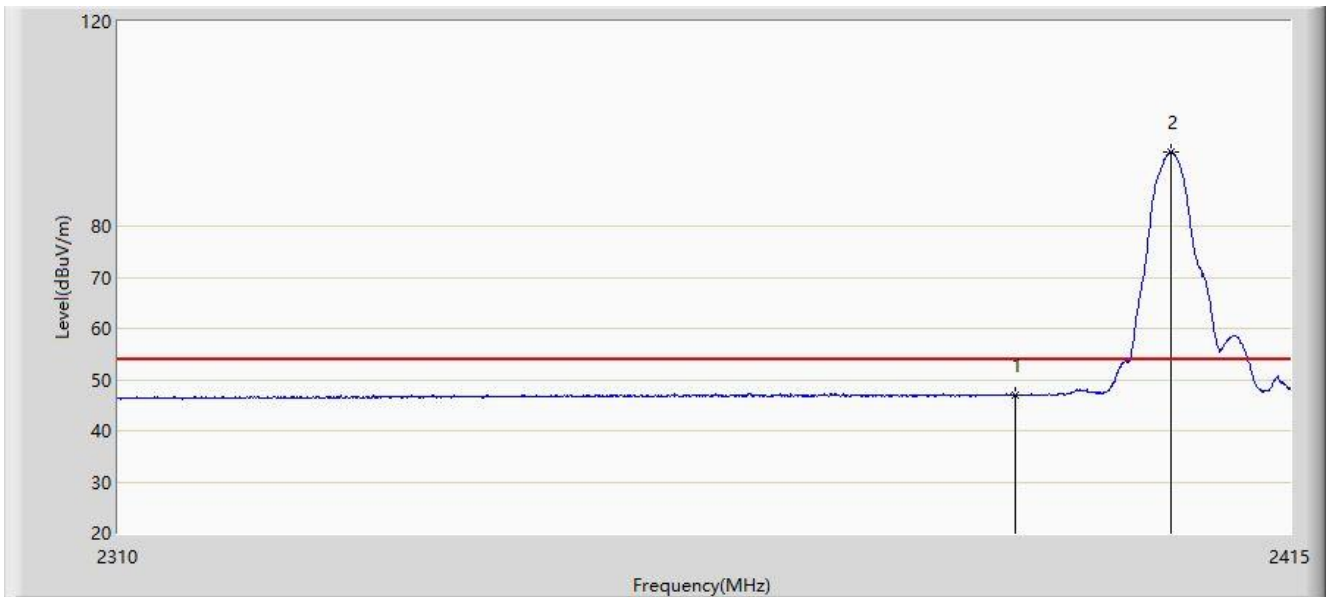


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	47.037	14.772	-6.963	54.000	32.265	AV
2		*	2404.133	94.475	62.137	N/A	N/A	32.338	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 11:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Full BW at Channel 2404MHz	

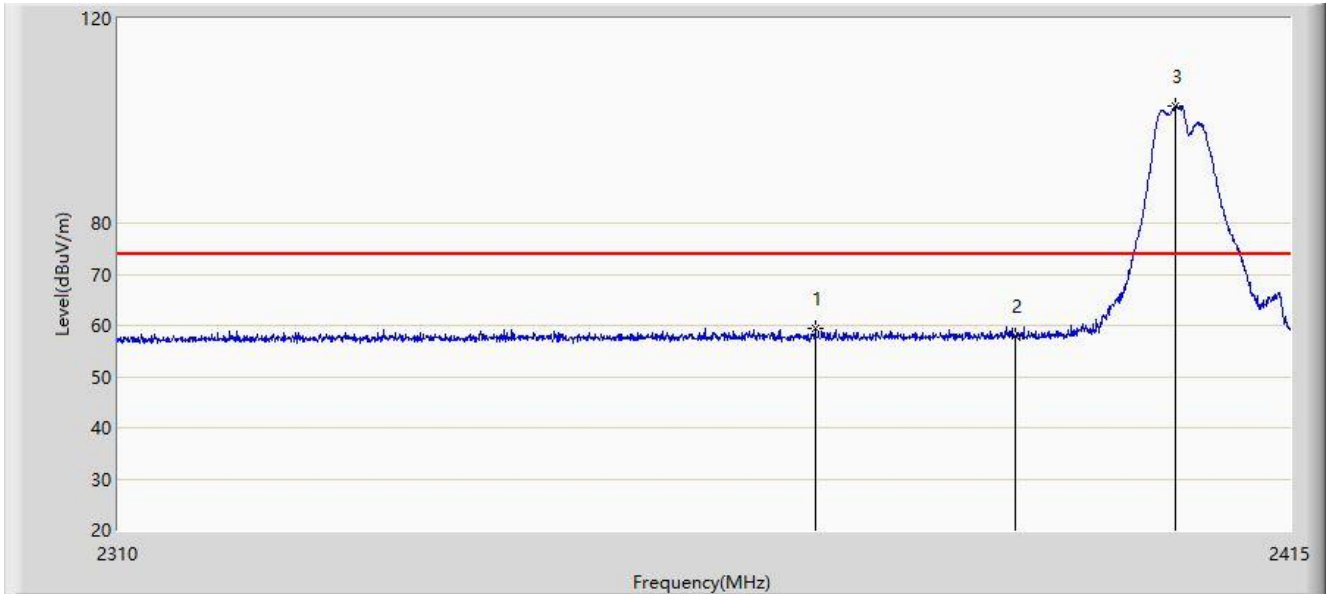


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2371.950	59.370	27.185	-14.630	74.000	32.185	PK
2			2390.000	57.852	25.587	-16.148	74.000	32.265	PK
3		*	2404.552	102.798	70.458	N/A	N/A	32.341	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 11:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Full BW at Channel 2404MHz	

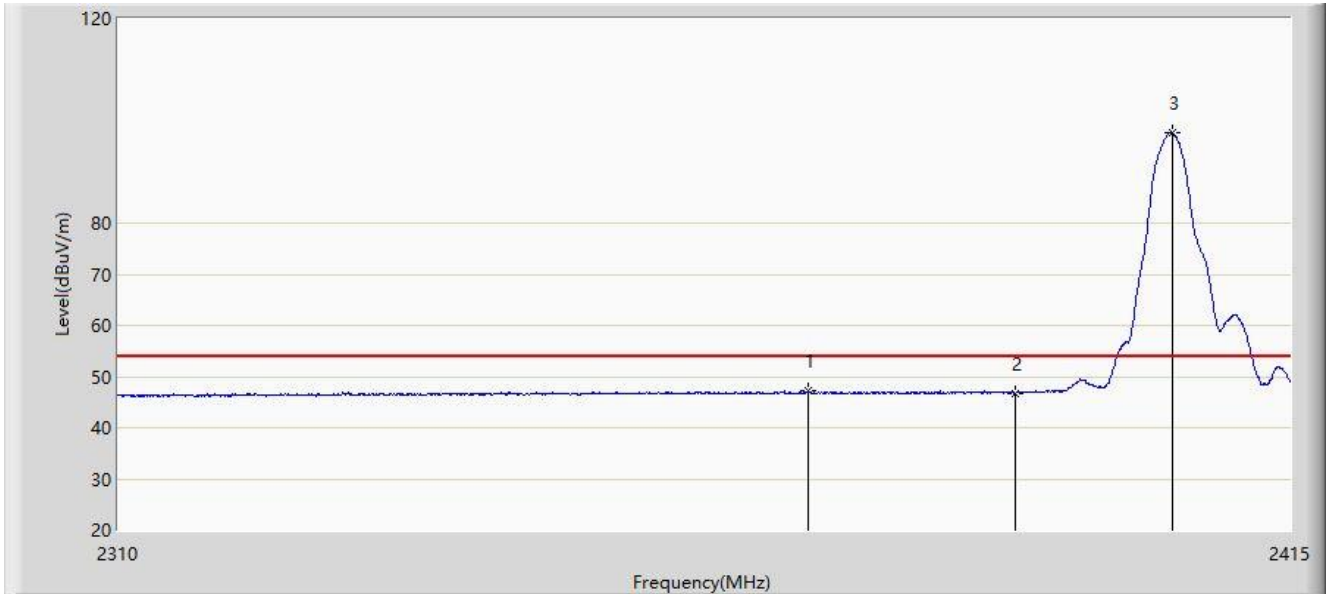


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2371.268	47.209	15.025	-6.791	54.000	32.183	AV
2			2390.000	46.786	14.521	-7.214	54.000	32.265	AV
3		*	2404.290	97.580	65.241	N/A	N/A	32.339	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 11:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Full BW at Channel 2478MHz	

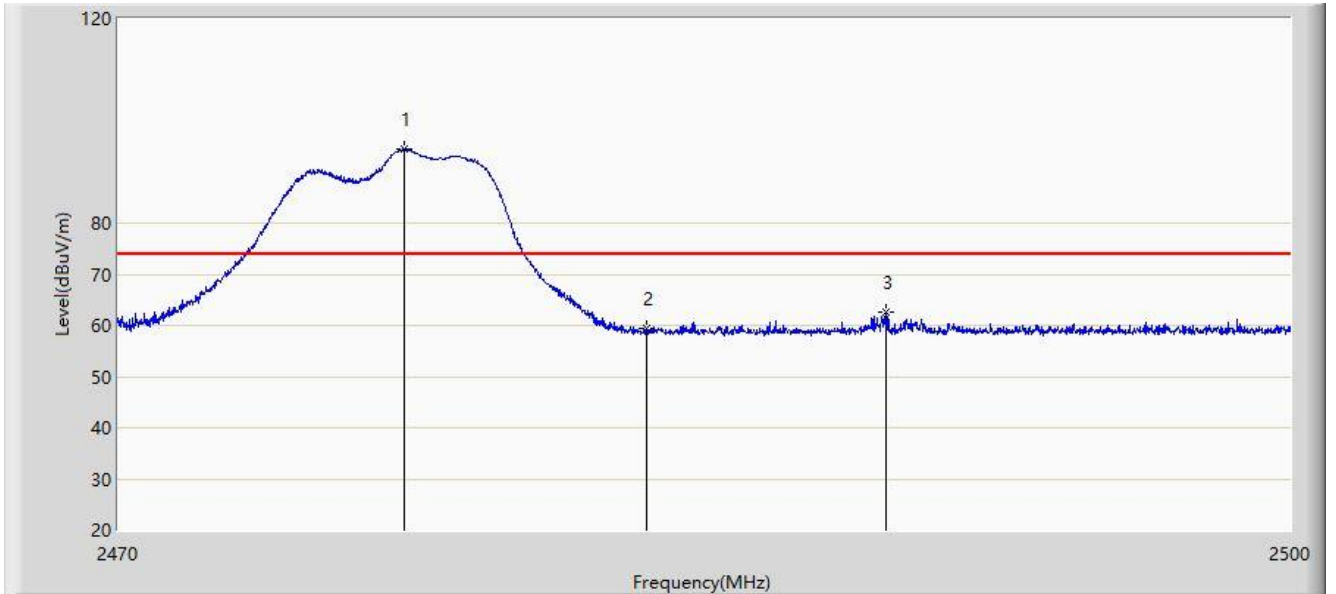


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2477.305	94.385	61.651	N/A	N/A	32.734	PK
2			2483.500	59.394	26.622	-14.606	74.000	32.772	PK
3			2489.635	62.477	29.669	-11.523	74.000	32.808	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 11:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Full BW at Channel 2478MHz	

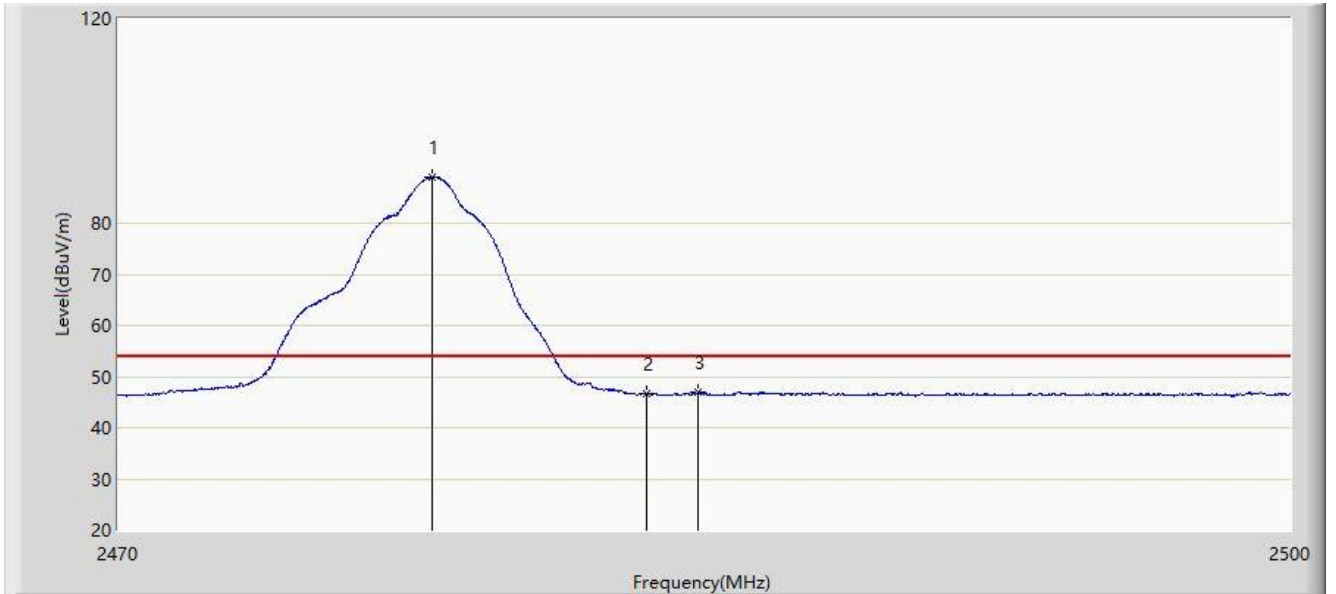


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2478.025	88.992	56.253	N/A	N/A	32.739	AV
2			2483.500	46.694	13.922	-7.306	54.000	32.772	AV
3			2484.820	47.069	14.289	-6.931	54.000	32.780	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 11:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Full BW at Channel 2478MHz	

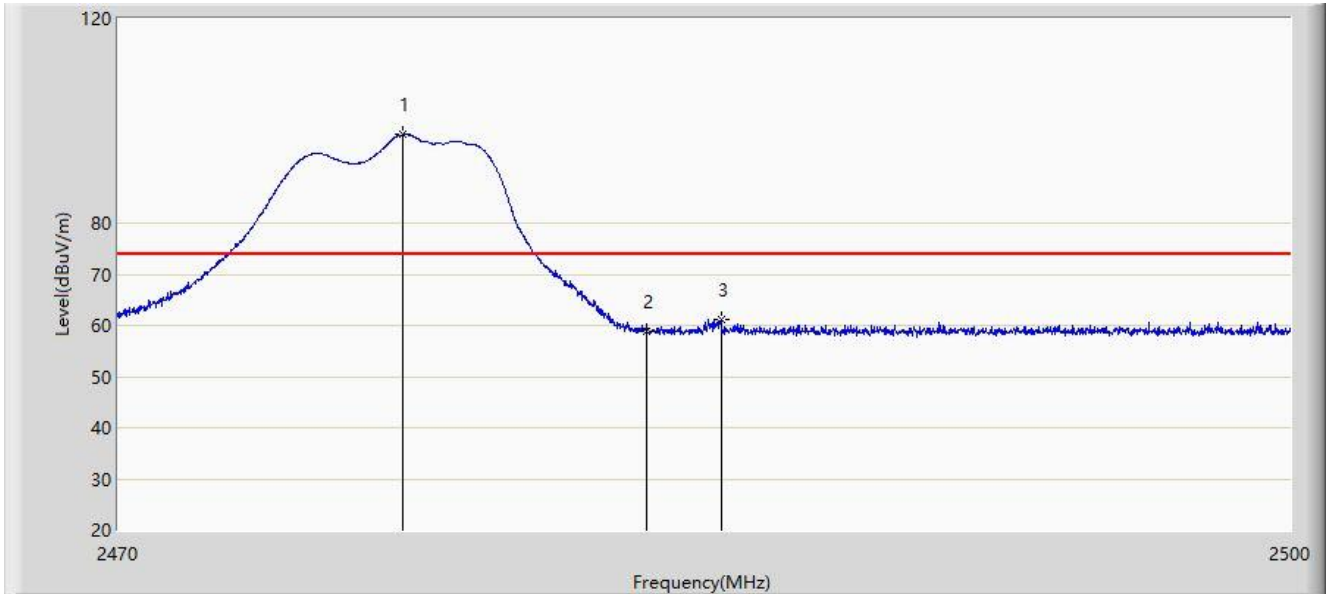


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2477.275	97.283	64.549	N/A	N/A	32.734	PK
2			2483.500	58.880	26.108	-15.120	74.000	32.772	PK
3			2485.390	61.252	28.469	-12.748	74.000	32.783	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC3	Time: 2021/08/10 - 11:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Full BW at Channel 2478MHz	

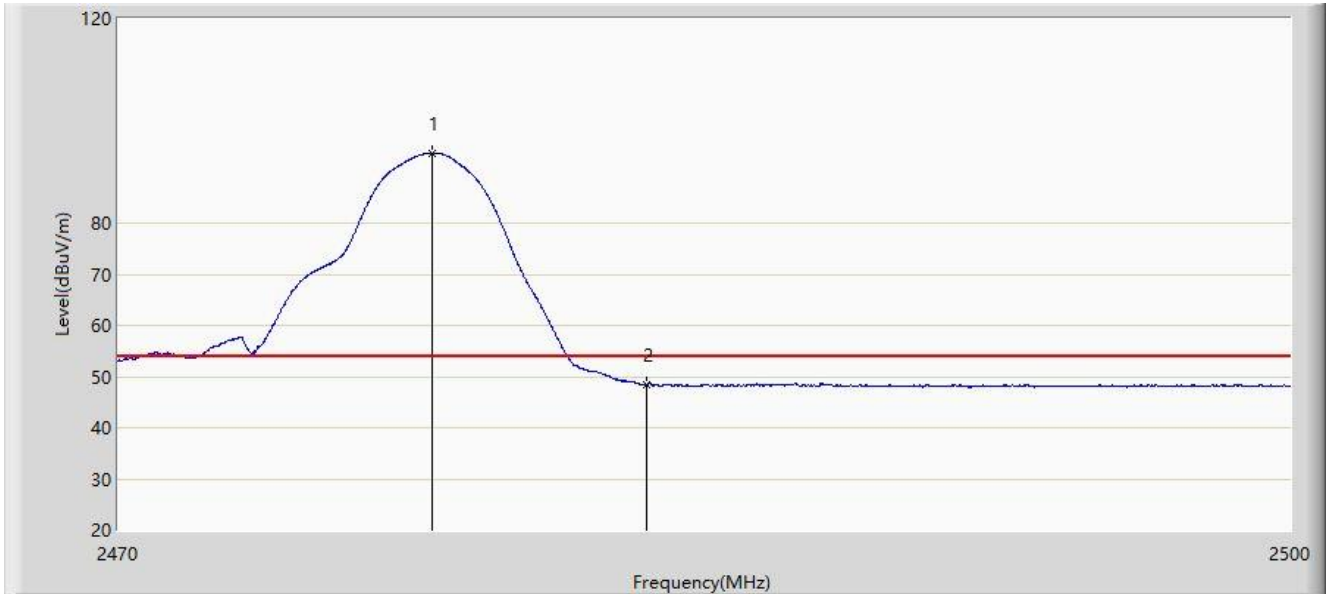


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2478.010	93.758	61.019	N/A	N/A	32.739	AV
2			2483.500	48.546	15.774	-5.454	54.000	32.772	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 13:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Half BW at Channel 2404MHz	

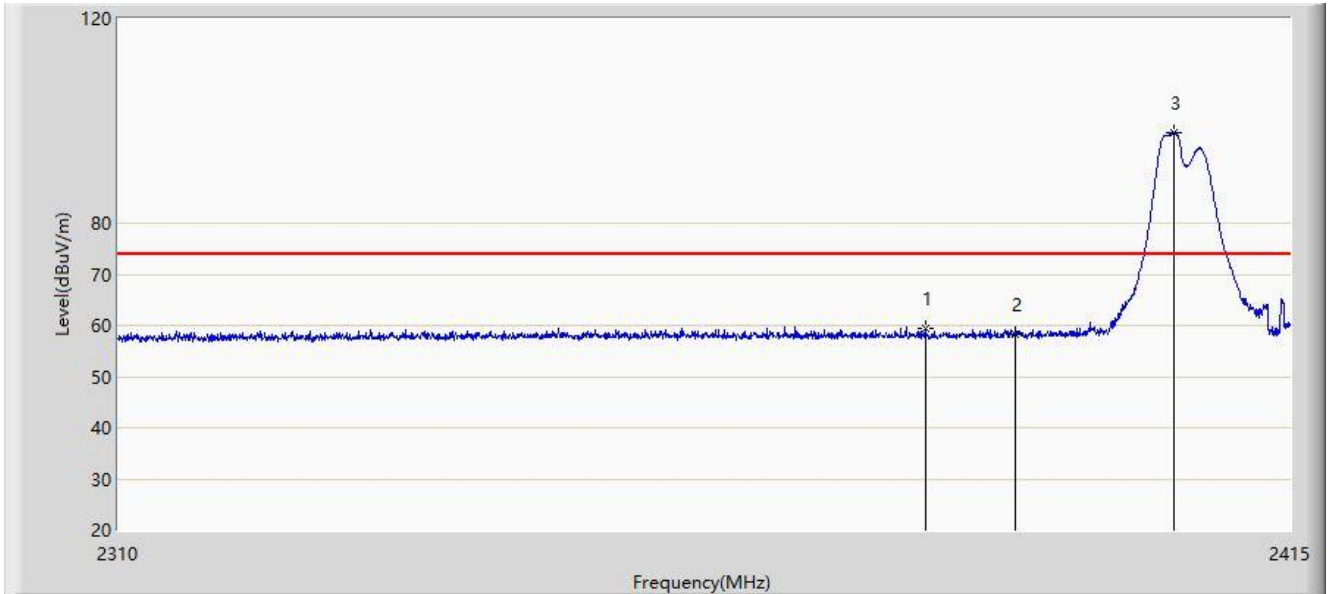


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2381.820	59.360	27.140	-14.640	74.000	32.220	PK
2			2390.000	58.336	26.071	-15.664	74.000	32.265	PK
3		*	2404.448	97.702	65.362	N/A	N/A	32.340	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 13:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Half BW at Channel 2404MHz	

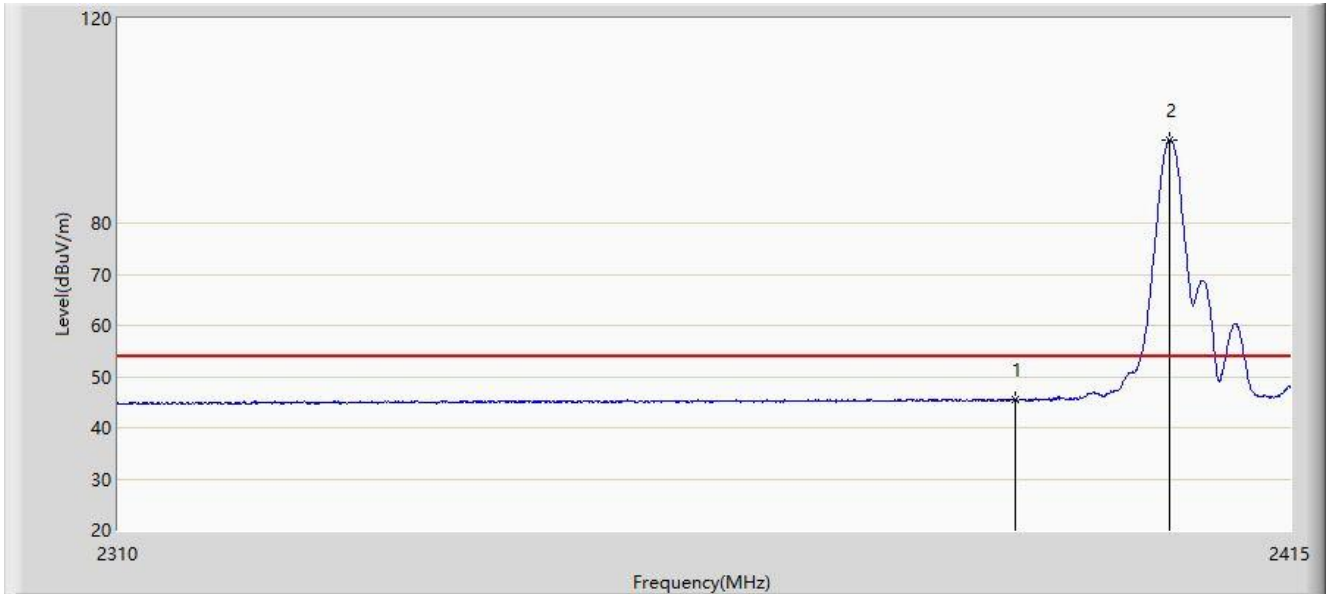


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	45.430	13.165	-8.570	54.000	32.265	AV
2		*	2404.028	96.269	63.931	N/A	N/A	32.337	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 13:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Half BW at Channel 2404MHz	

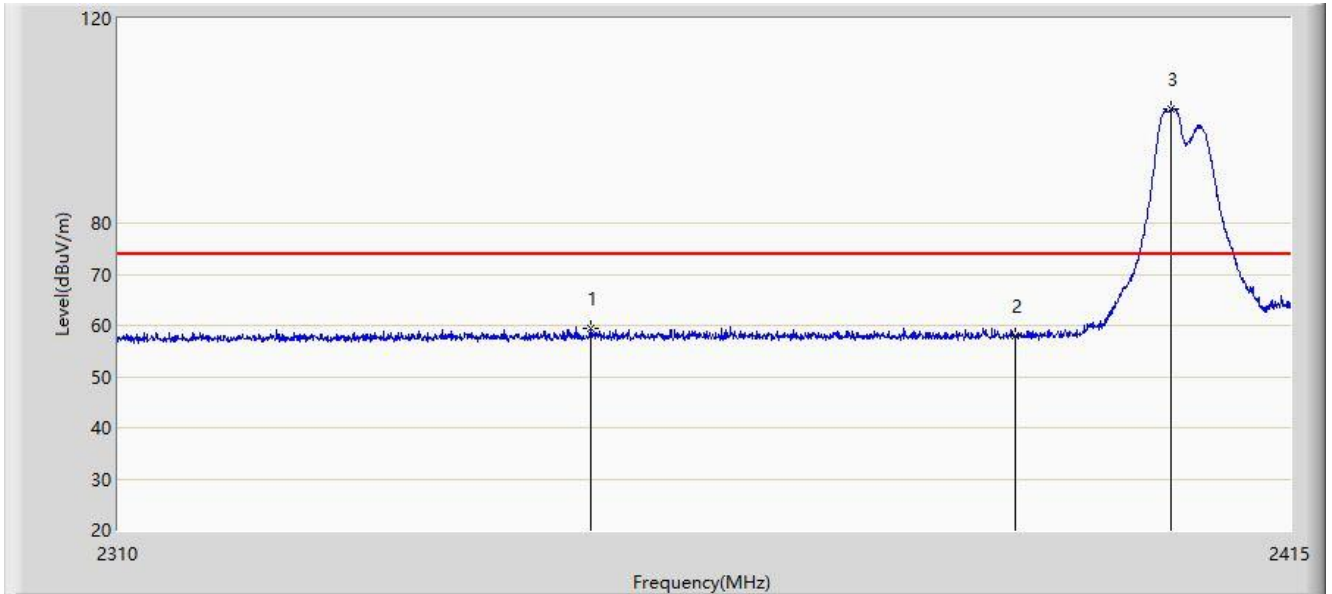


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2351.790	59.467	27.352	-14.533	74.000	32.115	PK
2			2390.000	57.955	25.690	-16.045	74.000	32.265	PK
3		*	2404.133	102.250	69.912	N/A	N/A	32.338	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 13:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Half BW at Channel 2404MHz	

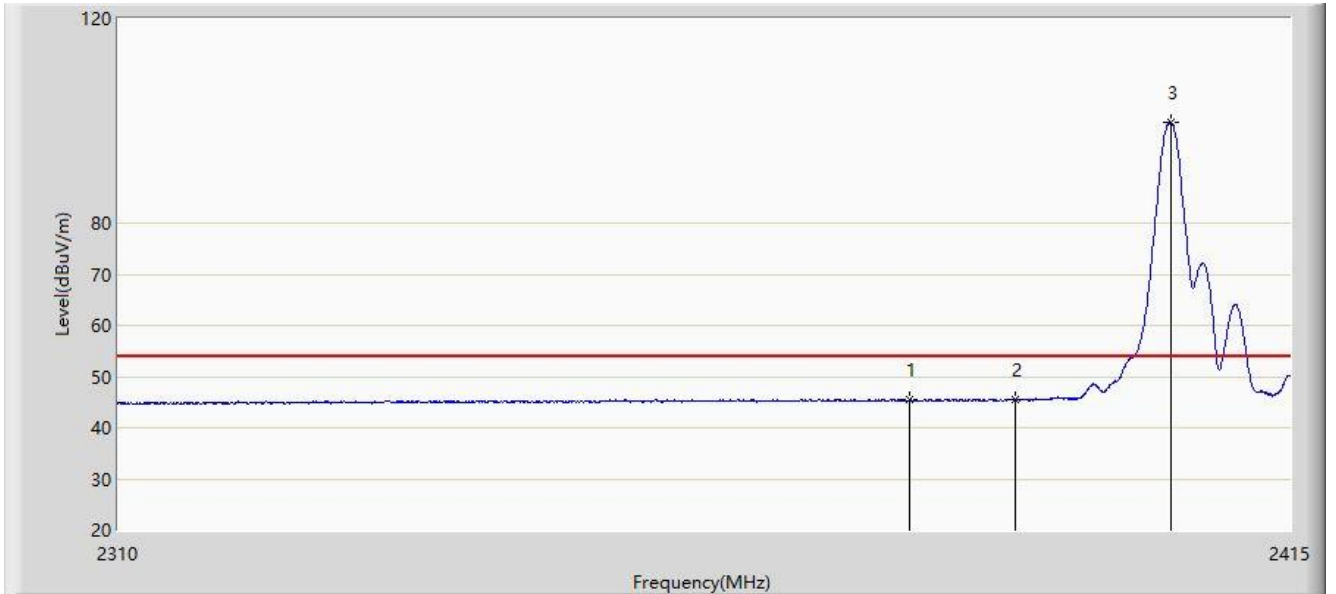


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2380.403	45.633	13.420	-8.367	54.000	32.213	AV
2			2390.000	45.366	13.101	-8.634	54.000	32.265	AV
3		*	2404.133	99.784	67.446	N/A	N/A	32.338	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 13:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Half BW at Channel 2478MHz	

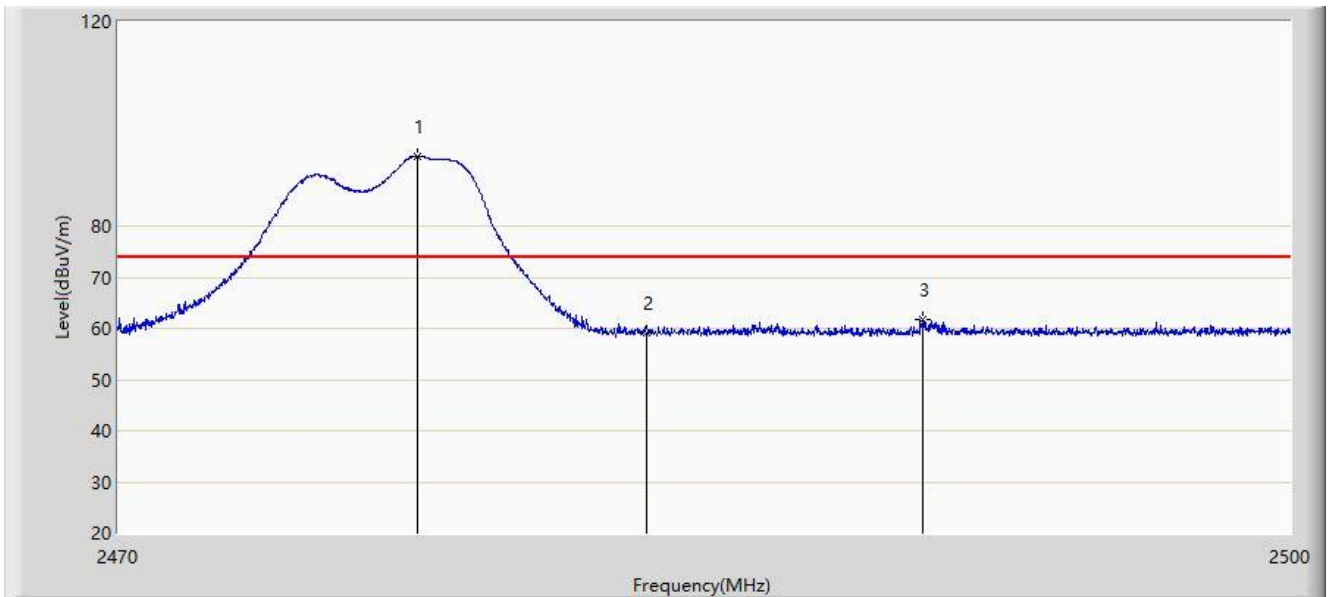


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2477.650	93.734	60.997	N/A	N/A	32.736	PK
2			2483.500	59.183	26.411	-14.817	74.000	32.772	PK
3			2490.580	61.848	29.034	-12.152	74.000	32.814	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 14:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Half BW at Channel 2478MHz	

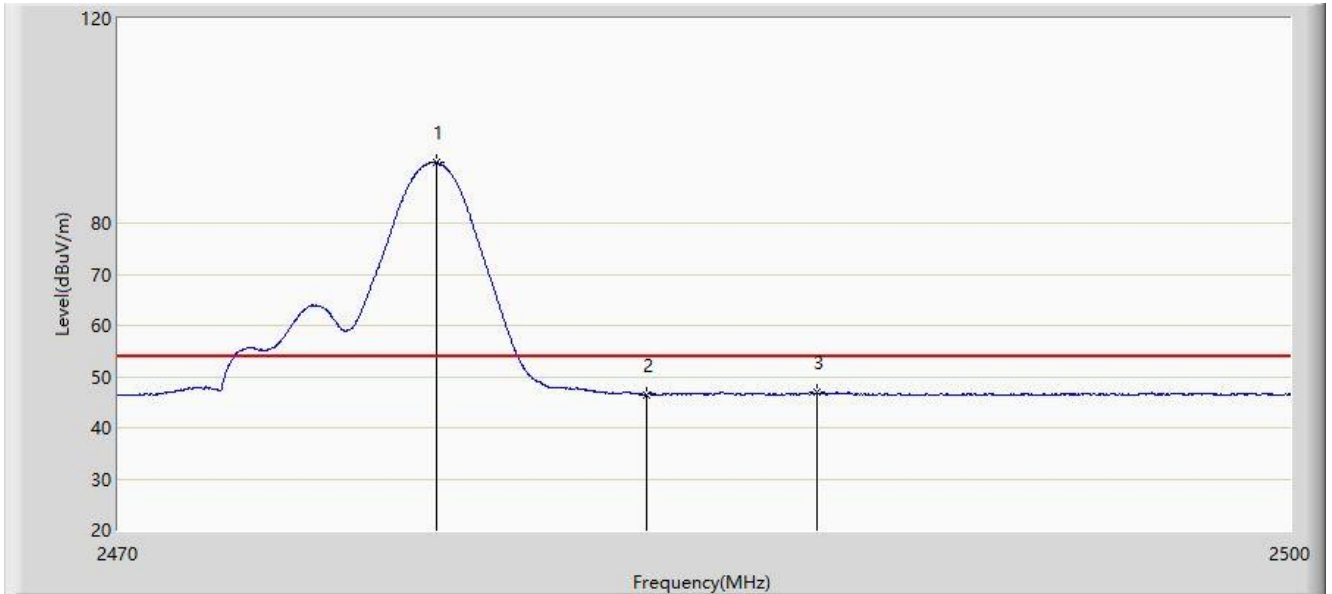


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2478.115	91.839	59.100	N/A	N/A	32.739	AV
2			2483.500	46.505	13.733	-7.495	54.000	32.772	AV
3			2487.835	46.906	14.109	-7.094	54.000	32.797	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2021/08/10 - 14:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Half BW at Channel 2478MHz	

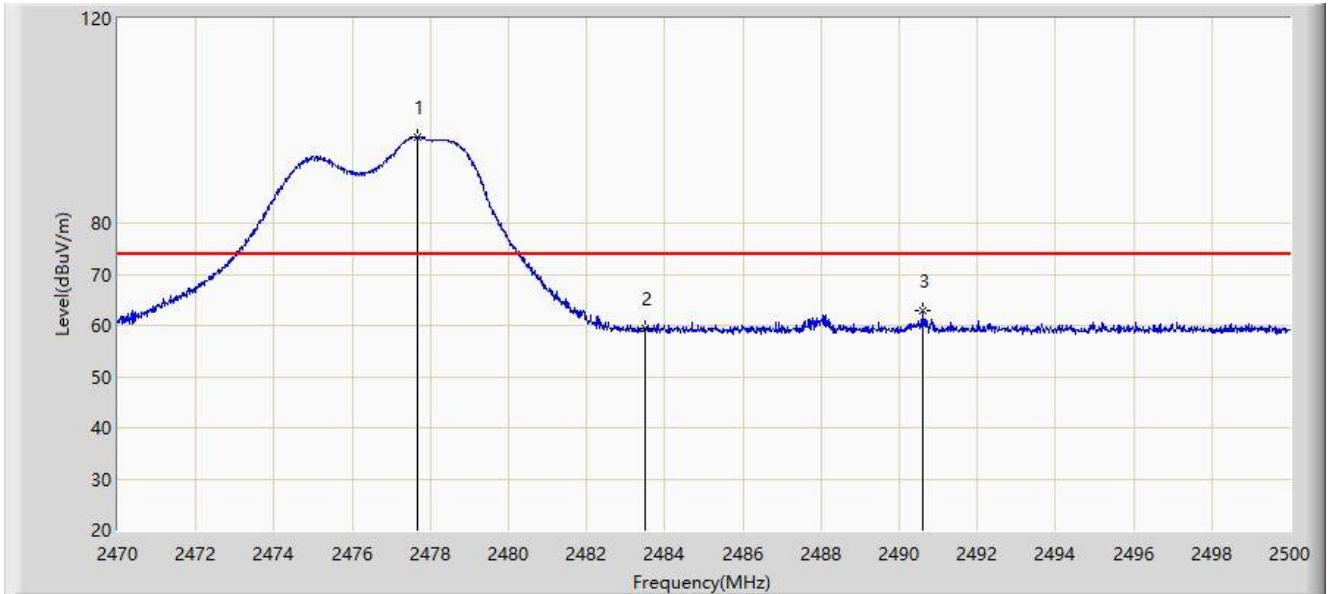


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2477.680	96.740	64.003	N/A	N/A	32.737	PK
2			2483.500	59.349	26.577	-14.651	74.000	32.772	PK
3			2490.610	62.829	30.015	-11.171	74.000	32.814	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC3	Time: 2021/08/10 - 14:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Yien Qian
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit by Half BW at Channel 2478MHz	

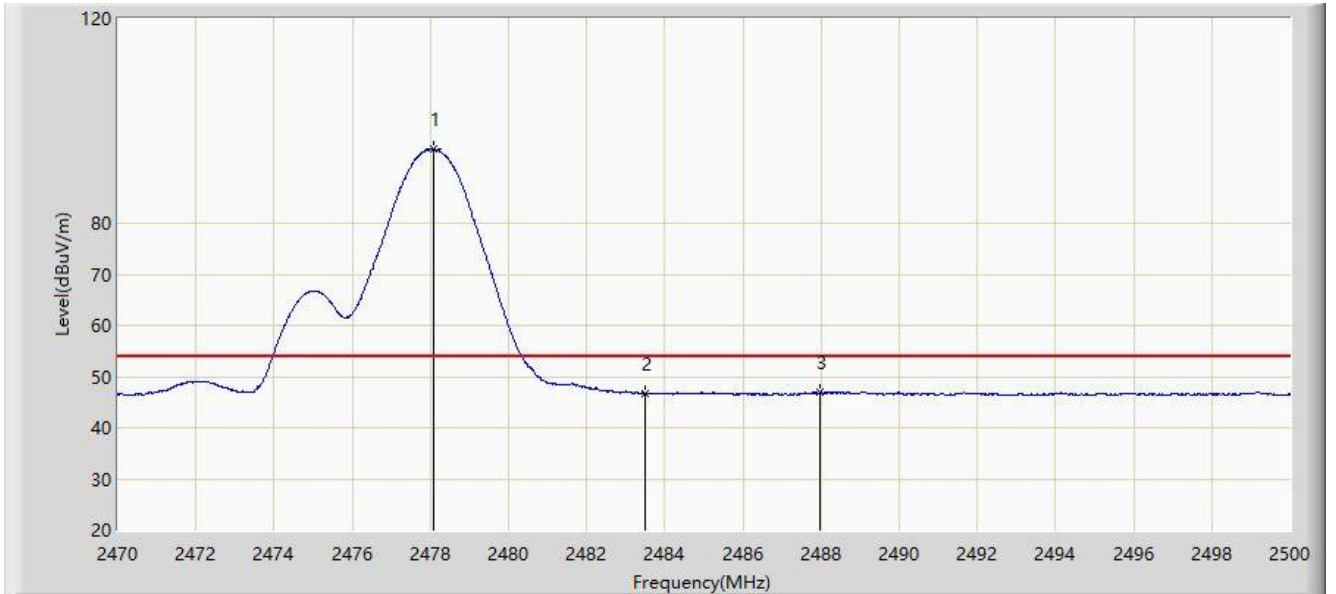

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2478.100	94.410	61.671	N/A	N/A	32.739	AV
2			2483.500	46.679	13.907	-7.321	54.000	32.772	AV
3			2487.955	46.927	14.129	-7.073	54.000	32.798	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

## 6.8. AC Conducted Emissions Measurement


### 6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.8.2. Test Setup

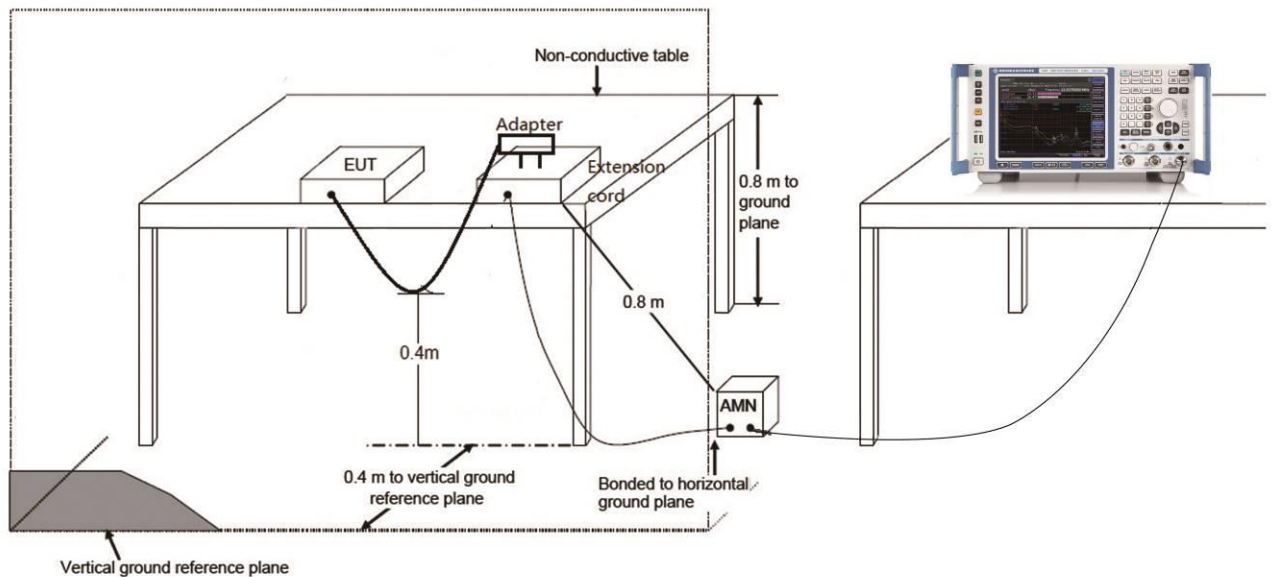

### 6.8.3. Test Result

Site: SIP-SR2	Time: 2021/08/18
Limit: FCC_Part15.207_CE_AC Power	Engineer: Rupert Wang
Probe: SIP-SR2-ENV216_101684_C	Polarity: Line
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit	

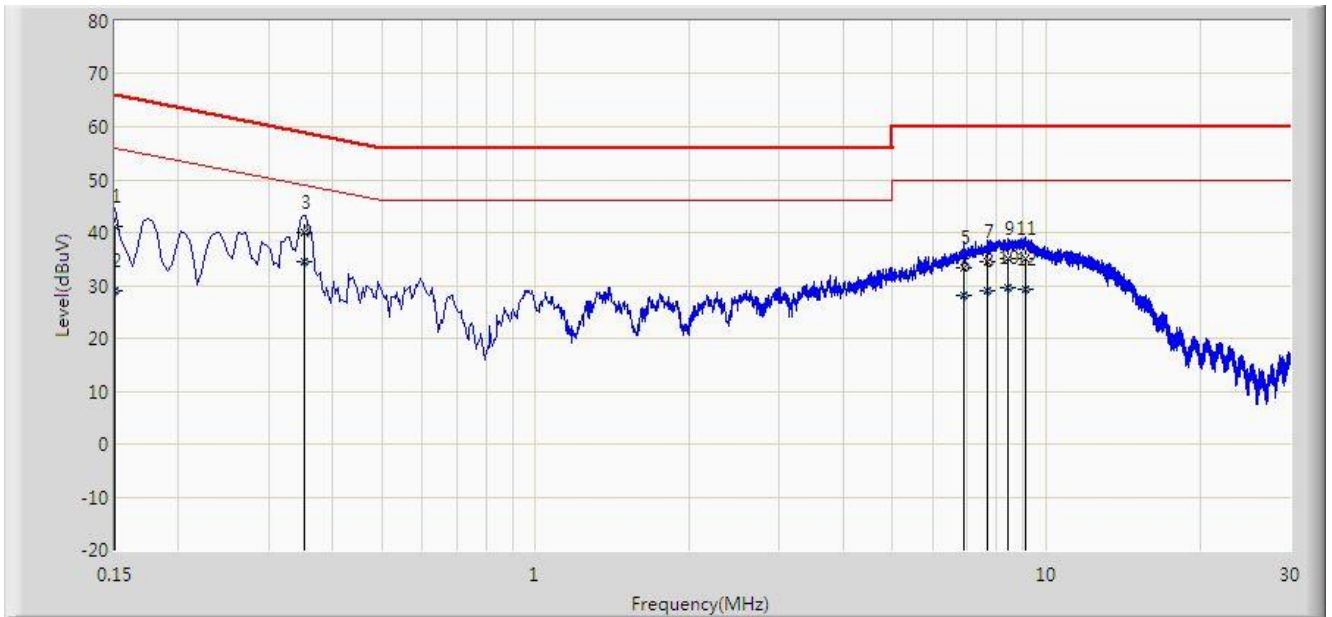


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	41.265	31.615	-24.735	66.000	9.650	QP
2			0.150	28.848	19.198	-27.152	56.000	9.650	AV
3			0.352	40.012	30.300	-18.903	58.915	9.712	QP
4		*	0.352	34.512	24.800	-14.403	48.915	9.712	AV
5			6.874	33.234	23.306	-26.766	60.000	9.928	QP
6			6.874	28.008	18.080	-21.992	50.000	9.928	AV
7			7.658	34.445	24.493	-25.555	60.000	9.952	QP
8			7.658	29.033	19.081	-20.967	50.000	9.952	AV
9			8.386	35.128	25.145	-24.872	60.000	9.983	QP
10			8.386	29.618	19.635	-20.382	50.000	9.983	AV
11			9.086	35.107	25.096	-24.893	60.000	10.011	QP
12			9.086	29.399	19.388	-20.601	50.000	10.011	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Time: 2021/08/18
Limit: FCC_Part15.207_CE_AC Power	Engineer: Rupert Wang
Probe: SIP-SR2-ENV216_101684_C	Polarity: Neutral
EUT: Wireless Guitar Pedal Receiver	Power: AC 120V/60Hz
Test Mode: Transmit	

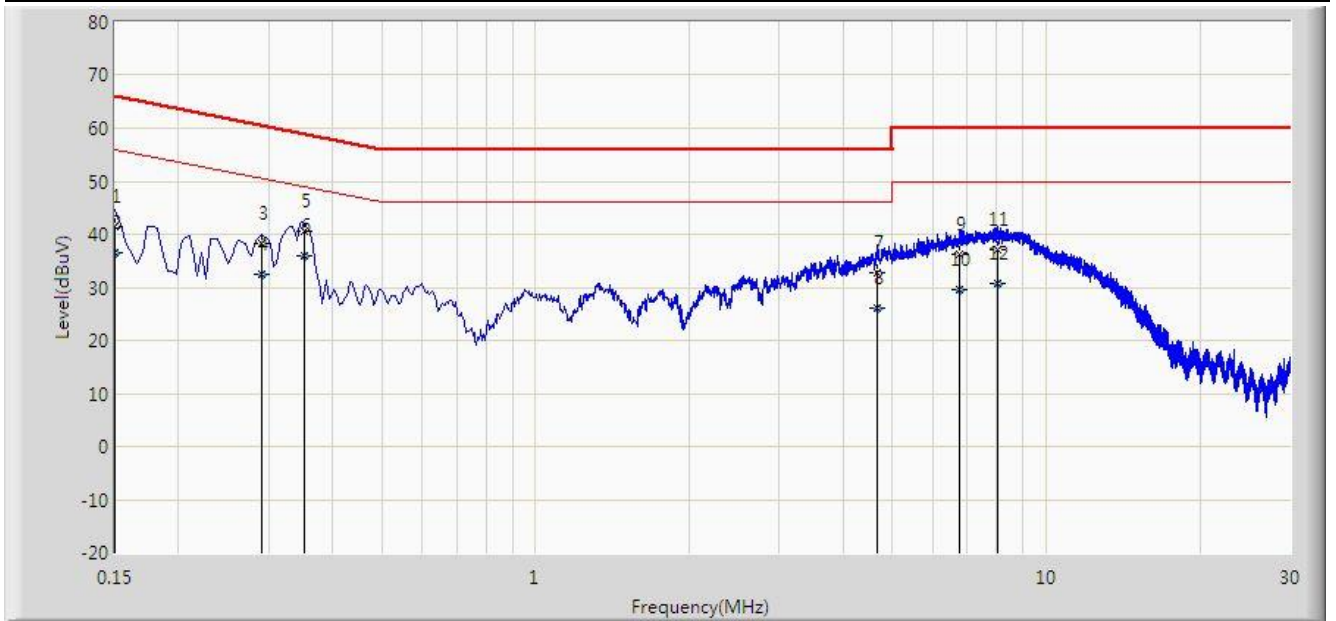

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	41.572	31.931	-24.428	66.000	9.641	QP
2			0.150	36.390	26.749	-19.610	56.000	9.641	AV
3			0.290	38.255	28.558	-22.269	60.524	9.697	QP
4			0.290	32.444	22.747	-18.080	50.524	9.697	AV
5			0.353	40.502	30.800	-18.390	58.892	9.702	QP
6		*	0.353	36.002	26.300	-12.890	48.892	9.702	AV
7			4.674	32.852	23.027	-23.148	56.000	9.826	QP
8			4.674	26.099	16.273	-19.901	46.000	9.826	AV
9			6.770	36.197	26.312	-23.803	60.000	9.885	QP
10			6.770	29.622	19.737	-20.378	50.000	9.885	AV
11			8.026	37.006	27.042	-22.994	60.000	9.964	QP
12			8.026	30.755	20.791	-19.245	50.000	9.964	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## 7. Conclusion

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules.

————— The End —————

## **Appendix A - Test Setup Photograph**

Refer to "2107RSU040-UT" file.

## **Appendix B - EUT Photograph**

Refer to "2107RSU040-UE" file.