

## TEST REPORT

Test Report No.: 1-4439/12-02-03



### Testing Laboratory

**CETECOM ICT Services GmbH**  
 Untertürkheimer Straße 6 – 10  
 66117 Saarbrücken/Germany  
 Phone: + 49 681 5 98 - 0  
 Fax: + 49 681 5 98 - 9075  
 Internet: <http://www.cetecom.com>  
 e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited Test Laboratory:

The testing laboratory (FCC part 15 D) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

### Applicant

**Shure**  
 5800 Touhy Avenue  
 Niles, IL USA 60714  
  
 Phone: + 1-847-600-2000  
 Fax: + 1-847-600-1212  
 Contact: Mr. Geoff Lange  
 e-mail: [Lange.Geoff@shure.com](mailto:Lange.Geoff@shure.com)  
 Phone: + 1-847-600-8923

### Manufacturer

**Shure**  
 5800 Touhy Avenue  
 Niles, IL USA 60714

### Test Standard/s

FCC Part 15, subpart D      Isochronous UPCS Device 1920 – 1930 MHz  
 Industry Canada          2 GHz Licence-exempt Personal Communication Service Devices (LE-PCS)  
 RSS-213, Issue 2

### Test Item

**Kind of test item:**            **DECT Fixed Part**  
**Model name:**                **MXWAPT4 Z10**  
 FCC ID:                         DD4MXWAPT4  
 IC:                                 616A-MXWAPT4  
 S/N serial number:            4121660100  
 HW hardware status:        01  
 SW software status:         0.1.0.0  
 Frequency [MHz]:            1920 -1930  
 Type of Modulation:         Digital (Gaussian Frequency Shift Keying)  
 Number of channels:         5 RF Channels, 5x12 = 60 TDMA Duplex Channels  
 Antenna:                        2 permanently attached inverted F antennas  
 Power Supply:                48 V DC  
 Temperature Range:         -20°C to 50°C



### Test Report authorised:

cn=Marco Lenjoint,  
 o=CETECOM ICT Services  
 GmbH, ou=LEJ-100721,  
 email=marco.lenjoint@ceteco  
 m.com, c=DE  
 2012.10.02 07:11:36 +02'00'

**2012-09-05**      Lenjoint, Marco  
 Testing Manager

### Test performed:

cn=Joachim Wolf, o=CETECOM ICT  
 Services GmbH, ou=WOL-110131,  
 email=Joachim.Wolf@cetecom.com,  
 c=DE  
 2012.10.01 13:07:33 +02'00'

**2012-09-05**      Wolf, Joachim  
 Senior Consultant

**1 Table of contents**

1 Table of contents.....2

2 General information .....4

    2.1 Notes and disclaimer .....4

    2.2 Application details .....4

3 Test standard/s:.....4

4 Test Environment .....5

5 Test Item.....5

6 RSP100 Test report Cover Sheet/Performance Test Data.....6

7 Summary of Measurement Results .....7

8 Test Set-up.....8

    8.1 Frequency Measurements .....8

    8.2 Timing Measurements .....8

    8.3 Conducted Emission Test .....8

    8.4 Radiated Emission Test.....9

    8.5 Power Line Conducted Emissions Test.....9

    8.6 Monitoring Tests.....10

    8.7 Radiated Output Power Test .....10

9 Detailed Test Results .....11

    9.1 Power Line Conducted Emissions .....11

    9.2 Coordination with fixed microwave.....14

    9.3 Digital Modulation Techniques .....14

    9.4 Labeling Requirements.....14

    9.5 Antenna Requirements .....15

    9.6 Channel Frequencies .....15

    9.7 Automatic Discontinuation of Transmission.....16

    9.8 Peak Power Output .....17

    9.9 Emission Bandwidth B .....21

    9.10 Power Spectral Density.....24

    9.11 In-Band Unwanted Emissions, Conducted .....27

    9.12 Out-of-Band Emissions, Conducted .....30

    9.13 Carrier Frequency Stability.....34

    9.14 Frame Repetition Stability .....35

    9.15 Frame Period and Jitter.....35

    9.16 Monitoring Threshold, Least Interfered Channel .....37

    9.17 Threshold Monitoring Bandwidth .....39

    9.18 Reaction Time and Monitoring Interval .....40

    9.19 Time and Spectrum Window Access Procedure.....41

    9.20 Acknowledgments and Transmission duration.....44

    9.21 Dual Access Criteria Check.....45

    9.22 Alternative monitoring interval.....46

    9.23 Spurious Emissions (Radiated).....46

    9.24 Receiver Spurious Emissions .....50

10 Test equipment and ancillaries used for tests.....53

11	Observations .....	54
	Annex A: Photographs of the Test Set-up .....	55
	Annex B: External Photographs of the EUT .....	57
	Annex C: Internal Photographs of the EUT .....	58
	Annex D: Document History.....	60
	Annex E: Further Information .....	61
	Annex F: Safety exposure levels .....	62
	Annex G: Accreditation Certificate .....	63

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order:	2012-05-30
Date of receipt of test item:	2012-08-17
Start of test:	2012-08-17
End of test:	2012-08-30
Person(s) present during the test:	/

## 3 Test standard/s:

Test Standard	Version	Test Standard Description
FCC Part 15, subpart D	2009-10	Isochronous UPCS Device 1920 – 1930 MHz
Industry Canada RSS-213, Issue 2	1999-04-24	2 GHz Licence-exempt Personal Communication Service Devices (LE-PCS)

#### 4 Test Environment

Temperature: + 22 °C during room temperature tests  
+ 50 °C during high temperature test  
- 20 °C during low temperature test

Relative humidity content: 38 %

Air pressure: not relevant for this kind of testing

Power supply: 110V AC/DC Adapter, (48 V DC)

#### 5 Test Item

Kind of test item	:	<b>UPCS Base station</b>
Type identification	:	<b>MXWAPT4 Z10 (Fixed Part)</b>
S/N serial number	:	<b>4121660100</b>
HW hardware status	:	<b>01</b>
SW software status	:	<b>0.1.0.0</b>
Power Supply	:	<b>110 V AC/DC adapter (48V DC)</b>
Temperature Range	:	<b>-20°C to 50°C</b>


## 6 RSP100 Test report Cover Sheet/Performance Test Data

Test Report Number	:	<b>1-4439/12-02-03</b>
Equipment Model Number	:	<b>MXWAPT4 Z10 (Fixed Part)</b>
Certification Number	:	<b>616A-MXWAPT4</b>
Manufacturer	:	<b>Shure</b>
Tested to Radio Standards Specification (RSS) No. :		<b>RSS-213 Issue 2</b>
Open Area Test Site Industry Canada Number	:	<b>IC 3462C-1</b>
Frequency Range (or fixed frequency)	:	<b>1921.536 – 1928.448 MHz</b>
RF Power [W] (max)	:	<b>Conducted: 19.2 dBm, 83.6 mW Rad. EIRP: 21.4 dBm, 138.0 mW</b>
Occupied Bandwidth (99% BW)	:	<b>1.37MHz</b>
Type of Modulation	:	<b>Digital (Gaussian Frequency Shift Keying)</b>
Emission Designator (TRC-43)	:	<b>1M37FXD</b>
Antenna information	:	<b>2 permanently attached antenna, no ext. connector</b>
Transmitter Spurious (worst case)	:	<b>-29.2 dBm</b>
Receiver Spurious (worst case)	:	<b>-61.7 dBm</b>

### ATTESTATION:

**DECLARATION OF COMPLIANCE:** I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Signature:



cn=Joachim Wolf, o=CETECOM ICT  
Services GmbH, ou=WOL-110131,  
email=Joachim.Wolf@cetecom.com,  
c=DE  
2012.10.01 13:07:52 +02'00'

Date: 2012-09-05

Test engineer: Joachim Wolf

CETECOM ICT Services GmbH  
Untertürkheimerstr. 6-10  
66117 Saarbrücken  
Germany

## 7 Summary of Measurement Results

<input checked="" type="checkbox"/>	<b>No deviations from the technical specifications were ascertained</b>
<input type="checkbox"/>	There were deviations from the technical specifications ascertained

### CFR 47 Part 15 UPCS

Name of test	FCC CFR 47 Paragraph	IC RSS-213 Paragraph	Verdict
Coordination with fixed microwave	15.307(b)	N/A	Complies
Digital Modulation Techniques	15.319(b)	6.1	Complies
Labeling requirements	15.19(a)(3)	RSS-GEN 5.2	Complies
Antenna requirements	15.317, 15.203	4.1(e)	Complies
Power Line Conducted Emission	15.107(a), 15.207(a)	6.3 RSS_GEN 7.2.2	Complies
Emission Bandwidth	15.323(a)	6.4	Complies
In-band Emission	15.323(d)	6.7.2	Complies
Out-of-band Emissions	15.323(d)	6.7.1	Complies
Peak Transmit Power	15.319(c)(e), 15.31(e)	6.5	Complies
Power Spectral Density	15.319(d)	4.3.2.1	Complies
Automatic discontinuation of transmission	15.319(f)	4.3.4(a)	Complies
Carrier frequency stability	15.323(f)	6.2	Complies
Frame repetition stability	15.323(e)	4.3.4(c)	Complies
Frame period and jitter	15.323(e)	4.3.4(c)	Complies
Monitoring threshold, Least interfered channel	15.323(c)(2);(5); (9)	4.3.4(b)	Complies
Monitoring of intended transmit window and maximum reaction time	15.323(c)(1)	4.3.4	Complies
Threshold monitoring bandwidth	15.323(c)(7)	4.3.4	Complies
Reaction time and monitoring interval	15.323(c)(1);(5); (7)	4.3.4	N/A <sup>1</sup>
Access criteria test interval	15.323(c)(4);(6)	4.3.4	Complies
Access criteria functional test	15.323(c)(4);(6)	4.3.4	Complies
Acknowledgments	15.323(c)(4)	4.3.4	Complies
Transmission duration	15.323(c)(3)	4.3.4	N/A <sup>1</sup>
Dual access criteria	15.323(c)(10)	4.3.4	N/A <sup>1</sup>
Alternative monitoring interval	15.323(c)(10);(11)	4.3.4	N/A <sup>2</sup>
Spurious Emissions (Antenna Conducted)	15.323(d)	6.7.1	Complies <sup>3</sup>
Spurious Emissions (Radiated)	15.319(g), 15.109(a), 15,209(a)	4.3.3 RSS-GEN 7.2.3	Complies <sup>4</sup>
Receiver Spurious Emissions	N/A	6.8	Complies

<sup>1</sup> Only applicable for EUT that can initiate a communication link

<sup>2</sup> The client declares that the tested equipment does not implement this provision


<sup>3</sup> The tested equipment has integrated antennas only

<sup>4</sup> Only requirement FCC 15.109 for unintentional radiators was tested radiated

## 8 Test Set-up

### 8.1 Frequency Measurements

#### Test Set-up 1:




This setup is used for measuring Carrier Frequency Stability at nominal and extreme temperatures.

For long term Frequency Stability, the EUT was in loopback-mode and was controlled with the CMD65, the modulation pattern was set to 01010101....

### 8.2 Timing Measurements


#### Test Set-up 2:



This setup is used for measuring Frame Repetition Stability, Frame Period and Jitter.

### 8.3 Conducted Emission Test

#### Test Set-up 3:

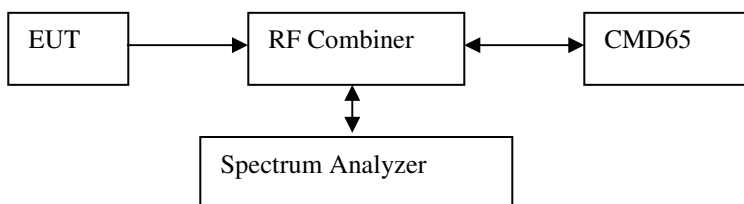

This setup is used for all conducted emission tests.

The EUT was in loopback-mode and was controlled with the CMD65, the modulation pattern was set to Pseudo-Random bit sequence to simulate normal speech.



## 8.4 Radiated Emission Test

### Test Set-up 4:

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 150 MHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.


30 MHz - 200 MHz: Quasi Peak measurement, 120 KHz Bandwidth, bilog antenna

200MHz - 1GHz: Quasi Peak measurement, 120 KHz Bandwidth, bilog antenna

1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn

## 8.5 Power Line Conducted Emissions Test


### Test Set-up 5:

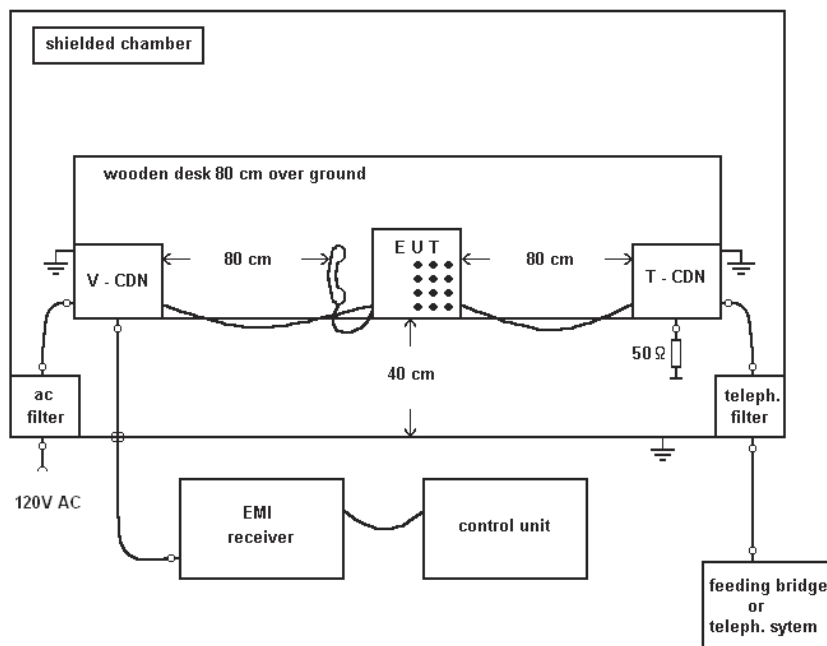

principle set up: conducted emission at ac power line

## 8.6 Monitoring Tests

### Test Set-up 6:

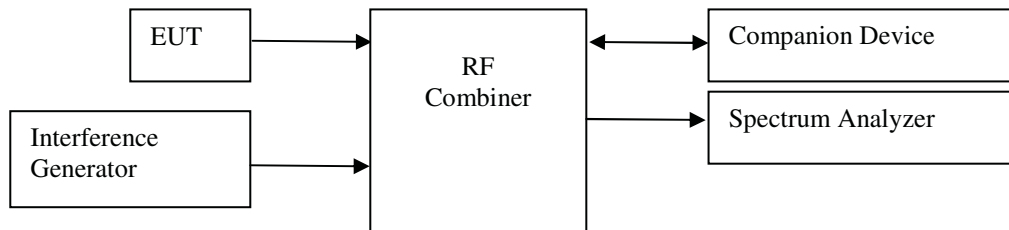


This test setup is used for all Monitoring and Time and Spectrum Access Procedure tests. The path loss from the signal generator to the EUT is measured with a power meter before the testing is started.

A clock signal is used to synchronize the Interference Generator to the start of the DECT frame, this signal always comes from the base station. If the EUT is a DECT Portable Part (i.e. a handset) the clock signal will come from the Companion Device.

## 8.7 Radiated Output Power Test

### Test Set-up 7:

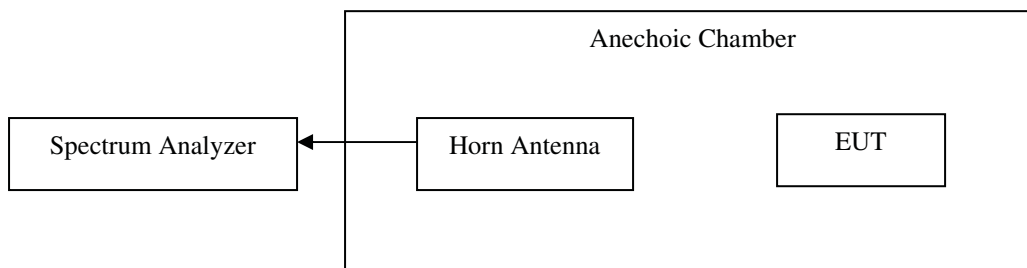

This setup is used for measuring the radiated output power in a fully anechoic chamber with a measurement distance of 1m.

## 9 Detailed Test Results

### 9.1 Power Line Conducted Emissions

**Measurement Procedure:**


ANSI C63.4-2009 using 50 $\mu$ H/50 ohms LISN.

**Test Result:** Pass

**Measurement Data:** See attached graphs and tables.

**Requirement:** FCC 15.207 (a)

Idle mode, phase line

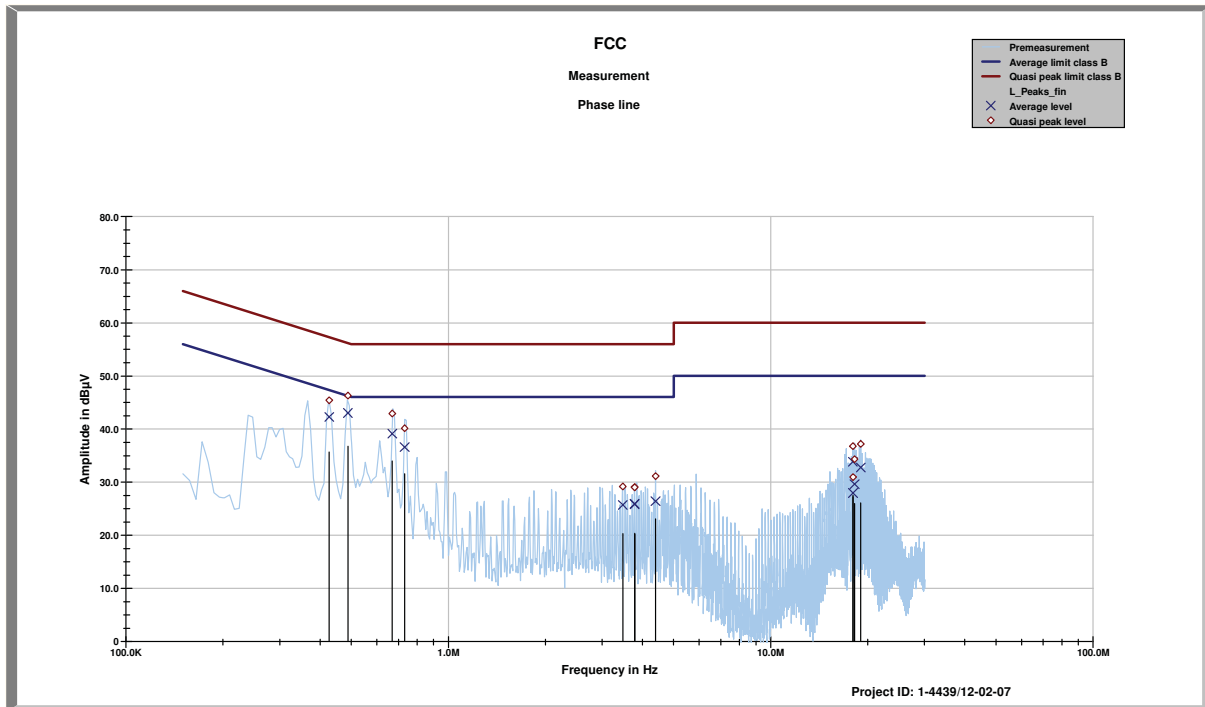

FCC  
Phase line tbl


Project ID: 1-4439/12-02-07

01:55:11 PM, Monday, August 20, 2012

Frequency	Quasi peak level	Margin quasi peak	Average level	Margin average
MHz	dBµV	dBµV	dBµV	dBµV
0.42696	45.41	11.90	42.27	5.82
0.48795	46.30	9.90	43.03	3.32
0.66995	42.91	13.09	39.13	6.87
0.73163	40.16	15.84	36.59	9.41
3.4771	29.17	26.83	25.71	20.29
3.782	29.08	26.92	25.84	20.16
3.7825	29.03	26.97	25.93	20.07
4.3913	31.13	24.87	26.41	19.59
17.98	36.77	23.23	33.84	16.16
17.986	30.97	29.03	27.95	22.05
18.193	34.32	25.68	29.61	20.39
19.026	37.18	22.82	32.75	17.25

Project ID - 1-4439/12-02-07  
 EUT - MXWAPT  
 Serial Number - sample 3  
 Operating mode - idle + powered by PoE

Idle mode, neutral line

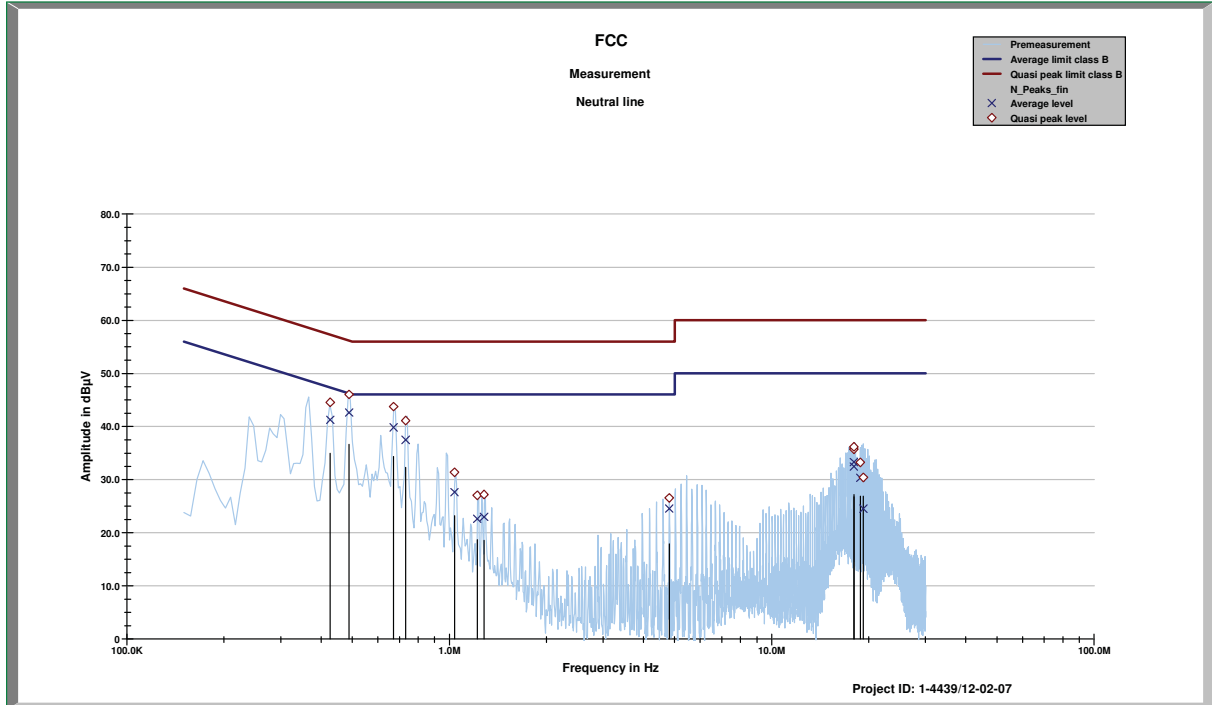

FCC  
Neutral line tbl

Project ID: 1-4439/12-02-07

01:55:11 PM, Monday, August 20, 2012

Frequency	Quasi peak level	Margin quasi peak	Average level	Margin average
MHz	dBµV	dBµV	dBµV	dBµV
0.42705	44.55	12.76	41.26	6.83
0.48863	46.05	10.14	42.61	3.72
0.6713	43.75	12.25	39.83	6.17
0.73199	41.13	14.87	37.47	8.53
1.03693	31.36	24.64	27.64	18.36
1.22071	27.03	28.97	22.62	23.38
1.2811	27.21	28.79	22.98	23.02
4.8073	26.55	29.45	24.54	21.46
17.976	35.70	24.30	32.44	17.56
17.979	36.17	23.83	33.29	16.71
18.819	33.24	26.76	30.32	19.68
19.238	30.41	29.59	24.51	25.49

Project ID - 1-4439/12-02-07  
 EUT - MXWAPT  
 Serial Number - sample 3  
 Operating mode - idle + powered by PoE

## 9.2 Coordination with fixed microwave

The affidavit from UTAM, Inc. is included in the documentation supplied by the applicant:

Yes

No

### Requirement: FCC 15.307 (b):

Each application for certification of equipment operating under the provisions of this Subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.

## 9.3 Digital Modulation Techniques

The tested equipment is based on DECT technology, the only difference is that the channel allocation is modified to operate in the 1920-1930 MHz band.

The EUT use Multi Carrier / Time Division Multiple Access / Time division duplex and Digital GFSK modulation.

For further details see the operational description provided by the applicant.

### Requirement: FCC 15.319(b)

All transmissions must use only digital modulation techniques.

## 9.4 Labeling Requirements

See separate documents showing the label design and the placement of the label on the EUT.

### Requirement: FCC 15.19

The FCC identifier shall be displayed on the label, and the device(s) shall bear the following statement in a conspicuous location on the device or in the user manual if the device is too small:

*This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

The label itself shall be of a permanent type, not a paper label, and shall last the lifetime of the equipment.

## 9.5 Antenna Requirements

Does the EUT have detachable antenna(s)?  Yes  No

If detachable, is the antenna connector(s) non-standard?  Yes  No

The tested equipment has only integral antennas. The conducted tests were performed on a sample with a temporary antenna connector.

**Requirements: FCC 15.203, 14.204. 15.317**

## 9.6 Channel Frequencies

UPCS CHANNEL	FREQUENCY (MHz)
Upper Band Edge	1930.000
0 (Highest)	1928.448
1	1926.720
2	1924.992
3	1923.264
4 (Lowest)	1921.536
Lower Band Edge	1920.000

**Requirement: FCC 15.303(d), (g)**

Within 1920-1930 MHz band for isochronous devices.

## 9.7 Automatic Discontinuation of Transmission

Does the EUT transmit control and Signaling Information?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
Type of EUT:	<input type="checkbox"/> Initiating device	<input checked="" type="checkbox"/> Responding device

The following tests simulate the reaction of the EUT in case of either absence of information to transmit or operational failure after a connection with the companion device is established.

Number	Test	EUT Reaction	Verdict
1	Power removed from EUT	A	Pass
2	EUT switched Off	N/A	N/A
3	Hook-On by companion device	B	Pass
4	Hook-On by EUT	N/A	N/A
5	Power removed from companion device	B	Pass
6	Companion device switched Off	B	Pass

- A – Connection breakdown, Cease of all transmissions  
 B – Connection breakdown, EUT transmits control and signaling information  
 C – Connection breakdown, companion device transmits control and signaling information  
 N/A – Not applicable (the EUT does not have an on/off switch and can not perform Hook-On)

### Requirement: FCC 15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. This provision is not intended to preclude transmission of control and signaling information or use or repetitive code used by certain digital modulation technologies to complete frame or burst intervals.



## 9.8 Peak Power Output

### Measurement Procedure:

ANSI C63.17, clause 6.1.2.

### Test Results: Pass

### Measurement Data:

#### Maximum Conducted Output Power

Channel No.	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Maximum Radiated Output Power (dBm)	Maximum Antenna Gain (dBi)
4	1921.536	19.2	21.4 <sup>1</sup>	2.2
2	1924.992	18.3	20.5 <sup>1</sup>	2.2
0	1928.448	17.5	19.7 <sup>1</sup>	2.2

<sup>1</sup> calculated on basis of the antenna gain

For this test it was also checked that the input voltage variation of 85 and 115% of nominal value did not have any effect on the measured output power, neither radiated nor conducted.

### Limit:


Conducted:  $100 \mu\text{W} \times \text{SQRT}(B)$  where B is the measured Emission Bandwidth in Hz  
 FCC 15.319(c)(e): 20.8 dBm (120 mW)  
 RSS-213, Issue 2: 20.7 dBm (116 mW)  
 The antenna gain is below 3 dBi.

### Requirements: FCC 15.319(f). RSS-213, Issue 2


Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hertz.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.


### Conducted Peak Output Power

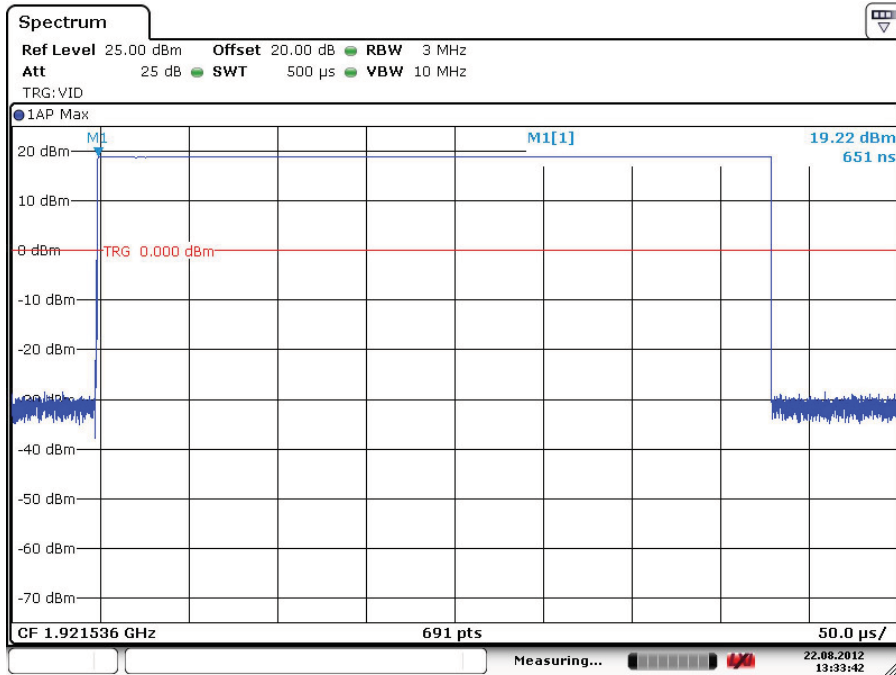

### Lower Channel

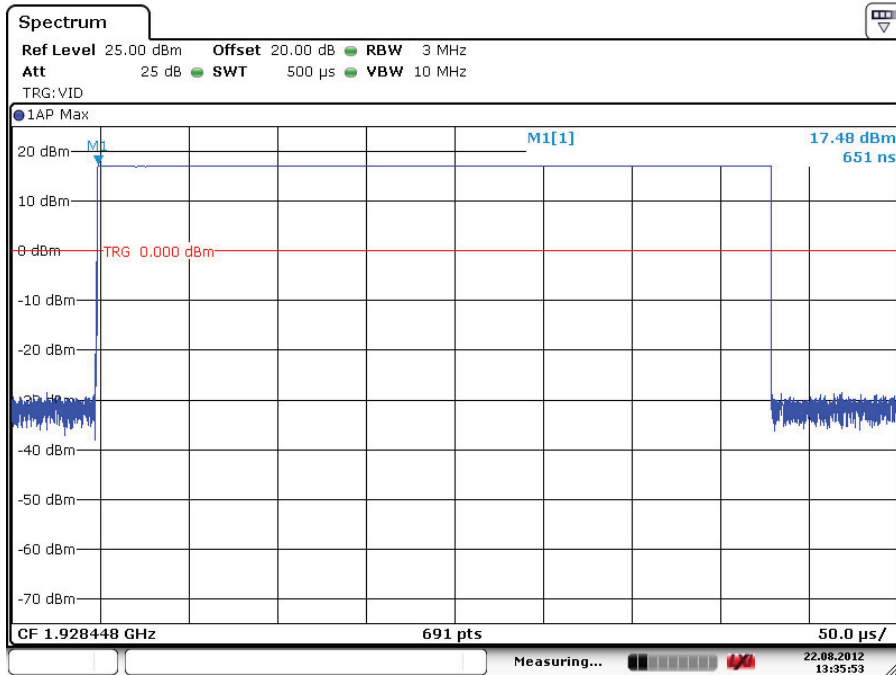

### Upper Channel

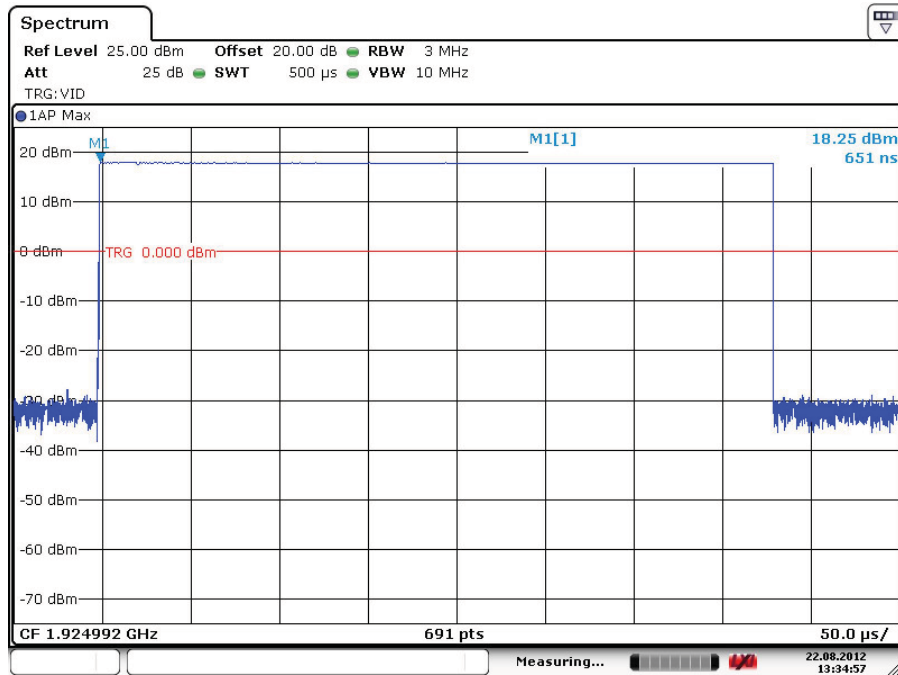

Middle Channel

### Radiated Peak Output Power

Measured antenna gain:

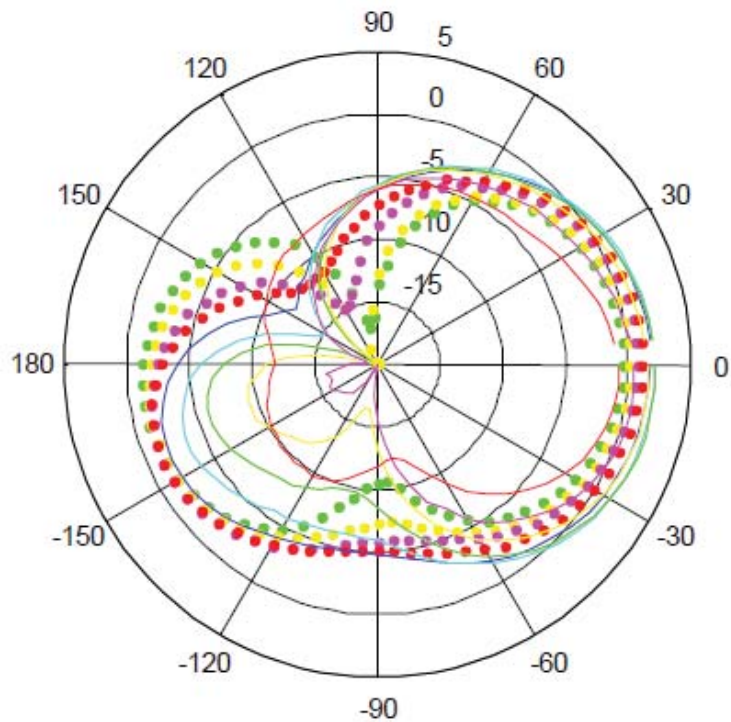


Figure 1 - PIFA in single configuration at 1.9 GHz

Theta Angle	Trace Color (polar plot)	RF level referenced to dBi		
		Maximum	Minimum	Average
90 deg.	red (solid line)	-0.4	-17.1	-5.1
80 deg.	magenta (solid line)	0.2	-25.6	-5.1
70 deg.	yellow (solid line)	0.7	-14.9	-4.3
60 deg.	green (solid line)	1.2	-11.6	-3.7
50 deg.	cyan (solid line)	1.8	-12.1	-3.5
40 deg.	blue (solid line)	2.2	-15.1	-4.2
30 deg.	red (dotted line)	2.1	-22.0	-5.6
20 deg.	magenta (dotted line)	1.7	-29.9	-7.8
10 deg.	yellow (dotted line)	0.5	-21.0	-9.3
0 deg.	green (dotted line)	-0.7	-12.4	-7.3

## 9.9 Emission Bandwidth B

### Measurement Procedure:

ANSI C63.17, clause 6.1.3.

**Test Results: Pass**

### Measurement Data:

Channel No.	Frequency (MHz)	26 dB Bandwidth B (kHz)
4	1921.536	1430
0	1928.448	1453

Channel No.	Frequency (MHz)	20 dB Bandwidth B (kHz)
2	1924.992	1368

Channel No.	Frequency (MHz)	6 dB Bandwidth B (kHz)
4	1921.536	N/A
0	1928.448	N/A

Channel No.	Frequency (MHz)	12 dB Bandwidth B (kHz)
4	1921.536	N/A
0	1928.448	N/A


### Requirement: FCC 15.323(a)

The 26 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.


### Requirement: RSS-213 Issue 2, clause 6.4

The 20 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.


No requirement for 6 dB and 12 dB Bandwidth. These values are only used for testing Monitoring Bandwidth if the Simple Compliance test fails (ANSI C63.17, clause 7.4).

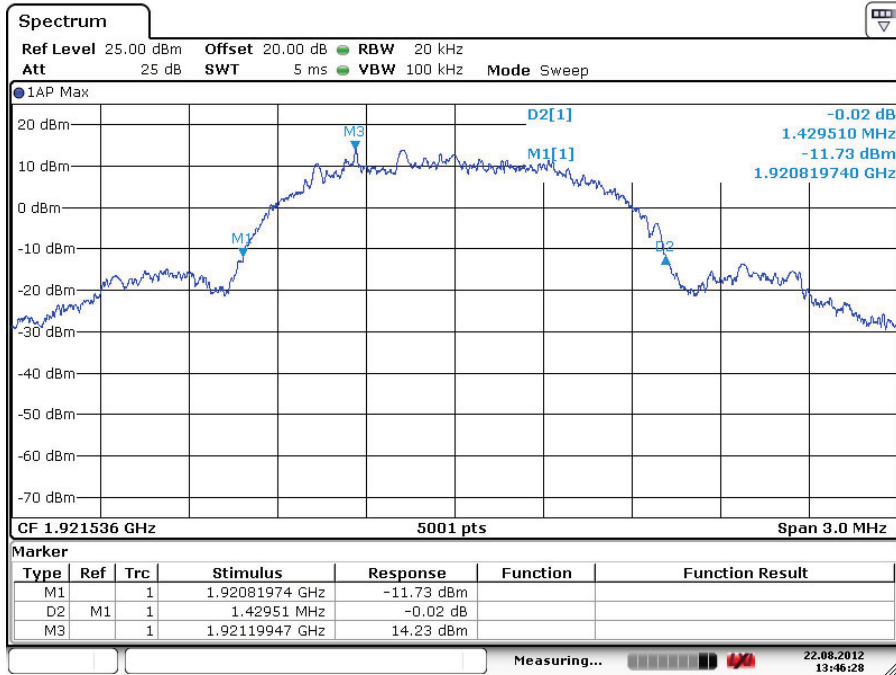

**Emission Bandwidth B, Lower Channel**

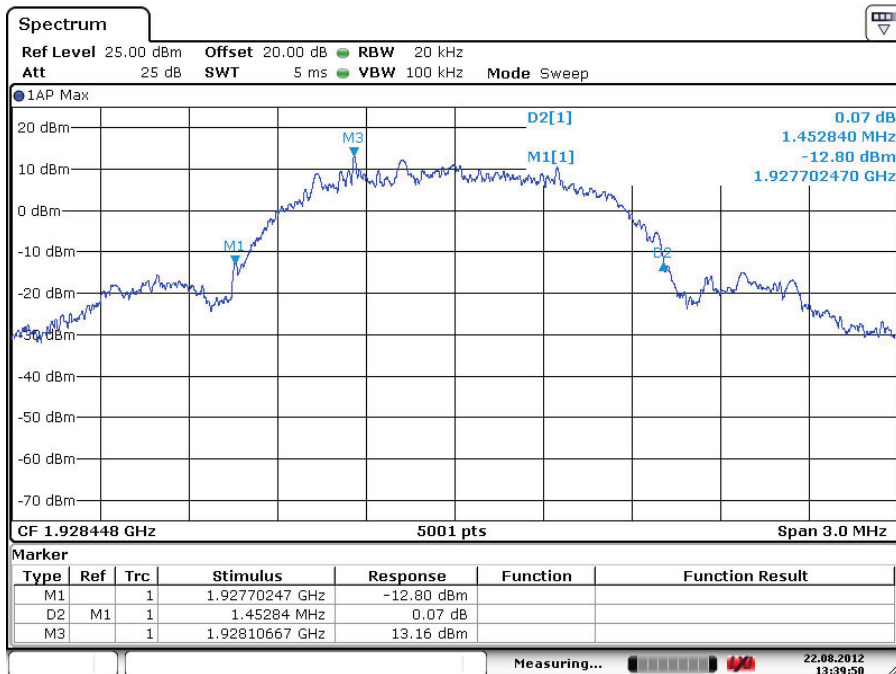

**Emission Bandwidth B, Upper Channel**

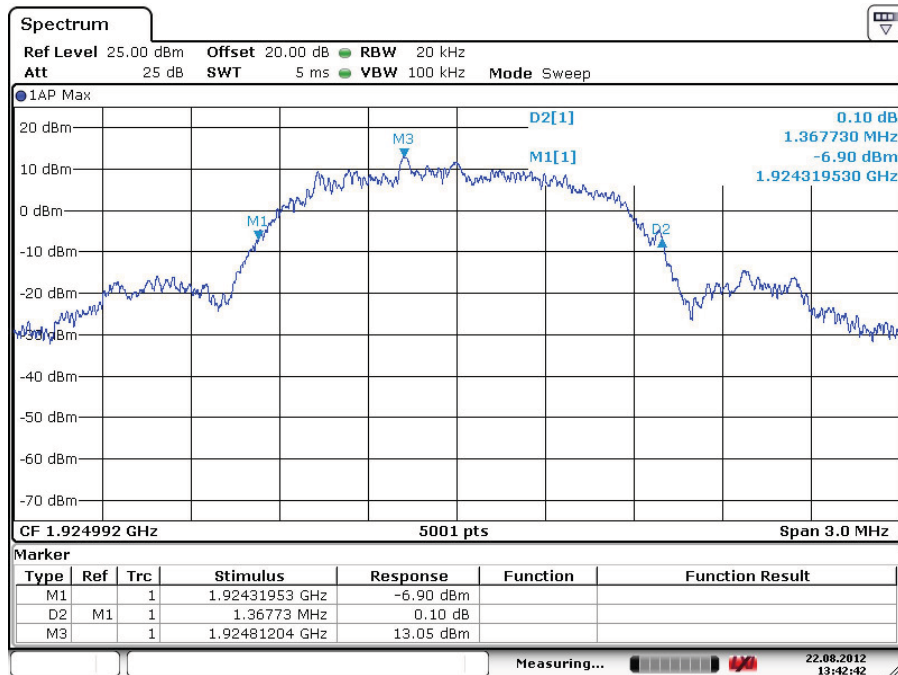

**20 dB Bandwidth B, Middle Channel**

## 9.10 Power Spectral Density

### Measurement Procedure:

ANSI C63.17, clause 6.1.5.

**Test Results: Pass**

### Measurement Data:

Channel No.	Frequency (MHz)	Power Spectral Density (mW/3kHz)
4	1921.19947	0.11
0	1928.10667	0.56

Averaged over 100 sweeps.

### Requirement: FCC 15.319(d)


The Power Spectral Density shall be less than 3 mW (4.77 dBm) when averaged over at least 100 sweeps.



## Power Spectral Density

Lower Channel:

Frequency of the maximum level was recorded under chapter 5.9.

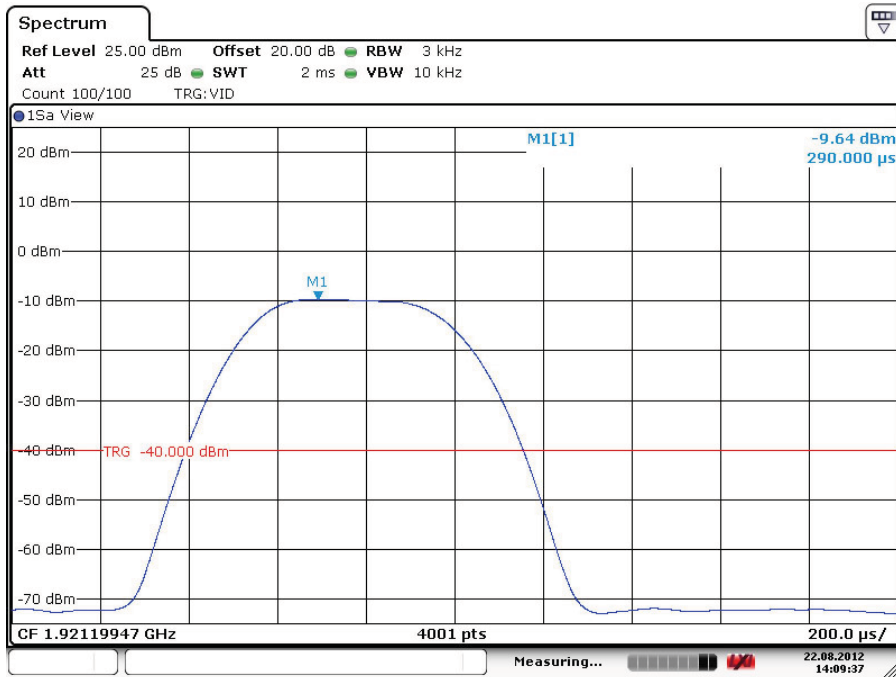


Averaged, 100 Sweeps

Pulse power [dBm]	-9.64
Pulse power [mW]	0.11

## Power Spectral Density

Upper Channel:

Frequency of the maximum level was recorded under chapter 5.9.

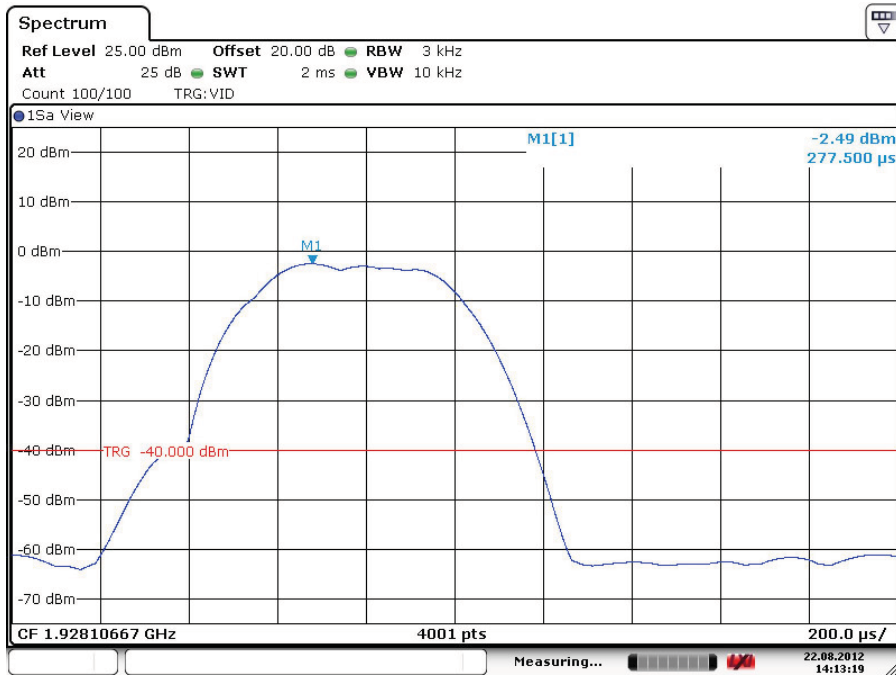

Averaged, 100 Sweeps

Pulse power [dBm]	-2.49
Pulse power [mW]	0.56

## 9.11 In-Band Unwanted Emissions, Conducted

### Measurement Procedure:

ANSI C63.17, clause 6.1.6.1.

### Test Results: Pass


### Measurement Data:

See plots.


### Requirement: FCC 15.323(d)

B < f2 ≤B:	less than or equal to 30 dB below max. permitted peak power level
2B < f2 ≤3B:	less than or equal to 50 dB below max. permitted peak power level
3B < f2 ≤UPCS Band Edge:	less than or equal to 60 dB below max. permitted peak power level


### In-Band Unwanted Emissions, Conducted

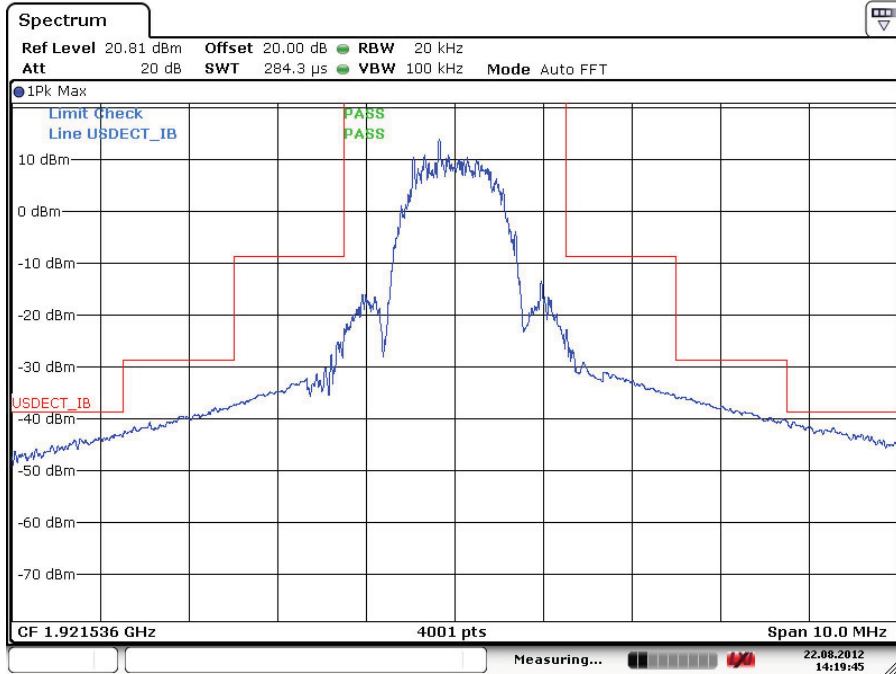

### Lower Channel

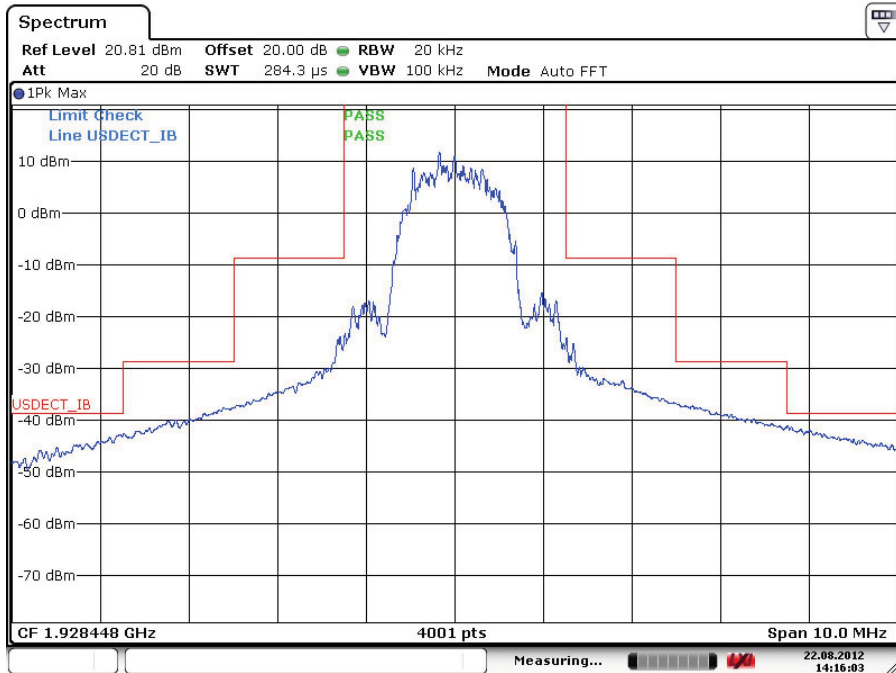

### Upper Channel

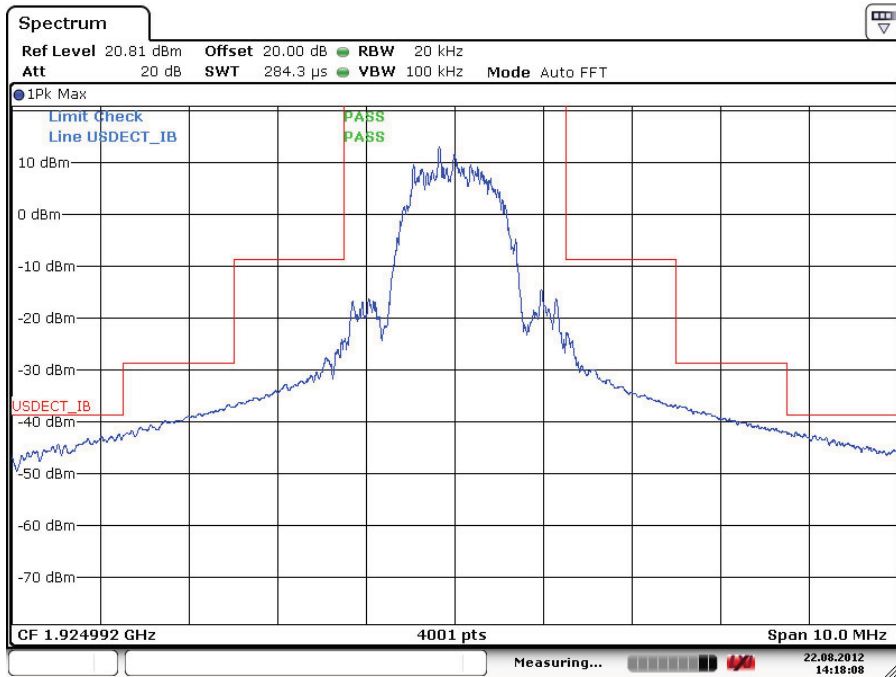

### Middle Channel

The BS spurious in-band transmission level is below the indicated limit.

## 9.12 Out-of-Band Emissions, Conducted

### Measurement Procedure:

ANSI C63.17, clause 6.1.6.2.

### Test Results: Pass

### Measurement Data:



See plots.

### Requirement: FCC 15.323(d)



$f \leq 1.25$ MHz outside UPCS band:	$\leq -9.5$ dBm
$1.25$ MHz $\leq f \leq 2.5$ MHz outside UPCS band:	$\leq -29.5$ dBm
$f \geq 2.5$ MHz outside UPCS band:	$\leq -39.5$ dBm

## Out-of-Band Unwanted Emissions, Conducted

Upper and Lower Channel:

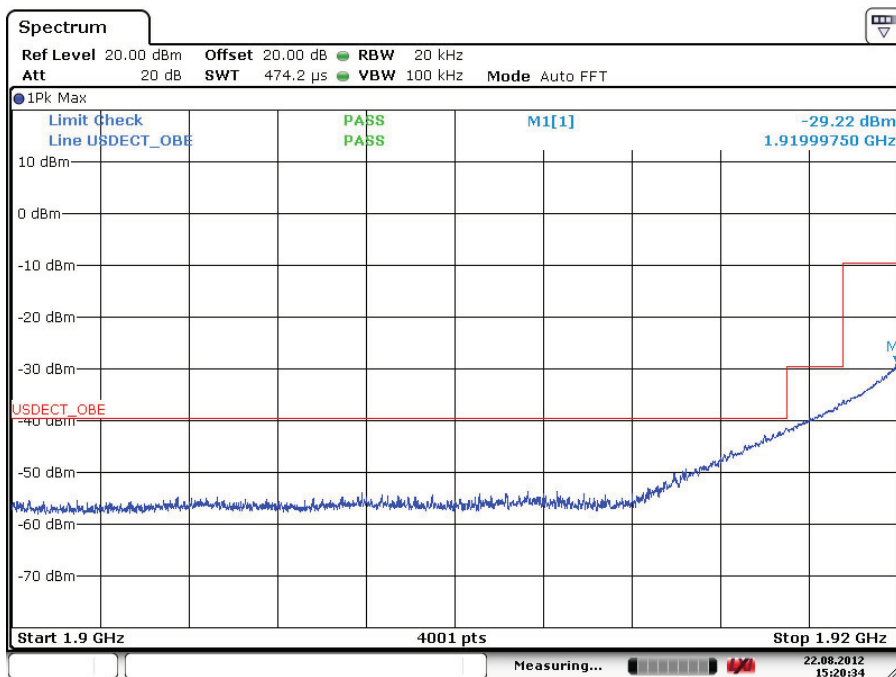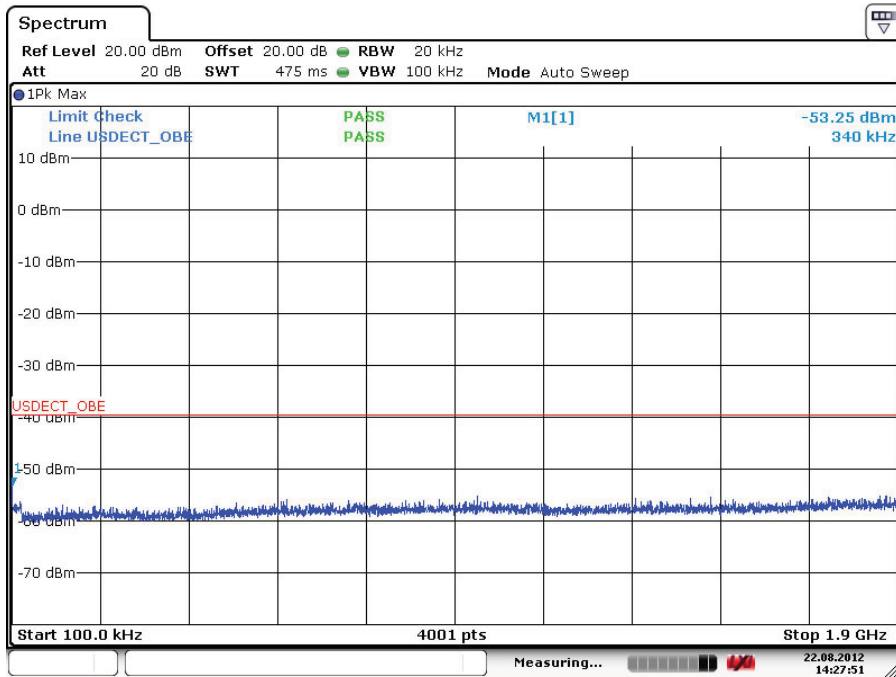


### Out-of-Band Unwanted Emissions, Conducted

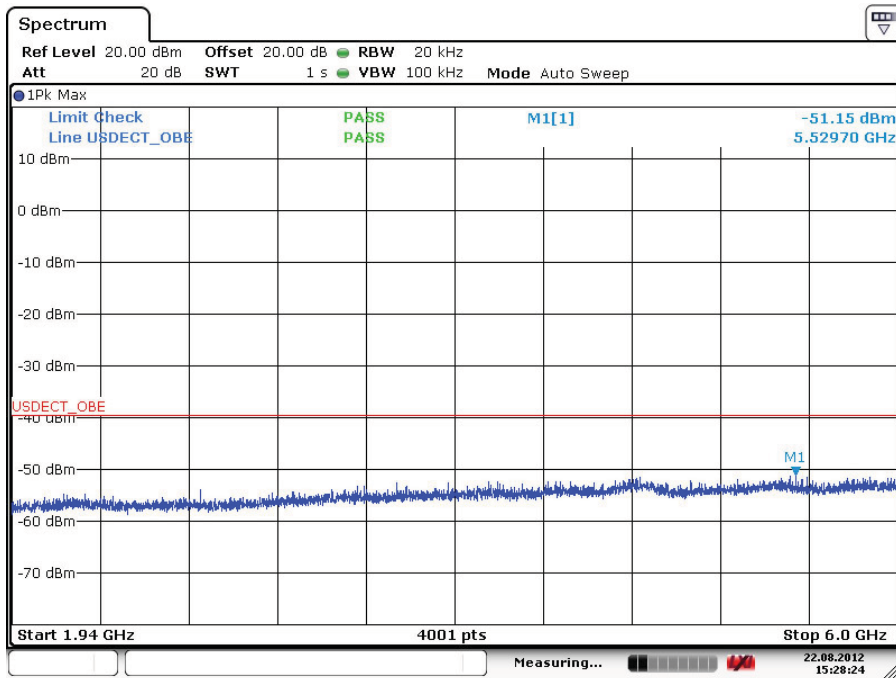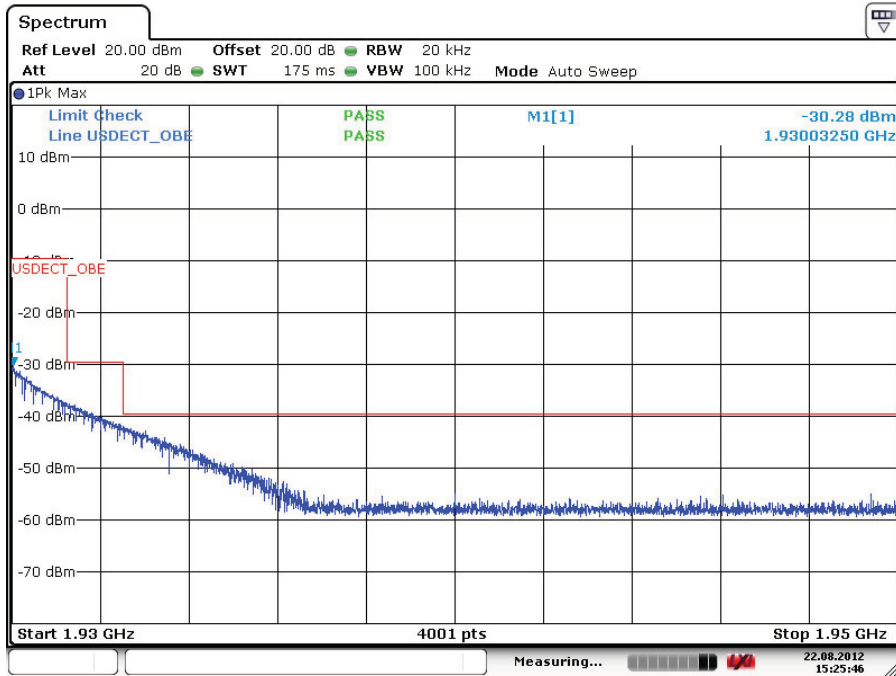



### Out-of-Band Unwanted Emissions, Conducted

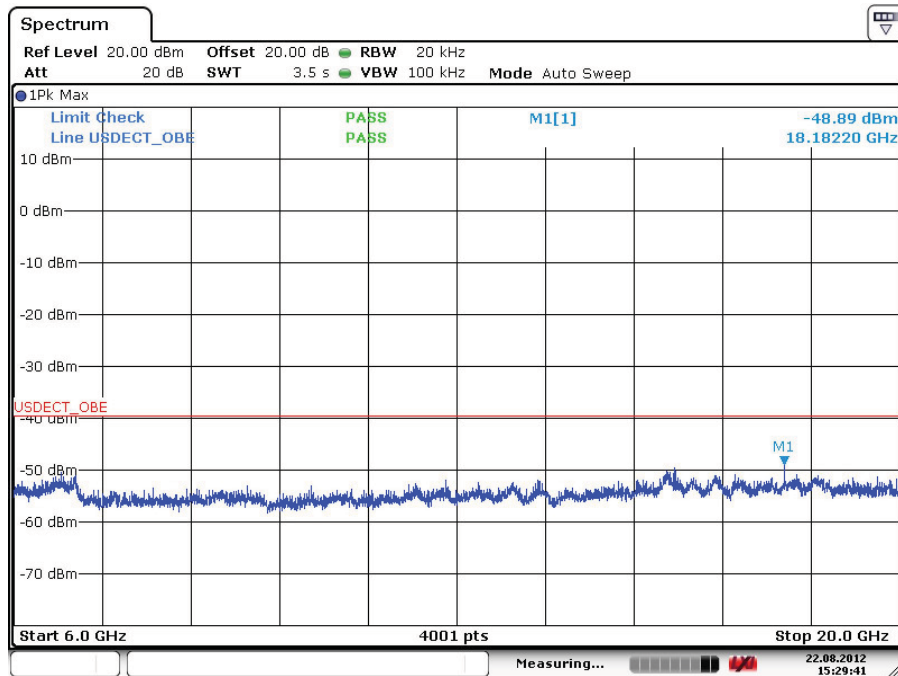

The BS spurious out-of-band transmission level is below the indicated limit.

### 9.13 Carrier Frequency Stability

**Measurement Procedure:**

ANSI C63.17, clause 6.2.1.

**Test Results: Pass**

**Measurement Data:**

The Frequency Stability is measured with the CMD65. The CMD65 was logged by a computer programmed to get the new readings as fast as possible (about 3 readings per second) over the noted time period or number of readings. The peak-to-peak difference was recorded and the mean value and deviation in ppm was calculated.

The Carrier Frequency Stability over power Supply Voltage and over Temperature is measured also with the CMD65.

**Carrier Frequency Stability over Time at Nominal Temperature**

Average Mean Carrier Frequency (MHz)	Max. Diff. (kHz)	Min. Diff. (kHz)	Max Dev. (ppm)	Limit (ppm)
1925.014262	23.98	19.83	1.26	±10

Deviation ppm = ((Max.Diff. – Mean.Diff.) / Mean Carrier Freq.) x 10<sup>6</sup>

Deviation (ppm) is calculated from 3000 readings with the CMD65.

**Carrier Frequency Stability over Power Supply at Nominal Temperature**

Voltage	Measured Carrier Frequency (MHz)	Difference (kHz)	Deviation (ppm)	Limit (ppm)
115 V AC	1924.993	Ref.	Ref.	±10
98 V AC	1924.993	0.0	0.0	
132 V AC	1924.993	0.0	0.0	

Deviation ppm = ((Mean – Measured frequency) / Mean) x 10<sup>6</sup>

**Carrier Frequency Stability over Temperature**

Temperature	Measured Carrier Frequency (MHz)	Difference (kHz)	Deviation (ppm)	Limit (ppm)
T = +20 °C	1924.993	Ref.	Ref.	±10
T = -20 °C	1924.992	-1.0	-0.5	
T = +50 °C	1924.993	+3.0	+1.6	

Deviation ppm = ((Mean – Measured frequency) / Mean) x 10<sup>6</sup>

## 9.14 Frame Repetition Stability

### Measurement Procedure:

ANSI C63.17, clause 6.2.2.

### Test Results: Pass

### Measurement Data:

The Frame Repetition Stability is measured with the CMD65. The Frame Repetition Stability is 3 times the standard deviation.

Carrier Frequency (MHz)	Mean (Hz)	Standard Deviation (ppm)	Frame Repetition Stability (ppm)
1924.992	100.0000009693	0.103	0.31

### Limit:

Frame Repetition Stability	±10 ppm (TDMA)
----------------------------	----------------

Ref. FCC 15.323(e). ANSI C63.17, clause 6.2.2.

## 9.15 Frame Period and Jitter

### Measurement Procedure:

ANSI C63.17, clause 6.2.3.

### Test Results: Pass

### Measurement Data:

The Frame Repetition Stability is measured with the CMD65


Carrier Frequency (MHz)	Frame Period (ms)	Max Jitter (µs)	3xStandard Deviation of Jitter (µs)
1924.992	10.000	-0.004	0.003

Max Jitter =  $(1/(\text{Frame Period} + \text{Pk-Pk})/2) - (1/\text{Frame Period})$ , when Pk-Pk and Frame Period are in Hz.  
 $3x\text{St.Dev.Jitter } 3x(1/(\text{Frame Period} + \text{St.Dev})) - (1/\text{St.Dev}) \times 10^6$


### Limit:

Frame Period	20 or 10 ms
Max Jitter	25 µs
3 times St.Dev. of Jitter	12.5 µs


Ref. FCC 15.323(e). ANSI C63.17, clause 6.2.3.

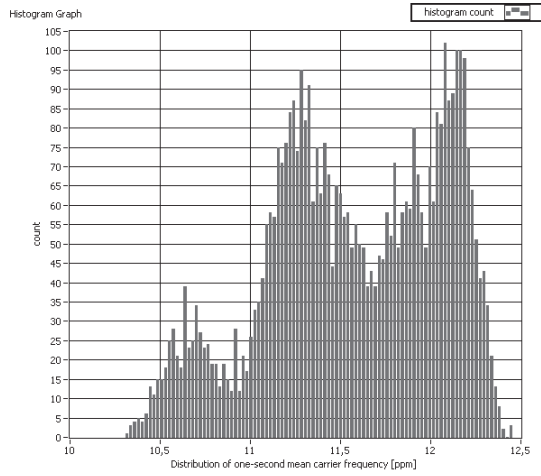

**Histogram of Carrier Frequency Stability**

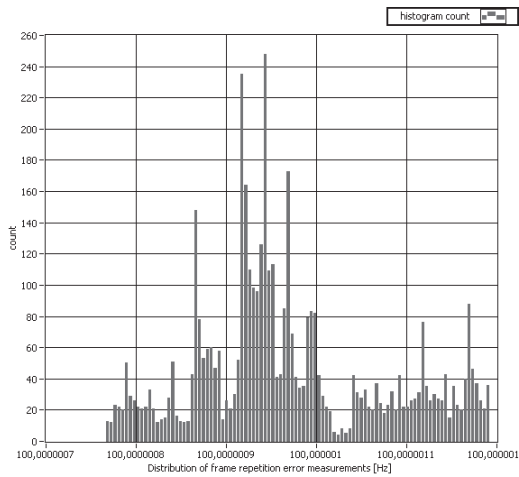

**Histogram of Frame Repetition Stability**

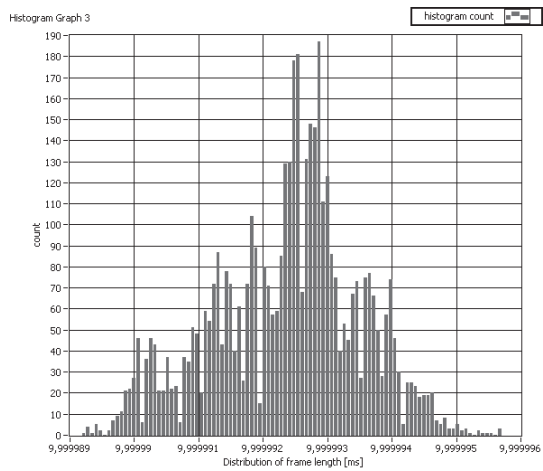

**Histogram of Frame Period and Jitter**

## 9.16 Monitoring Threshold, Least Interfered Channel

### Monitoring Threshold limits:

Lower Threshold:

$$T_L = 15 \log B - 184 + 30 - P_{EUT} \text{ (dBm)}$$

Upper Threshold:

$$T_U = 15 \log B - 184 + 50 - P_{EUT} \text{ (dBm)}$$

B is measured Emission Bandwidth in Hz

$P_{EUT}$  is measured Transmitter Power in dBm

### Calculated values:

Lower Threshold	-80.8 dBm
Upper Threshold	-60.8 dBm

The Lower Threshold is applicable for systems which have defined less than 40 duplex system access channels. The Upper Threshold is applicable for systems with more than 40 duplex systems access channels and that implements the Least Interfered Channel Procedure (LIC).

### Measurement Procedure:

The Upper Threshold is found by the procedure defined in ANSI C63.17 clause 7.3.1 or 7.3.2.

<b>Least Interfered Channel Procedure NOT used:</b>	
Lower Threshold	N/A
<b>Least Interfered Channel Procedure used:</b>	
Upper Threshold	-59.0 dBm

### Least Interfered Channel (LIC) Procedure Test, FCC 15.323(b), (c)(2) and (c)(5)


ANSI C63.17 clause 7.3.3 ref.	Observation	Verdict
b) $f_1 T_L + 13 \text{ dB}$ , $f_2 T_L + 6 \text{ dB}$	Transmission always on $f_2$	<b>Pass</b>
c) $f_1 T_L + 6 \text{ dB}$ , $f_2 T_L + 13 \text{ dB}$	Transmission always on $f_1$	<b>Pass</b>
d) $f_1 T_L + 7 \text{ dB}$ , $f_2 T_L$	Transmission always on $f_2$	<b>Pass</b>
e) $f_1 T_L$ , $f_2$ at $T_L + 7 \text{ dB}$	Transmission always on $f_1$	<b>Pass</b>

**Selected Channel Confirmation, FCC 15.323(c)(1) and (5)**

ANSI C63.17 clause 7.3.4 ref.	Observation	Verdict
b) Shall <b>not</b> transmit on $f_1$	EUT transmits on $f_2$	<b>Pass</b>
d) Shall <b>not</b> transmit on $f_2$	EUT transmits on $f_1$	<b>Pass</b>

**Limits:**

Lower Threshold + 6 dB margin	-74.8 dBm
Upper Threshold + 6 dB margin	-54.8 dBm

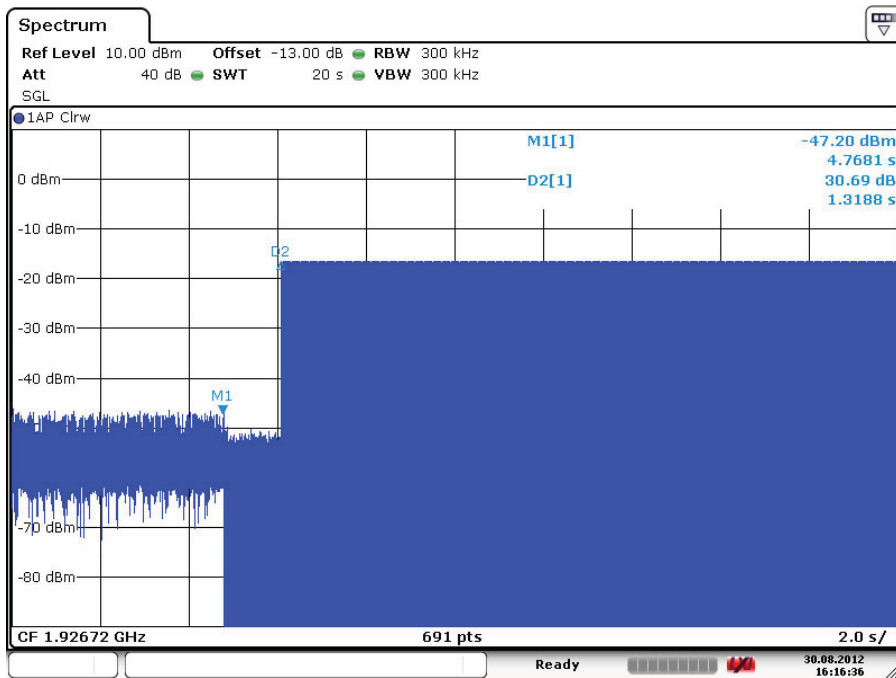

**7.3.4 Selected Channel Confirmation, connection 1.3 s after interferer removed**

## 9.17 Threshold Monitoring Bandwidth

This test is only required if a dedicated monitoring receiver is used. If the test is not carried out the manufacturer shall declare and provide evidence that the monitoring is made through the radio receiver used for communication.

### Measurement Procedure:

Simple Compliance Test, ANSI C63.17, clause 7.4.1

More Detailed Test, ANSI C63.17, clause 7.4.2

The test is passed if **either** the Simple Compliance Test or the More Detailed Test is passed.

During this test the spectrum analyzer is observed visually to see if the EUT transmits or not.

### Test Results:

Test performed	Observation	Verdict
Simple Compliance Test, at $\pm 30\%$ of B	No transmissions	<b>Pass</b>
More Detailed Test, at -6 dB points	N/A	<b>N/A</b>
More Detailed Test, at -12 dB points	N/A	<b>N/A</b>

The More Detailed Test must be pass at both the -6dB and -12 dB points if the Simple Compliance Test fails.

**Comment:** The Simple Compliance Test was performed with the level  $T_U + U_M + 10$  dB to check that the EUT did not transmit at all.

The tested EUT uses the same receiver for monitoring and communication, this test is therefore not required. However the test was performed nonetheless and the test is passed.

### Limits: FCC 15.323(c)(7):

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.

## 9.18 Reaction Time and Monitoring Interval

### Measurement Procedure:

ANSI C63.17, clause 7.5

### Test Results:

By administrative commands and out-of-operating region interference, the EUT is restricted to operate on a single carrier frequency.

Time-synchronized pulsed interference was then applied on the carrier at pulsed levels TU + UM to check that the EUT does not transmit. The level was raised 6 dB for part d) with 35  $\mu$ s pulses.

The pulses are synchronized with the EUT timeslots and applied centered within all timeslots.

Pulse Width, ref. to ANSI C63.17 clause 7.5	Observation	Verdict
c) > largest of 50 $\mu$ s and $50 \cdot \text{SQRT}(1.25/B)$	N/A	N/A
d) > largest of 35 $\mu$ s and $35 \cdot \text{SQRT}(1.25/B)$ and with interference level raised 6 dB	N/A	N/A

**Comment:** Since B is larger than 1.25 MHz, the test was performed with pulse lengths of 50  $\mu$ s and 35  $\mu$ s.

### Limits: FCC 15.323(c)(1), (5) and (7)

The maximum reaction time must be less than  $50 \cdot \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.

If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be  $35 \cdot \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds but shall not be required to be less than 35 microseconds.

Comment: This test is only applicable for EUTs that can be an initiating device.



## 9.19 Time and Spectrum Window Access Procedure

This requirement is only for EUTs which transmit unacknowledged control and signaling information

### Measurement Procedure:

Timing for EUTs using control and signaling channel type transmissions: ANSI C63.17, clause 8.1

Test results:

Access Criteria, ref. to ANSI C63.17 clause 8.1.1	Observation	Verdict
b) Check that the EUT transmits on the interference free time slot	EUT transmits on the Interference free time slot	<b>PASS</b>
b) The EUT must terminate or pause in its repetitive transmission of the control and signaling channel on the open channel to repeat the access criteria not less frequently than every 30 s	Transmission stops every 1.6 s	<b>PASS</b>

If FCC 15.323(c)(6) option Random Waiting Interval is NOT implemented

Access Criteria, ref. to ANSI C63.17 clause 8.1.2	Observation	Verdict
b) Check that the EUT changes to interference free time slot when interference is introduced on the time slot in use	EUT changes to Interference free time slot, and stays there	<b>PASS</b>

If FCC 15.323(c)(6) option Random Waiting Interval is implemented

Access Criteria, ref. to ANSI C63.17 clause 8.1.3	Observation	Verdict
b-d) Check that the EUT uses random waiting interval before continuing transmission on an interfered time slot	N/A	<b>N/A</b>

Comment: The tested EUT does not support the Random Waiting Interval option.

### Limits:


#### FCC 15.323(c)(4):

Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which the time access criteria must be repeated.


#### FCC 15.323(c)(6):

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

### Access Criteria Check

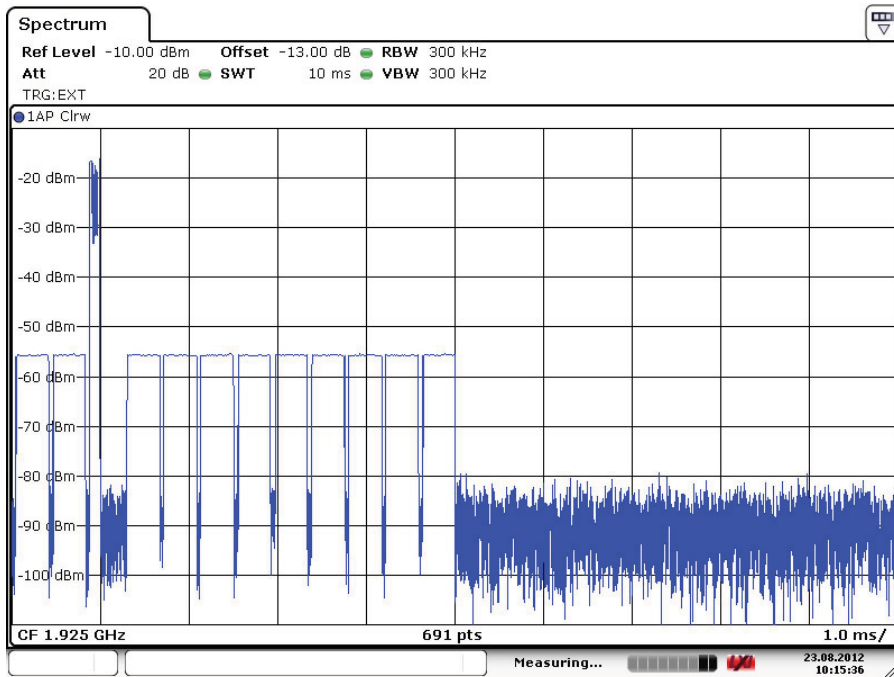


#### 8.1.1b) EUT Transmits on Unblocked Slot

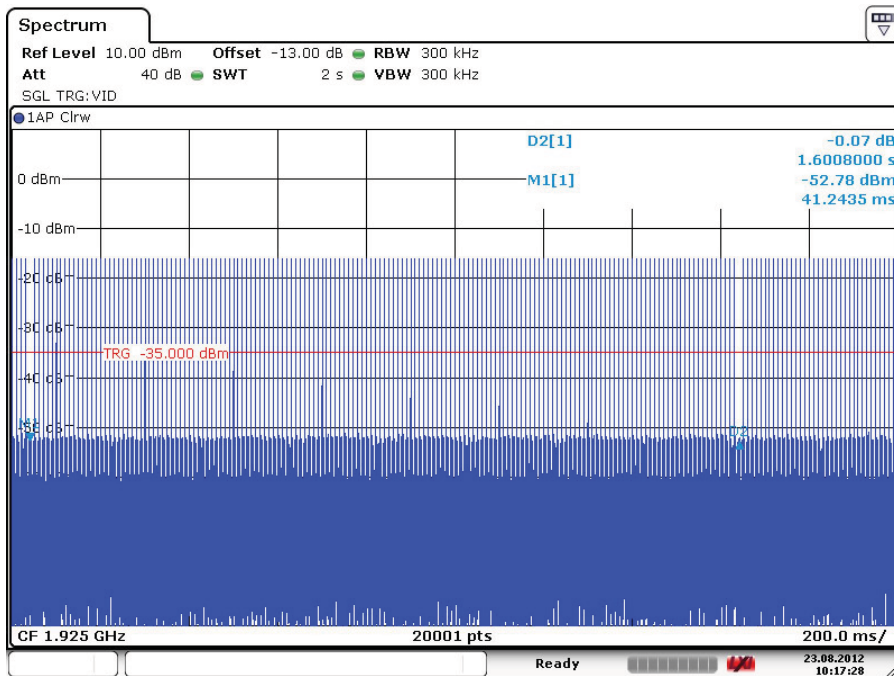


#### 8.1.1b) EUT Terminates Repetitive Transmission

Capture of demodulated transmission of base EUT control and signaling transmissions. The base EUT pauses in its transmission of the control and signaling channel to repeat the access criteria every 1.6 seconds, meeting the requirement that it do so at least as often as every 30 seconds.

### Access Criteria Check

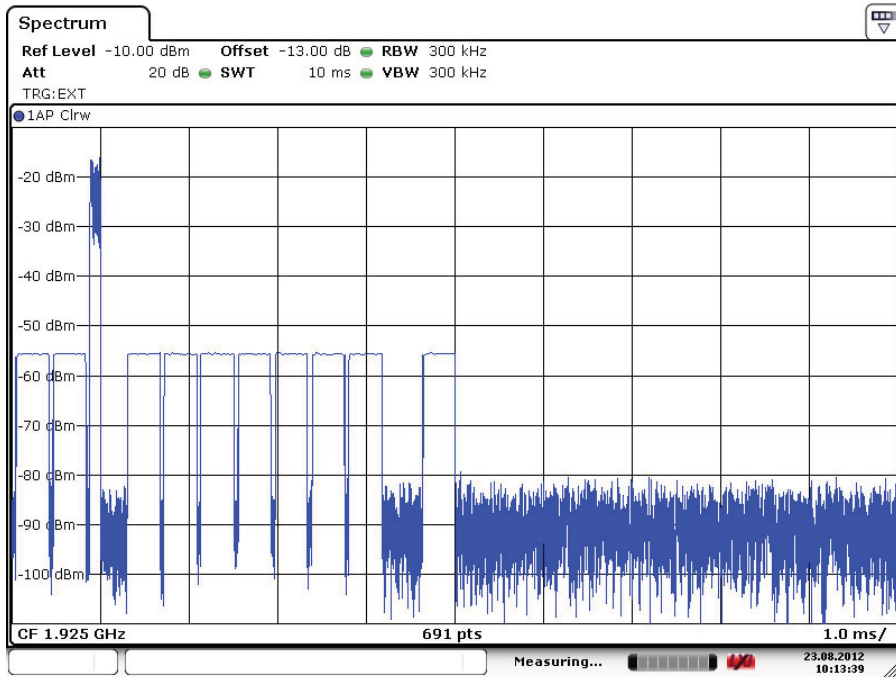

### 8.1.2) EUT Changes to an Interference Free Timeslot, Before

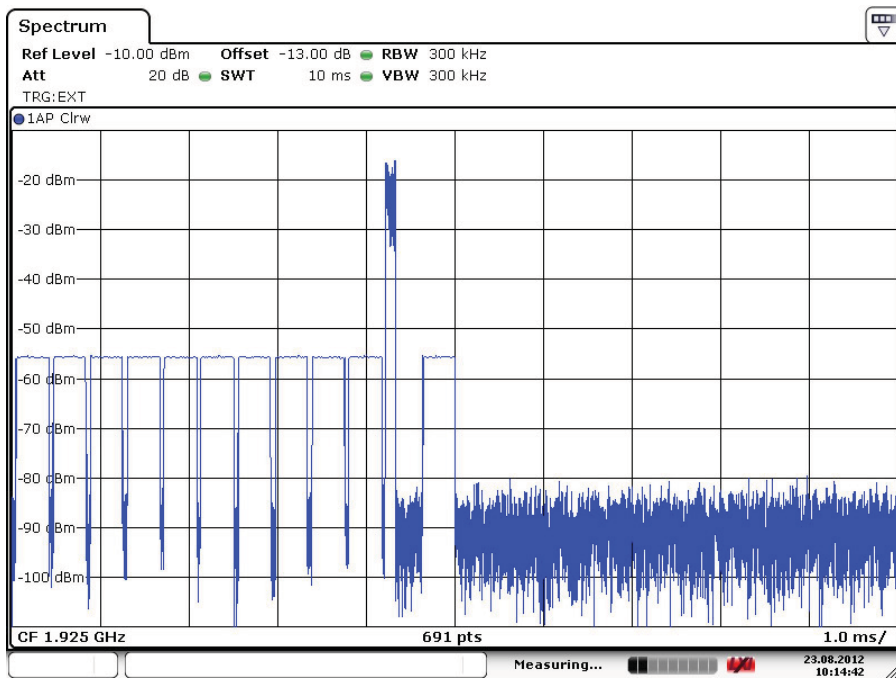

### 8.1.2) EUT Changes to an Interference Free Timeslot, After

## 9.20 Acknowledgments and Transmission duration

### Measurement Procedure:

Acknowledgments: ANSI C63.17, clause 8.2.1

Transmission Duration: ANSI C63.17, clause 8.2.2

During the test **Initial transmission without acknowledgments** the signal from the EUT to the companion device is blocked by circulators in addition to the tunable attenuator.

The test **Transmission time after loss of acknowledgments** is performed by cutting-off the signal from the companion device by a RF switch the time until the EUT stops transmitting.

The **Transmission Duration** test is performed by monitoring the slot in use and measuring the time until the EUT changes to a different slot.

### Test Results:

#### Acknowledgments

Test ref. to ANSI C63.17 clause 8.2.1	Observation	Verdict
a) Initial transmission without acknowledgments	Only for initiating device	N/A
c) Transmission time after loss of acknowledgments	5 s	Pass

#### Transmission Duration

Test ref. to ANSI C63.17 clause 8.2.2	Observation	Verdict
b) Transmission duration on same time and frequency window	Only for initiating device that controls which time slot is used	N/A

Comment: /

#### Limits: FCC 15.323(c)(3) and (4)

Occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which the time access criteria must be repeated.

## 9.21 Dual Access Criteria Check

### Measurement Procedure:

EUTs that do not implement the Upper Threshold: ANSI C62.17, clause 8.3.1

EUTs that implement the Upper Threshold: ANSI C62.17, clause 8.3.2

This test is required for equipment that uses the access criteria in FCC 15.323(c)(10).

### Test Results:

#### EUTs that do NOT implement the Upper Threshold:

Test ref. to ANSI C63.17 clause 8.3.1	Observation	Verdict
b) EUT is restricted to a single carrier $f_i$ for TDMA systems. The test is pass if the EUT can set up a communication link.	N/A	<b>N/A</b>
c) d) No transmission on interference-free <b>receive</b> time/spectrum window. All transmit slots blocked	N/A	<b>N/A</b>
e) f) No transmission on interference-free <b>transmit</b> time/spectrum window. All transmit slots blocked	N/A	<b>N/A</b>

#### EUTs that implement the Upper Threshold:

Test ref. to ANSI C63.17 clause 8.3.2	Observation	Verdict
b) EUT is restricted to a single carrier $f_i$ for TDMA systems. The test is pass if the EUT can set up a communication link.	N/A	<b>N/A</b>
c) d) Transmission on interference-free <b>receive</b> time/spectrum window.	N/A	<b>N/A</b>
e) f) Transmission on interference-free <b>transmit</b> time/spectrum window.	N/A	<b>N/A</b>
g) Transmission not possible on any time/spectrum window.	N/A	<b>N/A</b>

Comment: This test is only applicable for EUTs that can be an initiating device.

### Limits: FCC 15.323(c)(10)

An initiating device may attempt to establish a duplex connection by monitoring both, its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

## 9.22 Alternative monitoring interval

Test procedure described in ANSI C63.17, clause 8.4.

This test is required if the EUT implements the provision of FCC 15.323(c)(11).

### Test Result:

Not tested. The tested EUT does not implement this provision. See manufacturer's declaration.

## 9.23 Spurious Emissions (Radiated)

### Measurement Procedure:

FCC 15.209, FCC 15.109

### Test Result:

Tests for intentional radiators according to FCC 15.209 are not required when Out-of-Band Emission was tested conducted with a pass result.

### Measurement Data:

See plots.

### Requirement: FCC 15.109(b)


### Common Information

EUT: 4 channel unit  
 Serial Number:  
 Test Description: FCC part 15 C class B @ 10 m  
 Operating Conditions: POE + iperf 80MBit/s  
 Operator Name: Wolsdorfer  
 Comment: POE; Ethernetcable shielded

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

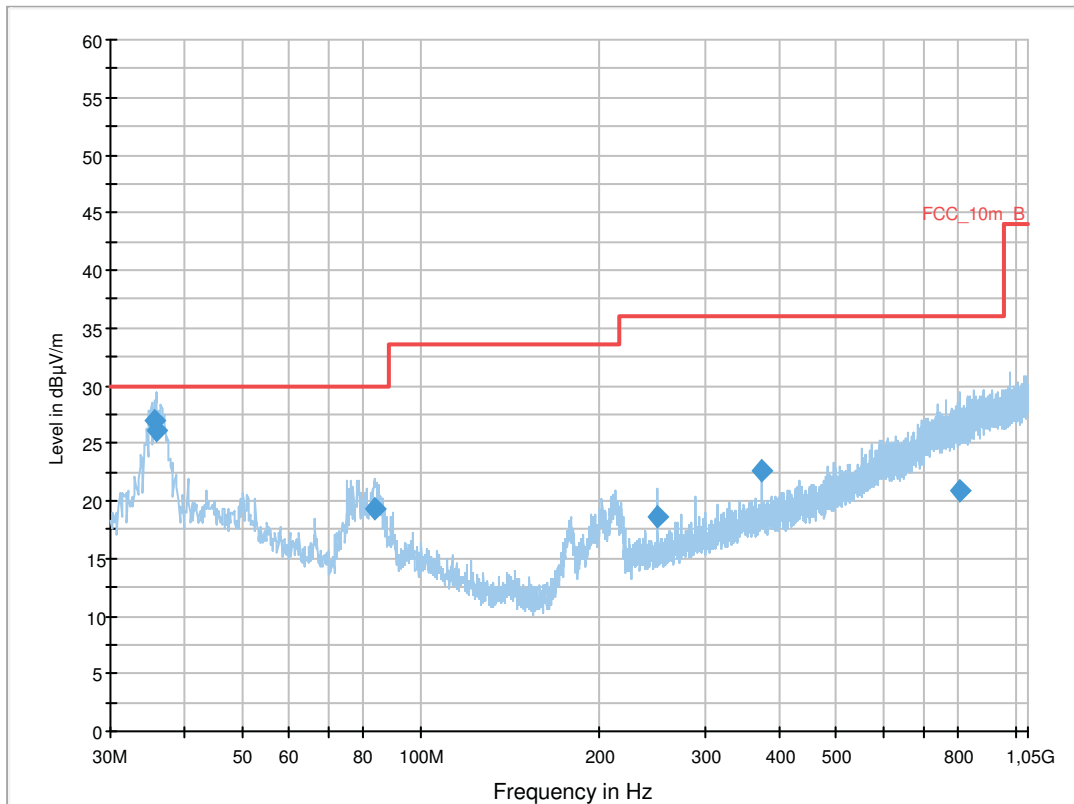

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.520600	27.0	1000.0	120.000	100.0	V	249.0	13.1	3.0	30.0	
35.936550	26.1	1000.0	120.000	100.0	V	24.0	13.1	3.9	30.0	
83.759700	19.3	1000.0	120.000	300.0	V	305.0	9.6	10.7	30.0	
250.017900	18.7	1000.0	120.000	100.0	V	196.0	13.3	17.3	36.0	
375.001350	22.6	1000.0	120.000	281.0	H	237.0	16.5	13.4	36.0	
803.833200	20.8	1000.0	120.000	100.0	V	275.0	23.9	15.2	36.0	


### Common Information

EUT: 4 channel unit  
 Serial Number: prototype  
 Test Description: FCC part 15 class B  
 Operating Conditions: active  
 Operator Name: Wolsdorfer  
 Comment: POE

### Scan Setup: C\_FIN [EMI radiated]

Hardware Setup: C\_MATRIX  
 Receiver: [ESU 26]  
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
1 GHz - 4 GHz	400 kHz	AVG	1 MHz	0,1 s	0 dB
4 GHz - 12,5 GHz	1 MHz	AVG	1 MHz	0,1 s	0 dB

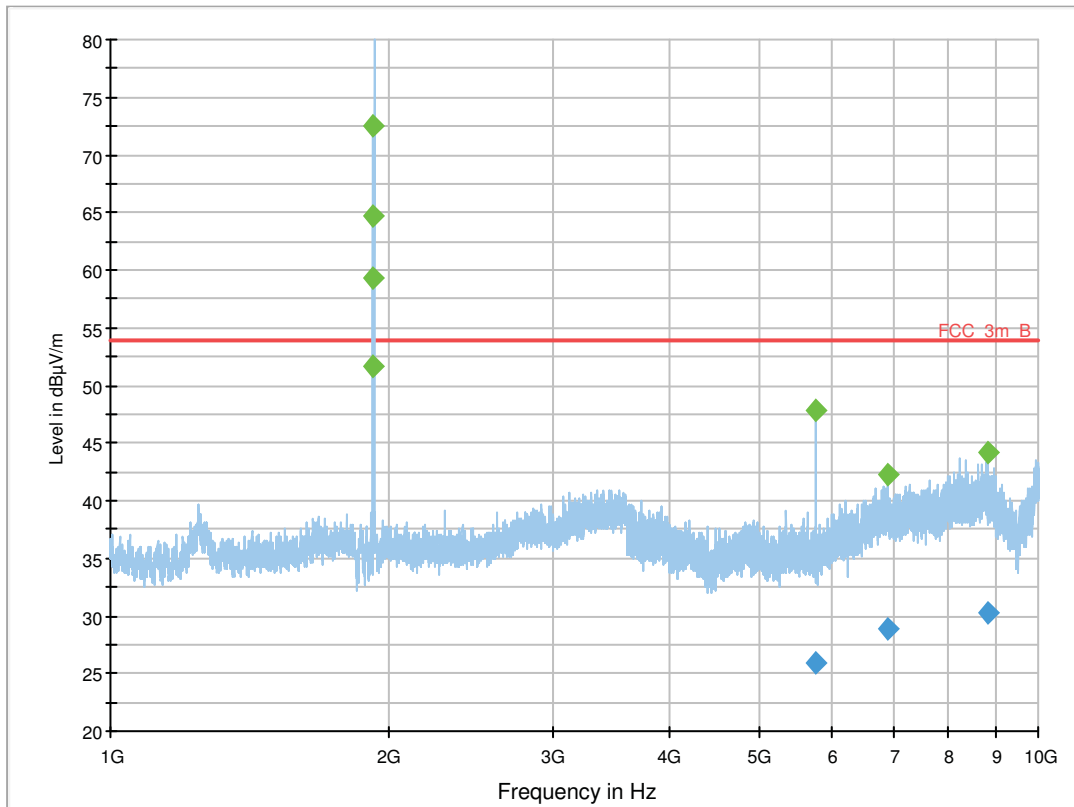



### Final Result 1 (max peak)

Frequency (MHz)	MaxPeak-MaxHold (dB $\mu$ V/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
1917.700000	51.6	100.0	H	45.0	-2.5	
1918.900000	59.3	100.0	H	270.0	-2.5	
1921.000000	64.7	100.0	H	180.0	-2.5	
1921.900000	72.6	100.0	H	180.0	-2.5	
1923.700000	80.1	100.0	V	90.0	-2.5	
5770.000000	47.8	100.0	V	315.0	2.4	
6877.600000	42.2	100.0	H	135.0	5.7	
8847.400000	44.1	100.0	H	315.0	7.2	

### Final Result 2 (average)

Frequency (MHz)	Average (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)	Comment
5768.875000	25.9	100.0	1000.000	100.0	V	305.0	2.4	28.1	54.0	
6872.823000	28.9	100.0	1000.000	100.0	H	137.0	5.7	25.1	54.0	
8847.898000	30.3	100.0	1000.000	100.0	H	315.0	7.2	23.7	54.0	

The radiated spurious emission of the unintentional radiator is below the indicated limit.

## 9.24 Receiver Spurious Emissions

### Measurement Procedure:

Industry Canada RSS-213 paragraph 6.8 and RSS-GEN paragraphs 4.8 and 6.

### Test results:


Frequency MHz	Carrier No.	Measured Value Conducted dBm	Conducted Limit dBm	Margin dB
30 - 1000	all	-68.6	-57	11.6
> 1000	all	-61.7	-53	8.7

### Requirements: RSS-GEN Issue 2, clause 6


The measurement can be performed either radiated or conducted.

**When measured conducted:** No spurious signals appearing at the antenna terminals shall exceed 2 nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nW above 1 GHz.


**When measured radiated:** See table 1 in RSS-GEN Issue2, clause 6.

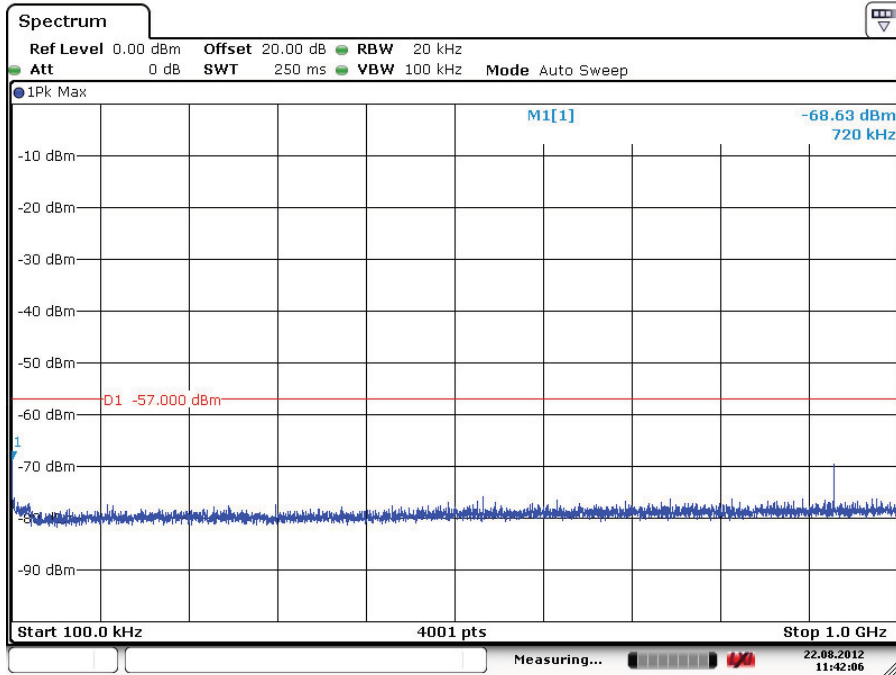

**Receiver Spurious Emissions, Conducted, 100 kHz – 1 GHz**

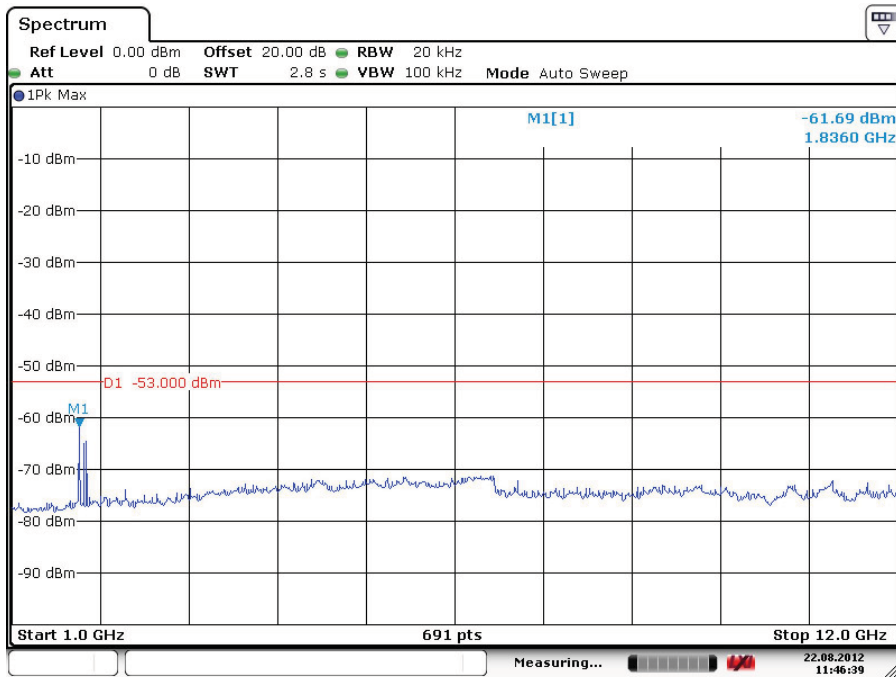

**Receiver Spurious Emissions, Conducted, 1 GHz – 12 GHz**

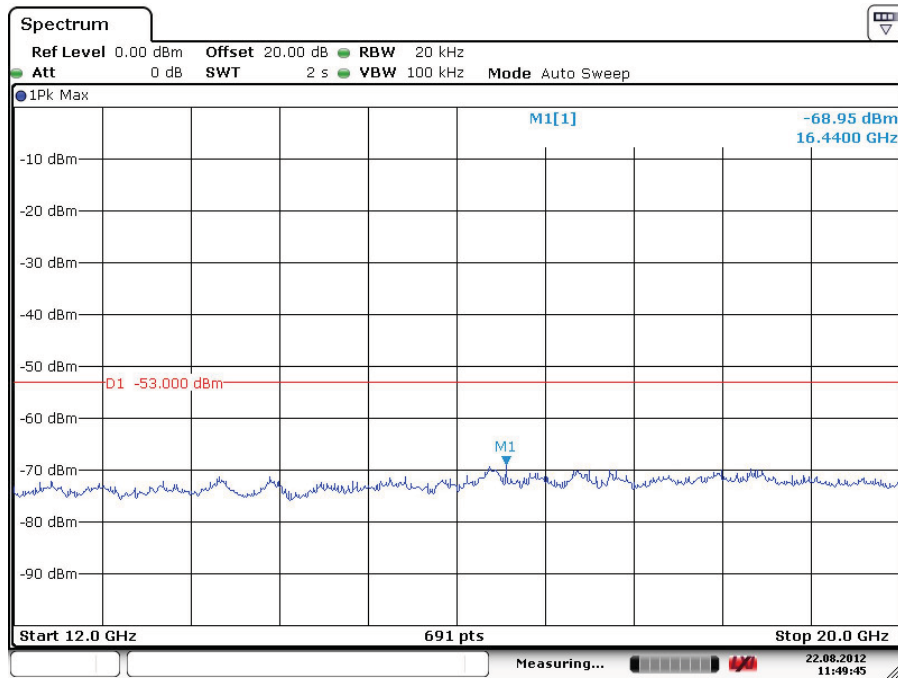

**Receiver Spurious Emissions, Conducted, 12 GHz – 20 GHz**

## 10 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

No.	Instrument/Ancillary	Manufacturer	Type	Serial-No.	Internal identification
<b><u>Radiated Emission</u></b>					
F-1	Control Computer	F+W		FW0502032	300003303
F-2	Trilog antenna	Schwarzbeck	VULB 9163	9163-295	- / -
F-3a	Amplifier	Veritech Microwave Inc.	0518C-138	- / -	- / -
F-4b	Switch	HP	3488A	- / -	300000368
F-5	EMI Test receiver	R&S	ESCI	100083	300003312
F-6	Turntable Controller	EMCO	1061 3M	1218	300000661
F-7	Tower Controller	EMCO	1051 Controller	1262	300000625
F-8	Tower	EMCO	1051 Tower	1262	300000625
F-9	EMI Test receiver	R&S	ESU	- / -	300003555
<b><u>Power Line Conducted Emission</u></b>					
G-1	EMI Receiver	Hewlett Packard	8542 E	3617A0017 0	300000568
G-2	V-ISN	Rohde & Schwarz	ESH 3-Z5	892475/017	300002209
G-2a	V-ISN	Rohde & Schwarz	ESH 2-Z5	892602/024	300000587
G-3	2-Wire ISN	Schaffner	ISN T200	19075	300003422
G-4	4-Wire ISN	Schaffner	ISN T400	22325	300003423
G-5	Shielded wire ISN	Schaffner	ISN ST08	22583	300003433
G-6	Unshielded 8 wire ISN	Teseq	ISN T800	26113	300003833
G-7	Unshielded 8 wire ISN	Teseq	ISN T8-Cat. 6	26374	300003851
G-8	RF Current probe	FCC	F-33-4	46	300003257
G-9	V-ISN	Schaffner	ISN PLC-150	21579	300003318
G-10	V-ISN	Schaffner	ISN PLC-25-30	21584	300003319
G 10a	PLC Filter	TESEQ	Filter PLC	23436	300003598
G 10b	Coupling unit 75 Ohm	Fiedler	AC	- / -	300003272.0 4
<b><u>Conducted</u></b>					
L-1	Spectrum Analyzer	R&S	FSV30	100763	300003950
L-2	Signal Generator	R&S	SMU200A	101633	300003496
L-3	Oscilloscope	Tektronix	DPO 7254	B022702	300003573
L-4	Signaling Unit	R&S	CMD 65	847527/005	300003611
L-5	Combiner	R&S	1025.3400.02	- / -	- / -
L-6	Combiner	Suhner	4901.19A	- / -	- / -
L-7	Combiner	Weinschel	1515	KW438	- / -
L-8	Detector	Hewlett Packard	HP 8473C	03690	- / -
L-9	Attenuator	Narda	4779-50	9101	- / -
L-10	Attenuator	Narda	4779-30	9305	- / -
L-11	Attenuator	Narda	4779-20	9310	- / -
L-12	Control PC	F+W	- / -	FW0712052	300003735

## 11 Observations

No observations exceeding those reported with the single test cases have been made.

**Annex A: Photographs of the Test Set-up**

**Photo 1: Power Line Conducted Emission Test**

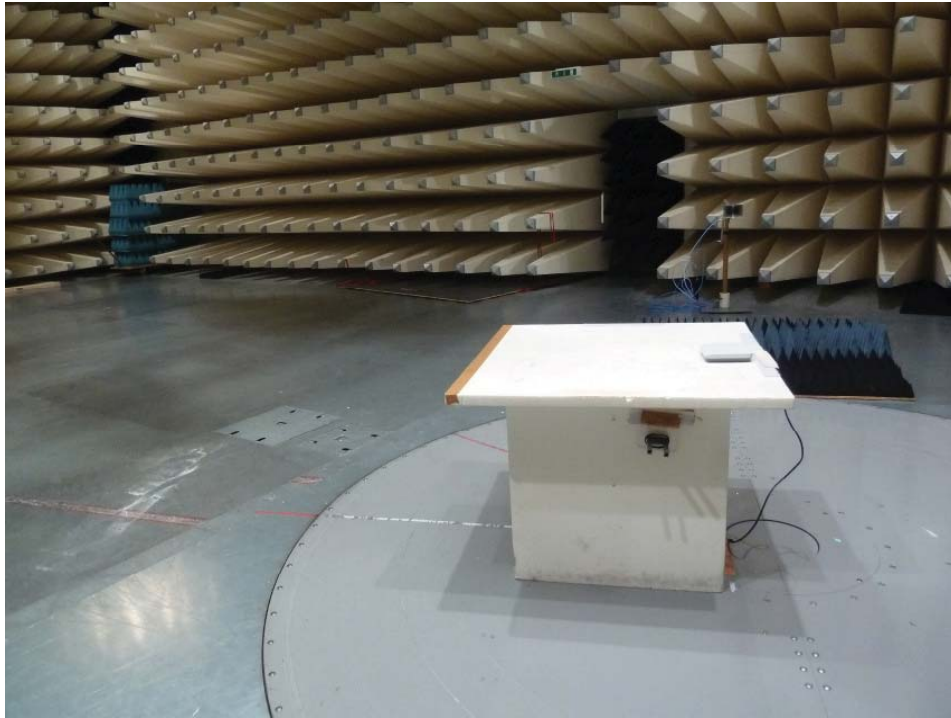


**Photo 2: Power Line Conducted Emission Test**





**Photo 3: Radiated Emission**



**Photo 4: Radiated Emission**





**Annex B: External Photographs of the EUT**

**Photo 1:**

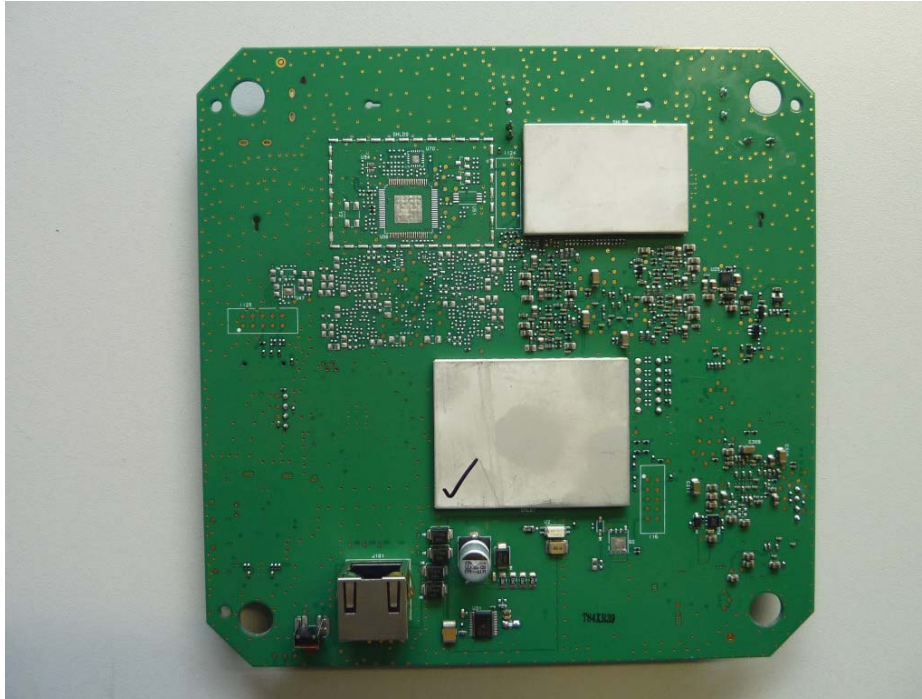


**Photo 2:**



**Annex C: Internal Photographs of the EUT**

**Photo 1:**



**Photo 2:**

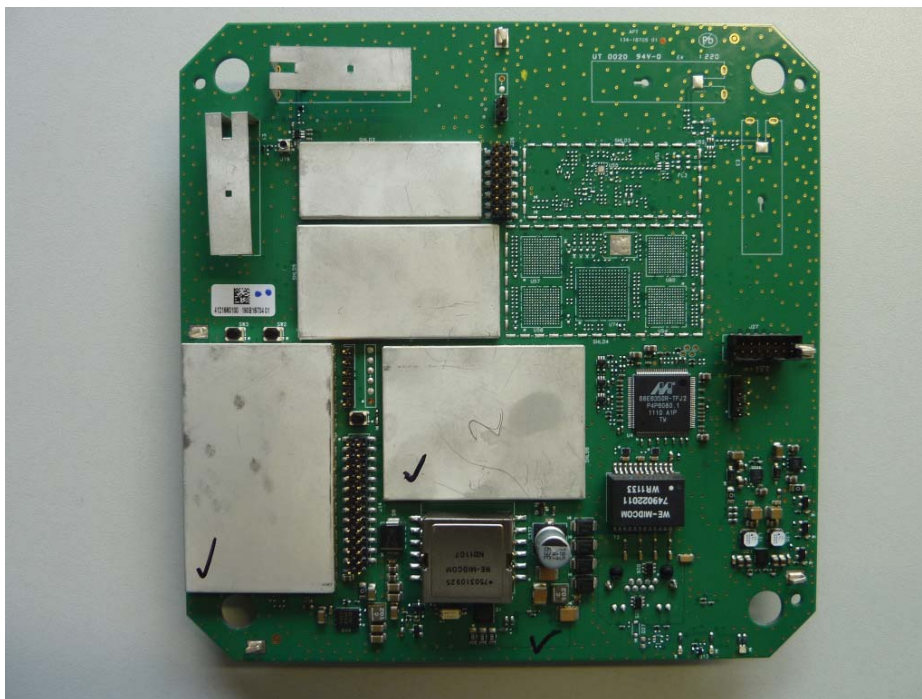


Photo 3:


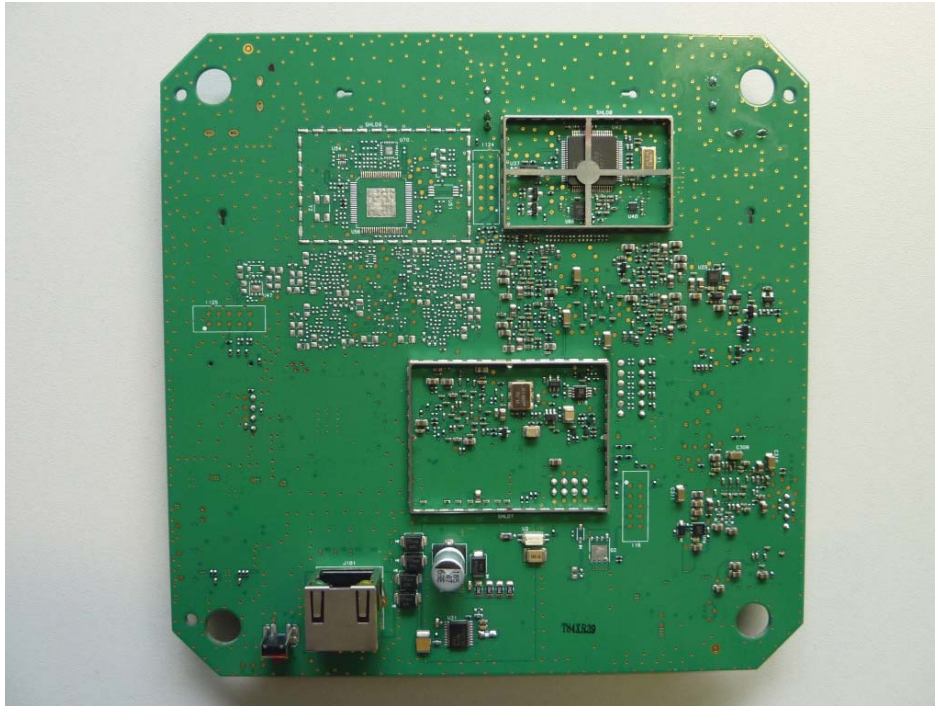


Photo 4:



## Annex D: Document History

Version	Applied Changes	Date of Release
	Initial Release	2012-09-05

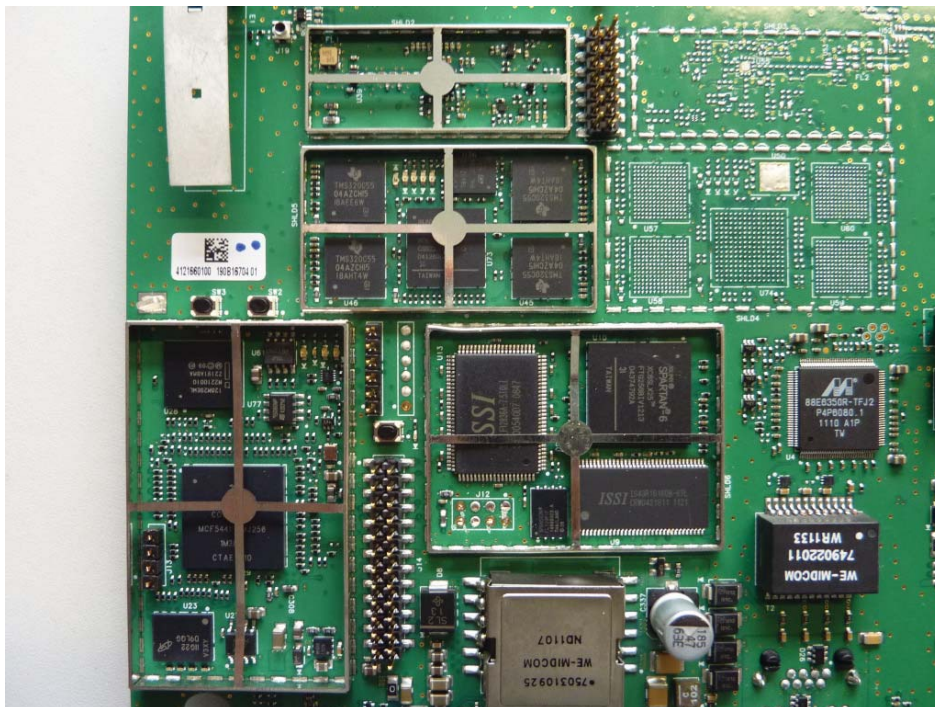

## Annex E: Further Information

### Glossary

DUT	-	Device under Test
EMC	-	Electromagnetic Compatibility
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	not applicable
S/N	-	Serial Number
SW	-	Software

## Annex F: Safety exposure levels

### Prediction of MPE limit at a given distance:

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

where: S = Power density  
 P = Power input to the antenna  
 G = Antenna gain  
 R = Distance to the center of radiation of the antenna

The table below is excerpted from Table 1B of 47 CFR 1.1310 titled "Limits for Maximum Permissible Exposure (MPE), Limits for General Population/Uncontrolled Exposure"

Frequency Range (MHz)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
300 - 1500	f/1500	30
1500 - 100000	1.0	30

where f = Frequency (MHz)

#### Prediction:

P	Max power input to the antenna:	19.22 dBm
P	Max power input to the antenna:	83.6 mW
R	Distance:	20 cm
G	Maximum antenna gain:	3.00 dBi
G	Maximum antenna gain:	2.0 numeric
S	MPE limit for uncontrolled exposure:	1 mW/cm <sup>2</sup>

Calculated Power density:	<b>0.0333 mW/cm<sup>2</sup></b> <b>0.333 W/m<sup>2</sup></b>
---------------------------	---

### This prediction demonstrates the following:

The power density levels at a distance of 20 cm are below the maximum levels allowed by FCC regulations

**Annex G: Accreditation Certificate**



Front side of the certificate



Back side of the certificate

**Note: The current certificate including annex is published on our website (link see below) or may be received from CETECOM ICT Services on request**

[http://www.cetecom.com/fileadmin/de/CETECOM\\_D\\_Saarbruecken/accreditations\\_Jan\\_2010/DAKKS\\_Akkredi\\_Urk\\_EN17025-En\\_incl\\_Annex.pdf](http://www.cetecom.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKS_Akkredi_Urk_EN17025-En_incl_Annex.pdf)