


ELITE ELECTRONIC ENGINEERING INC.



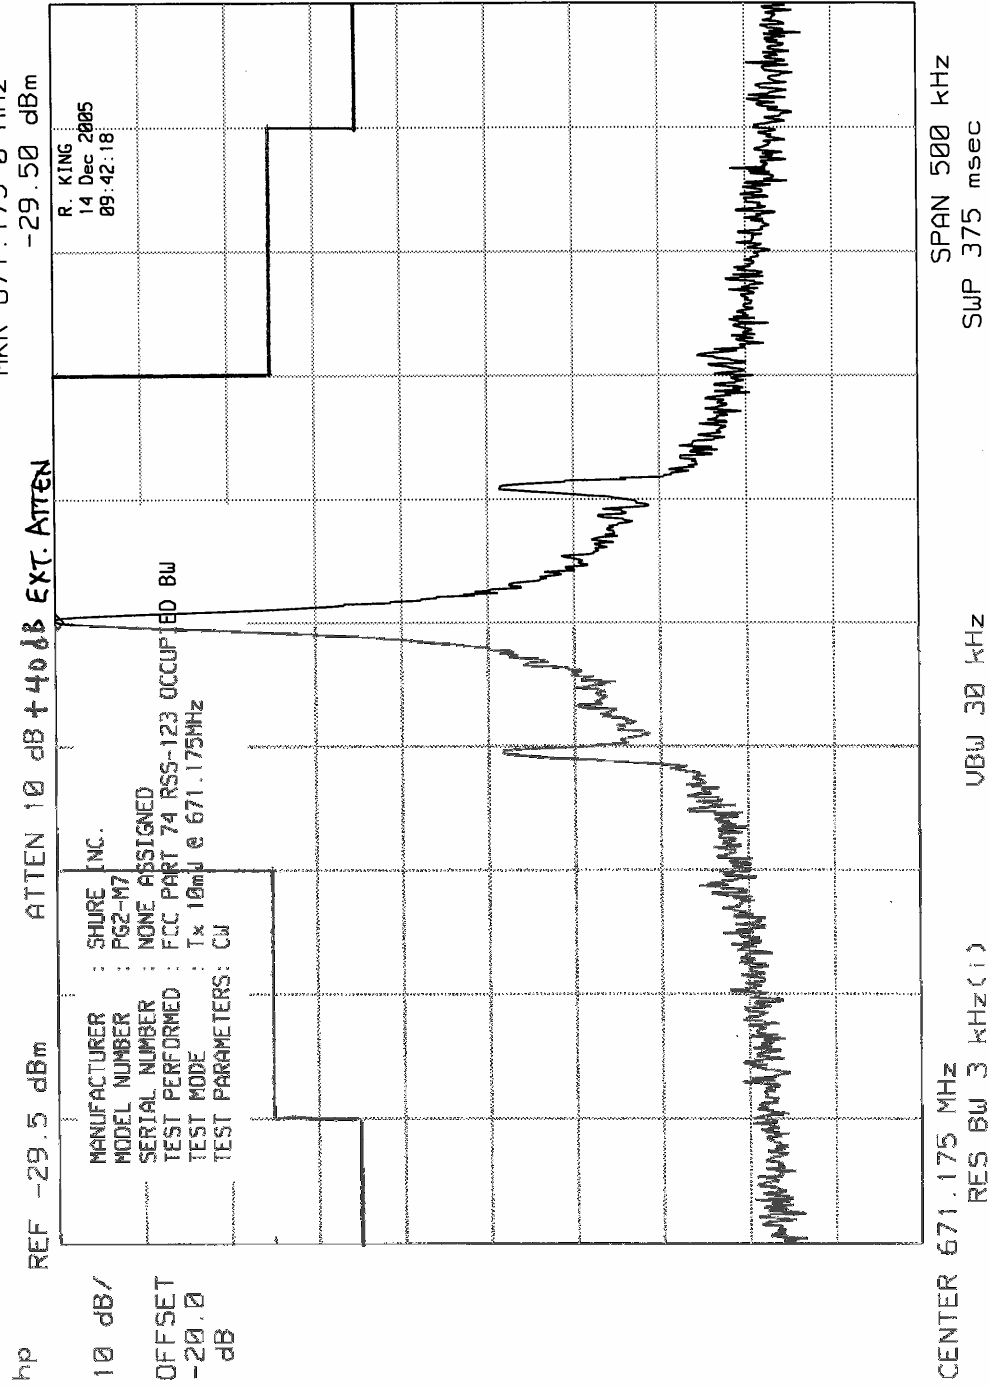

ELITE ELECTRONIC ENGINEERING Inc.

MR 671.175 0 MHz
-39.10 dBm

REF -29.5 dBm

10 dB/

10 dB/

OFFSET

-20.0

dB

ATTEN 10 dB + 40dB Ext. Atten

MANUFACTURER : SHURE INC.


MODEL NUMBER : PG2-M7

SERIAL NUMBER : NONE ASSIGNED

TEST PERFORMED : FCC PART 74 RSS-123 ACQUIRED BW

TEST MODE : Y 10m @ 571.175MHz

TEST PARAMETERS : 13kHz 0.5%

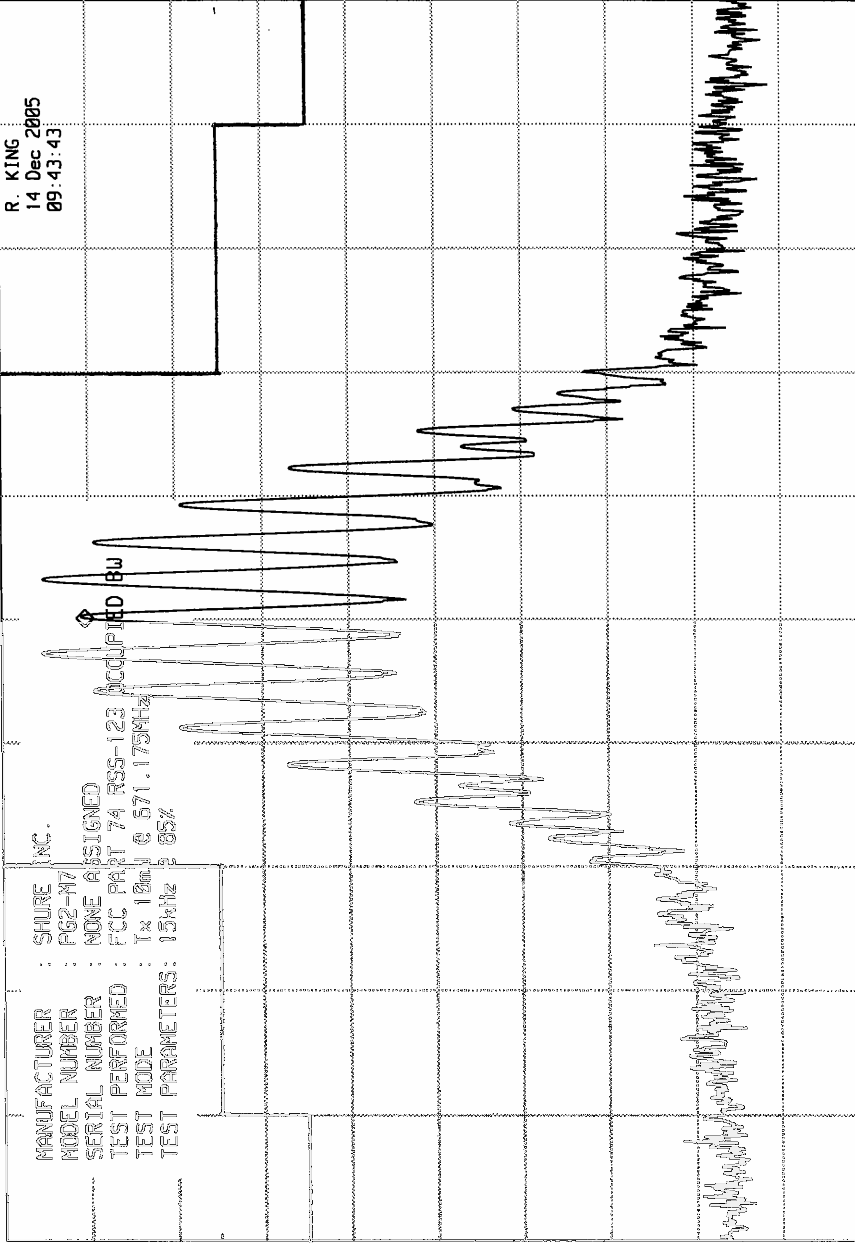

R. KING
14 Dec 2005
09:43:43

CENTER 671.175 MHz

RFS BW 3 kHz(1)

VBW 30 kHz

SPAN 500 kHz

SWP 375 msec


ELITE ELECTRONIC ENGINEERING INC.

MR 671.196 0 MHz
-36.90 dBm

REF -29.5 dBm

10 dB/
OFFSET
-20.0
dB

ATTEN 10 dB + 40dB Ext. Atten

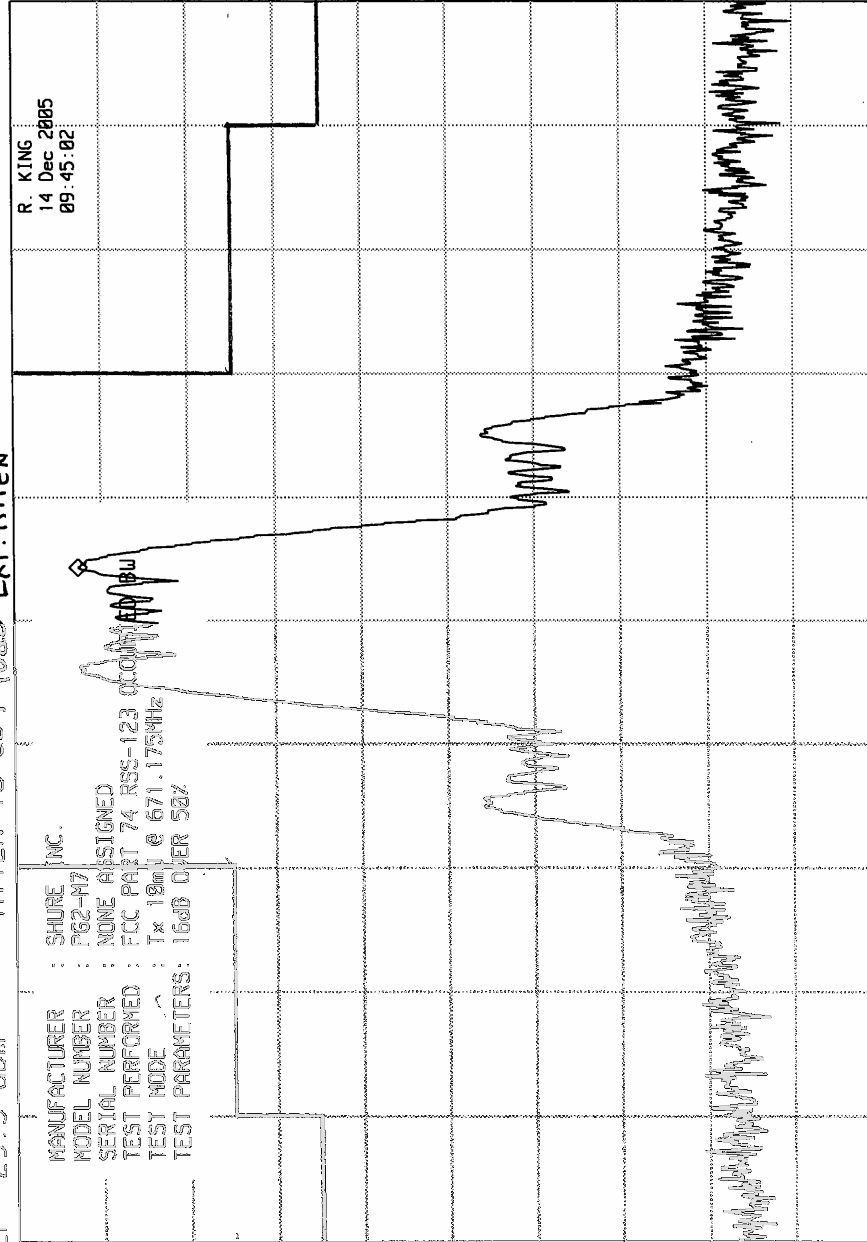

CENTER 671.175 MHz
RES BW 3 kHz (1)

UBW 30 kHz

SPAN 500 kHz
SWP 375 msec



ELITE ELECTRONIC ENGINEERING INC.

MR 805.850 5 MHz
-31.10 dBm

hp

REF -31.0 dBm

ATTEN 10 dB +40dB EXT. ATTN


10 dB/

OFFSET

-20.0

dB

MANUFACTURER : SHURE INC.
MODEL NUMBER : PG2-R12
SERIAL NUMBER : NONE ASSIGNED
TEST PERFORMED : FCC PART 74 RSS-123 OCCUPIED BW
TEST MODE : Tx 10mW @ 805.85MHz
TEST PARAMETERS: CW

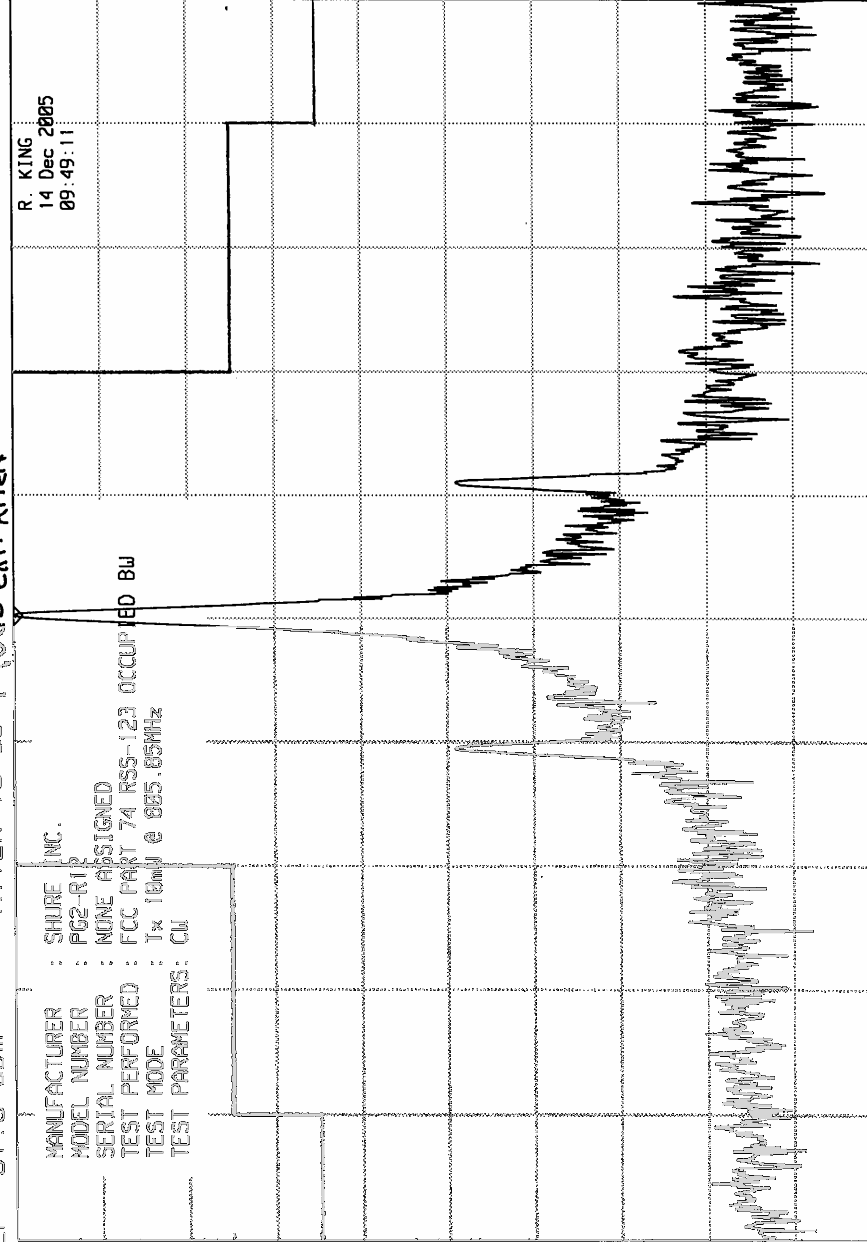

CENTER 805.850 MHz
RES BW 3 kHz(1)

VBW 30 kHz

SPAN 500 kHz
SWP 375 msec



ELITE ELECTRONIC ENGINEERING Inc.

MR 805.850 5 MHz
-42.00 dBm

hp


REF -31.0 dBm

ATTEN 10 dB + 40dB EXT. ATTN

10 dB/

OFFSET
-20.0
dB

MANUFACTURER : SHURE INC.
MODEL NUMBER : PG2-R1P
SERIAL NUMBER : NONE ASSIGNED
TEST PERFORMED : FCC PART 74, RSS-123 OCCUPIED BW
TEST MODE : Tx 10m @ 805.85MHz
TEST PARAMETERS: 15kHz @ 85%

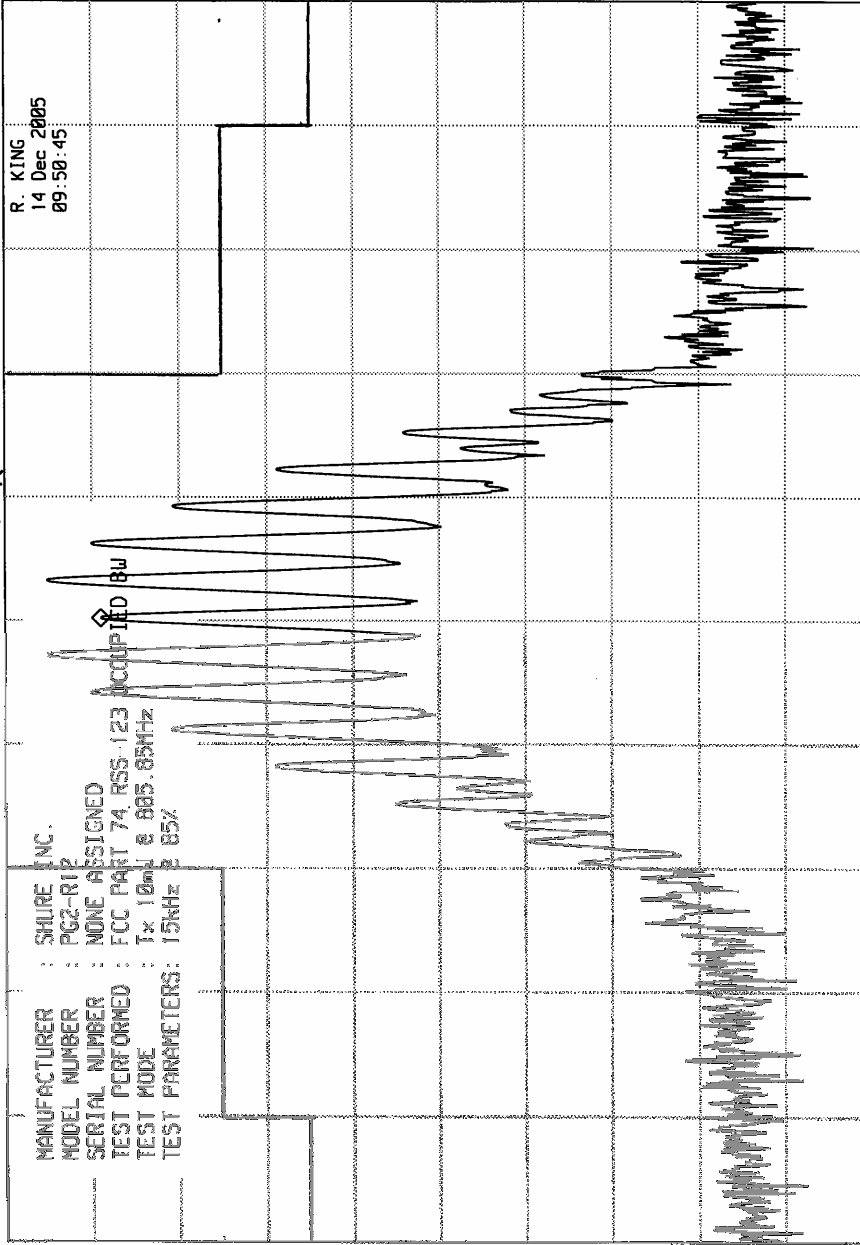

R. KING
14 Dec 2005
09:50:45

CENTER 805.850 MHz

RES BW 3 kHz(1)

VBW 30 kHz

SPAN 500 kHz
SWP 375 msec




ELITE ELECTRONIC ENGINEERING Inc.

MKR 805.850 5 MHz
-43.10 dBm


HP REF -31.0 dBm ATTN 10 dB $\rightarrow$ 40 dB EXT. ATTN


10 dB/
OFFSET
-20.0
dB


MANUFACTURER : SHURE INC.
MODEL NUMBER : PG2-R12
SERIAL NUMBER : NONE ASSIGNED
TEST PERFORMED : FCC PART 74 RSS-12.3
TEST MODE : Tx 16W @ 805.85MHz
TEST PARAMETERS: 16dB OVER 50%

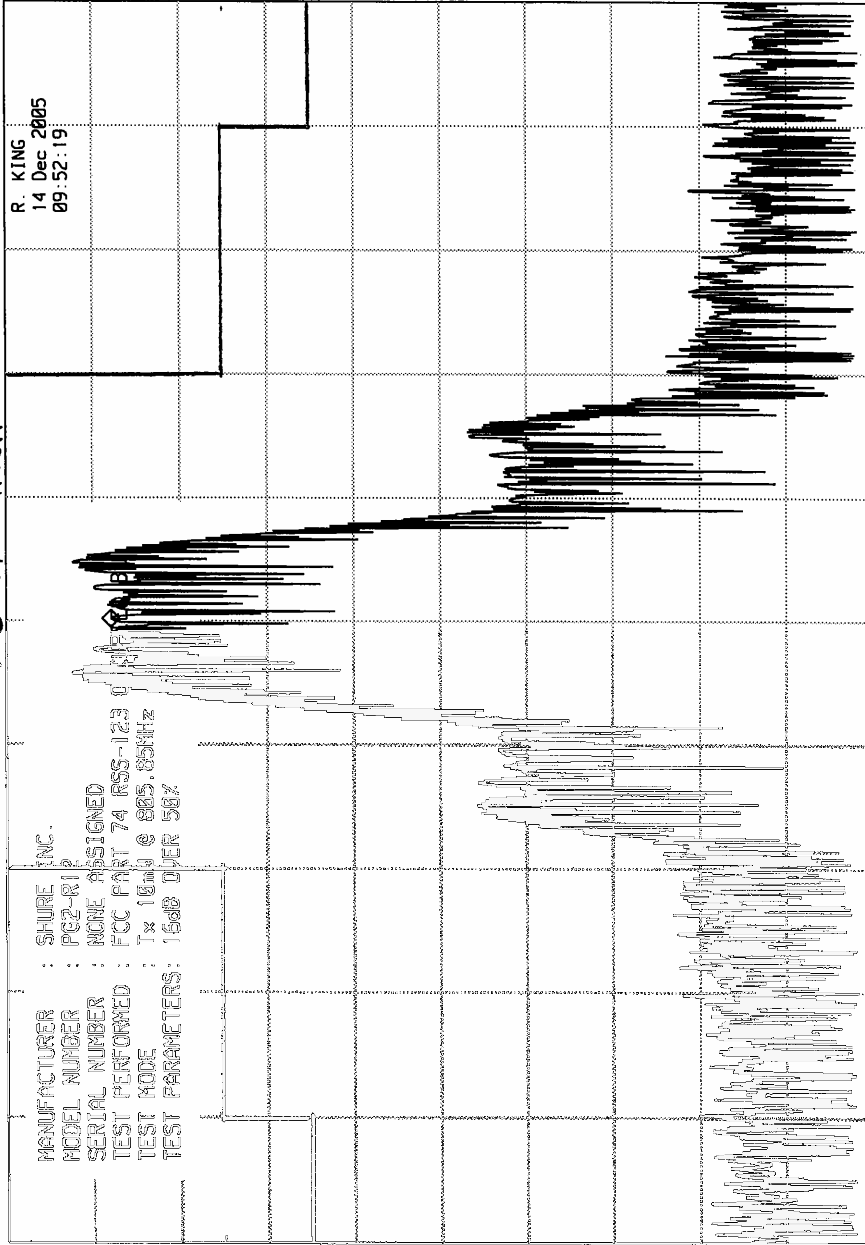



CENTER 805.850 MHz RES BW 3 kHz(1) SPAN 500 kHz
VBW 30 kHz SWP 375 msec

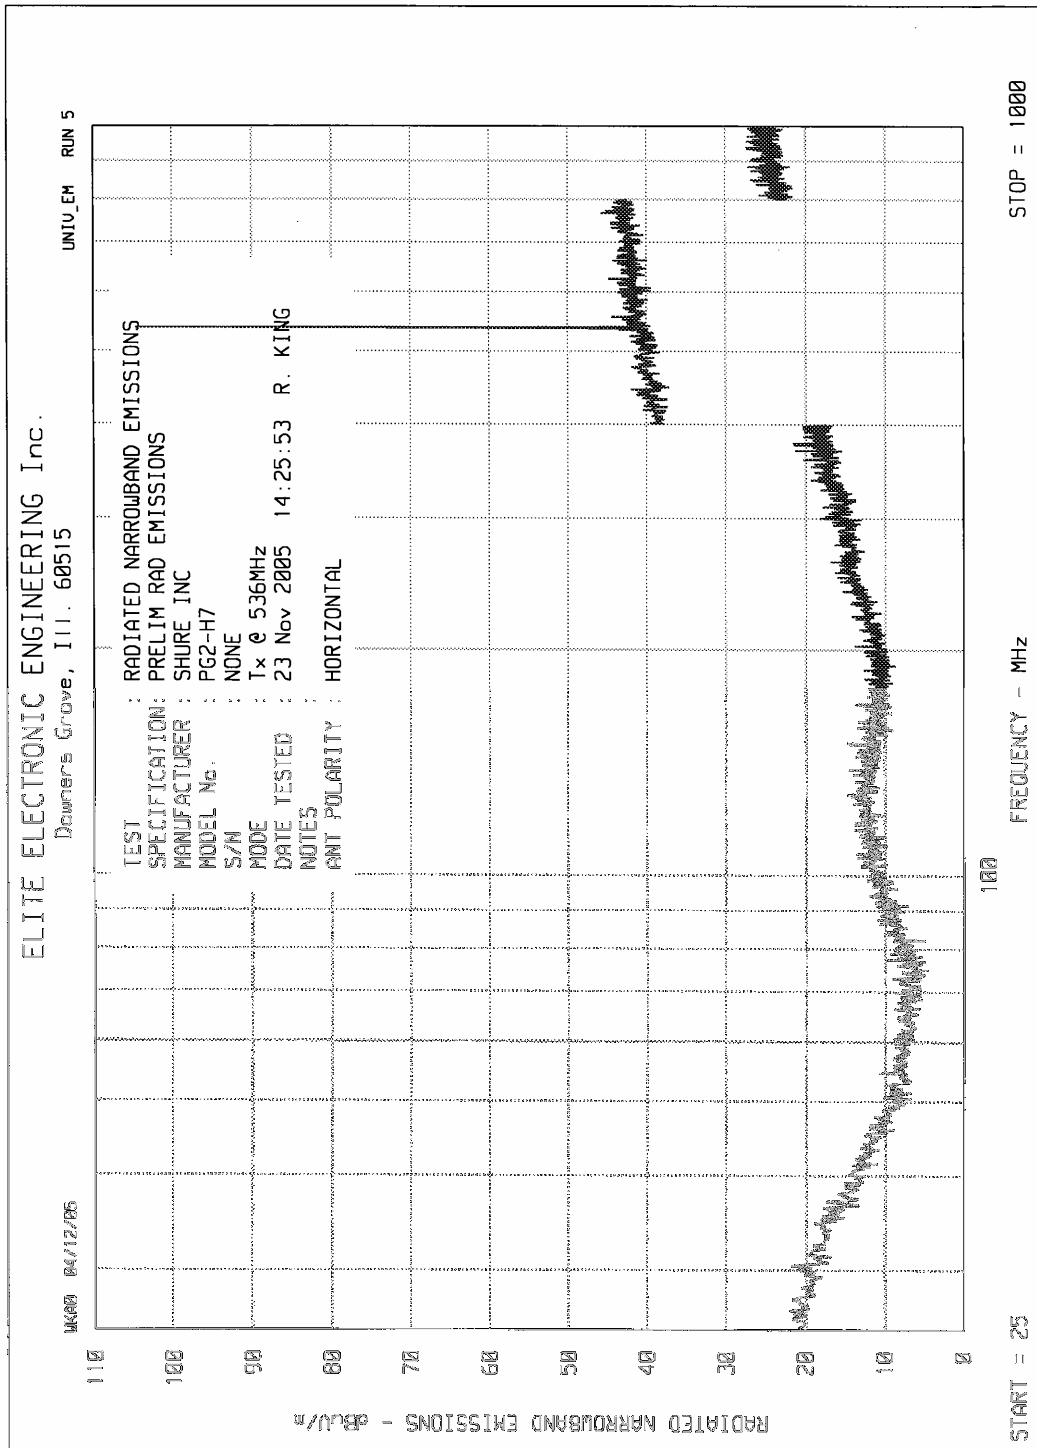


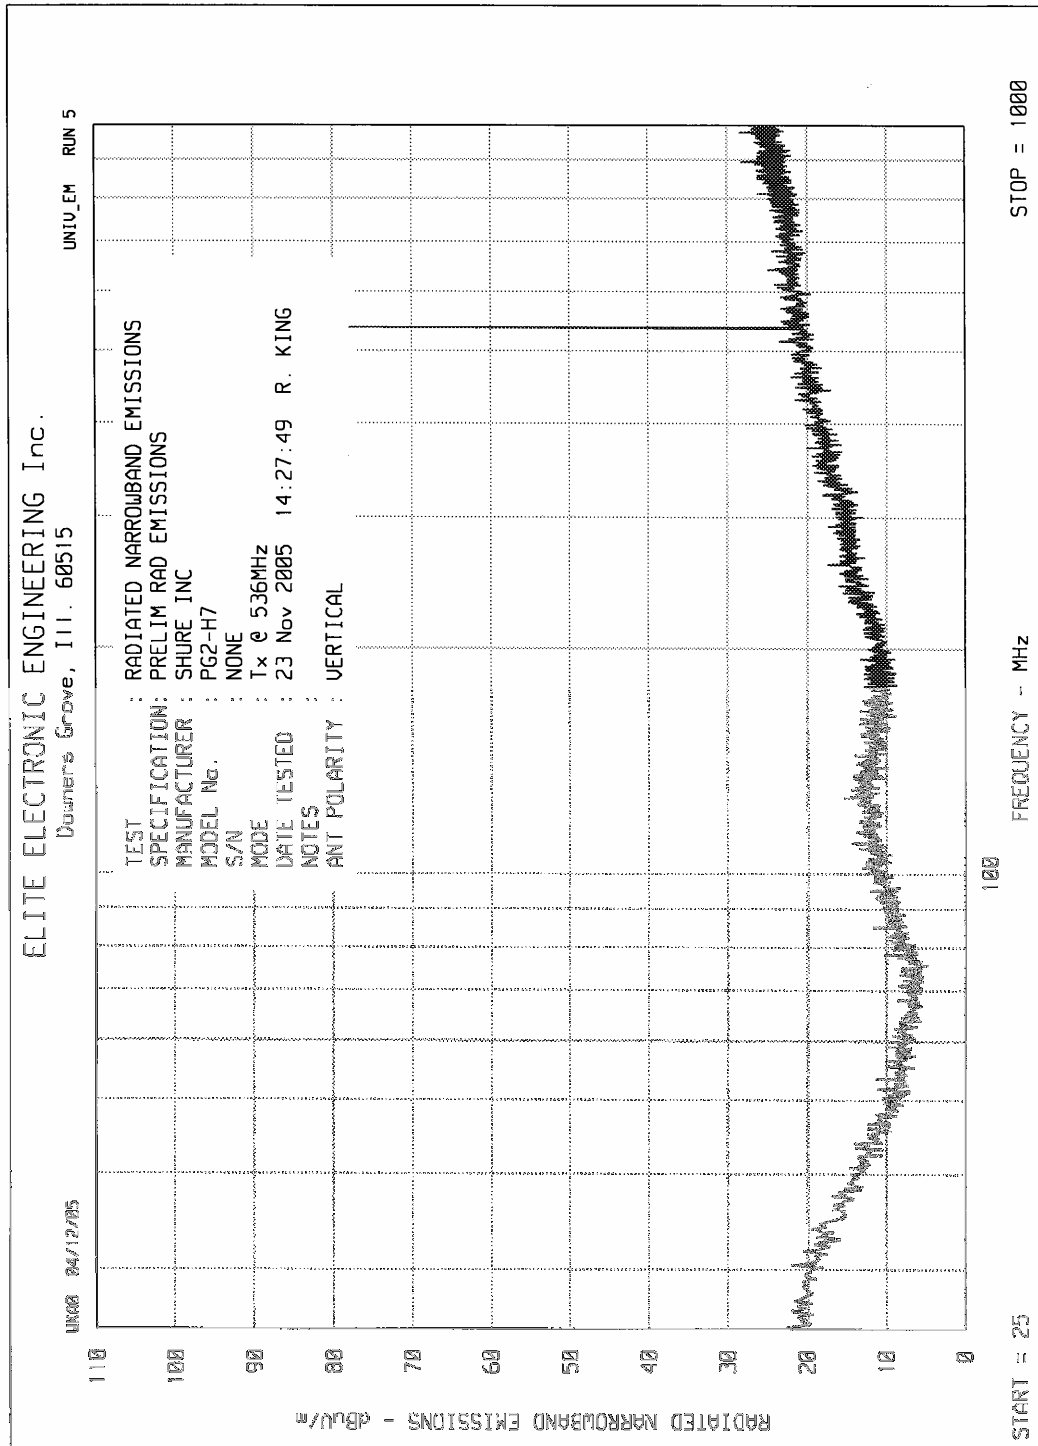


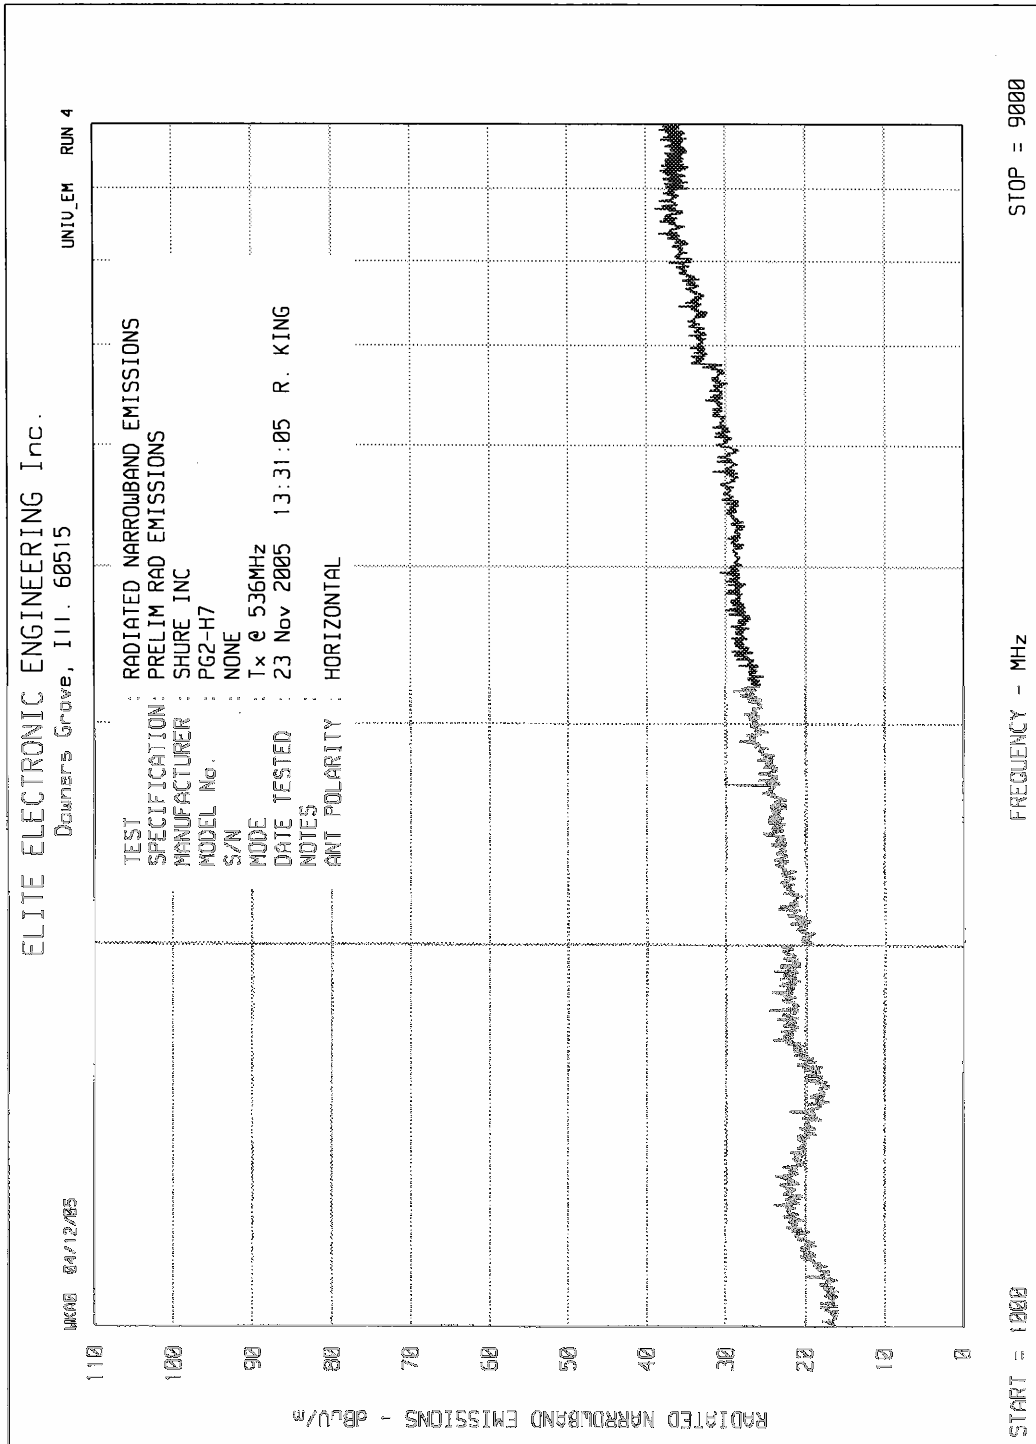


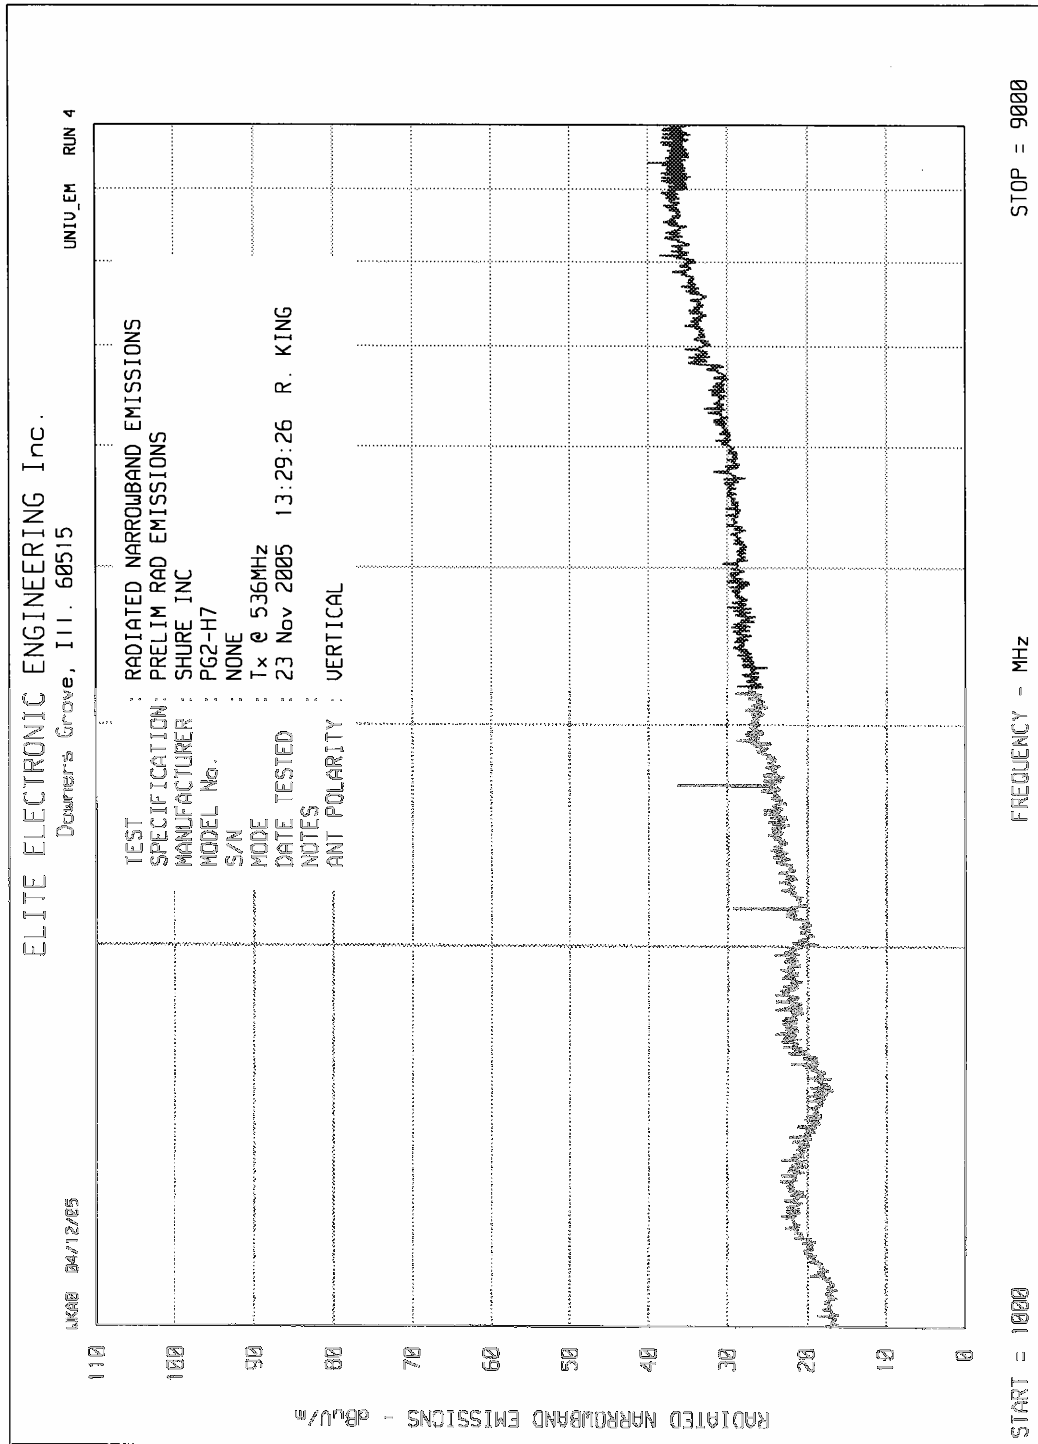


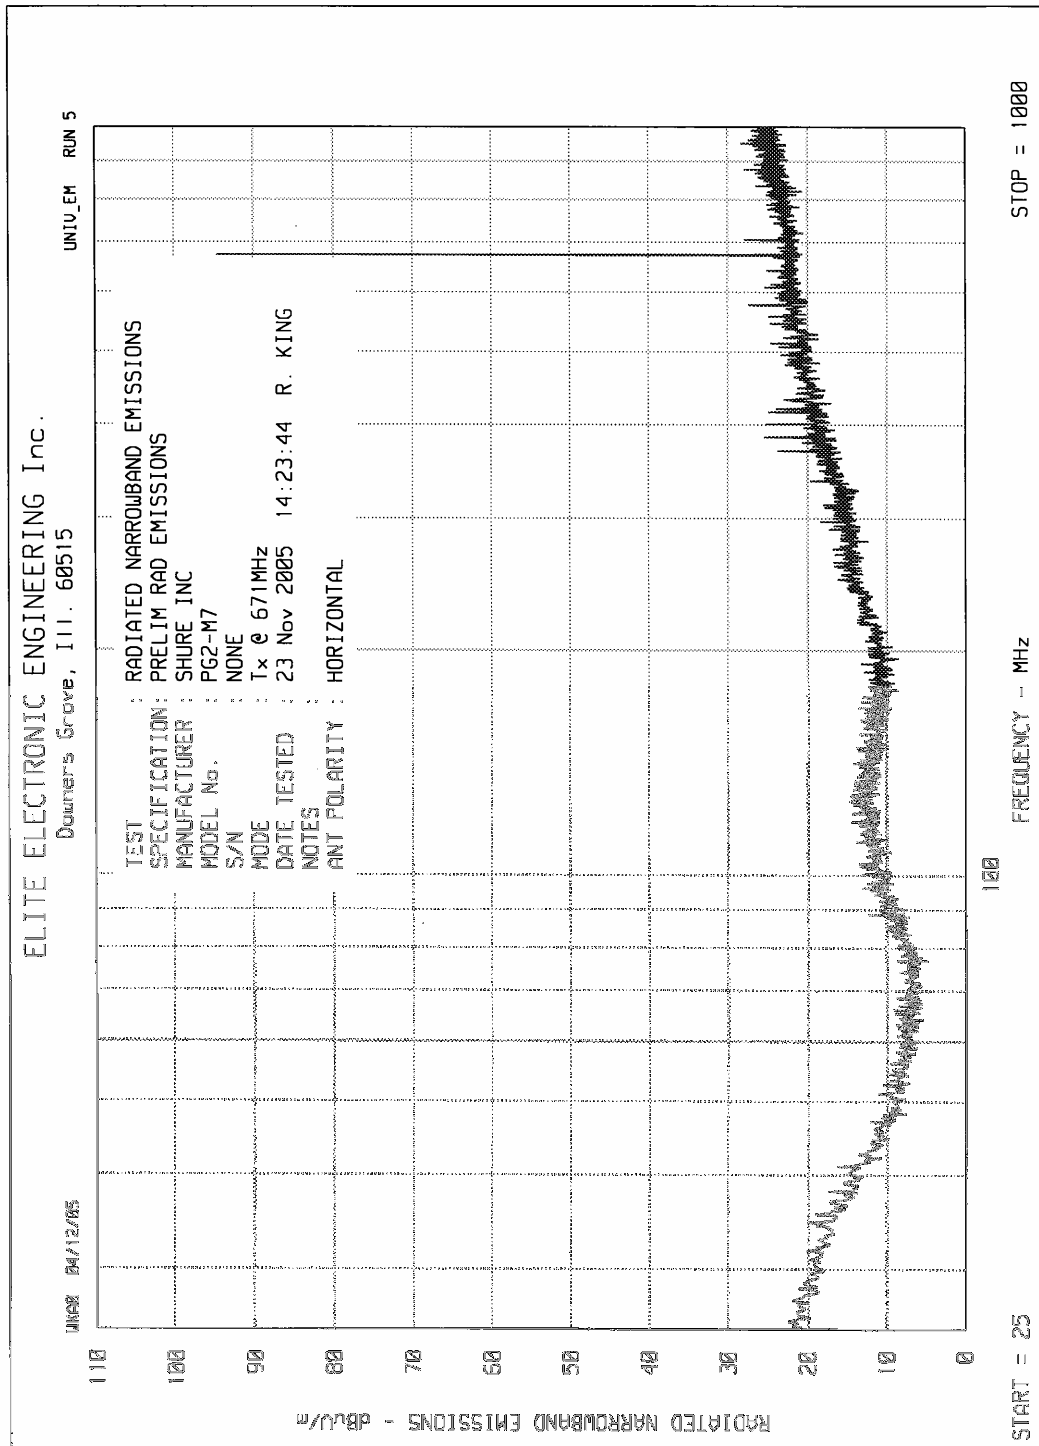


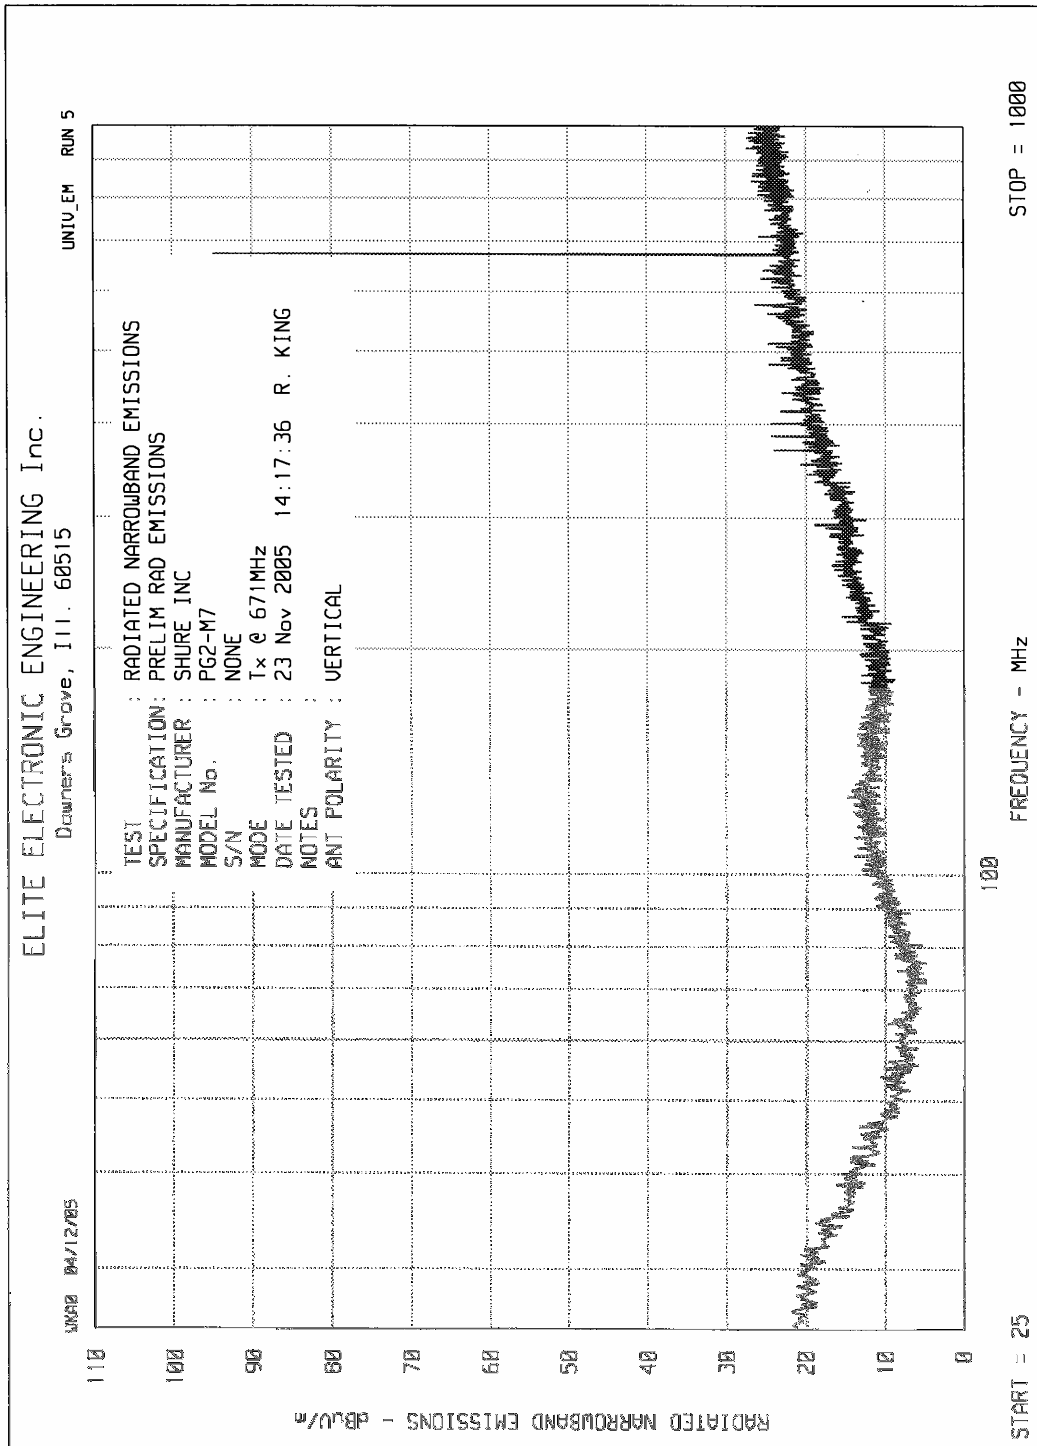


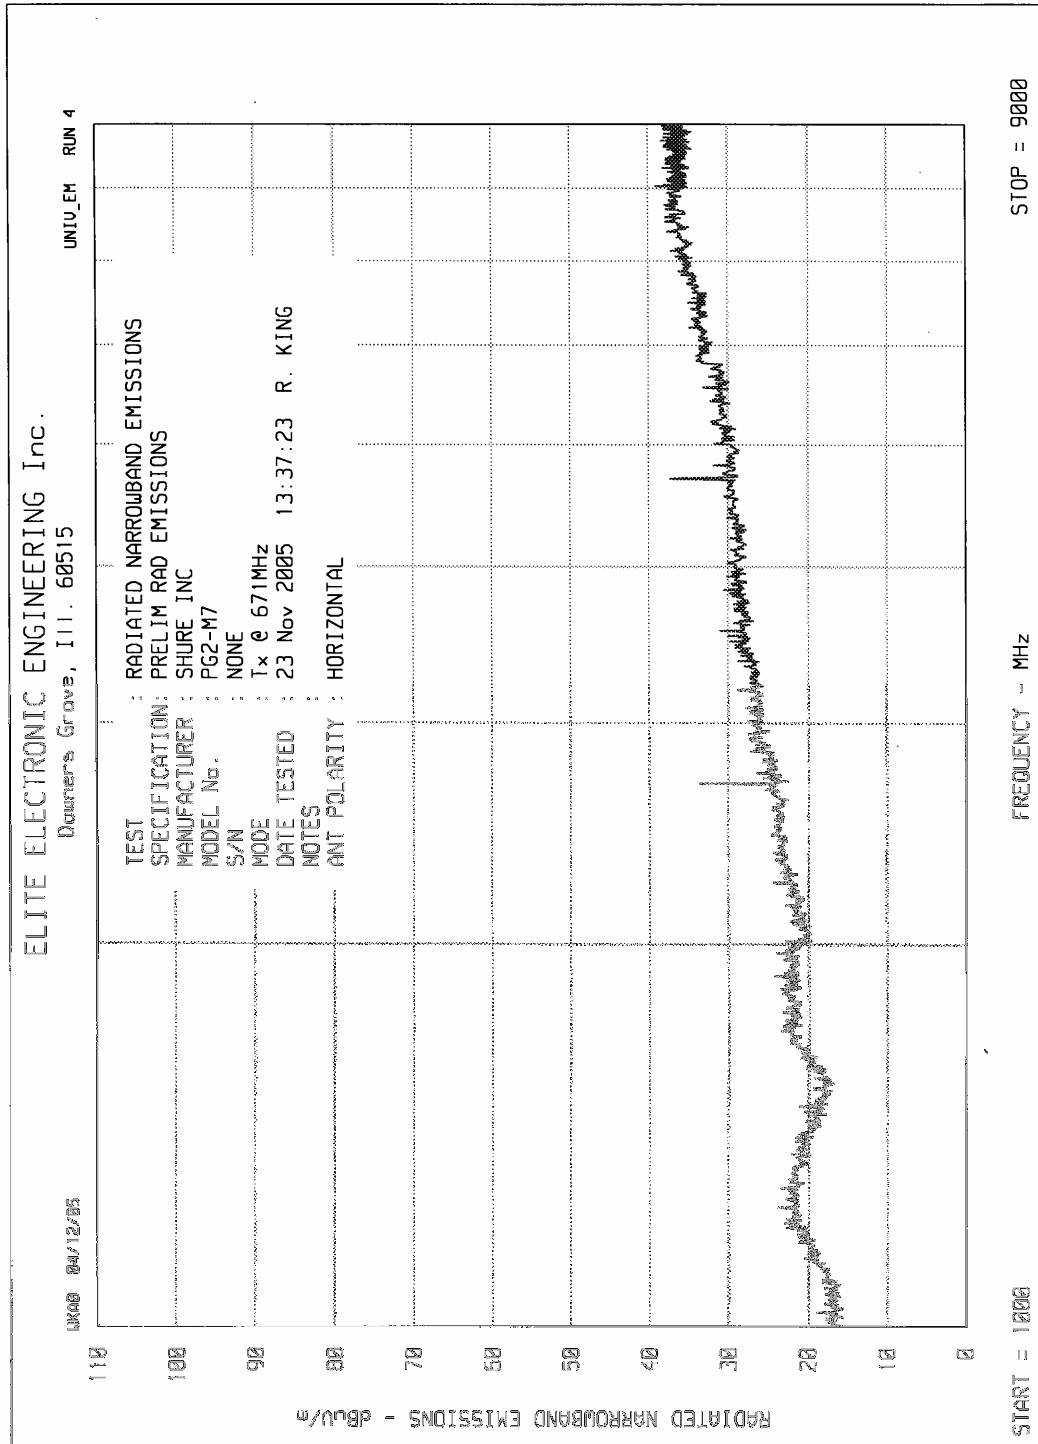


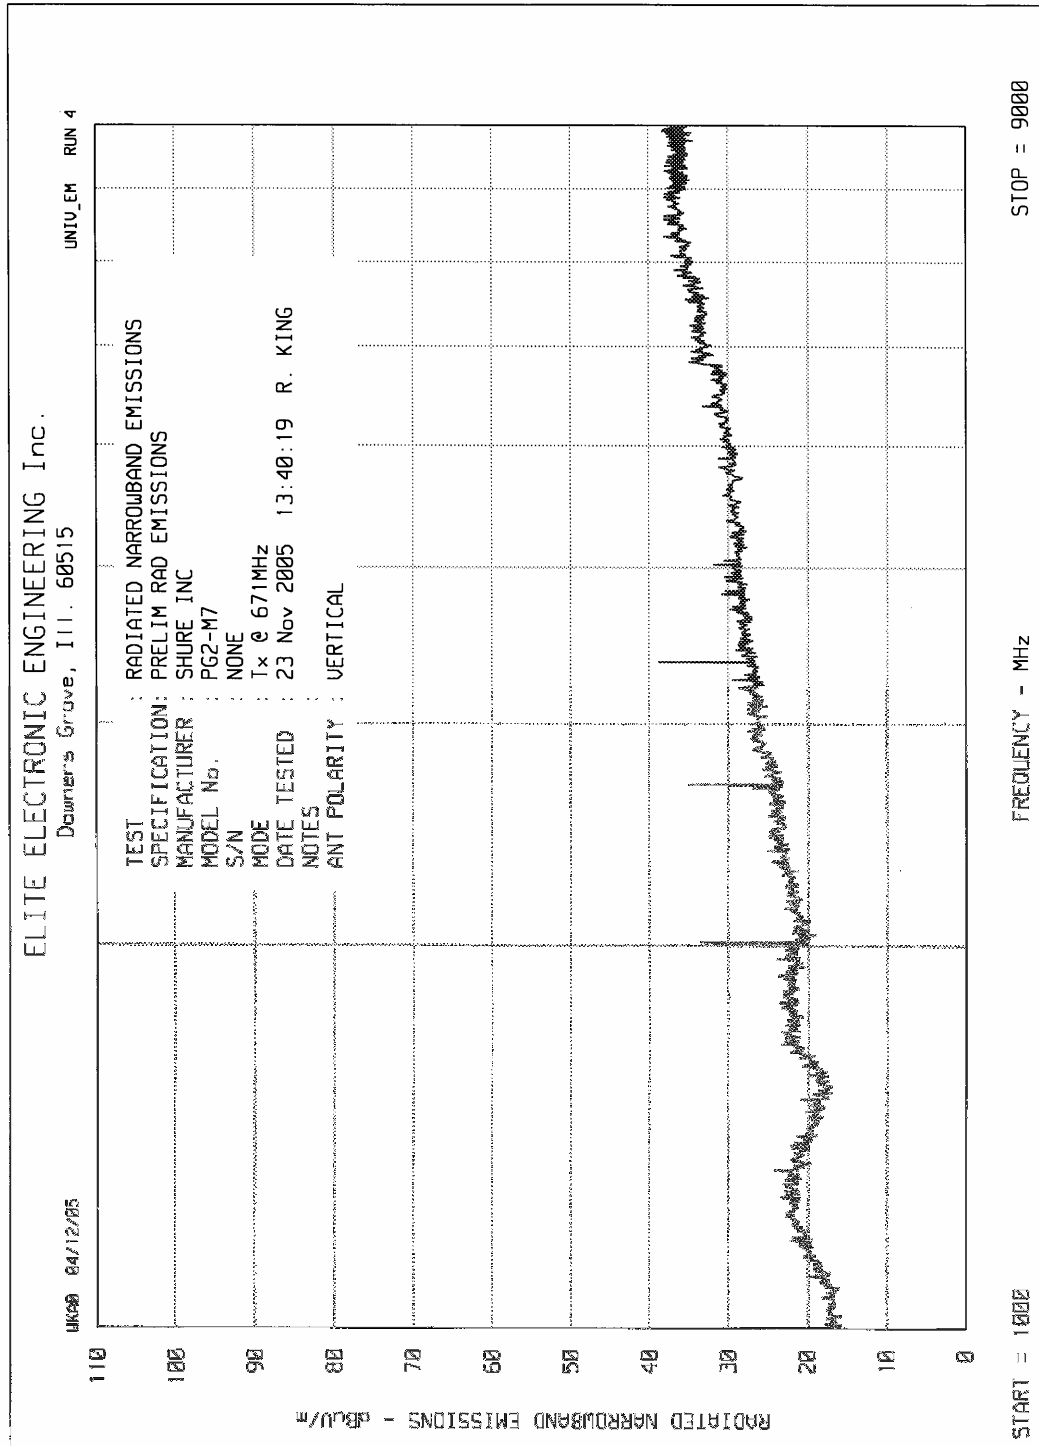

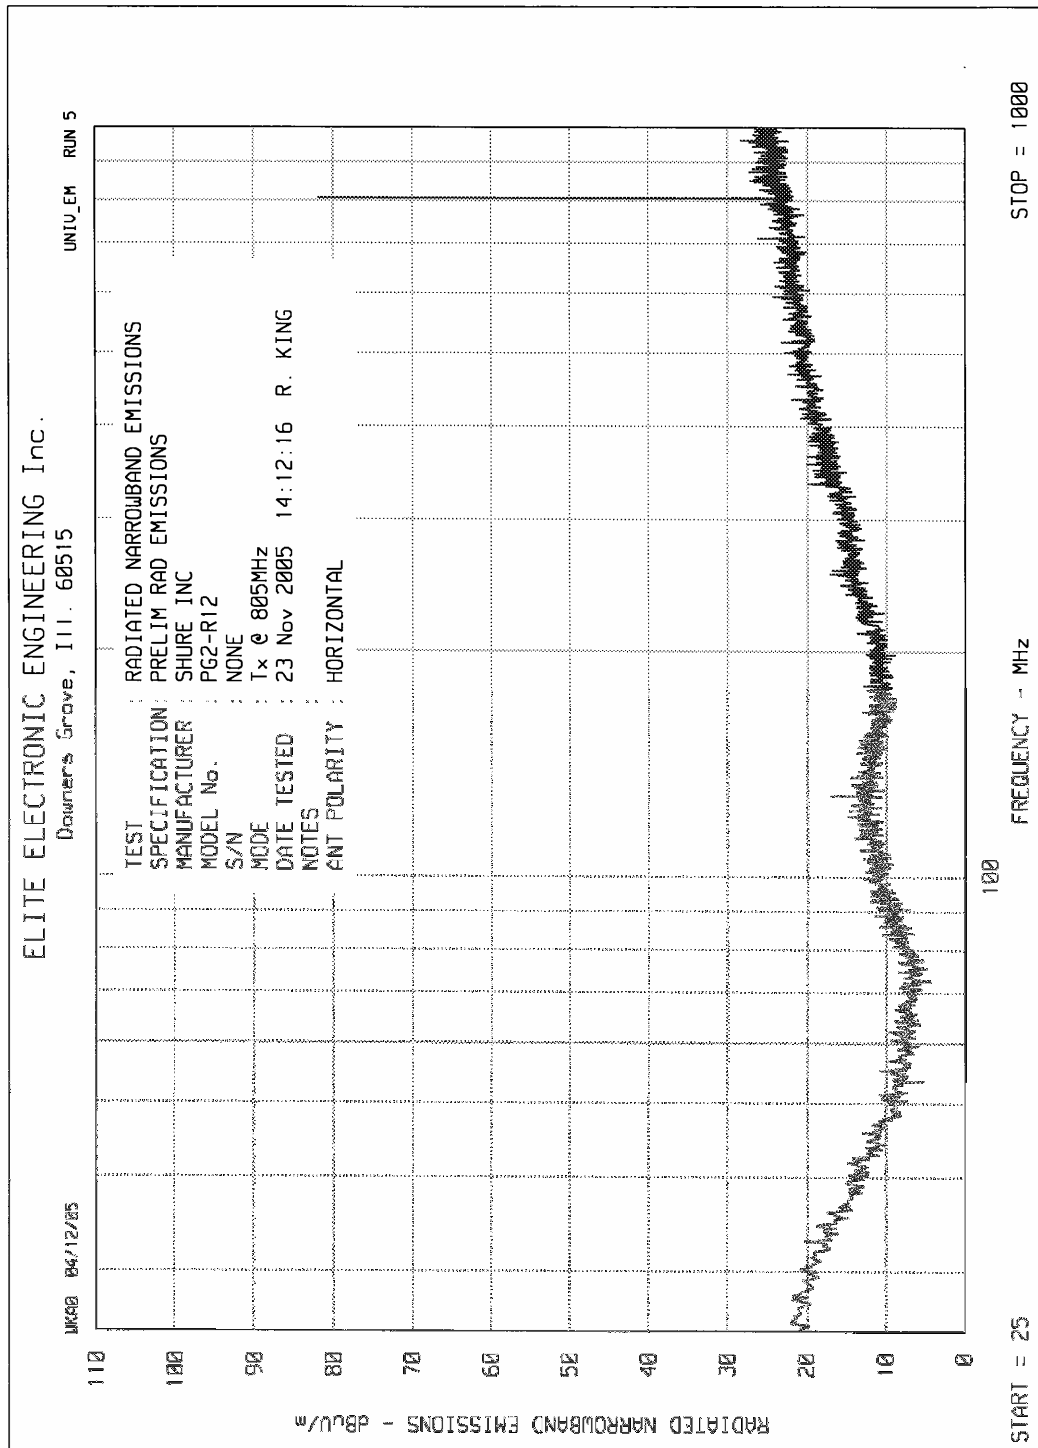

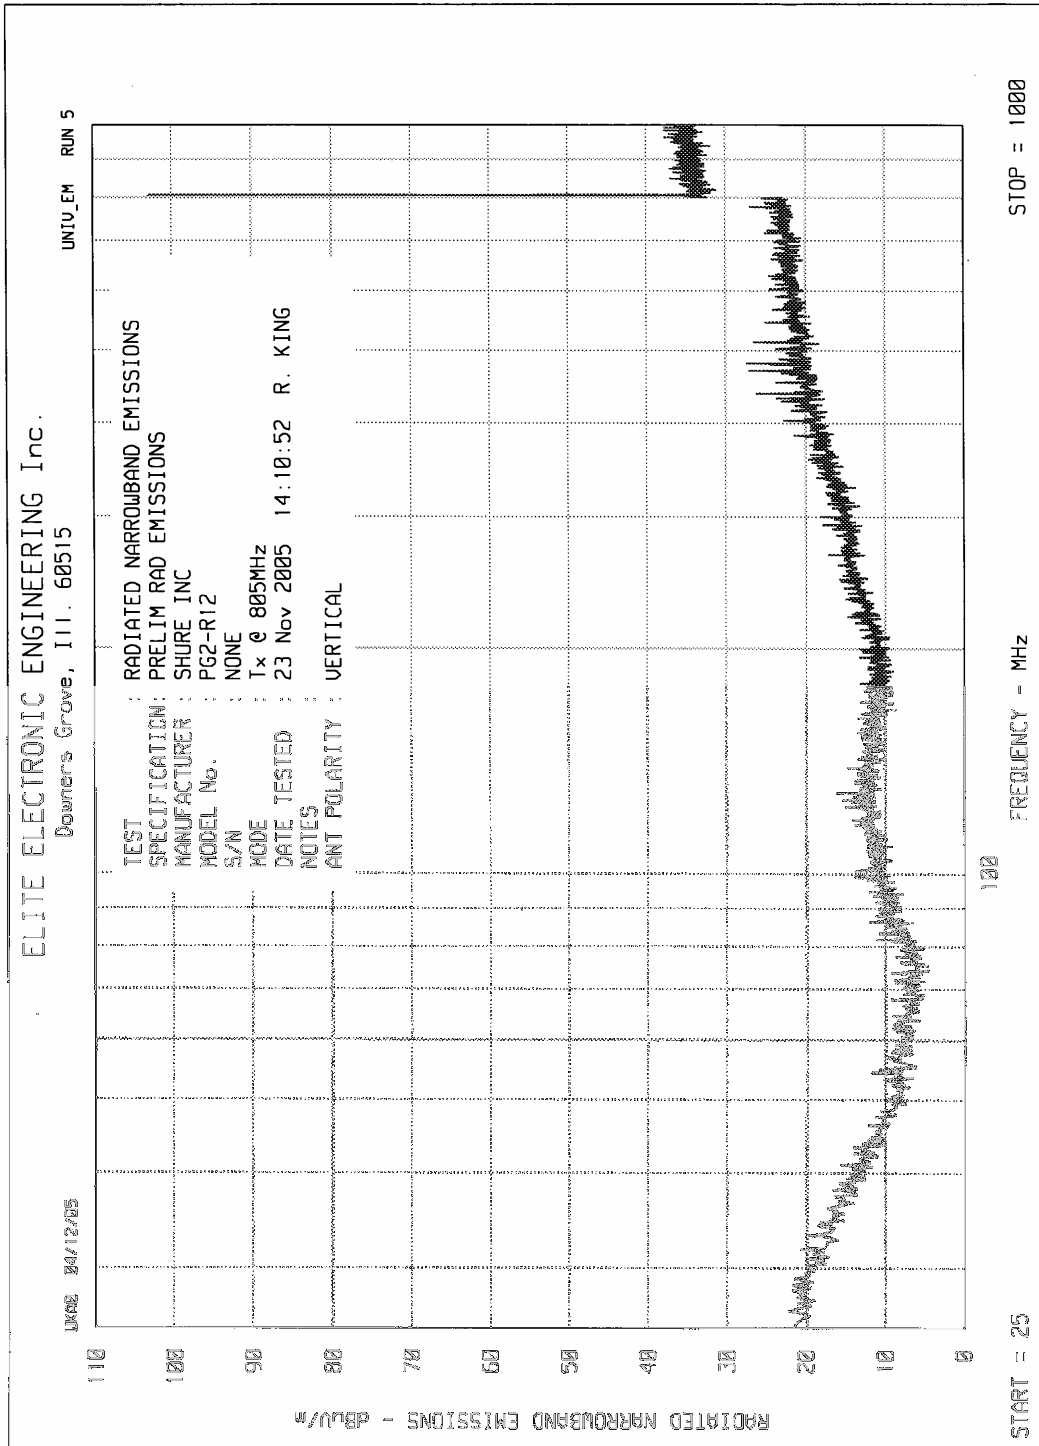

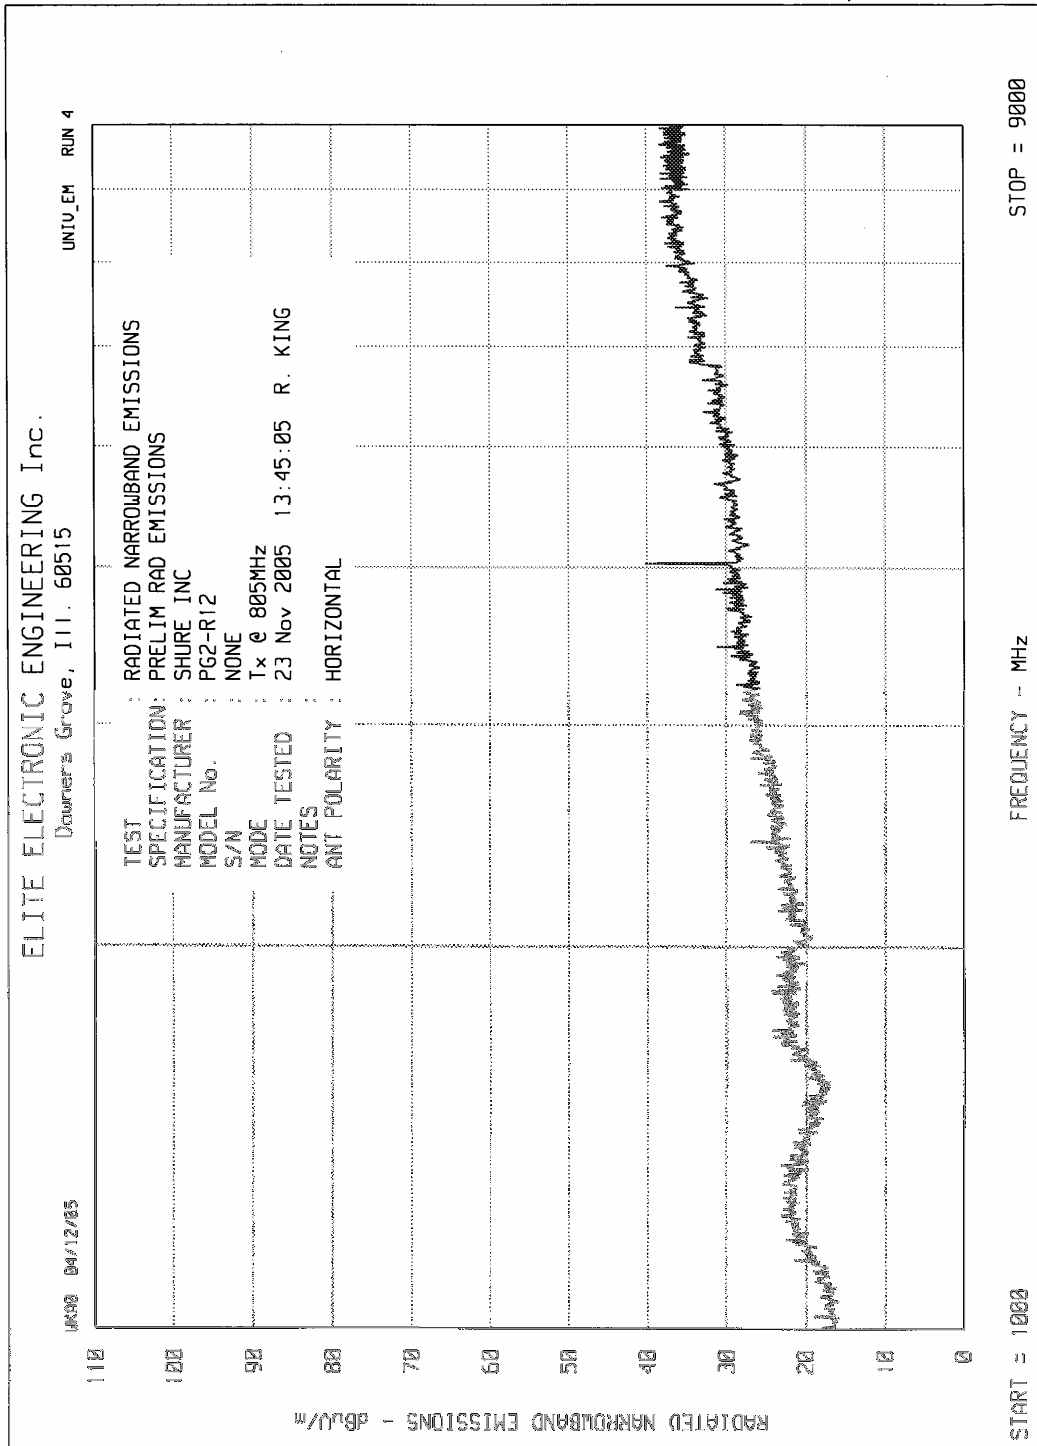

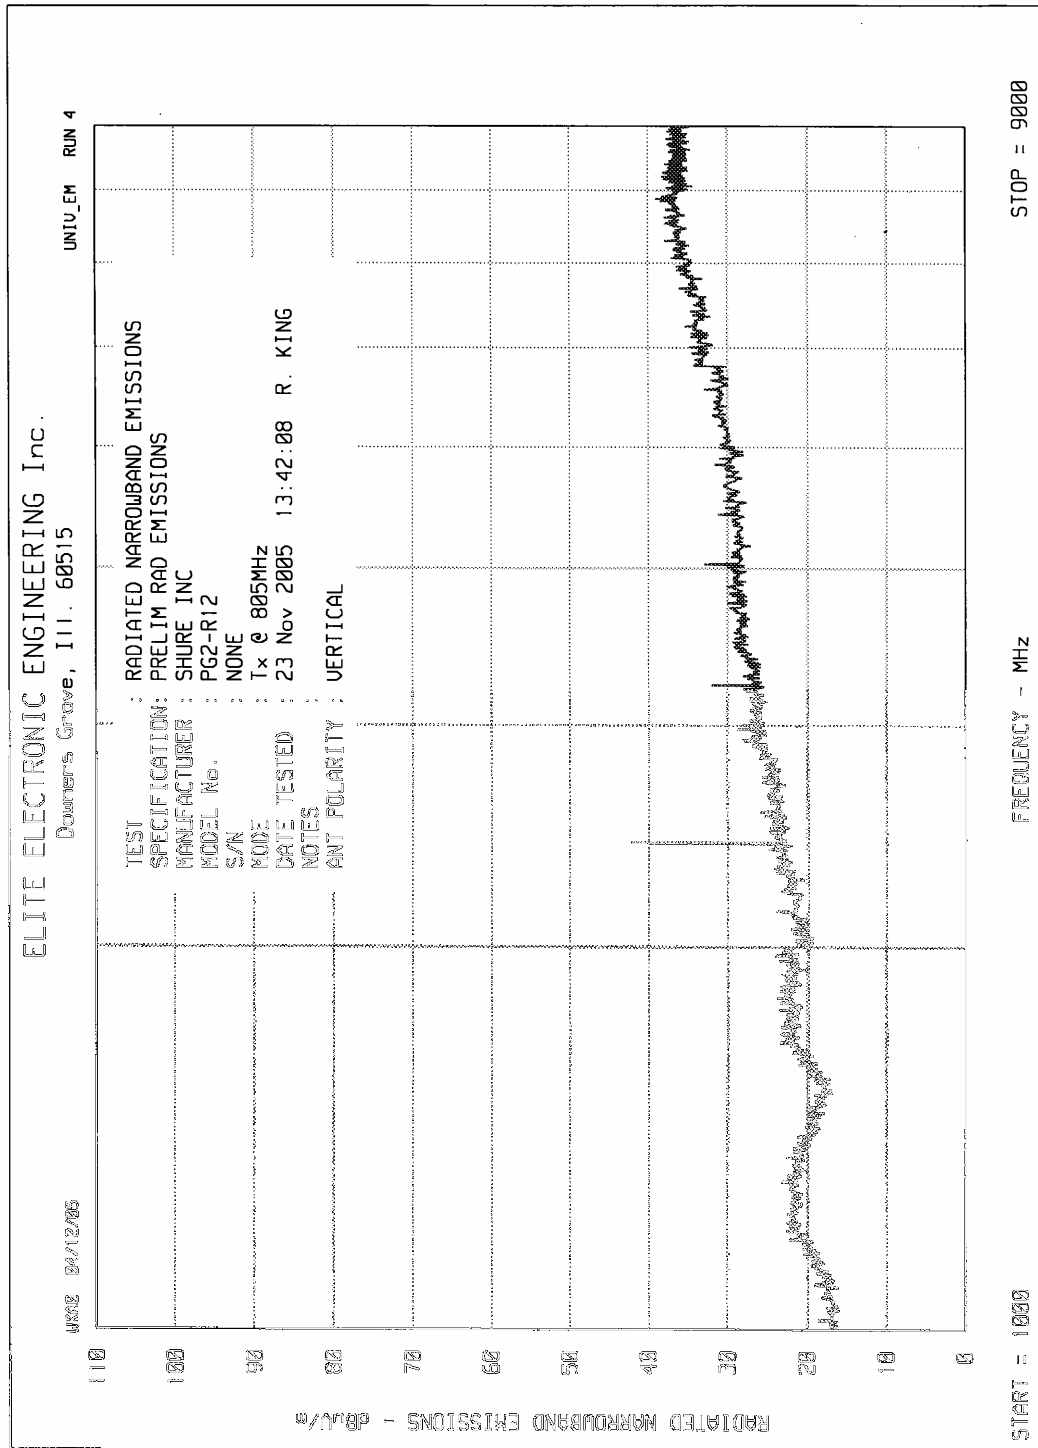



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-H7 10mW
SERIAL NO. : None assigned
SPECIFICATION : FCC-74 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	Part 74 Atten. (dB)	Part 74 Min. Atten. (dB)
1072.0	H	12.4		-65.0	2.6	3.0	-65.4	75.4	23
1072.0	V	14.7		-65.3	2.6	3.0	-65.7	75.7	23
1608.0	H	13.4		-69.0	5.0	3.8	-67.8	77.8	23
1608.0	V	15.1		-62.8	5.0	3.8	-61.6	71.6	23
2144.0	H	47.4		-61.6	5.3	4.3	-60.6	70.6	23
2144.0	V	49.5		-61.6	5.3	4.3	-60.6	70.6	23
2680.0	H	48.3		-54.4	5.3	5.0	-54.1	64.1	23
2680.0	V	49.6		-54.4	5.3	5.0	-54.1	64.1	23
3216.0	H	42.7		-55.3	5.9	5.5	-55.0	65.0	23
3216.0	V	42.8		-55.3	5.9	5.5	-55.0	65.0	23
3752.0	H	42.1		-55.8	6.8	5.9	-54.9	64.9	23
3752.0	V	42.1		-55.8	6.8	5.9	-54.9	64.9	23
4288.0	H	38.4	*	-65.4	7.8	6.4	-64.0	74.0	23
4288.0	V	38.5	*	-65.4	7.8	6.4	-64.0	74.0	23
4824.0	H	39.0	*	-62.0	8.0	6.8	-60.8	70.8	23
4824.0	V	38.5	*	-62.0	8.0	6.8	-60.8	70.8	23
5360.0	H	39.6		-57.2	7.5	7.2	-56.9	66.9	23
5360.0	V	39.4		-57.2	7.5	7.2	-56.9	66.9	23

Checked BY :

RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-H7 10mW
SERIAL NO. : None assigned
SPECIFICATION : RSS-123 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	RSS- 123 Atten. (dB)	RSS-123 Min. Atten. (dB)
1072.0	H	12.4		-65.0	2.6	3.0	-65.4	75.4	35
1072.0	V	14.7		-65.3	2.6	3.0	-65.7	75.7	35
1608.0	H	13.4		-69.0	5.0	3.8	-67.8	77.8	35
1608.0	V	15.1		-62.8	5.0	3.8	-61.6	71.6	35
2144.0	H	47.4		-61.6	5.3	4.3	-60.6	70.6	35
2144.0	V	49.5		-61.6	5.3	4.3	-60.6	70.6	35
2680.0	H	48.3		-54.4	5.3	5.0	-54.1	64.1	35
2680.0	V	49.6		-54.4	5.3	5.0	-54.1	64.1	35
3216.0	H	42.7		-55.3	5.9	5.5	-55.0	65.0	35
3216.0	V	42.8		-55.3	5.9	5.5	-55.0	65.0	35
3752.0	H	42.1		-55.8	6.8	5.9	-54.9	64.9	35
3752.0	V	42.1		-55.8	6.8	5.9	-54.9	64.9	35
4288.0	H	38.4	*	-65.4	7.8	6.4	-64.0	74.0	35
4288.0	V	38.5	*	-65.4	7.8	6.4	-64.0	74.0	35
4824.0	H	39.0	*	-62.0	8.0	6.8	-60.8	70.8	35
4824.0	V	38.5	*	-62.0	8.0	6.8	-60.8	70.8	35
5360.0	H	39.6		-57.2	7.5	7.2	-56.9	66.9	35
5360.0	V	39.4		-57.2	7.5	7.2	-56.9	66.9	35

Checked BY : RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-M7 10mW
SERIAL NO. : None assigned
SPECIFICATION : FCC-74 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	Part 74 Atten. (dB)	Part 74 Min. Atten. (dB)
1342.4	H	15.7		-61.7	4.1	2.1	-59.7	69.7	23
1342.4	V	19.4		-58.8	4.1	2.1	-56.8	66.8	23
2013.6	H	52.3		-54.0	5.3	2.5	-51.2	61.2	23
2013.6	V	52.5		-53.1	5.3	2.5	-50.3	60.3	23
2684.8	H	52.6		-51.2	5.3	3.0	-48.9	58.9	23
2684.8	V	50.8		-51.2	5.3	3.0	-48.9	58.9	23
3356.0	H	44.8		-57.3	6.2	3.4	-54.5	64.5	23
3356.0	V	47.9		-57.3	6.2	3.4	-54.5	64.5	23
4027.2	H	43.5		-56.6	7.1	3.7	-53.1	63.1	23
4027.2	V	44.3		-56.6	7.1	3.7	-53.1	63.1	23
4698.4	H	42.7		-54.4	8.1	4.0	-50.3	60.3	23
4698.4	V	41.6		-54.4	8.1	4.0	-50.3	60.3	23
5369.6	H	39.8		-56.0	7.5	4.3	-52.8	62.8	23
5369.6	V	40.1		-56.0	7.5	4.3	-52.8	62.8	23
6040.8	H	40.1	*	-59.6	7.7	4.6	-56.6	66.6	23
6040.8	V	41.3	*	-59.6	7.7	4.6	-56.6	66.6	23
6712.0	H	42.5	*	-53.1	8.0	5.2	-50.3	60.3	23
6712.0	V	41.1	*	-53.1	8.0	5.2	-50.3	60.3	23

Checked BY : RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-M7 10mW
SERIAL NO. : None assigned
SPECIFICATION : RSS-123 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	RSS- 123 Atten. (dB)	RSS-123 Min. Atten. (dB)
1342.4	H	15.7		-61.7	4.1	2.1	-59.7	69.7	35
1342.4	V	19.4		-58.8	4.1	2.1	-56.8	66.8	35
2013.6	H	52.3		-54.0	5.3	2.5	-51.2	61.2	35
2013.6	V	52.5		-53.1	5.3	2.5	-50.3	60.3	35
2684.8	H	52.6		-51.2	5.3	3.0	-48.9	58.9	35
2684.8	V	50.8		-51.2	5.3	3.0	-48.9	58.9	35
3356.0	H	44.8		-57.3	6.2	3.4	-54.5	64.5	35
3356.0	V	47.9		-57.3	6.2	3.4	-54.5	64.5	35
4027.2	H	43.5		-56.6	7.1	3.7	-53.1	63.1	35
4027.2	V	44.3		-56.6	7.1	3.7	-53.1	63.1	35
4698.4	H	42.7		-54.4	8.1	4.0	-50.3	60.3	35
4698.4	V	41.6		-54.4	8.1	4.0	-50.3	60.3	35
5369.6	H	39.8		-56.0	7.5	4.3	-52.8	62.8	35
5369.6	V	40.1		-56.0	7.5	4.3	-52.8	62.8	35
6040.8	H	40.1	*	-59.6	7.7	4.6	-56.6	66.6	35
6040.8	V	41.3	*	-59.6	7.7	4.6	-56.6	66.6	35
6712.0	H	42.5	*	-53.1	8.0	5.2	-50.3	60.3	35
6712.0	V	41.1	*	-53.1	8.0	5.2	-50.3	60.3	35

Checked BY :

RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-R12 10mW
SERIAL NO. : None assigned
SPECIFICATION : FCC-74 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	Part 74 Atten. (dB)	Part 74 Min. Atten. (dB)
1611.7	H	18.6		-57.4	5.0	2.3	-54.7	64.7	23
1611.7	V	13.9		-61.7	5.0	2.3	-59.0	69.0	23
2417.6	H	54.5		-49.3	5.3	2.8	-46.8	56.8	23
2417.6	V	54.7		-49.3	5.3	2.8	-46.8	56.8	23
3223.4	H	48.4		-52.3	5.9	3.3	-49.7	59.7	23
3223.4	V	50.2		-52.3	5.9	3.3	-49.7	59.7	23
4029.3	H	44.1		-56.7	7.1	3.7	-53.2	63.2	23
4029.3	V	44.2		-56.7	7.1	3.7	-53.2	63.2	23
4835.1	H	40.1		-62.0	8.0	4.1	-58.1	68.1	23
4835.1	V	39.5		-62.0	8.0	4.1	-58.1	68.1	23
5641.0	H	38.9		-59.8	7.4	4.4	-56.8	66.8	23
5641.0	V	39.5		-59.8	7.4	4.4	-56.8	66.8	23
6446.8	H	42.1	*	-54.6	8.0	5.0	-51.5	61.5	23
6446.8	V	42.4	*	-54.6	8.0	5.0	-51.5	61.5	23
7252.7	H	39.9	*	-54.0	7.6	5.6	-52.0	62.0	23
7252.7	V	39.3	*	-54.0	7.6	5.6	-52.0	62.0	23
8058.5	H	40.5	*	-54.3	8.6	6.2	-52.0	62.0	23
8058.5	V	39.3	*	-54.3	8.6	6.2	-52.0	62.0	23

Checked BY : RICHARD E. KING

Richard E. King



MANUFACTURER : Shure Inc.
MODEL NO. : PG2-R12 10mW
SERIAL NO. : None assigned
SPECIFICATION : RSS-123 Spurious Radiated Emissions
DATE : November 22, 2005
NOTES : Test Distance is 3 Meters

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig Gen (dBm)	Antenna Gain (dB)	Cable Factor (dB)	ERP Total (dBm)	RSS- 123 Atten. (dB)	RSS-123 Min. Atten. (dB)
1611.7	H	18.6		-57.4	5.0	2.3	-54.7	64.7	35
1611.7	V	13.9		-61.7	5.0	2.3	-59.0	69.0	35
2417.6	H	54.5		-49.3	5.3	2.8	-46.8	56.8	35
2417.6	V	54.7		-49.3	5.3	2.8	-46.8	56.8	35
3223.4	H	48.4		-52.3	5.9	3.3	-49.7	59.7	35
3223.4	V	50.2		-52.3	5.9	3.3	-49.7	59.7	35
4029.3	H	44.1		-56.7	7.1	3.7	-53.2	63.2	35
4029.3	V	44.2		-56.7	7.1	3.7	-53.2	63.2	35
4835.1	H	40.1		-62.0	8.0	4.1	-58.1	68.1	35
4835.1	V	39.5		-62.0	8.0	4.1	-58.1	68.1	35
5641.0	H	38.9		-59.8	7.4	4.4	-56.8	66.8	35
5641.0	V	39.5		-59.8	7.4	4.4	-56.8	66.8	35
6446.8	H	42.1	*	-54.6	8.0	5.0	-51.5	61.5	35
6446.8	V	42.4	*	-54.6	8.0	5.0	-51.5	61.5	35
7252.7	H	39.9	*	-54.0	7.6	5.6	-52.0	62.0	35
7252.7	V	39.3	*	-54.0	7.6	5.6	-52.0	62.0	35
8058.5	H	40.5	*	-54.3	8.6	6.2	-52.0	62.0	35
8058.5	V	39.3	*	-54.3	8.6	6.2	-52.0	62.0	35

Checked BY : RICHARD E. KING

Richard E. King