



SHURE

ELECTROMAGNETIC COMPATIBILITY LABORATORY TEST REPORT

TEST REPORT TITLE: Electromagnetic Compatibility Tests of the Shure QLXD1 J50A Digital Wireless Transmitter in the 572MHz to 607MHz and 614MHz to 616MHz Bands

TEST ITEM DESCRIPTION:

The Shure QLXD1 is a digital wireless microphone transmitter, microprocessor controlled transmitter.

For: Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714

Project ID Number: SEL-030/QLXD1 J50A

Date Tested: January 19, 22, 2018 and February 12, 13, 26, 27, 2018, March 8, 2018

Test Personnel: Juan Castrejon, Alex Mishinger, and Craig Kozokar

Test Specification: FCC Part 15C, Section 15.236g

TEST REPORT BY:	<u>Craig Kozokar</u>	<u>Global Compliance Engineer</u>	<u>MAY 1, 2018</u>
APPROVED BY:	<u>Dominic Alexton</u>	<u>GC Project Engineer</u>	<u>5/1/18</u>
	Signature	Position	Date



TABLE OF CONTENTS

<u>PARAGRAPH</u>	<u>DESCRIPTION OF CONTENTS</u>	<u>PAGE NO.</u>
0.	Report Revision History	4
1.	Introduction	5
1.1.	Scope of Tests	5
1.2.	Purpose	5
1.3.	Deviation, Additions and Exclusions	5
1.4.	EMC Laboratory Identification	5
1.5.	Summary of Tests Performed	6
2.	Applicable Documents.....	6
3.	EUT Setup and Operation	6
3.1	General Description	6
3.2	Test Samples	6
3.3	Operational Mode.....	7
4	Test Instrumentation	7
5	Procedure.....	7
6	Other Test Conditions	7
6.1	Test Personnel.....	7
6.2	Disposition of the EUT	7
7	Results of Tests	7
8	Conclusions	7
9	Certification	8
10	Equipment List	9
11	Appendix A	10
12	Appendix B	48
13	Appendix C	53

Note: This report shall not be reproduced, except in full, without the written approval of the Shure Incorporated Electromagnetic Laboratory (SEL). Total Page Count is 84.



LIST OF APPENDICIES

APPENDIX	TEST DESCRIPTION
A	Radiated RF Spurious Emissions Measurement, 30 MHz to 10 GHz
B	Maximum Radiated Power
C	Necessary Bandwidth



REPORT REVISION HISTORY

Revision	Date	Description
0	March 30, 2018	Initial release



1. INTRODUCTION

1.1. Scope of Tests

This report presents the results of testing per FCC Part 15C, Section 236g, Radiated RF Spurious Emissions, Necessary Bandwidth, and Maximum Radiated Power. The following data was taken following the measurement method as described in the document section(s) listed on page 1 of this document. Provided is the data for the test sample. Also included is a summary of the measurements made and a description of the measurement setup. The test sample meet the requirements of the above standards. The equipment under test (EUT) contained a transmitter that was designed to transmit in the UHF TV frequency bands shown in Table 1.

Model	Band	Frequency (MHz)	Output Power (mW)
QLXD1	J50A	572 to 607 and 614 to 616	1 and 10

Table 1. EUT Frequencies and Power Levels

1.2. Purpose

This series of testing was performed to determine if the test item would meet the requirements of FCC Part 15C, Section 236g.

1.3. Deviations, Additions and Exclusions

None

1.4. EMC Laboratory Identification

The electromagnetic compatibility tests were performed at the Shure Electromagnetic Laboratory, Shure Incorporated, 5800 West Touhy Ave, Niles, Illinois 60714-4608. This laboratory is registered with Industry Canada as Site # 616A-1. The Shure Electromagnetic Laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). The NVLAP Lab Code is: 200946-0.



1.5. Summary of Tests Performed

The following electromagnetic compatibility tests (Table 2) were performed on the test item in accordance with ETSI specifications.

Table 2. Summary of tests performed

Test Spec	Description	Tested Frequency	Appendix	Test Results
FCC Part 15C	Radiated Spurious Emissions	30 MHz to 10 GHz	A	Pass
FCC Part 15C	Maximum Radiated Power	572.125MHz, 589.500MHz, 606.875MHz, 614.125MHz, 615.875MHz	B	Pass
FCC Part 15C	Necessary Bandwidth Measurements	572.125MHz, 589.500MHz, 606.875MHz, 614.125MHz, 615.875MHz	C	Pass

2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

FCC Part 15C, Section 236g

EN 300 422-1 v1.4.2 (2011-08), "Wireless Microphone "Electromagnetic Compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25MHz to 3GHz frequency range; Part 1; Technical characteristics and methods of measurements"

ANSI C63.4 (2014), "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

3. EUT SET-UP AND OPERATION

3.1. General Description

The test sample used was Shure QLXD1 digital wireless microphone transmitter. The EUT was arranged and tested per individual Appendices.

3.2 Test Sample

The following product sample was tested:

Table 3: Shure QLXD1 J50A Digital Wireless Transmitter Sample

QLXD1 J50A Serial Numbers
#1



3.3 Operational Mode

All necessary bandwidth tests were performed at the below transmit frequency and output power modes shown in Table 4.

Band	Frequency in MHz	L/M/H	Power Level in mW
J50A	572.125	Low	1 and 10
J50A	589.500	Middle	1 and 10
J50A	606.875	High	1 and 10
J50A	614.125	Low	1 and 10
J50A	615.875	High	1 and 10

Table 4. EUT Frequencies and Power Levels

All radiated spurious emissions and maximum radiated power tests were performed at the below transmit frequency and output power modes shown in Table 5.

Band	Frequency in MHz	L/M/H	Power Level in mW
J50A	572.125	Low	10
J50A	589.500	Middle	10
J50A	606.875	High	10
J50A	614.125	Low	10
J50A	615.875	High	10

Table 5. EUT Frequencies and Power Levels

4. Test Instrumentation

A list of the test equipment used can be found in Table 10-1. All equipment used was within calibration during and throughout the duration of the tests. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

5. Procedure

The specific test procedures are presented in the individual appendices.

6. Other Test Conditions:

6.1. Test Personnel

All EMC tests were performed by qualified personnel from the Shure EMC Laboratory.

6.2. Disposition of the EUT

The EUTs and all associated equipment were returned to Shure Incorporated upon completion of the tests.

7. Results of Tests:

The results are presented in Appendices. It was found that the EUT meet the requirements of FCC Part 15C, Section 236g for Radiated RF Spurious Emissions, Maximum Radiated Power, and Necessary Bandwidth.

8. Conclusions:

It was determined that the Shure QLXD1 J50A Digital Wireless Microphone Transmitter did fully comply with the requirements of FCC Part 15C, Section 236g, Radiated RF Spurious Emissions, Maximum Radiated Power, and Necessary Bandwidth.



9. **Certification:**

Shure EMC Laboratory certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUTs at the test date. Any electrical or mechanical modification made to the EUTs subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



10. Equipment List

Table 10-1 Test Equipment

L# or ID	Description	Manufacturer	Model #	Serial #	Frequency Range	Cal Date	Due Date
L23-011-01	3 meter RF Chamber	ETS Lindgren	FACT-3	AJ640	25MHz - 18GHz	8/8/2017	8/8/2018
L23-011-02	Electric Powered Turntable	ETS Lindgren	2088	N/A	N/A	N/A	N/A
L23-011-08	Controller	EMCO	2090	29799	N/A	N/A	N/A
L23-011-09	Antenna Positioner	ETS Lindgren	2071-2	35500	N/A	N/A	N/A
L23-011-15	BiConiLog Antenna	ETS Lindgren	3142C	34790	25MHz-1GHz	6/22/2017	6/22/2018
L23-011-44	BiConiLog Antenna	ETS Lindgren	3142C	79899	25MHz-1GHz	2/27/2017	2/27/2018
L23-011-54	EMI Test Receiver	Rohde & Schwarz	ESR26	100220	9kHz-26GHz	3/30/2017	3/30/2018
L23-011-31	EMI/EMS Test Software	Rohde & Schwarz	EMC32	V 9.21.00	N/A	N/A	N/A
L23-011-55	Horn antenna with pre-amplifier	ETS Lindgren	3117-PA	206583	1GHz to 18 GHz	4/27/2017	4/27/2018
L23-011-41	Horn Antenna	ETS Lindgren	3117	123511	1GHz to 18 GHz	5/7/2017	5/7/2018
L23-011-57	High Pass Filter	K&L	11SH10-940/X10000-0/0	3	940MHz – 10GHz	3/31/2017	3/31/2018
L23-022-02	Spectrum Analyzer	Rohde & Schwarz	FSW26	103788	9kHz-26GHz	3/28/2017	3/28/2018
L23-022-01	Spectrum Analyzer	Rohde & Schwarz	FSU26	201043	9kHz-26GHz	8/23/2017	8/23/2018
L23-040-09	20dB attenuator	Mini-Circuits	BW-S20W2	N/A	20MHz to 18GHz	2/21/2017	2/21/2018
L23-040-04	20dB attenuator	Mini-Circuits	BW-S20W5	1133	20MHz to 18GHz	7/18/2017	7/18/2018
L23-034-05	Temperature Hygrometer	Extech	445703	48254-66	N/A	9/15/2016	9/15/2018
L23-034-04	Temperature Hygrometer	Extech	445703	48254-13	N/A	9/15/2016	9/15/2018
L23-023-01	RF Signal Generator	Rohde & Schwarz	SMF100A	101553	20Hz to 26.5GHz	8/23/2017	8/23/2018



Appendix A

A. RADIATED RF SPURIOUS EMISSIONS – 30 MHz TO 10 GHz

Purpose:

This test performed to determine if the EUT meets the radiated RF emission requirements of the FCC Part 15C section 236g over the frequency range from 30MHz to 10GHz. A Quasi-Peak and Average detectors were used for the measurements.

Requirements:

As stated in FCC 15C section 236g, spurious emissions must meet the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08)

Measurement Uncertainty:

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence)

Measurement Type	U_{lab}	U_{ETSI}
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.12 dB	6.00 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 13 GHz)	4.56 dB	6.00 dB

U_{lab} = Determined for Shure EMC Laboratory

U_{ETSI} = From ETSI EN 300 422-1 Table 6

Since U_{lab} is less than or equal to U_{ETSI} :

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
Non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

Test Setup and Instrumentation:

A Shure model WL93 was plugged into the EUT microphone socket. Photographs of the test setup are shown in Figure 1 and Figure 2. The test instrumentation can be determined from Table 10-1.

EUT Operation:

The EUT was powered up and the frequency of the transmitter was selected using the front panel controls. The EUT was checked for proper operation after it was setup on the table. For radiated spurious emissions the testing was conducted with the EUT set to the low, middle, and high frequencies in the low band, and low, and high frequencies of the high band, and at 10mW RF output.




Appendix A

Specific Test Procedures:

All tests were performed in a 28ft. x 20ft. x 18.5ft. 3m semi-anechoic test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All power lines and signal lines entering the enclosure pass through filters on the enclosure wall. The power line filters prevent extraneous signals from entering the enclosure on these leads.

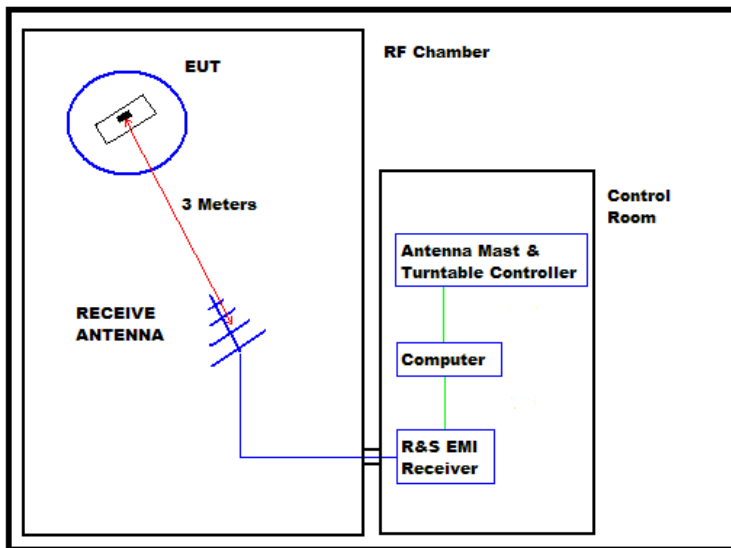

BLOCK DIAGRAM OF SHIELDED ENCLOSURE

Preliminary radiated measurements were performed to determine the frequencies where the significant emissions might be found. With the EUT at one set position and the measurement antenna at a set height (i.e. without maximizing), the radiated emissions were measured using a peak detector and automatically plotted. The BiConiLog measuring antenna was positioned at a 3 meter distance from the EUT.



Appendix A

All significant broadband and narrowband signals found in the preliminary sweeps were then measured using a peak detector at a test distance of 3 meters. The measurements were made with a BiConiLog antenna over the frequency range of 30 MHz to 1 GHz, and a double ridged waveguide antenna over the frequency range of 1 GHz to 10 GHz.

To ensure that maximum emission levels were measured, the following steps were taken:

- i. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
- ii. Since the measuring antennas are linearly polarized, both horizontal and vertical field components were measured.
- iii. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, another antenna was set in place of the EUT and connected to a calibrated signal generator. (A tuned dipole was used for all measurements below 1GHz and a double ridged waveguide antenna was used for all measurements above 1GHz.) The output of the signal generator was adjusted to match the received level at the EMI receiver. The signal level was recorded. The reading was corrected to compensate for cable loss and antenna gain.

Results:

The plots of the peak preliminary radiated voltage levels and maximized quasi-peak radiated voltage levels results are presented on page 13 thru page 42. The ERP measurements are shown on pages 43 thru page 47. All emissions measured from the EUT were within the ETSI EN 300 422-1 specification limits.

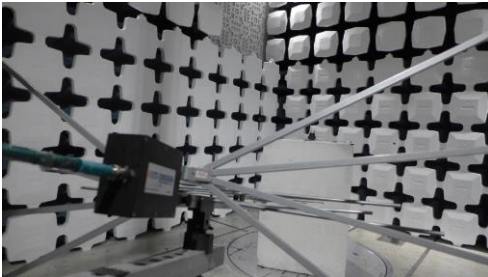


Figure 1: QLXD1 Transmitter Test Setup



Figure 2: QLXD1 Transmitter Test Setup



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 572.125MHz
 Power Level / Mod Mode: 10mW
 Name: Craig Kozokar
 Date Tested: Tested on February 12, 2018

EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 30MHz to 1GHz 79899 EU

Hardware Setup: Electric Field Strength 79899 2017 02 27
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: Compliance Test EN300422 Transmitter 25MHz 1GHz 79899
 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz
 79899 FINAL

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz
 79899 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26]					
25 MHz - 30 MHz	2.25 kHz	PK+ ; QPK	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+ ; QPK	120 kHz	2 s	0 dB



Appendix A

Hardware Setup: EMI radiated\Electric Field Strength 79899 2017 02 27 - [EMI radiated]

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 3.36 SP2,
CAL 5/28/2016

Signal Path: Receiver-EMI to 1 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna 18GHz L23_041_38 8m

Antenna: ETS 3142C 79899
SN 79899, CAL 12/5/2015
Correction Table (vertical): BiconiLog 3142C Hor-79899 2017 02
27
Correction Table (horizontal): BiconiLog 3142C Hor-79899 2017
02 27


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

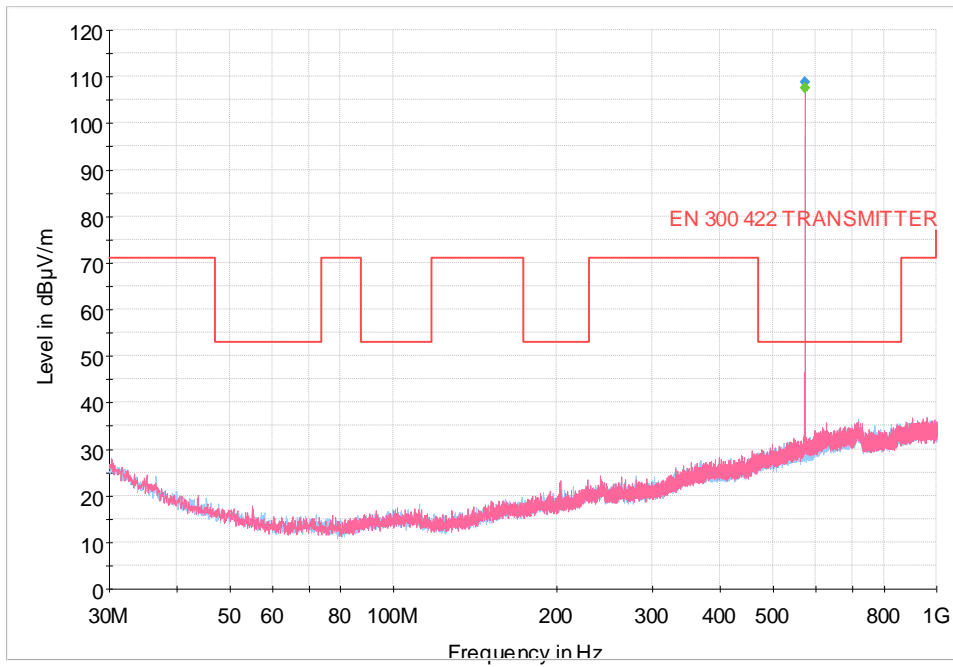

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
572.165333	107.62	53.00	-54.62	---	---	198.0	V	140.0	---	10:11:25 AM - 2/12/2018	---

Final Results

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
572.165333	---	107.54	53.00	-54.54	2000.0	120.000	198.0	V	140.0	20.1	10:11:35 AM - 2/12/2018	---
572.165333	108.77	---	53.00	-55.77	2000.0	120.000	198.0	V	140.0	20.1	10:11:35 AM - 2/12/2018	---



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC 15C Radiated Emissions 1GHz - 10GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 572.125MHz
 Power Level / Mod Mode: 10mW
 Name: Alex Mishinger
 Date Tested: Tested on February 13, 2018

EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 1GHz to 10GHz 3117-PA 200363

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 1 GHz - 10 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m
 Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



Appendix A

Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 2017 10 17 - [EMI radiated]

Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL 5/28/2016

Signal Path: Receiver-EMI to 18 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna TEMP 2016 11 23

Antenna: EMI3117-PA 200385
SN 200385, CAL 10/16/2018
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10 16
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017 10 16
Correction Table (vertical): L23_041_47 Cable
Correction Table (horizontal): L23_041_47 Cable


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

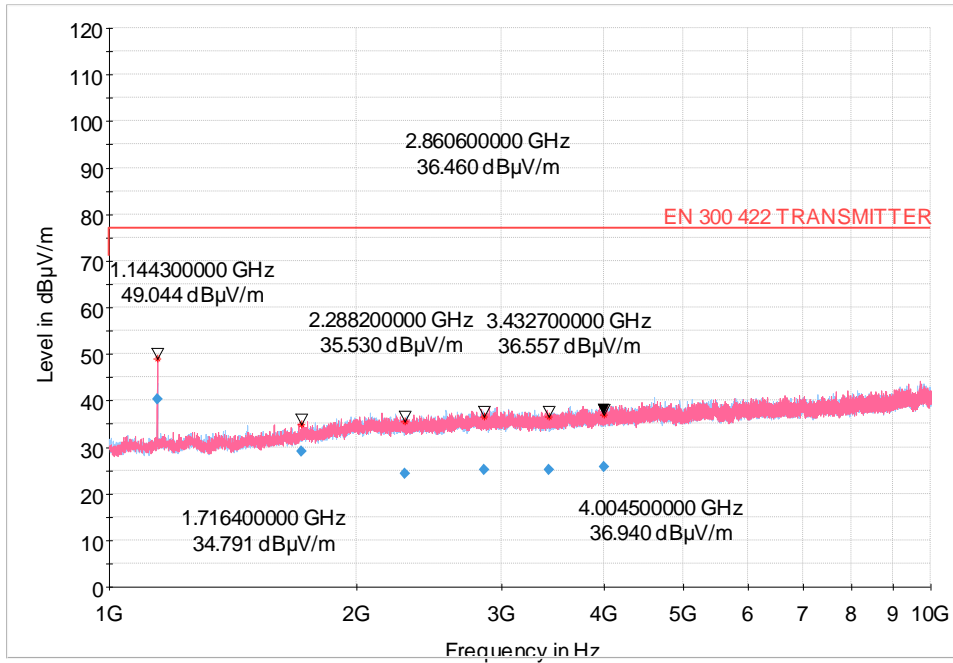

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1144.300000	49.04	77.00	27.96	---	---	181.0	V	265.0	---	1:03:30 PM - 2/13/2018	---
1716.400000	34.79	77.00	42.21	---	---	100.0	V	191.0	---	1:01:11 PM - 2/13/2018	---
2288.200000	35.53	77.00	41.47	---	---	255.0	H	178.0	---	1:00:00 PM - 2/13/2018	---
2860.600000	36.46	77.00	40.54	---	---	225.0	V	241.0	---	1:02:22 PM - 2/13/2018	---
3432.700000	36.56	77.00	40.44	---	---	198.0	H	145.0	---	12:57:38 PM - 2/13/2018	---
4004.500000	36.94	77.00	40.06	---	---	178.0	H	198.0	---	12:58:42 PM - 2/13/2018	---

Final Results

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1144.300000	40.38	77.00	36.62	1000.0	1000.000	181.0	V	265.0	-15.9	1:03:40 PM - 2/13/2018	---
1716.400000	29.06	77.00	47.94	1000.0	1000.000	100.0	V	191.0	-15.0	1:01:21 PM - 2/13/2018	---
2288.200000	24.20	77.00	52.80	1000.0	1000.000	255.0	H	178.0	-12.9	1:00:09 PM - 2/13/2018	---
2860.600000	25.07	77.00	51.93	1000.0	1000.000	225.0	V	241.0	-11.6	1:02:28 PM - 2/13/2018	---
3432.700000	25.05	77.00	51.95	1000.0	1000.000	198.0	H	145.0	-10.8	12:57:47 PM - 2/13/2018	---
4004.500000	25.83	77.00	51.17	1000.0	1000.000	178.0	H	198.0	-8.7	12:58:52 PM - 2/13/2018	---



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 589.500MHz
 Power Level / Mod Mode: 10mW
 Name: Craig Kozokar
 Date Tested: Tested on February 12, 2018

EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 30MHz to 1GHz 79899 EU

Hardware Setup: Electric Field Strength 79899 2017 02 27
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: Compliance Test EN300422 Transmitter 25MHz 1GHz 79899 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26]					
25 MHz - 30 MHz	2.25 kHz	PK+ ; QPK	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+ ; QPK	120 kHz	2 s	0 dB



Appendix A

Hardware Setup: EMI radiated\Electric Field Strength 79899 2017 02 27 - [EMI radiated]

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 3.36 SP2,
CAL 5/28/2016

Signal Path: Receiver-EMI to 1 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna 18GHz L23_041_38 8m

Antenna: ETS 3142C 79899
SN 79899, CAL 12/5/2015
Correction Table (vertical): BiconiLog 3142C Hor-79899 2017 02
27
Correction Table (horizontal): BiconiLog 3142C Hor-79899 2017
02 27


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

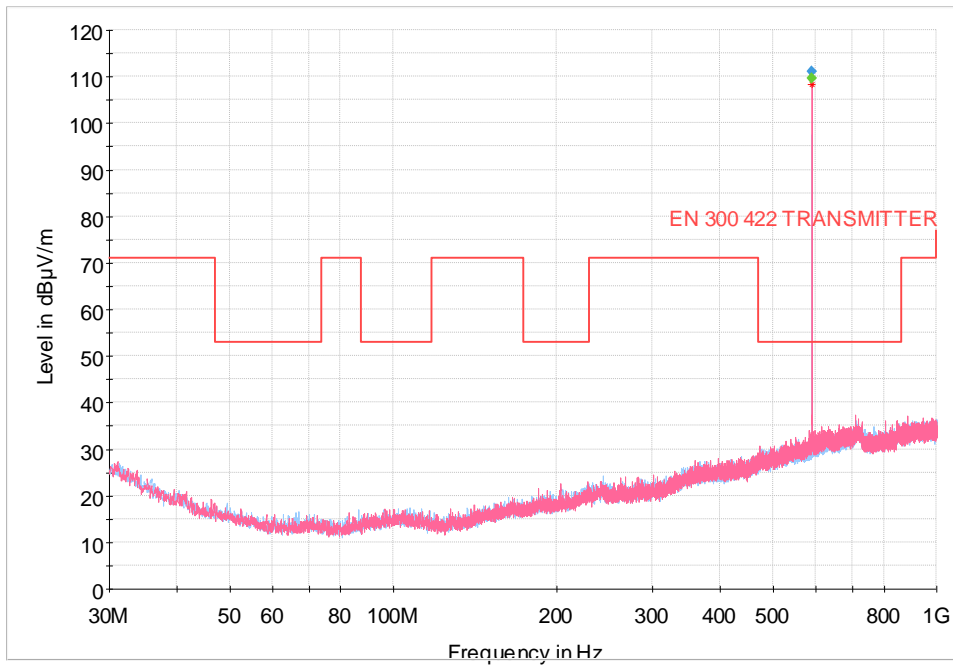

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
589.528333	108.45	53.00	-55.45	---	---	192.0	V	146.0	---	10:40:43 AM - 2/12/2018	---

Final Results

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
589.528333	---	109.60	53.00	-56.60	2000.0	120.000	192.0	V	146.0	20.7	10:40:53 AM - 2/12/2018	---
589.528333	111.01	---	53.00	-58.01	2000.0	120.000	192.0	V	146.0	20.7	10:40:53 AM - 2/12/2018	---



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC 15C Radiated Emissions 1GHz - 10GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 589.500MHz
 Power Level / Mod Mode: 10mW
 Name: Alex Mishinger
 Date Tested: Tested on February 13, 2018

EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 1GHz to 10GHz 3117-PA 200363

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 1 GHz - 10 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 2017 10 17 -
[EMI radiated]**

Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL
5/28/2016

Signal Path: Receiver-EMI to 18 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna TEMP 2016 11 23

Antenna: EMI3117-PA 200385
SN 200385, CAL 10/16/2018
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10
16
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017
10 16
Correction Table (vertical): L23_041_47 Cable
Correction Table (horizontal): L23_041_47 Cable


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

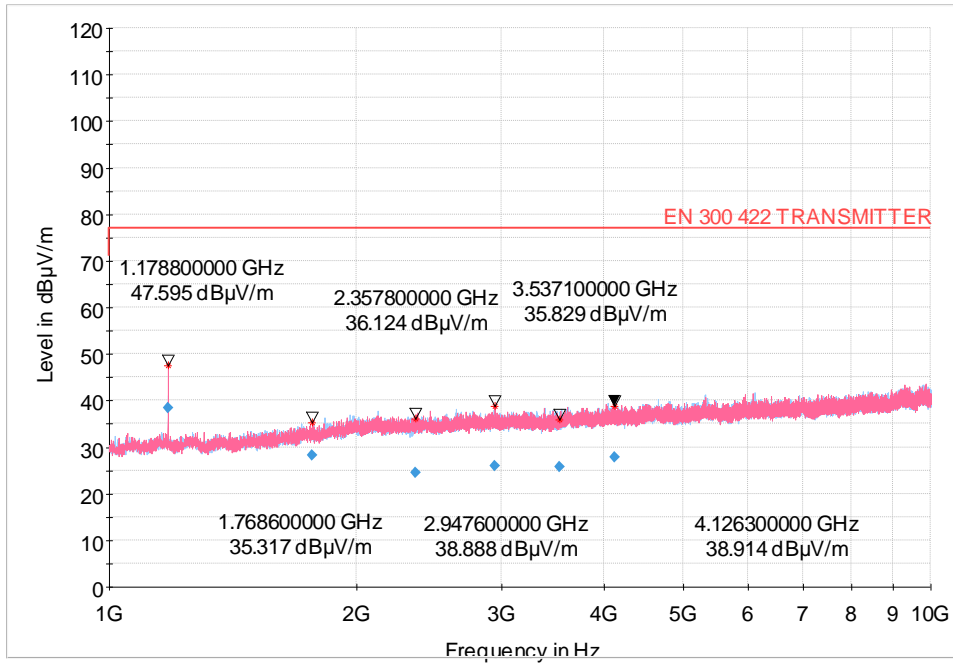

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1178.800000	47.60	77.00	29.40	---	---	199.0	V	319.0	---	1:41:24 PM - 2/13/2018	---
1768.600000	35.32	77.00	41.68	---	---	165.0	V	27.0	---	1:39:54 PM - 2/13/2018	---
2357.800000	36.12	77.00	40.88	---	---	288.0	V	225.0	---	1:45:42 PM - 2/13/2018	---
2947.600000	38.89	77.00	38.11	---	---	380.0	V	21.0	---	1:47:12 PM - 2/13/2018	---
3537.100000	35.83	77.00	41.17	---	---	204.0	V	355.0	---	1:42:25 PM - 2/13/2018	---
4126.300000	38.91	77.00	38.09	---	---	279.0	V	-8.0	---	1:44:09 PM - 2/13/2018	---

Final Results

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1178.800000	38.34	77.00	38.66	1000.0	1000.000	199.0	V	319.0	-15.9	1:41:34 PM - 2/13/2018	---
1768.600000	28.27	77.00	48.73	1000.0	1000.000	165.0	V	27.0	-14.8	1:40:02 PM - 2/13/2018	---
2357.800000	24.50	77.00	52.50	1000.0	1000.000	288.0	V	225.0	-12.6	1:45:52 PM - 2/13/2018	---
2947.600000	25.86	77.00	51.14	1000.0	1000.000	380.0	V	21.0	-11.4	1:47:20 PM - 2/13/2018	---
3537.100000	25.79	77.00	51.21	1000.0	1000.000	204.0	V	356.0	-10.3	1:42:34 PM - 2/13/2018	---
4126.300000	27.88	77.00	49.12	1000.0	1000.000	279.0	V	-8.0	-8.2	1:44:19 PM - 2/13/2018	---



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 606.875MHz
 Power Level / Mod Mode: 10mW
 Name: Alex Mishinger
 Date Tested: Tested on February 12, 2018

EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 30MHz to 1GHz 79899 EU

Hardware Setup: Electric Field Strength 79899 2017 02 27
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: Compliance Test EN300422 Transmitter 25MHz 1GHz 79899 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26]					
25 MHz - 30 MHz	2.25 kHz	PK+ ; QPK	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+ ; QPK	120 kHz	2 s	0 dB



Appendix A

Hardware Setup: EMI radiated\Electric Field Strength 79899 2017 02 27 - [EMI radiated]

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 3.36 SP2,
CAL 5/28/2016

Signal Path: Receiver-EMI to 1 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna 18GHz L23_041_38 8m

Antenna: ETS 3142C 79899
SN 79899, CAL 12/5/2015
Correction Table (vertical): BiconiLog 3142C Hor-79899 2017 02
27
Correction Table (horizontal): BiconiLog 3142C Hor-79899 2017
02 27


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

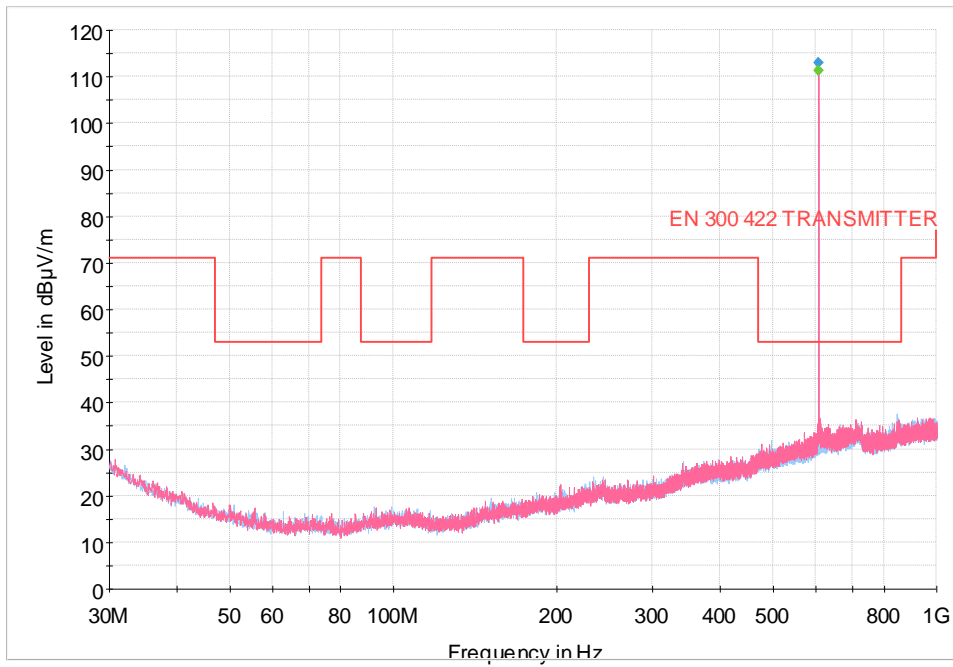

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
606.923667	111.36	53.00	-58.36	---	---	100.0	V	150.0	---	11:33:04 AM - 2/12/2018	---

Final Results

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
606.923667	---	111.31	53.00	-58.31	2000.0	120.000	100.0	V	150.0	21.5	11:33:15 AM - 2/12/2018	---
606.923667	112.86	---	53.00	-59.86	2000.0	120.000	100.0	V	150.0	21.5	11:33:14 AM - 2/12/2018	---



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC 15C Radiated Emissions 1GHz - 10GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 606.875MHz
 Power Level / Mod Mode: 10mW
 Name: Craig Kozokar
 Date Tested: Tested on February 13, 2018

EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 1GHz to 10GHz 3117-PA 200363

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 1 GHz - 10 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 2017 10 17 -
[EMI radiated]**

Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL
5/28/2016

Signal Path: Receiver-EMI to 18 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna TEMP 2016 11 23

Antenna: EMI3117-PA 200385
SN 200385, CAL 10/16/2018
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10
16
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017
10 16
Correction Table (vertical): L23_041_47 Cable
Correction Table (horizontal): L23_041_47 Cable


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

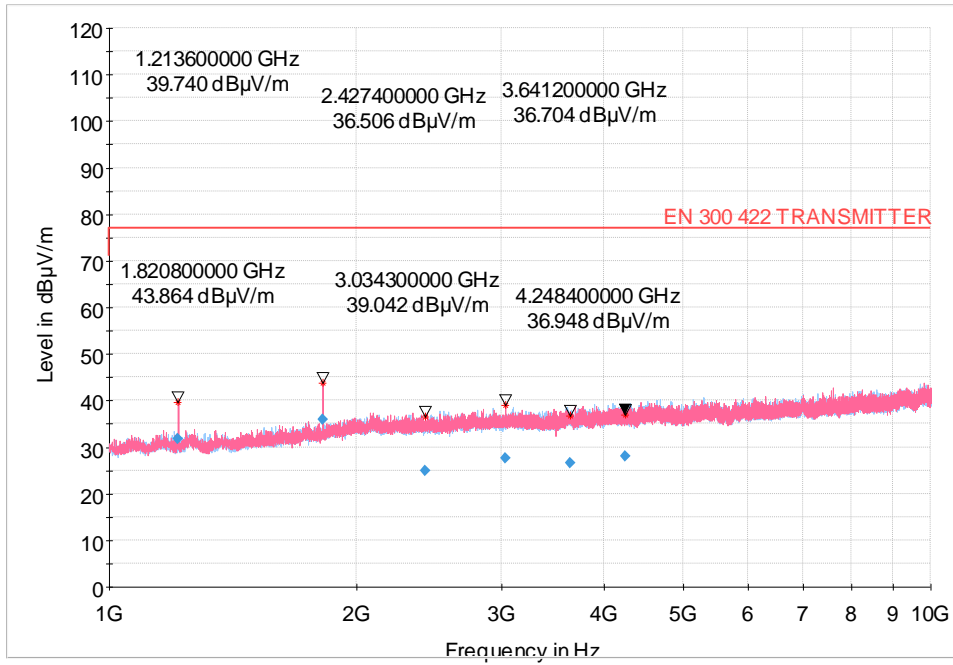

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1213.600000	39.74	77.00	37.26	---	---	297.0	V	277.0	---	9:38:34 AM - 2/13/2018	---
1820.800000	43.86	77.00	33.14	---	---	209.0	V	134.0	---	9:35:04 AM - 2/13/2018	---
2427.400000	36.51	77.00	40.49	---	---	349.0	V	318.0	---	9:39:36 AM - 2/13/2018	---
3034.300000	39.04	77.00	37.96	---	---	299.0	V	43.0	---	9:36:13 AM - 2/13/2018	---
3641.200000	36.70	77.00	40.30	---	---	118.0	V	265.0	---	9:33:37 AM - 2/13/2018	---
4248.400000	36.95	77.00	40.05	---	---	282.0	V	-9.0	---	9:37:18 AM - 2/13/2018	---

Final Results

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1213.600000	31.73	77.00	45.27	1000.0	1000.000	297.0	V	277.0	-15.9	9:38:43 AM - 2/13/2018	---
1820.800000	35.91	77.00	41.09	1000.0	1000.000	209.0	V	134.0	-14.5	9:35:12 AM - 2/13/2018	---
2427.400000	24.85	77.00	52.15	1000.0	1000.000	349.0	V	318.0	-12.6	9:39:45 AM - 2/13/2018	---
3034.300000	27.56	77.00	49.44	1000.0	1000.000	299.0	V	45.0	-11.2	9:36:22 AM - 2/13/2018	---
3641.200000	26.50	77.00	50.50	1000.0	1000.000	118.0	V	265.0	-9.6	9:33:44 AM - 2/13/2018	---
4248.400000	28.07	77.00	48.93	1000.0	1000.000	282.0	V	-9.0	-8.1	9:37:28 AM - 2/13/2018	---



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Conditions: 614.125MHz, 10mW
 Tested on February 12, 2018
 Operator Name: Craig Kozokar

EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 30MHz to 1GHz 79899 EU

Hardware Setup: Electric Field Strength 79899 2017 02 27
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: Compliance Test EN300422 Transmitter 25MHz 1GHz 79899 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26]					
25 MHz - 30 MHz	2.25 kHz	PK+ ; QPK	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+ ; QPK	120 kHz	2 s	0 dB



Appendix A

Hardware Setup: EMI radiated\Electric Field Strength 79899 2017 02 27 - [EMI radiated]

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL
5/28/2016

Signal Path: Receiver-EMI to 1 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna 18GHz L23_041_38 8m

Antenna: ETS 3142C 79899
SN 79899, CAL 12/5/2015
Correction Table (vertical): BiconiLog 3142C Hor-79899 2017 02
27
Correction Table (horizontal): BiconiLog 3142C Hor-79899 2017
02 27


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

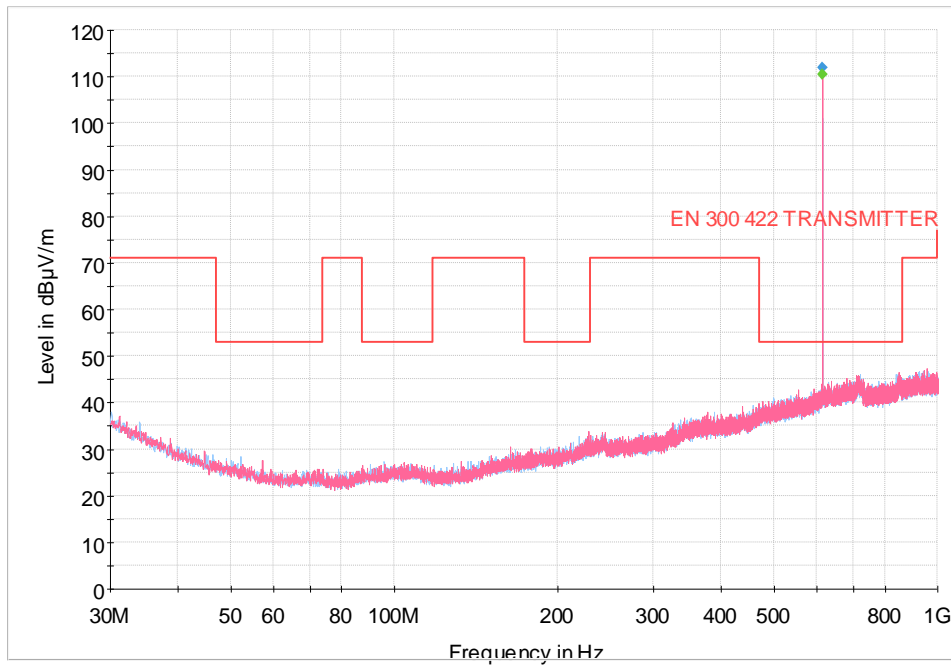

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	DET 2 (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
614.166333	110.74	---	53.00	-57.74	---	---	100.0	V	145.0	21.7	8:42:45 AM - 2/12/2018

Final Results

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
614.166333	---	110.54	---	---	2000.0	120.000	100.0	V	145.0	21.7	8:42:56 AM - 2/12/2018
614.166333	111.96	---	53.00	-58.96	2000.0	120.000	100.0	V	145.0	21.7	8:42:56 AM - 2/12/2018



Appendix A

SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC15C Radiated Emissions 1GHz - 10GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 614.125MHz
 Power Level / Mod Mode: 10mW
 Name: Craig Kozokar
 Comments: Tested on February 13, 2018

EMI Auto Test Template: COMPLIANCE TEST FCC 15C 1GHz to 10GHz 3117-PA 200363 FCC

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 1 GHz - 10 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



Appendix A

Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 - [EMI radiated]

Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL 5/28/2016

Signal Path: Receiver-EMI to 18 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna TEMP 2016 11 23

Antenna: EMI3117-PA 200385
SN 200385, CAL 10/16/2018
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10 16
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017 10 16
Correction Table (vertical): L23_041_47 Cable
Correction Table (horizontal): L23_041_47 Cable


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

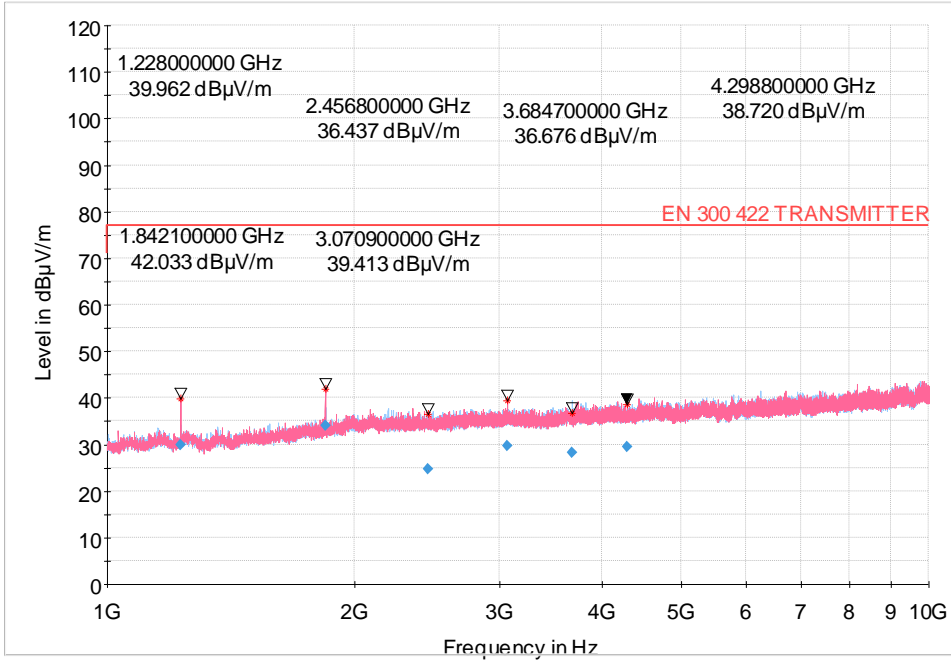

Critical Frequencies

Frequency (MHz)	MaxPeak (dBµV/m)	DET 2 (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
1228.000000	39.96	---	77.00	37.04	---	---	306.0	V	8.0	-15.8	11:41:29 AM - 2/13/2018
1842.100000	42.03	---	77.00	34.97	---	---	255.0	V	114.0	-14.4	11:40:16 AM - 2/13/2018
2456.800000	36.44	---	77.00	40.56	---	---	260.0	H	155.0	-12.5	11:38:59 AM - 2/13/2018
3070.900000	39.41	---	77.00	37.59	---	---	301.0	V	10.0	-11.1	11:42:30 AM - 2/13/2018
3684.700000	36.68	---	77.00	40.32	---	---	353.0	V	10.0	-9.5	11:45:36 AM - 2/13/2018
4298.800000	38.72	---	77.00	38.28	---	---	279.0	V	7.0	-8.3	11:44:30 AM - 2/13/2018

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
1228.000000	29.82	77.00	47.18	1000.0	1000.000	306.0	V	8.0	-15.8	11:41:37 AM - 2/13/2018
1842.100000	34.03	77.00	42.97	1000.0	1000.000	255.0	V	114.0	-14.4	11:40:24 AM - 2/13/2018
2456.800000	24.68	77.00	52.32	1000.0	1000.000	260.0	H	155.0	-12.5	11:39:07 AM - 2/13/2018
3070.900000	29.67	77.00	47.33	1000.0	1000.000	301.0	V	10.0	-11.1	11:42:38 AM - 2/13/2018
3684.700000	28.16	77.00	48.84	1000.0	1000.000	353.0	V	10.0	-9.5	11:45:45 AM - 2/13/2018
4298.800000	29.40	77.00	47.60	1000.0	1000.000	279.0	V	7.0	-8.3	11:44:40 AM - 2/13/2018



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 615.875MHz
 Power Level / Mod Mode: 10mW
 Name: Craig Kozokar
 Comments: Tested on February 12, 2018

EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 25MHz to 1GHz 79899 EU

Hardware Setup: Electric Field Strength 79899 2017 02 27
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 25 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: Compliance Test EN300422 Transmitter 25MHz 1GHz 79899 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
25 MHz - 30 MHz	2.25 kHz	PK+	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+	120 kHz	1 s	0 dB

Receiver: [ESR 26]



Appendix A

Hardware Setup: EMI radiated\Electric Field Strength 79899 2017 02 27 - [EMI radiated]

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 3.36 SP2,
CAL 5/28/2016

Signal Path: Receiver-EMI to 1 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna 18GHz L23_041_38 8m

Antenna: ETS 3142C 79899
SN 79899, CAL 12/5/2015
Correction Table (vertical): BiconiLog 3142C Hor-79899 2017 02
27
Correction Table (horizontal): BiconiLog 3142C Hor-79899 2017
02 27


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

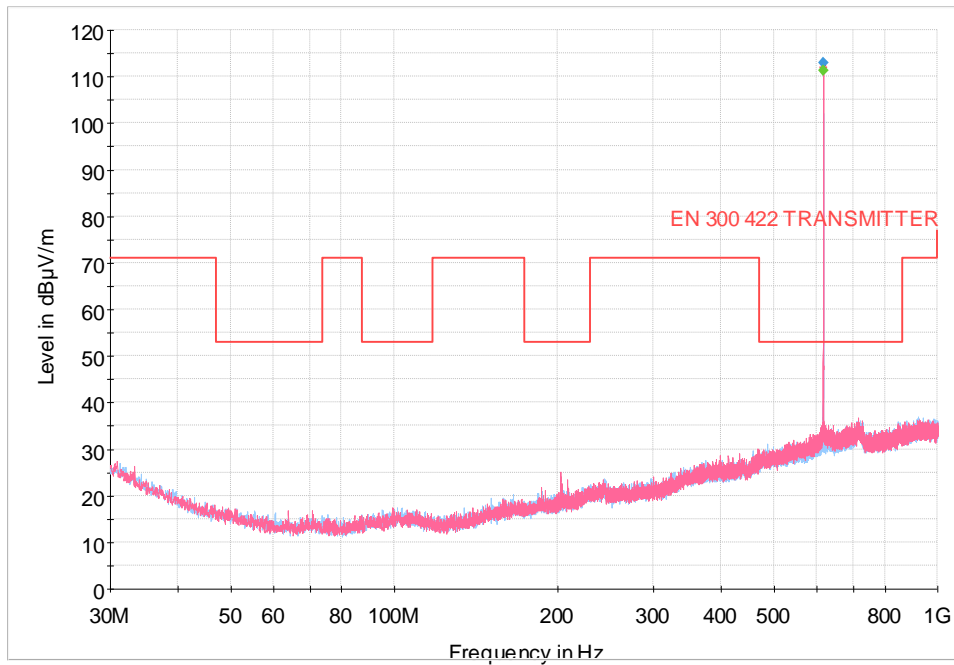

Critical Frequencies

Frequency (MHz)	MaxPeak (dBµV/m)	DET 2 (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
615.847667	112.06	---	53.00	-59.06	---	---	181.0	V	306.0	21.8	9:42:18 AM - 2/12/2018

Final Frequencies

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
615.847667	---	111.38	53.00	-58.38	2000.0	120.000	181.0	V	306.0	21.8	9:42:29 AM - 2/12/2018
615.847667	112.99	---	53.00	-59.99	2000.0	120.000	181.0	V	306.0	21.8	9:42:29 AM - 2/12/2018



SHURE Radiated RF Emissions Test Report

Common Information

Test Description: FCC15C Radiated Emissions 1GHz - 10GHz
 EUT: QLXD1 J50A
 Serial Number: # 1
 Operating Frequency: 615.875MHz
 Power Level / Mod Mode: 10mW
 Name: Craig Kozokar
 Comments: Tested on February 13, 2018

EMI Auto Test Template: COMPLIANCE TEST EN300422 Transmitter 1GHz to 10GHz 3117-PA 200363 EU

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17
 Measurement Type: Open-Area-Test-Site
 Frequency Range: 1 GHz - 10 GHz
 Graphics Level Range: 0 dB μ V/m - 120 dB μ V/m
 Preview Measurements:
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6
 Polarization: H + V
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:
 Antenna height: Range = 50 cm , Measuring Speed = 1
 Turntable position: Range = 90 deg , Measuring Speed = 5
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



Appendix A

Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 - [EMI radiated]

Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL 5/28/2016

Signal Path: Receiver-EMI to 18 GHz
FW 1.0
Correction Table: Receiver-EMI Antenna TEMP 2016 11 23

Antenna: EMI3117-PA 200385
SN 200385, CAL 10/16/2018
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10 16
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017 10 16
Correction Table (vertical): L23_041_47 Cable
Correction Table (horizontal): L23_041_47 Cable


Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

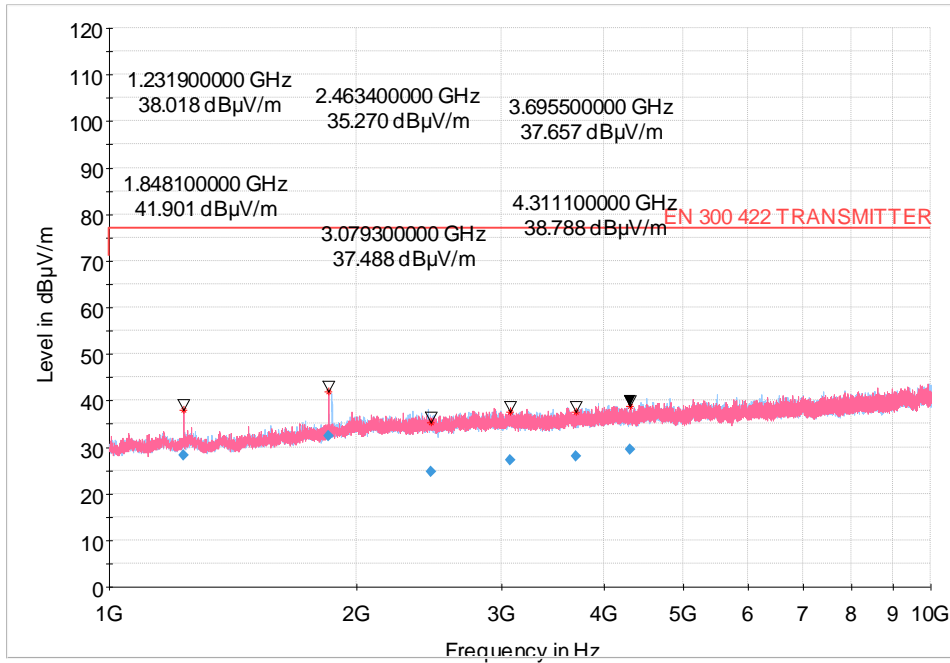

Critical Frequencies

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1231.900000	38.02	77.00	38.98	---	---	302.0	V	111.0	---	12:18:17 PM - 2/13/2018	---
1848.100000	41.90	77.00	35.10	---	---	248.0	V	116.0	---	12:14:47 PM - 2/13/2018	---
2463.400000	35.27	77.00	41.73	---	---	391.0	H	57.0	---	12:12:08 PM - 2/13/2018	---
3079.300000	37.49	77.00	39.51	---	---	162.0	V	-7.0	---	12:13:35 PM - 2/13/2018	---
3695.500000	37.66	77.00	39.34	---	---	295.0	V	-10.0	---	12:16:04 PM - 2/13/2018	---
4311.100000	38.79	77.00	38.21	---	---	275.0	V	5.0	---	12:17:02 PM - 2/13/2018	---

Final Frequencies

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1231.900000	28.14	77.00	48.86	1000.0	1000.000	302.0	V	111.0	-15.8	12:18:26 PM - 2/13/2018	---
1848.100000	32.41	77.00	44.59	1000.0	1000.000	248.0	V	116.0	-14.4	12:14:56 PM - 2/13/2018	---
2463.400000	24.69	77.00	52.31	1000.0	1000.000	391.0	H	57.0	-12.5	12:12:16 PM - 2/13/2018	---
3079.300000	27.24	77.00	49.76	1000.0	1000.000	162.0	V	-7.0	-11.1	12:13:44 PM - 2/13/2018	---
3695.500000	27.97	77.00	49.03	1000.0	1000.000	295.0	V	-10.0	-9.5	12:16:14 PM - 2/13/2018	---
4311.100000	29.38	77.00	47.62	1000.0	1000.000	275.0	V	5.0	-8.3	12:17:12 PM - 2/13/2018	---



Appendix A

Date: February 27, 2018
EUT: QLXD1
Band: J50A
Serial Number: # 1
Specification: EN 300 422-1, Spurious Radiated Emissions
Comments: Test Distance is 3 meters
Mode: EUT set to LOW 572.125 MHz
Tested By: Alex Mishinger, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1144.250	Average	H	40.38	-57.0	3.7	3.29	-56.6	-30
1144.250	Average	V	40.38	-57.0	3.7	3.29	-56.6	-30
1716.375	Average	H	29.06	-59.1	5.4	3.55	-57.3	-30
1716.275	Average	V	29.06	-59.1	5.4	3.55	-57.3	-30
2288.500	Average	H	24.20	-66.0	5.4	4.14	-64.7	-30
2288.500	Average	V	24.20	-66.0	5.4	4.14	-64.7	-30
2860.625	Average	H	25.07	-77.0	6.8	4.42	-74.6	-30
2860.625	Average	V	25.07	-77.0	6.8	4.42	-74.6	-30
3432.750	Average	H	25.05	-75.0	8.0	4.80	-71.8	-30
3432.750	Average	V	25.05	-75.0	8.0	4.80	-71.8	-30
4004.875	Average	H	25.83	-72.0	8.9	5.21	-68.3	-30
4004.875	Average	V	25.83	-72.0	8.9	5.21	-68.3	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



Appendix A

Date: February 27, 2018
EUT: QLXD1
Band: J50A
Serial Number: # 1
Specification: EN 300 422-1, Spurious Radiated Emissions
Comments: Test Distance is 3 meters
Mode: EUT set to Middle 589.500 MHz
Tested By: Alex Mishinger, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1179.000	Average	H	38.34	-72.0	3.7	3.76	-72.1	-30
1179.000	Average	V	38.34	-72.0	3.7	3.76	-72.1	-30
1768.500	Average	H	28.27	-73.0	5.4	3.76	-71.4	-30
1768.500	Average	V	28.27	-73.0	5.4	3.76	-71.4	-30
2358.000	Average	H	24.50	-72.0	5.5	4.11	-70.6	-30
2358.000	Average	V	24.50	-72.0	5.5	4.11	-70.6	-30
2947.500	Average	H	25.86	-71.0	6.9	4.60	-68.7	-30
2947.500	Average	V	25.86	-71.0	6.9	4.60	-68.7	-30
3537.000	Average	H	25.79	-69.0	8.1	4.69	-65.6	-30
3537.000	Average	V	25.79	-69.0	8.1	4.69	-65.6	-30
4126.500	Average	H	27.88	-69.0	9.0	5.16	-65.2	-30
4126.500	Average	V	27.88	-69.0	9.0	5.16	-65.2	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



Appendix A

Date: February 27, 2018
EUT: QLXD1
Band: J50A
Serial Number: # 1
Specification: EN 300 422-1, Spurious Radiated Emissions
Comments: Test Distance is 3 meters
Mode: EUT set to High 606.875 MHz
Tested By: Alex Mishinger, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1213.750	Average	H	31.73	-71.0	3.7	3.03	-70.3	-30
1213.750	Average	V	31.73	-71.0	3.7	3.03	-70.3	-30
1820.625	Average	H	35.91	-70.0	5.3	3.56	-68.3	-30
1820.625	Average	V	35.91	-70.0	5.3	3.56	-68.3	-30
2427.500	Average	H	24.85	-70.0	5.4	3.97	-68.6	-30
2427.500	Average	V	24.85	-70.0	5.4	3.97	-68.6	-30
3034.375	Average	H	27.56	-70.0	7.0	4.68	-67.7	-30
3034.375	Average	V	27.56	-70.0	7.0	4.68	-67.7	-30
3641.250	Average	H	26.50	-71.0	8.2	5.06	-67.9	-30
3641.250	Average	V	26.50	-71.0	8.2	5.06	-67.9	-30
4248.125	Average	H	28.07	-68.0	9.3	5.40	-64.1	-30
4248.125	Average	V	28.07	-68.0	9.3	5.40	-64.1	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



Appendix A

Date: February 27, 2018
EUT: QLXD1
Band: J50A
Serial Number: # 1
Specification: EN 300 422-1, Spurious Radiated Emissions
Comments: Test Distance is 3 meters
Mode: EUT set to LOW 614.125 MHz
Tested By: Craig Kozokar, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1228.250	Average	H	29.82	-82.0	3.8	2.86	-82.9	-30
1228.250	Average	V	29.82	-82.0	3.8	2.86	-82.9	-30
1842.375	Average	H	34.03	-82.0	5.3	3.63	-80.3	-30
1842.275	Average	V	34.03	-82.0	5.3	3.63	-80.3	-30
2456.500	Average	H	24.68	-80.0	6.0	4.18	-78.2	-30
2456.500	Average	V	24.68	-80.0	6.0	4.18	-78.2	-30
3070.625	Average	H	29.67	-82.0	7.0	4.34	-79.3	-30
3070.625	Average	V	29.67	-82.0	7.0	4.34	-79.3	-30
3684.750	Average	H	28.16	-80.0	8.2	4.99	-76.8	-30
3684.750	Average	V	28.16	-80.0	8.2	4.99	-76.8	-30
4298.875	Average	H	29.40	-81.0	9.3	5.23	-76.9	-30
4298.875	Average	V	29.40	-81.0	9.3	5.23	-76.9	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



Appendix A

Date: February 27, 2018
EUT: QLXD1
Band: J50A
Serial Number: # 1
Specification: EN 300 422-1, Spurious Radiated Emissions
Comments: Test Distance is 3 meters
Mode: EUT set to HIGH 615.875 MHz
Tested By: Craig Kozokar, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1231.750	Average	H	29.60	-82.0	3.8	3.79	-82.0	-30
1231.750	Average	V	29.60	-82.0	3.8	3.79	-82.0	-30
1847.625	Average	H	26.89	-82.0	5.3	3.53	-80.2	-30
1847.625	Average	V	26.89	-82.0	5.3	3.53	-80.2	-30
2463.500	Average	H	26.10	-80.0	6.0	4.23	-78.2	-30
2463.500	Average	V	26.10	-80.0	6.0	4.23	-78.2	-30
3079.375	Average	H	25.99	-84.0	7.0	4.37	-81.4	-30
3079.375	Average	V	25.99	-84.0	7.0	4.37	-81.4	-30
3695.250	Average	H	25.86	-82.0	8.2	5.00	-78.8	-30
3695.250	Average	V	25.86	-82.0	8.2	5.00	-78.8	-30
4311.125	Average	H	26.42	-81.0	9.3	5.55	-77.3	-30
4311.125	Average	V	26.42	-81.0	9.3	5.55	-77.3	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



Appendix B

B. Maximum Radiated Power

Purpose:

This test performed to determine if the EUT meets the Maximum Radiated Power requirements of the FCC Part15C, Section 15.236.

Requirements:

As stated in FCC 15C Section 15.236 (6)(2), the maximum radiated power in the 600MHz guard band and the 600MHz duplex gap: 20mW EIRP.

Measurement Uncertainty:

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence)

Measurement Type	U_{lab}
Conducted measurements (30 MHz – 1000 MHz)	1.24 dB

U_{lab} = Determined for Shure EMC Laboratory

Since U_{lab} is less than or equal to U_{ETSI} :

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
Non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

Test Setup and Instrumentation:

Photographs of the test setup are shown in Figure 1. The test instrumentation can be determined from Table 10-1.

EUT Operation:

The EUT was powered up and the frequency of the transmitter was selected using the front panel controls. For rated output power, the testing was conducted with the EUT set to the low, middle, and high frequency in the low band, and low and high frequencies in the high band, within the operating frequency range, and at 10mW RF output.



Appendix B

Specific Test Procedures:

The output of the EUT was connected to a spectrum analyzer through 20dB of attenuation. The EUT was set to transmit on the low, middle, and high frequencies in the low band and low and high frequencies in the high band. The channel power was measured.

The spectrum analyzer was set to:

- RBW 10kHz
- VBW 100kHz
- Channel BW 200kHz
- Span 1MHz
- Detector Average
- State Average

Results:

The EIRP for all frequencies measured meets the FCC15C 15.236 requirements.

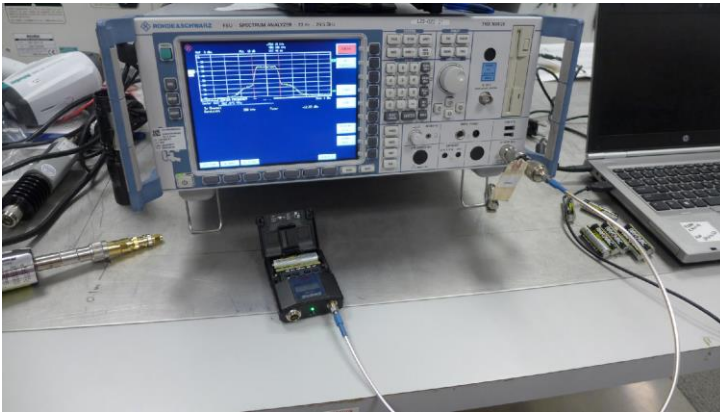


Figure 1: Test setup for Maximum Radiated Output



Appendix B

Test Information

EUT Name: QLXD1 J50A
 Serial Number: # 1
 Test Description: Maximum Rated Output
 Operating Conditions: Low Frequency, 572.125MHz, 10mW
 Operator Name: Craig Kozokar
 Comment: FCC Part15C, Section 15.236
 Date Tested: Tested on March 8, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+8.53	0.30	0.40	9.23	13.00	3.77

EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)

Measured QLXD1 J50A antenna gain is 0.30dBi

Test Information

EUT Name: QLXD1 J50A
 Serial Number: # 1
 Test Description: Maximum Rated Output
 Operating Conditions: Middle Frequency, 589.500MHz, 10mW
 Operator Name: Craig Kozokar
 Comment: FCC Part15C, Section 15.236
 Date Tested: Tested on March 8, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+8.43	0.30	0.40	9.13	13.00	3.87

EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)

Measured QLXD1 J50A antenna gain is 0.30dBi



Appendix B

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: Maximum Rated Output
Operating Conditions: High Frequency, 606.875MHz, 10mW
Operator Name: Craig Kozokar
Comment: FCC Part15C, Section 15.236
Date Tested: Tested on March 8, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+8.23	0.30	0.40	8.93	13.00	4.07

EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)

Measured QLXD1 J50A antenna gain is 0.30dBi



Appendix B

Test Information

EUT Name: QLXD1 J50A
 Serial Number: # 1
 Test Description: Maximum Rated Output
 Operating Conditions: Low Frequency, 614.125MHz, 10mW
 Operator Name: Craig Kozokar
 Comment: FCC Part15C, Section 15.236
 Date Tested: Tested on March 8, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+8.13	0.30	0.40	8.83	13.00	4.17

EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)

Measured QLXD1 J50A antenna gain is 0.30dBi

Test Information

EUT Name: QLXD1 J50A
 Serial Number: # 1
 Test Description: Maximum Rated Output
 Operating Conditions: High Frequency, 615.875MHz, 10mW
 Operator Name: Craig Kozokar
 Comment: FCC Part15C, Section 15.236
 Date Tested: Tested on March 8, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+8.13	0.30	0.40	8.83	13.00	4.17

EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)

Measured QLXD1 J50A antenna gain is 0.30dBi



Appendix C

NECESSARY BANDWIDTH MEASUREMENTS

C.1 PURPOSE

This test was performed to determine if the EUT meets the necessary bandwidth requirements of EN 300 422-1, section 8.3.3., with the EUT operating at 572.125MHz, 589.500MHz, 606.875MHz, 614.125MHz and 615.875MHz.

C.2 REQUIREMENTS

As stated in EN 300 422-1, section 8.3.3, the emission mask given in section 8.3.3.2 shall not be exceeded.

C.3 TEST SETUP AND INSTRUMENTATION

A photograph of the test setup is shown in Figure B-1. The test instrumentation can be determined from Table 10-1.

C.4 MEASUREMENT UNCERTAINTY

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence):

Measurement Type	U_{LAB}
Necessary Bandwidth	±0.130 %

U_{lab} = Determined for Shure EMC Laboratory

Since U_{LAB} is less than or equal to U_{ETSI} :

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

C.5 EUT OPERATION

The EUT was powered up and the transmit frequency and power output of the EUT were selected. The EUT was checked for proper operation after it was setup for the test. Testing was conducted with the EUT set to transmit at 572.125MHz, 589.500MHz, 606.875MHz, 614.125 and 615.875 MHz, at an output power level of 1mW and 10mW. The transmitter was modulated per EN300422-1 V1.4.2 (2011-08), clause 7.1.2.

C.6 TEST PROCEDURE

The test procedure followed is shown in EN300422-1 V1.4.2 (2011-08), section 8.3.3.1.



Appendix C

C.7 RESULTS

The necessary bandwidth data is presented on pages 55 and 84. Data is shown on the figures for each transmitter. The figure shows the maximum relative level within the emission mask with modulation. As shown by the test data, the necessary bandwidth of the EUT meets the requirements of EN 300 422-1, section 8.3.3.

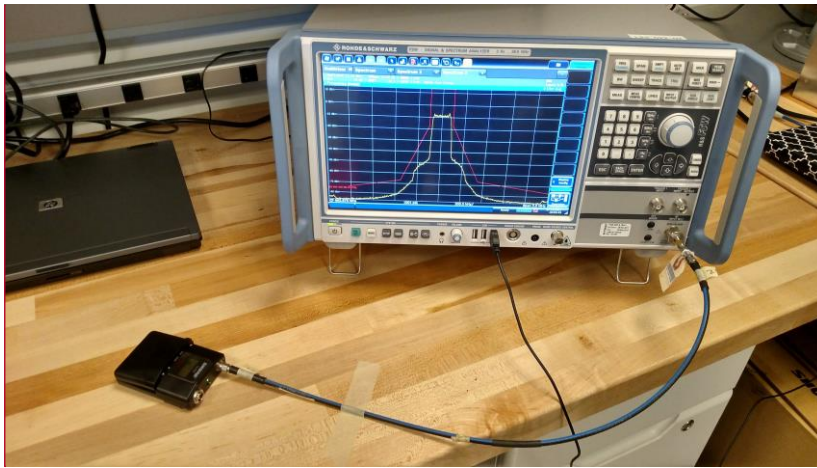


Figure B-1 - Test Setup for Necessary Bandwidth


Commented [KC1]:
Commented [KC2R1]:



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: #1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 572.125MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

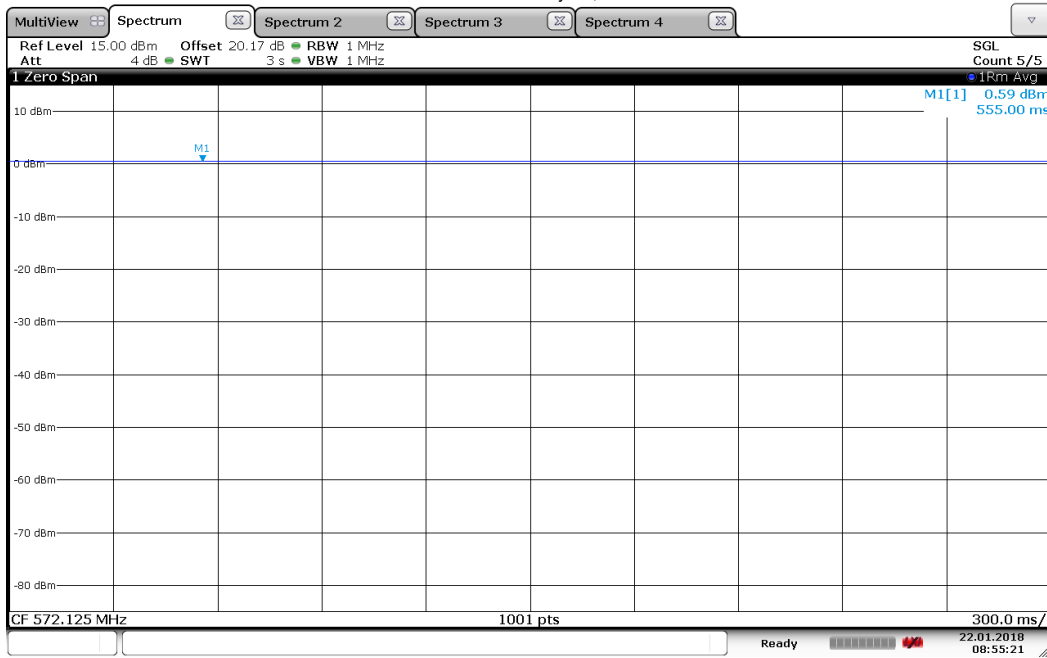


08:55:22 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: #1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 572.125MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 22, 2018

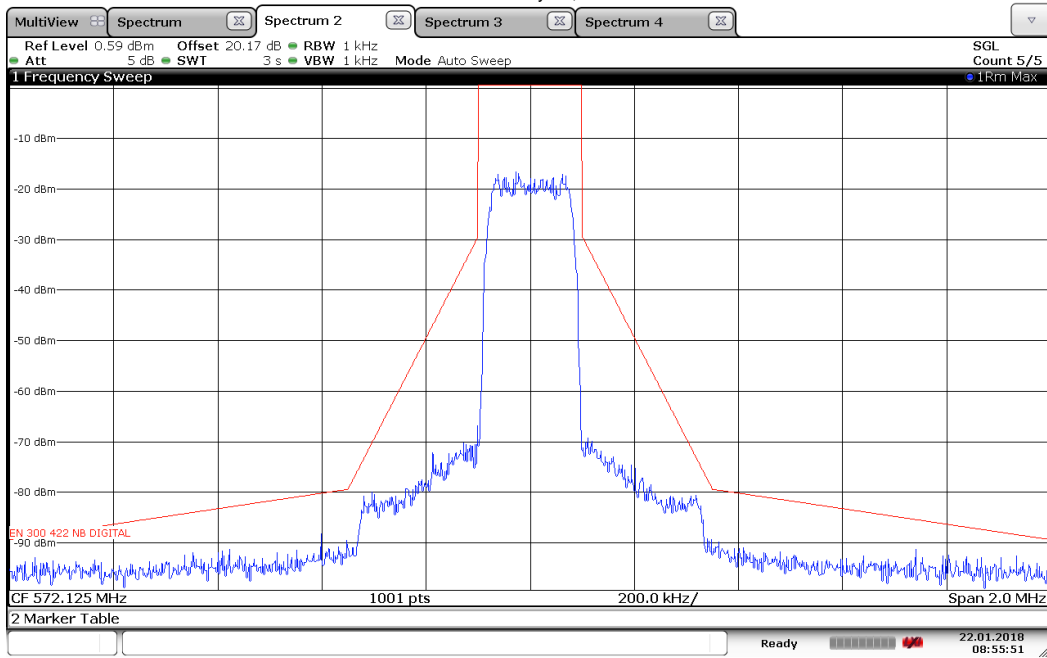


08:55:52 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: #1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 572.125MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3; Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 22, 2018

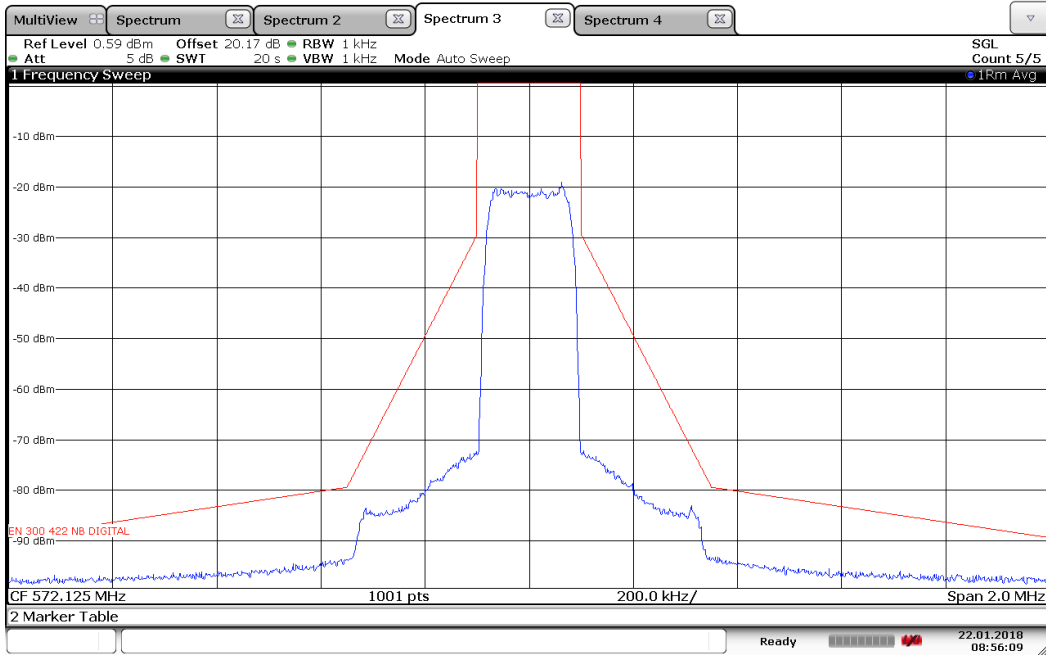


08:56:10 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 572.125MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 19, 2018

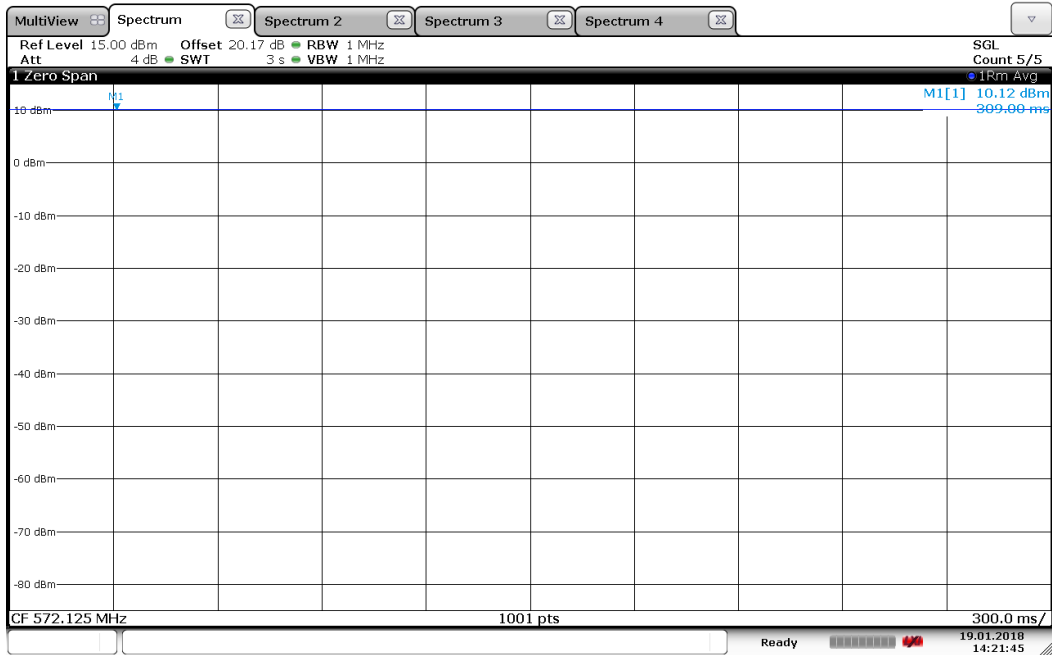


14:21:46 19.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 572.125MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 19, 2018

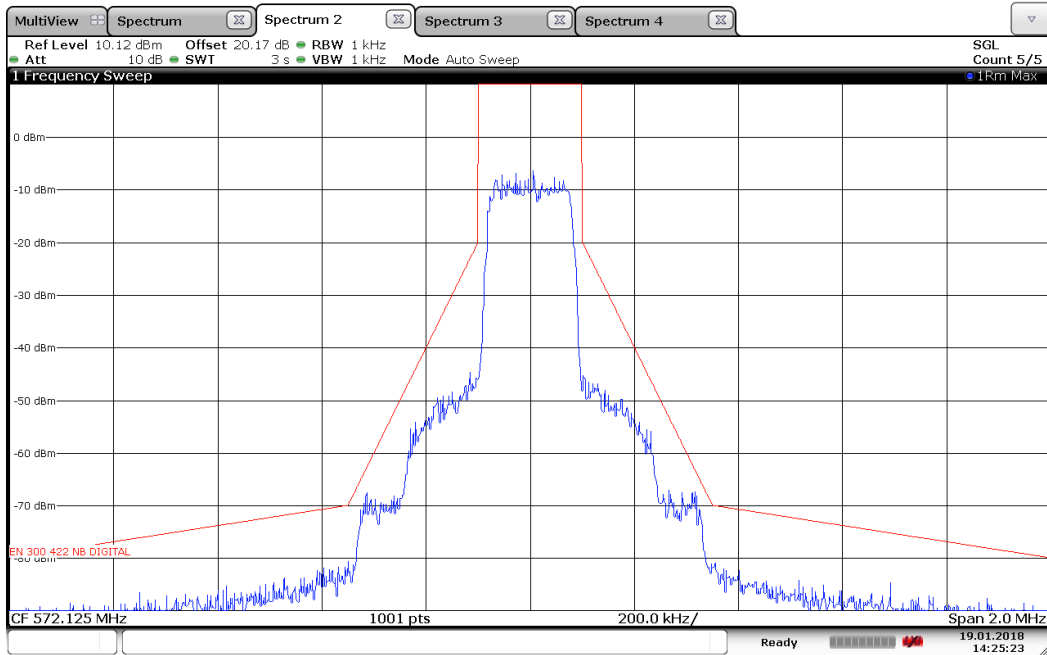


14:25:24 19.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 572.125MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 19, 2018

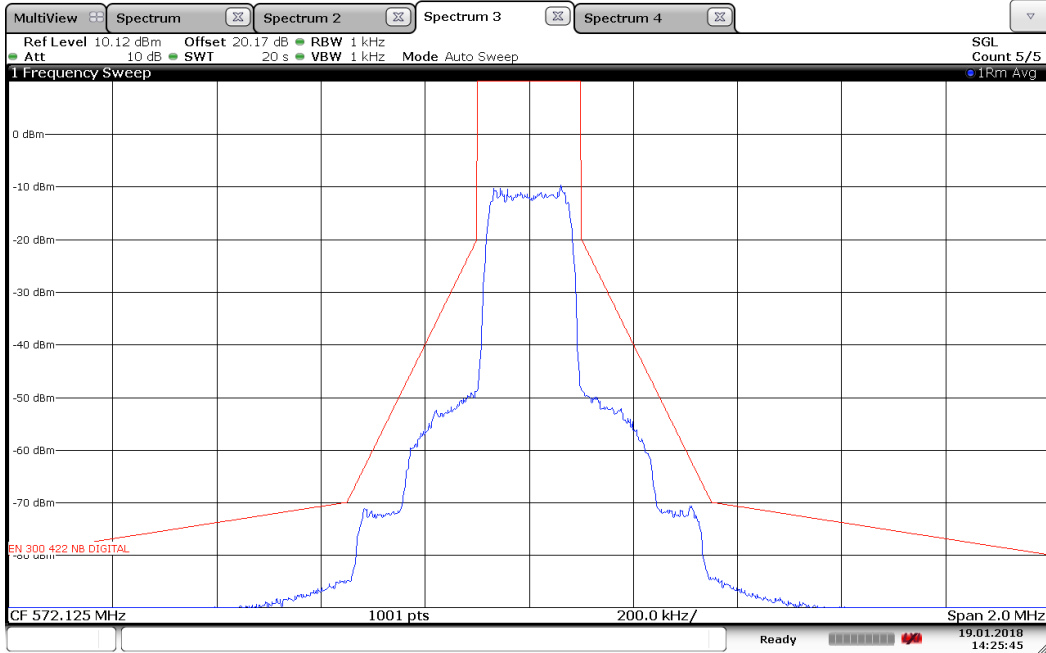


14:25:45 19.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Middle Frequency, 589.500MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

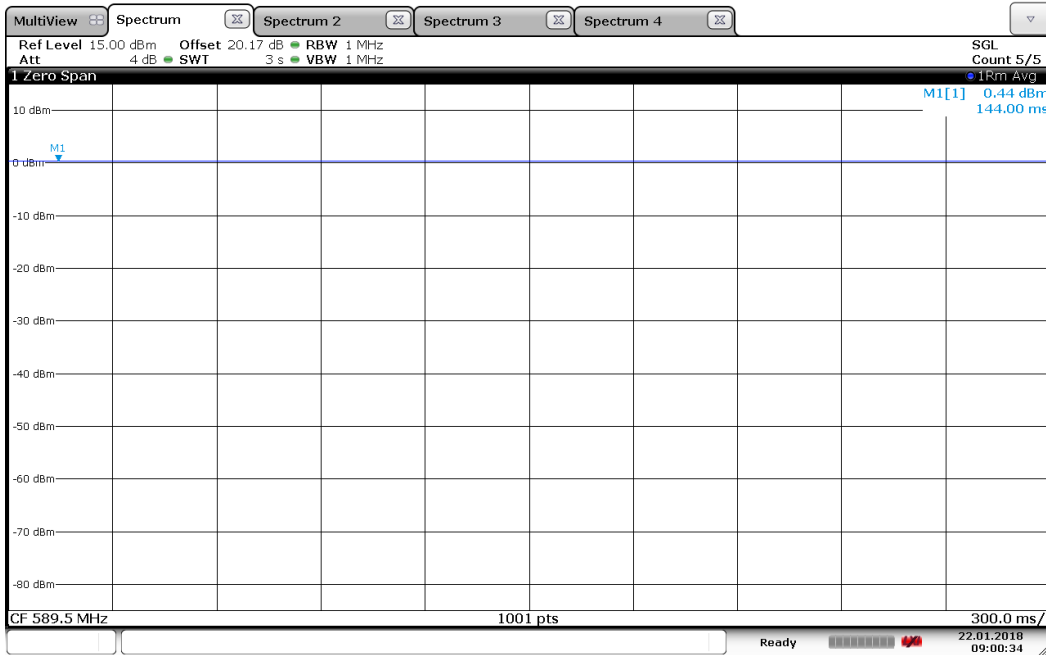


09:00:34 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: #1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Middle Frequency, 589.500MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 22, 2018

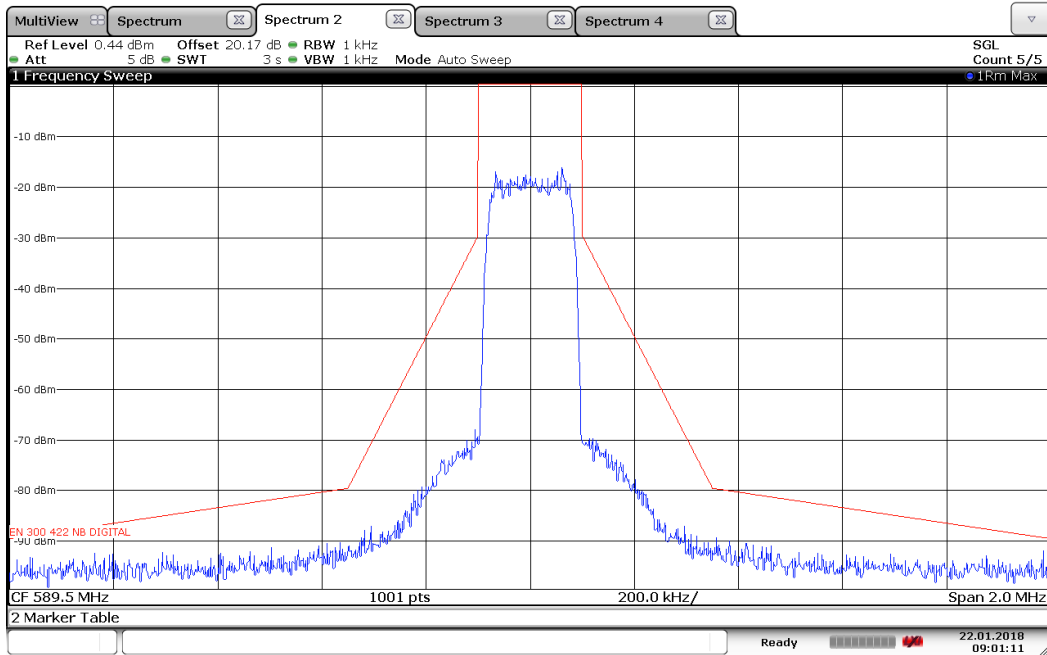


09:01:12 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Middle Frequency, 589.500MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3; Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 22, 2018

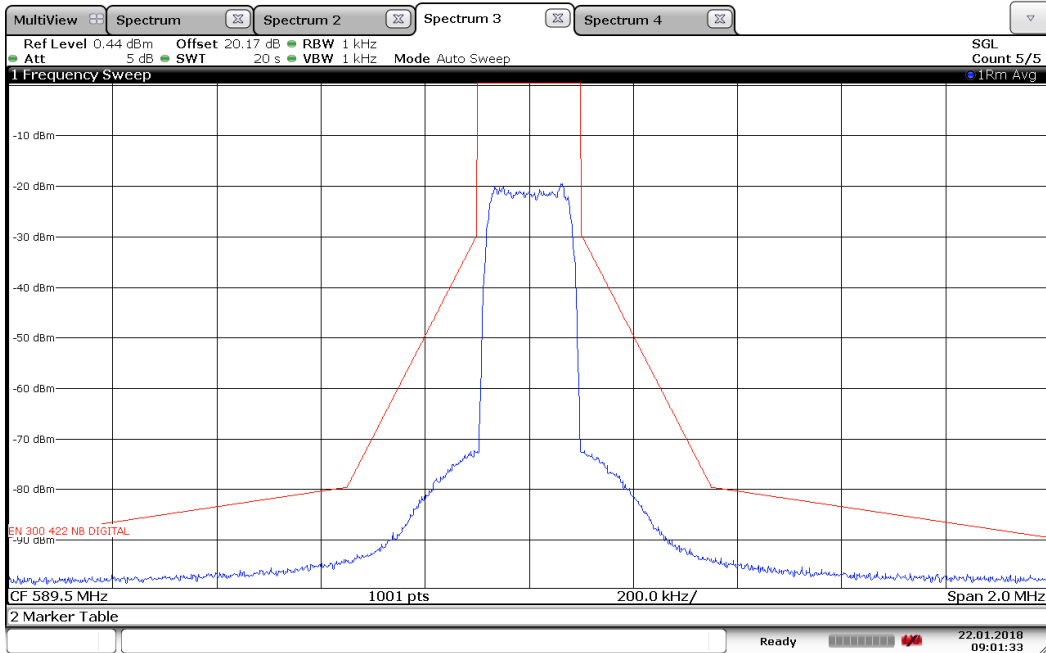


09:01:33 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Middle Frequency, 589.500MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

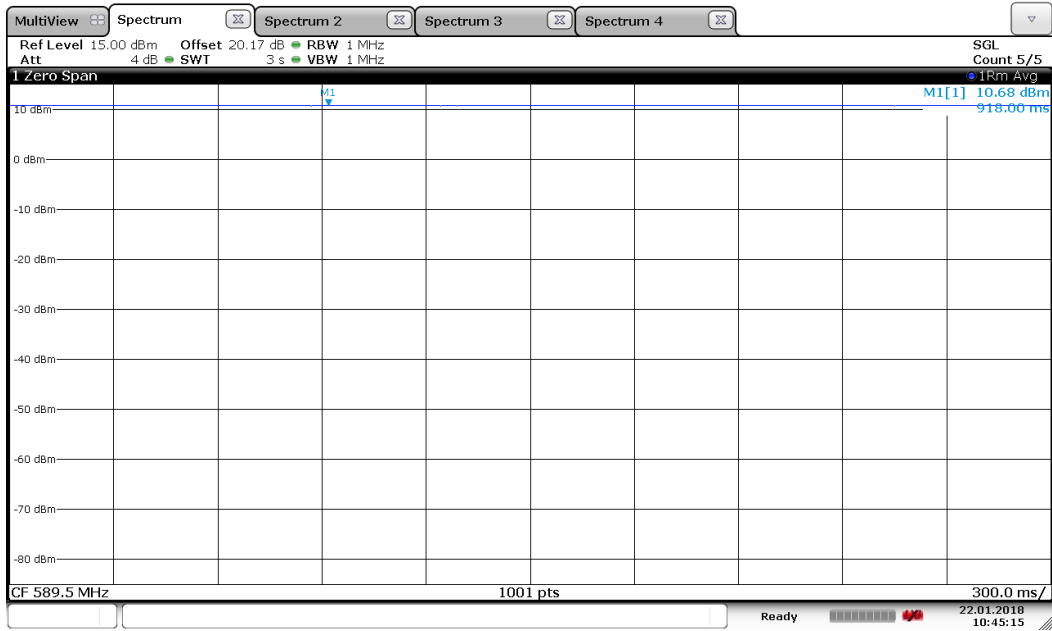


10:45:16 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Middle Frequency, 589.500MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 22, 2018

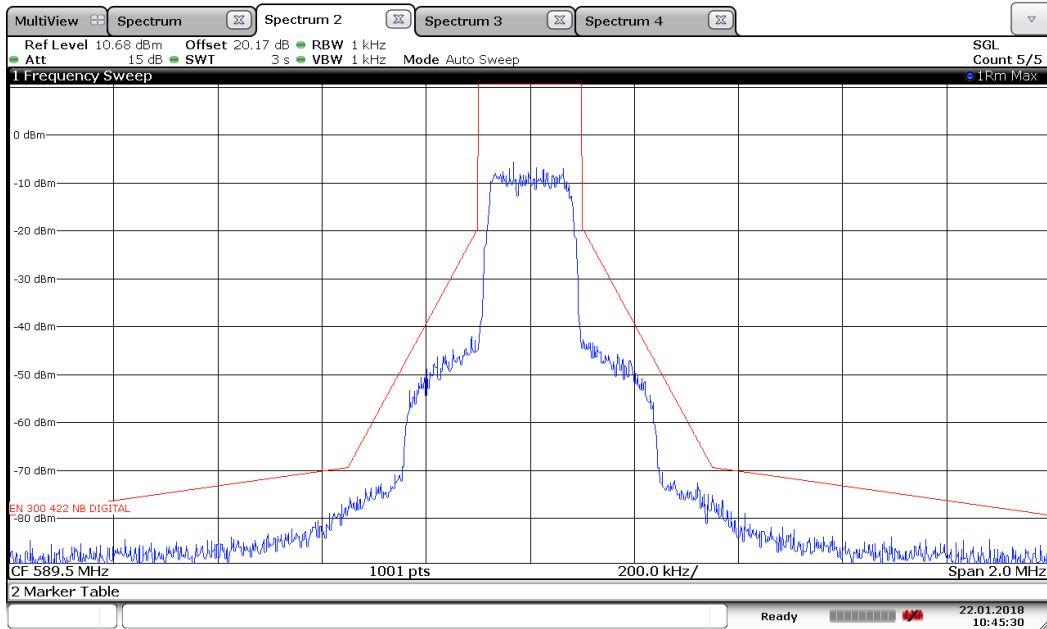


10:45:30 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Middle Frequency, 589.500MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3; Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 22, 2018

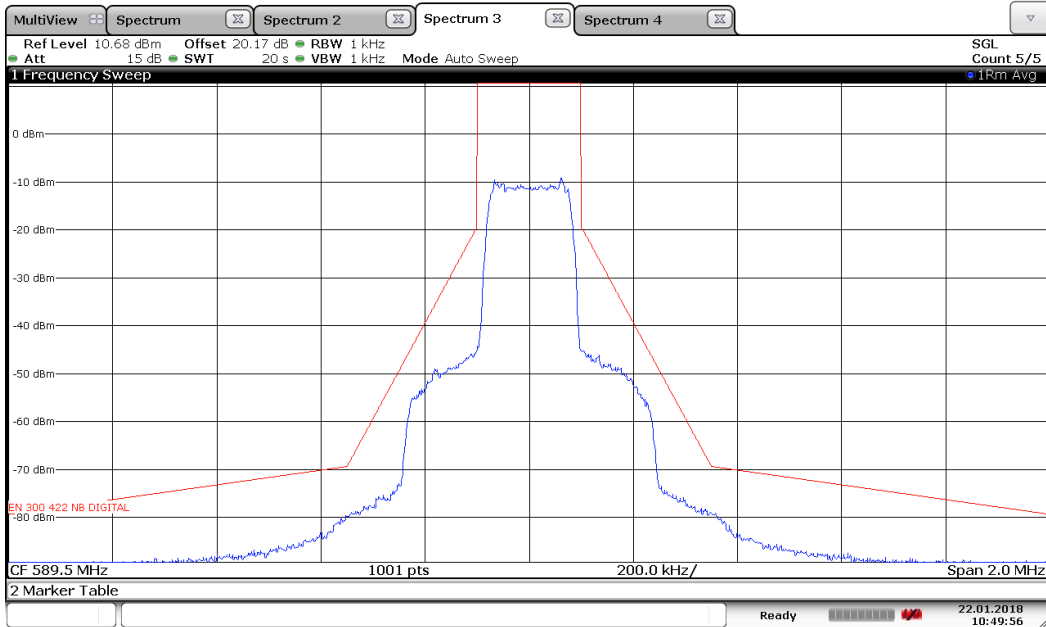


10:49:56 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 606.875MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

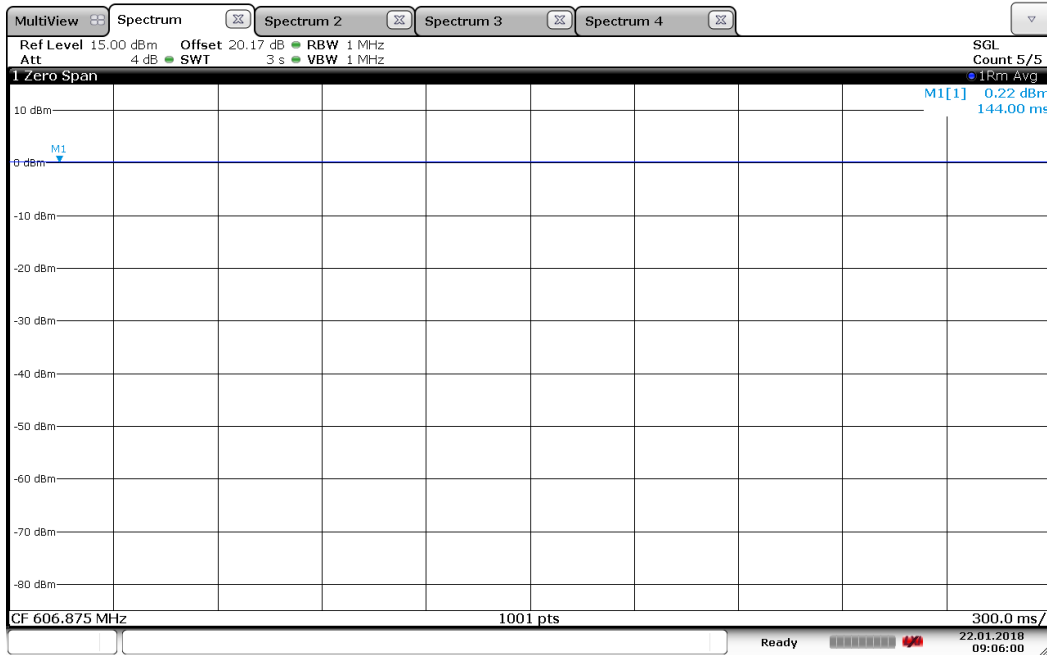


09:06:00 22.01.2018



Appendix B

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 606.875MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 22, 2018

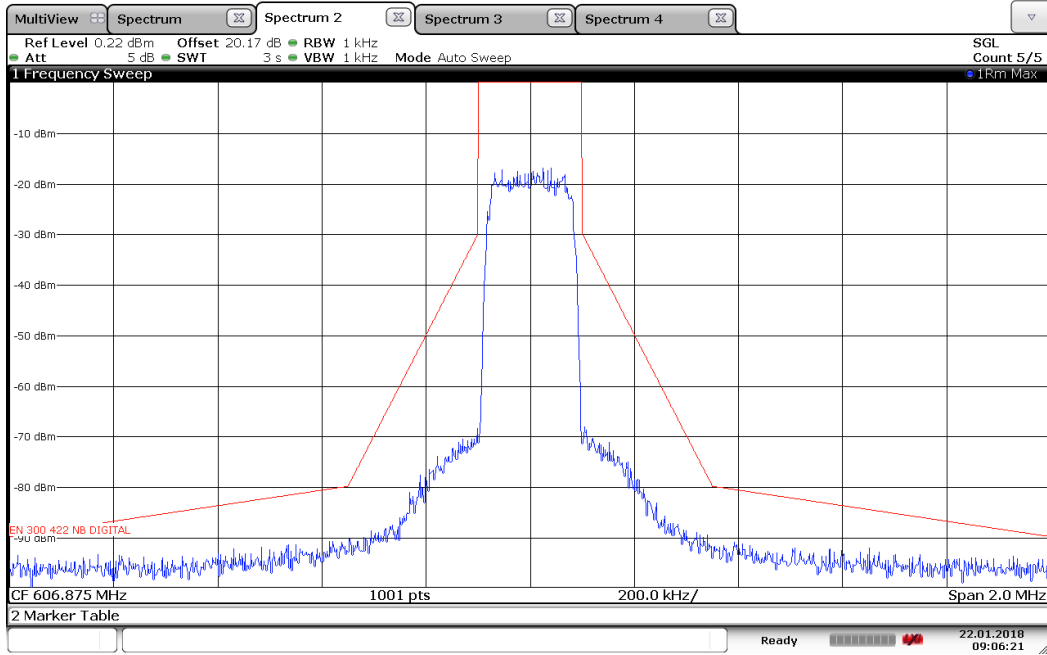


09:06:21 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Middle Frequency, 606.875MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3; Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 22, 2018

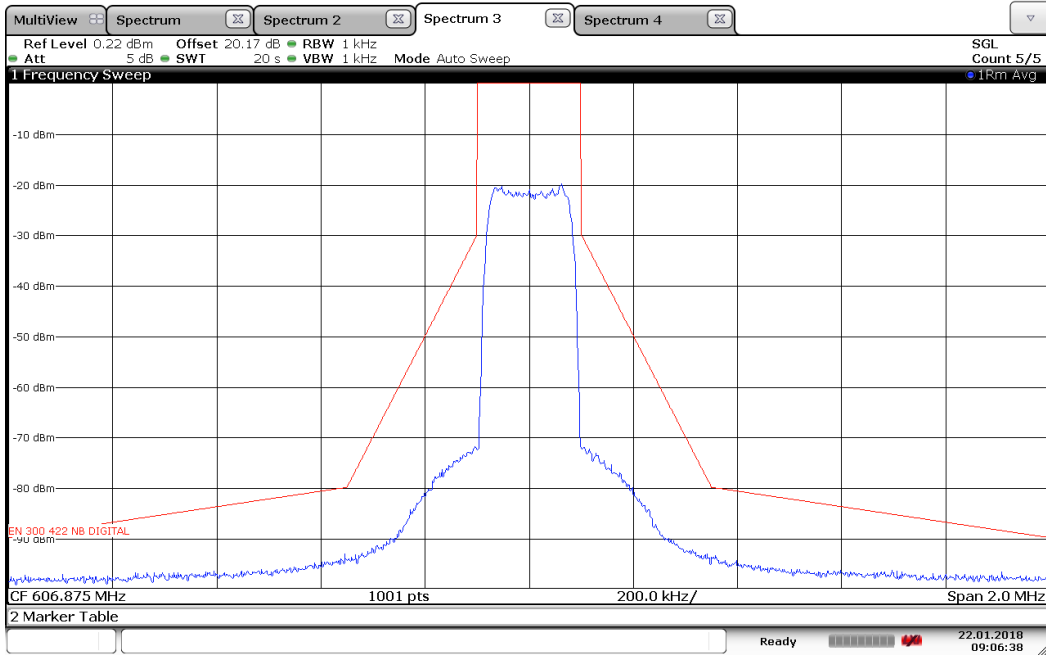


09:06:39 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 606.875MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

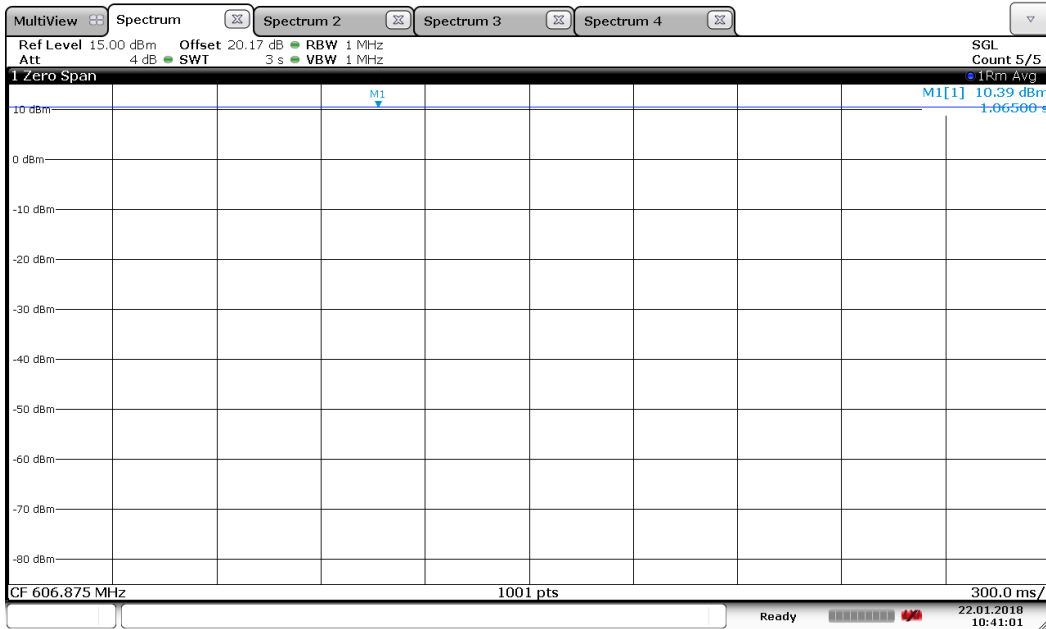


10:41:01 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 606.875MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 22, 2018

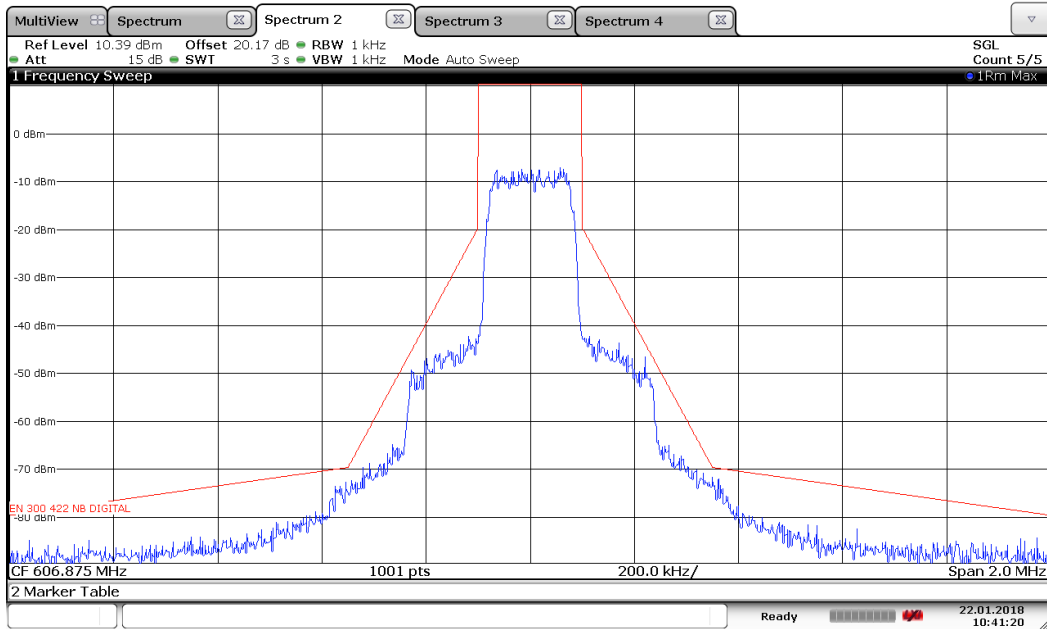


10:41:21 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Middle Frequency, 606.875MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 22, 2018

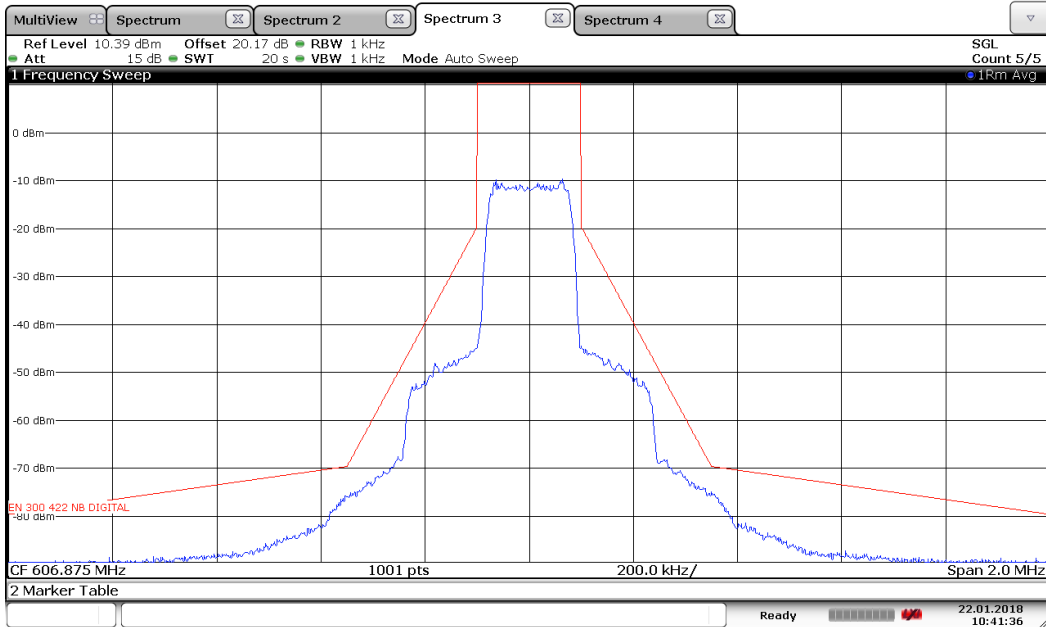


10:41:37 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 614.125MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

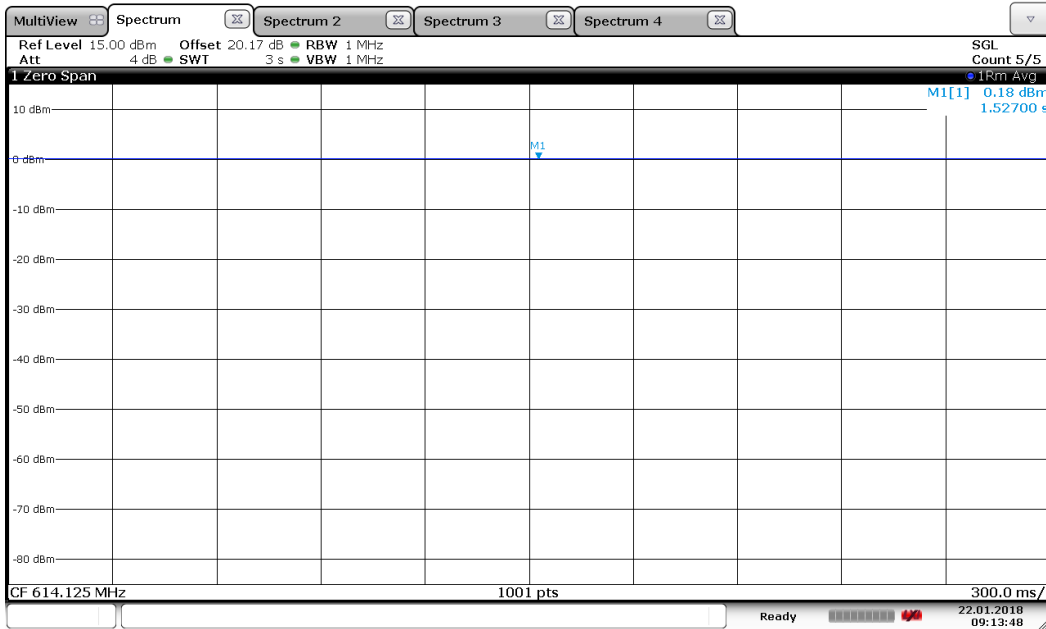


09:13:48 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 2
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 614.125MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Tested on January 22, 2018

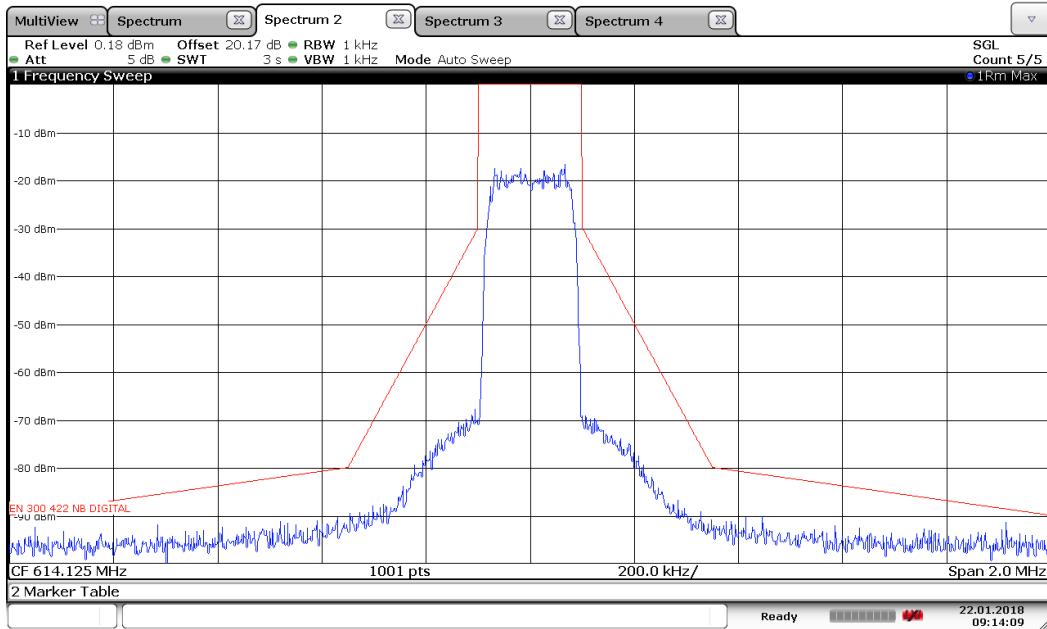


09:14:09 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: #1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 614.125MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Tested on January 22, 2018

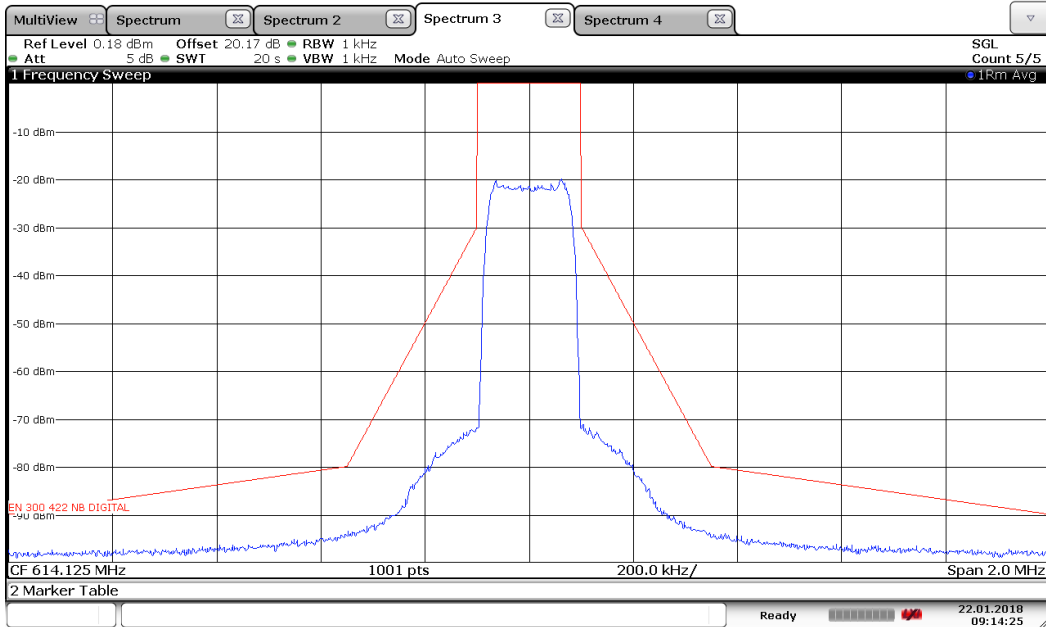


09:14:26 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 614.125MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

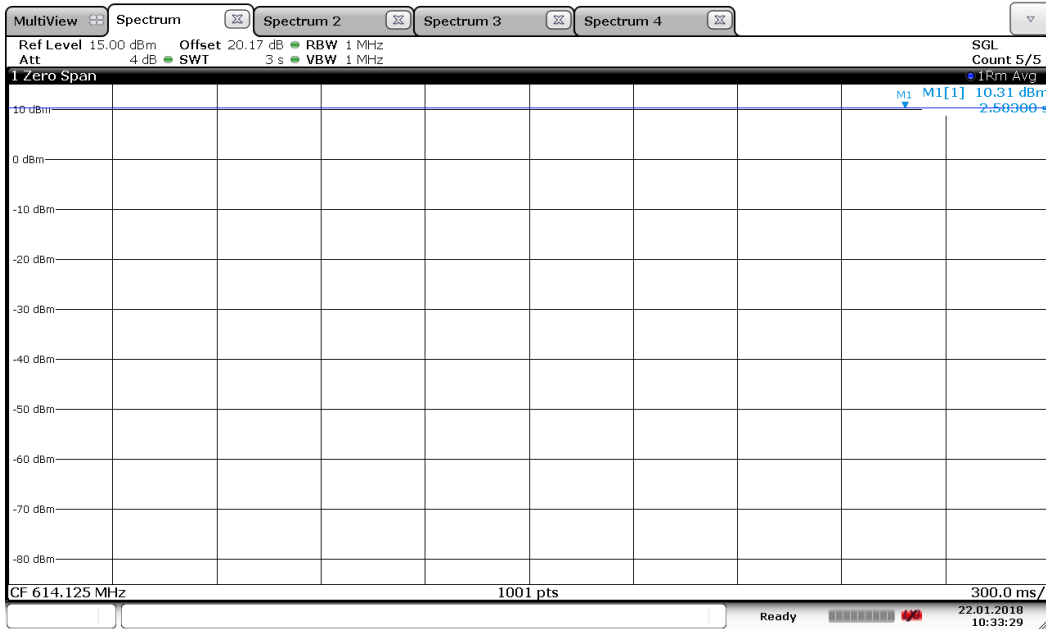


10:33:30 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 614.125MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 22, 2018

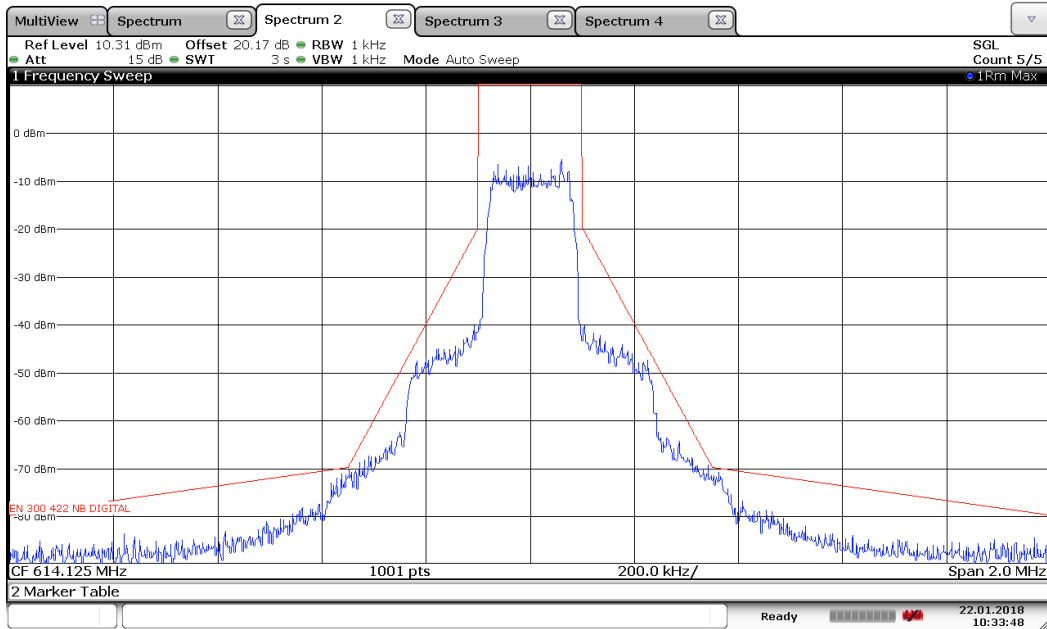


10:33:48 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: Low Frequency, 614.125MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 22, 2018

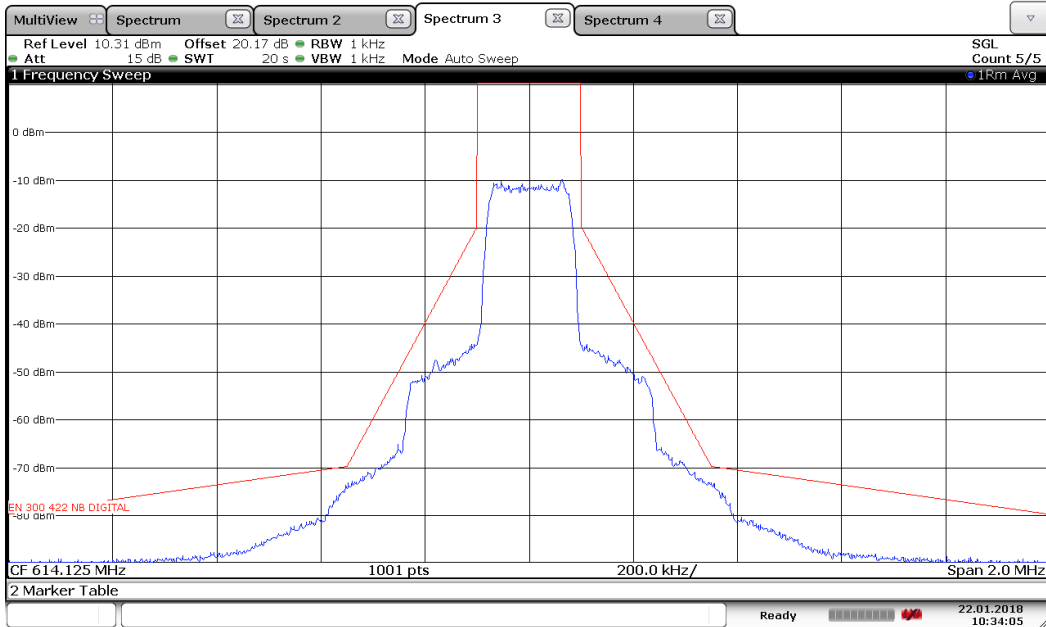


10:34:06 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 615.875MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

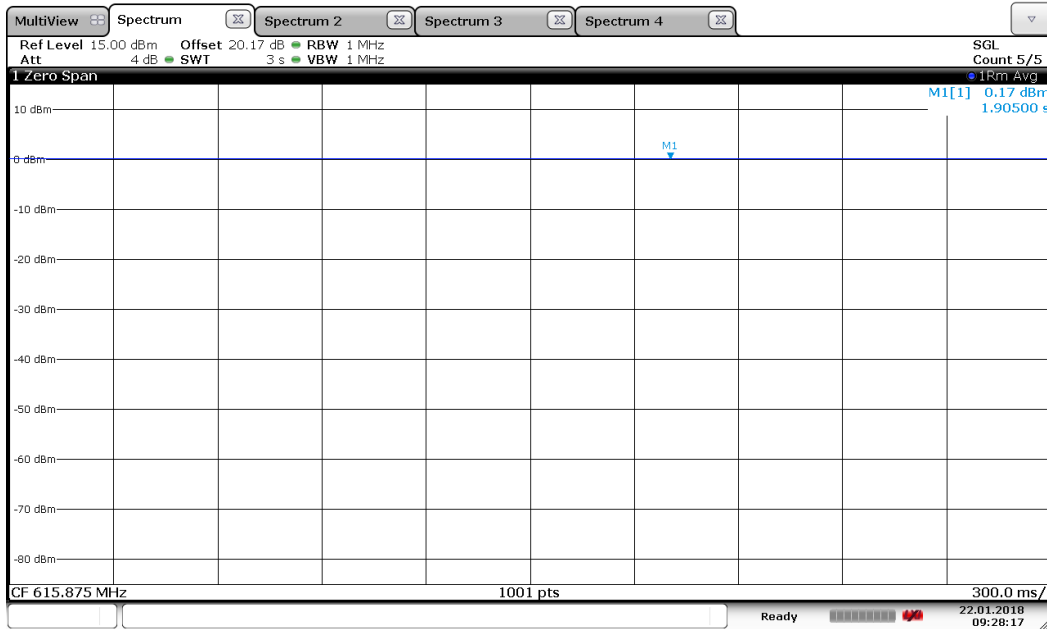


09:28:18 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 615.875MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 22, 2018

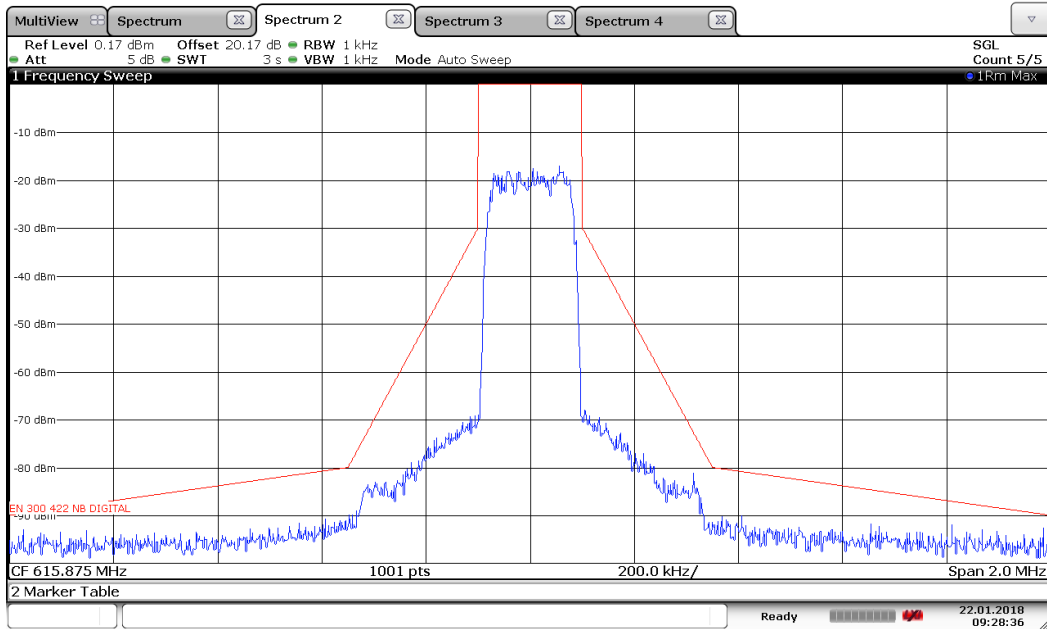


09:28:36 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 615.875MHz, 1mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 22, 2018

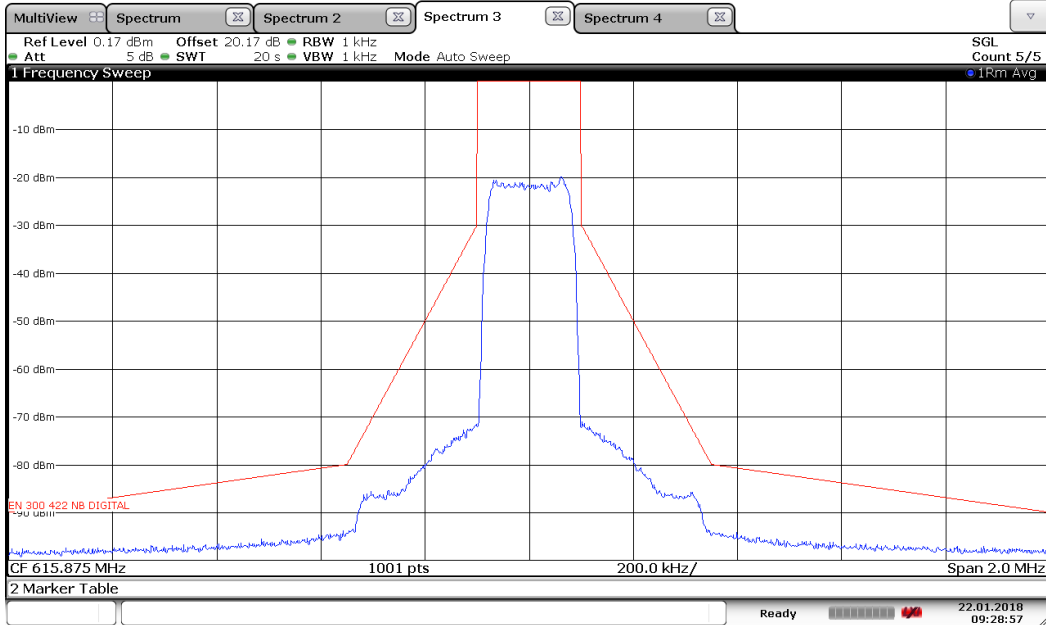


09:28:57 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 615.875MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 1; Carrier Power
Date Tested: Tested on January 22, 2018

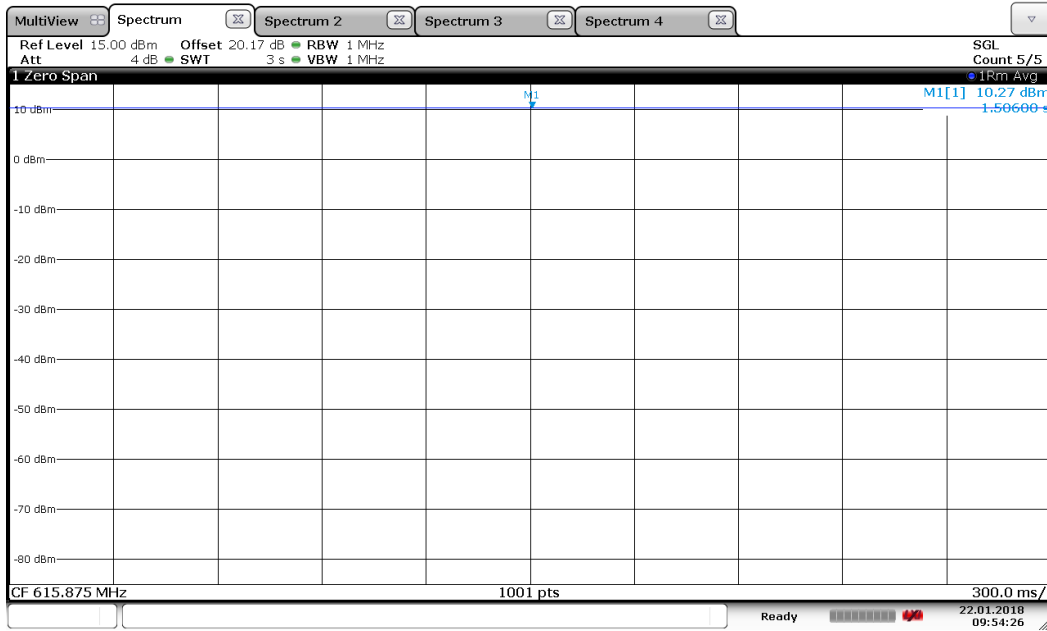


09:54:26 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 615.875MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 2;Maximum Relative Level
Date Tested: Test on January 22, 2018

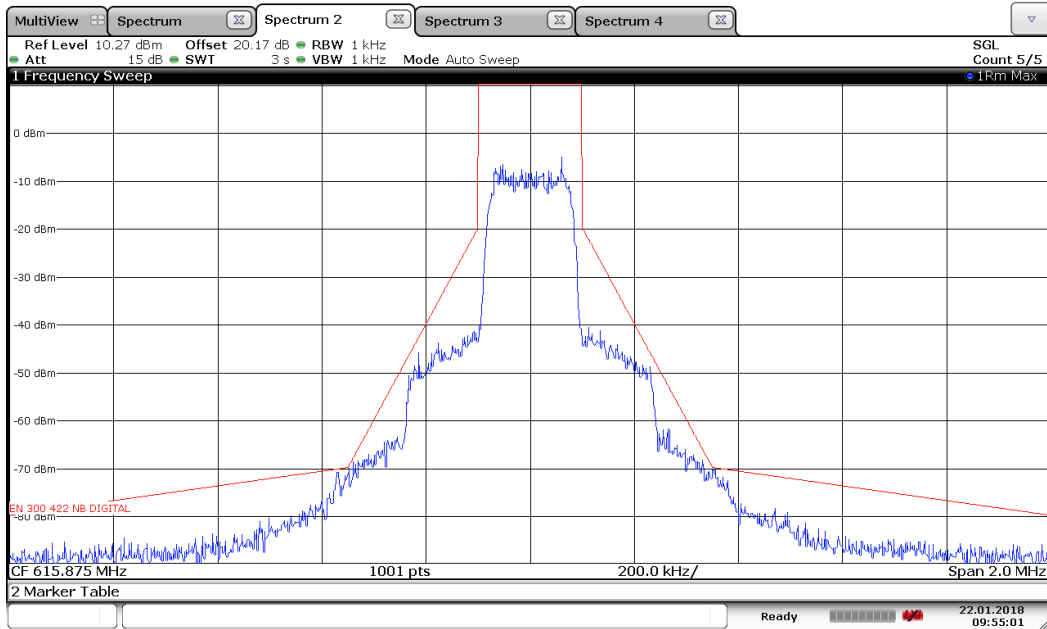


09:55:02 22.01.2018



Appendix C

Test Information

EUT Name: QLXD1 J50A
Serial Number: # 1
Test Description: EN 300 422 Digital Necessary Bandwidth
Operating Conditions: High Frequency, 615.875MHz, 10mW
Operator Name: Juan Castrejon
Comment: 8.3.3.1: Step 3; Lower and upper frequency transmitter
Wide band noise floor
Date Tested: Test on January 22, 2018

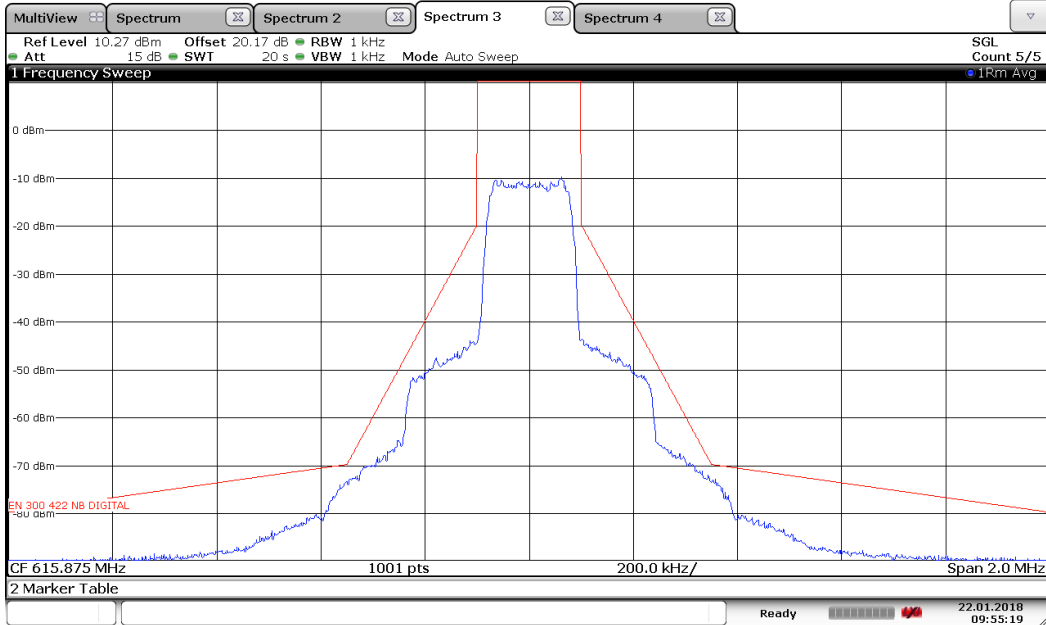

09:55:19 22.01.2018