



RF MEASUREMENT REPORT


FCC ID: DD4SLXD3J52

Applicant: Shure Incorporated

Application Type: Certification

Product: Plug-on Wireless Transmitter

Model No.: SLXD3 J52

Brand Name:  , **SHURE**[®]

FCC Classification: Part 15 Wireless Microphone (DWM)

FCC Rule Part(s): Part 15 Subpart C (Section 15.236)

Result: Complies

Received Date: 2023-04-14

Test Date: 2023-04-21 ~ 2023-06-05

Reviewed By:

 Jame Yuan

Approved By:

 Robin Wu



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2304RSU032-U7	V01	Initial Report	2023-08-05	Valid

CONTENTS

Description	Page
CONTENTS	3
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	6
2. Test Configuration	7
2.1. Test Mode	7
2.2. Test System Connection Diagram	7
2.3. Test Software	7
2.4. Applied Standards.....	8
2.5. Test Environment Condition.....	8
3. Measuring Instrument	9
4. Decision Rules and Measurement Uncertainty.....	10
4.1. Decision Rules	10
4.2. Measurement Uncertainty.....	10
5. Test Result	11
5.1. Summary.....	11
5.2. 99% Occupied Bandwidth Measurement.....	12
5.2.1. Test Limit.....	12
5.2.2. Test Procedure.....	12
5.2.3. Test Setting	12
5.2.4. Test Setup	12
5.2.5. Test Result	12
5.3. Frequency Tolerance Measurement	13
5.3.1. Test Limit.....	13
5.3.2. Test Procedure.....	13
5.3.3. Test Setting	13
5.3.4. Test Setup	14
5.3.5. Test Result	14
5.4. Necessary Bandwidth Measurement	15
5.4.1. Test Limit.....	15

5.4.2.	Test Procedure	15
5.4.3.	Test Setting	15
5.4.4.	Test Setup	15
5.4.5.	Test Result	15
5.5.	Output Power Measurement	16
5.5.1.	Test Limit	16
5.5.2.	Test Procedure	16
5.5.3.	Test Setting	16
5.5.4.	Test Setup	16
5.5.5.	Test Result	16
5.6.	Radiated Spurious Emission Measurement.....	17
5.6.1.	Test Limit	17
5.6.2.	Test Procedure	17
5.6.3.	Test Setting	17
5.6.4.	Test Setup	18
5.6.5.	Test Result	18
5.7.	AC Conducted Emissions Measurement.....	19
5.7.1.	Test Limit	19
5.7.2.	Test Setup	19
5.7.3.	Test Result	19
Appendix A – Test Result.....		20
A.1	99% Occupied Bandwidth Test Result.....	20
A.2	Frequency Tolerance Test Result.....	22
A.3	Necessary Bandwidth Test Result	23
A.4	Output Power Test Result	36
A.5	Radiated Spurious Emission Test Result.....	37
A.6	AC Conducted Emissions Test Result	39
Appendix B - Test Setup Photograph		41
Appendix C - EUT Photograph		42

1.4. Product Information

Product Name	Plug-on Wireless Transmitter
Model No.	SLXD3 J52
Serial No.	3CC23617051 (Radiated Testing) 3CC23618696 (Conducted Testing)
Radio Specification	UHF Microphone, 558 ~ 602 MHz & 614 ~ 616 MHz
Power Type	Two AA batteries or Li-ion battery(3.6Vdc) or USB (5Vdc)
Operating Temperature	-18 ~ 50°C
Accessories	
Rechargeable Li-ion Battery	Model: SB903 Output: 3.6Vdc, 1200mAh, 4.32Wh

Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.

1.5. Radio Specification under Test

Frequency Range	558 ~ 602 MHz & 614 ~ 616 MHz
Declared Power Level	1mW & 10mW & 30mW
Type of Modulation	4FSK
Channel Spacing	25kHz
Antenna Type	Dipole
Antenna Gain	1.70 dBi for 558 ~ 602 MHz
	0.80 dBi for 614 ~ 616 MHz

Note 1: Power level and transmit frequency can be selected using the front panel controls.

Note 2: 614 ~ 616 MHz only support 1mW and 10mW power level.

1.6. Working Frequencies

Bottom Channel (MHz)	Middle Channel (MHz)	Top Channel (MHz)
558 ~ 602 MHz Frequency Band		
558.000	580.000	602.000
614 ~ 616 MHz Frequency Band		
614.125	N/A	615.875


Note: Refer ANSI C63.10 clause 5.6.1 table 4, frequency range fall within 1 - 10 MHz, only two channels shall be tested.

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit one channel at the fixed power level

2.2. Test System Connection Diagram

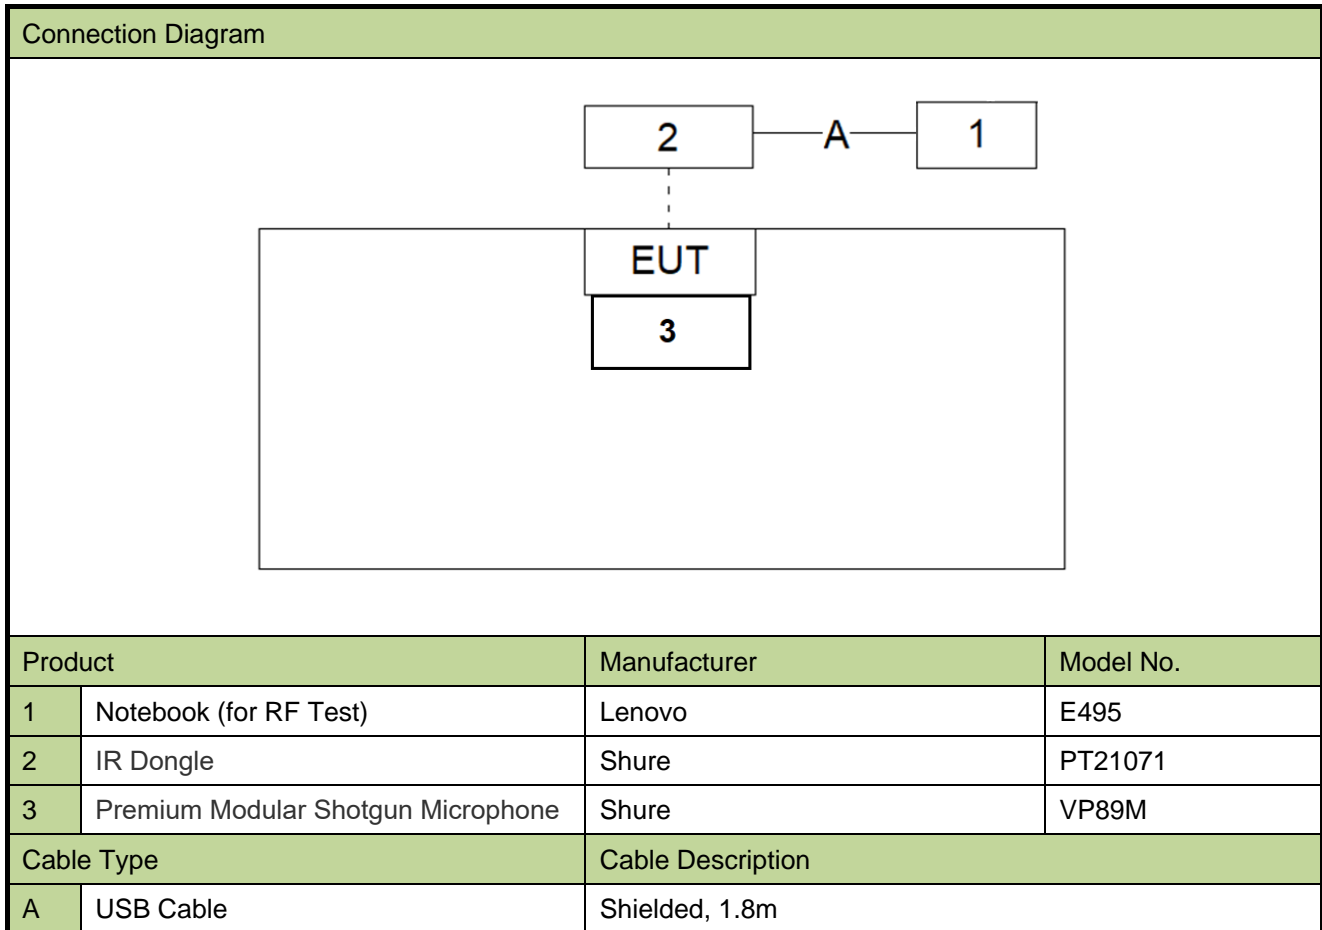

2.3. Test Software

The test utility software used during testing was “teraterm”, and the version was V4.85, all test commands were provided by the manufacturer.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.236
- KDB 206256 D01v02r01
- ANSI C63.10-2013
- ETSI EN 300 422 - 1 V 1.4.2

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2024-05-23	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2024-05-31	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2023-10-27	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2024-05-23	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11060	1 year	2023-06-09	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11072	1 year	2023-06-09	WZ-SR5
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2023-10-08	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2024-05-31	WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE07027	1 year	2023-11-25	WZ-TR3
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2024-05-15	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2024-05-23	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2023-04-21	WZ-AC2
				1 year	2024-04-20	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9kHz~150kHz:	3.58dB
150kHz~30MHz:	3.20dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9kHz~30MHz: 2.59dB
Coplanar:	9kHz~30MHz: 2.60dB
Horizontal:	30MHz~200MHz: 3.85dB
	200MHz~1GHz: 4.36dB
	1GHz~40GHz: 4.98dB
Vertical:	30MHz~200MHz: 4.06dB
	200MHz~1GHz: 5.28dB
	1GHz~40GHz: 4.91dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):	
2.3dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):	
1.5dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):	
3.2%	

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Test Result
15.236(f)(2)	Occupied Bandwidth	Conducted	Pass
15.236(f)(3)	Frequency Tolerance		Pass
15.236(g)	Necessary Bandwidth		Pass
15.236(d)(1)	RF Output Power		Pass
15.236(g)	Radiated Spurious Emission	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Z) was also verified. The test results shown in the following sections represent the worst emissions.
- 3) Except RF output power and necessary bandwidth items were evaluated all power levels, any others test items were only assessed max power level.

5.2. 99% Occupied Bandwidth Measurement

5.2.1. Test Limit

The operating bandwidth shall not exceed 200 kHz.


5.2.2. Test Procedure

ANSI C63.10-2013 - Section 6.9.3

5.2.3. Test Setting

1. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
2. Set RBW \geq 1% to 5% of the OBW
3. VBW = Approximately three times RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup

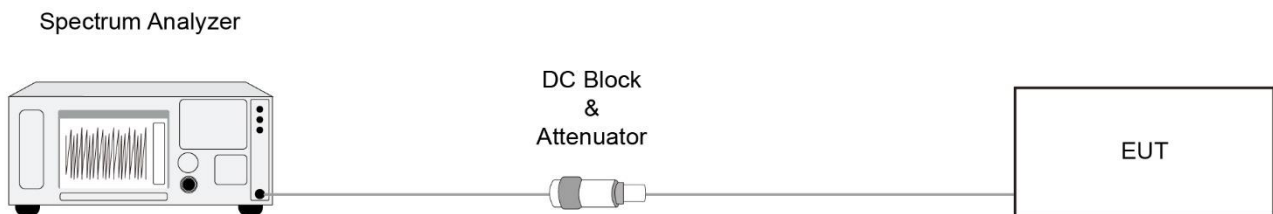

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Tolerance Measurement

5.3.1. Test Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

5.3.2. Test Procedure

ANSI C63.10-2013 - Section 6.8

5.3.3. Test Setting

The EUT was programmed to transmit with an unmodulated carrier.

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

5.3.4. Test Setup

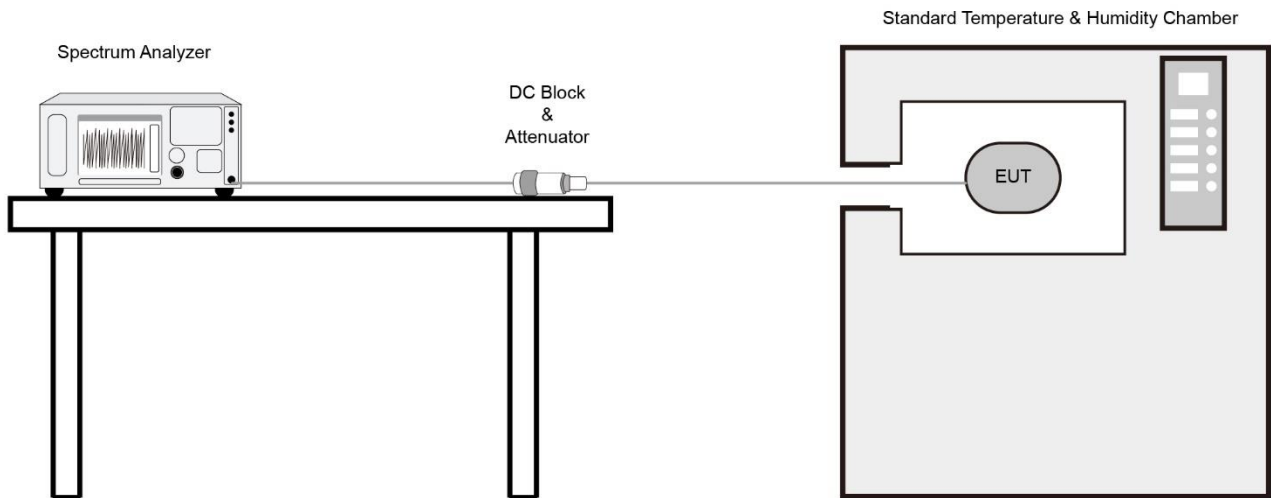


5.3.5. Test Result

Refer to Appendix A.2.

5.4. Necessary Bandwidth Measurement

5.4.1. Test Limit

According to EN 300 422-1 V1.4.2 clause 8.3.2.2, the transmitter output spectrum shall be within the mask defined as below figure.

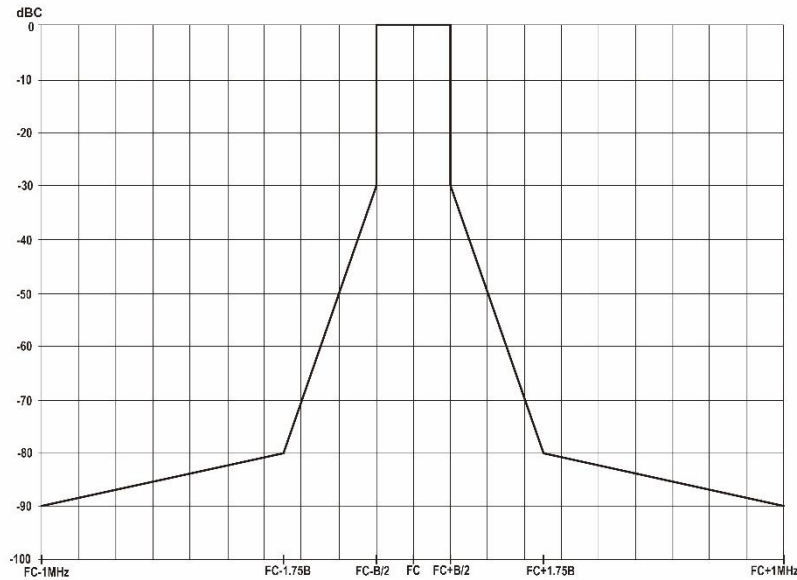

5.4.2. Test Procedure

ETSI EN 300 422-1 V1.4.2 clause 8.3.2.1.


5.4.3. Test Setting

The EUT was powered up and the transmit frequency & power output of the EUT were selected.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.

Only bottom and top channel is required, at an output power level of 1mW & 10mW & 30mW.

5.4.4. Test Setup

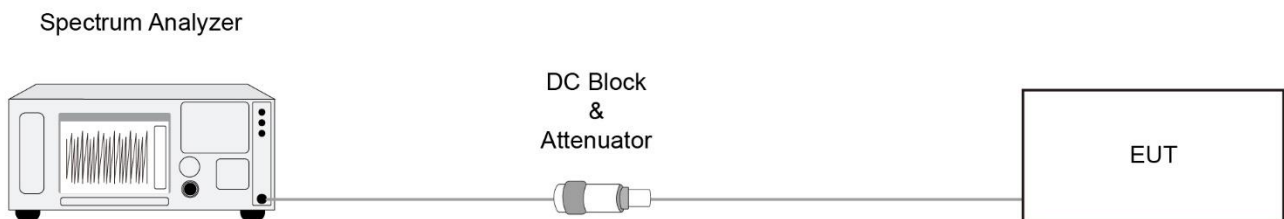

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Output Power Measurement

5.5.1. Test Limit

In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP.

In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.


5.5.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.2.3.2

5.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

5.5.4. Test Setup

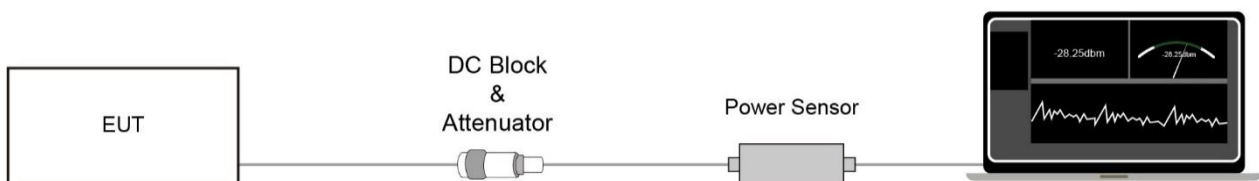

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Radiated Spurious Emission Measurement

5.6.1. Test Limit

According to FCC Part 15.236(g), emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2.

State	Frequency		
	47MHz to 74MHz, 87.5MHz to 137MHz 174MHz to 230MHz, 470MHz to 862MHz	Other Frequencies below 1000MHz	Frequencies above 1000MHz
Operation	4nW	250nW	1uW
Standby	2nW	2nW	20nW

5.6.2. Test Procedure

ETSI EN 300 422-1 V1.4.2 clause 8.4.2.

5.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
25 ~ 30 MHz	9 kHz
30 ~ 1000 MHz	100 kHz
1000 ~ 6000 MHz	1 MHz

Emissions shall be investigated up to the 10th harmonic of the fundamental.


All the emissions shall be demonstrated using a QP detector below 1 GHz and an RMS Average detector above 1 GHz.

All significant broadband and narrowband signals found in the preliminary sweeps were measured using a peak detector at a test distance of 3 meters.


at each frequency at which a component is detected, the sample shall be rotated to obtain maximum response and the effective radiated power of that component determined by a substitution measurement.

5.6.4. Test Setup

Below 1GHz Test Setup:

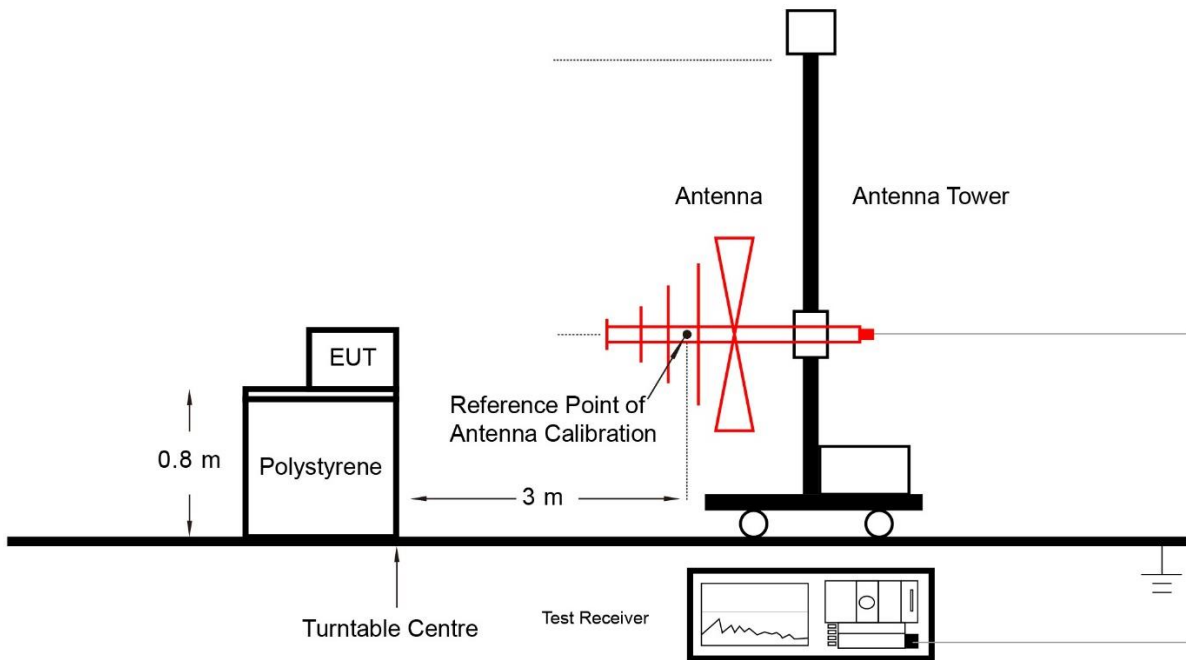

Above 1GHz Test Setup:

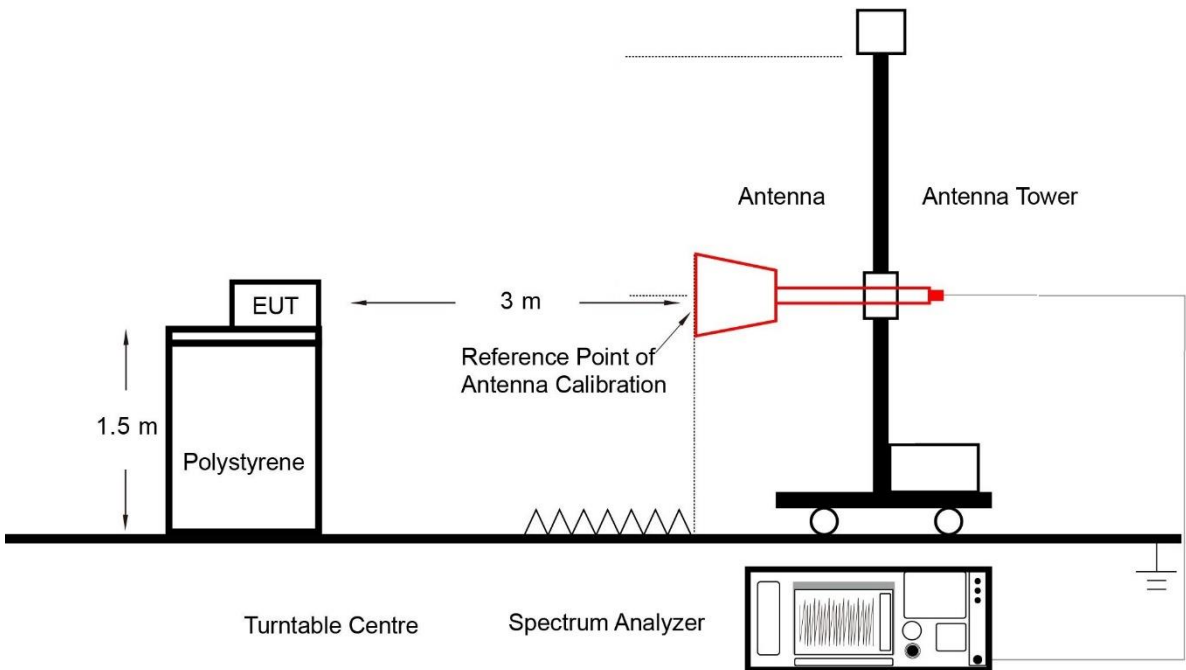

5.6.5. Test Result

Refer to Appendix A.5.

5.7. AC Conducted Emissions Measurement


5.7.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

5.7.2. Test Setup

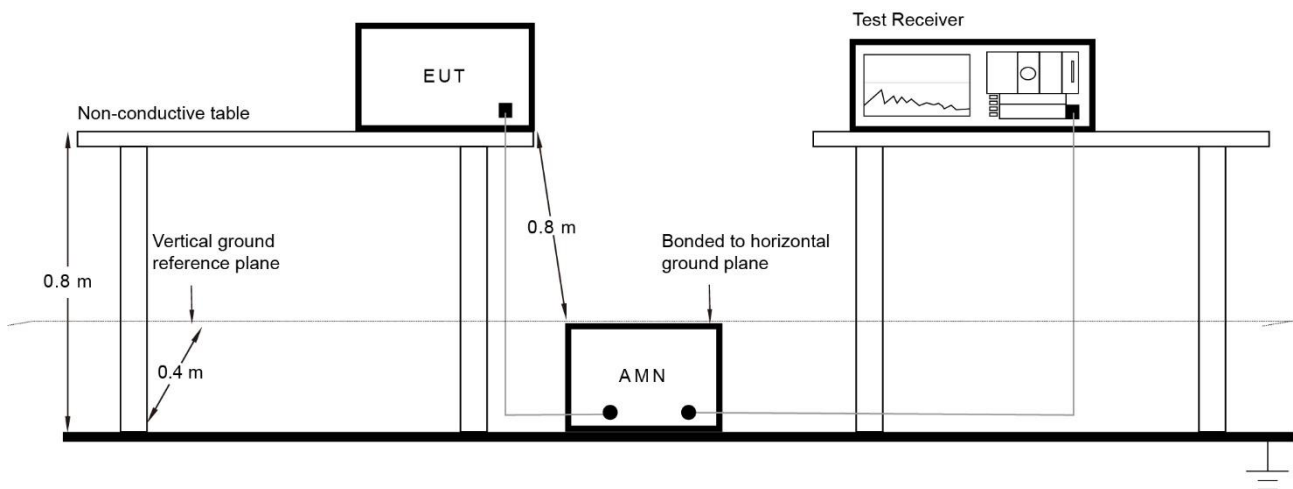

5.7.3. Test Result


Refer to Appendix A.6.


Appendix A – Test Result

A.1 99% Occupied Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Dandy Li
Test Date	2023-04-21		

Mode	Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result
30mW	558.000	169.94	< 200	Pass
	580.000	166.86	< 200	Pass
	602.000	166.47	< 200	Pass
10mW	614.125	168.17	< 200	Pass
	615.875	166.64	< 200	Pass

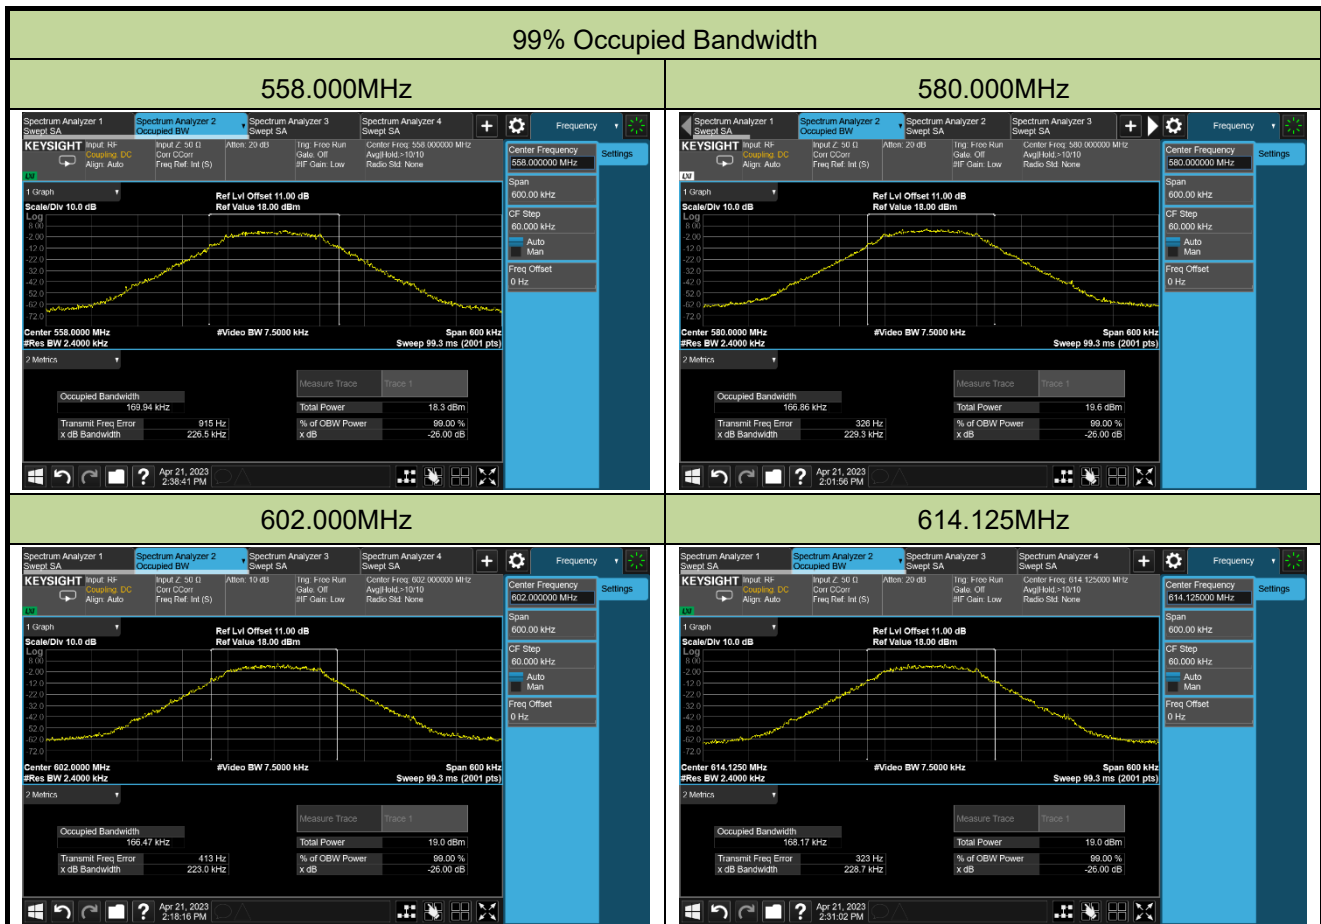

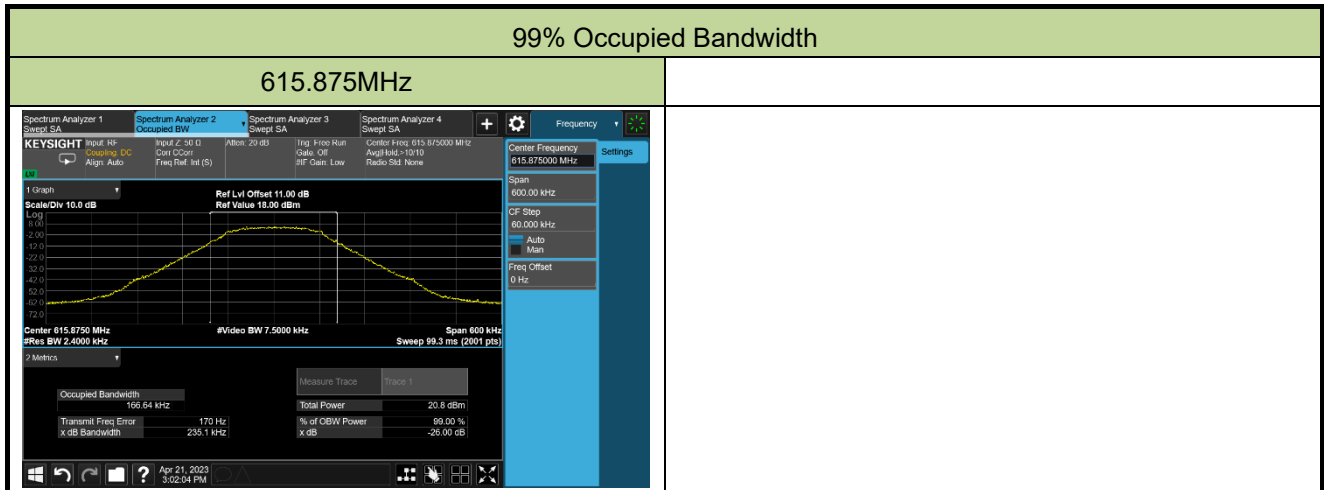

A.2 Frequency Tolerance Test Result


Test Site	WZ-TR3	Test Engineer	Dandy Li
Test Date	2023-04-23 ~ 2023-04-24	Test Mode	558.000MHz

Voltage (%)	Power (DC)	Temp (°C)	Frequency Tolerance (%)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	3.6	- 10	-0.000001	-0.000049	-0.000048	-0.000047
		0	-0.000001	-0.000061	-0.000059	-0.000058
		+ 10	0.000000	-0.000047	-0.000048	-0.000048
		+ 20	0.000000	-0.000035	-0.000034	-0.000034
		+ 30	0.000000	-0.000017	-0.000016	-0.000018
		+ 40	0.000000	-0.000021	-0.000020	-0.000020
		+ 50	0.000000	-0.000009	-0.000015	-0.000019
115	4.14	+ 20	0.000000	-0.000035	-0.000034	-0.000034
85	3.06	+ 20	0.000000	-0.000035	-0.000034	-0.000034

Note: Frequency Tolerance (ppm) = $\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}] / \text{Declared Frequency (Hz)}\} * 10^2$.


A.3 Necessary Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Dandy Li
Test Date	2023-04-21 ~ 2023-06-05		

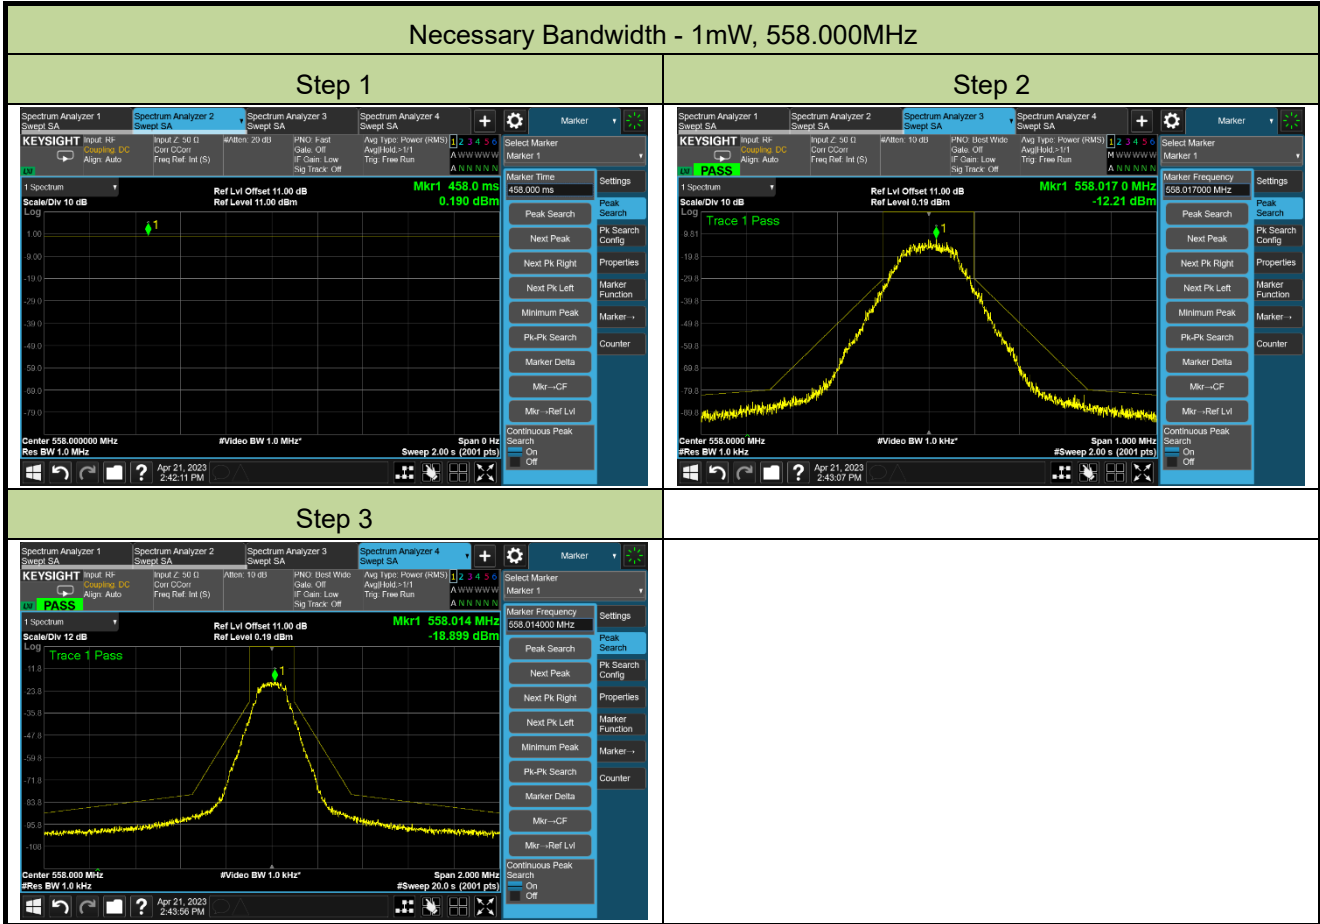


Necessary Bandwidth - 1mW,580.000MHz


Step 1

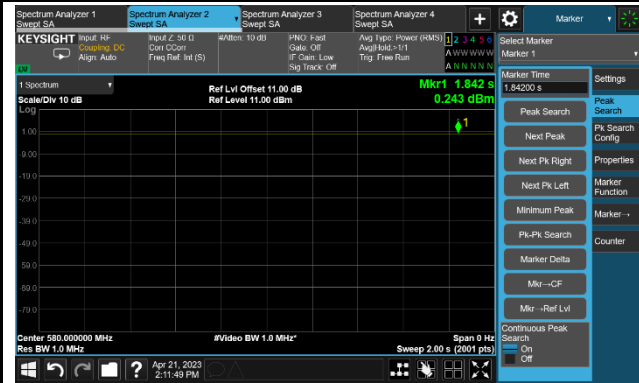

Step 2

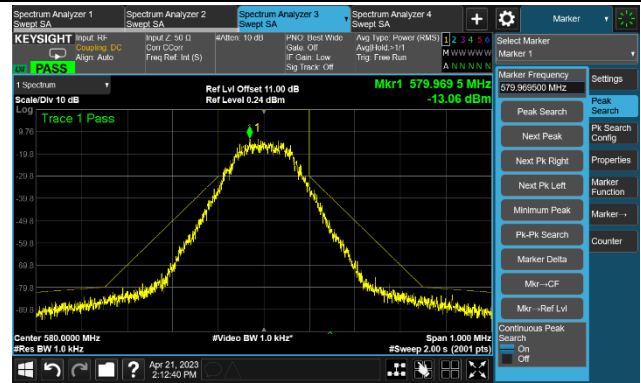


Step 3

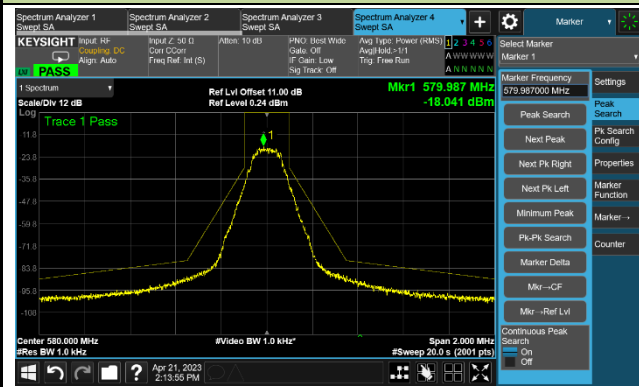


Necessary Bandwidth - 1mW, 602.000MHz


Step 1

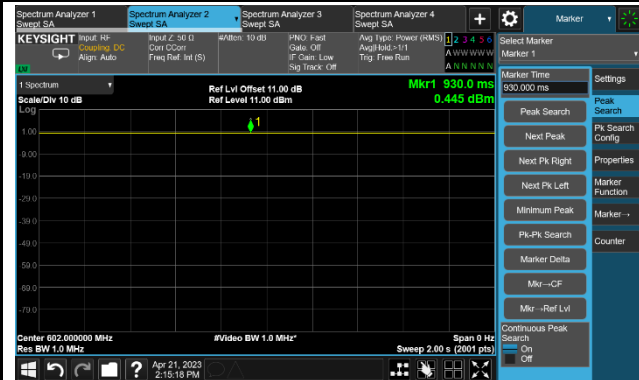

Step 2

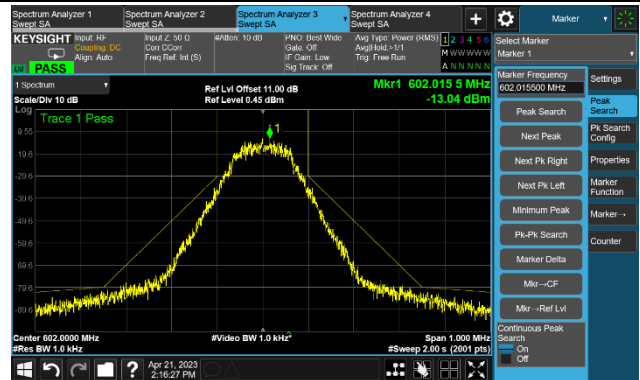


Step 3

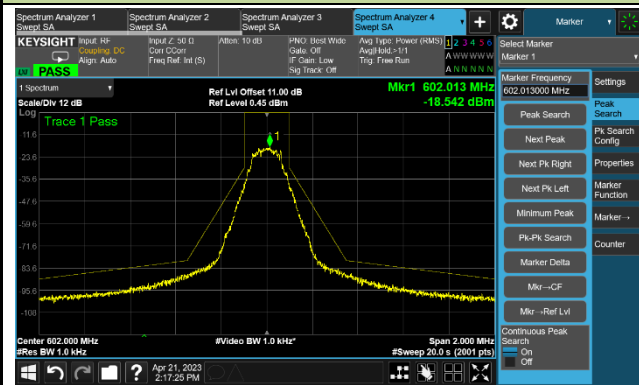


Necessary Bandwidth - 1mW, 614.125MHz


Step 1

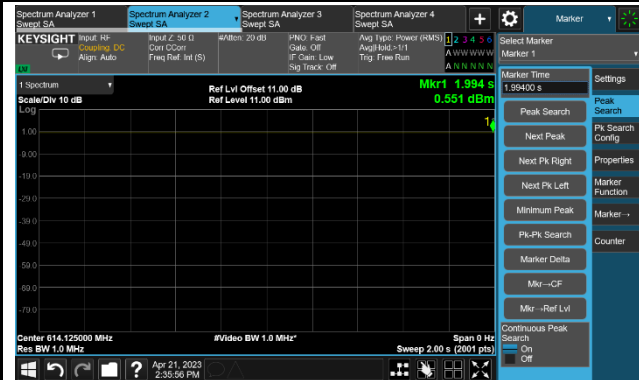

Step 2

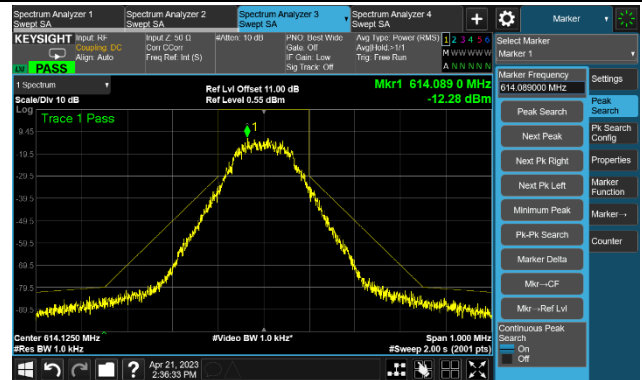


Step 3

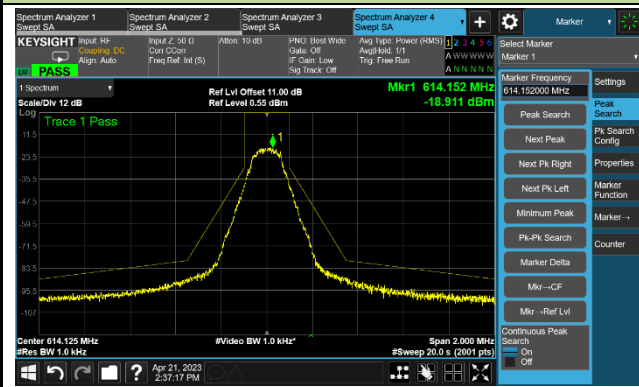


Necessary Bandwidth - 1mW, 615.875MHz



Step 1

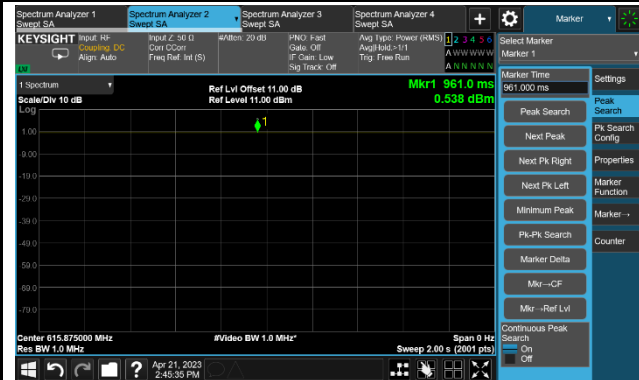

Step 2

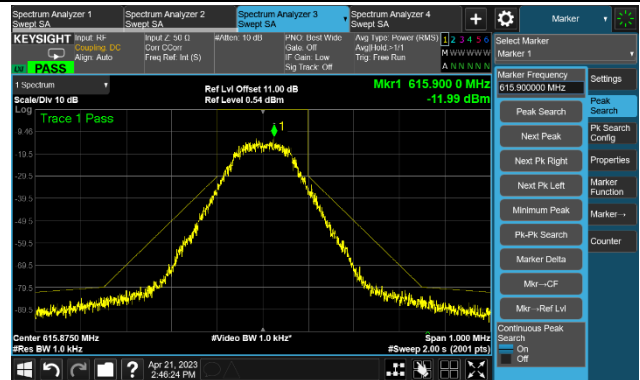


Step 3

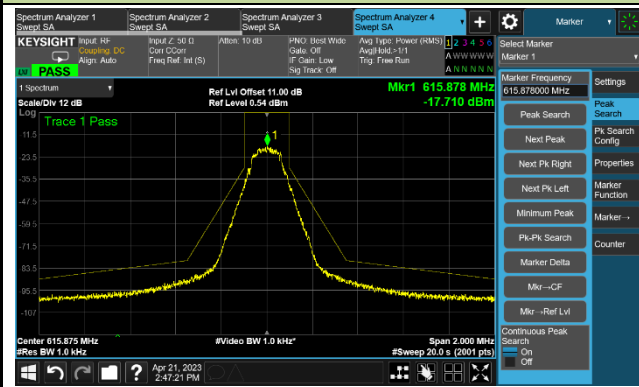


Necessary Bandwidth - 10mW, 558.000MHz


Step 1

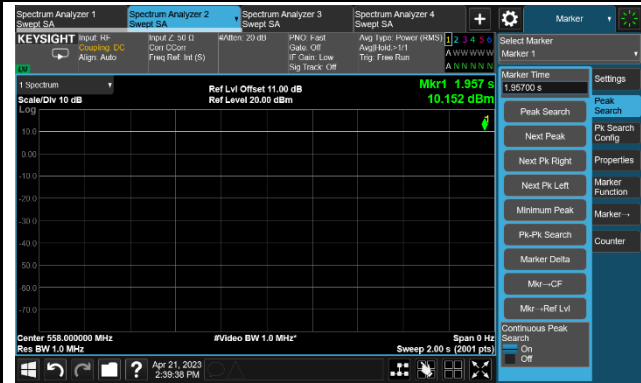

Step 2

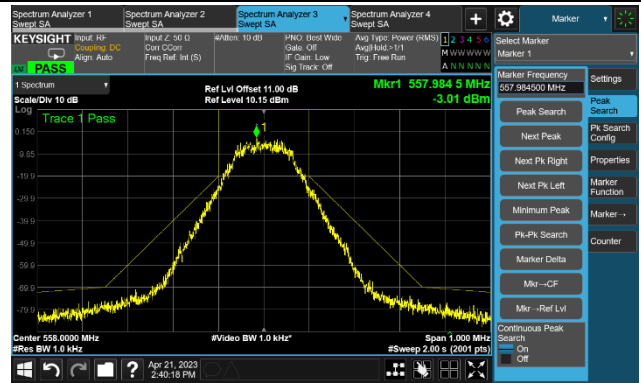


Step 3

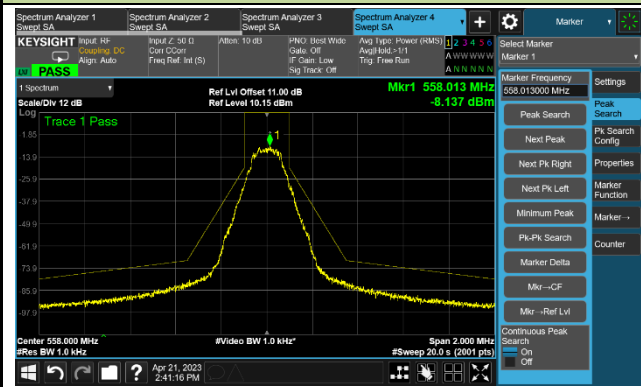


Necessary Bandwidth - 10mW, 580.000MHz


Step 1

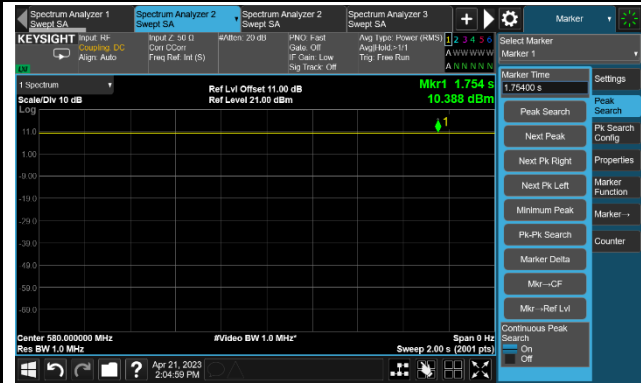

Step 2

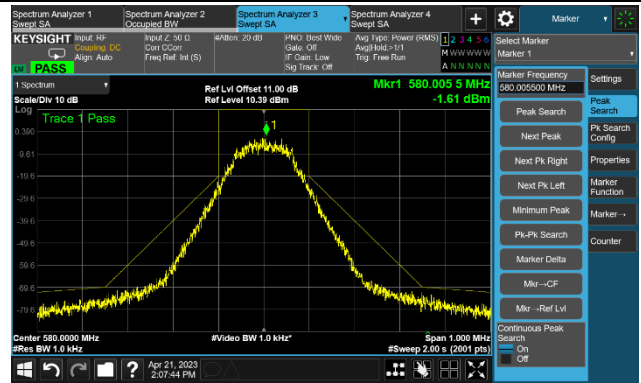


Step 3

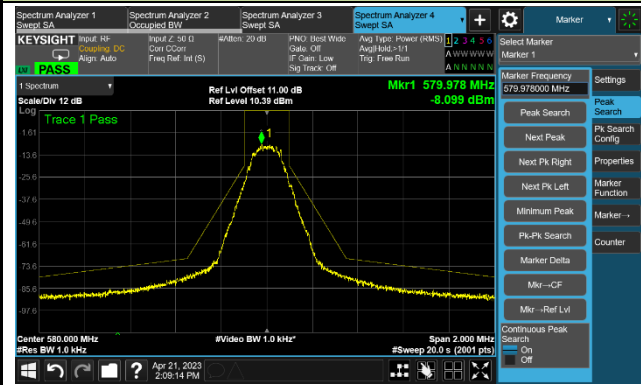


Necessary Bandwidth - 10mW, 602.000MHz


Step 1

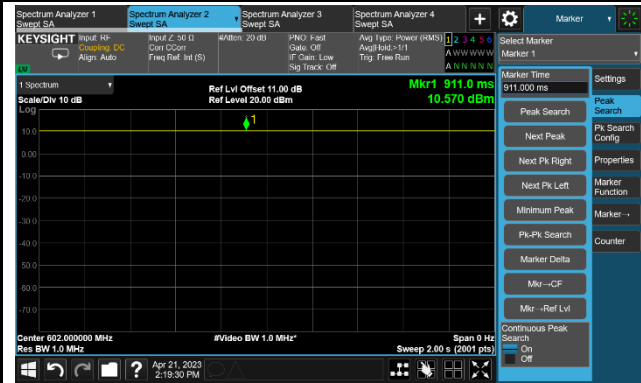

Step 2

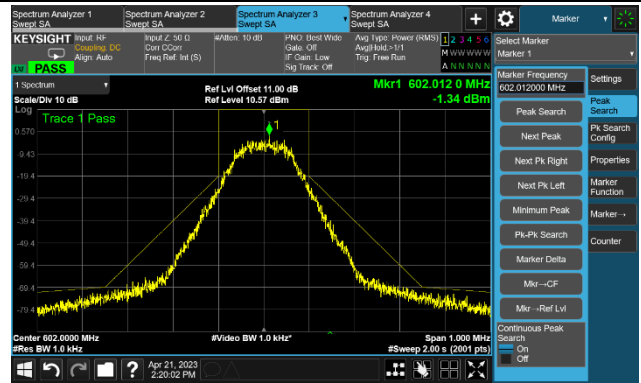


Step 3

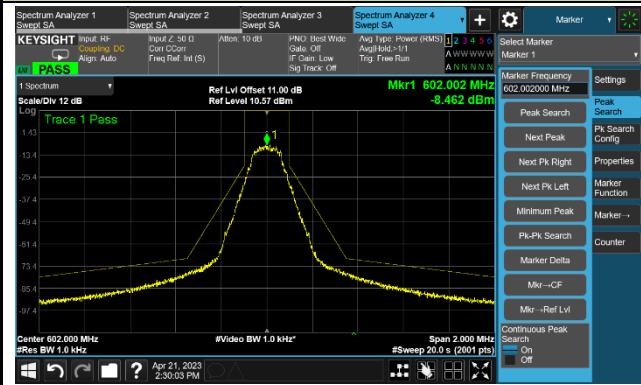


Necessary Bandwidth - 10mW, 614.125MHz


Step 1

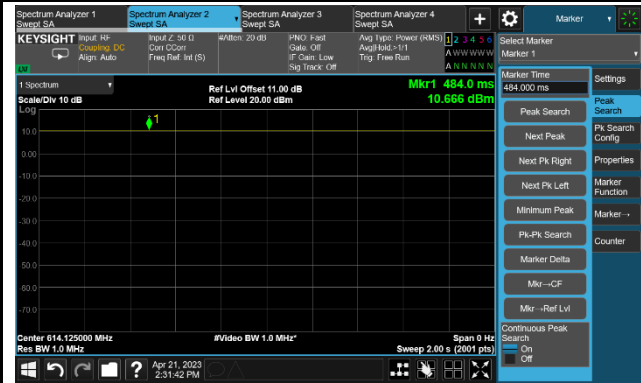

Step 2

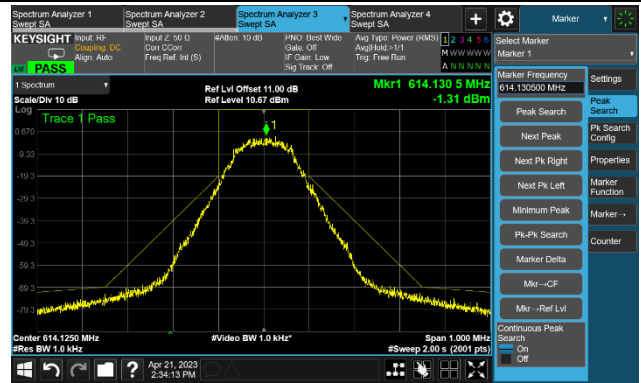


Step 3

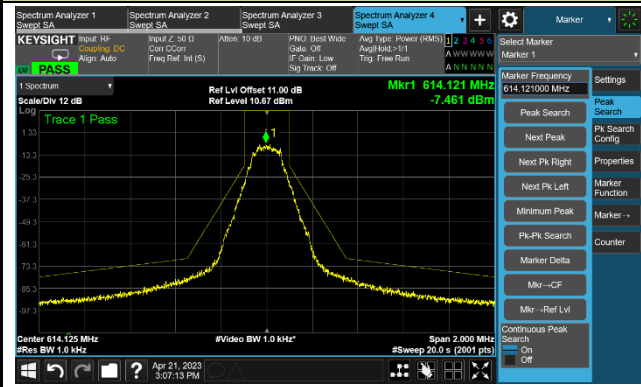


Necessary Bandwidth - 10mW, 615.875MHz


Step 1

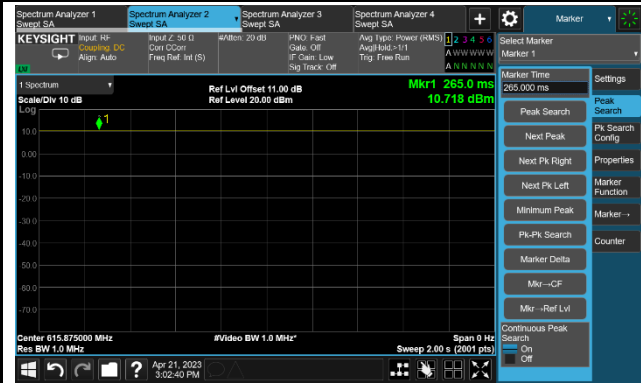

Step 2

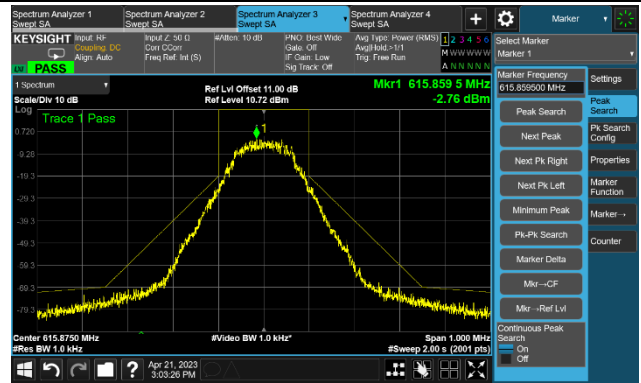


Step 3

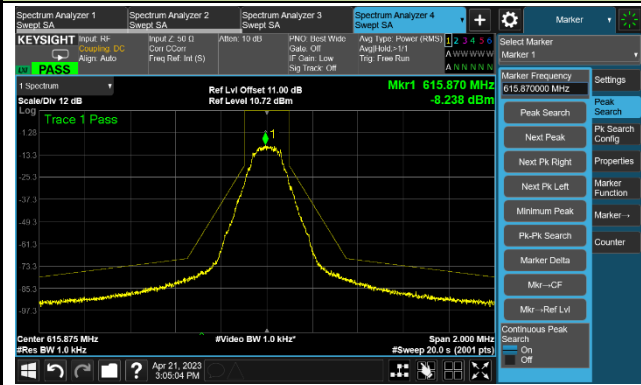


Necessary Bandwidth - 30mW, 558.000MHz


Step 1

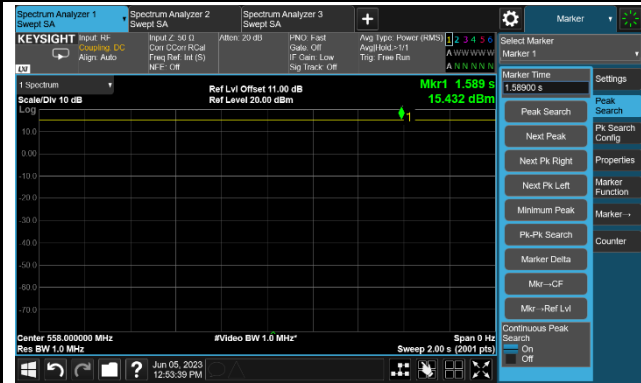

Step 2

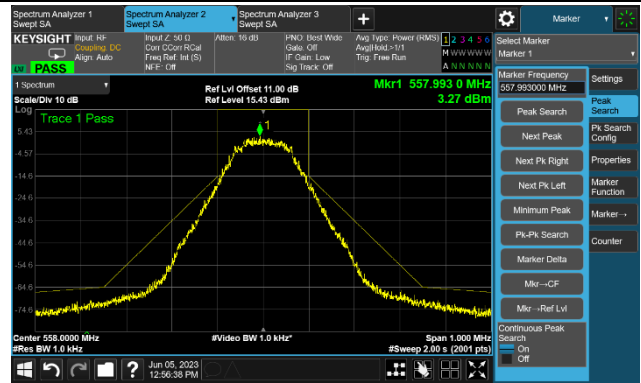


Step 3

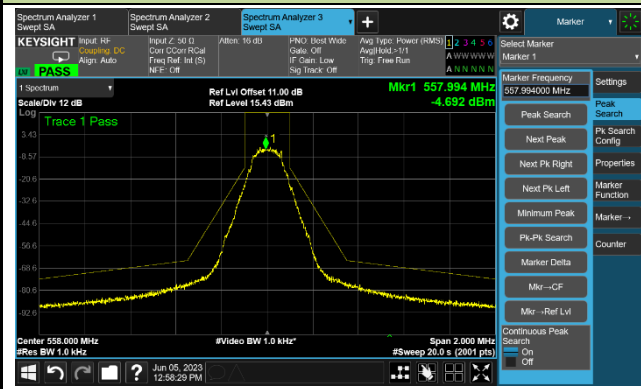


Necessary Bandwidth - 30mW, 580.000MHz


Step 1

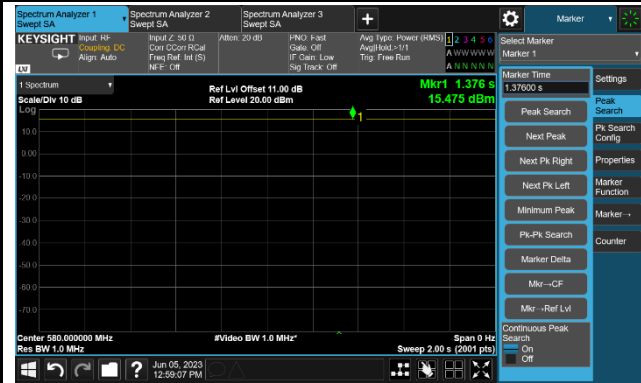

Step 2

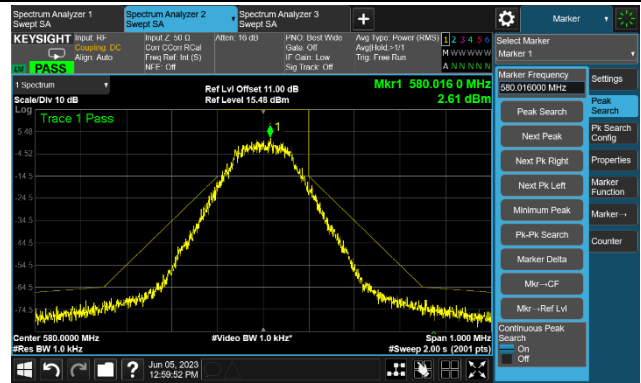


Step 3

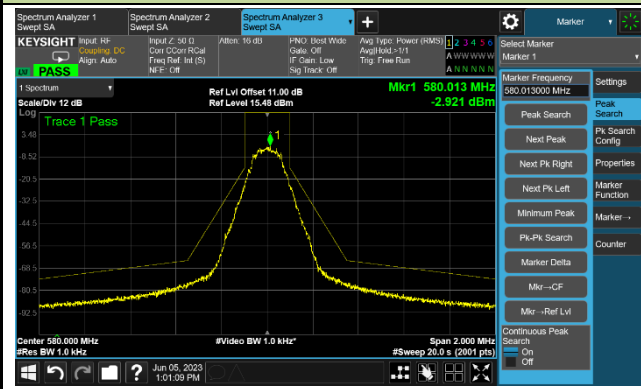


Necessary Bandwidth - 30mW, 602.000MHz


Step 1

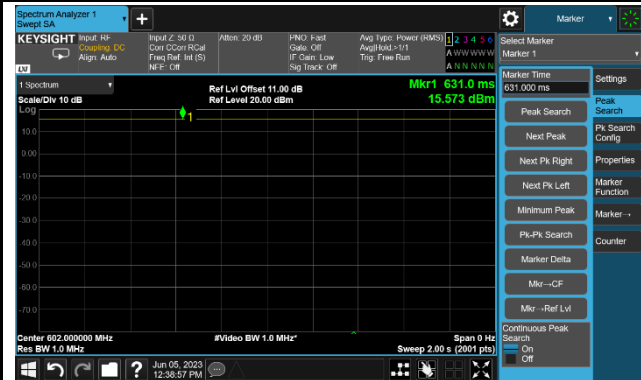

Step 2

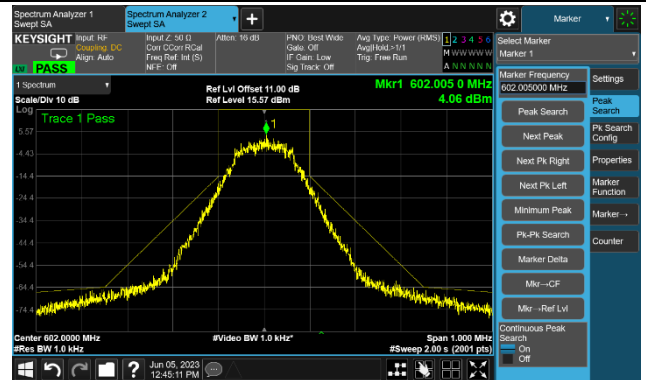

Step 3

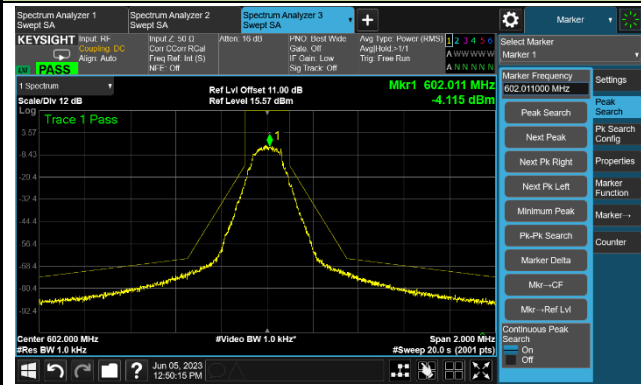

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Dandy Li
Test Date	2023-04-23 ~ 2023-06-05		

Frequency (MHz)	Measurement Level (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
30mW					
558.000	14.81	1.70	16.51	16.99	Pass
580.000	14.88	1.70	16.58	16.99	Pass
602.000	14.99	1.70	16.69	16.99	Pass
10mW					
558.000	10.08	1.70	11.78	16.99	Pass
580.000	10.27	1.70	11.97	16.99	Pass
602.000	10.51	1.70	12.21	16.99	Pass
614.125	10.56	0.80	11.36	13.01	Pass
615.875	10.57	0.80	11.37	13.01	Pass
1mW					
558.000	0.30	1.70	2.00	16.99	Pass
580.000	0.41	1.70	2.11	16.99	Pass
602.000	0.54	1.70	2.24	16.99	Pass
614.125	0.61	0.80	1.41	13.01	Pass
615.875	0.60	0.80	1.40	13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99$ dBm.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01$ dBm.

Note 3: EIRP (dBm) = Measurement Level (dBm) + Antenna Gain (dBi).

A.5 Radiated Spurious Emission Test Result

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-04-26	Test Mode	30mW

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
558.000	49.400	-104.4	31.8	-72.6	-54.0	-18.6	Peak	Horizontal
	710.940	-103.5	37.8	-65.7	-54.0	-11.7	Peak	Horizontal
	97.900	-105.0	40.7	-64.3	-54.0	-10.3	Peak	Vertical
	745.860	-102.6	37.7	-64.9	-54.0	-10.9	Peak	Vertical
	1202.500	-60.5	5.9	-54.6	-30.0	-24.6	Peak	Horizontal
	1920.000	-63.3	8.2	-55.2	-30.0	-25.2	Peak	Horizontal
	1195.000	-63.9	7.5	-56.4	-30.0	-26.4	Peak	Vertical
	1920.000	-62.7	8.0	-54.7	-30.0	-24.7	Peak	Vertical
580.000	52.795	-103.9	30.7	-73.2	-54.0	-19.2	Peak	Horizontal
	724.035	-103.2	38.1	-65.1	-54.0	-11.1	Peak	Horizontal
	98.385	-104.5	40.2	-64.3	-54.0	-10.3	Peak	Vertical
	774.960	-102.0	38.1	-63.9	-54.0	-9.9	Peak	Vertical
	1740.000	-62.5	7.3	-55.3	-30.0	-25.3	Peak	Horizontal
	1920.000	-62.6	8.2	-54.5	-30.0	-24.5	Peak	Horizontal
	1920.000	-62.9	8.0	-54.9	-30.0	-24.9	Peak	Vertical
	2827.500	-66.2	10.5	-55.6	-30.0	-25.6	Peak	Vertical
602.000	49.400	-103.8	31.8	-72.0	-54.0	-18.0	Peak	Horizontal
	732.280	-103.8	38.1	-65.7	-54.0	-11.7	Peak	Horizontal
	97.900	-105.3	40.7	-64.6	-54.0	-10.6	Peak	Vertical
	759.440	-102.8	38.5	-64.3	-54.0	-10.3	Peak	Vertical
	1204.000	-60.2	5.7	-54.5	-30.0	-24.5	Peak	Horizontal
	1921.000	-62.7	8.1	-54.6	-30.0	-24.6	Peak	Horizontal
	1249.000	-65.1	9.0	-56.0	-30.0	-26.0	Peak	Vertical
	1921.000	-62.9	8.0	-54.8	-30.0	-24.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2023-04-26	Test Mode	10mW

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
614.125	51.825	-104.3	31.1	-73.2	-54.0	-19.2	Peak	Horizontal
	734.220	-102.2	38.0	-64.2	-54.0	-10.2	Peak	Horizontal
	97.415	-104.3	40.6	-63.7	-54.0	-9.7	Peak	Vertical
	620.730	-102.4	36.0	-66.4	-54.0	-12.4	Peak	Vertical
	1354.000	-67.5	9.7	-57.8	-30.0	-27.8	Peak	Horizontal
	3178.000	-67.0	10.8	-56.2	-30.0	-26.2	Peak	Horizontal
	1354.000	-66.6	9.1	-57.5	-30.0	-27.5	Peak	Vertical
	2818.000	-66.6	10.5	-56.1	-30.0	-26.1	Peak	Vertical
615.875	54.250	-104.3	30.1	-74.2	-54.0	-20.2	Peak	Horizontal
	772.535	-101.5	37.3	-64.2	-54.0	-10.2	Peak	Horizontal
	97.900	-104.3	40.7	-63.6	-54.0	-9.6	Peak	Vertical
	828.795	-103.7	39.3	-64.4	-54.0	-10.4	Peak	Vertical
	2284.000	-69.0	10.9	-58.1	-30.0	-28.1	Peak	Horizontal
	4324.000	-69.9	13.9	-56.0	-30.0	-26.0	Peak	Horizontal
	1426.000	-66.6	8.5	-58.1	-30.0	-28.1	Peak	Vertical
	2818.000	-67.7	10.5	-57.2	-30.0	-27.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)


Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

A.6 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2023-05-04
Limit: FCC_Part15.107_CE_AC Power_Class B	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: Plug-on Wireless Transmitter	Power: AC 120V/60Hz
Note: Transmit at channel 558.000MHz	

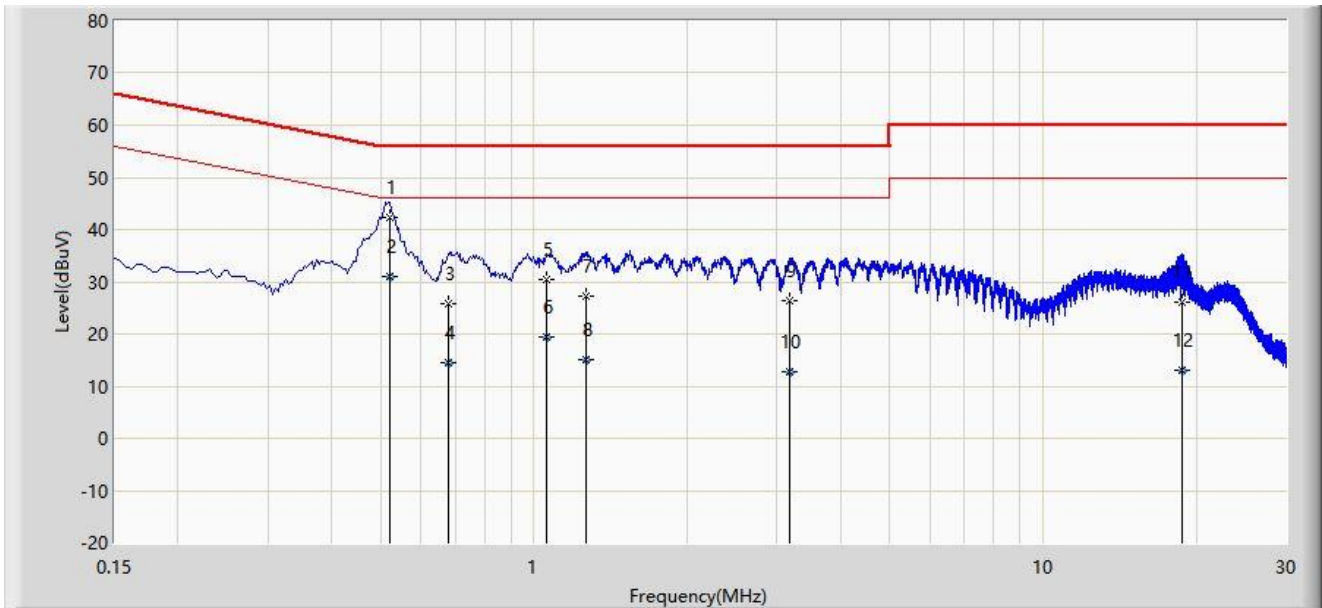


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.522	42.317	32.414	-13.683	56.000	9.902	QP
2		0.522	30.870	20.968	-15.130	46.000	9.902	AV
3		0.678	25.711	15.730	-30.289	56.000	9.982	QP
4		0.678	14.495	4.514	-31.505	46.000	9.982	AV
5		1.058	30.434	20.292	-25.566	56.000	10.142	QP
6		1.058	19.494	9.352	-26.506	46.000	10.142	AV
7		1.266	27.258	17.110	-28.742	56.000	10.148	QP
8		1.266	15.109	4.961	-30.891	46.000	10.148	AV
9		3.178	26.263	16.021	-29.737	56.000	10.242	QP
10		3.178	12.640	2.399	-33.360	46.000	10.242	AV
11		18.722	26.045	14.683	-33.955	60.000	11.362	QP
12		18.722	13.098	1.736	-36.902	50.000	11.362	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2023-05-04
Limit: FCC_Part15.107_CE_AC Power_Class B	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: Plug-on Wireless Transmitter	Power: AC 120V/60Hz
Note: Transmit at channel 558.000MHz	

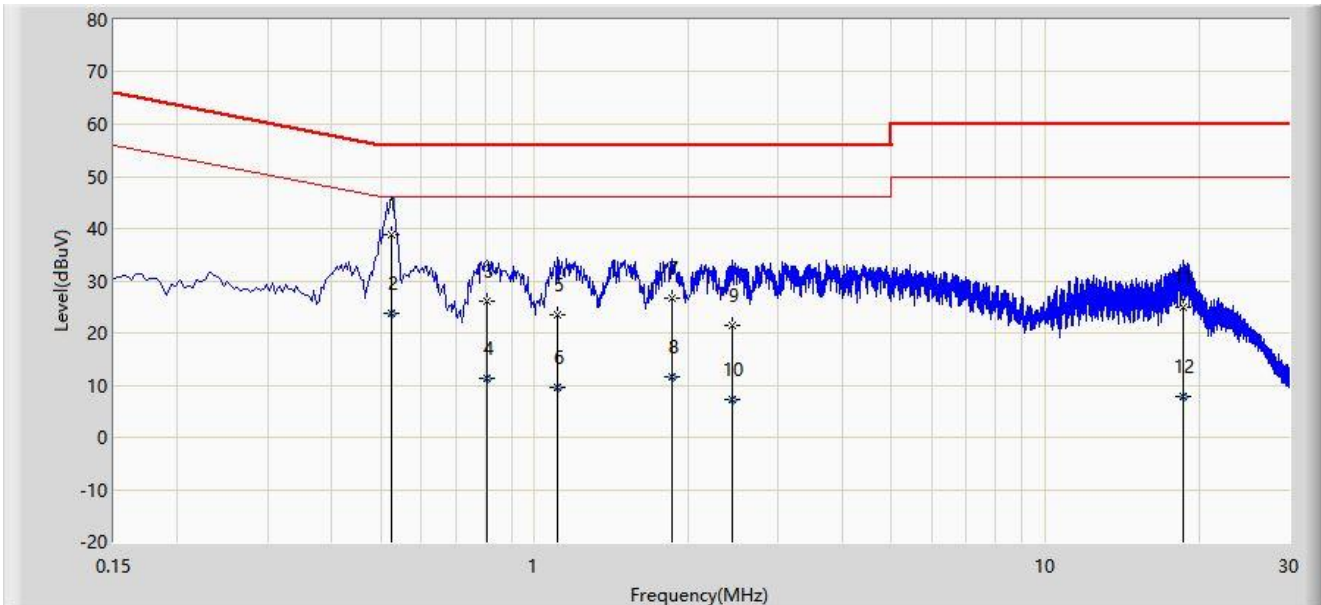

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.526	38.756	28.864	-17.244	56.000	9.892	QP
2		0.526	23.738	13.846	-22.262	46.000	9.892	AV
3		0.806	26.173	16.155	-29.827	56.000	10.018	QP
4		0.806	11.411	1.393	-34.589	46.000	10.018	AV
5		1.106	23.591	13.468	-32.409	56.000	10.123	QP
6		1.106	9.463	-0.660	-36.537	46.000	10.123	AV
7		1.858	26.657	16.509	-29.343	56.000	10.148	QP
8		1.858	11.472	1.325	-34.528	46.000	10.148	AV
9		2.442	21.567	11.391	-34.433	56.000	10.176	QP
10		2.442	7.166	-3.010	-38.834	46.000	10.176	AV
11		18.658	24.918	13.588	-35.082	60.000	11.331	QP
12		18.658	7.816	-3.515	-42.184	50.000	11.331	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B - Test Setup Photograph

Refer to "2304RSU032-UT" file.

Appendix C - EUT Photograph

Refer to "2304RSU032-UE" file.