



# SHURE

## ELECTROMAGNETIC COMPATIBILITY LABORATORY

### TEST REPORT

**TEST REPORT TITLE: Electromagnetic Compatibility Tests of the Shure ULXD6 J50A models, including ULXD6/C J50A, ULXD6/O J50A, ULXD6W/C J50A, and ULXD6W/O J50A Digital Wireless Transmitters operating in the 572MHz to 607MHz and 614 to 616 Bands**

**TEST ITEM DESCRIPTION:**

The Shure ULXD6 is a digital wireless microphone transmitter, microprocessor controlled transmitter. The suffix '/C' in the model number indicates that the microphone operates with a cardioid response pattern and the suffix '/O' indicates that the microphone operates with an omnidirectional response pattern. The letter 'W' in the model number indicates that the unit is painted white.

For: Shure Incorporated  
5800 West Touhy Avenue  
Niles, IL 60714

Project ID Number: SEL-030/ULXD6 J50A

Date Tested: November 27, 2017, January 25, 2018, February 6, 16, 26, 27, 2018, March 13, 2018

Test Personnel: Juan Castrejon, Alex Mishinger, and Craig Kozokar

Test Specification: FCC Part 15C, Section 15.236g  
RSS 210 Issue 9 Annex G

FCC ID : DD4ULXD6J50

IC : 616A-ULXD6J50

TEST REPORT BY: Craig Kozokar Global Compliance Engineer May 1, 2018

APPROVED BY: Thomas E. Beaudin GC Project Engineer May 1, 2018  
Signature Position Date



## TABLE OF CONTENTS

<u>PARAGRAPH</u>	<u>DESCRIPTION OF CONTENTS</u>	<u>PAGE NO.</u>
0.	Report Revision History .....	4
1.	Introduction .....	5
1.1.	Scope of Tests .....	5
1.2.	Purpose .....	5
1.3.	Deviation, Additions and Exclusions .....	5
1.4.	EMC Laboratory Identification .....	5
1.5.	Summary of Tests Performed .....	6
2.	Applicable Documents.....	6
3.	EUT Setup and Operation .....	6
3.1	General Description .....	6
3.2	Test Samples .....	6
3.3	Operational Mode.....	7
4	Test Instrumentation.....	7
5	Procedure.....	7
6	Other Test Conditions .....	7
6.1	Test Personnel.....	7
6.2	Disposition of the EUT .....	7
7	Results of Tests .....	7
8	Conclusions .....	7
9	Certification .....	7
10	Equipment List .....	8
11	Appendix A: Radiated Emissions .....	9
12	Appendix B: Power Output .....	47
13	Appendix C: Necessary Bandwidth .....	52
14	Appendix D: Test Setup Photos .....	69

**Note: This report shall not be reproduced, except in full, without the written approval of the Shure Incorporated Electromagnetic Laboratory (SEL). Total Page Count is 69.**



**LIST OF APPENDICIES**

<b>APPENDIX</b>	<b>TEST DESCRIPTION</b>
A	Radiated RF Spurious Emissions Measurement, 30 MHz to 10 GHz
B	Maximum Radiated Power
C	Necessary Bandwidth



**REPORT REVISION HISTORY**

Revision	Date	Description
0	March 30, 2018	Initial release
1	November 14, 2018	Updated to include RSS 210.9 certification information
2	December 27, 2018	Updated to include all model variants of ULXD6 J50A



1. INTRODUCTION

1.1. Scope of Tests

This report presents the results of testing per FCC Part 15C, Section 236g, Radiated RF Spurious Emissions, Necessary Bandwidth, and Maximum Radiated Power as well as RSS 210 Issue 9, Annex G: Low-Power Radio Apparatus Operating in the Television Bands. The following data was taken following the measurement method as described in the document section(s) listed on page 1 of this document. Provided is the data for the test sample. Also included is a summary of the measurements made and a description of the measurement setup. The test sample meet the requirements of the above standards. The equipment under test (EUT) contained a transmitter that was designed to transmit in the UHF TV frequency bands shown in Table 1.

Model	Band	Frequency (MHz)	Output Power (mW)
ULXD6	J50A	572 to 607 and 614 to 616	1, 10, and 20

Table 1. EUT Frequencies and Power Levels

1.2. Purpose

This series of testing was performed to determine if the test item would meet the requirements of FCC Part 15C, Section 236g and RSS 210 Issue 9, Annex G: Low-Power Radio Apparatus Operating in the Television Bands.

1.3. Deviations, Additions and Exclusions

The variants of the ULXD6 model number are as follows:

- ULXD6/C J50A - Black finish model, cardioid microphone pattern
- ULXD6/O J50A - Black finish model, omnidirectional microphone pattern
- ULXD6W/C J50A - White finish model, cardioid microphone pattern
- ULXD6W/O J50A - White finish model, omnidirectional microphone pattern

1.4. EMC Laboratory Identification

The electromagnetic compatibility tests were performed at the Shure Electromagnetic Laboratory, Shure Incorporated, 5800 West Touhy Ave, Niles, Illinois 60714-4608. This laboratory is registered with Industry Canada as Site # 616A-1. The Shure Electromagnetic Laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). The NVLAP Lab Code is: 200946-0.

1.5. Summary of Tests Performed

The following electromagnetic compatibility tests (Table 2) were performed on the test item in accordance with ETSI specifications.

Table 2. Summary of tests performed

Test Spec	Description	Tested Frequency	Appendix	Test Results
FCC Part 15C RSS 210.9	Radiated Spurious Emissions	30 MHz to 10 GHz	A	Pass
FCC Part 15C RSS 210.9	Maximum Radiated Power	572.125MHz, 589.500MHz, 606.875MHz,	B	Pass



		614.125MHz, 615.875MHz		
FCC Part 15C RSS 210.9	Necessary Bandwidth Measurements	572.125MHz, 589.500MHz, 606.875MHz, 614.125MHz, 615.875MHz	C	Pass

**2. APPLICABLE DOCUMENTS**

The following documents of the exact issue designated form part of this document to the extent specified herein:

FCC Part 15C, Section 236g

RSS 210 Issue 9, Annex G: Low-Power Radio Apparatus Operating in the Television Bands

EN 300 422-1 v1.4.2 (2011-08), "Wireless Microphone "Electromagnetic Compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25MHz to 3GHz frequency range; Part 1; Technical characteristics and methods of measurements"

ANSI C63.4 (2014), "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

**3. EUT SET-UP AND OPERATION**

**3.1. General Description**

The test sample used was the Shure ULXD6 digital wireless microphone transmitter. The device operation is restricted to within the specified frequency range and power levels by the loaded firmware supplied by Shure. The operator/third party can change the output frequency and power levels, but only within the limits set within the firmware. The EUT was arranged and tested per individual Appendices.

**3.2 Test Sample**

The following product sample was tested:

**Table 3: Shure ULXD6 J50A Digital Wireless Transmitter Sample**

ULXD6/O J50A Serial Numbers
#1

**3.3 Operational Mode**

All radiated spurious emissions, maximum radiated power, and necessary bandwidth tests were performed at the below transmit frequency and output power modes shown in Table 4.

Band	Frequency in MHz	L/M/H	Power Level in mW
J50A	572.125	Low	20
J50A	589.500	Middle	20
J50A	606.875	High	20
J50A	614.125	Low	20
J50A	615.875	High	20

**Table 4. EUT Frequencies and Power Levels**



**4. Test Instrumentation**

A list of the test equipment used can be found in Table 10-1. All equipment used was within calibration during and throughout the duration of the tests. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

**5. Procedure**

The specific test procedures are presented in the individual appendices.

**6. Other Test Conditions:**

**6.1. Test Personnel**

All EMC tests were performed by qualified personnel from the Shure EMC Laboratory.

**6.2. Disposition of the EUT**

The EUTs and all associated equipment were returned to Shure Incorporated upon completion of the tests.

**7. Results of Tests:**

The results are presented in Appendices. It was found that the EUT meet the requirements of FCC Part 15C, Section 236g for Radiated RF Spurious Emissions, Maximum Radiated Output, and Necessary Bandwidth as well as RSS 210 Issue 9, Annex G: Low-Power Radio Apparatus Operating in the Television Bands.

**8. Conclusions:**

It was determined that all variants of the Shure ULXD6 J50A Digital Wireless Microphone Transmitter did fully comply with the requirements of FCC Part 15C, Section 236g, Radiated RF Spurious Emissions, Maximum Radiated Output, and Necessary Bandwidth as well as RSS 210 Issue 9, Annex G: Low-Power Radio Apparatus Operating in the Television Bands.

**9. Certification:**

Shure EMC Laboratory certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUTs at the test date. Any electrical or mechanical modification made to the EUTs subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



10. Equipment List

Table 10-1 Test Equipment

L# or ID	Description	Manufacturer	Model #	Serial #	Frequency Range	Cal Date	Due Date
L23-011-01	3 meter RF Chamber	ETS Lindgren	FACT-3	AJ640	25MHz - 18GHz	8/8/2017	8/8/2018
L23-011-02	Electric Powered Turntable	ETS Lindgren	2088	N/A	N/A	N/A	N/A
L23-011-08	Controller	EMCO	2090	29799	N/A	N/A	N/A
L23-011-09	Antenna Positioner	ETS Lindgren	2071-2	35500	N/A	N/A	N/A
L23-011-15	BiConiLog Antenna	ETS Lindgren	3142C	34790	25MHz-1GHz	6/22/2017	6/22/2018
L23-011-44	BiConiLog Antenna	ETS Lindgren	3142C	79899	25MHz-1GHz	2/27/2017	2/27/2018
L23-011-54	EMI Test Receiver	Rohde & Schwarz	ESR26	100220	9kHz-26GHz	3/30/2017	3/30/2018
L23-011-31	EMI/EMS Test Software	Rohde & Schwarz	EMC32	V 9.21.00	N/A	N/A	N/A
L23-011-55	Horn antenna with pre-amplifier	ETS Lindgren	3117-PA	206583	1GHz to 18 GHz	4/27/2017	4/27/2018
L23-011-41	Horn Antenna	ETS Lindgren	3117	123511	1GHz to 18 GHz	5/7/2017	5/7/2018
L23-011-57	High Pass Filter	K&L	11SH10-940/X10000-0/0	3	940MHz – 10GHz	3/31/2017	3/31/2018
L23-022-02	Spectrum Analyzer	Rohde & Schwarz	FSW26	103788	9kHz-26GHz	3/28/2017	3/28/2018
L23-022-01	Spectrum Analyzer	Rohde & Schwarz	FSU26	201043	9kHz-26GHz	8/23/2017	8/23/2018
L23-040-09	20dB attenuator	Mini-Circuits	BW-S20W2	N/A	20MHz to 18GHz	2/21/2017	2/21/2018
L23-040-04	20dB attenuator	Mini-Circuits	BW-S20W5	1133	20MHz to 18GHz	7/18/2017	7/18/2018
L23-034-05	Temperature Hygrometer	Extech	445703	48254-66	N/A	9/15/2016	9/15/2018
L23-034-04	Temperature Hygrometer	Extech	445703	48254-13	N/A	9/15/2016	9/15/2018
L23-023-01	RF Signal Generator	Rohde & Schwarz	SMF100A	101553	20Hz to 26.5GHz	8/23/2017	8/23/2018





## A. RADIATED RF SPURIOUS EMISSIONS – 30 MHz TO 10 GHz

### Purpose:

This test performed to determine if the EUT meets the radiated RF emission requirements of the FCC Part 15C section 236g and the requirements of RSS 210 Issue 9, Annex G: Low-Power Radio Apparatus Operating in the Television Bands over the frequency range from 30MHz to 10GHz. A Quasi-Peak and Average detectors were used for the measurements.

### Requirements:

As stated in FCC 15C section 236g and in RSS 210.9, spurious emissions must meet the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08)

### Measurement Uncertainty:

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence)

Measurement Type	$U_{lab}$	$U_{ETSI}$
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.12 dB	6.00 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 13 GHz)	4.56 dB	6.00 dB

$U_{lab}$  = Determined for Shure EMC Laboratory

$U_{ETSI}$  = From ETSI EN 300 422-1 Table 6

Since  $U_{lab}$  is less than or equal to  $U_{ETSI}$ :

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;  
Non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

### Test Setup and Instrumentation:

Photographs of the test setup are shown in Figure 1 and Figure 2. The test instrumentation can be determined from Table 10-1.

### EUT Operation:


The EUT was powered up and the frequency of the transmitter was selected using the front panel controls. The EUT was checked for proper operation after it was setup on the table. For radiated spurious emissions the testing was conducted with the EUT set to the low, middle, and high frequencies in the Low Band, and low and high frequencies in the High band within the operating frequency range, and at 20mW RF output.

**Appendix A**

**Specific Test Procedures:**

All tests were performed in a 28ft. x 20ft. x 18.5ft. 3m semi-anechoic test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All power lines and signal lines entering the enclosure pass through filters on the enclosure wall. The power line filters prevent extraneous signals from entering the enclosure on these leads.

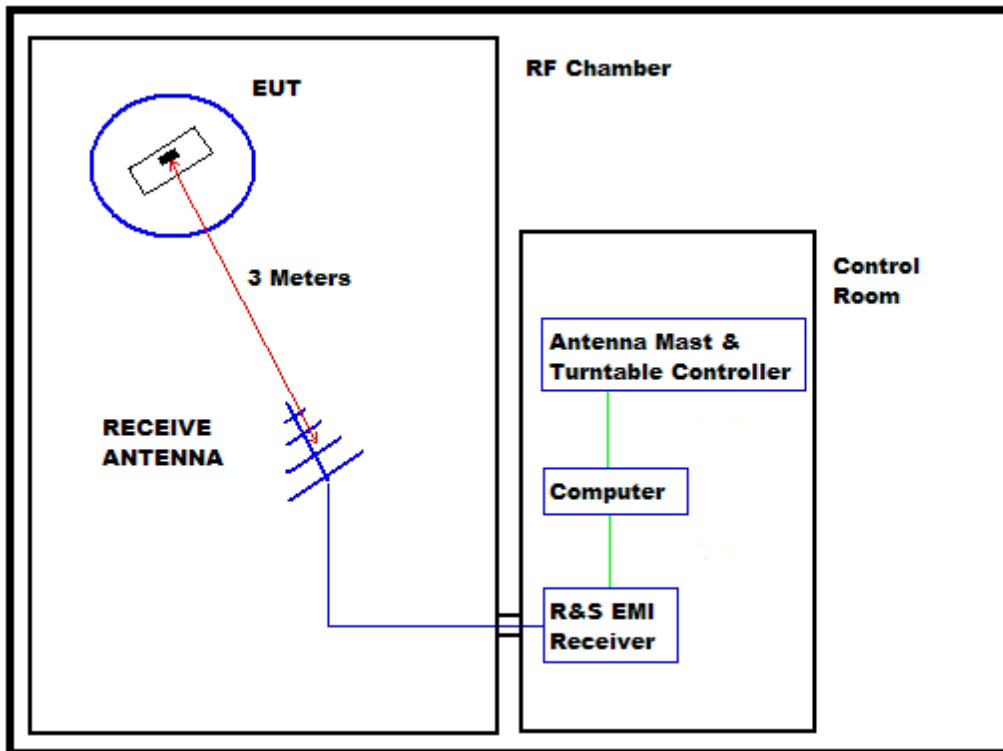

**BLOCK DIAGRAM OF SHIELDED ENCLOSURE**

Preliminary radiated measurements were performed to determine the frequencies where the significant emissions might be found. With the EUT at one set position and the measurement antenna at a set height (i.e. without maximizing), the radiated emissions were measured using a peak detector and automatically plotted. The BiConiLog measuring antenna was positioned at a 3 meter distance from the EUT.

## Appendix A

All significant broadband and narrowband signals found in the preliminary sweeps were then measured using a peak detector at a test distance of 3 meters. The measurements were made with a BiConiLog antenna over the frequency range of 30 MHz to 1 GHz, and a double ridged waveguide antenna over the frequency range of 1 GHz to 10 GHz.

To ensure that maximum emission levels were measured, the following steps were taken:

- i. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
- ii. Since the measuring antennas are linearly polarized, both horizontal and vertical field components were measured.
- iii. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, another antenna was set in place of the EUT and connected to a calibrated signal generator. (A tuned dipole was used for all measurements below 1GHz and a double ridged waveguide antenna was used for all measurements above 1GHz.) The output of the signal generator was adjusted to match the received level at the EMI receiver. The signal level was recorded. The reading was corrected to compensate for cable loss and antenna gain.

### Results:

The plots of the peak preliminary radiated voltage levels and maximized quasi-peak radiated voltage levels results are presented on page 12 thru page 41. The ERP measurements are shown on pages 42 thru page 46. All emissions measured from the EUT were within the ETSI EN 300 422-1 specification limits.



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz  
EUT: ULXD6 J50A  
Serial Number: # 1  
Operating Frequency: 572.125MHz  
Power Level / Mod Mode: 20mW  
Name: Alex Mishinger  
Date Tested: Tested on January 25, 2018

## EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 30MHz to 1GHz 79899 EU

Hardware Setup: Electric Field Strength 79899 2017 02 27  
Measurement Type: Open-Area-Test-Site  
Frequency Range: 30 MHz - 1 GHz  
Graphics Level Range: 0 dB $\mu$ V/m - 120 dB $\mu$ V/m

### Preview Measurements:

Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6  
Polarization: H + V  
Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5  
Graphics Display: Show separate traces for horizontal and vertical polarization  
Sweep Test Template: Compliance Test EN300422 Transmitter 25MHz 1GHz 79899  
PREVIEW

### Adjustment:

Antenna height: Range = 50 cm , Measuring Speed = 1  
Turntable position: Range = 90 deg , Measuring Speed = 5  
Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz  
79899 FINAL

### Final Measurements:

Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz  
79899 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26]					
25 MHz - 30 MHz	2.25 kHz	PK+ ; QPK	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+ ; QPK	120 kHz	2 s	0 dB



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 79899 2017 02 27 - [EMI radiated]**

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 3.36 SP2,  
CAL 5/28/2016

Signal Path: Receiver-EMI to 1 GHz  
FW 1.0  
Correction Table: Receiver-EMI Antenna 18GHz L23\_041\_38 8m

Antenna: ETS 3142C 79899  
SN 79899, CAL 12/5/2015  
Correction Table (vertical): BiconiLog 3142C Hor-79899 2017 02  
27  
Correction Table (horizontal): BiconiLog 3142C Hor-79899 2017  
02 27


Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

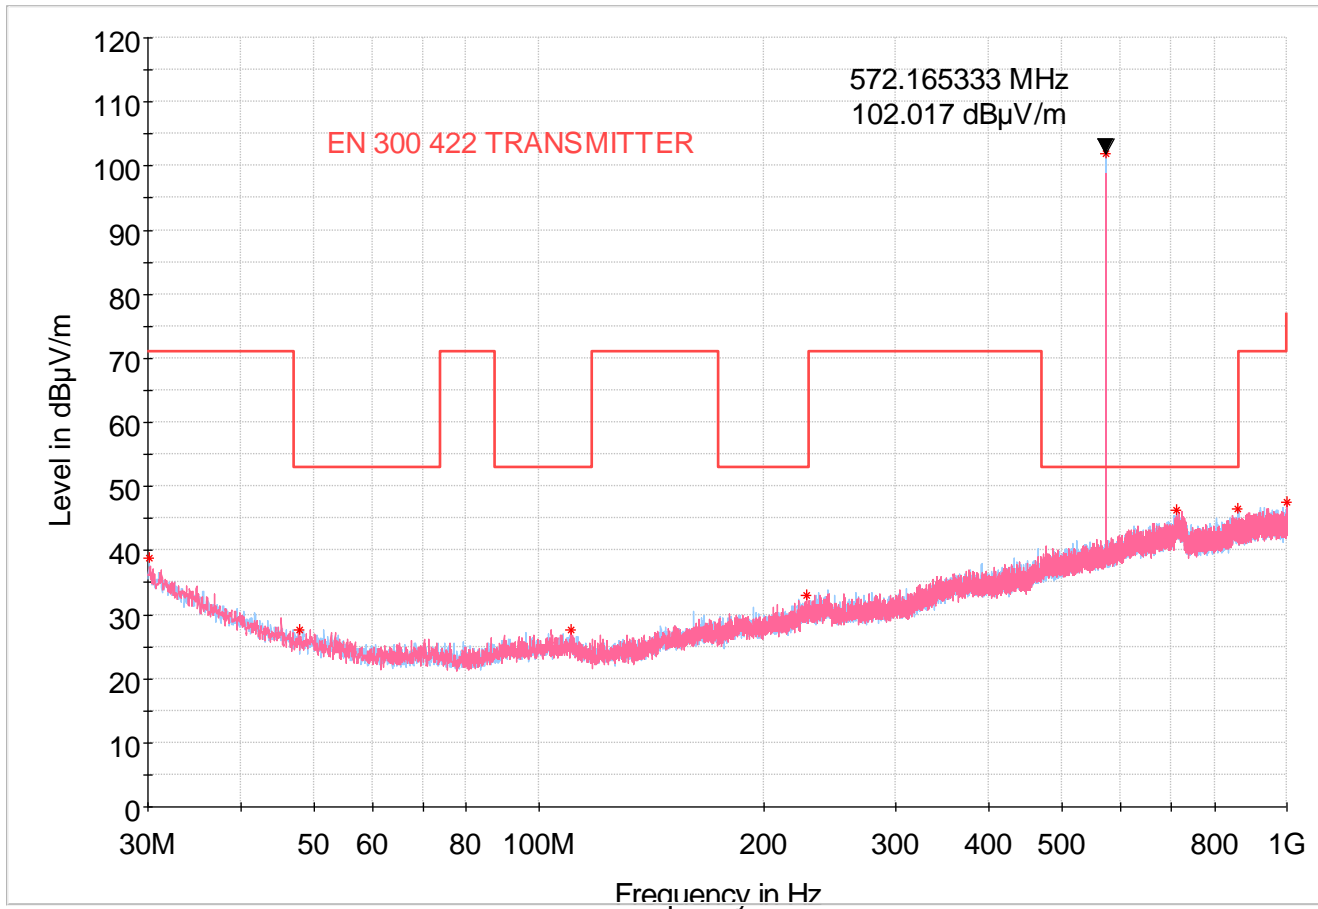

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	DET 2 (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
711.845333	46.34	---	53.00	6.66	---	---	100.0	H	1.0	22.8	2:57:24 PM - 1/25/2018
30.129333	38.75	---	71.00	32.25	---	---	200.0	H	115.0	18.5	2:57:24 PM - 1/25/2018
861.096000	46.48	---	53.00	6.52	---	---	200.0	H	135.0	24.0	2:57:24 PM - 1/25/2018
572.165333	102.02	---	53.00	-49.02	---	---	300.0	H	33.0	20.1	2:57:24 PM - 1/25/2018
228.074000	32.98	---	53.00	20.02	---	---	100.0	V	326.0	11.8	2:57:24 PM - 1/25/2018
998.448000	47.55	---	71.00	23.45	---	---	150.0	V	214.0	25.0	2:57:24 PM - 1/25/2018
47.783333	27.68	---	53.00	25.32	---	---	150.0	V	242.0	10.1	2:57:24 PM - 1/25/2018
110.348333	27.66	---	53.00	25.34	---	---	250.0	V	309.0	7.8	2:57:24 PM - 1/25/2018

Final Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC 15C Radiated Emissions 1GHz - 10GHz  
 EUT: ULXD6 J50A  
 Serial Number: # 1  
 Operating Frequency: 572.125MHz  
 Power Level / Mod Mode: 20mW  
 Name: Alex Mishinger  
 Date Tested: Tested on February 16, 2018

## EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 1GHz to 10GHz 3117-PA 200363

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17  
 Measurement Type: Open-Area-Test-Site  
 Frequency Range: 1 GHz - 10 GHz  
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m  
 Preview Measurements:  
   Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6  
   Polarization: H + V  
   Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5  
   Graphics Display: Show separate traces for horizontal and vertical polarization  
   Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:  
   Antenna height: Range = 50 cm , Measuring Speed = 1  
   Turntable position: Range = 90 deg , Measuring Speed = 5  
   Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:  
   Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



## Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 2017 10 17 - [EMI radiated]

### Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL  
5/28/2016

Signal Path: Receiver-EMI to 18 GHz  
FW 1.0  
Correction Table: Receiver-EMI Antenna TEMP 2016 11 23

Antenna: EMI3117-PA 200385  
SN 200385, CAL 10/16/2018  
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10  
16  
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017  
10 16  
Correction Table (vertical): L23\_041\_47 Cable  
Correction Table (horizontal): L23\_041\_47 Cable


Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

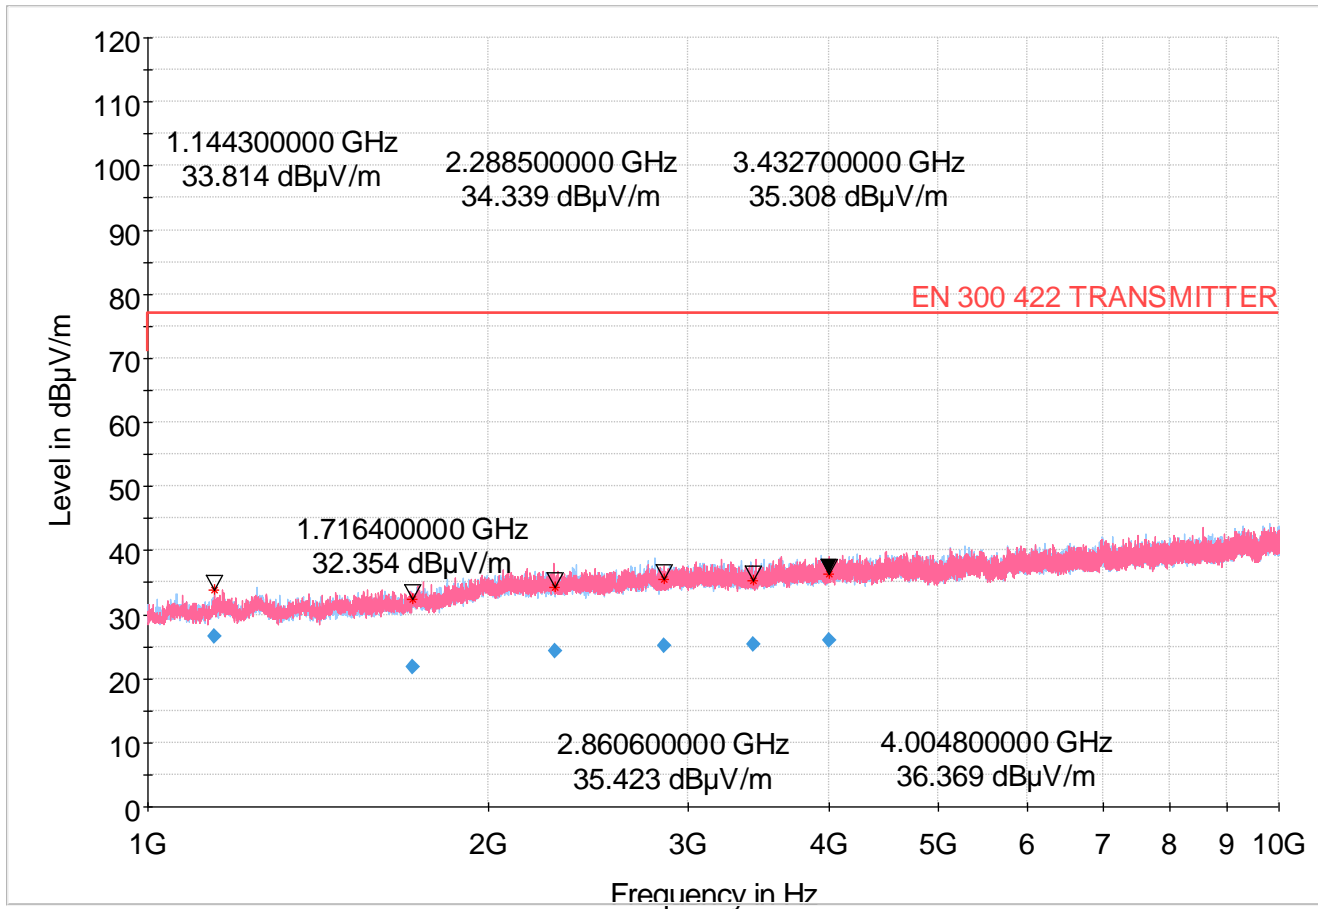

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1144.300000	33.81	77.00	43.19	---	---	119.0	H	203.0	---	3:07:04 PM - 2/16/2018	---
1716.400000	32.35	77.00	44.65	---	---	393.0	H	235.0	---	3:10:40 PM - 2/16/2018	---
2288.500000	34.34	77.00	42.66	---	---	246.0	V	93.0	---	3:12:15 PM - 2/16/2018	---
2860.600000	35.42	77.00	41.58	---	---	105.0	H	45.0	---	3:06:07 PM - 2/16/2018	---
3432.700000	35.31	77.00	41.69	---	---	135.0	H	43.0	---	3:08:29 PM - 2/16/2018	---
4004.800000	36.37	77.00	40.63	---	---	199.0	H	150.0	---	3:09:40 PM - 2/16/2018	---

Final Results

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1144.300000	26.60	77.00	50.40	1000.0	1000.000	119.0	H	203.0	-15.9	3:07:13 PM - 2/16/2018	---
1716.400000	21.84	77.00	55.16	1000.0	1000.000	393.0	H	236.0	-15.0	3:10:48 PM - 2/16/2018	---
2288.500000	24.31	77.00	52.69	1000.0	1000.000	246.0	V	93.0	-12.9	3:12:25 PM - 2/16/2018	---
2860.600000	25.04	77.00	51.96	1000.0	1000.000	105.0	H	45.0	-11.6	3:06:16 PM - 2/16/2018	---
3432.700000	25.27	77.00	51.73	1000.0	1000.000	135.0	H	43.0	-10.8	3:08:39 PM - 2/16/2018	---
4004.800000	25.93	77.00	51.07	1000.0	1000.000	199.0	H	150.0	-8.7	3:09:50 PM - 2/16/2018	---



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz  
 EUT: ULXD6 J50A  
 Serial Number: # 1  
 Operating Frequency: 589.500MHz  
 Power Level / Mod Mode: 20mW  
 Name: Alex Mishinger  
 Date Tested: Tested on November 27, 2017

## EMI Auto Test Template: Bandsaw COMPLIANCE TEST FCC 15C 30MHz to 1GHz 34790 FCC

Hardware Setup: Electric Field Strength 34790  
 Measurement Type: Open-Area-Test-Site  
 Frequency Range: 30 MHz - 1 GHz  
 Graphics Level Range: 0 dBµV/m - 125 dBµV/m

Preview Measurements:  
 Graphics Display: Show separate traces for horizontal and vertical polarization  
 Sweep Test Template: Compliance Test FCC 30MHz 1GHz 34790 PREVIEW

Adjustment:  
 Template for Single Meas.: COMPLIANCE TEST FCC 15B 30 to 1000 MHz 34790 MAX

Final Measurements:  
 Template for Single Meas.: COMPLIANCE TEST FCC 15B 30 to 1000 MHz 34790 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26]					
25 MHz - 30 MHz	2.25 kHz	PK+ ; QPK	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+ ; QPK	120 kHz	2 s	0 dB



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 34790 - [EMI radiated]**

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL  
5/28/2016


Signal Path: Receiver-EMI to 1 GHz  
FW 1.0  
Correction Table: Receiver-EMI Antenna 18GHz L23\_041\_38 8m

Antenna: ETS 3142C 34790  
SN 34790, CAL 6/3/2017  
Correction Table (vertical): BiconiLog 3142C Hor-34790 2017 06  
17  
Correction Table (horizontal): BiconiLog 3142C Hor-34790 2017  
06 17

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21

Appendix A

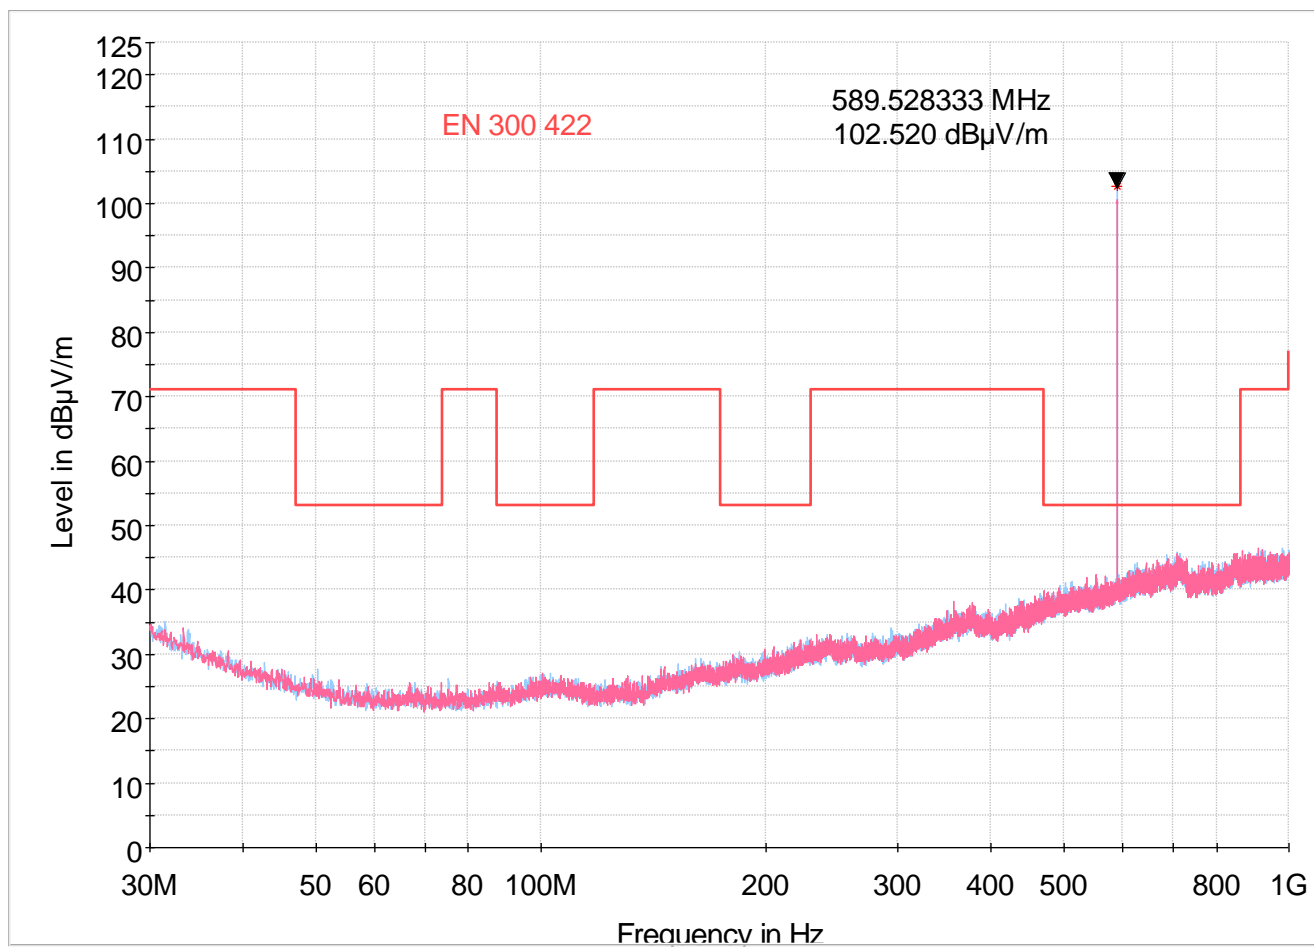

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
589.560667	102.58	53.00	-49.58	---	---	150.0	H	200.0	21.2	4:20:30 PM - 11/27/2017

Final Results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
---	---	---	---	---	---	---		---	---	



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC 15C Radiated Emissions 1GHz - 10GHz  
 EUT: ULXD6 J50A  
 Serial Number: # 1  
 Operating Frequency: 589.500MHz  
 Power Level / Mod Mode: 20mW  
 Name: Alex Mishinger  
 Date Tested: Tested on February 16, 2018

## EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 1GHz to 10GHz 3117-PA 200363

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17  
 Measurement Type: Open-Area-Test-Site  
 Frequency Range: 1 GHz - 10 GHz  
 Graphics Level Range: 0 dB $\mu$ V/m - 120 dB $\mu$ V/m

Preview Measurements:  
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6  
 Polarization: H + V  
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5  
 Graphics Display: Show separate traces for horizontal and vertical polarization  
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:  
 Antenna height: Range = 50 cm , Measuring Speed = 1  
 Turntable position: Range = 90 deg , Measuring Speed = 5  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 2017 10 17 -  
[EMI radiated]**

Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL  
5/28/2016

Signal Path: Receiver-EMI to 18 GHz  
FW 1.0


Antenna: Correction Table: Receiver-EMI Antenna TEMP 2016 11 23  
EMI3117-PA 200385  
SN 200385, CAL 10/16/2018  
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10  
16  
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017  
10 16  
Correction Table (vertical): L23\_041\_47 Cable  
Correction Table (horizontal): L23\_041\_47 Cable

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21

Appendix A

Full Spectrum

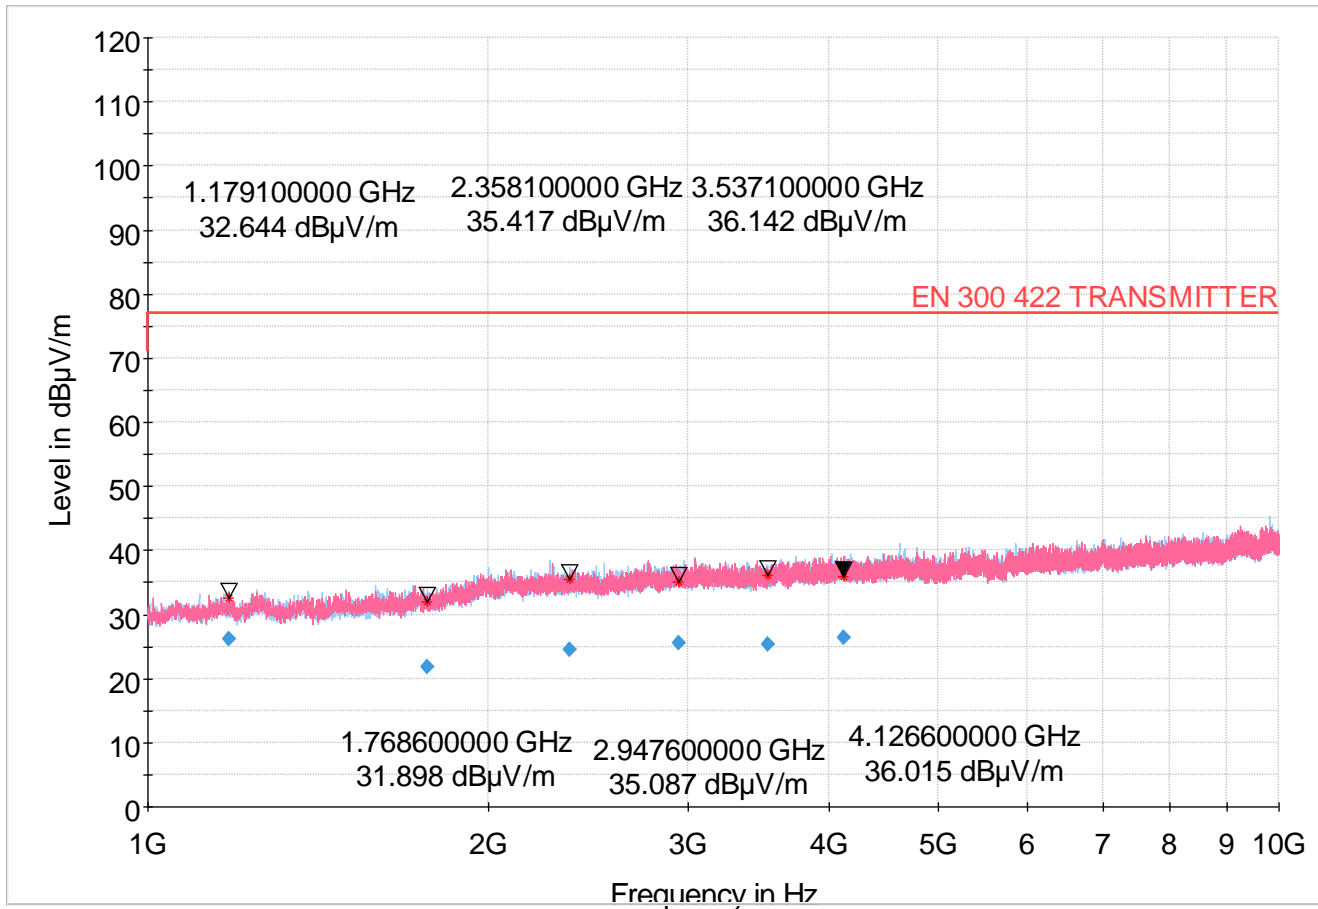

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1179.100000	32.64	77.00	44.36	---	---	219.0	V	79.0	---	3:49:18 PM - 2/16/2018	---
1768.600000	31.90	77.00	45.10	---	---	364.0	H	64.0	---	3:47:57 PM - 2/16/2018	---
2358.100000	35.42	77.00	41.58	---	---	239.0	V	160.0	---	3:50:33 PM - 2/16/2018	---
2947.600000	35.09	77.00	41.91	---	---	284.0	H	37.0	---	3:46:42 PM - 2/16/2018	---
3537.100000	36.14	77.00	40.86	---	---	110.0	H	285.0	---	3:44:59 PM - 2/16/2018	---
4126.600000	36.01	77.00	40.99	---	---	385.0	V	78.0	---	3:51:48 PM - 2/16/2018	---

Final Results

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1179.100000	26.17	77.00	50.83	1000.0	1000.000	219.0	V	79.0	-15.9	3:49:25 PM - 2/16/2018	---
1768.600000	21.84	77.00	55.16	1000.0	1000.000	364.0	H	64.0	-14.8	3:48:05 PM - 2/16/2018	---
2358.100000	24.54	77.00	52.46	1000.0	1000.000	239.0	V	160.0	-12.6	3:50:42 PM - 2/16/2018	---
2947.600000	25.46	77.00	51.54	1000.0	1000.000	284.0	H	37.0	-11.4	3:46:53 PM - 2/16/2018	---
3537.100000	25.40	77.00	51.60	1000.0	1000.000	110.0	H	285.0	-10.3	3:45:08 PM - 2/16/2018	---
4126.600000	26.44	77.00	50.56	1000.0	1000.000	385.0	V	78.0	-8.2	3:51:58 PM - 2/16/2018	---



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz  
 EUT: ULXD6 J50A  
 Serial Number: # 1  
 Operating Frequency: 606.875MHz  
 Power Level / Mod Mode: 20mW  
 Name: Alex Mishinger  
 Date Tested: Tested on January 25, 2018

## EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 30MHz to 1GHz 79899 EU

Hardware Setup: Electric Field Strength 79899 2017 02 27  
 Measurement Type: Open-Area-Test-Site  
 Frequency Range: 30 MHz - 1 GHz  
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:  
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6  
 Polarization: H + V  
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5  
 Graphics Display: Show separate traces for horizontal and vertical polarization  
 Sweep Test Template: Compliance Test EN300422 Transmitter 25MHz 1GHz 79899 PREVIEW

Adjustment:  
 Antenna height: Range = 50 cm , Measuring Speed = 1  
 Turntable position: Range = 90 deg , Measuring Speed = 5  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Final Measurements:  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26]					
25 MHz - 30 MHz	2.25 kHz	PK+ ; QPK	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+ ; QPK	120 kHz	2 s	0 dB





Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 79899 2017 02 27 - [EMI radiated]**

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 3.36 SP2,  
CAL 5/28/2016

Signal Path: Receiver-EMI to 1 GHz  
FW 1.0  
Correction Table: Receiver-EMI Antenna 18GHz L23\_041\_38 8m

Antenna: ETS 3142C 79899  
SN 79899, CAL 12/5/2015  
Correction Table (vertical): BiconiLog 3142C Hor-79899 2017 02  
27  
Correction Table (horizontal): BiconiLog 3142C Hor-79899 2017  
02 27


Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

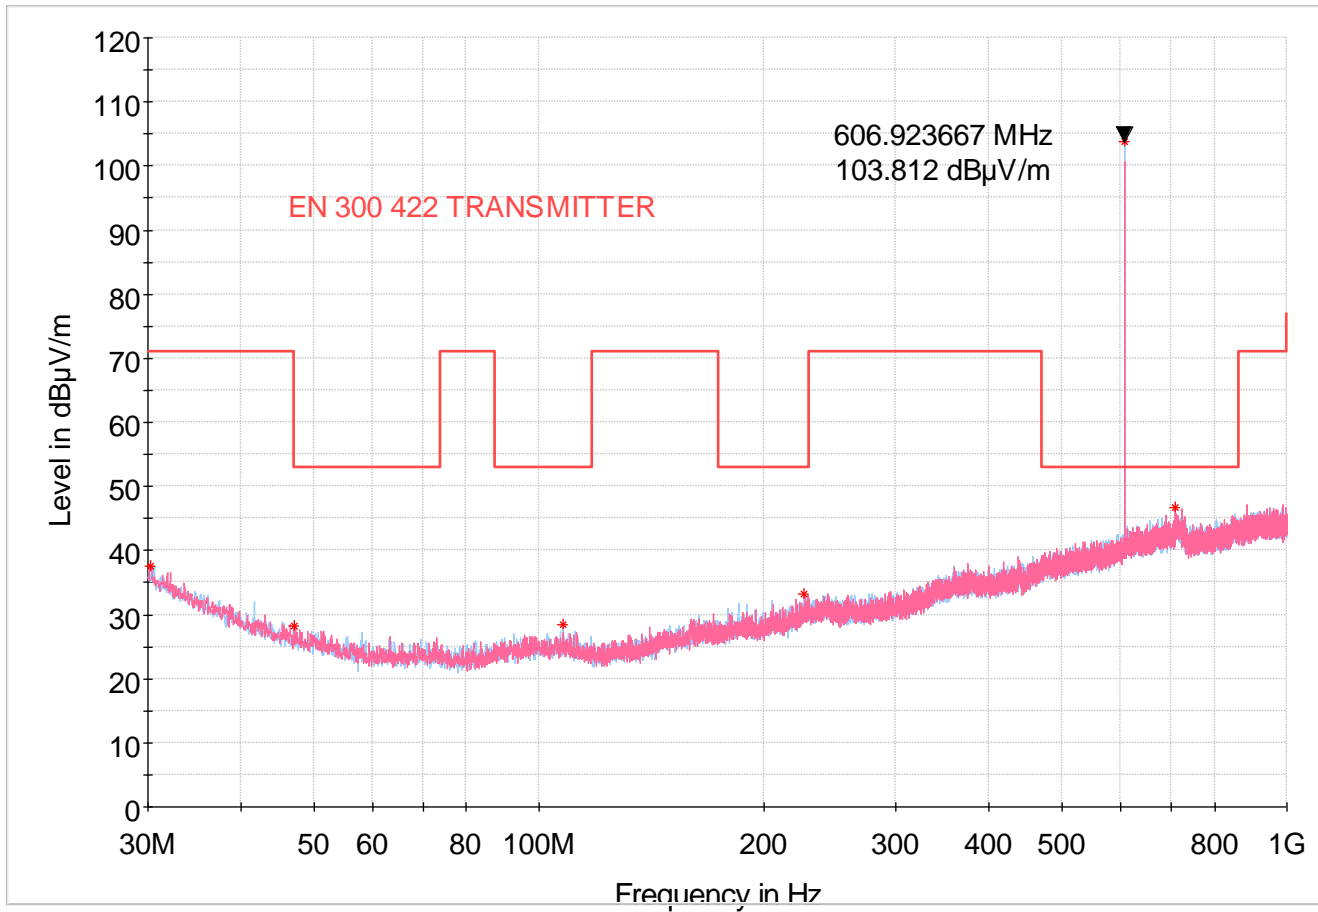

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
606.923667	103.81	53.00	-50.81	---	---	250.0	H	36.0	---	3:19:36 PM - 1/25/2018	---
107.858667	28.47	53.00	24.53	---	---	300.0	H	66.0	---	3:19:36 PM - 1/25/2018	---
225.713667	33.19	53.00	19.81	---	---	400.0	H	267.0	---	3:19:36 PM - 1/25/2018	---
710.131667	46.61	53.00	6.39	---	---	100.0	V	317.0	---	3:19:36 PM - 1/25/2018	---
47.072000	28.20	53.00	24.80	---	---	150.0	V	34.0	---	3:19:36 PM - 1/25/2018	---
30.291000	37.60	71.00	33.40	---	---	300.0	V	126.0	---	3:19:36 PM - 1/25/2018	---

Final Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
---	---	---	---	---	---	---		---	---		---



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC 15C Radiated Emissions 1GHz - 10GHz  
 EUT: ULXD6 J50A  
 Serial Number: # 1  
 Operating Frequency: 606.875MHz  
 Power Level / Mod Mode: 20mW  
 Name: Alex Mishinger  
 Date Tested: Tested on February 16, 2018

## EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 1GHz to 10GHz 3117-PA 200363

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17  
 Measurement Type: Open-Area-Test-Site  
 Frequency Range: 1 GHz - 10 GHz  
 Graphics Level Range: 0 dB $\mu$ V/m - 120 dB $\mu$ V/m

### Preview Measurements:

Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6  
 Polarization: H + V  
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5  
 Graphics Display: Show separate traces for horizontal and vertical polarization  
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

### Adjustment:

Antenna height: Range = 50 cm , Measuring Speed = 1  
 Turntable position: Range = 90 deg , Measuring Speed = 5  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

### Final Measurements:

Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 2017 10 17 - [EMI radiated]**

Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL 5/28/2016

Signal Path: Receiver-EMI to 18 GHz  
FW 1.0


Antenna: Correction Table: Receiver-EMI Antenna TEMP 2016 11 23  
EMI3117-PA 200385  
SN 200385, CAL 10/16/2018  
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10 16  
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017 10 16  
Correction Table (vertical): L23\_041\_47 Cable  
Correction Table (horizontal): L23\_041\_47 Cable

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21

Appendix A

Full Spectrum

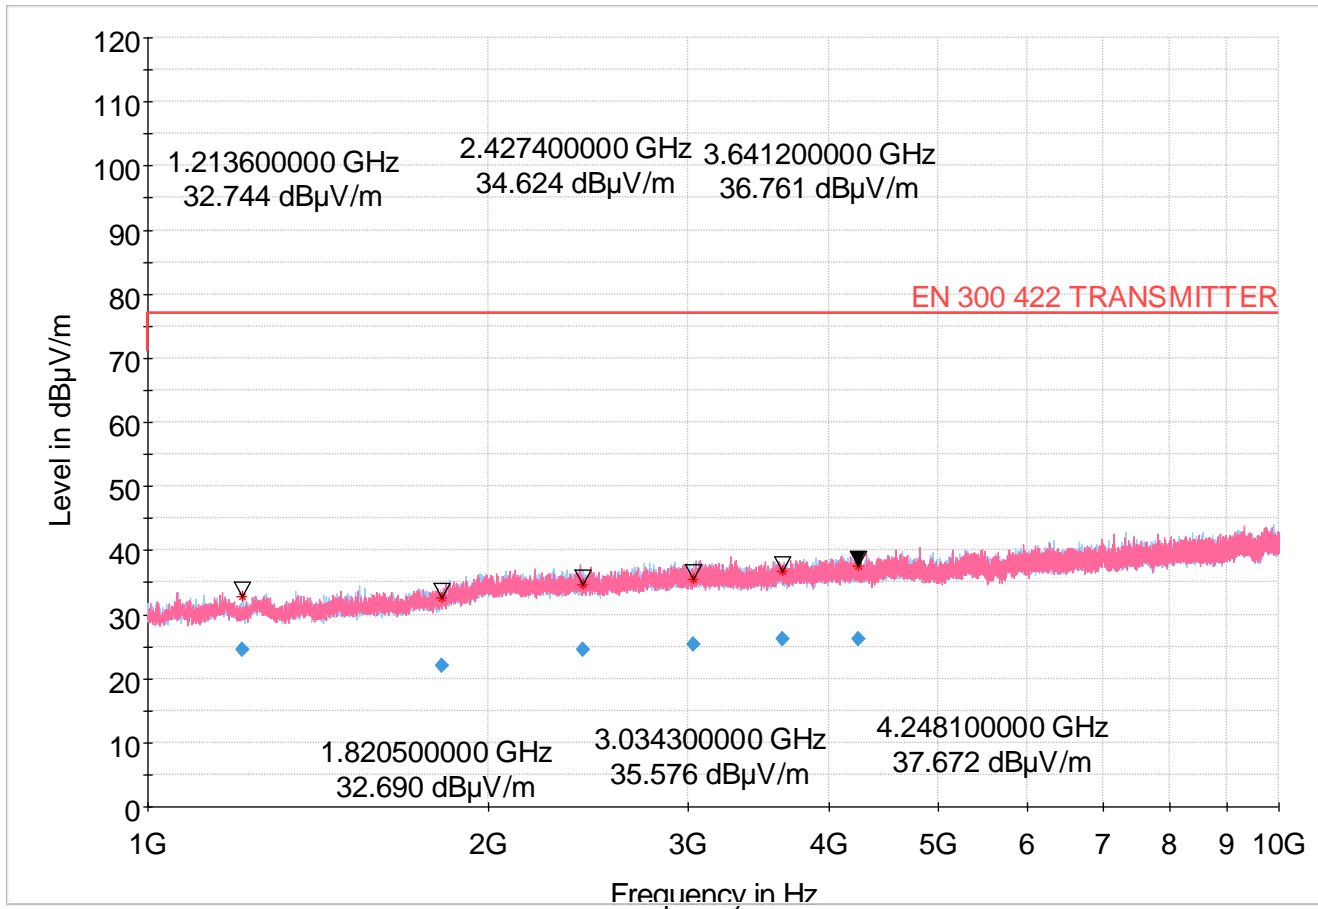

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1213.600000	32.74	77.00	44.26	---	---	154.0	H	108.0	---	4:26:33 PM - 2/16/2018	---
1820.500000	32.69	77.00	44.31	---	---	186.0	H	80.0	---	4:27:50 PM - 2/16/2018	---
2427.400000	34.62	77.00	42.38	---	---	123.0	V	78.0	---	4:29:52 PM - 2/16/2018	---
3034.300000	35.58	77.00	41.42	---	---	114.0	H	87.0	---	4:25:21 PM - 2/16/2018	---
3641.200000	36.76	77.00	40.24	---	---	106.0	V	8.0	---	4:28:58 PM - 2/16/2018	---
4248.100000	37.67	77.00	39.33	---	---	251.0	V	30.0	---	4:31:03 PM - 2/16/2018	---

Final Results

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1213.600000	24.43	77.00	52.57	1000.0	1000.000	154.0	H	108.0	-15.9	4:26:42 PM - 2/16/2018	---
1820.500000	22.04	77.00	54.96	1000.0	1000.000	186.0	H	80.0	-14.5	4:28:00 PM - 2/16/2018	---
2427.400000	24.48	77.00	52.52	1000.0	1000.000	125.0	V	78.0	-12.6	4:29:58 PM - 2/16/2018	---
3034.300000	25.29	77.00	51.71	1000.0	1000.000	114.0	H	87.0	-11.2	4:25:30 PM - 2/16/2018	---
3641.200000	26.23	77.00	50.77	1000.0	1000.000	106.0	V	8.0	-9.6	4:29:07 PM - 2/16/2018	---
4248.100000	26.08	77.00	50.92	1000.0	1000.000	251.0	V	30.0	-8.1	4:31:12 PM - 2/16/2018	---



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz  
EUT: ULXD6 J50A  
Serial Number: # 1  
Operating Conditions: 614.125MHz, 20mW  
Tested on November 27, 2017  
Operator Name: Alex Mishinger

## EMI Auto Test Template: Bandsaw COMPLIANCE TEST FCC 15C 30MHz to 1GHz 34790 FCC

Hardware Setup: Electric Field Strength 34790  
Measurement Type: Open-Area-Test-Site  
Frequency Range: 30 MHz - 1 GHz  
Graphics Level Range: 0 dB $\mu$ V/m - 125 dB $\mu$ V/m

### Preview Measurements:

Graphics Display: Show separate traces for horizontal and vertical polarization  
Sweep Test Template: Compliance Test FCC 30MHz 1GHz 34790 PREVIEW

### Adjustment:

Template for Single Meas.: COMPLIANCE TEST FCC 15B 30 to 1000 MHz 34790 MAX

### Final Measurements:

Template for Single Meas.: COMPLIANCE TEST FCC 15B 30 to 1000 MHz 34790 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26]					
25 MHz - 30 MHz	2.25 kHz	PK+ ; QPK	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+ ; QPK	120 kHz	2 s	0 dB



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 34790 - [EMI radiated]**

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL  
5/28/2016


Signal Path: Receiver-EMI to 1 GHz  
FW 1.0  
Correction Table: Receiver-EMI Antenna 18GHz L23\_041\_38 8m

Antenna: ETS 3142C 34790  
SN 34790, CAL 6/3/2017  
Correction Table (vertical): BiconiLog 3142C Hor-34790 2017 06  
17  
Correction Table (horizontal): BiconiLog 3142C Hor-34790 2017  
06 17

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21

Appendix A

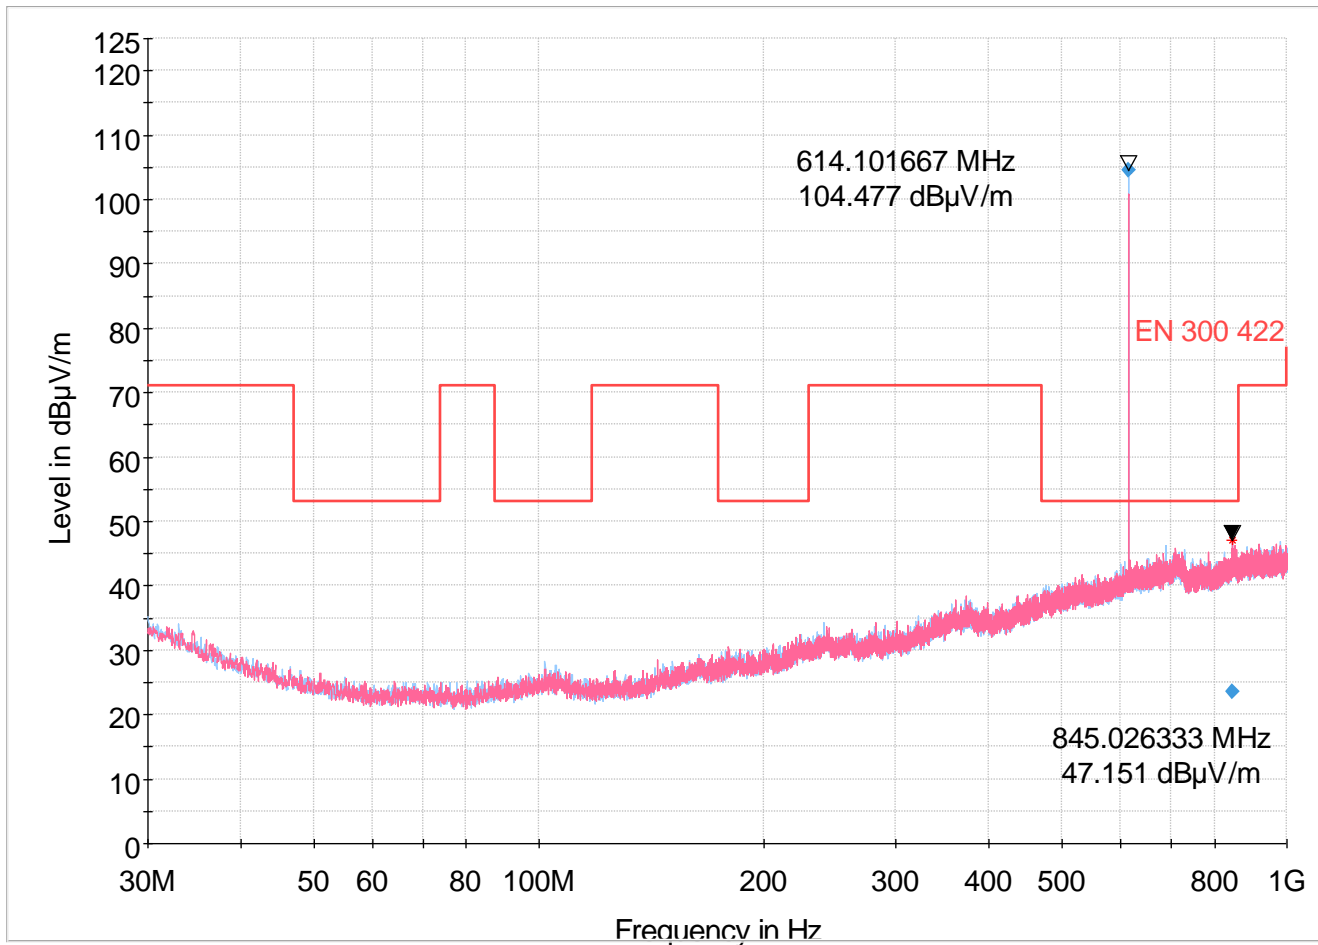

Critical Results

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
614.101667	104.48	53.00	-51.48	---	---	164.0	H	209.0	22.0	5:09:23 PM - 11/27/2017
845.026333	47.15	53.00	5.85	---	---	346.0	V	249.0	24.2	5:11:21 PM - 11/27/2017

Final Results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
614.101667	104.50	53.00	-51.50	1000.0	120.000	164.0	H	209.0	22.0	5:09:36 PM - 11/27/2017
845.026333	23.52	53.00	29.48	1000.0	120.000	346.0	V	249.0	24.2	5:11:34 PM - 11/27/2017





# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC15C Radiated Emissions 1GHz - 10GHz EU  
 EUT: ULXD6 J50A  
 Serial Number: # 1  
 Operating Frequency: 614.125MHz  
 Power Level / Mod Mode: 20mW  
 Name: Alex Mishinger  
 Comments: Tested on February 16, 2018

## EMI Auto Test Template: COMPLIANCE TEST FCC 15C 1GHZ to 10GHZ 3117-PA 200363 FCC

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17  
 Measurement Type: Open-Area-Test-Site  
 Frequency Range: 1 GHz - 10 GHz  
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m

Preview Measurements:  
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6  
 Polarization: H + V  
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5  
 Graphics Display: Show separate traces for horizontal and vertical polarization  
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:  
 Antenna height: Range = 50 cm , Measuring Speed = 1  
 Turntable position: Range = 90 deg , Measuring Speed = 5  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



## Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 - [EMI radiated]

### Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL 5/28/2016

Signal Path: Receiver-EMI to 18 GHz  
FW 1.0  
Correction Table: Receiver-EMI Antenna TEMP 2016 11 23


Antenna: EMI3117-PA 200385  
SN 200385, CAL 10/16/2018  
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10 16  
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017 10 16  
Correction Table (vertical): L23\_041\_47 Cable  
Correction Table (horizontal): L23\_041\_47 Cable

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21

Appendix A

Full Spectrum

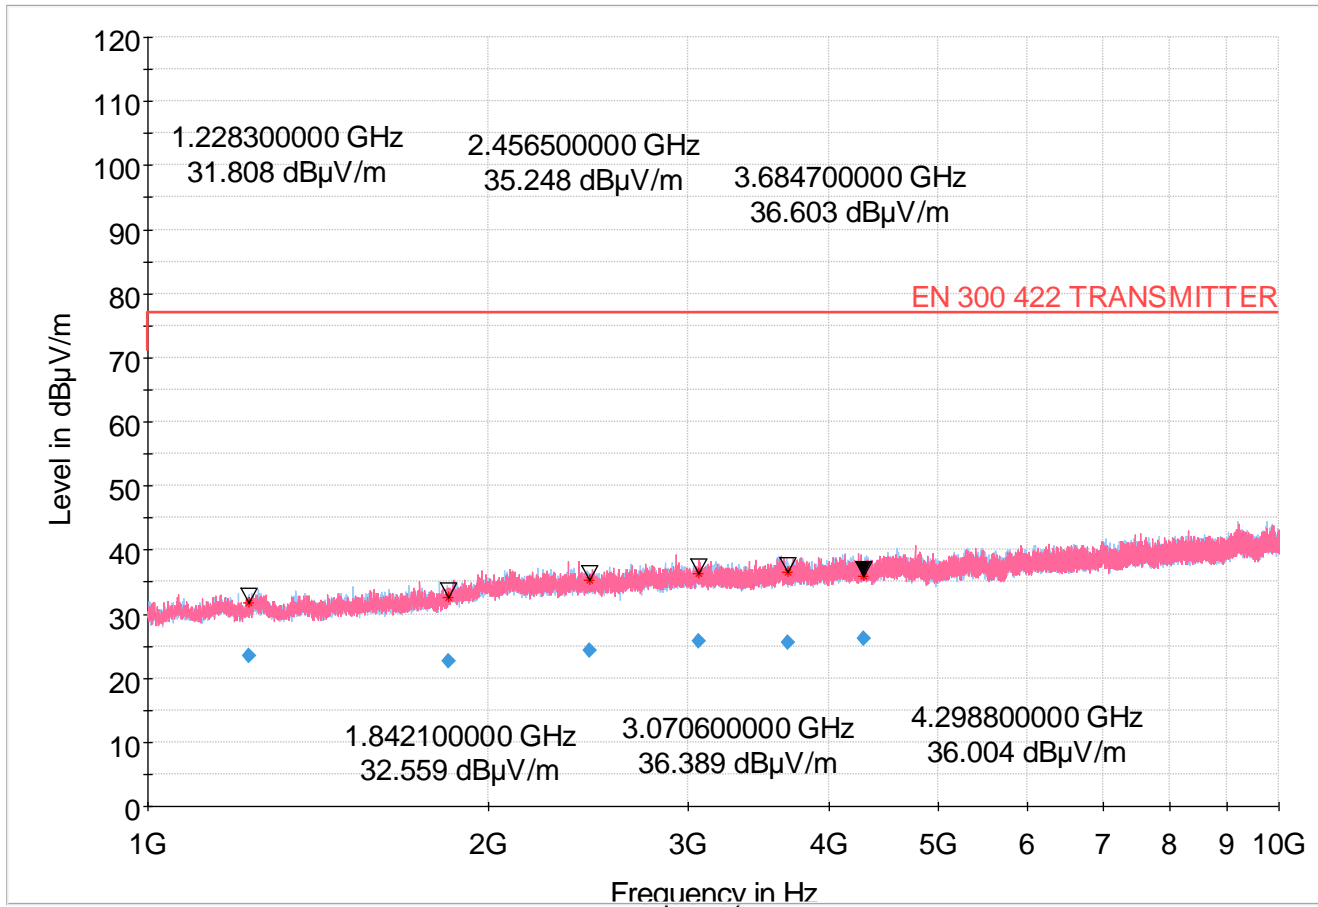

Critical Frequencies

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1228.300000	31.81	77.00	45.19	---	---	275.0	V	95.0	---	1:34:33 PM - 2/16/2018	---
1842.100000	32.56	77.00	44.44	---	---	335.0	V	67.0	---	1:36:48 PM - 2/16/2018	---
2456.500000	35.25	77.00	41.75	---	---	268.0	H	92.0	---	1:32:11 PM - 2/16/2018	---
3070.600000	36.39	77.00	40.61	---	---	110.0	V	32.0	---	1:33:21 PM - 2/16/2018	---
3684.700000	36.60	77.00	40.40	---	---	313.0	V	148.0	---	1:35:32 PM - 2/16/2018	---
4298.800000	36.00	77.00	41.00	---	---	145.0	H	-5.0	---	1:31:00 PM - 2/16/2018	---

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
1228.300000	23.42	77.00	53.58	1000.0	1000.000	275.0	V	95.0	-15.8	1:34:39 PM - 2/16/2018	---
1842.100000	22.54	77.00	54.46	1000.0	1000.000	335.0	V	67.0	-14.4	1:36:57 PM - 2/16/2018	---
2456.500000	24.36	77.00	52.64	1000.0	1000.000	268.0	H	92.0	-12.5	1:32:18 PM - 2/16/2018	---
3070.600000	25.80	77.00	51.20	1000.0	1000.000	110.0	V	32.0	-11.1	1:33:29 PM - 2/16/2018	---
3684.700000	25.53	77.00	51.47	1000.0	1000.000	313.0	V	148.0	-9.5	1:35:41 PM - 2/16/2018	---
4298.800000	26.16	77.00	50.84	1000.0	1000.000	145.0	H	-5.0	-8.3	1:31:09 PM - 2/16/2018	---



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC 15C Radiated Emissions 30MHz - 1GHz  
 EUT: ULXD6 J50A  
 Serial Number: # 1  
 Operating Frequency: 615.875MHz  
 Power Level / Mod Mode: 20mW  
 Name: Alex Mishinger  
 Comments: Tested on January 25, 2018

## EMI Auto Test Template: COMPLIANCE TEST FCC15C-EN300422 Transmitter 25MHz to 1GHz 79899 EU

Hardware Setup: Electric Field Strength 79899 2017 02 27  
 Measurement Type: Open-Area-Test-Site  
 Frequency Range: 25 MHz - 1 GHz  
 Graphics Level Range: 0 dB $\mu$ V/m - 120 dB $\mu$ V/m

Preview Measurements:  
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6  
 Polarization: H + V  
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5  
 Graphics Display: Show separate traces for horizontal and vertical polarization  
 Sweep Test Template: Compliance Test EN300422 Transmitter 25MHz 1GHz 79899 PREVIEW

Adjustment:  
 Antenna height: Range = 50 cm , Measuring Speed = 1  
 Turntable position: Range = 90 deg , Measuring Speed = 5  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Final Measurements:  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 25 to 1000 MHz 79899 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
25 MHz - 30 MHz	2.25 kHz	PK+	9 kHz	1 s	0 dB
30 MHz - 1 GHz	30 kHz	PK+	120 kHz	1 s	0 dB

Receiver: [ESR 26]



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 79899 2017 02 27 - [EMI radiated]**

Subrange 1

Frequency Range: 25 MHz - 1 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 3.36 SP2,  
CAL 5/28/2016

Signal Path: Receiver-EMI to 1 GHz  
FW 1.0  
Correction Table: Receiver-EMI Antenna 18GHz L23\_041\_38 8m


Antenna: ETS 3142C 79899  
SN 79899, CAL 12/5/2015  
Correction Table (vertical): BiconiLog 3142C Hor-79899 2017 02  
27  
Correction Table (horizontal): BiconiLog 3142C Hor-79899 2017  
02 27

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21

Appendix A

Full Spectrum

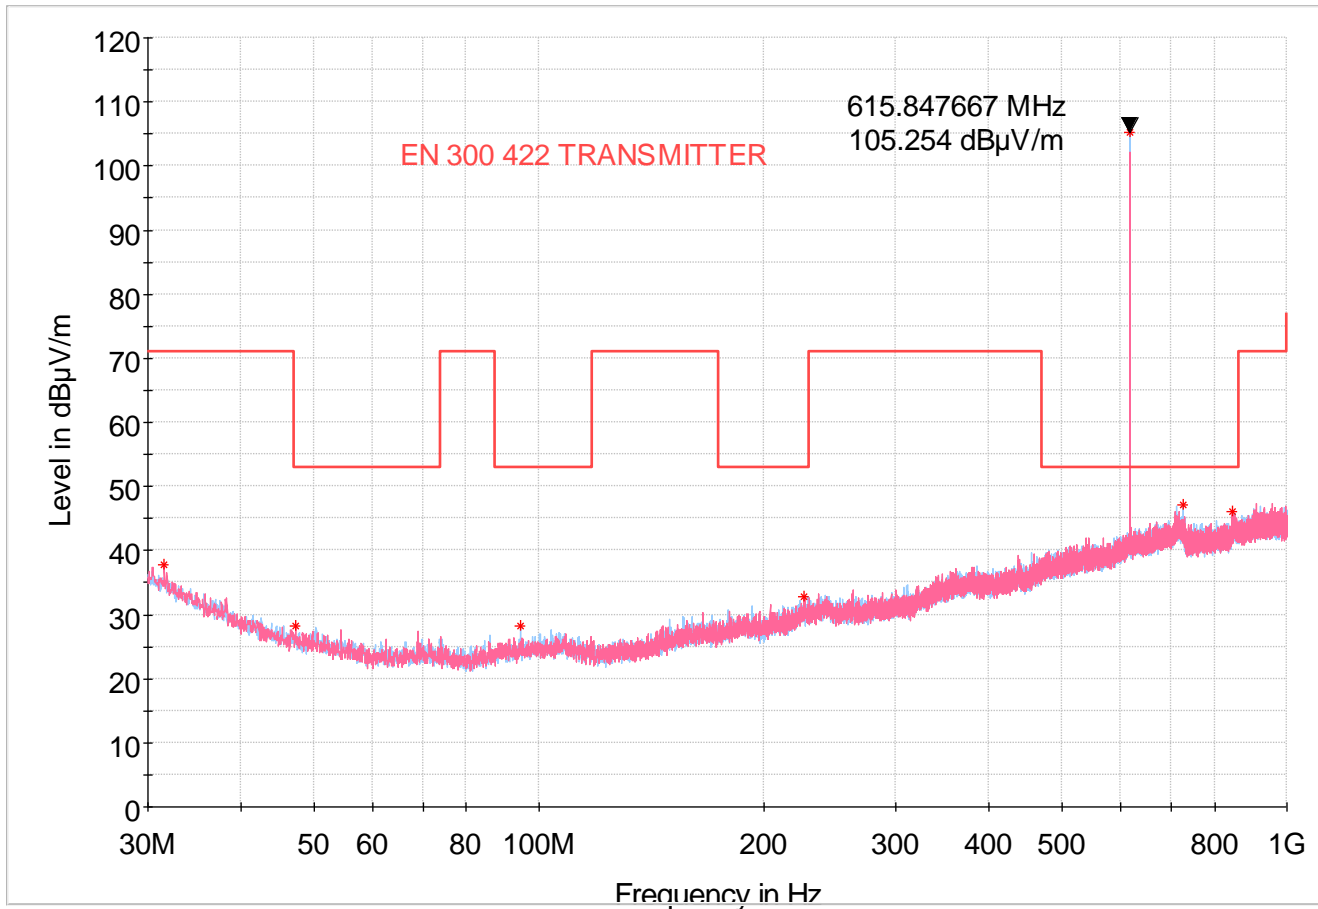

Critical Frequencies

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
615.847667	105.25	53.00	-52.25	---	---	250.0	H	41.0	---	3:48:24 PM - 1/25/2018	---
725.554667	47.11	53.00	5.89	---	---	400.0	H	163.0	---	3:48:24 PM - 1/25/2018	---
94.408000	28.25	53.00	24.75	---	---	400.0	H	240.0	---	3:48:24 PM - 1/25/2018	---
47.233667	28.19	53.00	24.81	---	---	200.0	V	179.0	---	3:48:24 PM - 1/25/2018	---
846.481333	46.00	53.00	7.00	---	---	350.0	V	137.0	---	3:48:24 PM - 1/25/2018	---
31.519667	37.74	71.00	33.26	---	---	400.0	V	3.0	---	3:48:24 PM - 1/25/2018	---
225.940000	32.82	53.00	20.18	---	---	400.0	V	138.0	---	3:48:24 PM - 1/25/2018	---

Final Frequencies

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment	Corr. (dB)
---	---	---	---	---	---	---		---	---		---



# SHURE Radiated RF Emissions Test Report

## Common Information

Test Description: FCC15C Radiated Emissions 1GHz - 10GHz  
 EUT: ULXD6 J50A  
 Serial Number: # 1  
 Operating Frequency: 615.875MHz  
 Power Level / Mod Mode: 20mW  
 Name: Alex Mishinger  
 Comments: Tested on February 16, 2018

## EMI Auto Test Template: COMPLIANCE TEST EN300422 Transmitter 1GHz to 10GHz 3117-PA 200363 EU

Hardware Setup: Electric Field Strength 3117-PA 200363 2017 10 17  
 Measurement Type: Open-Area-Test-Site  
 Frequency Range: 1 GHz - 10 GHz  
 Graphics Level Range: 0 dBµV/m - 120 dBµV/m  
 Preview Measurements:  
 Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 6  
 Polarization: H + V  
 Turntable position: 0 - 360 deg , Continuously , Measuring Speed = 5  
 Graphics Display: Show separate traces for horizontal and vertical polarization  
 Sweep Test Template: COMPLIANCE TEST EN300422 Transmitter 1-18 GHz 3117-PA 200363 PREVIEW

Adjustment:  
 Antenna height: Range = 50 cm , Measuring Speed = 1  
 Turntable position: Range = 90 deg , Measuring Speed = 5  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 MAX

Final Measurements:  
 Template for Single Meas.: COMPLIANCE TEST EN300422 Transmitter 1 to 18 GHz 3117-PA 200363 FINAL

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 26] 1 GHz - 18 GHz	250 kHz	AVG	1 MHz	1 s	0 dB



Appendix A

**Hardware Setup: EMI radiated\Electric Field Strength 3117-PA 200363 - [EMI radiated]**

Subrange 1

Frequency Range: 1 GHz - 18 GHz

Receiver: ESR 26 [ESR 26]  
@ GPIB0 (ADR 20), SN 1316.3003K26/101347, FW 2.26, CAL 5/28/2016

Signal Path: Receiver-EMI to 18 GHz  
FW 1.0

Antenna: Correction Table: Receiver-EMI Antenna TEMP 2016 11 23  
EMI3117-PA 200385  
SN 200385, CAL 10/16/2018  
Correction Table (vertical): Horn ETS 3117-PA 200363 2017 10 16  
Correction Table (horizontal): Horn ETS 3117-PA 200363 2017 10 16  
Correction Table (vertical): L23\_041\_47 Cable  
Correction Table (horizontal): L23\_041\_47 Cable


Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.21

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), SN 29799, FW REV 3.21



Appendix A

Full Spectrum

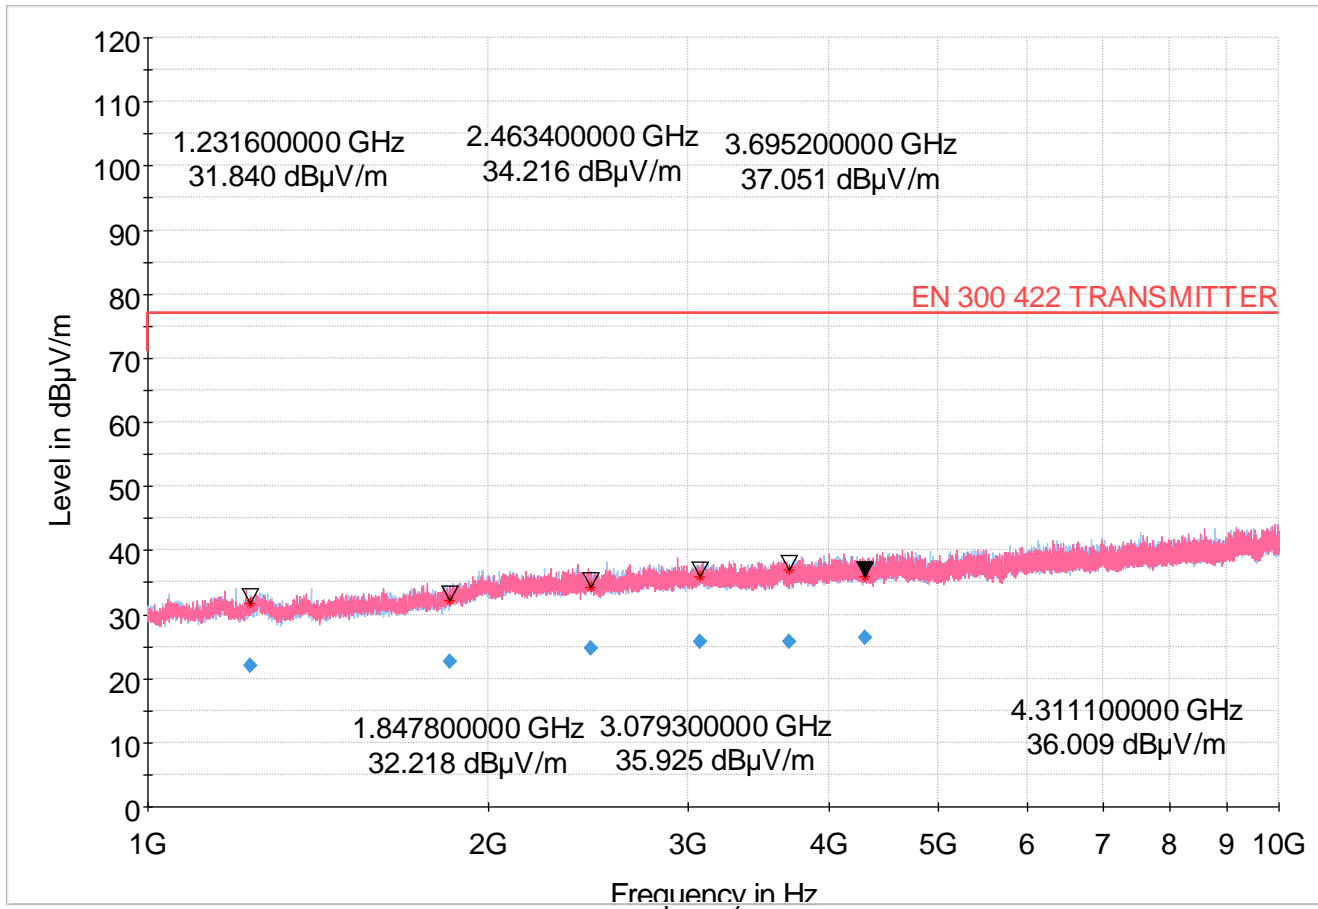

Critical Frequencies

Frequency (MHz)	MaxPeak (dBµV/m)	DET 2 (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
1231.600000	31.84	---	77.00	45.16	---	---	275.0	V	221.0	-15.8	2:32:50 PM - 2/16/2018
1847.800000	32.22	---	77.00	44.78	---	---	350.0	V	250.0	-14.4	2:35:10 PM - 2/16/2018
2463.400000	34.22	---	77.00	42.78	---	---	217.0	V	200.0	-12.5	2:31:45 PM - 2/16/2018
3079.300000	35.92	---	77.00	41.08	---	---	135.0	V	66.0	-11.1	2:30:23 PM - 2/16/2018
3695.200000	37.05	---	77.00	39.95	---	---	371.0	V	66.0	-9.5	2:34:07 PM - 2/16/2018
4311.100000	36.01	---	77.00	40.99	---	---	179.0	H	7.0	-8.3	2:29:01 PM - 2/16/2018

Final Frequencies

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
1231.600000	22.06	77.00	54.94	1000.0	1000.000	275.0	V	221.0	-15.8	2:32:55 PM - 2/16/2018
1847.800000	22.63	77.00	54.37	1000.0	1000.000	350.0	V	250.0	-14.4	2:35:19 PM - 2/16/2018
2463.400000	24.61	77.00	52.39	1000.0	1000.000	217.0	V	200.0	-12.5	2:31:53 PM - 2/16/2018
3079.300000	25.83	77.00	51.17	1000.0	1000.000	135.0	V	66.0	-11.1	2:30:33 PM - 2/16/2018
3695.200000	25.76	77.00	51.24	1000.0	1000.000	371.0	V	67.0	-9.5	2:34:14 PM - 2/16/2018
4311.100000	26.37	77.00	50.63	1000.0	1000.000	179.0	H	7.0	-8.3	2:29:11 PM - 2/16/2018



## Appendix A

Date: February 27, 2018  
EUT: ULXD6  
Band: J50A  
Serial Number: # 1  
Specification: EN 300 422-1, Spurious Radiated Emissions  
Comments: Test Distance is 3 meters  
Mode: EUT set to Low 572.125 MHz  
Tested By: Alex Mishinger, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1144.250	Average	H	26.60	-74.0	3.7	3.29	-73.6	-30
1144.250	Average	V	26.60	-74.0	3.7	3.29	-73.6	-30
1716.375	Average	H	21.84	-77.0	5.4	3.55	-75.2	-30
1716.275	Average	V	21.84	-77.0	5.4	3.55	-75.2	-30
2288.500	Average	H	24.31	-77.0	5.4	4.14	-78.3	-30
2288.500	Average	V	24.31	-77.0	5.4	4.14	-78.3	-30
2860.625	Average	H	25.04	-76.0	6.8	4.42	-73.6	-30
2860.625	Average	V	25.04	-76.0	6.8	4.42	-73.6	-30
3432.750	Average	H	25.27	-76.0	8.0	4.80	-72.8	-30
3432.750	Average	V	25.27	-76.0	8.0	4.80	-72.8	-30
4004.875	Average	H	25.93	-76.0	8.9	5.21	-72.3	-30
4004.875	Average	V	25.93	-76.0	8.9	5.21	-72.3	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



**Appendix A**

Date: February 27, 2018  
 EUT: ULXD6  
 Band: J50A  
 Serial Number: # 1  
 Specification: EN 300 422-1, Spurious Radiated Emissions  
 Comments: Test Distance is 3 meters  
 Mode: EUT set to Middle 589.500 MHz  
 Tested By: Alex Mishinger, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1179.000	Average	H	26.17	-75.0	3.7	3.76	-75.1	-30
1179.000	Average	V	26.17	-75.0	3.7	3.76	-75.1	-30
1768.500	Average	H	21.84	-77.0	5.4	3.76	-75.4	-30
1768.500	Average	V	21.84	-77.0	5.4	3.76	-75.4	-30
2358.000	Average	H	24.54	-77.0	5.5	4.11	-75.6	-30
2358.000	Average	V	24.54	-77.0	5.5	4.11	-75.6	-30
2947.500	Average	H	25.46	-76.0	6.9	4.60	-73.7	-30
2947.500	Average	V	25.46	-76.0	6.9	4.60	-73.7	-30
3537.000	Average	H	25.40	-76.0	8.1	4.69	-72.6	-30
3537.000	Average	V	25.40	-76.0	8.1	4.69	-72.6	-30
4126.500	Average	H	26.44	-75.0	9.0	5.16	-71.2	-30
4126.500	Average	V	26.44	-75.0	9.0	5.16	-71.2	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



**Appendix A**

Date: February 27, 2018  
 EUT: ULXD6  
 Band: J50A  
 Serial Number: # 1  
 Specification: EN 300 422-1, Spurious Radiated Emissions  
 Comments: Test Distance is 3 meters  
 Mode: EUT set to High 606.875 MHz  
 Tested By: Alex Mishinger, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1213.750	Average	H	24.43	-77.0	3.7	3.03	-76.3	-30
1213.750	Average	V	24.43	-77.0	3.7	3.03	-76.3	-30
1820.625	Average	H	22.04	-77.0	5.3	3.56	-75.3	-30
1820.625	Average	V	22.04	-77.0	5.3	3.56	-75.3	-30
2427.500	Average	H	24.48	-77.0	5.4	3.97	-75.6	-30
2427.500	Average	V	24.48	-77.0	5.4	3.97	-75.6	-30
3034.375	Average	H	25.29	-76.0	7.0	4.68	-73.7	-30
3034.375	Average	V	25.29	-76.0	7.0	4.68	-73.7	-30
3641.250	Average	H	26.23	-76.0	8.2	5.06	-72.9	-30
3641.250	Average	V	26.23	-76.0	8.2	5.06	-72.9	-30
4248.125	Average	H	26.08	-76.0	9.3	5.40	-72.1	-30
4248.125	Average	V	26.08	-76.0	9.3	5.40	-72.1	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



**Appendix A**

Date: February 27, 2018  
 EUT: ULXD6  
 Band: J50A  
 Serial Number: # 1  
 Specification: EN 300 422-1, Spurious Radiated Emissions  
 Comments: Test Distance is 3 meters  
 Mode: EUT set to Low 614.125 MHz  
 Tested By: Craig Kozokar, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1228.250	Average	H	23.42	-77.0	3.8	2.86	-76.1	-30
1228.250	Average	V	23.42	-77.0	3.8	2.86	-76.1	-30
1842.375	Average	H	22.54	-77.0	5.3	3.63	-75.3	-30
1842.275	Average	V	22.54	-77.0	5.3	3.63	-75.3	-30
2456.500	Average	H	24.36	-77.0	6.0	4.18	-75.2	-30
2456.500	Average	V	24.36	-77.0	6.0	4.18	-75.2	-30
3070.625	Average	H	25.80	-76.0	7.0	4.34	-73.3	-30
3070.625	Average	V	25.80	-76.0	7.0	4.34	-73.3	-30
3684.750	Average	H	25.53	-76.0	8.2	4.99	-72.8	-30
3684.750	Average	V	25.53	-76.0	8.2	4.99	-72.8	-30
4298.875	Average	H	26.16	-75.0	9.3	5.23	-70.9	-30
4298.875	Average	V	26.16	-75.0	9.3	5.23	-70.9	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)



**Appendix A**

Date: February 27, 2018  
 EUT: ULXD6  
 Band: J50A  
 Serial Number: # 1  
 Specification: EN 300 422-1, Spurious Radiated Emissions  
 Comments: Test Distance is 3 meters  
 Mode: EUT set to High 615.875 MHz  
 Tested By: Craig Kozokar, February 26 & 27, 2018

Frequency in MHz	Detector Used	Antenna Polarity	Measured Level in dBuV	Matched Sig. Gen. Reading in dBm	Antenna Gain in dB	Cable Loss in dB	ERP Total in dBm	ETSI Limit in dBm
1231.750	Average	H	22.06	-77.0	3.8	3.79	-77.0	-30
1231.750	Average	V	22.06	-77.0	3.8	3.79	-77.0	-30
1847.625	Average	H	22.63	-77.0	5.3	3.53	-75.2	-30
1847.625	Average	V	22.63	-77.0	5.3	3.53	-75.2	-30
2463.500	Average	H	24.61	-77.0	6.0	4.23	-75.2	-30
2463.500	Average	V	24.61	-77.0	6.0	4.23	-75.2	-30
3079.375	Average	H	25.83	-76.0	7.0	4.37	-73.4	-30
3079.375	Average	V	25.83	-76.0	7.0	4.37	-73.4	-30
3695.250	Average	H	25.76	-76.0	8.2	5.00	-72.8	-30
3695.250	Average	V	25.76	-76.0	8.2	5.00	-72.8	-30
4311.125	Average	H	26.37	-76.0	9.3	5.55	-72.3	-30
4311.125	Average	V	26.37	-76.0	9.3	5.55	-72.3	-30

Total (dBm) = Matched Signal. Generator Reading (dBm) + Antenna Gain (dB) – Cable Loss (dB)

## B. Maximum Radiated Power

### Purpose:

This test performed to determine if the EUT meets the Maximum Radiated Power requirements of the FCC Part15C, Section 15.236 as well as the requirements in RSS Issue 9, Annex G.

### Requirements:

As stated in FCC 15C Section 15.236 (6)(2), the maximum radiated power in the 600MHz guard band and the 600MHz duplex gap: 20mW EIRP.

The requirements for RSS210 Issue 9, Annex G are shown in table G1 below.

**Table G1 — Specification for Low-Power Radio Apparatus**

Frequency Bands (MHz)	Transmit e.i.r.p. (mW)	Authorized Bandwidth (kHz)	Frequency Stability (ppm)
54-72 76-88 174-216	50	200	± 50
470-608 614-698 <sup>Note</sup>	250	200	± 50

### Measurement Uncertainty:

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence)

Measurement Type	$U_{lab}$
Conducted measurements (30 MHz – 1000 MHz)	1.24 dB

$U_{lab}$  = Determined for Shure EMC Laboratory

Since  $U_{lab}$  is less than or equal to  $U_{ETSI}$ :

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;  
Non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

### Test Setup and Instrumentation:

Photographs of the test setup are shown in Figure 1. The test instrumentation can be determined from Table 10-1.

### EUT Operation:

The EUT was powered up and the frequency of the transmitter was selected using the front panel controls. For rated output power, the testing was conducted with the EUT set to the low, middle, and high frequency in the low band, and low and high frequencies in the high band, within the operating frequency range, and at 20mW RF output.



## Appendix B

### Specific Test Procedures:

The output of the EUT was connected to a spectrum analyzer through 20dB of attenuation. The EUT was set to transmit on the low, middle, and high frequencies in the low band and low and high frequencies in the high band. The channel power was measured.

The spectrum analyzer was set to:

- RBW 10kHz
- VBW 100kHz
- Channel BW 200kHz
- Span 1MHz
- Detector Average
- State Average

### Results:

The EIRP for all frequencies measured meets the FCC15C 15.236 requirements.





### Test Information

EUT Name: ULXD6 J50A  
 Serial Number: # 1  
 Test Description: Maximum Rated Output  
 Operating Conditions: Low Frequency, 572.125MHz, 20mW  
 Operator Name: Craig Kozokar  
 Comment: FCC Part15C, Section 15.236, RSS 210.9  
 Date Tested: Tested on March 13, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+10.63	-4.8	0.50	6.33	13.00	6.67

EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)

Measured ULXD6 J50A antenna gain is -4.8dBi

### Test Information

EUT Name: ULXD6 J50A  
 Serial Number: # 1  
 Test Description: Maximum Rated Output  
 Operating Conditions: Middle Frequency, 589.500MHz, 20mW  
 Operator Name: Craig Kozokar  
 Comment: FCC Part15C, Section 15.236, RSS 210.9  
 Date Tested: Tested on March 13, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+10.73	-4.8	0.50	6.43	13.00	6.57

EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)

Measured ULXD6 J50A antenna gain is -4.8dBi



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: Maximum Rated Output  
Operating Conditions: High Frequency, 606.875MHz, 20mW  
Operator Name: Craig Kozokar  
Comment: FCC Part15C, Section 15.236, RSS 210.9  
Date Tested: Tested on March 13, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+10.63	-4.8	0.50	6.33	13.00	6.67

$EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)$

Measured ULXD6 J50A antenna gain is -4.8dBi

### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: Maximum Rated Output  
Operating Conditions: Low Frequency, 614.125MHz, 20mW  
Operator Name: Craig Kozokar  
Comment: FCC Part15C, Section 15.236, RSS 210.9  
Date Tested: Tested on March 13, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+10.53	-4.8	0.50	6.23	13.00	6.77

$EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)$

Measured ULXD6 J50A antenna gain is -4.8dBi



## Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: Maximum Rated Output  
Operating Conditions: High Frequency, 615.875MHz, 20mW  
Operator Name: Craig Kozokar  
Comment: FCC Part15C, Section 15.236, RSS 210.9  
Date Tested: Tested on March 13, 2018

Power Meter Measurement in dBm	Measured Antenna Gain in dBi	Cable Loss in dB	EIRP in dBm	EIRP Limit in dBm	Margin In dB
+10.53	-4.8	0.50	6.23	13.00	6.77

EIRP (dBm) = Measurement (dBm) + Measured Antenna Gain (dB) + Cable Loss (dB)

Measured ULXD6 J50A antenna gain is -4.8dBi

### C. NECESSARY BANDWIDTH MEASUREMENTS

#### C.1 PURPOSE

This test was performed to determine if the EUT meets the necessary bandwidth requirements of EN 300 422-1, section 8.3.3., with the EUT operating at 572.125MHz, 589.500MHz, 606.875MHz, 614.125MHz and 615.875MHz.

#### C.2 REQUIREMENTS

Both FCC part 15C and RSS 210.9 Annex G reference the necessary bandwidth limits from EN 300 422-1. As stated in EN 300 422-1, section 8.3.3, the emission mask given in section 8.3.3.2 shall not be exceeded.

#### C.3 TEST SETUP AND INSTRUMENTATION

A photograph of the test setup is shown in Figure B-1. The test instrumentation can be determined from Table 10-1.

#### C.4 MEASUREMENT UNCERTAINTY

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence):

Measurement Type	$U_{LAB}$
Necessary Bandwidth	<b>±0.130 %</b>

$U_{lab}$  = Determined for Shure EMC Laboratory

Since  $U_{LAB}$  is less than or equal to  $U_{ETSI}$ :

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

#### C.5 EUT OPERATION

The EUT was powered up and the transmit frequency and power output of the EUT were selected. The EUT was checked for proper operation after it was setup for the test. Testing was conducted with the EUT set to transmit at 572.125MHz, 589.500MHz, 606.875MHz, 614.125MHz, and 615.875MHz, at an output power level of 20mW. The transmitter was modulated per EN300422-1 V1.4.2 (2011-08), clause 7.1.2.

#### C.6 TEST PROCEDURE

The test procedure followed is shown in EN300422-1 V1.4.2 (2011-08), section 8.3.3.1.

## Appendix C


### C.7 RESULTS

The necessary bandwidth data is presented on pages 54 and 68. Data is shown on the figures for each transmitter. The figure shows the maximum relative level within the emission mask with modulation. As shown by the test data, the necessary bandwidth of the EUT meets the requirements of EN 300 422-1, section 8.3.3.



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: #1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: Low Frequency, 572.125MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 1; Carrier Power  
Date Tested: Tested on February 6, 2018

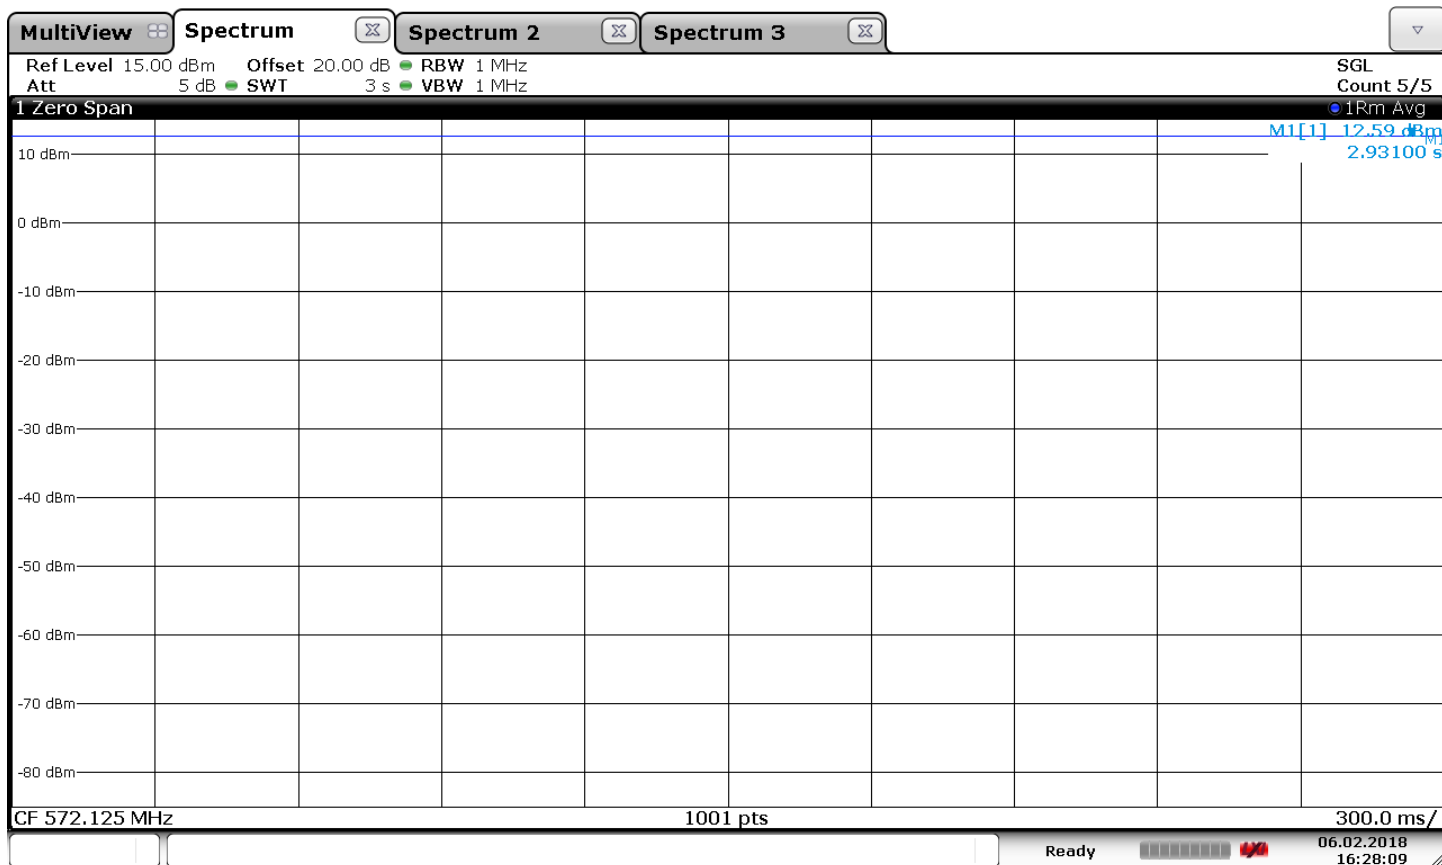


16:28:09 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
 Serial Number: #1  
 Test Description: EN 300 422 Digital Necessary Bandwidth  
 Operating Conditions: Low Frequency, 572.125MHz, 20mW  
 Operator Name: Juan Castrejon  
 Comment: 8.3.3.1: Step 2;Maximum Relative Level  
 Date Tested: Test on February 6, 2018

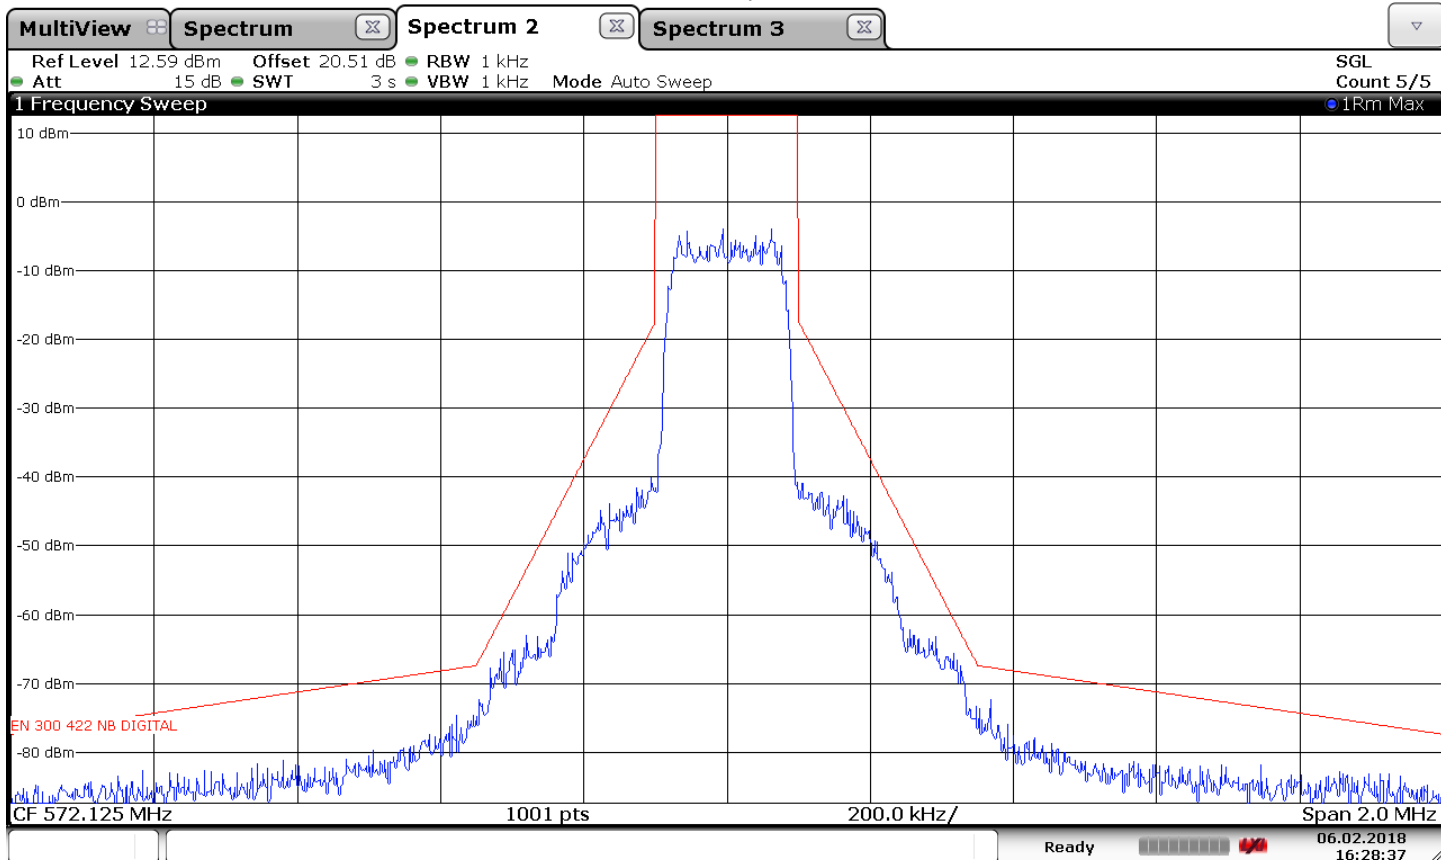


16:28:38 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: #1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: Low Frequency, 572.125MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter  
Wide band noise floor  
Date Tested: Test on February 6, 2018

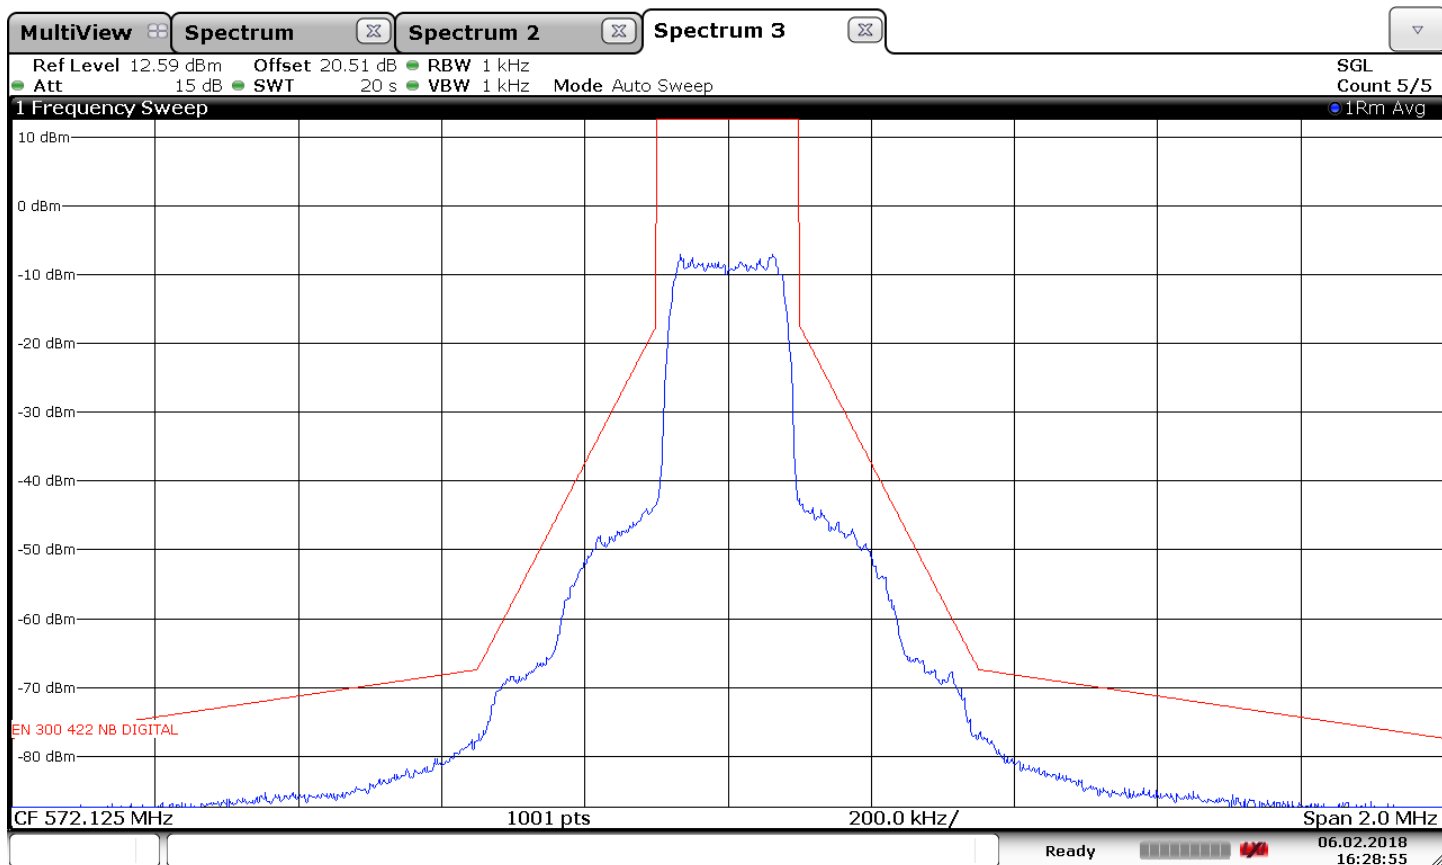


16:28:56 06.02.2018





### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: Middle Frequency, 589.500MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 1; Carrier Power  
Date Tested: Tested on February 6, 2018

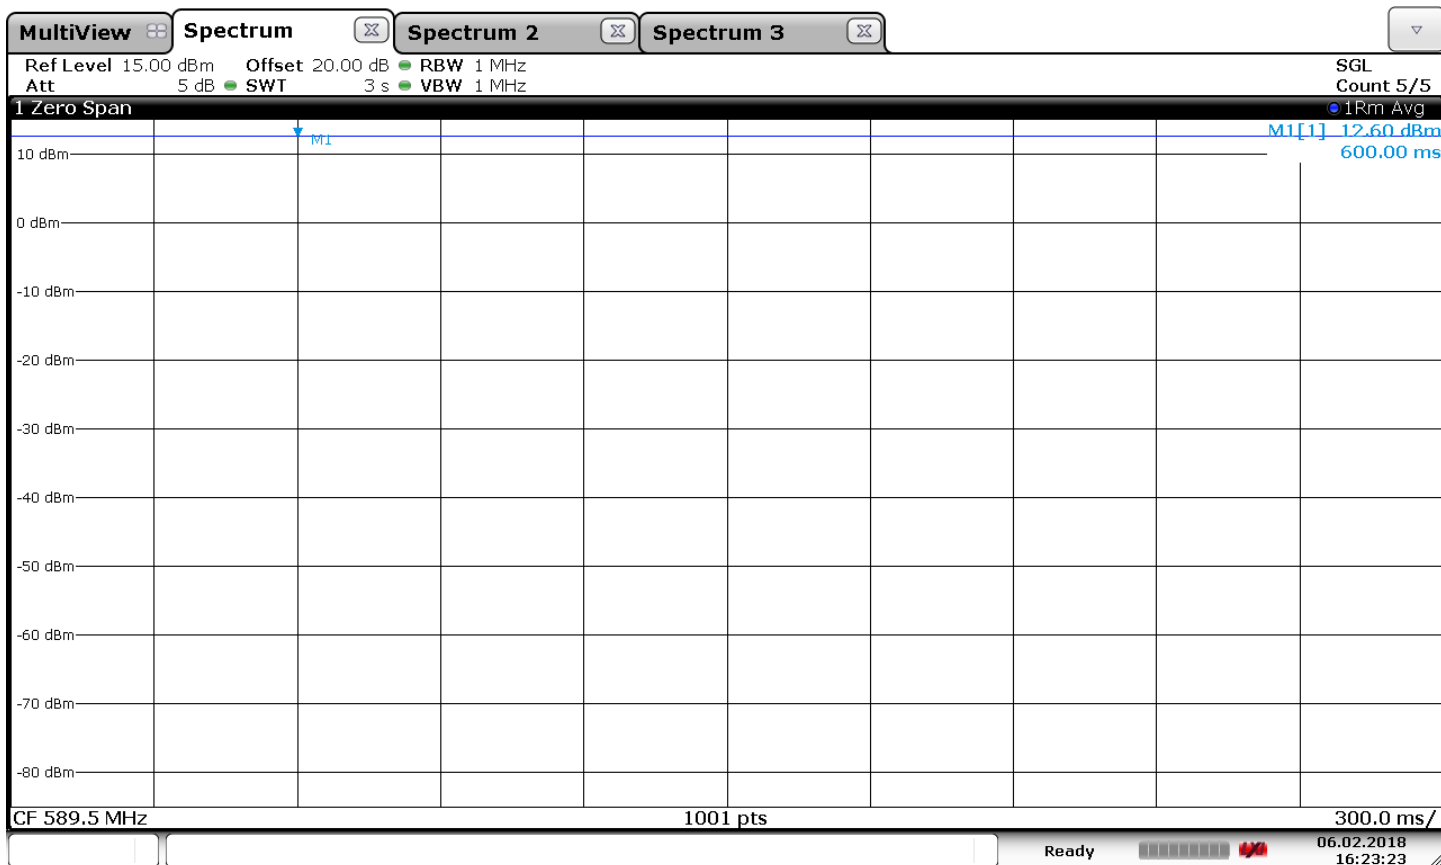


16:23:23 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: Middle Frequency, 589.500MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 2;Maximum Relative Level  
Date Tested: Test on February 6, 2018

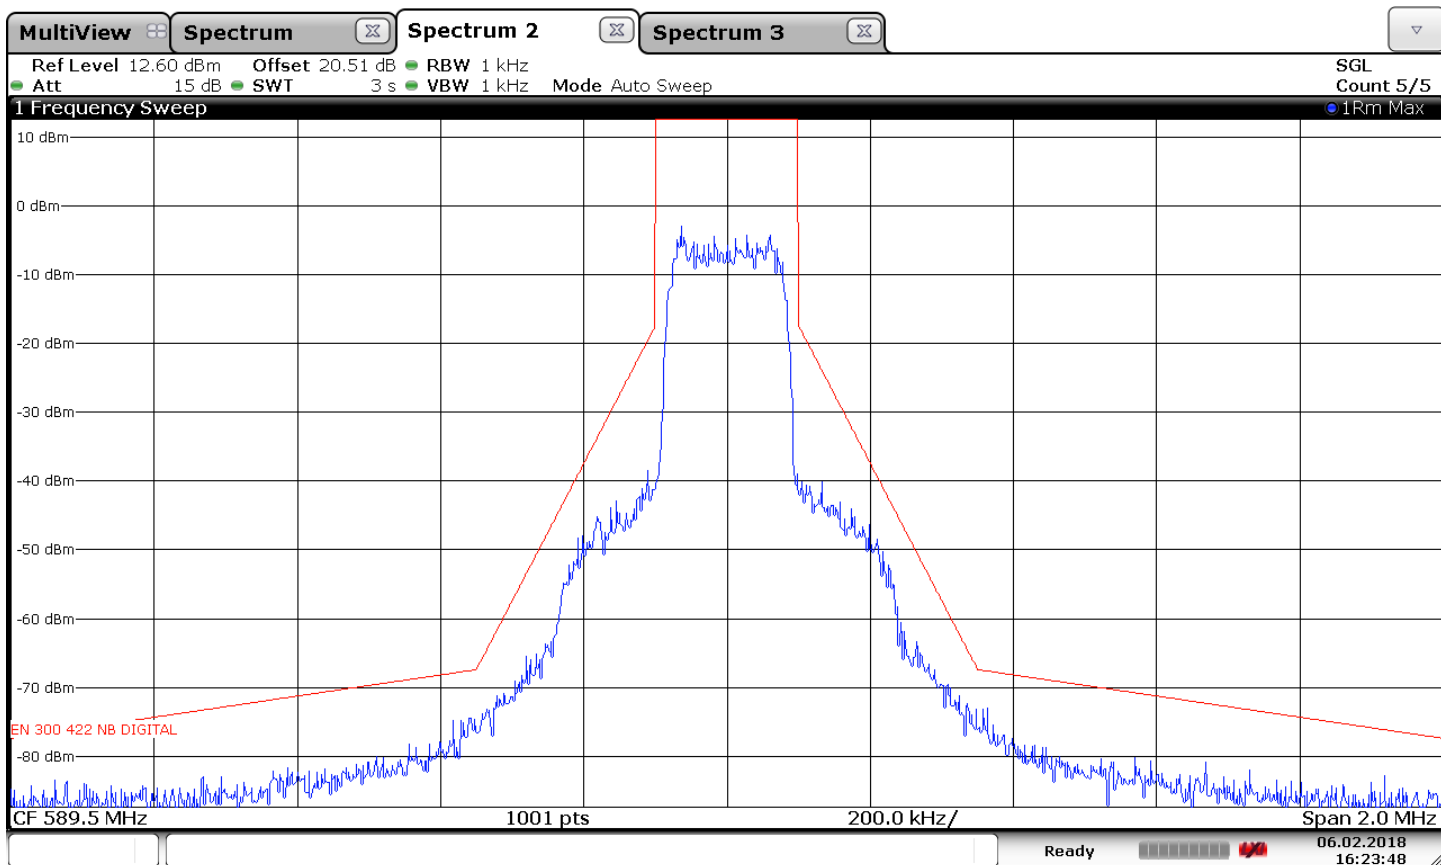


16:23:49 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: Middle Frequency, 589.500MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter  
Wide band noise floor  
Date Tested: Test on February 6, 2018

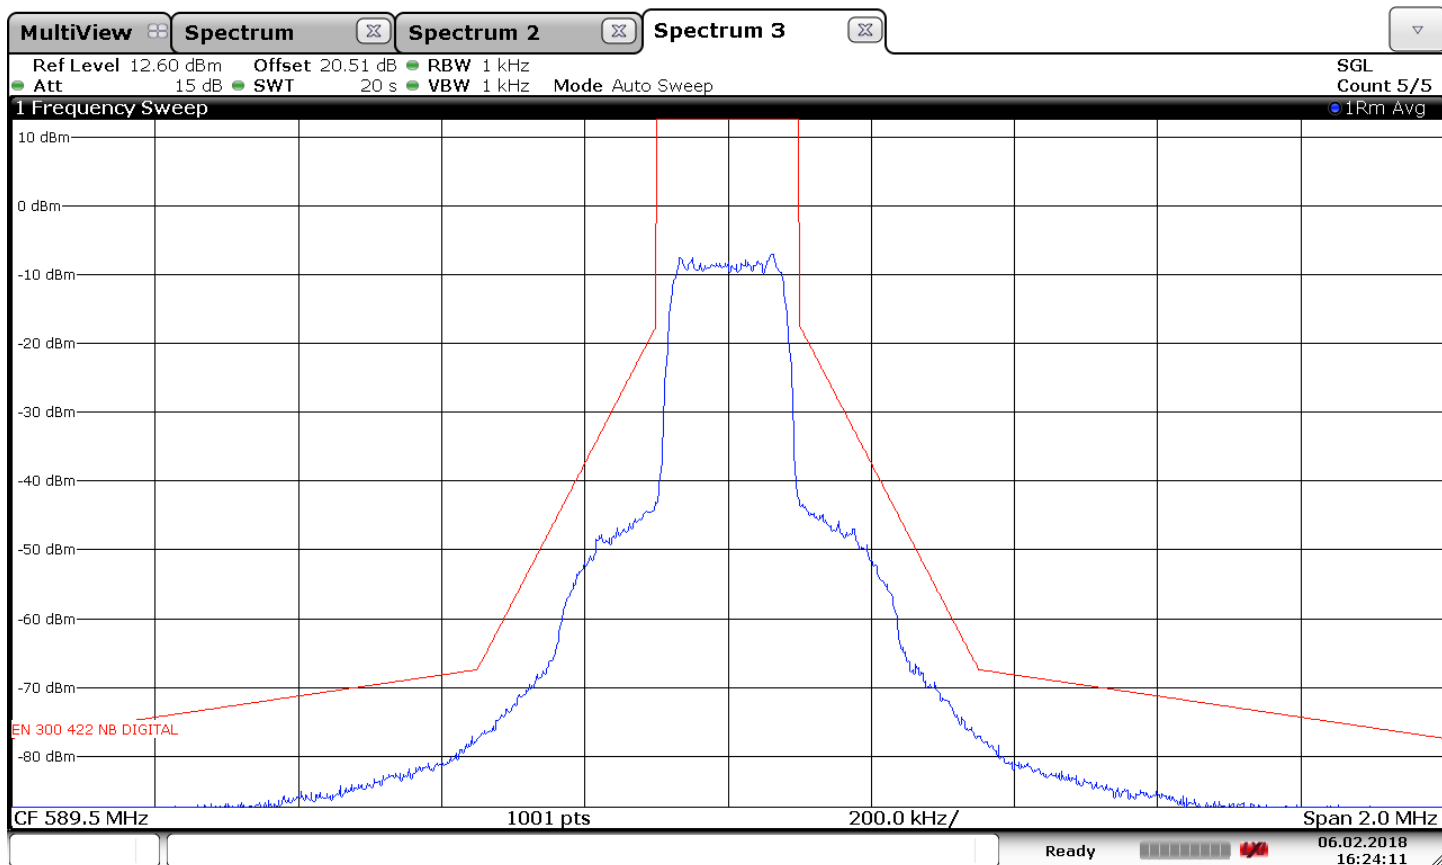


16:24:11 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: High Frequency, 606.875MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 1; Carrier Power  
Date Tested: Tested on February 6, 2018

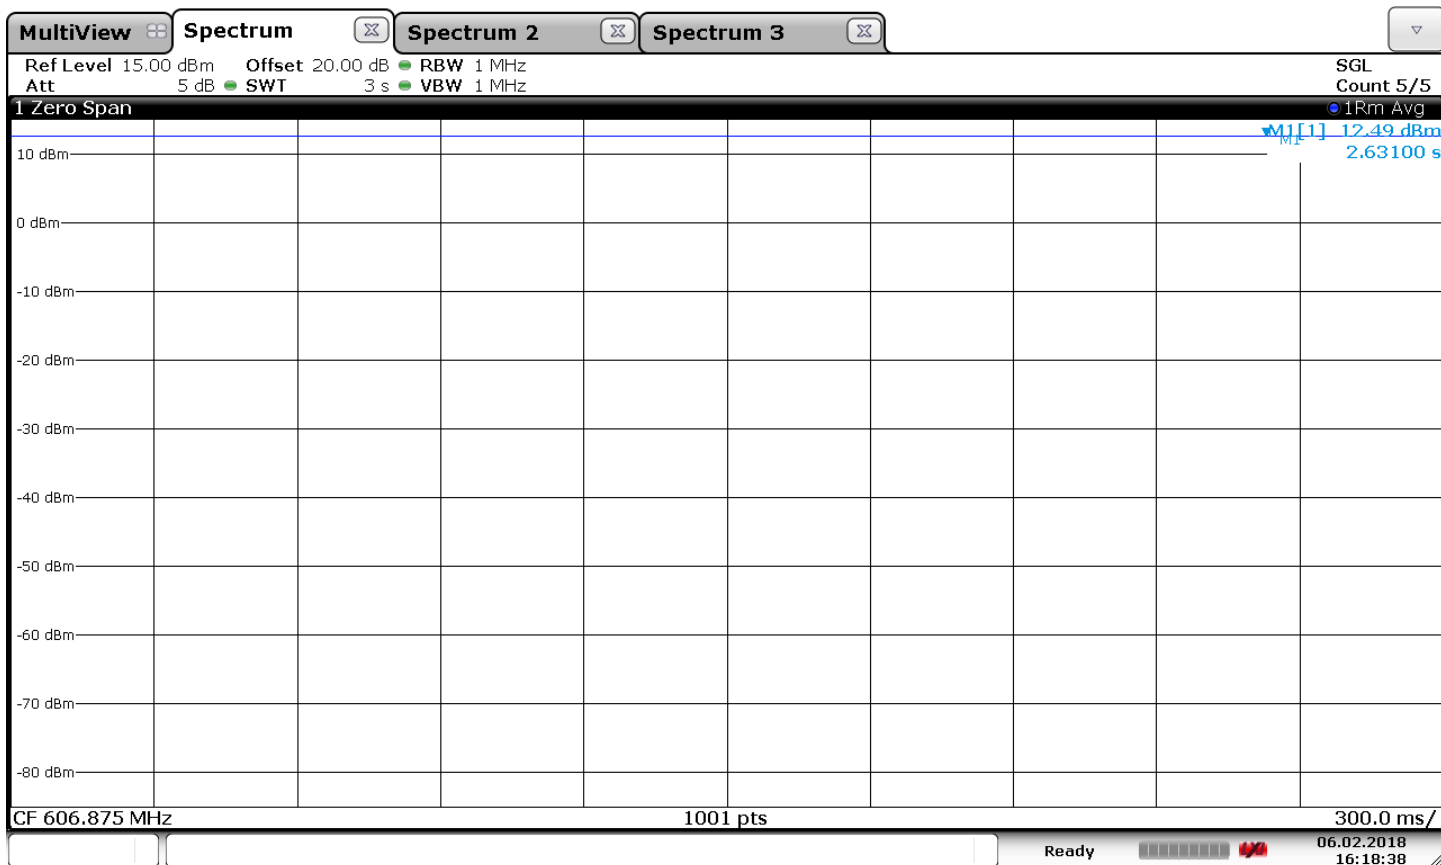


16:18:39 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: #1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: High Frequency, 606.875MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 2;Maximum Relative Level  
Date Tested: Test on February 6, 2018

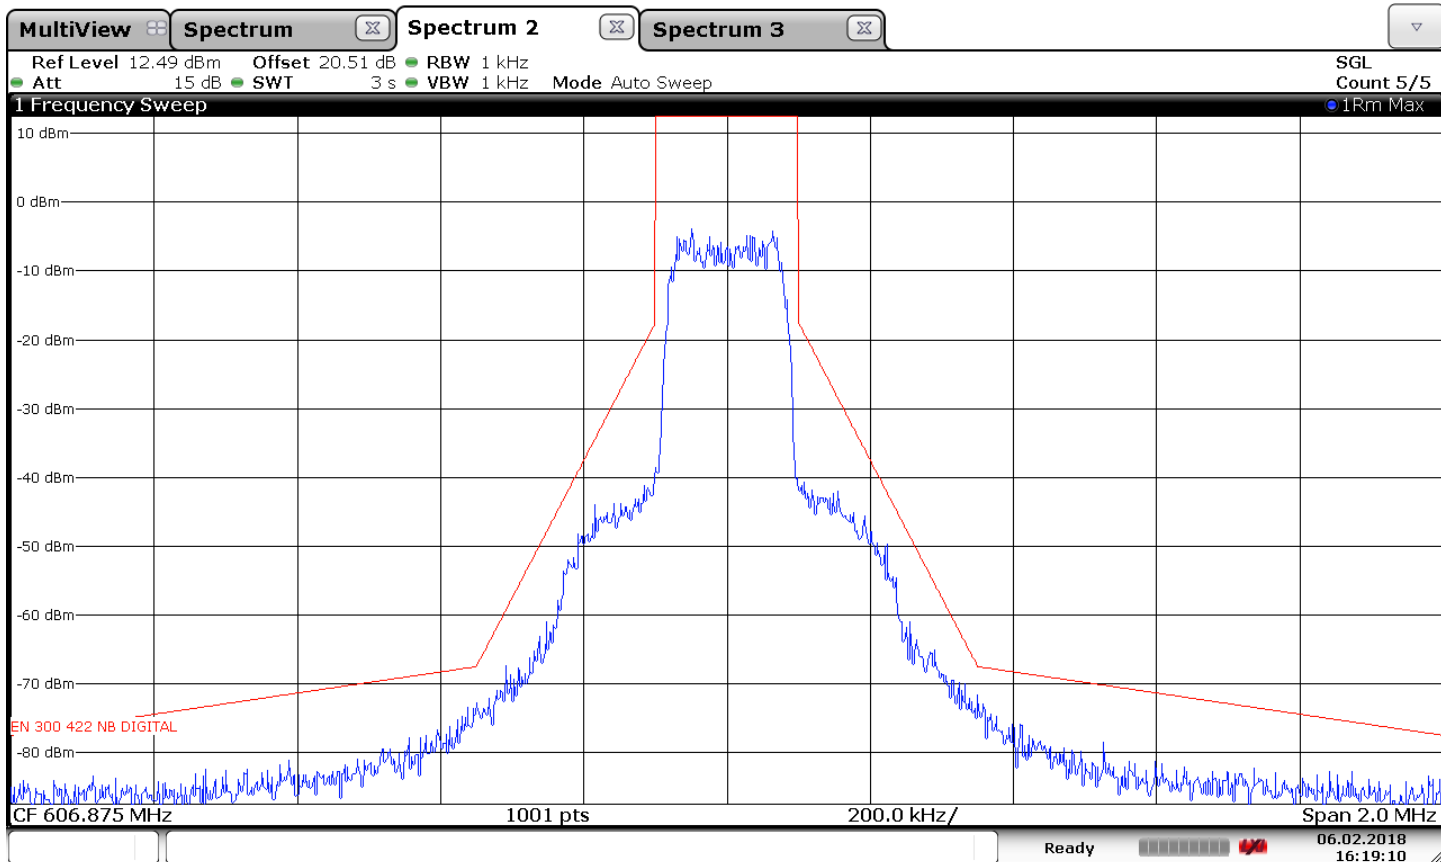


16:19:11 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: High Frequency, 606.875MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter  
Wide band noise floor  
Date Tested: Test on February 6, 2018

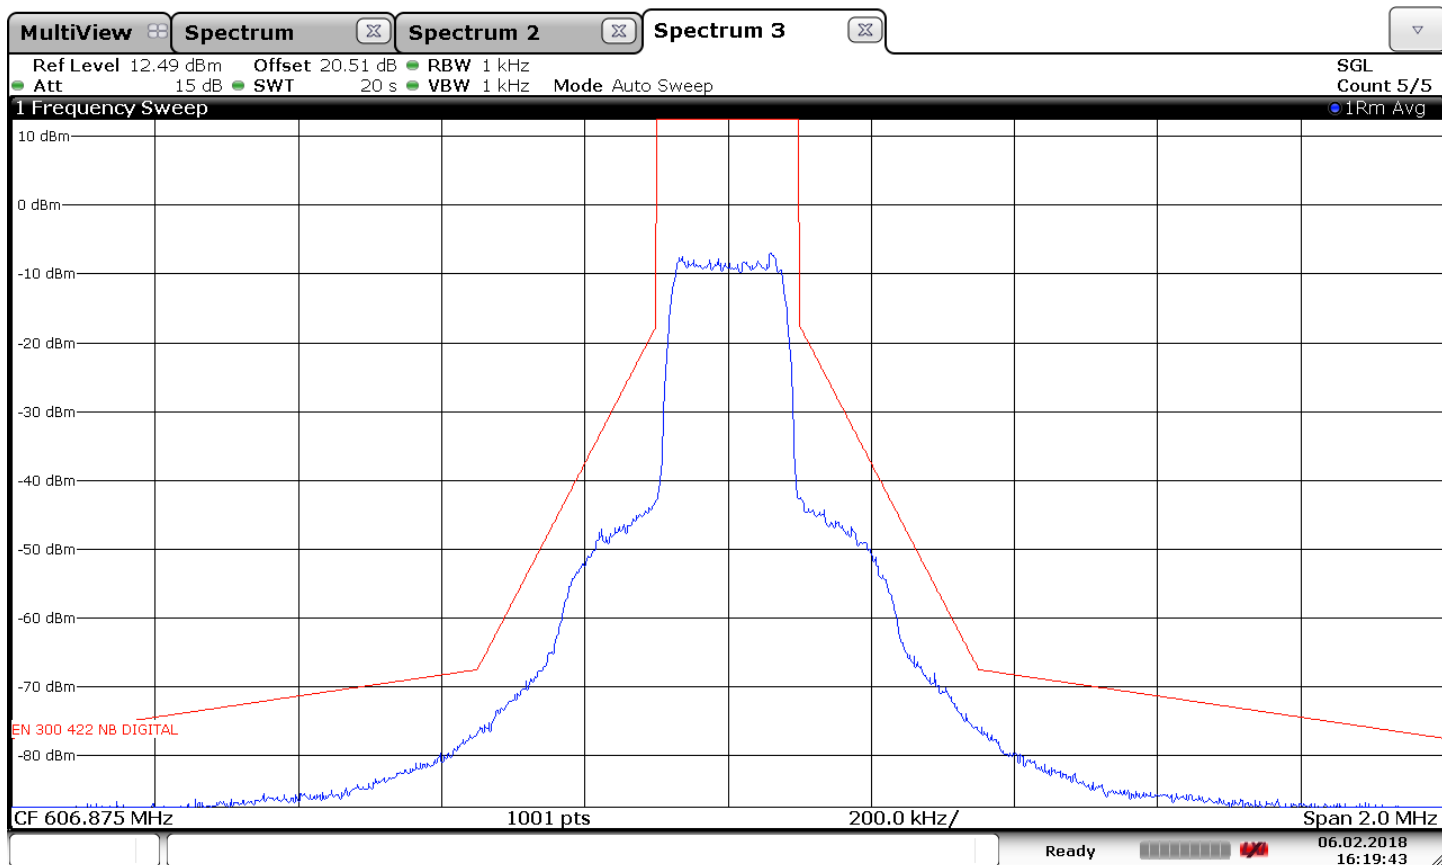


16:19:44 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: Low Frequency, 614.125MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 1; Carrier Power  
Date Tested: Tested on February 6, 2018

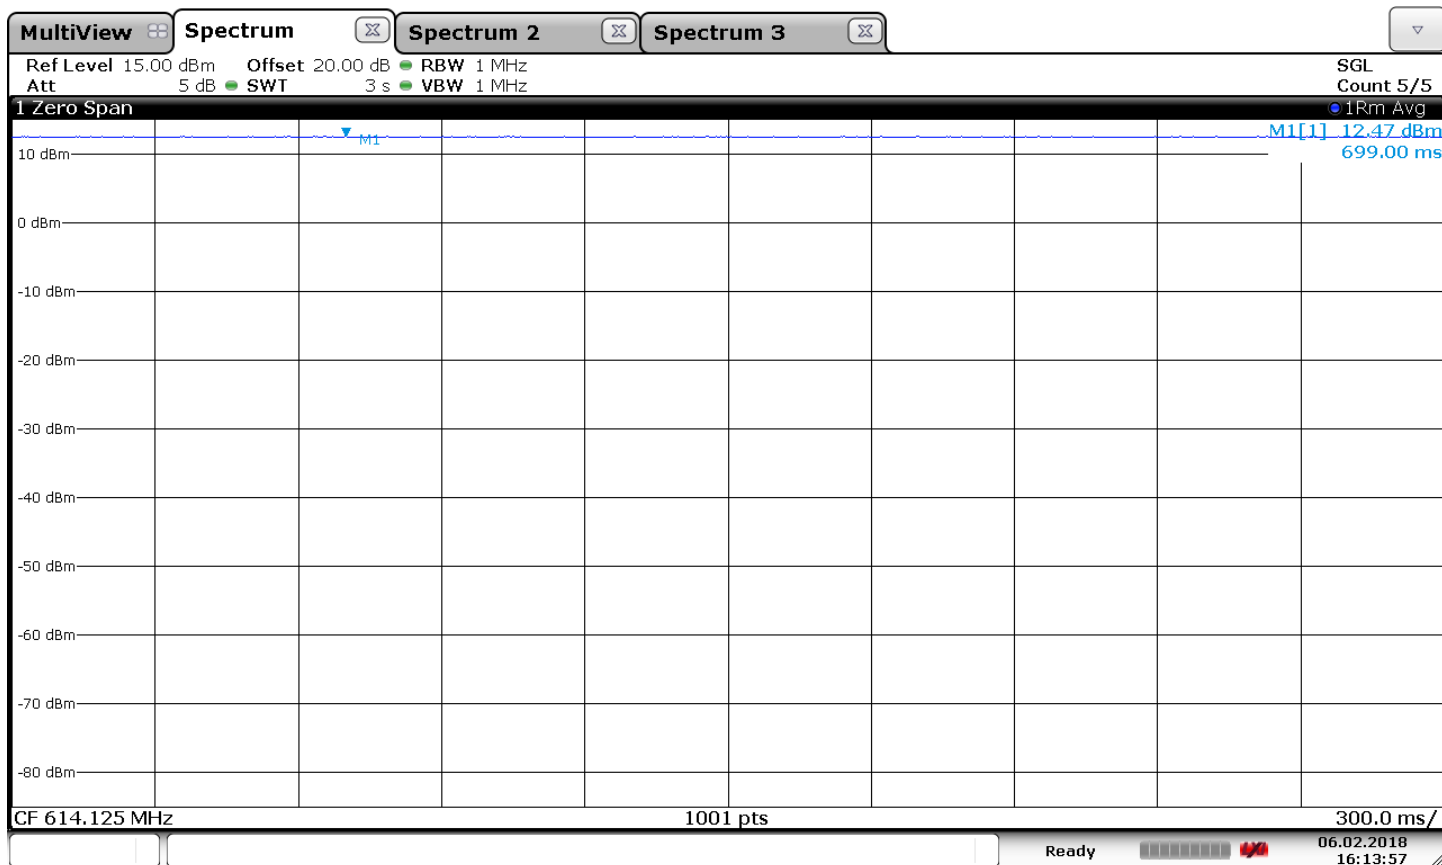


16:13:58 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: Low Frequency, 614.125MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 2;Maximum Relative Level  
Date Tested: Test on February 6, 2018

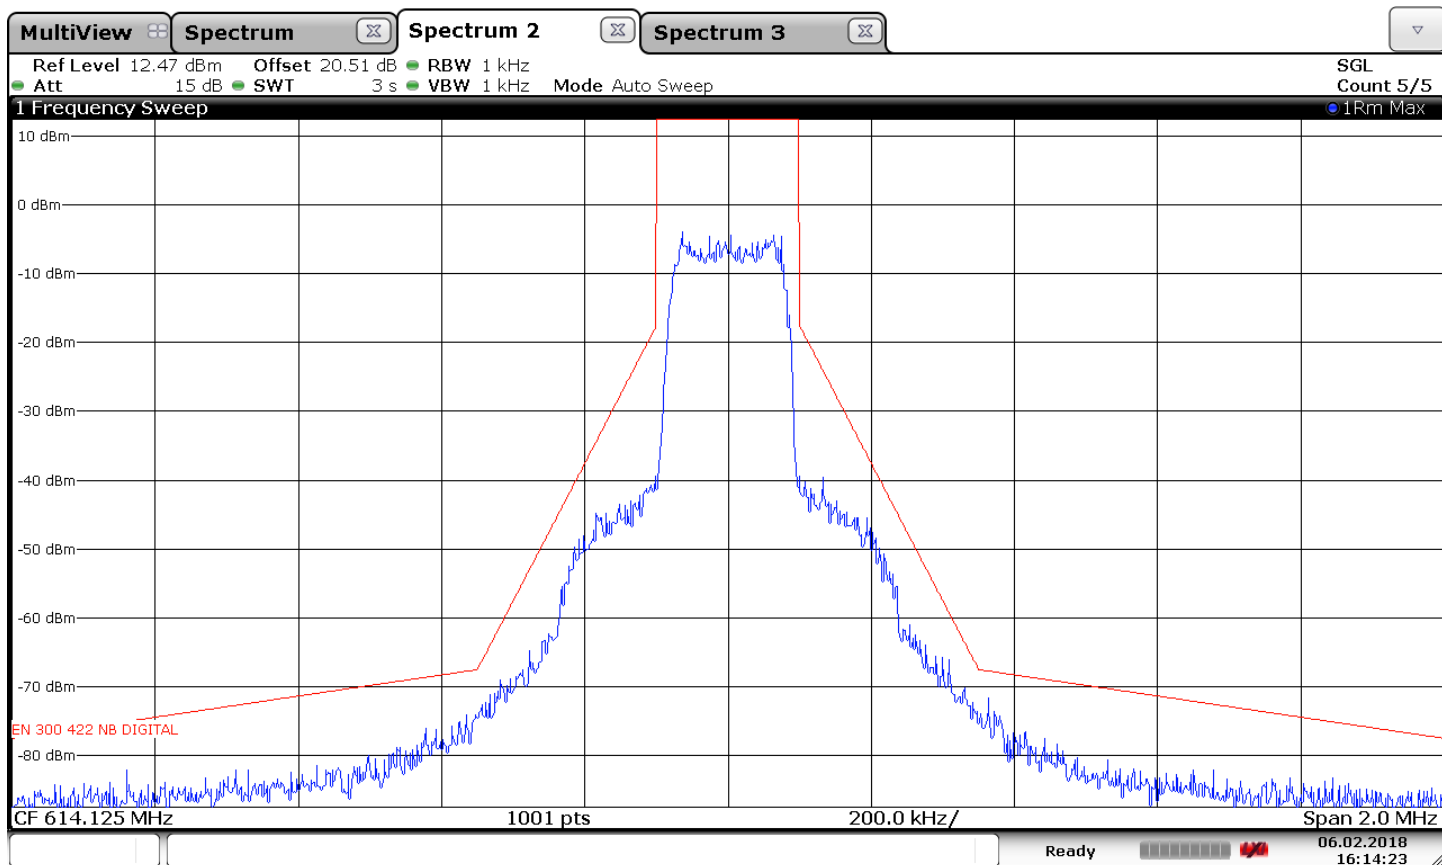


16:14:23 06.02.2018





### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: Low Frequency, 614.125MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter  
Wide band noise floor  
Date Tested: Test on February 6, 2018

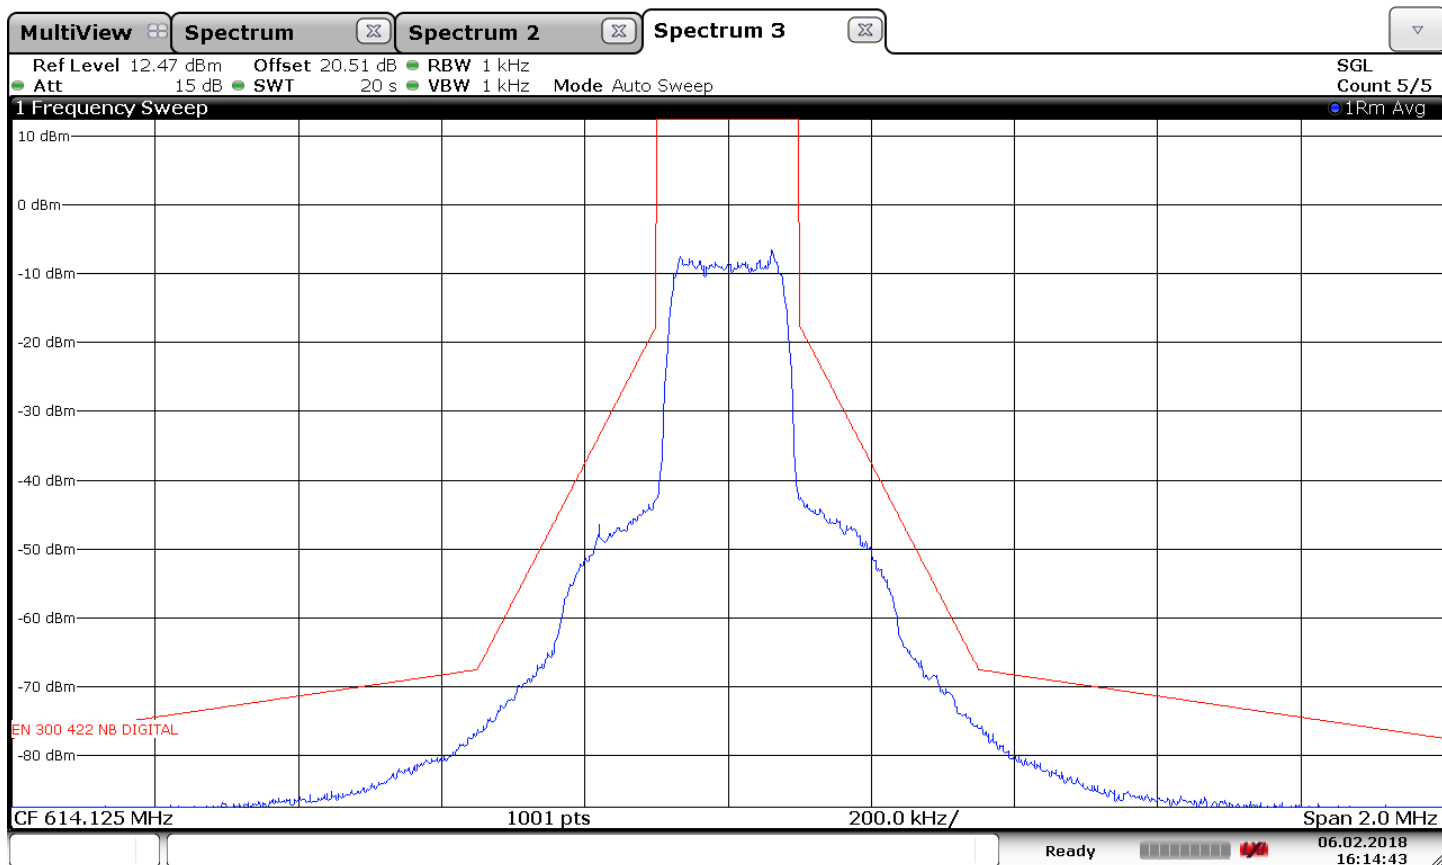


16:14:44 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: High Frequency, 615.875MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 1; Carrier Power  
Date Tested: Tested on February 6, 2018

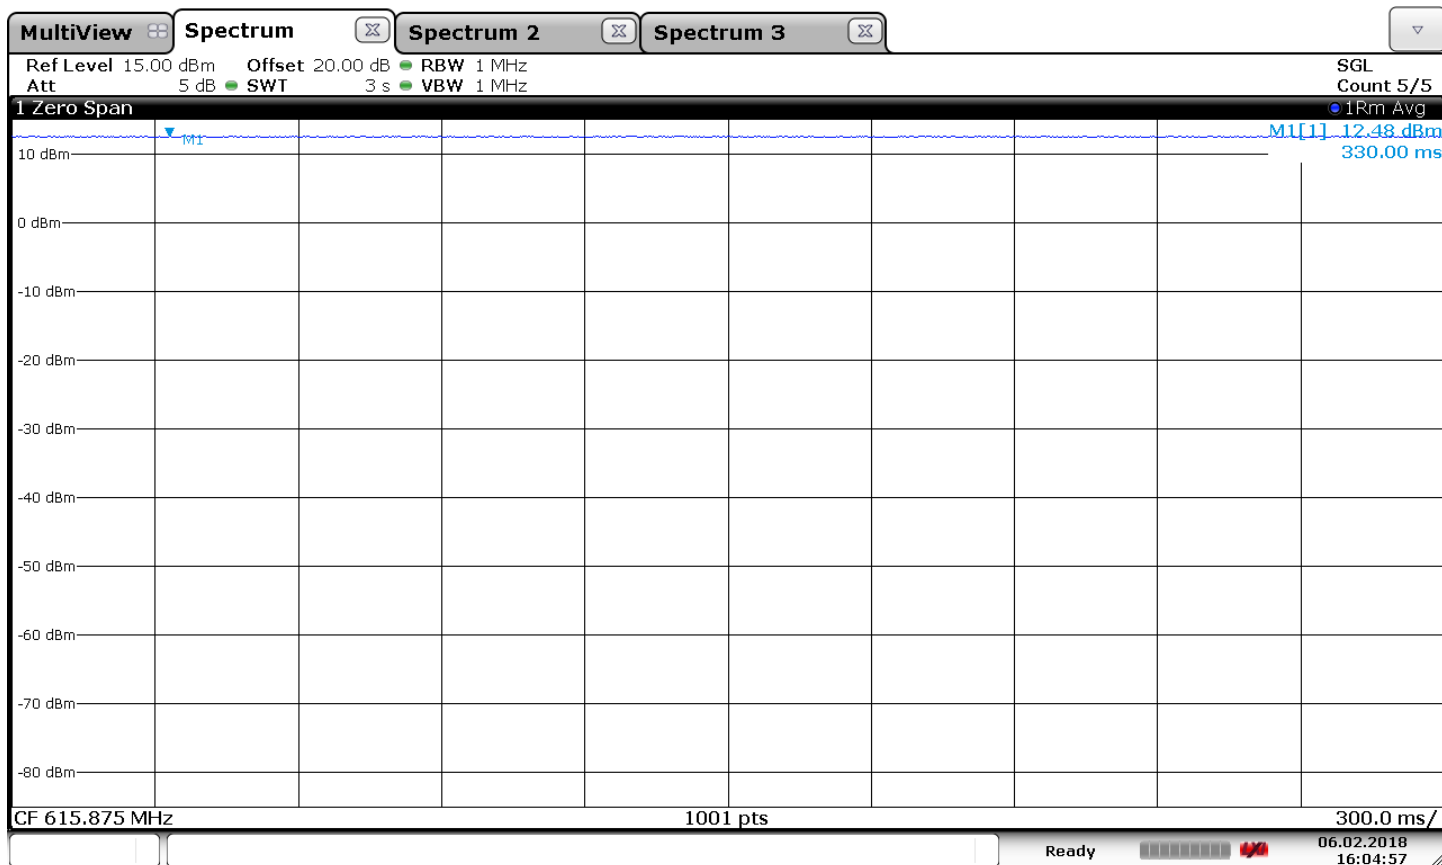


16:04:57 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: High Frequency, 615.875MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 2;Maximum Relative Level  
Date Tested: Test on February 6, 2018

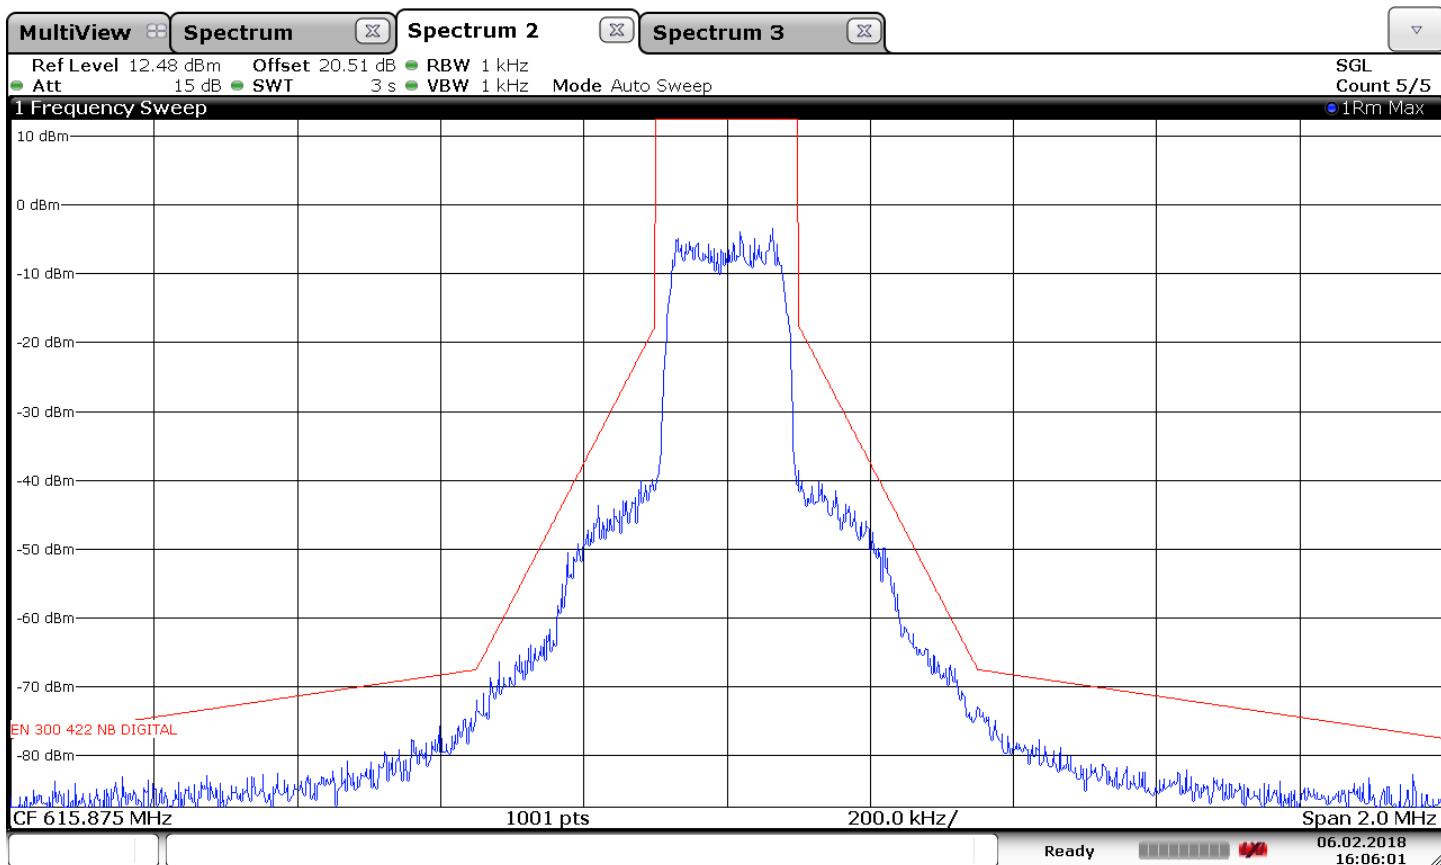


16:06:01 06.02.2018



### Test Information

EUT Name: ULXD6 J50A  
Serial Number: # 1  
Test Description: EN 300 422 Digital Necessary Bandwidth  
Operating Conditions: High Frequency, 615.875MHz, 20mW  
Operator Name: Juan Castrejon  
Comment: 8.3.3.1: Step 3;Lower and upper frequency transmitter  
Wide band noise floor  
Date Tested: Test on February 6, 2018

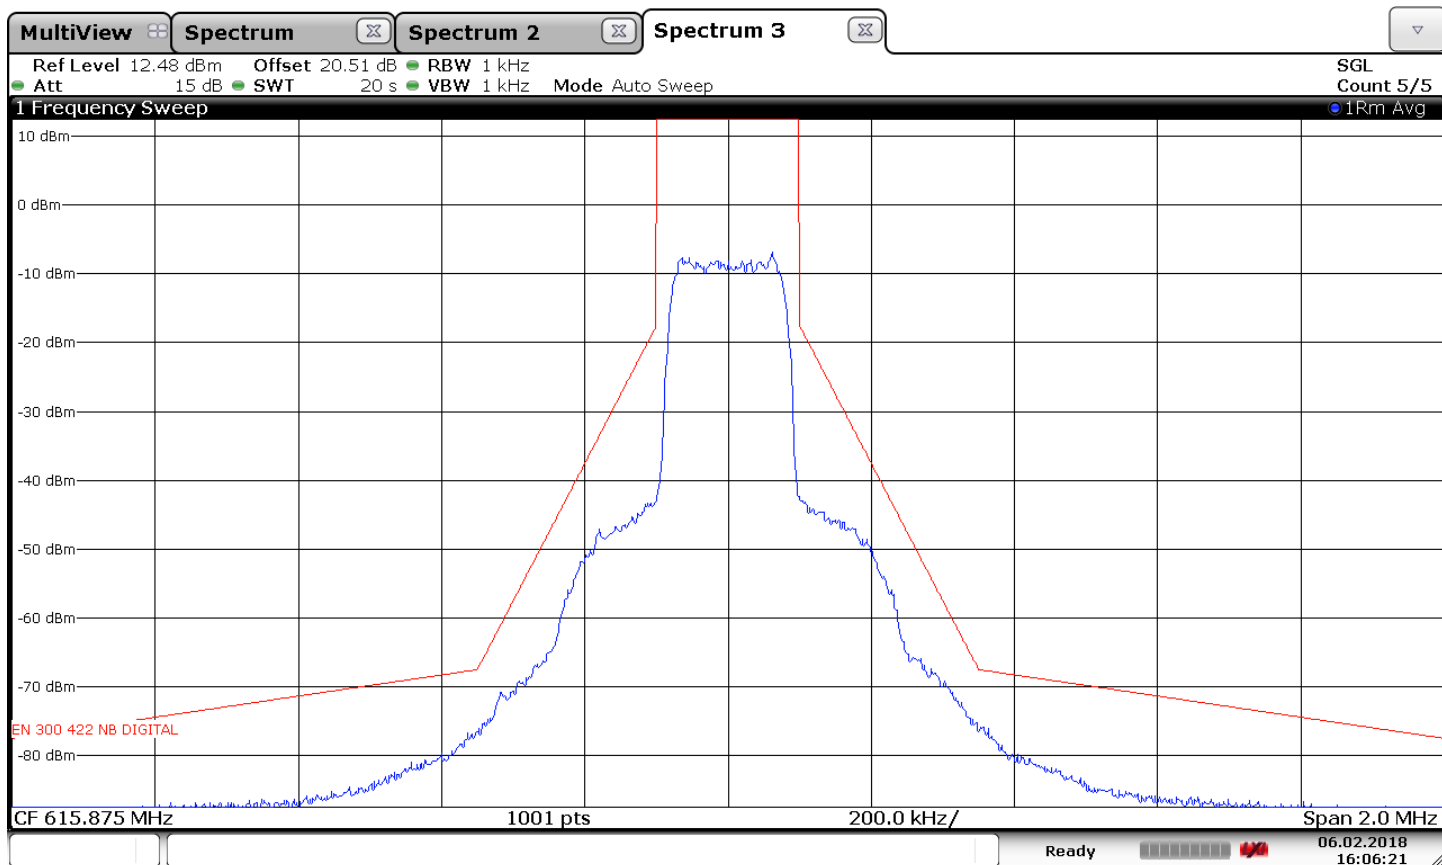

16:06:21 06.02.2018

## D. Test Setup Photos

### 1. Radiated Emissions test setup

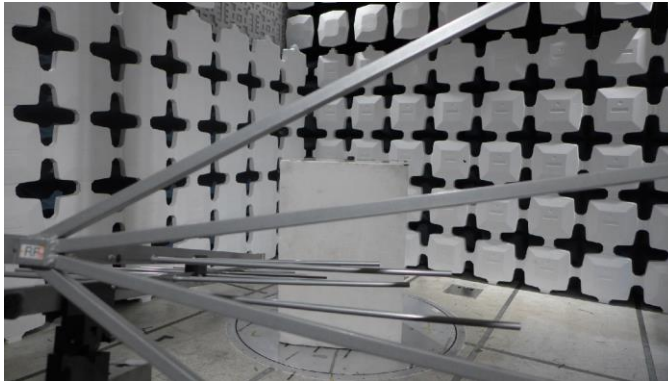


Figure 1: ULXD6 Transmitter Test Setup

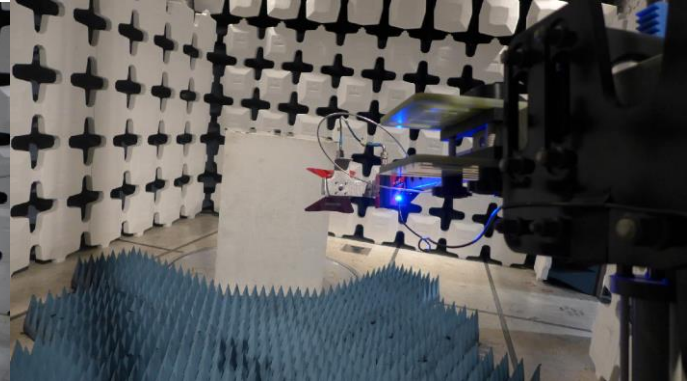


Figure 2: ULXD6 Transmitter Test Setup

### 2. Power Output test setup

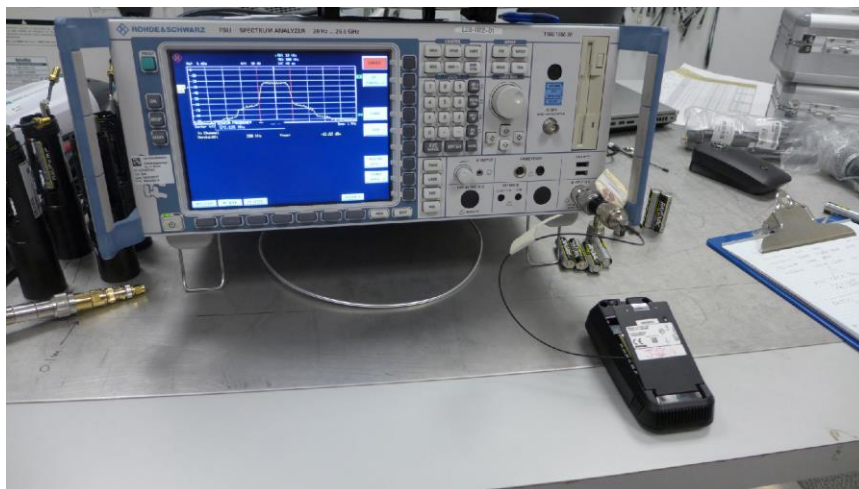


Figure 3: Test setup for Maximum Radiated Output

### 3. Necessary Bandwidth test setup

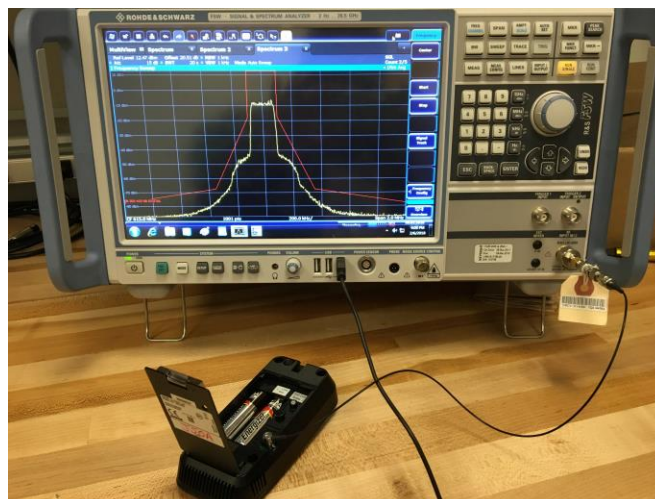


Figure 4 - Test Setup for Necessary Bandwidth