



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

FCC Rules and Regulations / Intentional Radiators

Low Power Auxiliary Stations

Part 74, Subpart H, Sections 74.801 - 74.882

Part 74.861 (e) TV Broadcasting

THE FOLLOWING **MEETS** THE ABOVE TEST SPECIFICATION

Formal Name: UR1H Bodypack Transmitter
Kind of Equipment: Wireless Microphone Transmitter
Test Configuration: Stand Alone, or with External Antenna and Mixer
(Tested at 120 vac, 60 Hz and 3 vdc)
Model Number(s): UR1H J5
Model(s) Tested: UR1H J5
Serial Number(s): N/A
Emission Designator: 91.4KF3E
Date of Tests: October 22, 23, & 24, 2007 and September 22, 2008
Test Conducted For: Shure Incorporated
5800 W. Touhy Ave.
Niles, Illinois 60714-4608

NOTICE: "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report.

© Copyright 1983-2007 D.L.S. Electronic Systems, Inc

COPYRIGHT NOTICE

This report or any portion thereof, may not be reproduced or modified in any form without the expressed written consent of D.L.S. Electronic Systems, Inc.



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

SIGNATURE PAGE

Report By:

Arnom C. Rowe
Test Engineer
EMC-001375-NE

Reviewed By:

William Stumpf
OATS Manager

Approved By:

Brian Mattson
General Manager



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

TABLE OF CONTENTS

i.	Cover Page	1
ii.	Signature Page	2
iii.	Table of Contents	3
iv.	NVLAP Certificate of Accreditation	5
1.0	Summary of Test Report	6
2.0	Introduction	6
3.0	Object	6
4.0	Test Set-Up	7
5.0	Test Equipment	8
6.0	Ambient Measurements	9
7.0	AC Power Line Conducted Emission Measurements	10
8.0	Description of Test Sample	11
9.0	Additional Description of Test Sample	11
10.0	Photo Information and Test Set-Up	12
11.0	Radiated Photos Taken During Testing	13
11.0	AC Power Line Conducted Photos Taken During Testing	17
12.0	Results of Tests	18
13.0	Conclusion	18
	TABLE 1 – EQUIPMENT LIST	19



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

TABLE OF CONTENTS


Appendix A – Electric Field Radiated Emissions Test.....	24
1.0 Test Set-Up	25
2.0 DC Voltages and Current into final Amplifying Stage.....	25
3.0 RF Power Output	25
3.0 Data taken of the RF Power Output.....	26
4.0 RF Output Power Photos Taken During Testing	30
5.0 Modulation Characteristics	31
5.0 Graph(s) taken of the Modulation Characteristics	32
6.0 Occupied Bandwidth.....	37
6.0 Data and Graph(s) taken of the 99% Occupied Bandwidth.....	38
6.0 Data and Graph(s) taken of the 99% Occupied Bandwidth (Emission Mask)	42
7.0 Spurious Emissions At Antenna Terminals	49
7.0 Conducted Emission Data and Charts made at the Antenna Terminals	50
8.0 Field Strength of Spurious Emission Measurements	57
8.0 Radiated Data and Charts taken for Fundamental using the Substitution Method	59
8.0 Radiated Data and Graph(s) Taken During Testing for Spurious Emissions	66
9.0 Frequency Stability (Temperature).....	70
10.0 Frequency Stability (Voltage Variation).....	70
9.0 & 10.0 Data taken for Frequency Stability Temperature & Voltage Variation.....	71
11.0 Frequency Stability Photos Taken During Testing.....	73
12.0 Emission Mask taken during testing.....	74
13.0 AC Power Line Conducted Emissions taken during testing.....	81



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

United States Department of Commerce
 National Institute of Standards and Technology

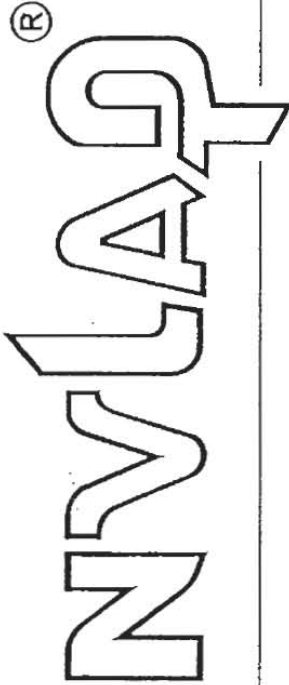

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
 Wheeling, IL

is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
 listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
 This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
 management system (refer to joint ISO-ILAC-IAF Communiqué dated 18 June 2005).*



2007-10-01 through 2008-09-30

Effective dates

Dolly S. Bucea

For the National Institute of Standards and Technology



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

1.0 SUMMARY OF TEST REPORT

It was found that the UR1H Bodypack Transmitter, Model Number(s) UR1H J5 **meets** the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Section 74.861 (e), for low power auxiliary stations.

2.0 INTRODUCTION

On October 22, 23, & 24, 2007 and September 22, 2008, a series of radio frequency interference measurements was performed on UR1H Bodypack Transmitter, Model Number(s) UR1H J5, Serial Number: N/A. The tests were performed according to the procedures of the FCC as stated in Part 2 - Frequency Allocations and Radio Treaty Matters: General Rules and Regulations, Subpart J, Equipment Authorization Procedures of the Code of Federal Regulations 47. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO Guide 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI. All immunity tests were performed by personnel of D.L.S. Electronic Systems, Inc. at the following location(s):

Main Test Facility:
D.L.S. Electronic Systems, Inc.
1250 Peterson Drive
Wheeling, Illinois 60090

3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Section 74.861 (e), for low power auxiliary stations.



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

4.0 TEST SET-UP

All tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2003. The conducted tests if required were performed with the test item placed on a non-conductive table (table top equipment), located in the test room. Equipment normally operated on the floor was tested by placing it on the metal ground plane. The ground plane has an electrical isolation layer over its surface approximately 7mm thick. The power line supplied was connected to a dual line impedance stabilization network electrically bonded to the ground plane, located on the floor. The networks were constructed per the requirements of the American National Standards Institute, ANSI C63.4-2003.

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable, which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to TIA Standard, TIA-603-C:2004, Section 2.2.12.



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/ESI 40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and or ESI 26/ESI 40 fixed tuned receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/ESI 40 Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the ESI 26/ESI 40 Fixed Tuned Receiver.

The bandwidths shown below are specified by ANSI C63.4-2003.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emission that has the highest amplitude relative to the limit. These methods are performed to the specifications in ANSI C63.4: 2003.



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

7.0 AC POWER LINE CONDUCTED EMISSION MEASUREMENTS – Part 15.207

Conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in FCC Part 15, Subpart C, Section 15.207 & ANSI C63.4-2003. Since the device is operated from the public utility lines, the 120 Vac, 60 Hz power leads, high (hot) and low (neutral) sides, were measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. During the test, the cables were placed and items moved (when appropriate) to maximize emissions. All signals were then recorded. The allowed levels for Intentional Radiators which is designed to be connected to the public utility (AC) power line cannot exceed the following:

Frequency of Emissions (MHz)	Conducted Limits (dBuV)	
	Quasi Peak	Average
.15 to .5	66 to 56	56 to 46
.5 to 5	56	46
5 to 30	60	50

NOTE:

All test measurements were made at a screen room temperature of **74°F** at **52%** relative humidity.



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

8.0 DESCRIPTION OF TEST SAMPLE:

8.1 Description:

The UHF-R Wireless Microphone System uses the latest wireless technology, delivers outstanding audio clarity, and is rugged and reliable. It operates over the frequency range of 518 to 865 MHz (in different frequency bands). The products are identical, with the exception of the frequency components needed for each range. The User Interface includes directional buttons, and an LCD that displays battery status, group/channel, and transmitter/receiver frequency synchronization. It is easy to set up and operate with advanced features for professional installations requiring multiple wireless microphone systems.

8.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

Length: 98 mm x 60mm x 17 mm

8.3 LINE FILTER USED:

NA

8.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

NA

Clock Frequencies:

0.025, 0.064, 0.750, 1.2, 4 & 16, 32 MHz

8.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

1. Printed Circuit Board 1

PN: 190-11425, Rev. 00

9.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

1: The antenna is a flexible whip with SMA connector, Shure P/N: 95E9043



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

10.0 PHOTO INFORMATION AND TEST SET-UP

Item 0 UR1H Bodypack Transmitter

Model Number: UR1H J5, Serial Number: N/A

Item 1 A.C. to D.C. Power Supply; Model PS22US; Serial No. 3407

Item 2 Shure Microphone Cable



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

11.0 RADIATED PHOTOS TAKEN DURING TESTING



ORIENTATION Y-AXIS



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

11.0 RADIATED PHOTOS TAKEN DURING TESTING



ORIENTATION X-AXIS



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

11.0 RADIATED PHOTOS TAKEN DURING TESTING



ORIENTATION Z-AXIS



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

11.0 RADIATED PHOTOS TAKEN DURING TESTING



BACK VIEW OF SETUP



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

11.0 AC POWER LINE CONDUCTED PHOTOS TAKEN DURING TESTING





Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

12.0 RESULTS OF TESTS

The radio interference emission charts can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report.

13.0 CONCLUSION

It was found that the UR1H Bodypack Transmitter, Model Number(s) UR1H J5 **meets** the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Section 74.861 (e), for low power auxiliary stations.



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	11/07
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	12/07
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	12/07
Antenna	EMCO	3104C	00054891	20 MHz – 200 MHz	2/08
Antenna	Electrometrics	LPA-25	1114	200 MHz – 1 GHz	3/08
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	3/08
Antenna	Electrometrics	3146	1205	200 MHz – 1 GHz	3/08
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	2/08
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	3/08
Antenna	Rohde & Schwarz	HUF-Z1	829381001	20 MHz – 1 GHz	2/08
Antenna	Rohde & Schwarz	HUF-Z1	829381005	20 MHz – 1 GHz	8/08
Horn Antenna	EMCO	3116	2549	18 – 40GHz	5/08
Horn Antenna	ETS Lindgren	3116	00062917	18 – 40GHz	10/08

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Horn Antenna	A.H. Systems	SAS-574	221	18 - 40GHz	4/08
Horn Antenna	A.H. Systems	SAS-574	222	18 - 40GHz	4/08
Horn Antenna	Com Power	AH 118	071127	1-18GHz	5/08
Horn Antenna	EMCO	3115	4451	1-18GHz	5/08
Horn Antenna	EMCO	3115	6204	1-18GHz	5/08
Horn Antenna	EMCO	3115	5731	1-18GHz	6/08
Attenuator - 10dB Fixed	JFW	50FH-101-50N	50FH-010-10	DC-2GHz	9/08
Attenuator-10dB Fixed	Pasternack	PE7014-10		DC-18GHz	9/08
Attenuator-10dB Fixed	JFW	50FH-010-10		DC-2GHz	9/08
Attenuator-20dB Fixed	Aeroflex Weinschel	75A-20-12	1071	DC – 40GHz	7/08
Attenuator-20dB Fixed	Pasternack	PE7019-20		DC-18GHz	9/08
Attenuator-40dB Fixed	JFW	50FHA0-040-200		DC-18GHz	4/08
Audio Analyzer	HP	8903A	2336A03043	20Hz-100kHz	12/08

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Attenuator-20dB fixed	MCE-WEIN	59955A-20		DC-40GHz	9/08
Filter- Band Reject Tunable	K&L	3TNF-500/1000-B/B		360MHz-1.25GHz	Cal when needed
Filter- Band Reject Tunable	K&L	3TNF-63/125-B/B		62MHz-200MHz	Cal when needed
Power Meter	Anritsu	ML2487A	6K00002069		10/08
Power Sensor	Anritsu	MA2411A	031563	300MHz-40GHz	10/08
Power Sensor	Anritsu	MA2490A		50MHz-8GHz	10/08
Power Sensor	Anritsu	MA2491A		50MHz-18GHz	10/08
Preamp	R&S	TS-PR40	032001/003	26GHz-40GHz	1/08
Preamp	Miteq	AMF-8B-180265-40-10P-H/S		18GHz-26GHz	9/08
Preamp	Miteq	MF-6D-010100-50A	213976	10GHz-18GHz	5/08
Preamp	Miteq	AMF-6F-100200-50-10P	668382	10GHz-18GHz	1/08
Preamp	Miteq	AMF-6D-100200-50	313936	1GHz-10GHz	5/08
Preamp	Ciao	CA118-4010	-----	1GHz-18GHz	1/08

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
50 Ohm Load-50W	Pasternack	PE6039	-----	DC-18GHz	Ref check
Modulation Analyzer	HP	8901B	2920A02096	150kHz-1.3GHz	11/08
Filter- High-Pass	Mini Circuits	NHP-600	438727	600MHz-7GHz	9/08
Filter- High-Pass	Mini Circuits	NHP-400	10433	400MHz-5GHz	9/08
Filter- High-Pass	Mini Circuits	NHP-900	-----	910MHz-8GHz	9/08
Filter- High-Pass	Q-Microwave	100460	-----	1.1GHz	5/08
Filter- High-Pass	Q-Microwave	100461	-----	2.9GHz	5/08
Filter- High-Pass	Q-Microwave	100462	-----	4.2GHz	5/08
Filter- High-Pass	Q-Microwave	100460	-----	1.1GHz	5/08
Filter- High-Pass	Q-Microwave	100461	-----	2.5GHz	5/08
Filter- High-Pass	Q-Microwave	100462	-----	4.6GHz	5/08
Filter- High-Pass	SOLAR	7930-10	921541	12kHz	3/08
Filter- High-Pass	SOLAR	7930-10	888809	11kHz	1/08

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Filter-Notch	K&L	4N45-2450/T100-0/0	-----	2.45GHz	5/08
Signal Generator	R&S	SMR-40	100092	1 – 40GHz	8/08
Filter- High-Pass	Planar	HP8G-7Q8-CD-SFF	PF1225/7728	$f_c = 7.5\text{GHz}$	7/08
Filter- High-Pass	Planar	HP8G-7Q8-CD-SFF	PF1226/7728	$f_c = 7.5\text{GHz}$	7/08
Filter- High-Pass	Planar	HP2G-1780-CD-SS	PF1227/7728	$f_c = 1.5\text{GHz}$	7/08
Filter- High-Pass	Planar	HP2G-1780-CD-SS	PF1228/7728	$f_c = 1.5\text{GHz}$	7/08
Filter- High-Pass	Planar	CL22600-9000-CD-SS	PF1230/7728	$f_c = 16.2\text{GHz}$	7/08
Filter- High-Pass	Planar	CL22600-9000-CD-SS	PF1229/7728	$f_c = 16.2\text{GHz}$	7/08
Signal Generator	Hewlett-Packard	HP8341B	2819A01017	10MHz – 20GHz	8/07
Directional Coupler	Mini-Circuits	ZDC-20-3	BF886600648	0.2 – 250MHz	New 8/07
Directional Coupler	Mini-Circuits	ZFDC-20-4-N	NF801600636	1 – 1000MHz	New 8/07
Bi-Directional Coupler	Mini-Circuits	ZX30-20-20BD-S+	SN350700724	500 – 2000MHz	New 8/07

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

TEST PROCEDURE

SUBPART H

LOW POWER AUXILIARY STATIONS OPERATING IN THE BANDS ALLOCATED FOR TV BROADCASTING



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

1.0 TEST SET-UP

All radiated emission tests were performed at D.L.S. Electronic Systems, Inc. The radiated tests were made with the test item placed on a non-conductive turntable located in the Test Room with the receive antenna placed three or one meter(s) from the device under test

2.0 DC VOLTAGES AND CURRENTS APPLIED INTO FINAL AMPLIFYING STAGE – PART 2.1033(c-8)

5V (collector), 100 mA (Imax)

3.0 RF-POWER OUTPUT – PART 2.1046 and EIA /TIA-603-C:2004, SECTION 2.2.17

As stated in PART 74.861 (e)(1)(ii), the RF output power should not exceed 0.25 watt(s). The RF output of the UR1H Bodypack Transmitter was connected to a Power Meter through suitable attenuation. All cables, connectors, and attenuators were calibrated prior to testing. The RF output power was measured using the following test method:

Actual Measurements Taken:

23.65 dBm Measured output of the transmitter

23.65 dBm equals 0.2317 watt(s)

LIMIT:

Manufacturer's rated output power = 250 mW

MARGIN:

$0.25 - 0.2317 = 0.0183$ watt(s)



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

DATA TAKEN OF THE RF POWER OUTPUT MEASUREMENT

EIA /TIA-603-C:2004, SECTION 2.2.17

FCC Part 74.861 (e)(1) & PART 2.1046




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Peak Power Output - Conducted
Rule part: FCC Part 74; FCC Part 2.1046
Operator: Craig B
Comment: Channel: 578 MHz

Peak Output Power = 13.71 dBm + 9.80 dB ext. atten. = 23.51 dBm = 224.4 mW

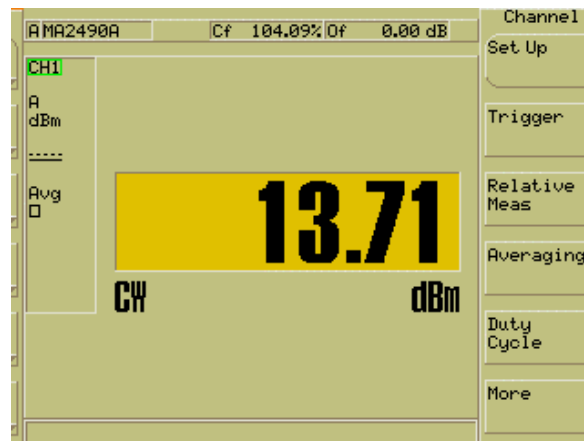




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Peak Power Output - Conducted
Rule part: FCC Part 74; FCC Part 2.1046
Operator: Craig B
Comment: Channel: 607 MHz

Peak Output Power = 12.99 dBm + 9.82 dB ext. atten. = 22.81 dBm = 191.0 mW

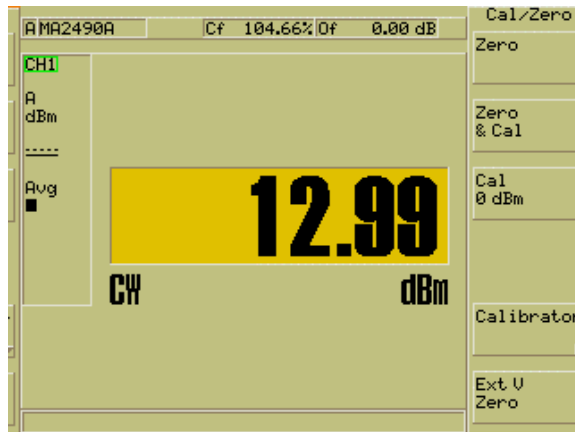




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Peak Power Output - Conducted
Rule part: FCC Part 74; FCC Part 2.1046
Operator: Craig B
Comment: Channel: **638 MHz**

Peak Output Power = 13.54 dBm + 9.83 dB ext. atten. = 23.37 dBm = 217.3 mW

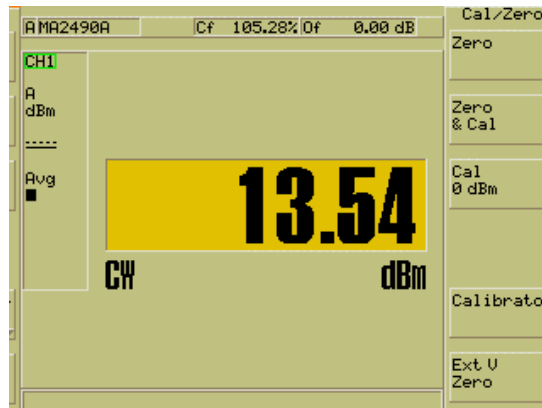




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

4.0 RF POWER OUTPUT PHOTOS TAKEN DURING TESTING

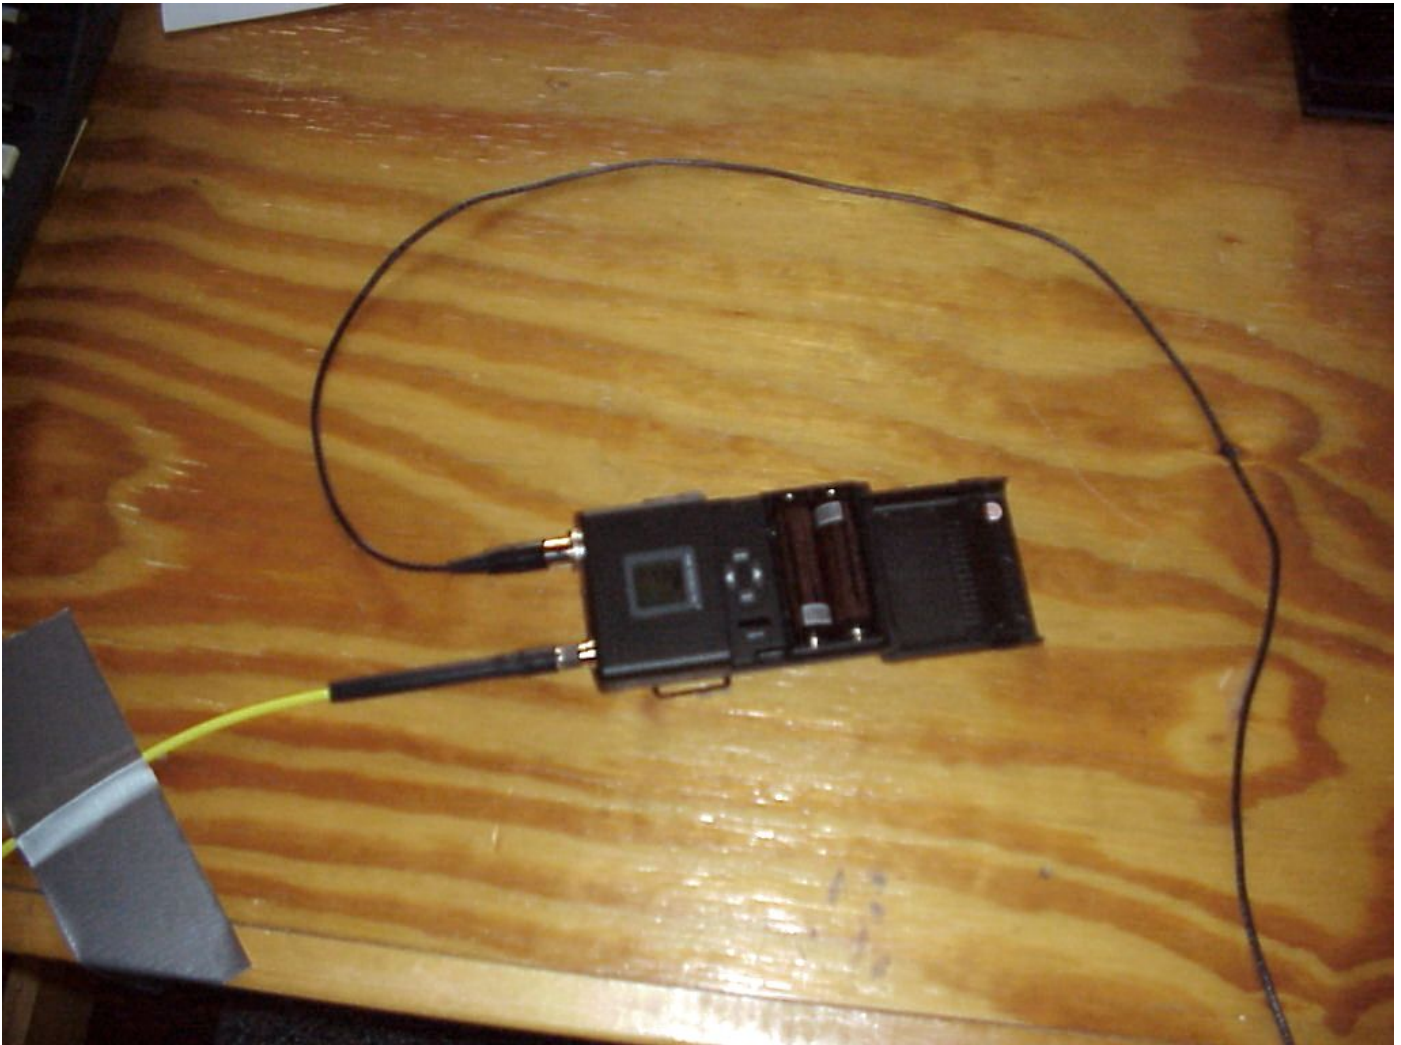



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

5.0 MODULATION CHARACTERISTICS – PART 2.1047 and EIA /TIA-603-C:2004, SECTION 2.2.3

a. Voice modulated communication equipment.

A curve showing the frequency response of the audio modulating circuit over a range of 50 Hz to 15 kHz \pm 3.0 dB Hz is submitted with this report.

b. Equipment which employs modulation limiting

A family of curves showing the percentage of modulation versus the modulation input voltage with sufficient information showing the modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

GRAPH(S) TAKEN SHOWING THE FREQUENCY RESPONSE OF THE AUDIO MODULATING CIRCUIT

EIA /TIA-603-C:2004, SECTION 2.2.3

PART 2.1047




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Deviation vs. Frequency (6 units averaged)

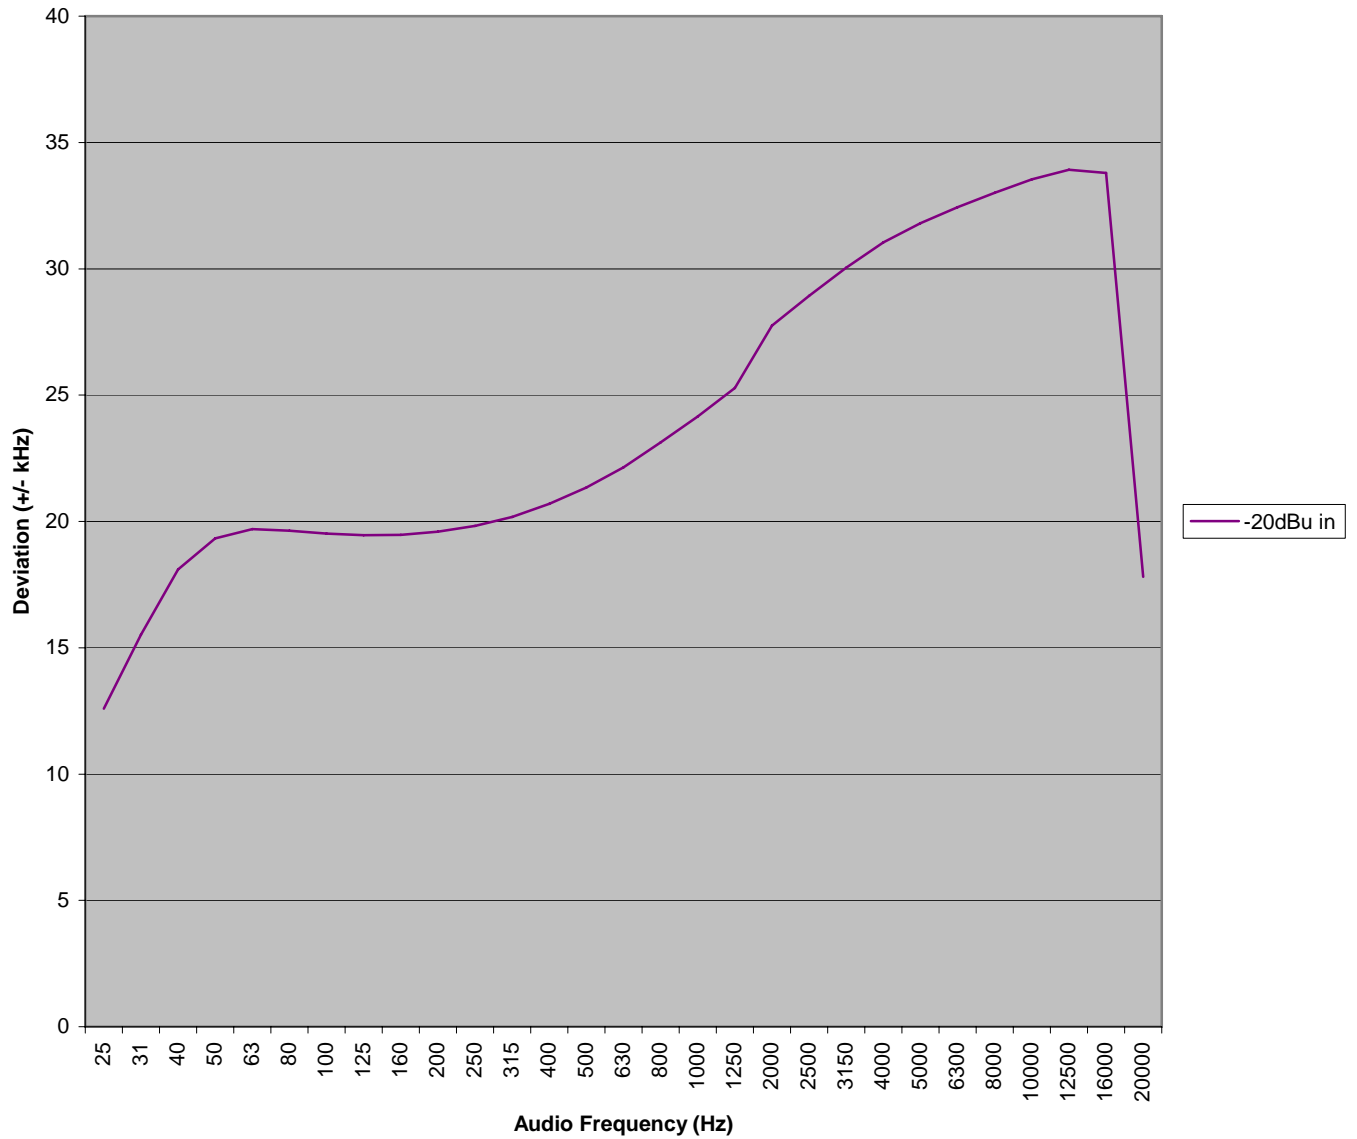




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Deviation vs. Input (6 units averaged)

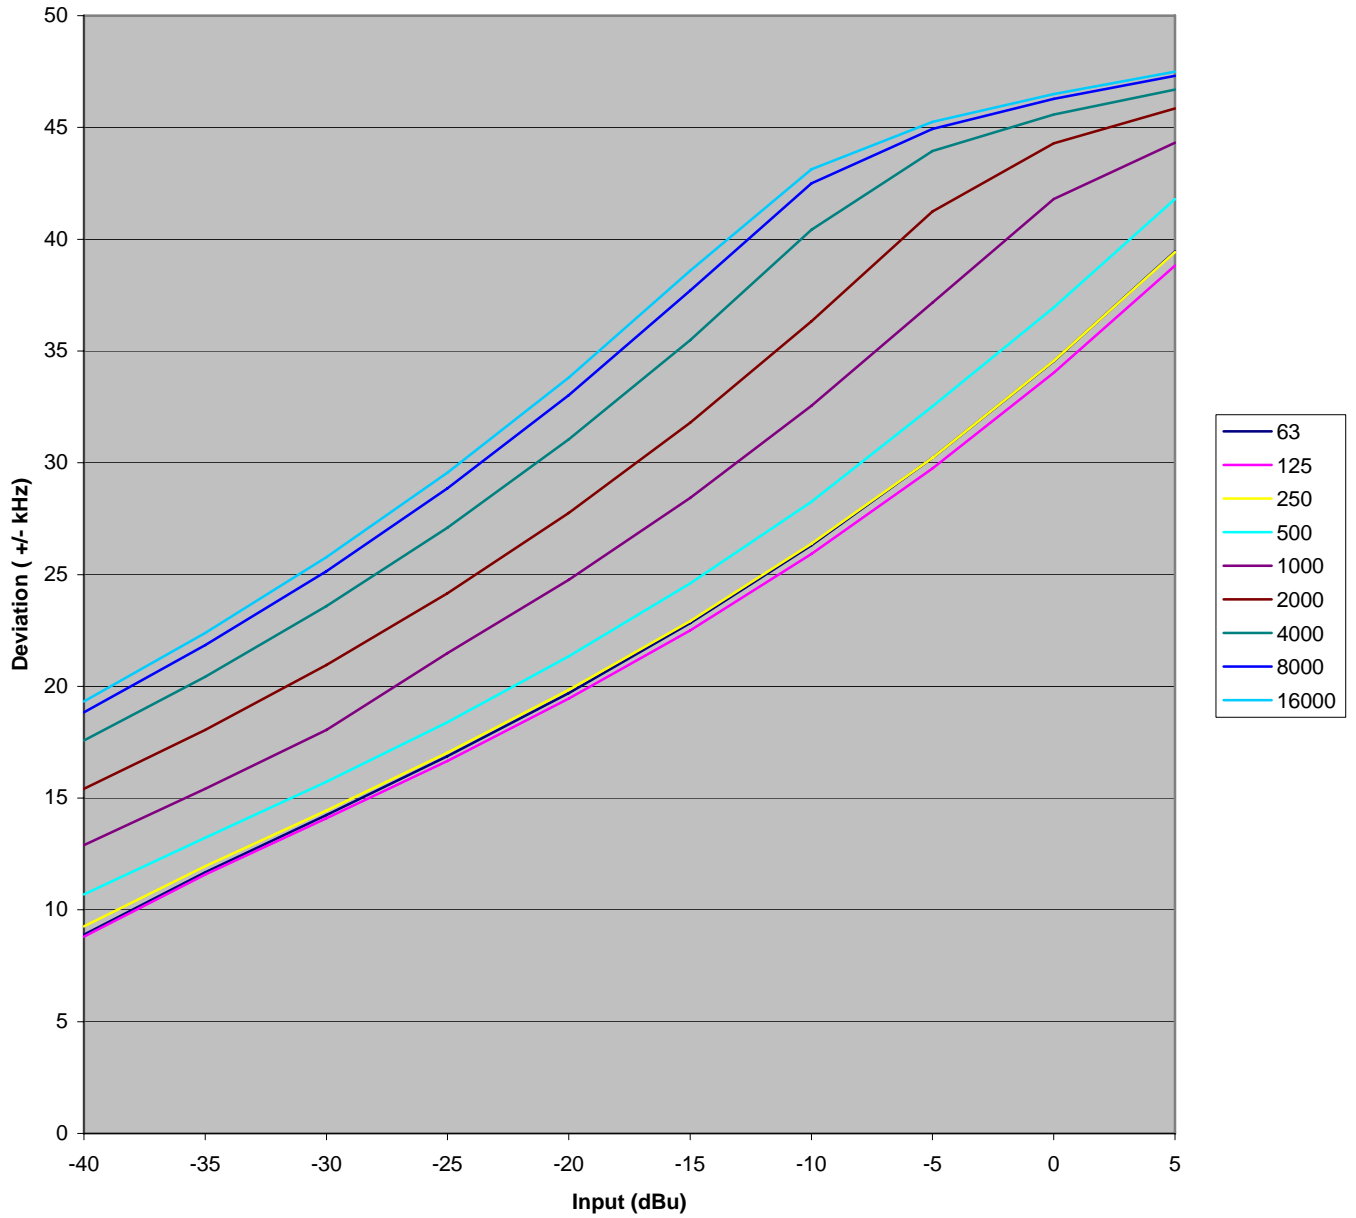




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Deviation vs. Input (6 units averaged)

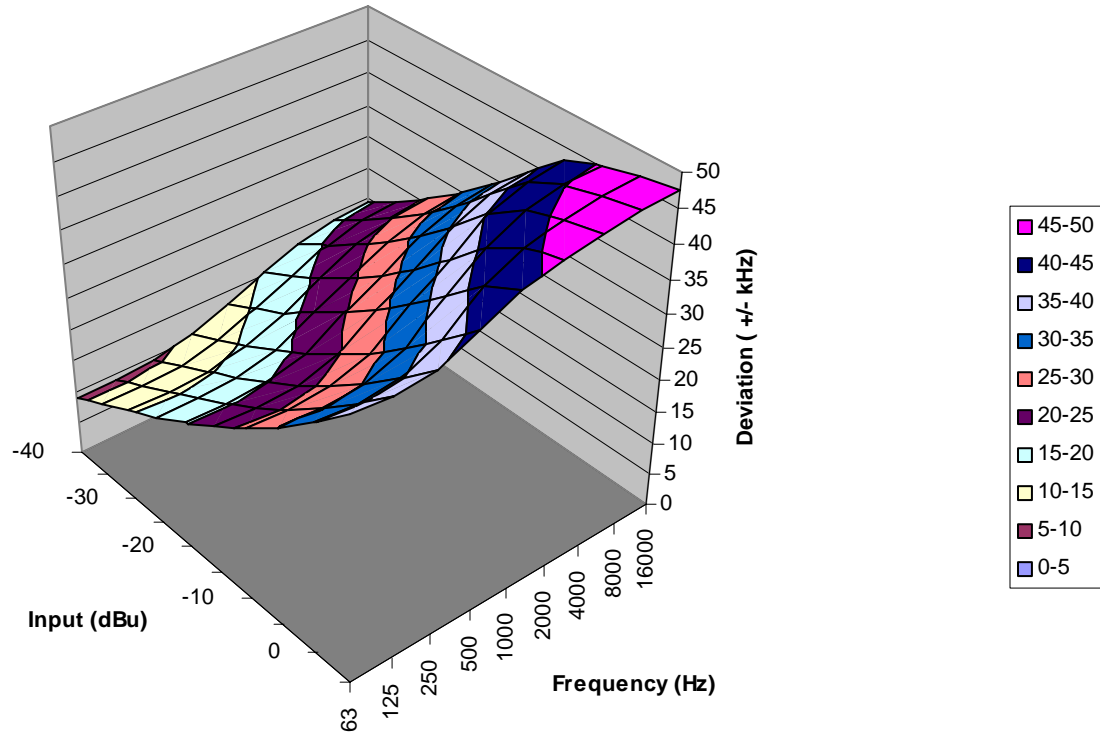



Company: Shure Incorporated
 Model Tested: URIH J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Freq	518MHz		578MHz	638MHz	790MHz		Average
	H4-1 (4552)	H4-2 (4574)	J5-1 (4582)	L3E-2 (4642)	R9-1 (4708)	R9-2 (4692)	
	Deviation	Deviation	Deviation	Deviation	Deviation	Deviation	
25	12.23	12.31	12.36	13.20	13.18	12.29	12.595
31	15.15	15.27	15.36	16.12	16.02	15.16	15.51333333
40	17.79	17.91	18.06	18.70	18.49	17.67	18.10333333
50	19.07	19.18	19.38	19.81	19.59	18.96	19.33166667
63	19.46	19.57	19.79	20.08	19.86	19.39	19.69166667
80	19.42	19.54	19.76	19.99	19.78	19.33	19.63666667
100	19.31	19.44	19.63	19.87	19.67	19.19	19.51833333
125	19.24	19.39	19.59	19.76	19.60	19.15	19.455
160	19.26	19.41	19.61	19.77	19.61	19.15	19.46833333
200	19.37	19.52	19.73	19.92	19.73	19.29	19.59333333
250	19.59	19.76	19.96	20.14	19.96	19.51	19.82
315	19.95	20.10	20.32	20.48	20.30	19.89	20.17333333
400	20.47	20.63	20.84	21.04	20.81	20.39	20.69666667
500	21.10	21.24	21.47	21.70	21.48	21.07	21.34333333
630	21.90	22.03	22.31	22.52	22.26	21.86	22.14666667
800	22.87	23.03	23.28	23.54	23.23	22.84	23.13166667
1000	23.89	24.05	24.33	24.58	24.25	23.85	24.15833333
1250	24.97	25.15	25.48	25.71	25.37	24.99	25.27833333
2000	27.37	27.59	27.97	28.23	27.83	27.53	27.75333333
2500	28.52	28.74	29.14	29.46	29.00	28.73	28.93166667
3150	29.58	29.84	30.26	30.59	30.11	29.91	30.04833333
4000	30.53	30.81	31.29	31.60	31.10	30.94	31.045
5000	31.25	31.56	32.07	32.39	31.84	31.73	31.80666667
6300	31.85	32.19	32.69	33.07	32.45	32.39	32.44
8000	32.37	32.76	33.27	33.66	33.01	33.01	33.01333333
10000	32.85	33.29	33.77	34.24	33.51	33.55	33.535
12500	33.25	33.72	34.14	34.59	33.92	33.87	33.915
16000	33.01	33.60	33.97	34.54	33.76	33.89	33.795
20000	24.19	12.23	20.52	12.63	26.45	10.84	17.81

-20dBu in



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

6.0 OCCUPIED BANDWIDTH - PART 2.1049

The occupied bandwidth is that between the lower and upper limits of the signal where the mean power is 99.0% of the total mean power and measured under the following conditions:

For low power auxiliary stations operating in the bands other than those allocated for TV broadcasting, the occupied bandwidth shall not be greater than that necessary for satisfactory transmission and emissions appearing on any discrete frequency outside the authorize band shall be attenuated $43+10 \log^{10}$ (mean output power, in watts) dB below the mean output power of the transmitting unit (device under test).

For low power auxiliary stations operating in the bands allocated for TV broadcasting, any form of modulation may be used. A maximum of ± 75 kHz is permitted when frequency modulation is used. The operating bandwidth shall not exceed 200 kHz.

Carson's Rule:

Section 2.202 (g)

$$B_n = 2M + 2DK, \quad K=1$$

B_n = Bandwidth

$$M = 15 \text{ kHz,}$$

M = Maximum Modulating Frequency

$$D = 48 \text{ kHz,}$$

D = Peak Deviation

$$B_n = 2(15) + 2(48)(1) = 126 \text{ kHz}$$



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

DATA AND GRAPH(S) TAKEN OF THE

99% OCCUPIED BANDWIDTH

Part 74.861 (e)(5) & PART 2.1049



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
 Company: Shure, Inc.
 EUT: UR1H-J5
 Test: Occupied Bandwidth; 99% bandwidth
 Rule part: FCC Part 74; FCC Part 2.1049
 Operator: Craig B

Frequency: 578 MHz

99% power bandwidth = 90.58 kHz

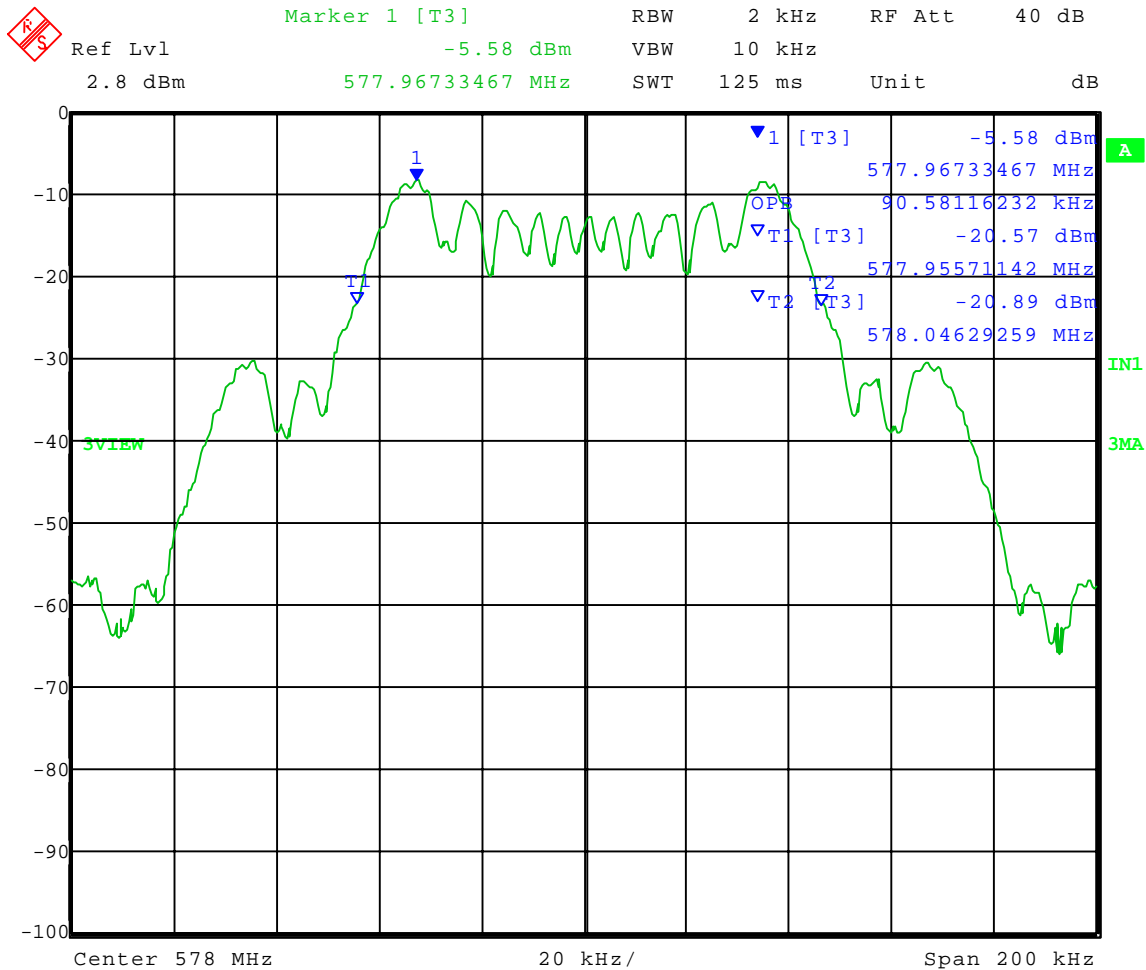

Date: 24.OCT.2007 17:58:37



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
 Company: Shure, Inc.
 EUT: UR1H-J5
 Test: Occupied Bandwidth; 99% bandwidth
 Rule part: FCC Part 74; FCC Part 2.1049
 Operator: Craig B

Frequency: 607 MHz

99% power bandwidth = 91.38 kHz

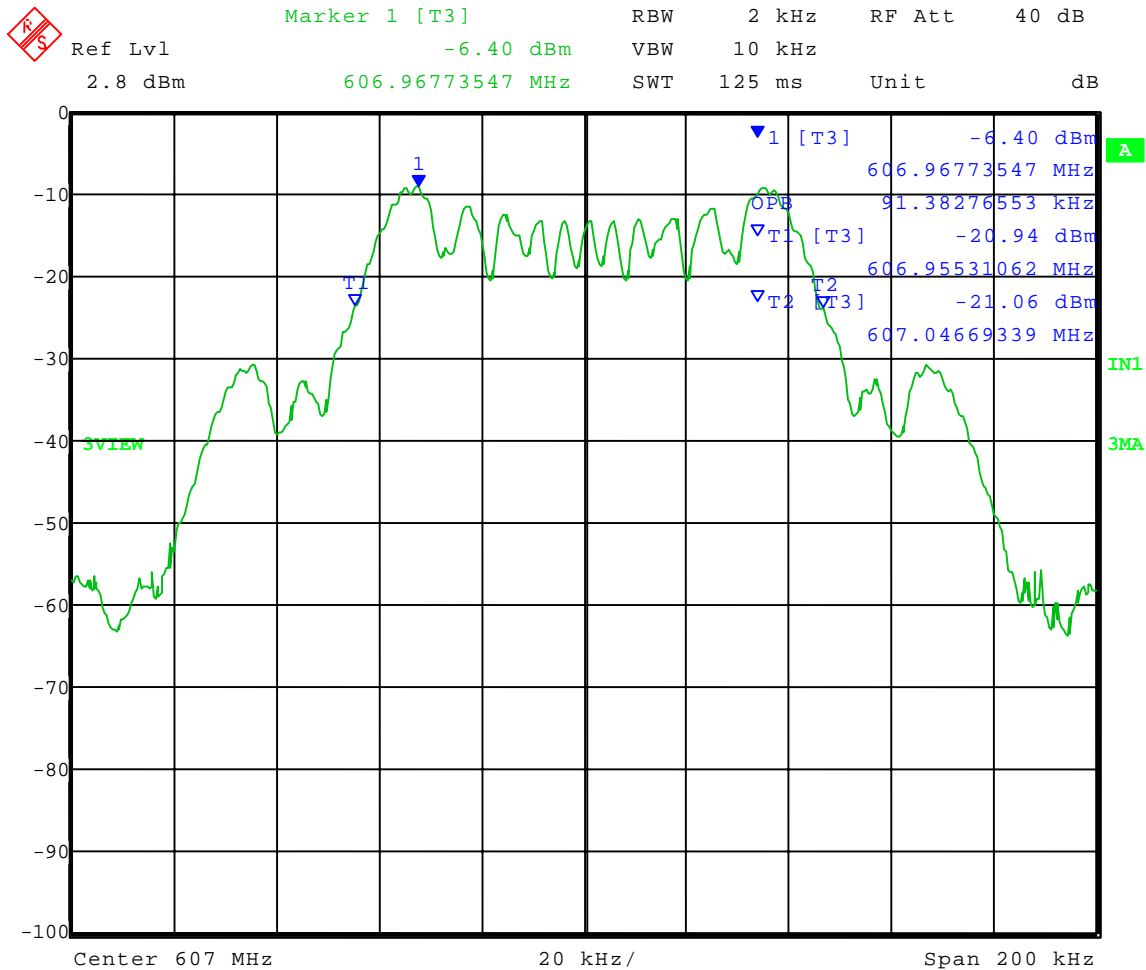

Date: 24.OCT.2007 17:59:34



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599


1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
 Company: Shure, Inc.
 EUT: UR1H-J5
 Test: Occupied Bandwidth; 99% bandwidth
 Rule part: FCC Part 74; FCC Part 2.1049
 Operator: Craig B

Frequency: **638 MHz**

99% power bandwidth = 90.98 kHz

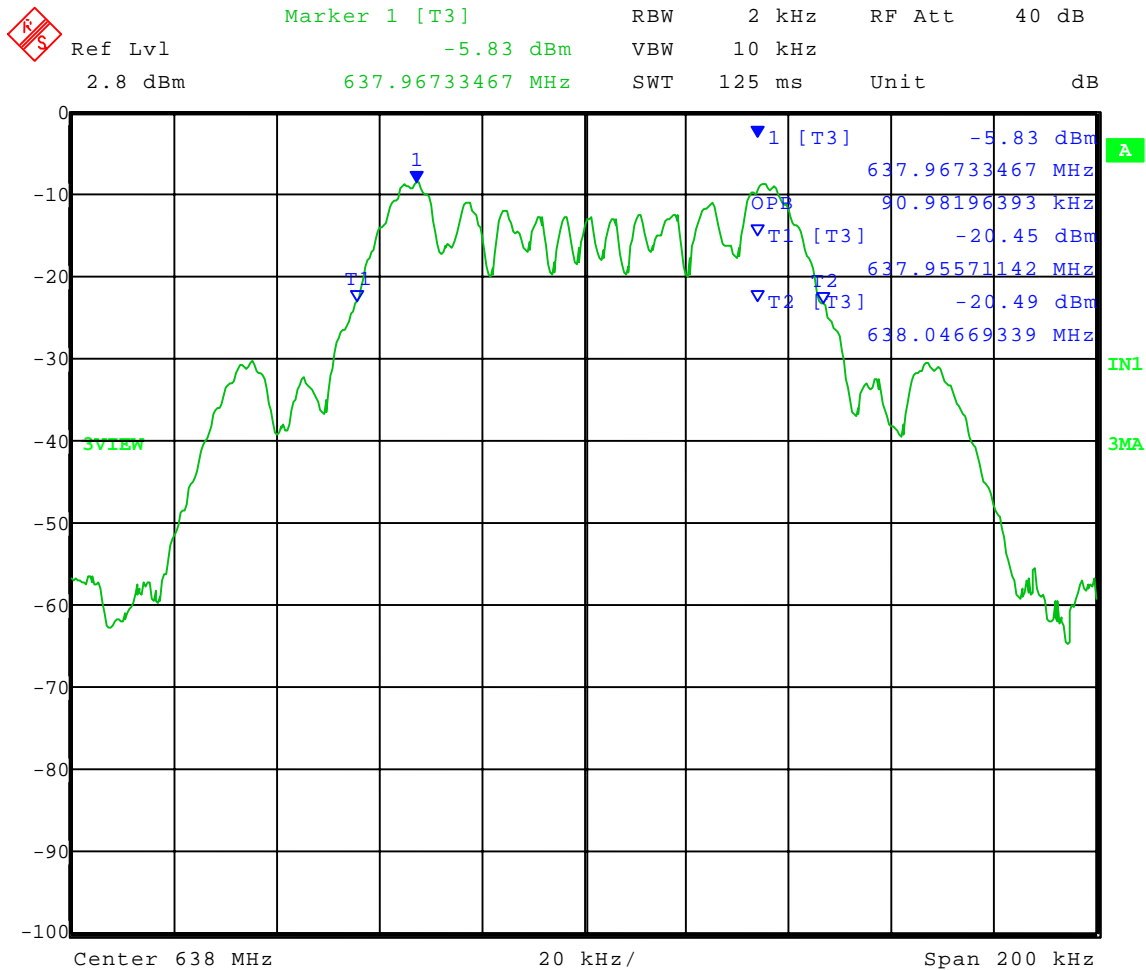

Date: 24.OCT.2007 18:00:35



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

DATA AND GRAPH(S) TAKEN OF THE EMISSION MASK

Part 74.861(d)(3) (e)(6) & PART 2.1049




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: 578 MHz
Reference: Unmodulated

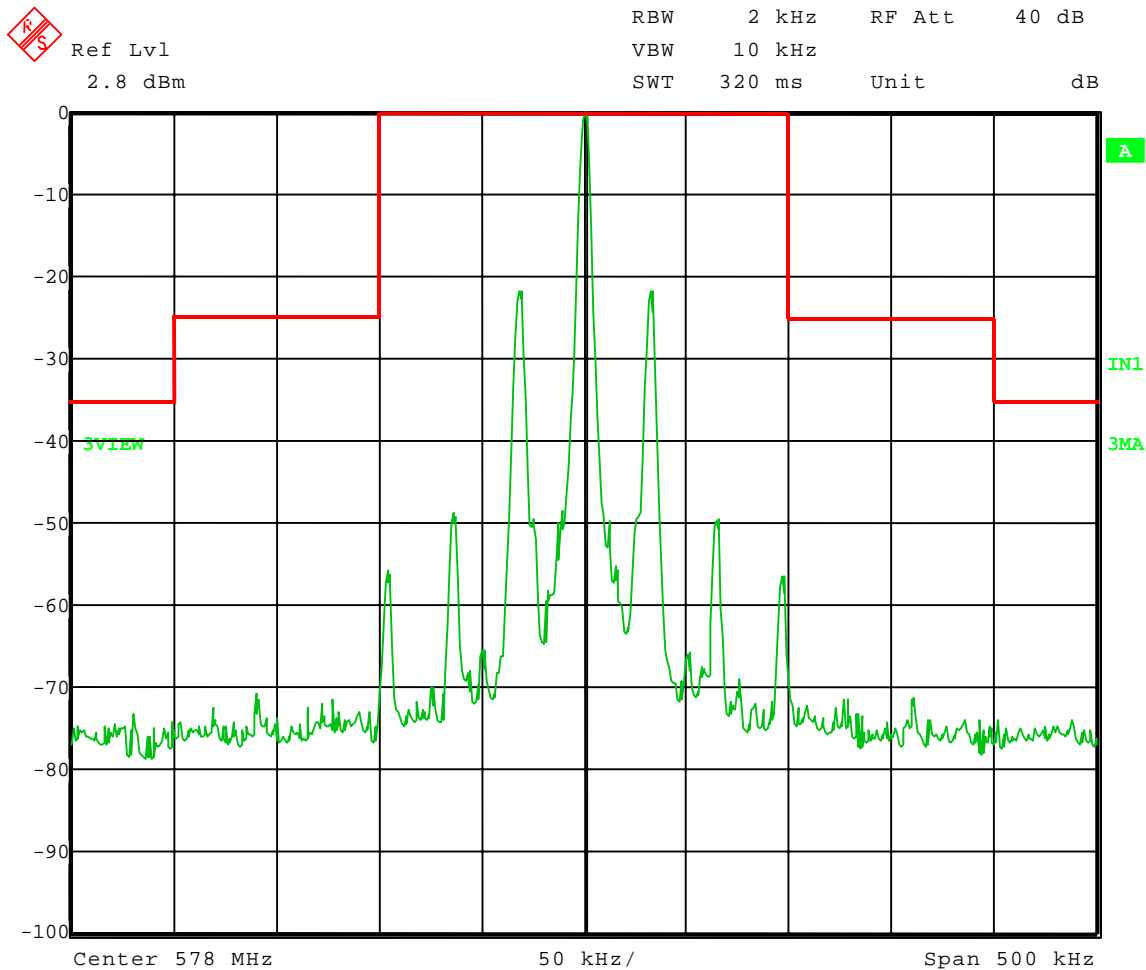

Date: 24.OCT.2007 17:57:12




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: 578 MHz
2500 Hz 16 dB > 50% modulated

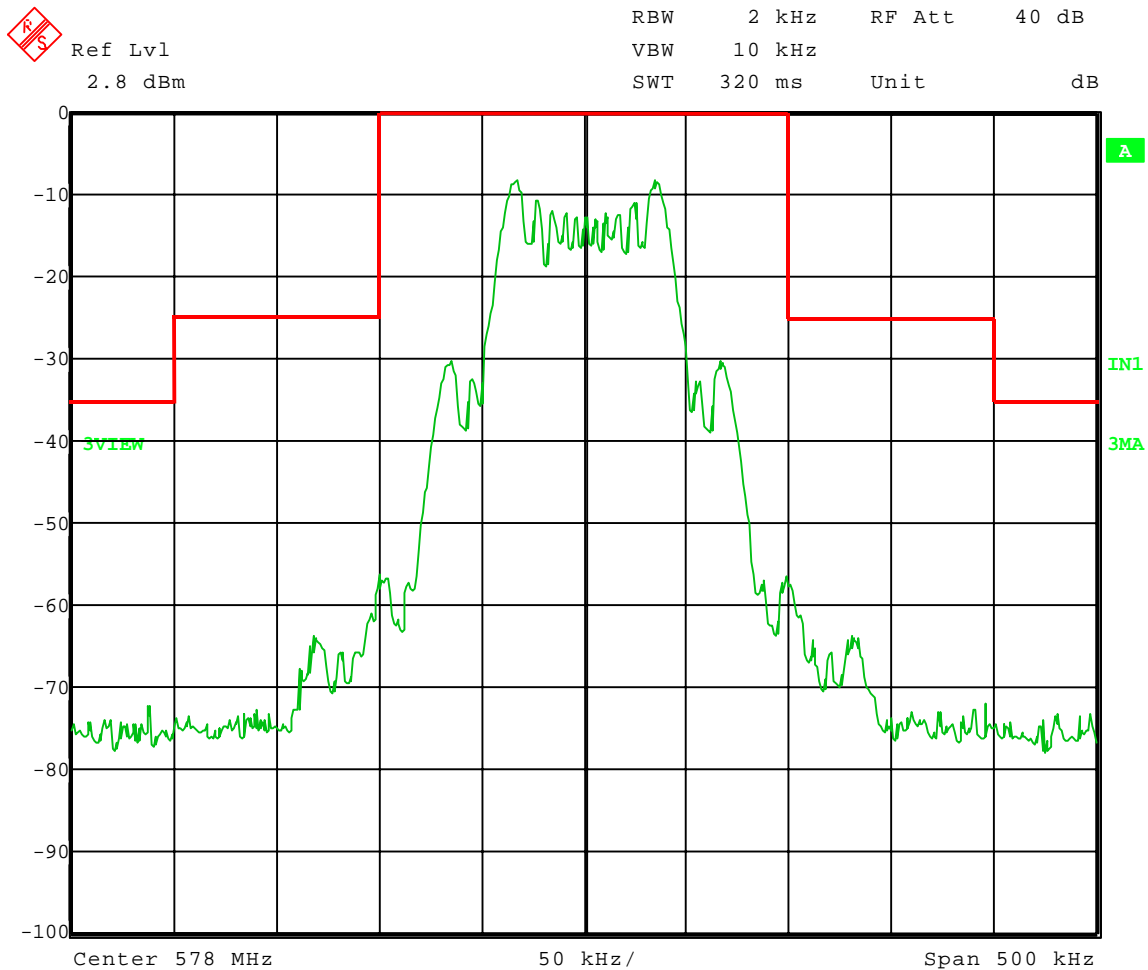

Date: 24.OCT.2007 17:57:46




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: 607 MHz
Reference: Unmodulated

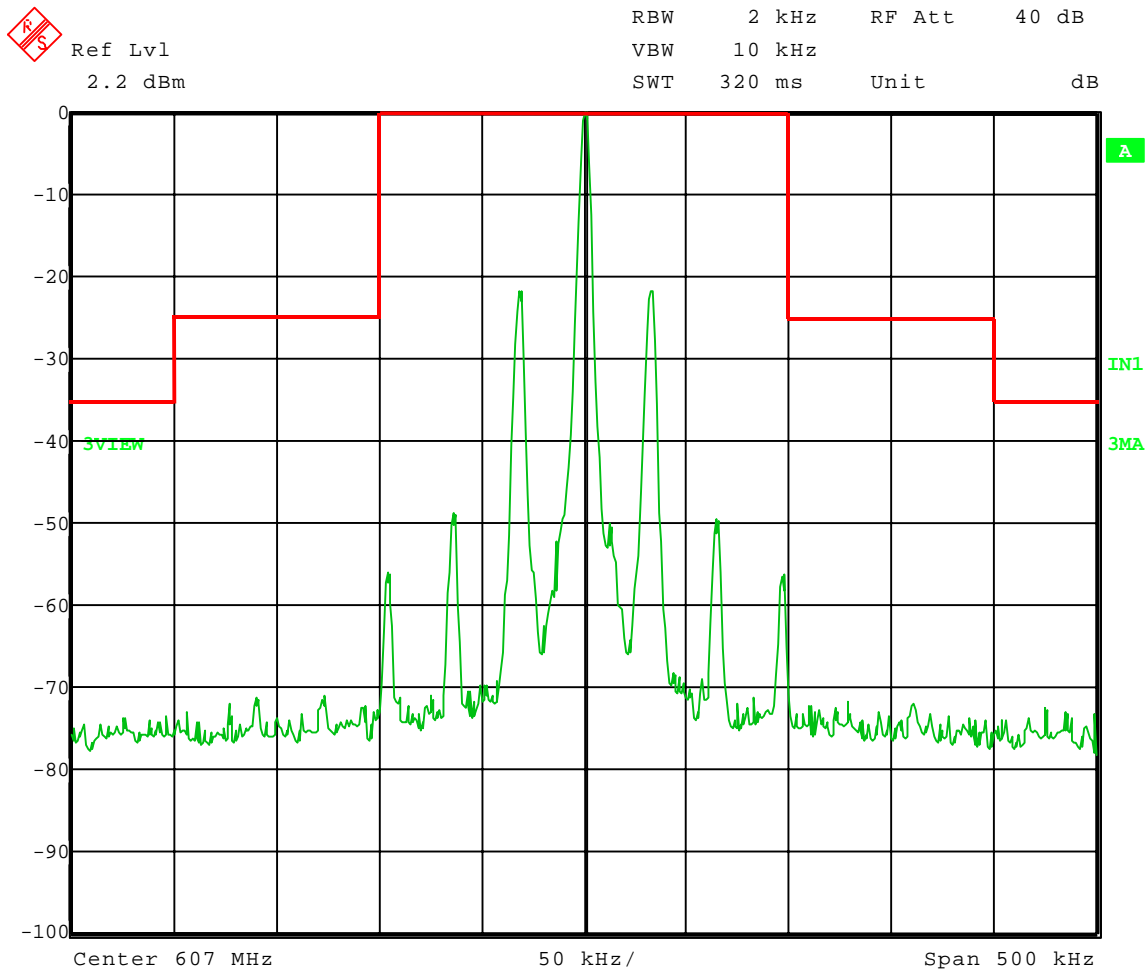

Date: 24.OCT.2007 17:55:29




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: 607 MHz
2500 Hz 16 dB > 50% modulated

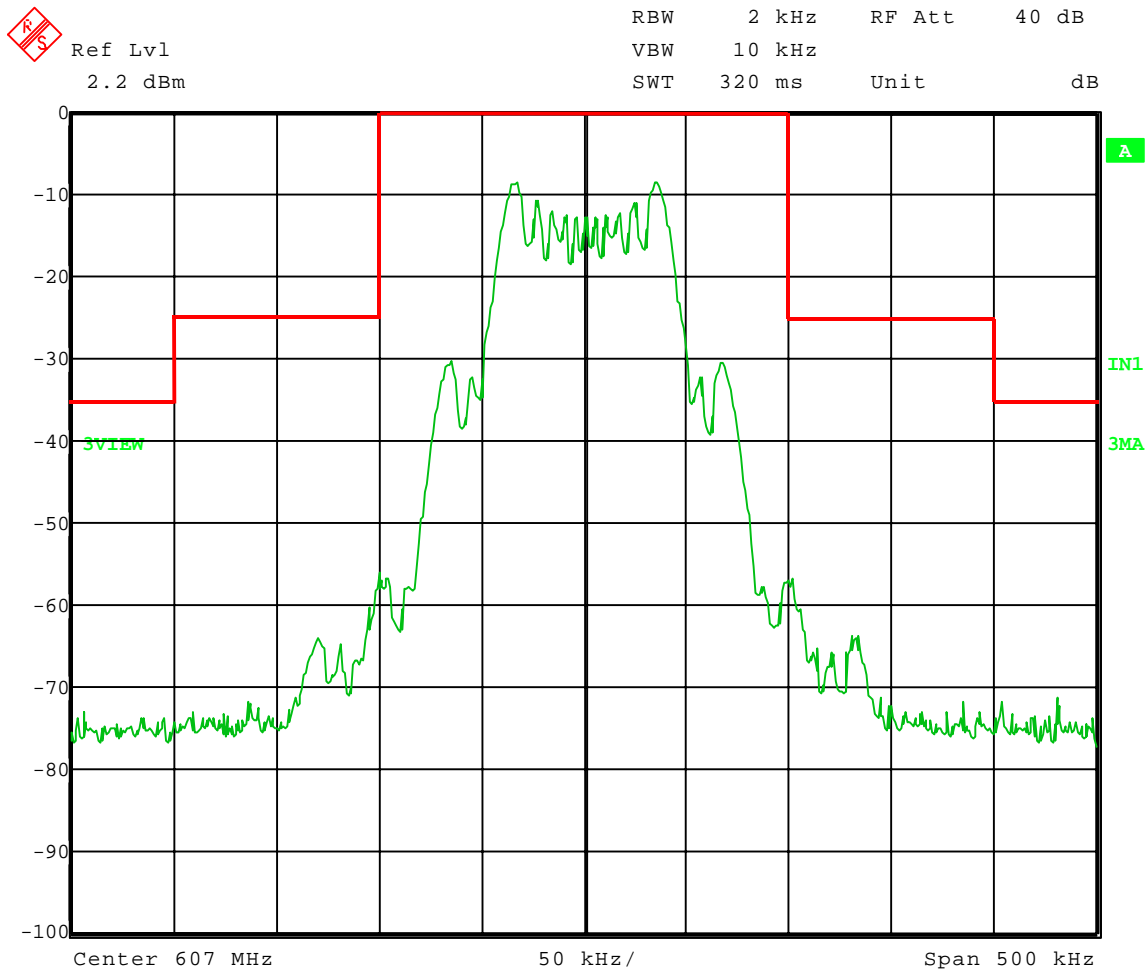

Date: 24.OCT.2007 17:56:06




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: 638 MHz
Reference: Unmodulated

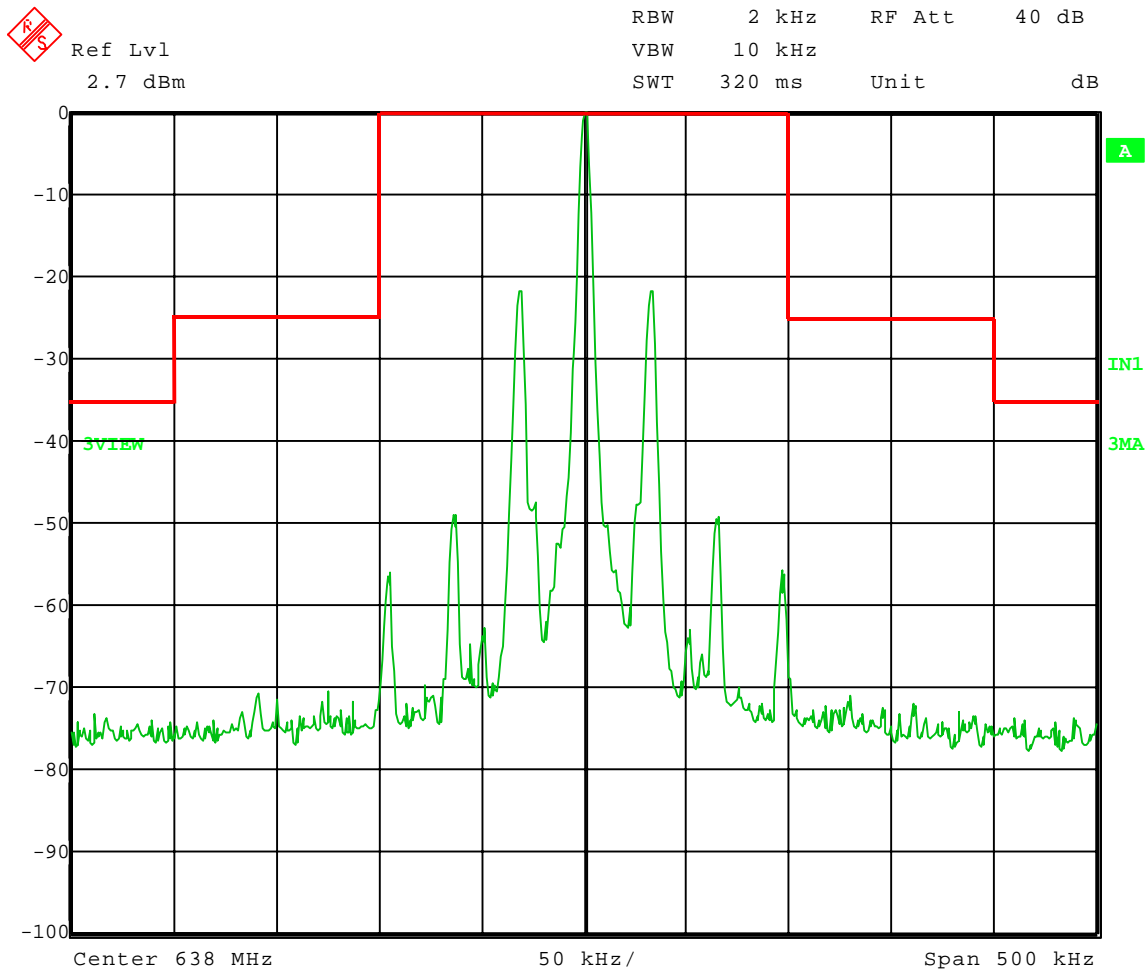

Date: 24.OCT.2007 17:50:05




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: **638 MHz**
2500 Hz 16 dB > 50% modulated

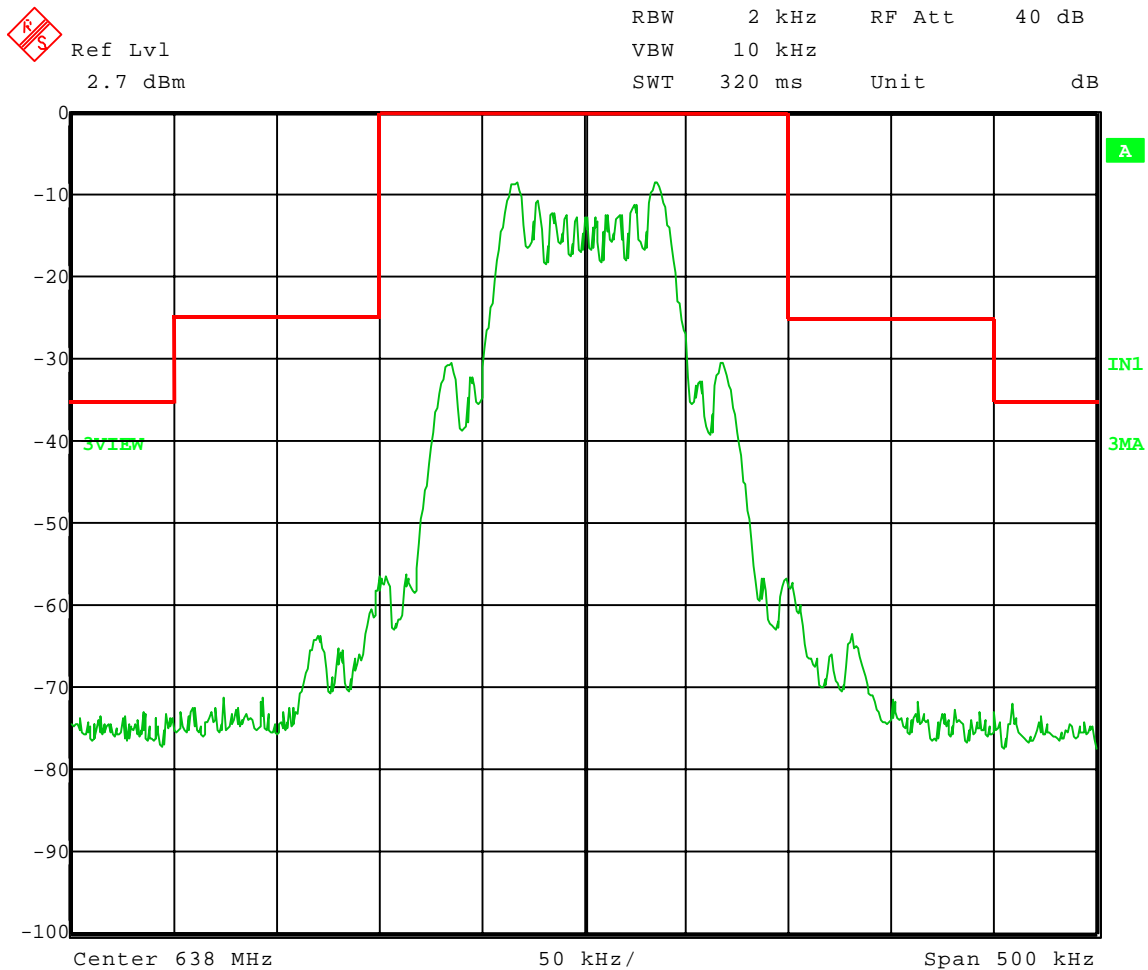


Date: 24.OCT.2007 17:54:10



APPENDIX A

7.0 SPURIOUS EMISSIONS AT ANTENNA TERMINALS – PART 2.1051 and EIA /TIA-603-C:2004, SECTION 2.2.13

Spurious conducted emissions were measured at the antenna terminals using an artificial load. Plots were made showing the amplitude of each harmonic emission with the equipment operated as specified in 2.989. Measurements were made up to the 10th harmonic of the fundamental. The following setup was used showing placement of the attenuators:

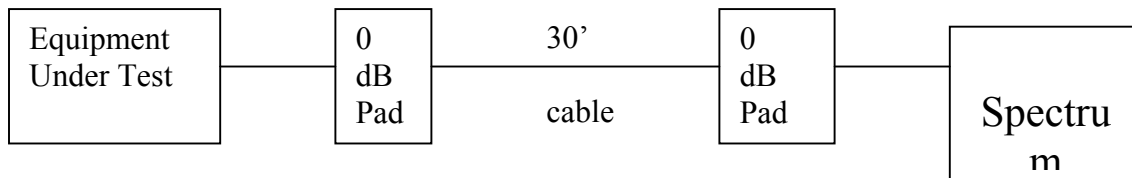

The allowed emissions for transmitters operating in the 578 MHz - 638 MHz bands for UR1H Bodypack Transmitter equipment are found under Part 74, Section 74.861, Paragraph e-6 for Low Power Auxiliary Stations. This paragraph states the mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (2) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (3) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43+10\text{Log}10$ (mean output power in watts) dB.

NOTE:

The EUT uses a Semi Rigid Whip Antenna. See the following pages for the data and graphs of the actual measurements made:



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

CONDUCTED EMISSION DATA & CHARTS
TAKEN FOR
SPURIOUS EMISSION MEASUREMENTS MADE
AT THE ANTENNA TERMINALS
EIA /TIA-603-C:2004, SECTION 2.2.13
PART 2.1051




Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 10-24-2007
 Company: Shure, Inc.
 EUT: UR1H-J5
 Test: Spurious Emissions - Conducted
 Rule part: FCC Part 74; FCC Part 2.1051
 Operator: Craig B
 Comment: Channel: 638 MHz
 Frequency Range: 30 to 1000 MHz
 Limit = -13 dBm

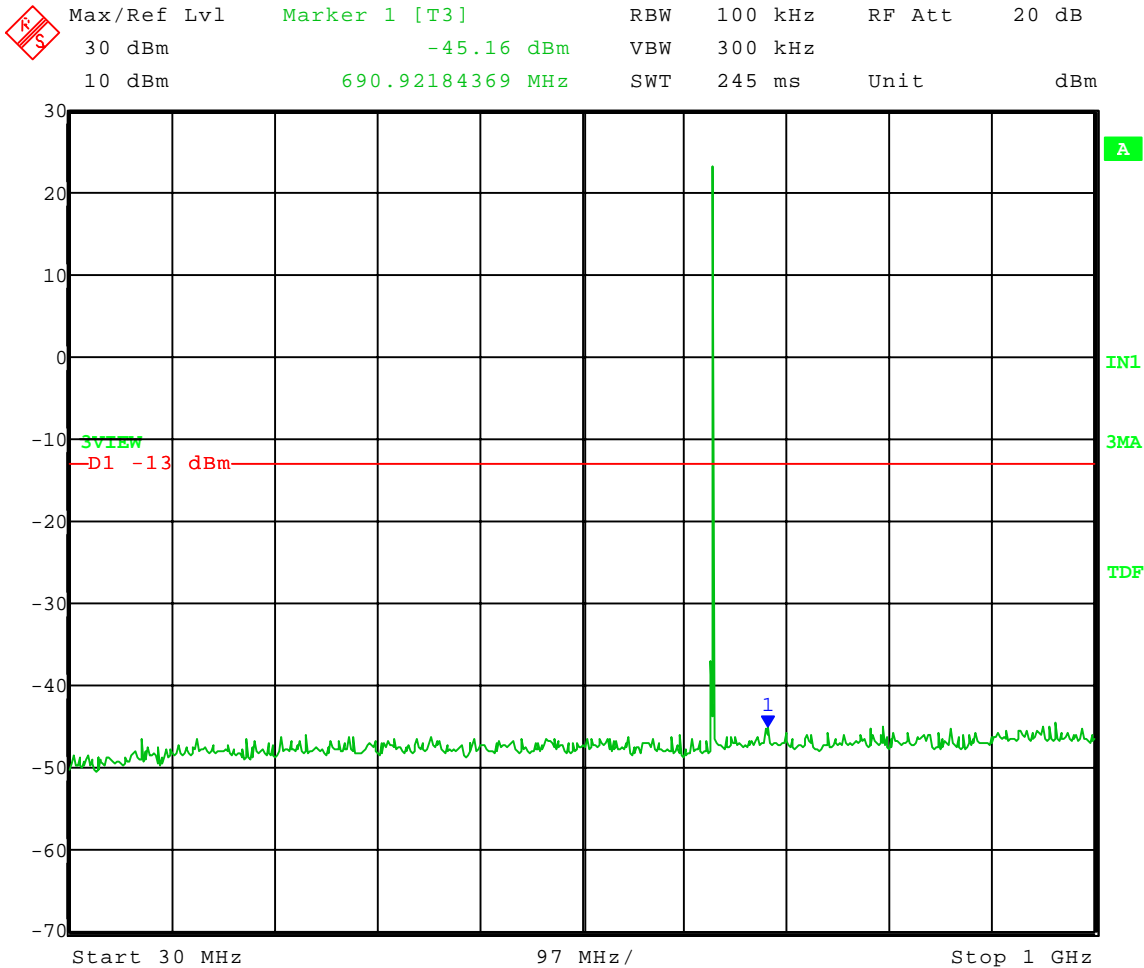

Date: 24.OCT.2007 16:06:37



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

8.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS – PART 2.1053 and EIA /TIA-603-C:2004, SECTION 2.2.12

Radiated measurements were performed scanning the frequency range from 200 MHz to at least the 10th harmonic of the fundamental frequency.

For the UR1H Bodypack Transmitter, the highest fundamental frequency is 638 MHz so the scans were made up to 6500 MHz, to cover the tenth harmonic.

All signals in the frequency range of 30 MHz to 200 MHz were measured with a Biconical Antenna and from 200 MHz to 1000 MHz a Log Periodic Antenna was used as the pickup devices. From 1000 MHz to 10000 MHz, a Double Ridge Horn Antenna was used. The cables and equipment were placed and moved within the range of positions likely to find their maximum emissions. Tests were made in both the horizontal and vertical planes of polarization.

The allowed emissions for transmitters operating in the 578 MHz - 638 MHz bands for UR1H Bodypack Transmitter are found under Part 74, Section 74.861, Paragraph e-6 for Low Power Auxiliary Stations. This paragraph states that the mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (2) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (3) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log_{10}$ (mean output power in watts) dB.



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

8.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T) – PART 2.1053

As stated in Part 74, Section 74.861 (e-1 ii) the limit is 250 mW in the frequency range 578 MHz - 638 MHz.

To determine the **LIMIT** for Spurious Emissions the following method was used:

Mean output power in watts:

Manufacturer's rated wattage = **250 mW Watt(s)**

Free Space Formula

Convert to 3 meter test distance using the Free Space Formula

$$\frac{\sqrt{49.2 * \text{rated wattage}}}{\text{Distance}} = 1.169045 \text{ volts/meter} = 1169045 \text{ uV/m}$$

$$20 * \text{Log}(1169045) = 121.3566 \text{ dBuV}$$

Therefore, the Fundamental at three meters equals 121.3566 dBuV,

The emissions must be reduced by:

$$43 + 10 * \text{LOG}_{10}(0.25 \text{ watts}) = 36.9794 \text{ dB}$$

Therefore, the **LIMIT** at three/ten meters equals:

121.3566 dBuV extrapolated level for 0.25 watts
-36.9794 dB required reduction below the unmodulated fundamental
84.37723 dBuV maximum spurious emissions allowed



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

RADIATED EMISSION DATA & CHARTS

TAKEN FOR

FUNDAMENTAL EMISSIONS

USING THE SUBSTITUTION METHOD

EIA /TIA-603-C:2004, SECTION 2.2.12



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-23-2007
 Temperature: 73 deg. F
 Humidity: 38% R.H.

Output Power - ERP - Substitution Method

Model: UR1H-J5 with whip antenna						
Channel: 578 MHz						
Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Output of Signal Generator when field strength equals that of EUT (dBm)	Correction factor for cable between Signal Gen. and subst. antenna (dB)	Gain of subst. antenna (dBi)	Strength of emission [ERP] (dBm)	Strength of emission [ERP] (mW)
578.000 vertical	123.23	33.13	8.59	2.15	24.54	284.45

$EIRP = \text{Signal generator output} - \text{cable loss} + \text{antenna gain}$

$ERP_{(ref. to \frac{1}{2}\lambda \text{ dipole})} = \text{Signal generator output} - \text{cable loss} + \text{antenna gain} - 2.15$



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-23-2007
 Temperature: 73 deg. F
 Humidity: 38% R.H.

Output Power - ERP - Substitution Method

Model: UR1H-J5 with whip antenna						
Channel: 607.000 MHz						
Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Output of Signal Generator when field strength equals that of EUT (dBm)	Correction factor for cable between Signal Gen. and subst. antenna (dB)	Gain of subst. antenna (dBi)	Strength of emission [ERP] (dBm)	Strength of emission [ERP] (mW)
607.000 vertical	123.79	34.60	8.81	2.15	25.79	379.31

EIRP = Signal generator output - cable loss + antenna gain

ERP_(ref. to ½λ dipole) = Signal generator output - cable loss + antenna gain - 2.15



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-23-2007
 Temperature: 73 deg. F
 Humidity: 39% R.H.

Output Power - ERP - Substitution Method

Model: UR1H-J5 with whip antenna						
Channel: 638.000 MHz						
Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Output of Signal Generator when field strength equals that of EUT (dBm)	Correction factor for cable between Signal Gen. and subst. antenna (dB)	Gain of subst. antenna (dBi)	Strength of emission [ERP] (dBm)	Strength of emission [ERP] (mW)
638.000 vertical	121.80	32.30	9.05	2.15	23.25	211.35

EIRP = Signal generator output - cable loss + antenna gain

ERP_(ref. to ½λ dipole) = Signal generator output - cable loss + antenna gain - 2.15



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-23-2007
 Temperature: 73 deg. F
 Humidity: 38% R.H.

Output Power - ERP - Substitution Method

Model: UR1H-J5 with dipole antenna						
Channel: 578 MHz						
Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Output of Signal Generator when field strength equals that of EUT (dBm)	Correction factor for cable between Signal Gen. and subst. antenna (dB)	Gain of subst. antenna (dBi)	Strength of emission [ERP] (dBm)	Strength of emission [ERP] (mW)
578.000 vertical	123.95	33.85	8.59	2.15	25.26	335.74

$EIRP = \text{Signal generator output} - \text{cable loss} + \text{antenna gain}$

$ERP_{(ref. to \frac{1}{2}\lambda \text{ dipole})} = \text{Signal generator output} - \text{cable loss} + \text{antenna gain} - 2.15$



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-23-2007
 Temperature: 73 deg. F
 Humidity: 38 % R.H.

Output Power - ERP - Substitution Method

Model: UR1H-J5 with dipole antenna						
Channel: 607.000 MHz						
Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Output of Signal Generator when field strength equals that of EUT (dBm)	Correction factor for cable between Signal Gen. and subst. antenna (dB)	Gain of subst. antenna (dBi)	Strength of emission [ERP] (dBm)	Strength of emission [ERP] (mW)
607.000 vertical	122.59	33.40	8.81	2.15	24.59	287.74

$EIRP = \text{Signal generator output} - \text{cable loss} + \text{antenna gain}$

$ERP_{(ref. to \frac{1}{2}\lambda \text{ dipole})} = \text{Signal generator output} - \text{cable loss} + \text{antenna gain} - 2.15$



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-23-2007
 Temperature: 73 deg. F
 Humidity: 38% R.H.

Output Power - ERP - Substitution Method

Model: UR1H-J5 with dipole antenna						
Channel: 638.000 MHz						
Frequency and Polarization (MHz)	Max. Field Strength of EUT @ 3 meters (dBuV/m)	Output of Signal Generator when field strength equals that of EUT (dBm)	Correction factor for cable between Signal Gen. and subst. antenna (dB)	Gain of subst. antenna (dBi)	Strength of emission [ERP] (dBm)	Strength of emission [ERP] (mW)
638.000 vertical	122.31	32.81	9.05	2.15	23.76	237.68

$EIRP = \text{Signal generator output} - \text{cable loss} + \text{antenna gain}$

$ERP_{(ref. to \frac{1}{2}\lambda \text{ dipole})} = \text{Signal generator output} - \text{cable loss} + \text{antenna gain} - 2.15$



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

RADIATED EMISSION DATA AND GRAPH(S)

TAKEN FOR

SPURIOUS EMISSION MEASUREMENTS

USING THE SUBSTITUTION METHOD

EIA /TIA-603-C:2004, SECTION 2.2.12

PART 2.1053



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-22-2007
 Temperature: 70 deg. F.
 Humidity: 42% R.H.

Radiated Spurious Emissions (e.r.p. substitution method) FCC Part 74; FCC Part 2.1053								
Model: UR1H-J5 Transmit Frequency: 578.000 MHz								
Frequency GHz	Field Strength Level dBuV/m	Factor to Convert to dBm	Power ERP dBm	Limit dBm	Margin dB	Receive Antenna Polarization	EUT Antenna Orientation	Receive Antenna Height (m)
1.156	41.2	100.2	-59.0	-13	46.0	Horizontal	25	1.0
2.890	36.2	101.2	-65.0	-13	52.0	Horizontal	200	1.1
3.468	40.1	100.8	-60.7	-13	47.7	Horizontal	0	1.0
4.046	38.8	101.2	-62.4	-13	49.4	Horizontal	135	1.5
4.624	44.4	100.0	-55.6	-13	42.6	Horizontal	260	1.3
5.202	53.6	99.9	-46.3	-13	33.3	Horizontal	270	1.0
1.156	39.8	99.8	-60.0	-13	47.0	Vertical	180	1.0
2.890	38.0	100.7	-62.7	-13	49.7	Vertical	10	1.0
3.468	39.9	100.4	-60.5	-13	47.5	Vertical	30	1.2
4.046	39.4	101.3	-61.9	-13	48.9	Vertical	90	1.1
4.624	42.4	101.0	-58.6	-13	45.6	Vertical	0	1.0
5.202	52.4	100.3	-47.9	-13	34.9	Vertical	0	1.0



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-22-2007
 Temperature: 70 deg. F.
 Humidity: 42% R.H.

Radiated Spurious Emissions (e.r.p. substitution method) FCC Part 74; FCC Part 2.1053								
Model: UR1H-J5 Transmit Frequency: 607.000 MHz								
Frequency GHz	Field Strength Level dBuV/m	Factor to Convert to dBm	Power ERP dBm	Limit dBm	Margin dB	Receive Antenna Polarization	EUT Antenna Orientation	Receive Antenna Height (m)
1.214	39.3	100.4	-61.1	-13	48.1	Horizontal	225	1.0
1.821	35.3	99.9	-64.6	-13	51.6	Horizontal	225	1.0
3.035	43.5	101.2	-57.7	-13	44.7	Horizontal	290	1.0
3.642	42.5	101.3	-58.8	-13	45.8	Horizontal	315	1.4
4.249	36.2	100.2	-64.0	-13	51.0	Horizontal	200	1.3
4.856	46.5	100.1	-53.6	-13	40.6	Horizontal	200	1.6
5.463	46.9	100.2	-53.3	-13	40.3	Horizontal	225	1.1
1.214	40.4	100.0	-59.6	-13	46.6	Vertical	40	1.1
1.821	36.9	100.2	-63.3	-13	50.3	Vertical	180	1.5
3.035	42.9	100.2	-57.3	-13	44.3	Vertical	0	1.4
3.642	45.8	100.5	-54.7	-13	41.7	Vertical	0	1.0
4.856	48.6	100.2	-51.6	-13	38.6	Vertical	350	1.3
5.463	44.3	100.7	-56.4	-13	43.4	Vertical	120	1.5



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-22-2007
 Temperature: 70 deg. F.
 Humidity: 42% R.H.

Radiated Spurious Emissions (e.r.p. substitution method) FCC Part 74; FCC Part 2.1053								
Model: UR1H-J5 Transmit Frequency: 638.000 MHz								
Frequency GHz	Field Strength Level dBuV/m	Factor to Convert to dBm	Power ERP dBm	Limit dBm	Margin dB	Receive Antenna Polarization	EUT Antenna Orientation	Receive Antenna Height (m)
1.276	37.5	100.6	-63.1	-13	50.1	Horizontal	190	1.0
1.914	36.8	99.9	-63.1	-13	50.1	Horizontal	170	1.0
2.552	34.1	101.3	-67.2	-13	54.2	Horizontal	45	1.5
3.190	51.8	101.3	-49.5	-13	36.5	Horizontal	0	1.1
3.828	40.4	100.5	-60.1	-13	47.1	Horizontal	35	1.2
4.466	41.7	99.3	-57.6	-13	44.6	Horizontal	270	1.3
5.104	62.6	99.7	-37.1	-13	24.1	Horizontal	270	1.1
5.742	48.3	100.0	-51.7	-13	38.7	Horizontal	0	1.4
6.380	43.8	99.7	-55.9	-13	42.9	Horizontal	20	1.2
1.276	39.0	99.6	-60.6	-13	47.6	Vertical	0	1.0
1.914	40.1	99.7	-59.6	-13	46.6	Vertical	180	1.0
3.190	49.9	99.5	-49.6	-13	36.6	Vertical	0	1.0
3.828	40.4	100.0	-59.6	-13	46.6	Vertical	0	1.0
4.466	41.3	100.1	-58.8	-13	45.8	Vertical	10	1.0
5.104	62.8	100.2	-37.4	-13	24.4	Vertical	180	1.2
5.742	47.7	100.6	-52.9	-13	39.9	Vertical	225	1.2



Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

9.0 FREQUENCY STABILITY (TEMPERATURE)– PART 2.1055(a1)

The frequency stability was measured from -30° to $+50^{\circ}$ centigrade at intervals of 10° centigrade throughout the range. Prior to each frequency measurement, the equipment was left alone for a sufficient period of time (approximately 30 minutes or more) to allow the components of the Wireless Boundary Microphone oscillator circuitry to stabilize.

See the following page for the data taken during testing.

10.0 FREQUENCY STABILITY (VOLTAGE VARIATION)– PART 2.1055(d2)

The frequency stability of Wireless Boundary Microphone was measured by reducing the primary supply voltage to the battery end point specified by the manufacturer.

See the following page for the data taken during testing.



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

DATA TAKEN FOR FREQUENCY

STABILITY WHEN VARYING THE TEMPERATURE

AND

PRIMARY SUPPLY VOLTAGE VARIATION

PART 2.1055a(1) & PART 2.1055d(d2)



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

DLS Electronic Systems, Inc.

Company: Shure, Inc.
 Operator: Craig B
 Date of test: 10-24-2007

Limit = 28.9 kHz (0.005% of 578 MHz)

Frequency Stability FCC Part 74; FCC Part 2.1055

Model	Nominal Frequency (MHz)	Measured Frequency									
		+50 deg. C	Error (kHz)	+40 deg. C	Error (kHz)	+30 deg. C	Error (kHz)	+20 deg. C	Error (kHz)	+10 deg. C	Error (kHz)
UR1H-J5	578.000	578.005070	5.070	577.998737	-1.263	577.999940	-0.060	578.000381	0.381	578.000822	0.822
UR1H-J5	607.000	607.005311	5.311	606.998737	-1.263	606.999860	-0.140	607.000381	0.381	607.000902	0.902
UR1H-J5	638.000	638.005551	5.551	637.998778	-1.222	637.999860	-0.140	638.000461	0.461	638.000942	0.942

Frequency Stability FCC Part 74; FCC Part 2.1055

Model	Nominal Frequency (MHz)	Measured Frequency									
		0 deg. C	Error (kHz)	-10 deg. C	Error (kHz)	-20 deg. C	Error (kHz)	-30 deg. C	Error (kHz)	2.1 Volts	Error (kHz)
UR1H-J5	578.000	578.000421	0.421	577.999699	-0.301	577.999178	-0.822	577.996814	-3.186	578.000461	0.461
UR1H-J5	607.000	607.000541	0.541	606.999499	-0.501	606.999299	-0.701	606.996093	-3.907	607.000461	0.461
UR1H-J5	638.000	638.000621	0.621	637.999299	-0.701	637.999178	-0.822	637.997014	-2.986	638.000461	0.461




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

11.0 FREQUENCY STABILITY PHOTOS TAKEN DURING TESTING

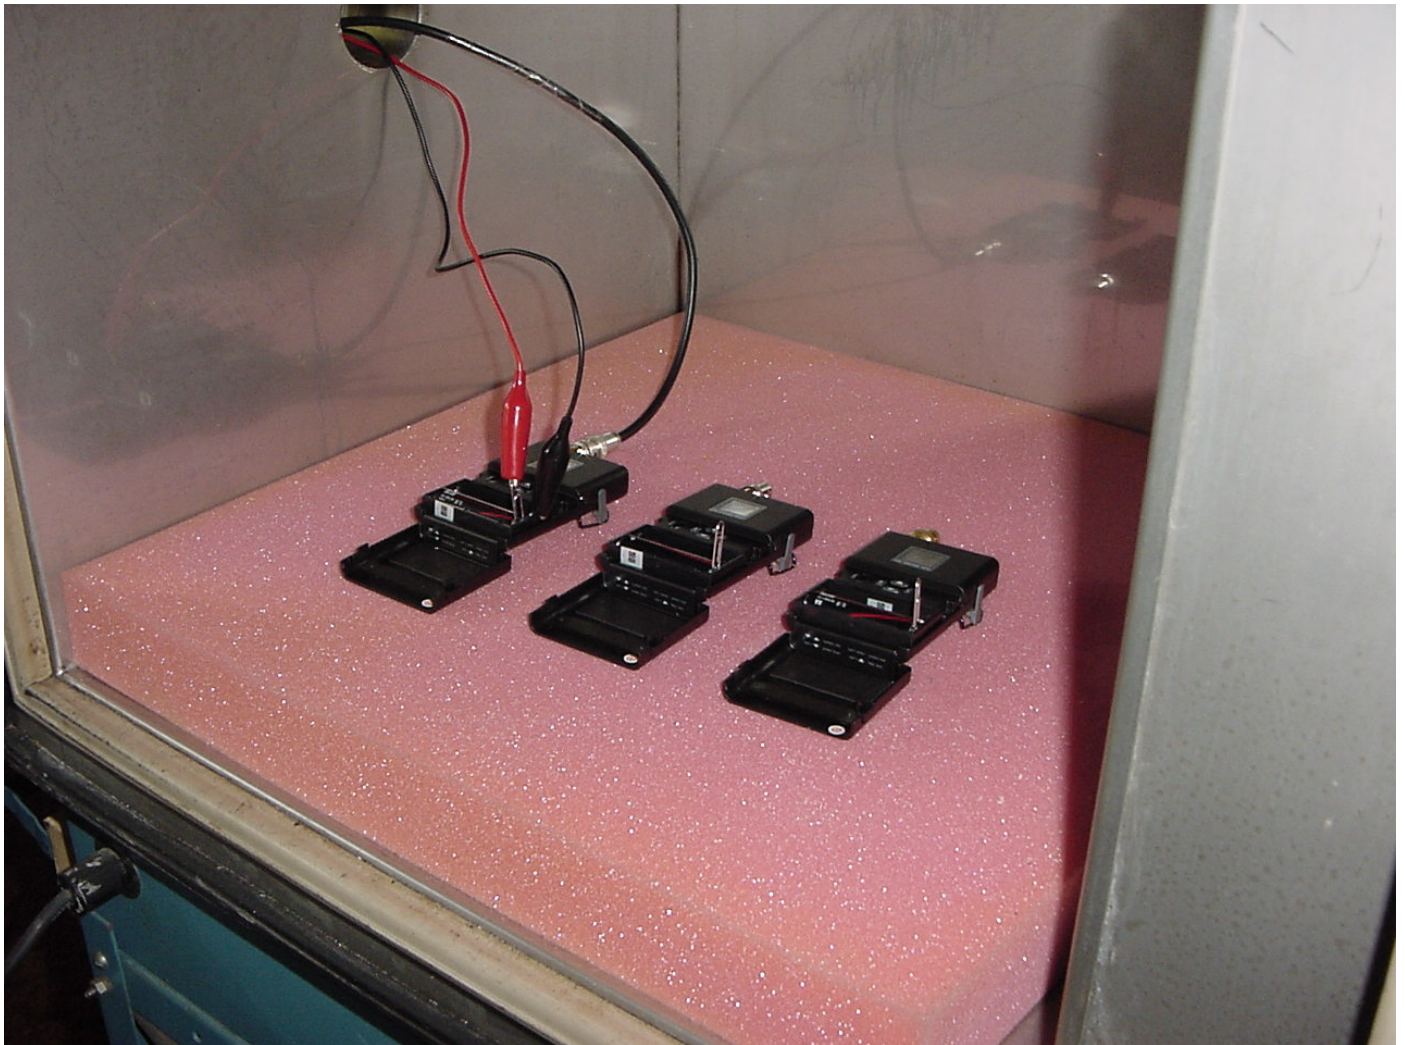



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

EMISSION MASK GRAPH(S) TAKEN DURING TESTING




Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 02-22-2008
 Company: Shure, Inc.
 EUT: UR1H-J5
 Test: Emission Mask
 Rule part: FCC Part 74.861(e)
 Operator: Craig B

Nominal Frequency: 578 MHz
 Reference: Unmodulated

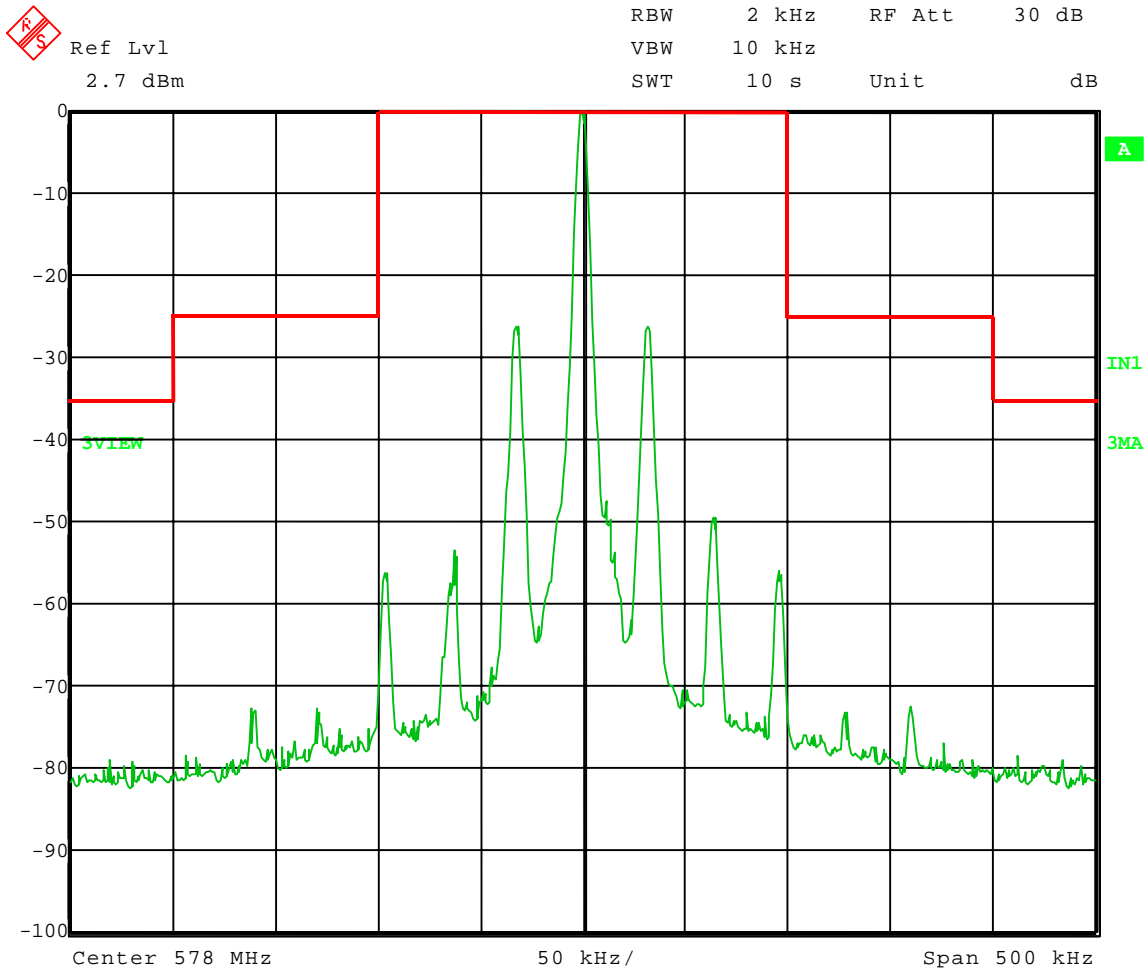

Date: 22.SEP.2008 12:21:43




Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-22-2008
 Company: Shure, Inc.
 EUT: UR1H-J5
 Test: Emission Mask
 Rule part: FCC Part 74.861(e)
 Operator: Craig B

Nominal Frequency: 578 MHz
 15 kHz modulation

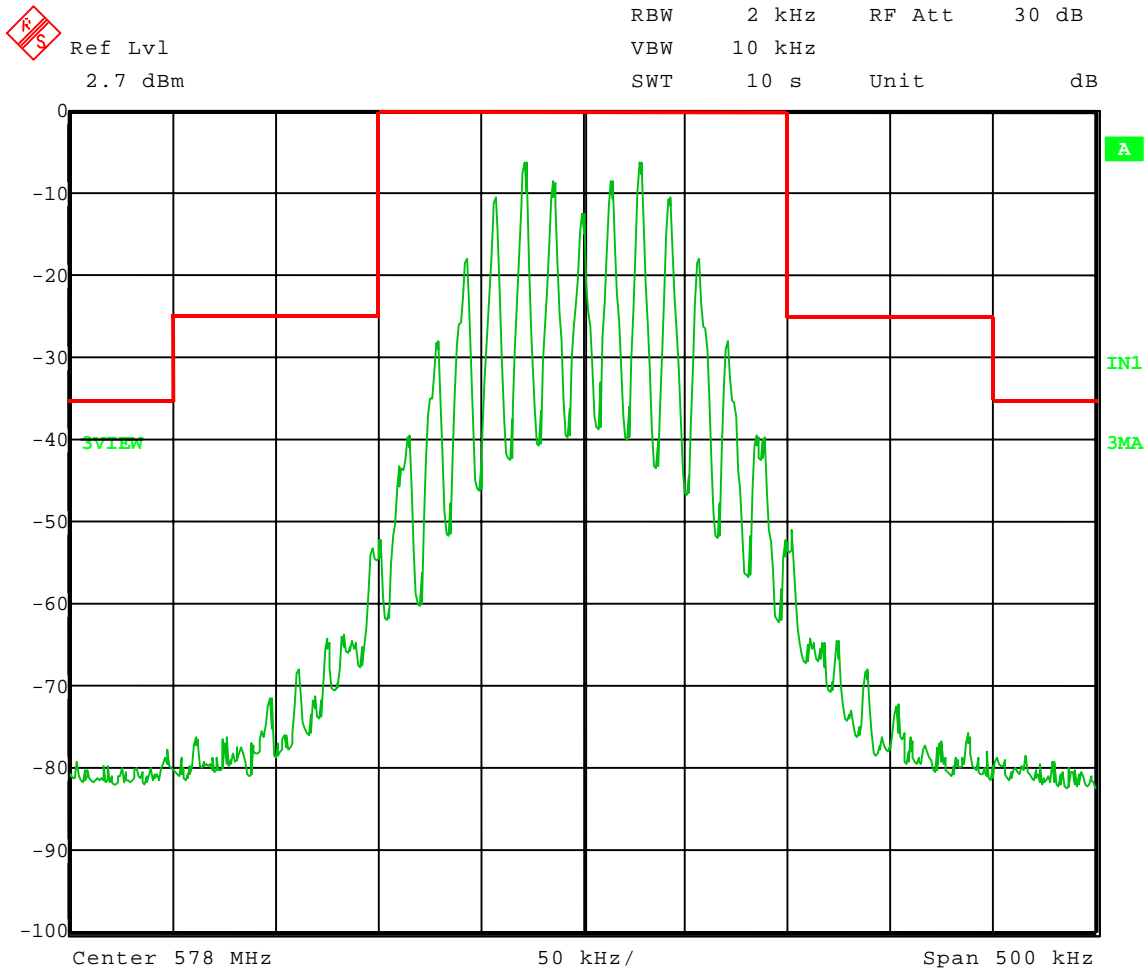

Date: 22.SEP.2008 12:23:17




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-22-2008
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: 607 MHz
Reference: Unmodulated

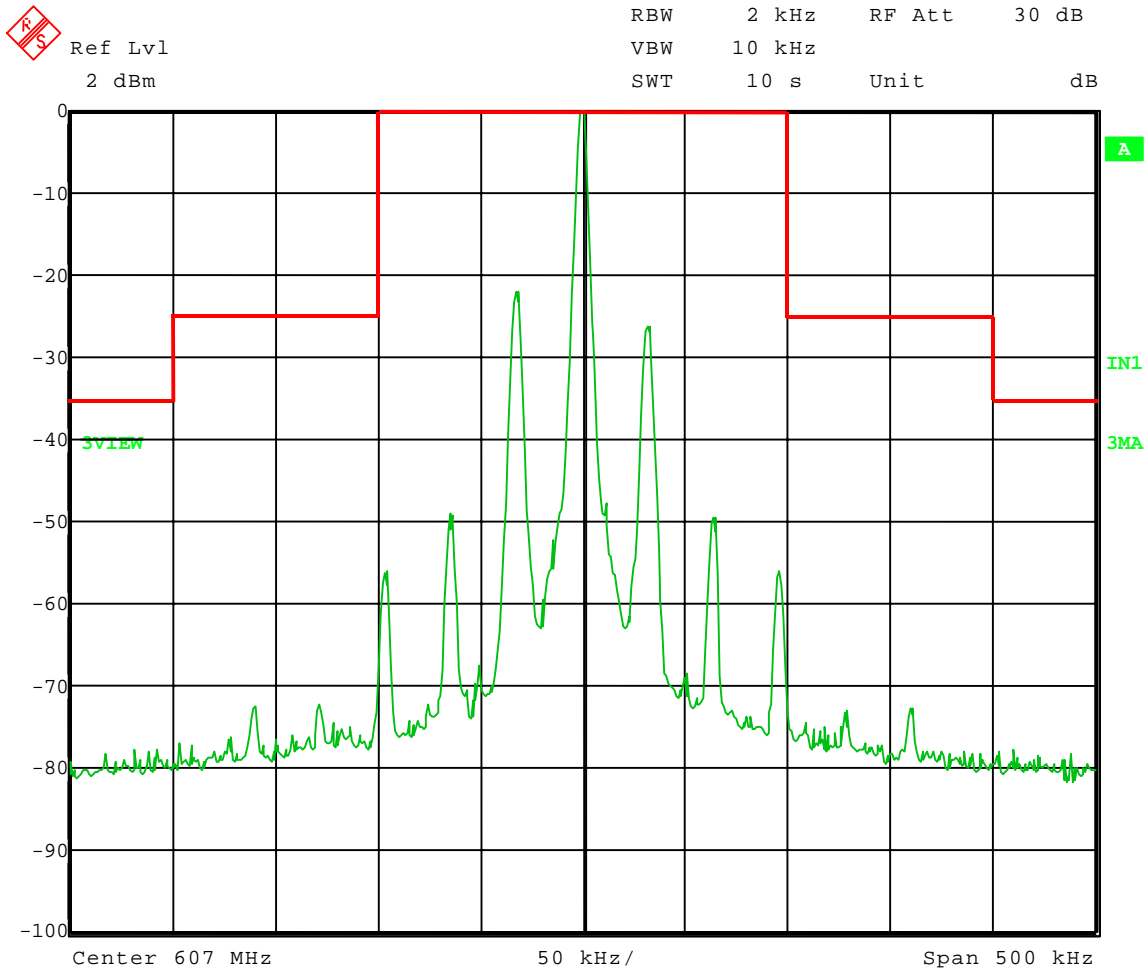

Date: 22.SEP.2008 12:27:40




Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-22-2008
 Company: Shure, Inc.
 EUT: UR1H-J5
 Test: Emission Mask
 Rule part: FCC Part 74.861(e)
 Operator: Craig B

Nominal Frequency: 607 MHz
 15 kHz modulation

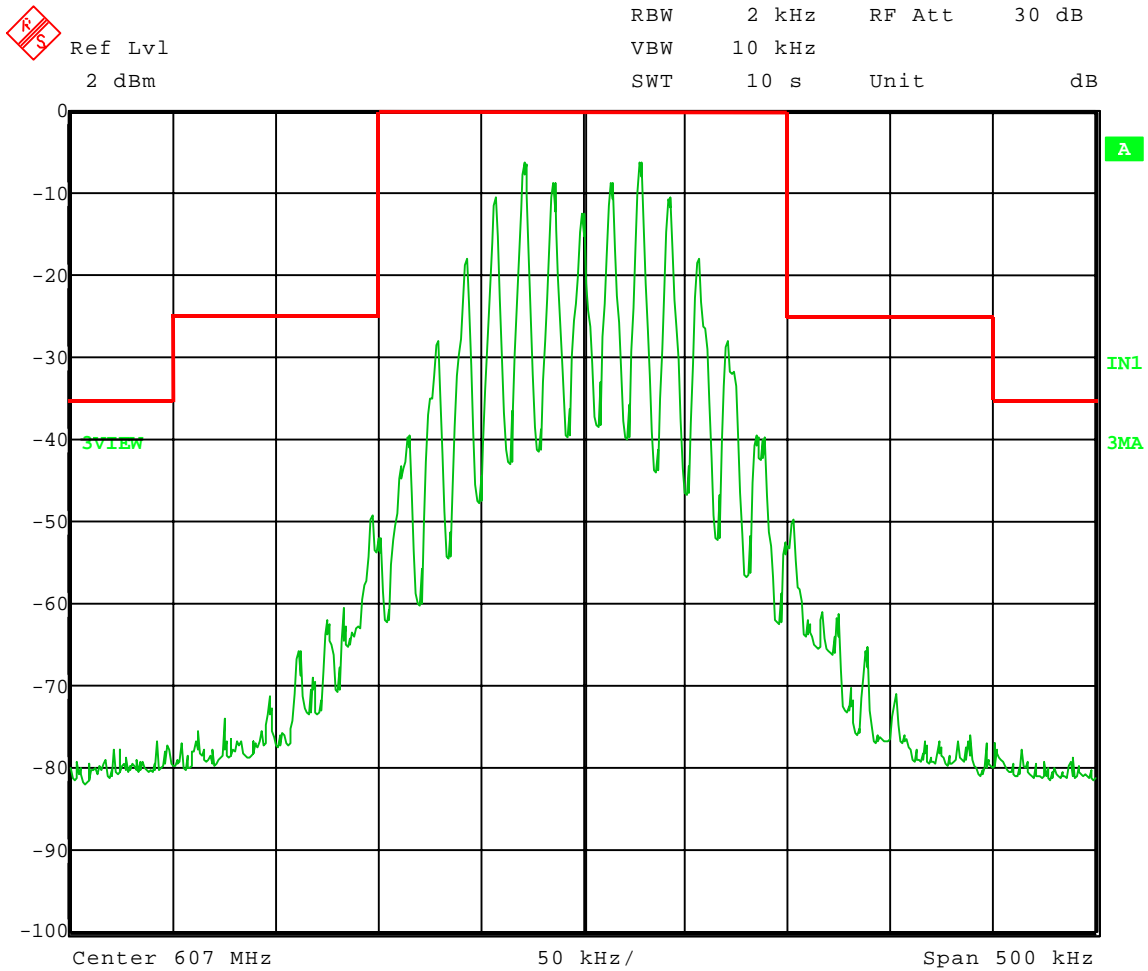

Date: 22.SEP.2008 12:28:44




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-22-2008
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: 638 MHz
Reference: Unmodulated

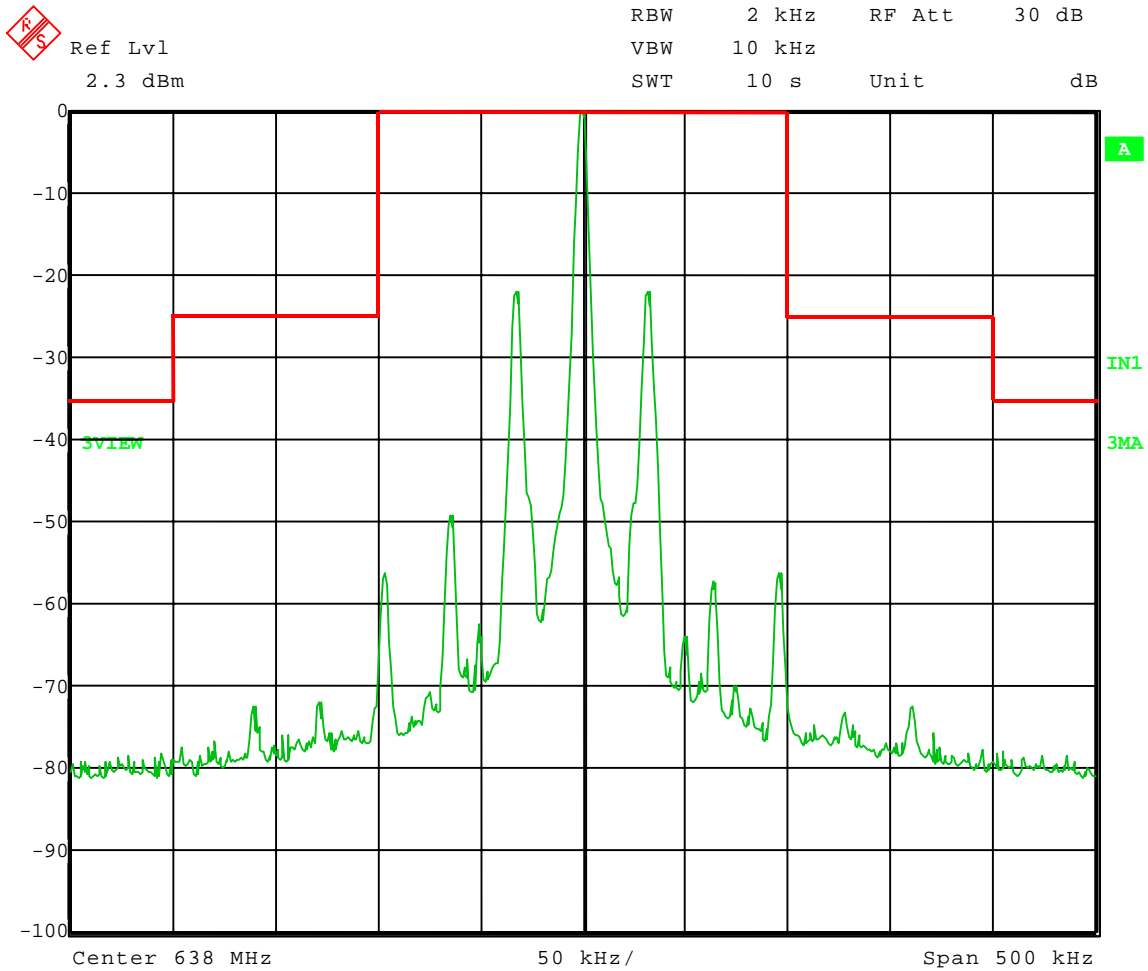

Date: 22.SEP.2008 12:31:56




Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-22-2008
Company: Shure, Inc.
EUT: UR1H-J5
Test: Emission Mask
Rule part: FCC Part 74.861(e)
Operator: Craig B

Nominal Frequency: **638 MHz**
15 kHz modulation

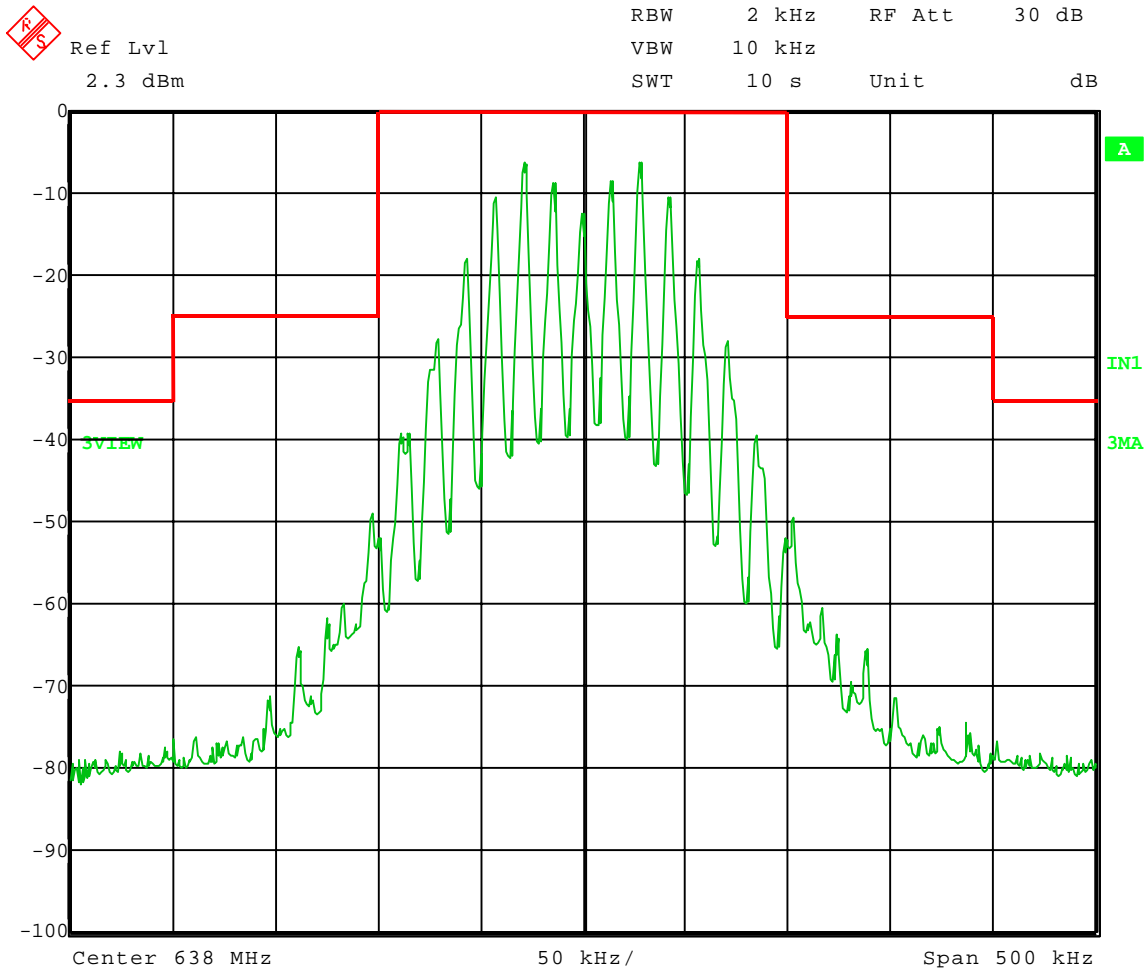

Date: 22.SEP.2008 12:33:36



1250 Peterson Dr., Wheeling, IL 60090

Company: Shure Incorporated
Model Tested: UR1H J5
Report Number: 13599

APPENDIX A

DATA AND GRAPH(S) TAKEN OF THE
AC POWER LINE CONDUCTED EMISSIONS
PART 15.207



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A


FCC Part 15 Class B

Voltage Mains Test

EUT: UR1H
 Manufacturer: Shure, Inc.
 Operating Condition: 72 deg. F, 36% R.H.
 Test Site: DLS O.F. Site 1 (Screenroom)
 Operator: Craig B
 Test Specification: 120 V 60 Hz
 Comment: Line 1
 Date: 10-25-2007

SCAN TABLE: "Line Cond Scrn RmFin"

Short Description:			Line Conducted Emissions			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	2.0 s	9 kHz	LISN DLS#128
			CISPR AV			

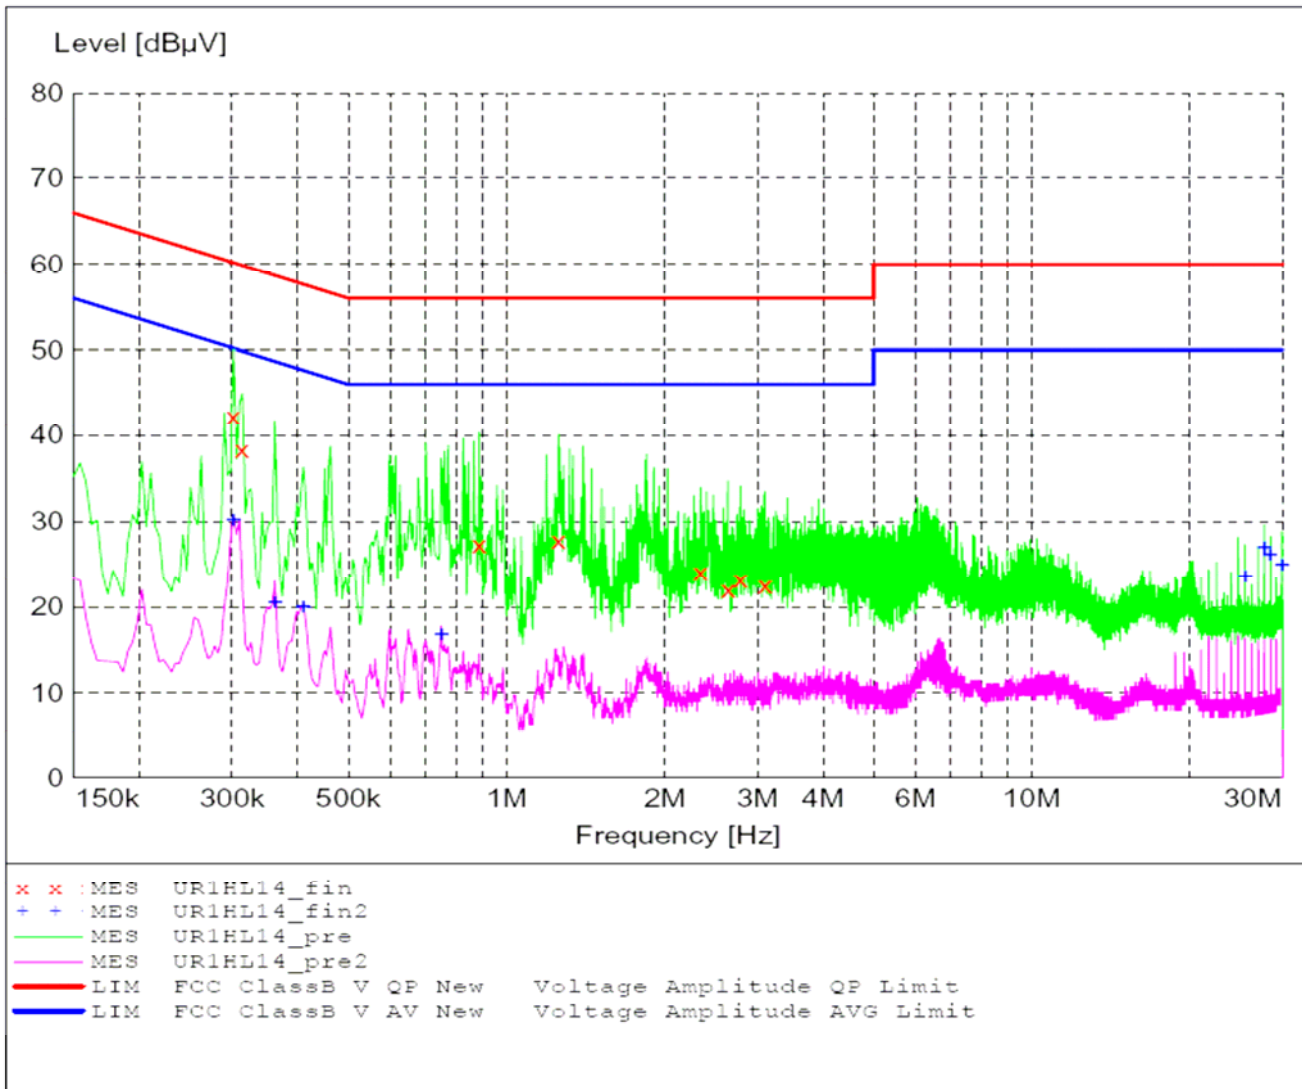



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

MEASUREMENT RESULT: "UR1HL14_fin"

10/25/2007 11:18AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.302000	42.30	10.6	60	17.9	QP	---	---
0.314000	38.30	10.6	60	21.6	QP	---	---
0.886000	27.30	10.3	56	28.7	QP	---	---
1.254000	27.80	10.3	56	28.2	QP	---	---
2.338000	24.10	10.5	56	31.9	QP	---	---
2.634000	22.10	10.6	56	33.9	QP	---	---
2.786000	23.20	10.7	56	32.8	QP	---	---
3.102000	22.50	10.7	56	33.5	QP	---	---

MEASUREMENT RESULT: "UR1HL14_fin2"

10/25/2007 11:18AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.302000	30.20	10.6	50	20.0	CAV	---	---
0.362000	20.50	10.5	49	28.2	CAV	---	---
0.410000	20.10	10.4	48	27.5	CAV	---	---
0.750000	16.80	10.3	46	29.2	CAV	---	---
25.458000	23.60	11.9	50	26.4	CAV	---	---
27.706000	27.00	12.3	50	23.0	CAV	---	---
28.454000	26.20	12.5	50	23.8	CAV	---	---
29.954000	25.00	12.7	50	25.0	CAV	---	---



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A


FCC Part 15 Class B

Voltage Mains Test

EUT: UR1H
 Manufacturer: Shure, Inc.
 Operating Condition: 72 deg. F, 36% R.H.
 Test Site: DLS O.F. Site 1 (Screenroom)
 Operator: Craig B
 Test Specification: 120 V 60 Hz
 Comment: Line 2
 Date: 10-25-2007

SCAN TABLE: "Line Cond Scrn RmFin"

Short Description:			Line Conducted Emissions			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	2.0 s	9 kHz	LISN DLS#128
CISPR AV						

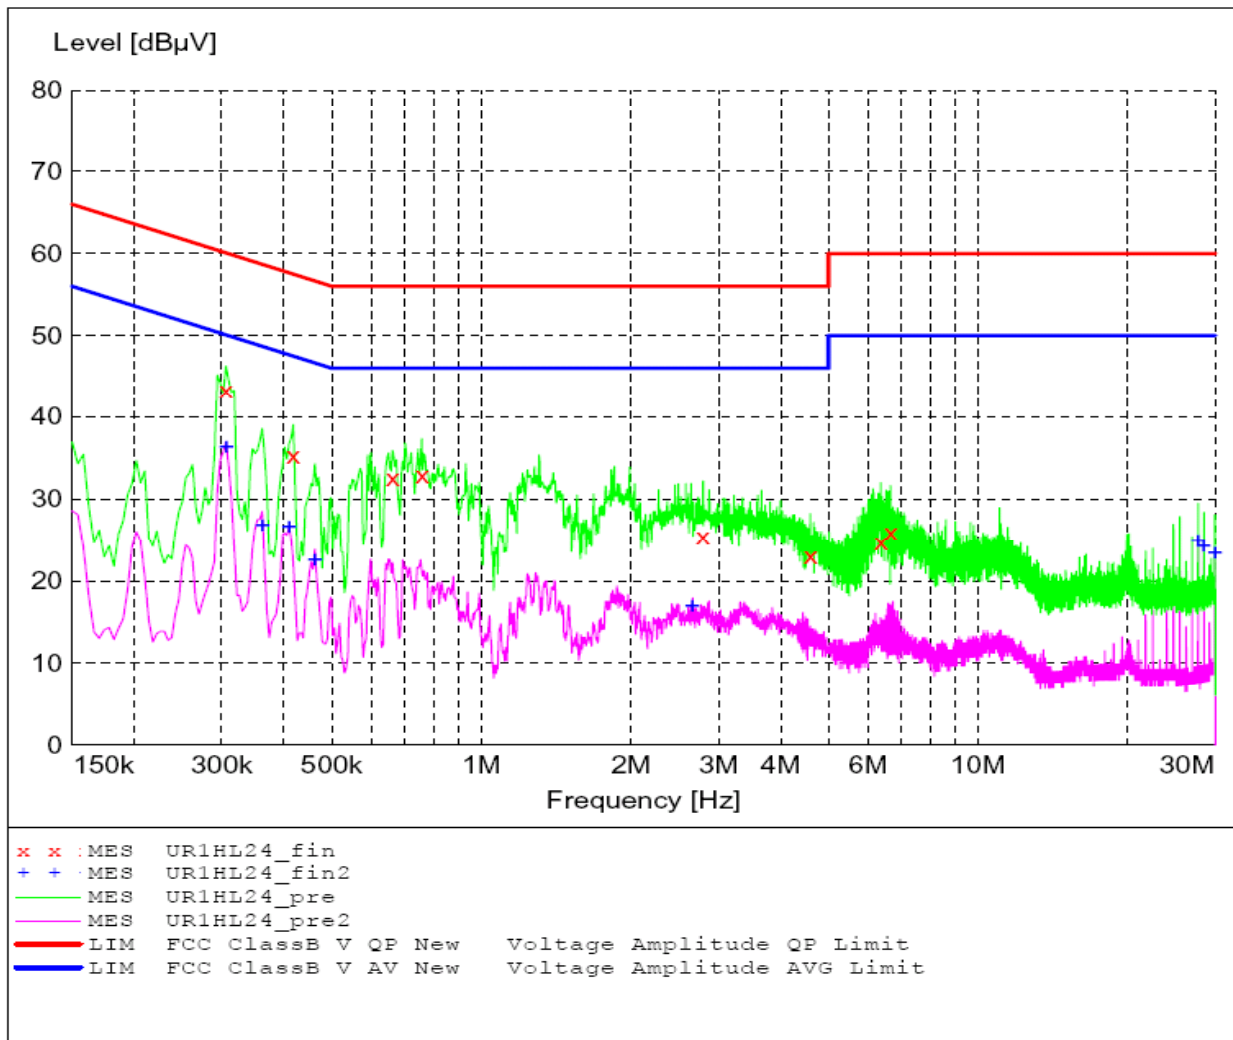



Company: Shure Incorporated
 Model Tested: UR1H J5
 Report Number: 13599

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

MEASUREMENT RESULT: "UR1HL24_fin"

10/25/2007 11:23AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.306000	43.30	10.6	60	16.8	QP	---	---
0.418000	35.30	10.4	58	22.2	QP	---	---
0.662000	32.60	10.3	56	23.4	QP	---	---
0.758000	33.00	10.3	56	23.0	QP	---	---
2.794000	25.50	10.7	56	30.5	QP	---	---
4.590000	23.00	10.8	56	33.0	QP	---	---
6.362000	24.70	11.0	60	35.3	QP	---	---
6.658000	25.90	11.0	60	34.1	QP	---	---

MEASUREMENT RESULT: "UR1HL24_fin2"

10/25/2007 11:23AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.306000	36.30	10.6	50	13.8	CAV	---	---
0.362000	26.80	10.5	49	21.9	CAV	---	---
0.410000	26.70	10.4	48	20.9	CAV	---	---
0.462000	22.60	10.3	47	24.1	CAV	---	---
2.662000	16.90	10.6	46	29.1	CAV	---	---
27.706000	24.90	12.3	50	25.1	CAV	---	---
28.454000	24.20	12.5	50	25.8	CAV	---	---
29.950000	23.40	12.7	50	26.6	CAV	---	---