DESCRIPTION: LABEL, PRINTED

DRWG. NO. 28-8289

SHEET NO. 1 OF 1 SHEETS

| I.C.S. | RECORD OF CHANGES MADE |
|---|---|
| A | RELEASE FOR REVIEW<br>RJB 1/19/2006 |
| B | REVISED FCC AND IC ID NUMBERS TO ADD PCB GROUP LETTER AT END. ADDED LABEL STYLE TO TABLE.<br>RJB 9/11/2007 |
| 00 | ECO 100664.<br>PRODUCTION RELEASE.<br>R BRAINARD 9/14/2007 |
| 01 | ECO 100833.<br>REVISED TEXT ON LABELS PER AGENCY REQUEST. TEXT WAS 3 LINES.<br>RJB |
| 02 | ECO 101023.<br>28A248289 FREQ RANGE WAS 799-806 IN TABLE.<br>RJB 12/13/2007 |

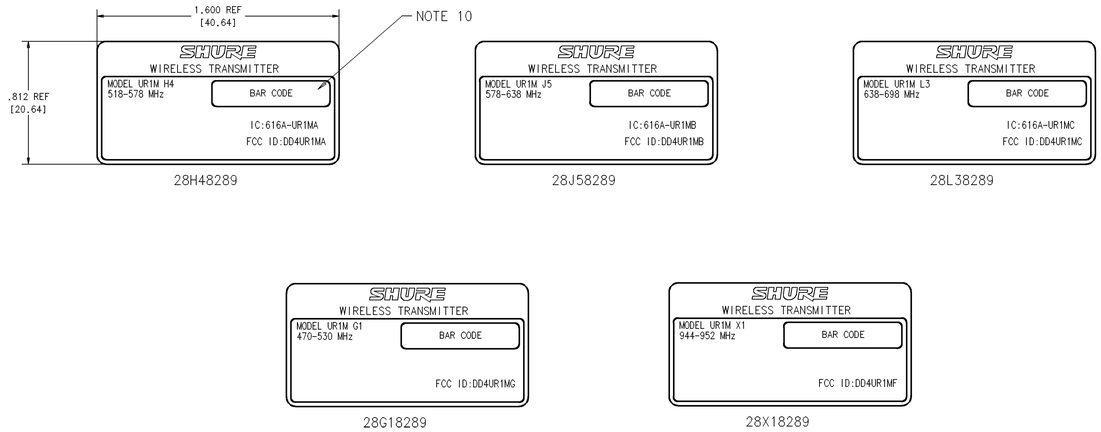


| PART NO | STYLE | FREQ CODE | FREQ RANGE | IC # | FCC ID |
|---|---|---|---|---|---|
| 28H48289 | STYLE-D11A | H4 | 518-578 | 616A-UR1MA | DD4UR1MA |
| 28J58289 | STYLE-D11A | J5 | 578-638 | 616A-UR1MB | DD4UR1MB |
| 28L38289 | STYLE-D11A | L3 | 638-698 | 616A-UR1MC | DD4UR1MC |
| 28G18289 | STYLE-D11A | G1 | 470-530 | | DD4UR1MG |
| 28X18289 | STYLE-D11A | X1 | 944-952 | | DD4UR1MF |

NOTES:
1. MATERIAL: 28A8291 PRECUT LABEL STOCK AND 17A665 TAPE BLACK.
2. ALL TEXT MUST BE BLACK ON SILVER BACKGROUND.
   FORMAT FOR LABEL IS PER STYLE NUMBER IN TABLE.
3. WEEE SYMBOL MUST BE .197[5.00] MINIMUM.
   90 DEGREE ROTATION OF THE WEEE SYMBOL IS ALLOWED.
4. C-TICK MARK MUST BE MINIMUM .118[3.00] IN HEIGHT,
   C-TICK COMPANY NUMBERS MINIMUM .039[1.00] IN HEIGHT.
5. CE MARK & ALERT SYMBOL MUST BE MINIMUM .197[5.00] IN HEIGHT.
6. JAPAN APPROVAL MARK MUST BE MINIMUM .197[5.00] IN HEIGHT.
7. LABELS MUST BE REELED IN SUCH A WAY THAT WHEN ROLL IS PULLED, TEXT
   SHOULD APPEAR AS SHOWN FOR FURTHER PRINTING.
8. PREPRINTED LABELS MUST BE APPROVED BY SHURE ENGINEERING DEPARTMENT
   PRIOR PRODUCTION.
9. STORAGE TIME LIMIT: 1 YEAR. IF TIME LIMIT EXPIRES AND ADHESION TO
   INTENDED SURFACE IS GOOD, STORAGE LIFE MAY BE EXTENDED.
10. BARCODE FORMAT TO BE DATAMATRIX AND INDICATE MODEL NUMBER AND FREQUENCY GROUP.

ORIG. USED IN UR1M

CONFIDENTIAL
©2007 SHURE INCORPORATED

DRWG. NO. 28-8289

MATERIAL: NOTE1

FINISH: NOTE1

NOTES: - DO NOT SCALE DRAWINGS.
- DIMENSIONS SHOWN APPLY BEFORE PLATING.
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

NOTICE
THIS DRAWING IS THE PROPERTY OF SHURE INCORPORATED AND IS DISCLOSED TO YOU IN STRICT CONFIDENCE AND WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED, COPIED, OR USED EXCEPT FOR THE PURPOSE OF PRODUCING TOOLS OR PRODUCTS EXCLUSIVELY FOR SHURE INCORPORATED. COPIES OF THIS DRAWING ARE TO BE MADE ONLY WHEN NECESSARY FOR THE PURPOSE STATED ABOVE AND ALL COPIES MUST CONTAIN THIS NOTICE. THIS DRAWING AND ALL COPIES MUST BE RETURNED ON REQUEST.

SHURE INCORPORATED
5800 W. TOUHY AVE.
NILES, IL 60714-4608
PH. (847) 600-2000
MICROPHONES AND AUDIO ELECTRONICS

DRAWN RJB 2/11/2007
APPROVED
APPROVED
APPROVED

PROJ. 17549

DESCRIPTION: LABEL, PRINTED

DRWG. NO. 28-11877

SHEET NO. 1 OF 1 SHEETS

| I.C.S. | RECORD OF CHANGES MADE |
|---|---|
| A | RELEASE FOR REVIEW<br>RJB 1/19/2006 |
| B | REVISED FCC AND IC ID NUMBERS TO ADD PCB GROUP LETTER AT END. ADDED LABEL STYLE TO TABLE.<br>RJB 9/11/2007 |
| 00 | ECO 110681.<br>PRODUCTION RELEASE.<br>R BRAINARD 9/14/2007 |
| 01 | ECO 100833.<br>REVISED TEXT ON LABELS PER AGENCY REQUEST. TEXT WAS 3 LINES.<br>RJB |
| 02 | ECO 101023.<br>28A2411877 FREQ RANGE WAS 799-806 IN TABLE.<br>RJB 12/13/2007 |

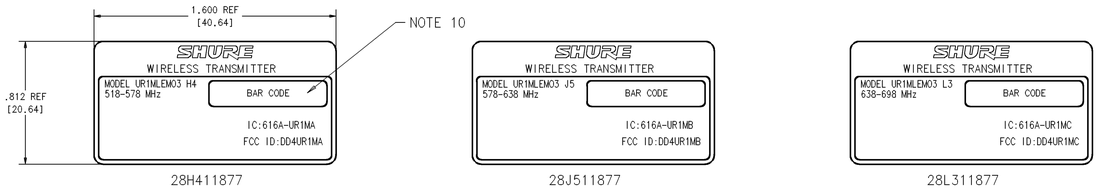


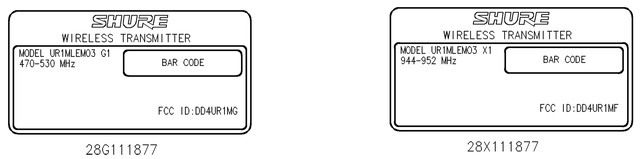


| PART NO | STYLE | FREQ CODE | FREQ RANGE | IC # | FCC ID |
|---|---|---|---|---|---|
| 28H411877 | STYLE-D11AA | H4 | 518-578 | 616A-UR1MA | DD4UR1MA |
| 28J511877 | STYLE-D11AA | J5 | 578-638 | 616A-UR1MB | DD4UR1MB |
| 28L311877 | STYLE-D11AA | L3 | 638-698 | 616A-UR1MC | DD4UR1MC |
| 28G111877 | STYLE-D11AA | G1 | 470-530 | | DD4UR1MG |
| 28X111877 | STYLE-D11AA | X1 | 944-952 | | DD4UR1MF |

NOTES:
1. MATERIAL: 28A8291 PRECUT LABEL STOCK AND 17A665 TAPE BLACK.
2. ALL TEXT MUST BE BLACK ON SILVER BACKGROUND.
   FORMAT FOR LABEL IS PER STYLE NUMBER IN TABLE.
3. WEEE SYMBOL MUST BE .197[5.00] MINIMUM.
   90 DEGREE ROTATION OF THE WEEE SYMBOL IS ALLOWED.
4. C-TICK MARK MUST BE MINIMUM .118[3.00] IN HEIGHT,
   C-TICK COMPANY NUMBERS MINIMUM .039[1.00] IN HEIGHT.
5. CE MARK & ALERT SYMBOL MUST BE MINIMUM .197[5.00] IN HEIGHT.
6. JAPAN APPROVAL MARK MUST BE MINIMUM .197[5.00] IN HEIGHT.
7. LABELS MUST BE REELED IN SUCH A WAY THAT WHEN ROLL IS PULLED, TEXT
   SHOULD APPEAR AS SHOWN FOR FURTHER PRINTING.
8. PREPRINTED LABELS MUST BE APPROVED BY SHURE ENGINEERING DEPARTMENT
   PRIOR PRODUCTION.
9. STORAGE TIME LIMIT: 1 YEAR. IF TIME LIMIT EXPIRES AND ADHESION TO
   INTENDED SURFACE IS GOOD, STORAGE LIFE MAY BE EXTENDED.
10. BARCODE FORMAT TO BE DATAMATRIX AND INDICATE MODEL NUMBER AND FREQUENCY GROUP.

ORIG. USED IN UR1M

CONFIDENTIAL
©2007 SHURE INCORPORATED

DRWG. NO. 28-11877

MATERIAL: NOTE1

FINISH: NOTE1

NOTES: - DO NOT SCALE DRAWINGS.
- DIMENSIONS SHOWN APPLY BEFORE PLATING.
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

NOTICE
THIS DRAWING IS THE PROPERTY OF SHURE INCORPORATED AND IS DISCLOSED TO YOU IN STRICT CONFIDENCE AND WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED, COPIED, OR USED EXCEPT FOR THE PURPOSE OF PRODUCING TOOLS OR PRODUCTS EXCLUSIVELY FOR SHURE INCORPORATED. COPIES OF THIS DRAWING ARE TO BE MADE ONLY WHEN NECESSARY FOR THE PURPOSE STATED ABOVE AND ALL COPIES MUST CONTAIN THIS NOTICE. THIS DRAWING AND ALL COPIES MUST BE RETURNED ON REQUEST.

SHURE INCORPORATED
5800 W. TOUHY AVE.
NILES, IL 60714-4608
PH. (847) 600-2000
MICROPHONES AND AUDIO ELECTRONICS

DRAWN RJB 8/27/2007
APPROVED
APPROVED
APPROVED

PROJ. 17549