



TEST SPECIFICATION:

FCC "Rules and Regulations", Part 74,
Experimental Radio, Auxiliary, Special Broadcast and Other Program
Distribution Services for Operation in the

494 to 608 MHz Band

Subpart H, Low Power Auxiliary Stations
Sections 74.801 to 74.882

THE FOLLOWING **MEETS** THE ABOVE TEST SPECIFICATION

Formal Name: Shure Incorporated UT1D Low Power Transmitter

Kind of Equipment: Low Power Transmitter

Test Configuration: Continuously transmitting (Tested at 9 vdc)

Emission Designator: 120KF3E

Transmitter FCC ID: DD4UT1D

Model Number: UT1D

Serial Number: NA

Dates of Test: June 13, 2001

Test Conducted For: Shure Incorporated
222 Hartrey Avenue
Evanston, Illinois 60025-3696

NOTICE: Please see change information listed inside of this report. This report must not be used by the customer to claim product endorsement by NVLAP or any agency of the United States Government, and it cannot be reproduced (except in full), without the approval of D.L.S. Electronic Systems Inc.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 9096

SIGNATURE PAGE

Report Written By:

Arnold C. Rowe

A handwritten signature in black ink that reads "Arnold C. Rowe".

Test Engineer
EMC-001375-NE

Report Reviewed by:

A handwritten signature in black ink that reads "Jack Prawica".

Jack Prawica
Lab Manager

Report Approved by:

A handwritten signature in black ink that reads "Brian J. Mattson".

Brian J. Mattson
General Manager

Company Official:

Shure Incorporated



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 9096

NVLAP Certificate of Accreditation available upon request.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 9096

NVLAP Scope of Accreditation available upon request.



TABLE OF CONTENTS

i.	Cover Page.....	1
ii.	Signature Page	2
v.	Table of Contents.....	5
1.0	Summary of Test Report.....	6
2.0	Introduction	6
3.0	Object	6
4.0	Test Set-Up	6
5.0	Test Equipment (Bandwidths and Detector Function).....	7
6.0	RF Power Output – Part 2.1046.....	7
6.0	Graphs Taken of the RF Power.....	8
7.0	Modulation Characteristics	10
7.0	Graphs Taken Showing the Frequency Response of the Audio Modulating Circuit	11
8.0	Occupied Bandwidth – Part 2.1049	13
8.0	Graphs taken of the Occupied Bandwidth Part 2.1049.....	14
9.0	Frequency Deviation and Tolerance – Part 74.861	25
10.0	Spurious Conducted Emission Measurements made at Antenna Terminals Part 2.105.....	26
10.0	Spurious Conducted Emission Data taken at the Antenna Terminals Part 2.1051	27
10.0	Spurious Conducted Emission Graphs made at the Antenna Terminals Part 2.1051	28
11.0	Field Strength of Spurious Emission Measurements Part 2.1053.....	29
11.0	Radiated Data Taken for Field Strength Spurious Emission Measurements Part 2.1053.....	31
12.0	Frequency Stability Part 2.1055a (Temperature).....	48
12.0	Graphs taken for Frequency Stability when varying the temperature Part 2.1055a.....	49
13.0	Graphs taken for Frequency Stability when varying the Primary Supply Part 2.1055d	58
14.0	Photo Information and Test Set-Up.....	61
15.0	Radiated Photos taken during Testing	62
16.0	Change Information.....	65
17.0	Results of Tests.....	67
18.0	Conclusion	67
18.0	Table 1 Equipment List.....	68



1.0 SUMMARY OF TEST REPORT

It was found that the Shure Incorporated UT1D Low Power Transmitter S/N NA NA meets the radio interference emission requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Sections 74.801 to 74.882 for Low Power Auxiliary Stations operating in the 560 to 599 MHz Frequency Band.

This report contains the following number of pages.

Text, Data Summary & Charts: 68 pages

2.0 INTRODUCTION

On June 13, 2001, a series of radio frequency interference measurements were performed on Low Power Transmitter, S/N NA. The tests were performed according to the procedures of FCC as stated in Part 2 Subpart J, Equipment Authorization Procedures of the Code of Federal Regulations 47, by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency emission requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Sections 74.801 to 74.882 for Low Power Auxiliary Stations operating in the 560 to 599 MHz Frequency Band.

4.0 TEST SET-UP

All radiated emission tests were performed at D.L.S. Electronic Systems, Inc. The radiated tests were made with the test item placed on a wooden turntable located in the Test Room with the receive antenna placed one meter from the device under test.



5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All data was automatically plotted using peak detector function. This information was then used to determine the frequencies of maximum emissions. Manual measurements were performed on these frequencies using a peak detector function of the Analyzer with the bandwidths specified by the FCC. From 200 MHz to 1000 MHz a bandwidth of 100 kHz was used (except for Occupied Bandwidth), and above 1000 MHz, wide enough bandwidths were used, depending upon the test being made, to ensure proper measurement of the narrowband signal. A list of the equipment used can be found in Table 1. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

6.0 RF POWER OUTPUT - PART 2.1046

As stated in PART 74.861 (e-1), the output power should not exceed 250 milliwatts (24 dBm). The Shure Incorporated UT1D Low Power Transmitter was tuned according to the tune-up procedures specified in Part 2.1033 (c-9), and adjusted for its maximum output power.

For this test a conducted measurement was made with the antenna removed and the output of the device connected via a BNC connector to the test equipment.

Actual Measurements made:

11.2 dBm measured output of the transmitter

LIMIT:

Manufacturer's rated output power (50 ohm system) = 11 ± 3 dBm

NOTE:

See the following pages for the graphs of the actual measurements made:



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA


Report No. 9096

GRAPHS TAKEN OF THE RF POWER

OUTPUT MEASUREMENTS

PART 2.1046

UT10 REFERENCE PLOT 0% Modulation

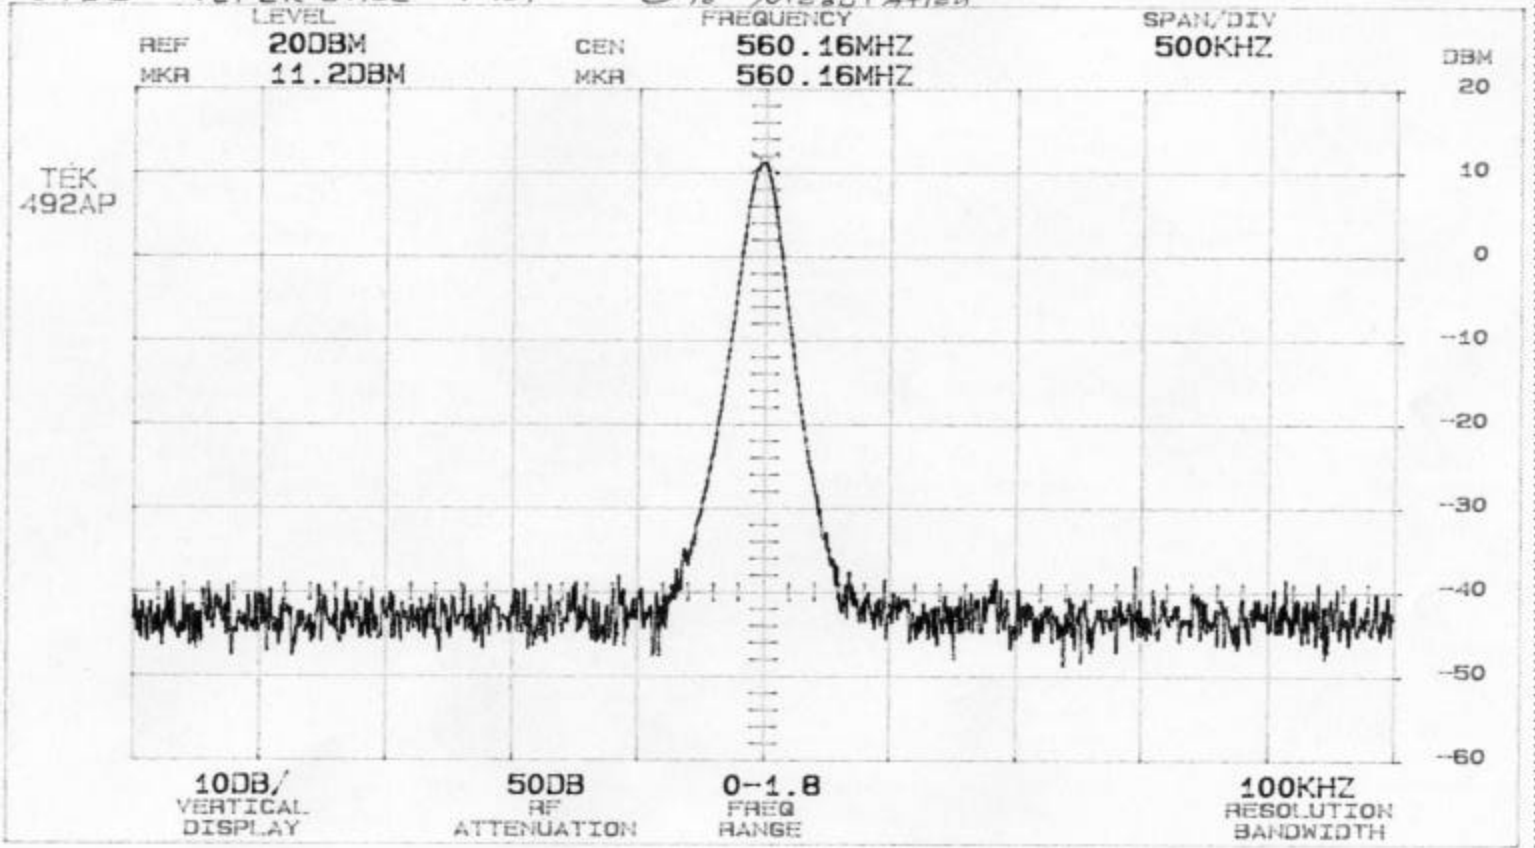



7.0 Modulation Characteristics - Part 2.1047

a. Voice modulated communication equipment

A curve showing the frequency response of the audio modulating circuit over a range of 20 to 20000 Hz is submitted with this report.

NOTE: See the following pages for the actual chart made during testing.

b. Equipment which employs modulation limiting

A family of curves showing the percentage of modulation versus the modulation input voltage with sufficient information showing the modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

NOTE:

These tests were not run because the UTID does not use limiting.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 9096


GRAPHS TAKEN SHOWING THE FREQUENCY

RESPONSE OF THE

AUDIO MODULATING CIRCUIT

PART 2.1047

UT1D (560-599MHz) Modulation vs Frequency for 100mV RMS Input

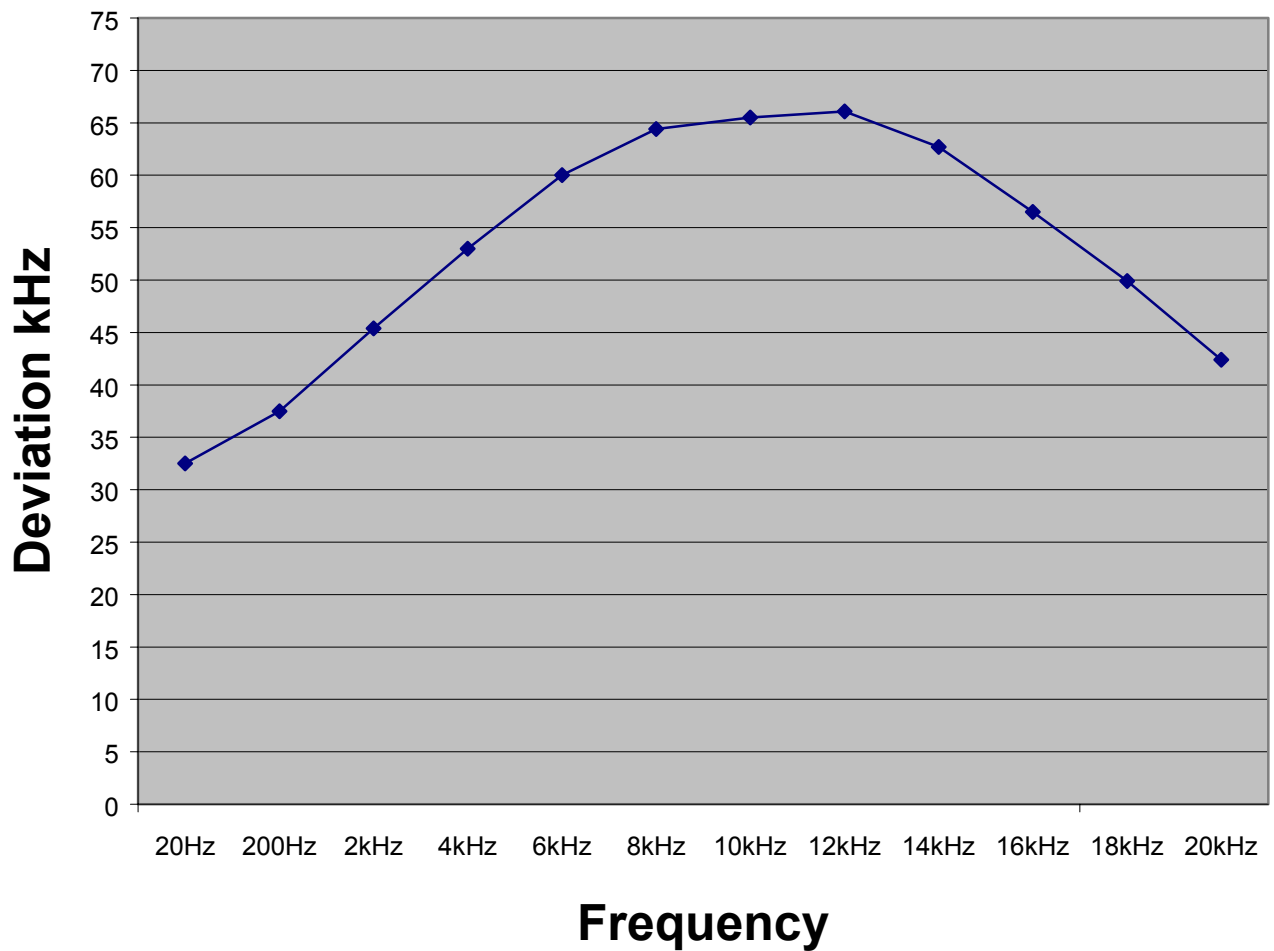



8.0 OCCUPIED BANDWIDTH – PART 2.1049

The frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to .5% of the total mean power radiated by a given emission.

As stated in Part 2.1049 c-1 the Shure Incorporated UT1D Low Power Transmitter was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. This input level was established at the frequency of maximum response of the audio modulating circuit.

The Shure Incorporated UT1D Low Power Transmitter uses the same frequency range as television broadcast monaural transmitters so the test was also run using a 15 kHz input signal modulated by 85% as stated in Part 2.1049 e-6.

Paragraph e-5 states that the maximum authorized bandwidth shall be 200 kHz for all emissions inside these frequency bands.

Carson's Rule:

Section 2.202 (g)

$$B_n = 2M + 2DK, \quad K=1 \quad B_n = \text{Bandwidth}$$

$$M = 15 \text{ kHz}, \quad M = \text{Maximum Modulating Frequency}$$

$$D = 45 \text{ kHz}, \quad D = \text{Peak Deviation}$$

$$B_n = 2(15) + 2(45)(1) = 120 \text{ kHz}$$

NOTE: See the following pages for the graphs of the actual measurements made:




EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 9096


GRAPHS TAKEN OF THE OCCUPIED BANDWIDTH

PART 2.1049


UT10 50Hz

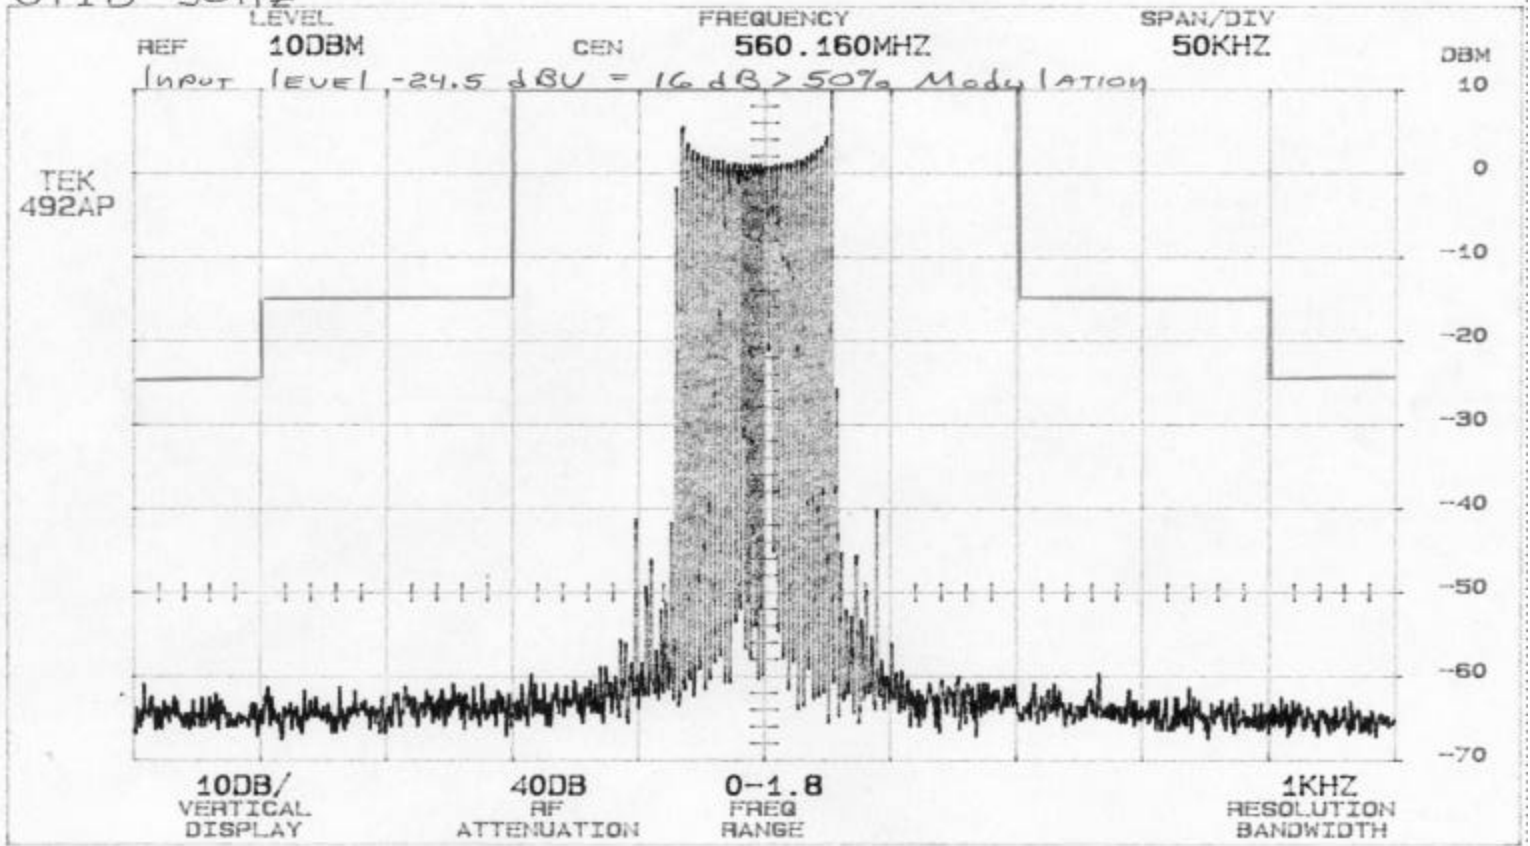


UT10 500 Hz

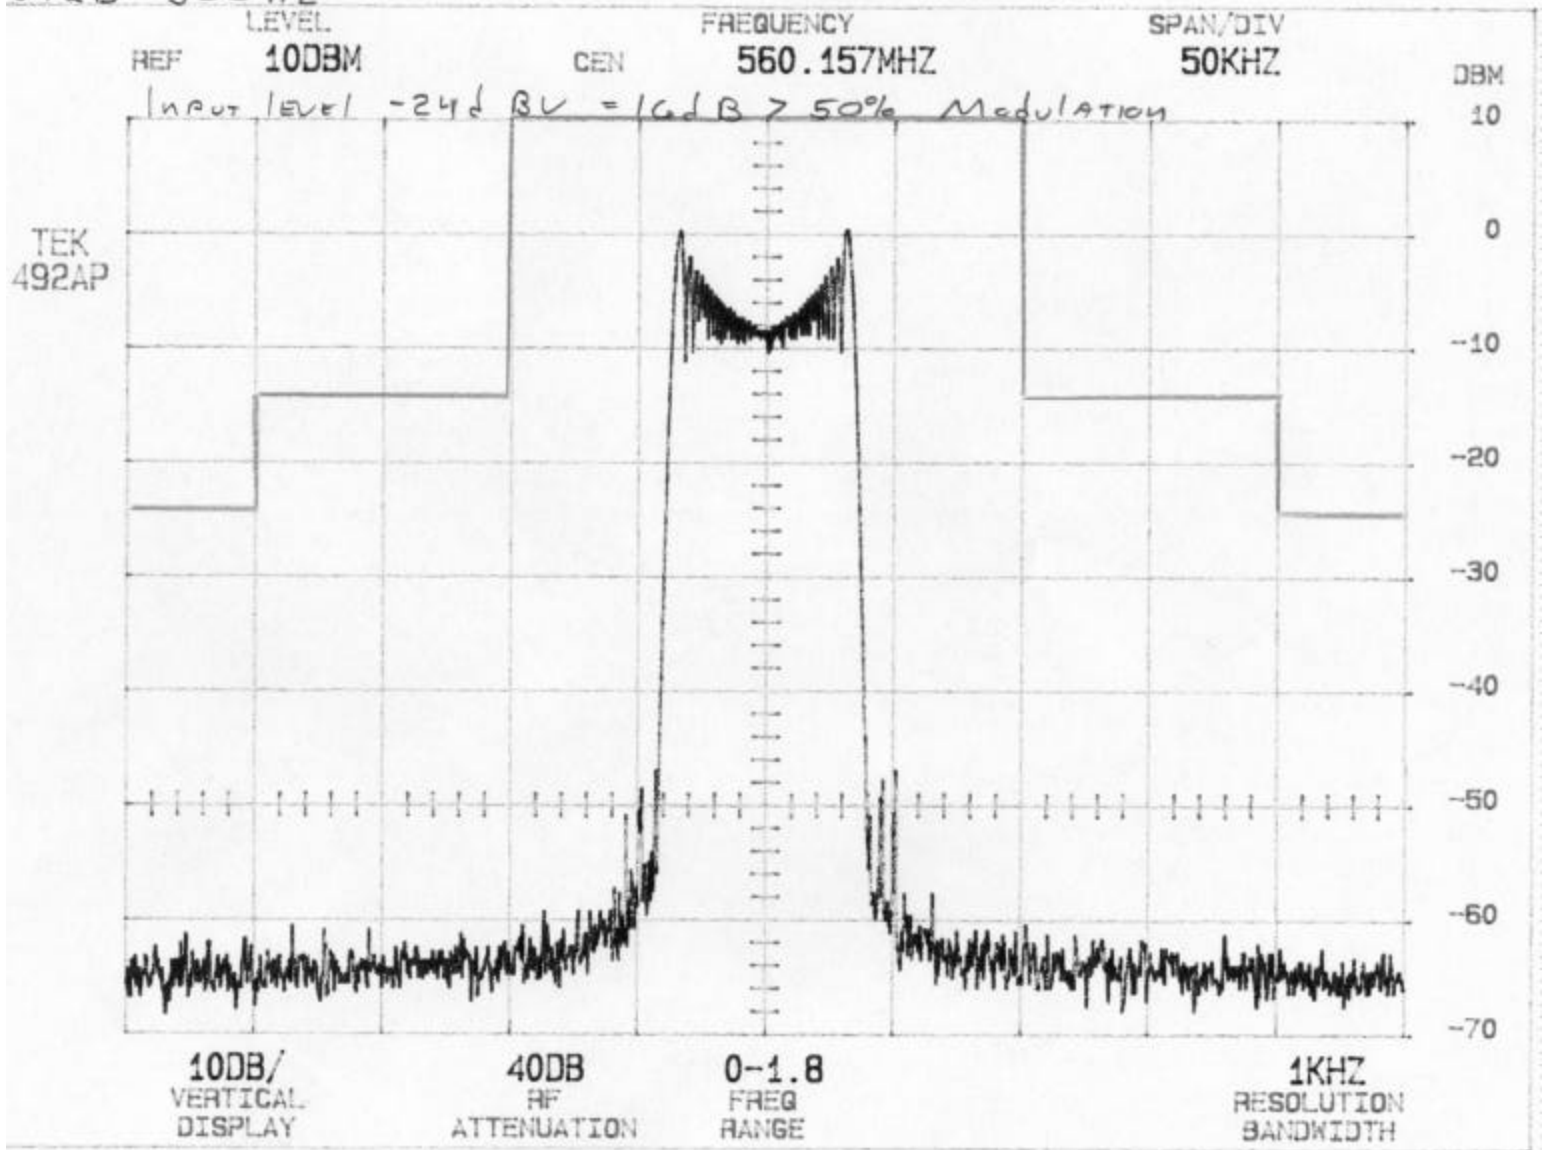


UT1 D 2500 Hz

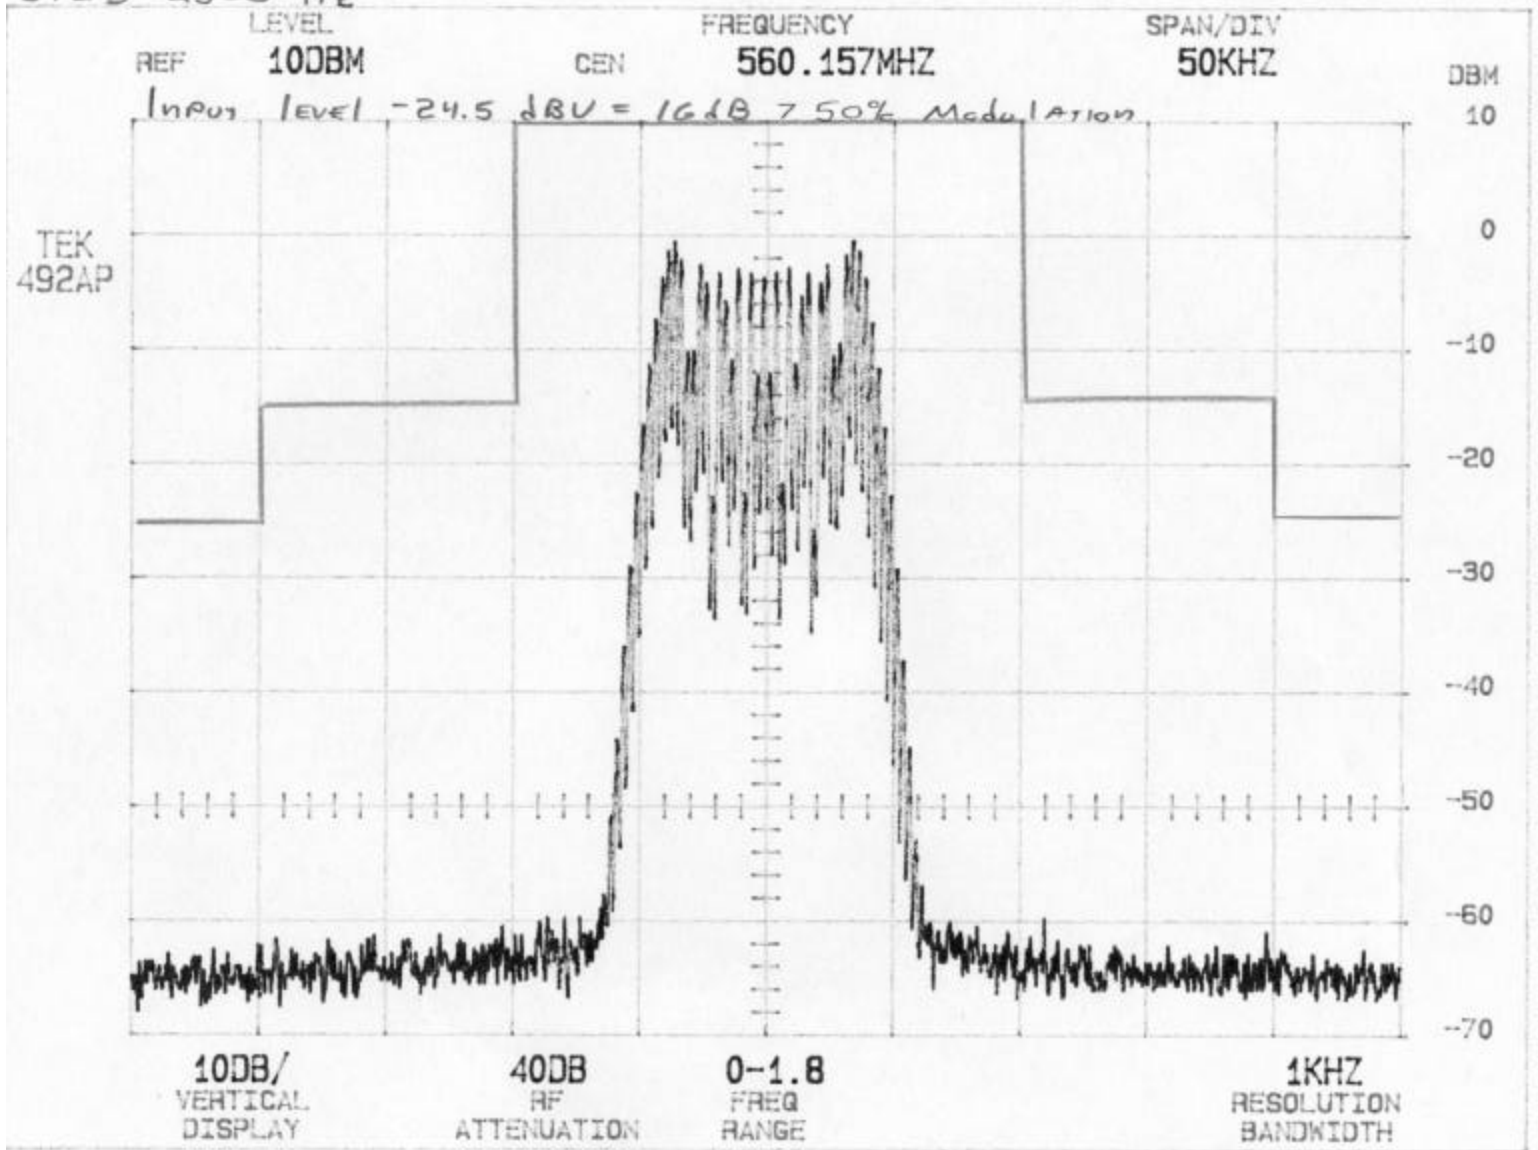


UT10 10KHz

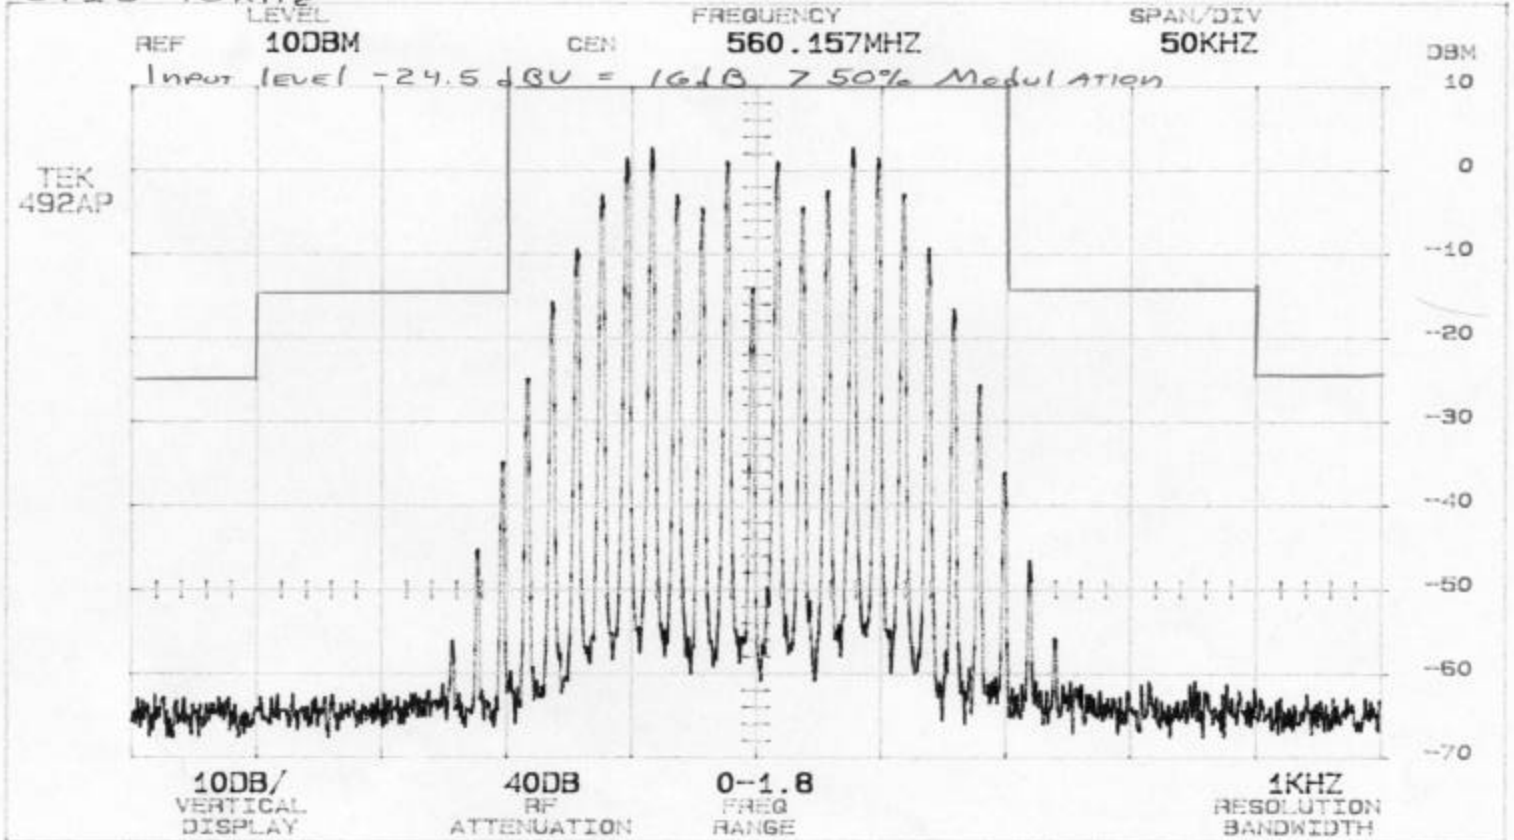


UT1D 15 kHz

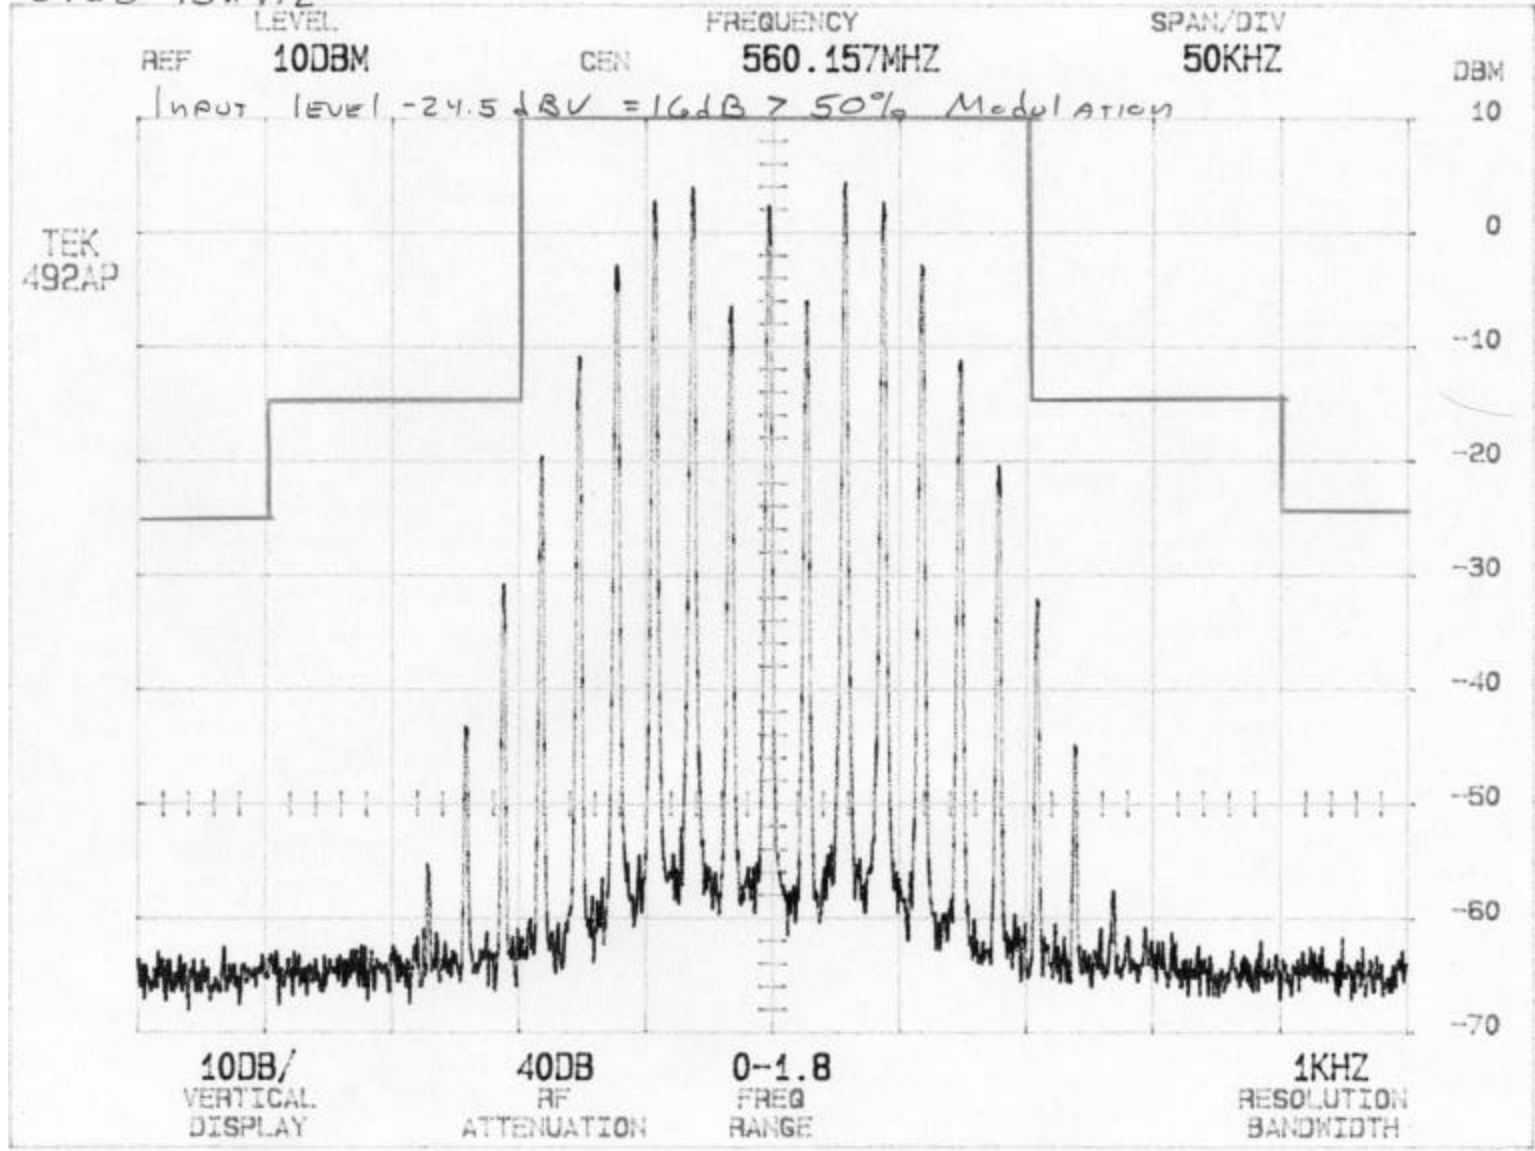


UT1D 50Hz

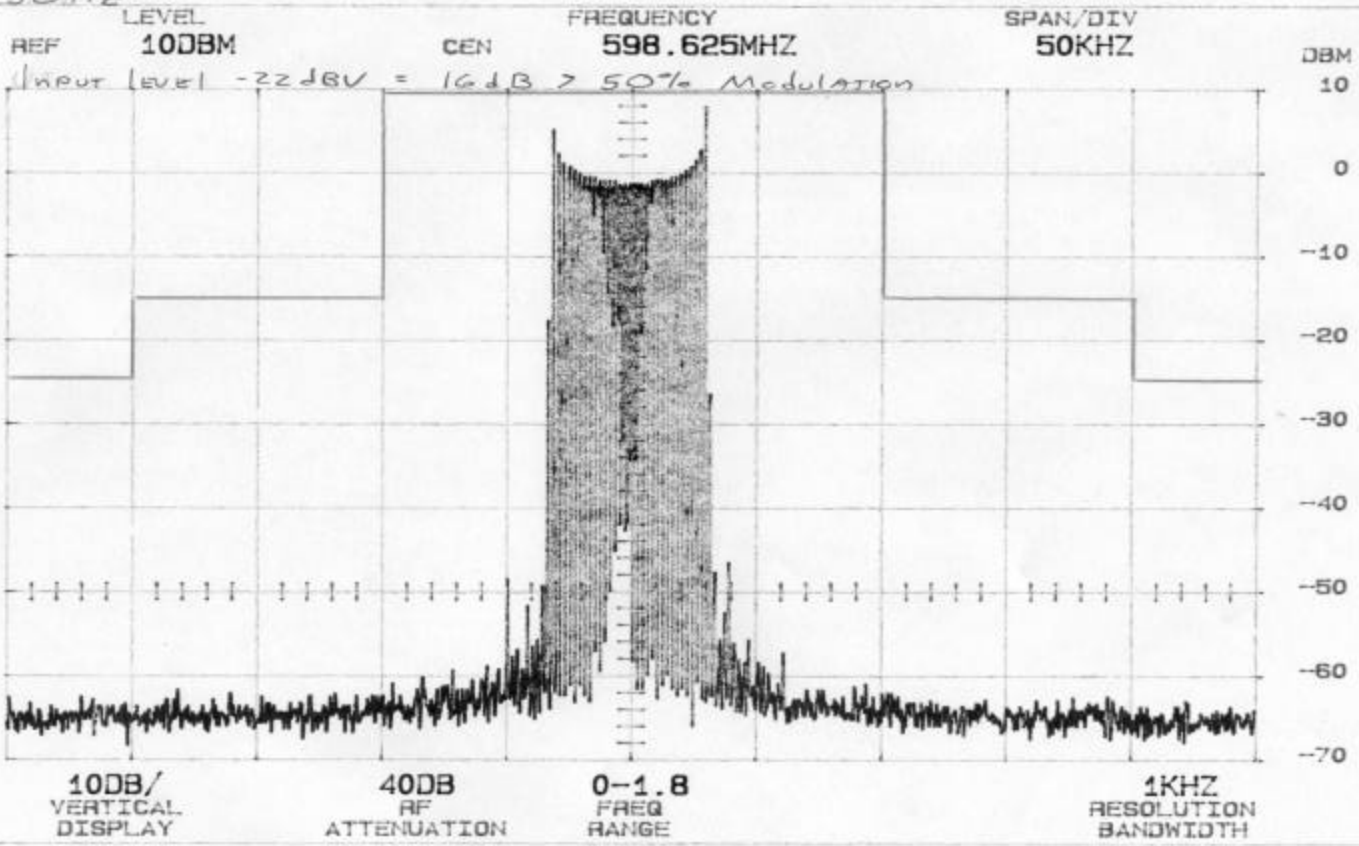


UT10 500Hz

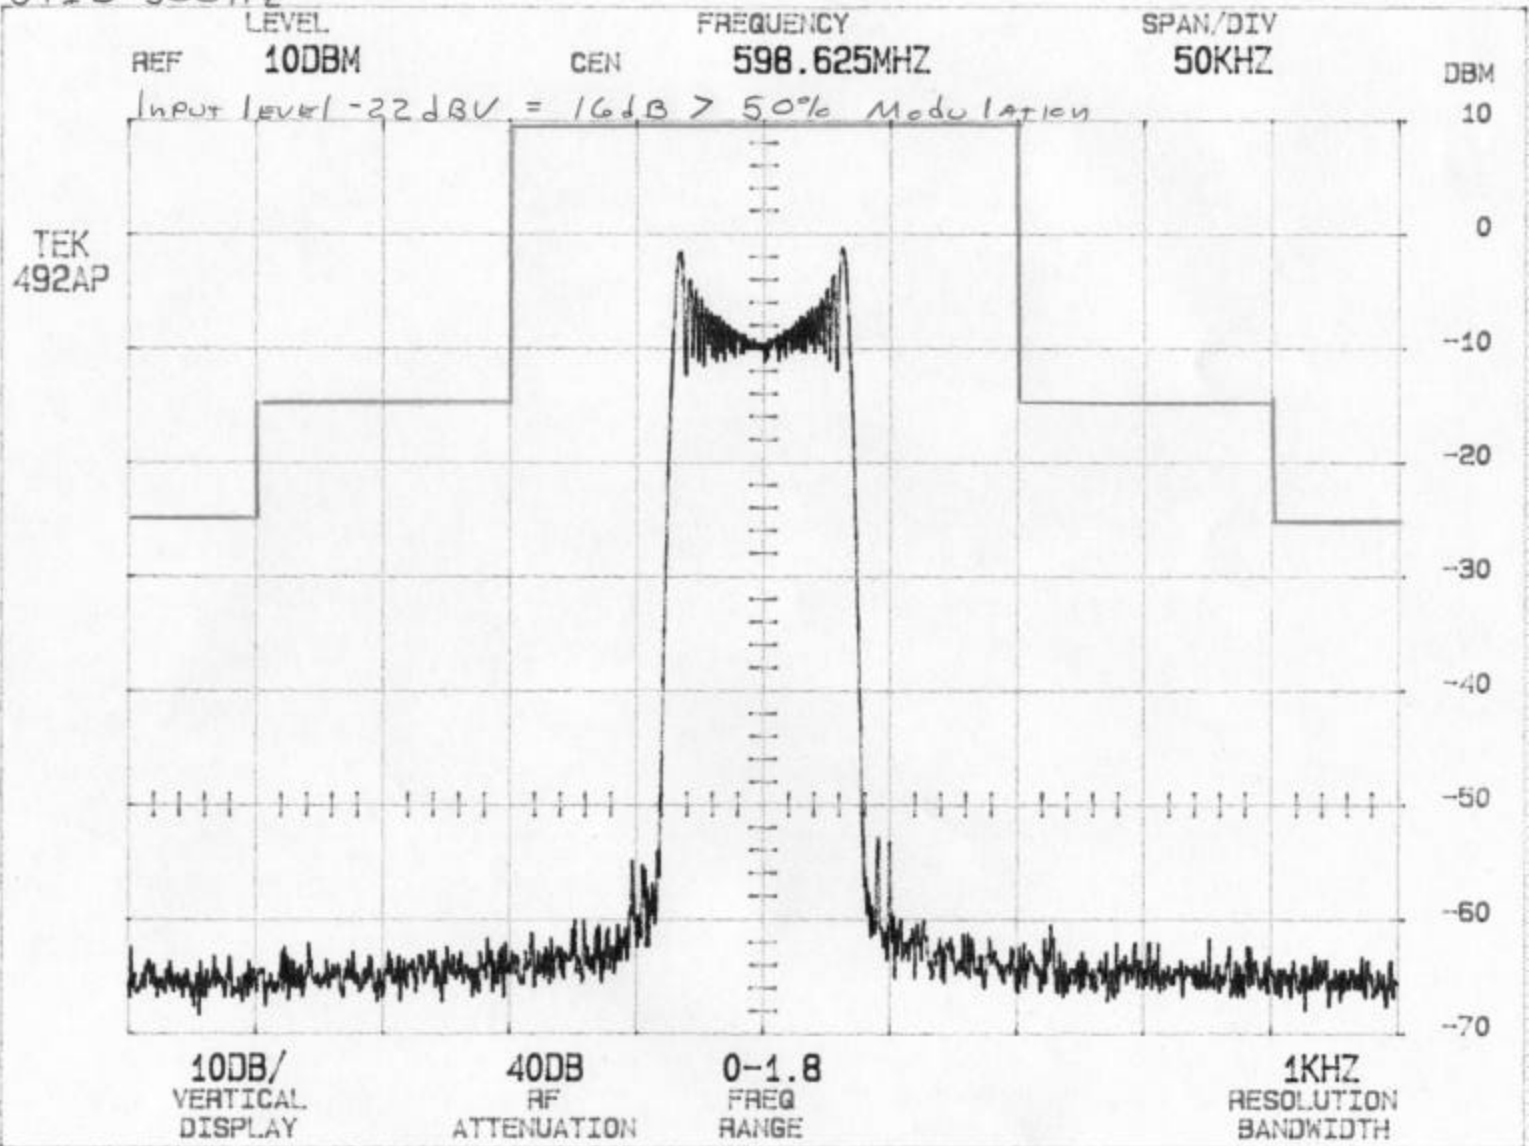


U110 2500 Hz

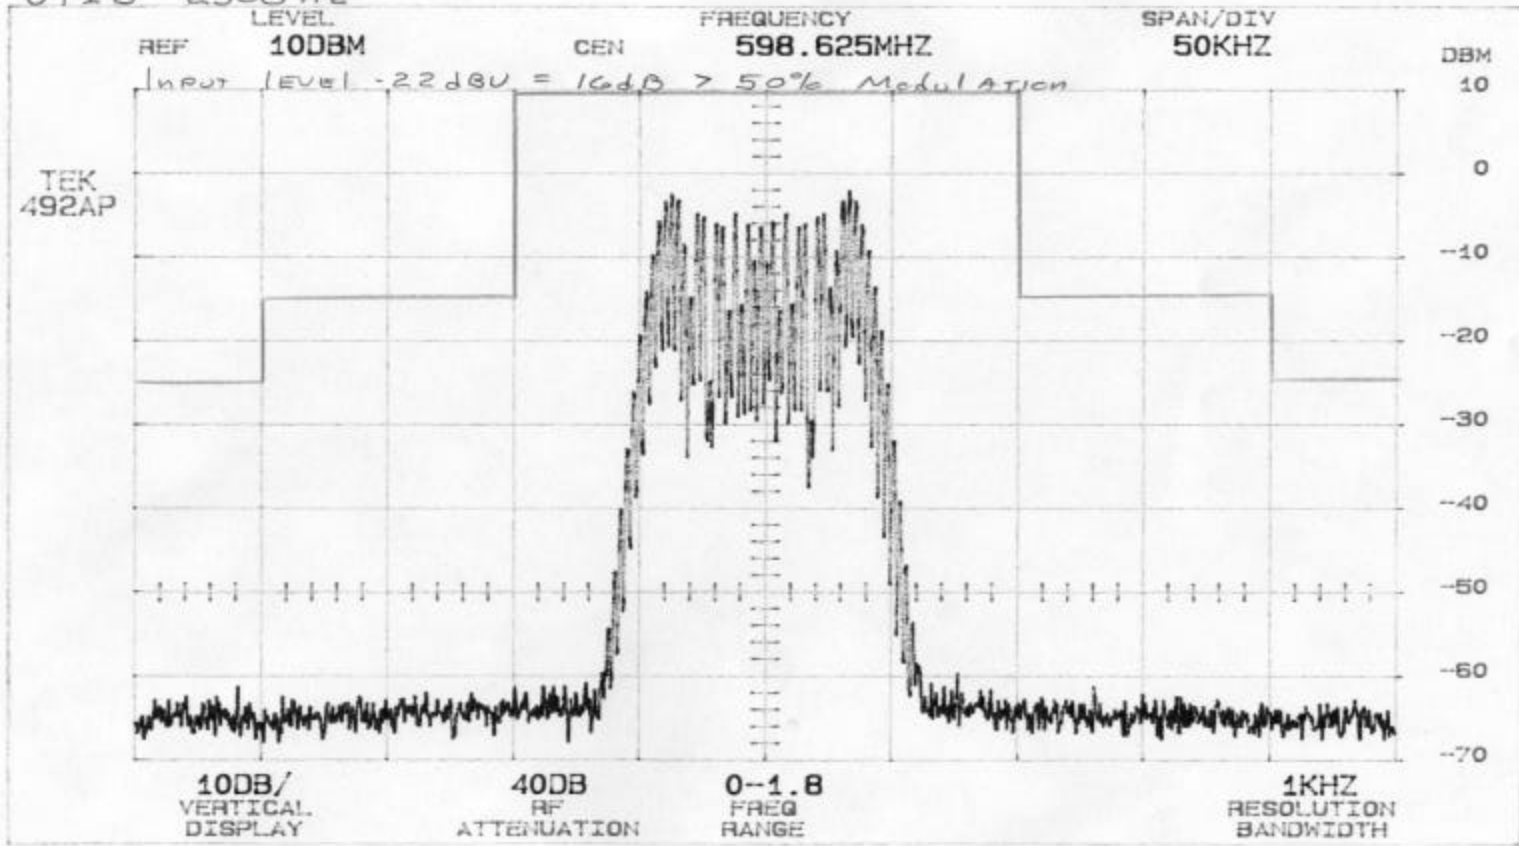

UT10 10kHz

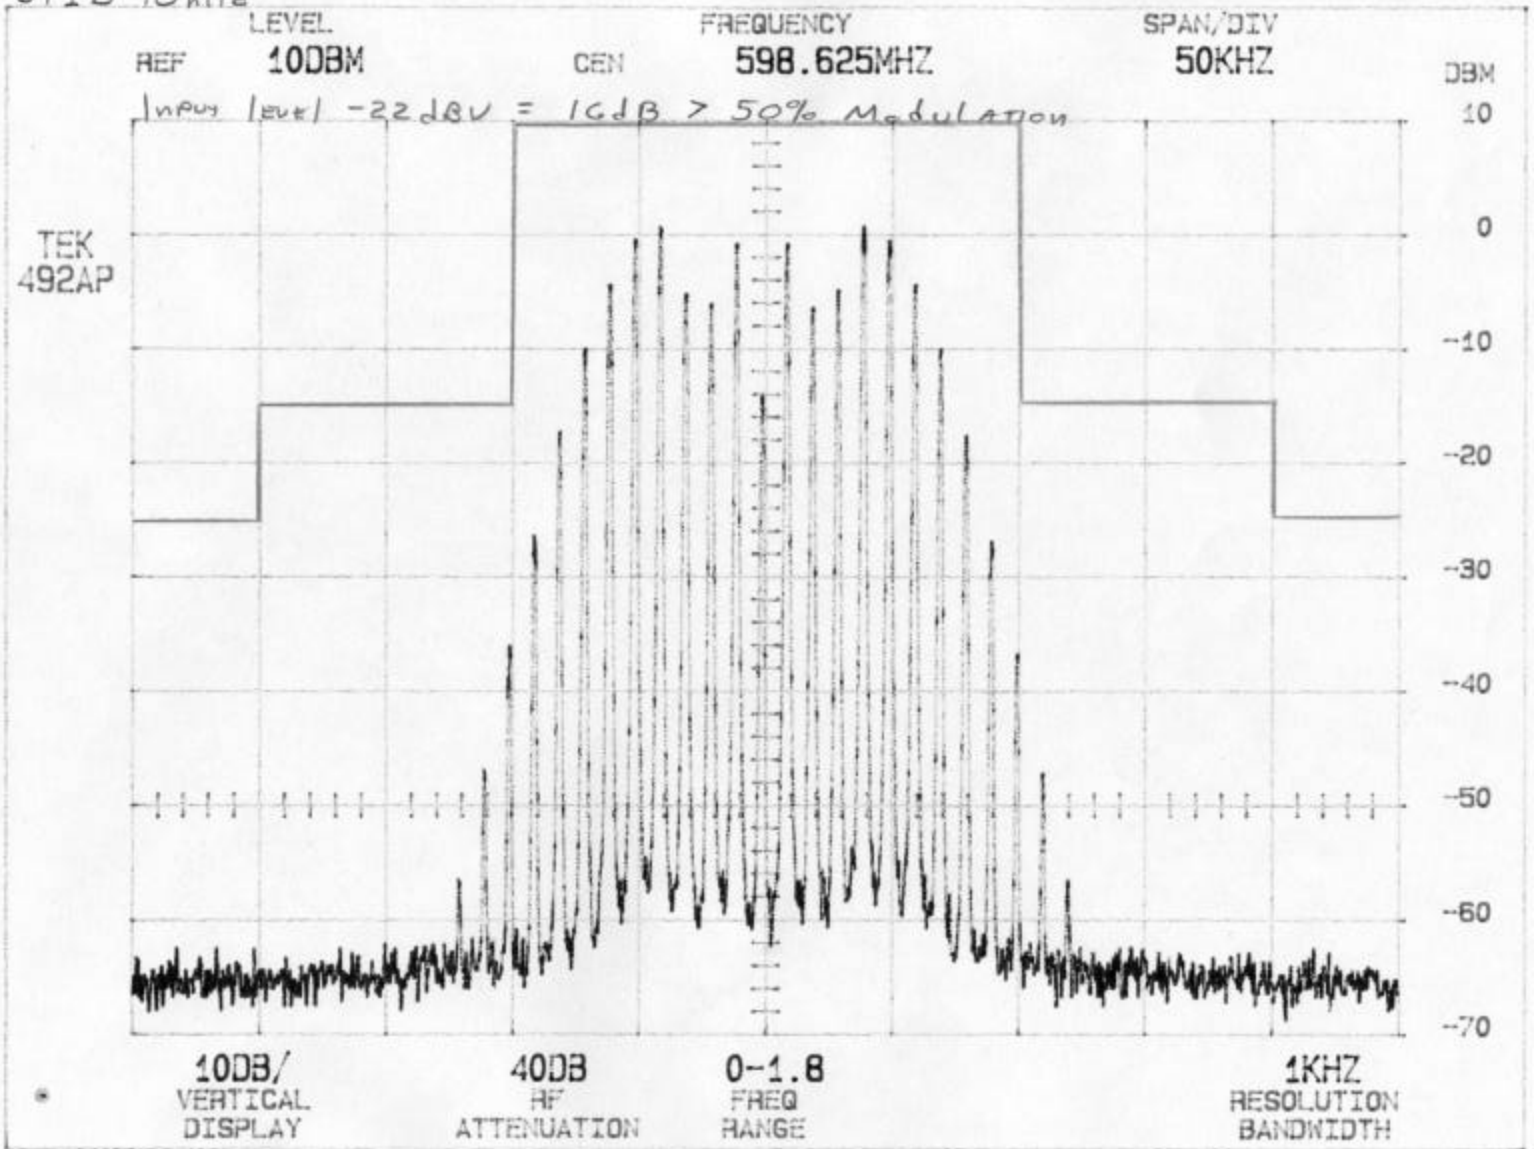

U110 15kHz

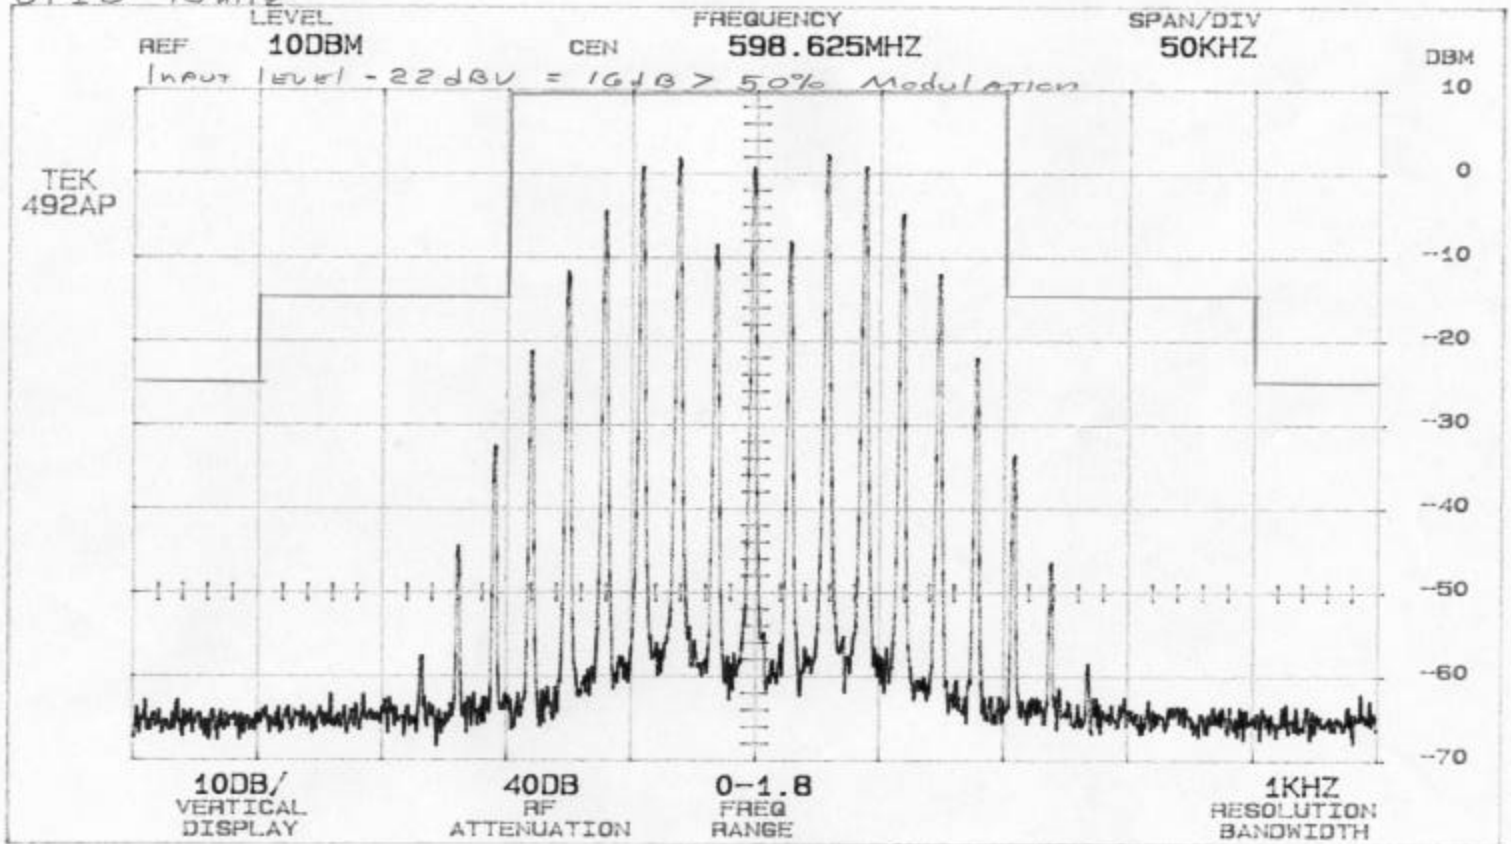



9.0 Frequency Deviation and Tolerance - PART 74.861

Paragraph e-3 states that the maximum authorized deviation shall be 75 kHz for all frequency modulation emissions in the frequency bands 560 to 599 MHz.

Frequency Deviation used: 45 kHz


Paragraph e-4 states that the frequency tolerance of the transmitter shall be .005 percent.

NOTE:

See Section 12 of this test report for the frequency tolerance test results.

10.0 SPURIOUS CONDUCTED EMISSION MEASUREMENTS AT ANTENNA TERMINALS PART 2.1051

Spurious conducted emissions were measured at the antenna terminals using an artificial load. Plots were made showing the amplitude of each harmonic emission with the equipment operated as specified in 2.1049. As shown by the radiated charts there was no reason to believe that there were any spurious emissions other than the harmonics that were than individually investigated when doing the conducted test at the antenna terminals. Measurements were made up to the 10th Harmonic of the fundamental. The following setup was used showing placement of the attenuators:

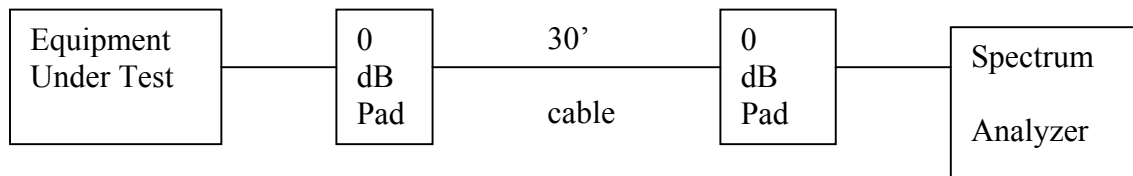

The allowed emissions for transmitters operating in the 560 to 599 MHz bands for Shure Incorporated UT1D Wireless Microphone equipment are found under Part 74, Section 74.861, Paragraph e-6 for Low Power Auxiliary Stations. This paragraph states the mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (2) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (3) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43+10\text{Log}_{10}$ (mean output power in watts) dB.

NOTE: See the following pages for the data and graphs of the actual measurements made:

NOTE: This test was not run because there is no detachable antenna.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 9096

**CONDUCTED EMISSION DATA TAKEN FOR
SPURIOUS EMISSION MEASUREMENTS MADE
AT THE ANTENNA TERMINALS**

PART 2.1051

NOTE: This test was not run because there is no detachable antenna.



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 9096

**CONDUCTED EMISSION GRAPHS TAKEN FOR
SPURIOUS EMISSION MEASUREMENTS MADE
AT THE ANTENNA TERMINALS**

PART 2.1051

NOTE: This test was not run because there is no detachable antenna.



11.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS PART 2.1053

Radiated measurements were performed at a 1 or 3 meter test distance automatically scanning the frequency range from 200 MHz to 6000 MHz, depending upon the fundamental frequency.

For the Shure Incorporated UT1D Low Power Transmitter, the highest fundamental frequency is 599 MHz so the scans were made up to 6000 MHz, to cover the tenth harmonic.

All signals in the frequency range of 30 MHz to 200 MHz were measured with a Biconical Antenna and from 200 MHz to 1000 MHz a Log Periodic Antenna was used as the pickup devices. From 1000 MHz to 10000 MHz, a Double Ridge Horn Antenna was used. The cables and equipment were placed and moved within the range of positions likely to find their maximum emissions. Tests were made in both the horizontal and vertical planes of polarization.

The allowed emissions for transmitters operating in the 560 to 599 MHz bands for Shure Incorporated UT1D Low Power Transmitter equipment are found under Part 74, Section 74.861, Paragraph e-6 for Low Power Auxiliary Stations. This paragraph states the mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (2) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (3) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log_{10}$ (mean output power in watts) dB.



11.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T)
PART 2.1053

To determine the **LIMIT** for Spurious Emissions the following method was used:

Maximum output power in watts:

Maximum Transmitter output power in watts **0.25**

Free Space Formula

Convert to 3 meter test distance using the Free Space Formula

$$\frac{\sqrt{49.2 * \text{rated wattage}}}{\text{Distance}} = \frac{(49.2 * 0.25)^{.5}}{3} = 1.16904519445001 \text{ volts/meter}$$

$$1.16904519445001 \text{ v/m} = 1169045.19 \text{ uV/m}$$

$$20 * \text{Log}(1169045.19) = 121.36 \text{ dBuV/m}$$

Spurious emission limit at three meters equals **121.36**

The emissions must be reduced by:

$$43 + 10 * \text{LOG}_{10}(0.25) = 36.98 \text{ dB}$$

Therefore, the **LIMIT** at three meters equals:

121.36 dBuV/m extrapolated level for 0.25 watts

-36.98 dB required reduction below the unmodulated fundamental

84.38 dBuV/M spurious emissions limit



EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA

Report No. 9096

RADIATED DATA TAKEN FOR FIELD STRENGTH

SPURIOUS EMISSION MEASUREMENTS

PART 2.1053



EDIT PEAK LIST (Final Measurement Results)			
Trace1: ---		Trace2: FCC74A	
Trace3: ---		Trace4: ---	
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA LIMIT dB
2 Quasi Peak	373.4700 MHz	39.12	-44.87 FCC -32.88 CANADA

45° 1m

FCC Pt.74 limit = 84 dB μ V/m RSS-123 limit = 72 dB μ V/m

Title: Shure Inc., UT1 560 MHz
Comment A: Vertical, 3 Meters
Date: 12.JUN.2001 15:00:32

FINAL ^{CB}
Genoa



EDIT PEAK LIST (Final Measurement Results)

TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA LIMIT dB
2 Quasi Peak	569.2299 MHz	108.45	24.45 16.55

Fund. Limit = 125 dB μ V/m

45° 1m

Title: Shure Inc., UT1 560 MHz
Comment A: Vertical, 3 Meters
Date: 12.JUN.2001 15:11:49

FINAL ^{CB}
Genoa



EDIT PEAK LIST (Final Measurement Results)				
Trace1: ---		Trace2: FCC74A		
Trace3: ---		Trace4: ---		
	TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1)	2 Average	1.1204 GHz	62.05	-21.94 FCC
2)	2 Average	1.3072 GHz	54.67	-29.33 FCC
3)	2 Average	1.4939 GHz	46.76	-37.23 FCC
4)	2 Average	1.6807 GHz	56.03	-27.96 FCC
1)				-9.94 IC
2)				-17.33 IC
3)				-25.23 IC
4)				-15.96 IC

270° 1m
 0° 1.1m
 200° 1m
 90° 1m

FCC Pt. 74 limit = 84 dBµV/m IC-RSS-123 limit = 72 dBµV/m

Title: Shure Inc., UT1 560 MHz
 Comment A: Vertical, 3 meters
 Date: 12.JUN.2001 14:04:08

FINAL ^{CB}
 Genoa



EDIT PEAK LIST (Final Measurement Results)			
Trace1: ---		Trace2: FCC74B	
Trace3: ---		Trace4: ---	
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA LIMIT dB
2 Average	2.8012 GHz	59.75	-34.24 FCC -22.24 IC

FCC Pt. 74 limit = 94 dB μ V/m IC RSS-123 limit = 82 dB μ V/m

0° 1m

Title: Shure Inc, UT1 560 MHz
Comment A: Vertical, 1 meter
Date: 12.JUN.2001 14:35:27

FINAL ^{CB}
Genoa



EDIT PEAK LIST (Final Measurement Results)				
Trace1: ---		Trace2: FCC74A		
Trace3: ---		Trace4: ---		
	TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1)	2 Quasi Peak	248.9800 MHz	33.63	-50.36 FCC
2)	2 Quasi Peak	348.9700 MHz	34.24	-49.75 FCC
3)	2 Quasi Peak	469.5200 MHz	33.09	-50.90 FCC
1)				-38.36 IC
2)				-37.75 IC
3)				-38.90 IC

270° 1m
 270° 1.6m
 270° 1.6m

FCC Pt. 74 limit = 84 dBµV/m IC RSS-123 limit = 72 dBµV/m

Title: Shure Inc., UT1 560 MHz
 Comment A: Horizontal, 3 Meters
 Date: 12.JUN.2001 14:51:57

FINAL ^{CB}
 Genoa



EDIT PEAK LIST (Final Measurement Results)				
Trace1: ---		Trace2: FCC74A		
Trace3: ---		Trace4: ---		
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA LIMIT dB	
Fund. 2 Quasi Peak	560.2200 MHz	109.45	25.44 -15.55	270° 1m

Fund. limit = 125 dB μ V/m

Title: Shure Inc., UT1 560 MHz
Comment A: Horizontal, 3 Meters
Date: 12.JUN.2001 15:25:20

FINAL ^{CB}
Genoa

EDIT PEAK LIST (Final Measurement Results)				
Trace1: ---		Trace2: FCC74A		
Trace3: ---		Trace4: ---		
	TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1)	2 Average	1.1294 GHz	57.47	-26.52 FCC
2)	2 Average	1.3072 GHz	54.08	-29.91 FCC
3)	2 Average	1.4939 GHz	47.36	-36.63 FCC
4)	2 Average	1.6806 GHz	57.86	-26.13 FCC
1)				-14.52 IC
2)				-17.91 IC
3)				-24.63 IC
4)				-14.13 IC

0° 1.2m
0° 1m
270° 1m
270° 1m

FCC Pt. 74 limit = 84 dBµV/m IC RSS-123 limit = 72 dBµV/m

Title: Shure Inc., UT1 560 MHz
 Comment A: Horizontal, 3 meters
 Date: 12.JUN.2001 14:17:40

FINAL ^{CB}
 Genoa



EDIT PEAK LIST (Final Measurement Results)			
Trace1: ---		Trace2: FCC74B	
Trace3: ---		Trace4: ---	
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1) 2 Average	2.2409 GHz	69.56	-24.43 FCC
2) 2 Average	2.8012 GHz	68.10	-25.89 FCC
1)			-12.43 IC
2)			-13.89 IC

FCC Pt. 74 limit = 94 dBµV/m IC limit = 82 dBµV/m

315° 1.1m
0° 1.1m

Title: Shure Inc, UT1 560 MHz
Comment A: Horizontal, 1 meter
Date: 12.JUN.2001 14:28:21

FINAL ^{LB}
Genoa



EDIT PEAK LIST (Final Measurement Results)			
Trace1: ---		Trace2: ---	
Trace3: ---		Trace4: ---	
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
2 Quasi Peak	399.0800 MHz	45.48	-38.52 FCC -26.52 IC

FCC Pt. 74 limit = 84 dBµV/m IC RSS-123 limit = 72 dBµV/m

45° 1.7 m

Title: Shure Inc., UT1 598.6 MHz
Comment A: Vertical, 3 Meters
Date: 11.JUN.2001 09:21:59

FINAL ^{CB}
Genoa



EDIT PEAK LIST (Final Measurement Results)				
Trace1: ---		Trace2: FCC74A		
Trace3: ---		Trace4: ---		
	TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
Fund.	2 Quasi Peak	598.6200 MHz	105.80	-21.00 -19.20
	2 Quasi Peak	997.7000 MHz	42.21	-41.78 FCC
				-29.78 IC

225° 1m
270° 1m

FCC Pt. 74 limit = 84dBµV/m IC R53-123 limit = 72dBµV/m Fund. limit = 125dBµV/m

Title: Shure Inc., UT1 598.6 MHz
 Comment A: Vertical, 3 Meters
 Date: 11.JUN.2001 09:46:16

FINAL ^{CB}
 Genoa

EDIT PEAK LIST (Final Measurement Results)					
Trace1: ---		Trace2: FCC74A			
Trace3: ---		Trace4: ---			
	TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB	
1)	1 Average	1.5963 GHz	58.91	-25.09 FCC	315° 1.2m
2)	1 Average	1.3967 GHz	53.56	-30.44 FCC	315° 1.2m
3)	1 Average	1.7959 GHz	52.64	-31.36 FCC	270° 1.2m
4)	1 Average	1.1972 GHz	48.74	-35.26 FCC	0° 1.2m
5)	1 Average	1.9954 GHz	48.49	-35.51 FCC	315° 1.3m
1)				-13.09 FCC IC	
2)				-18.44 IC	
3)				-19.36 IC	
4)				-23.26 IC	
5)				-23.51 IC	

FCC Pt.74 limit = 84 dBµV/m IC RSS-123 limit = 72 dBµV/m

Title: Shure Inc., UT1 598.6 MHz
 Comment A: Vertical, 3 meters
 Date: 11.JUN.2001 11:27:47

FINAL ^{CB}
Genoa

EDIT PEAK LIST (Final Measurement Results)			
Trace1: ---		Trace2: ---	
Trace3: ---		Trace4: ---	
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1) 2 Average	2.1949 GHz	59.25	-34.75 FCC 0° 1.1m
2) 2 Average	2.3945 GHz	57.57	-36.43 FCC 0° 1.1m
3) 2 Average	2.9931 GHz	65.59	-28.41 FCC 180° 1m
4) 2 Average	3.1926 GHz	59.19	-34.81 FCC 180° 1m
1)			-22.75 IC
2)			-24.43 IC
3)			-16.41 IC
4)			-22.81 IC

FCC Pt. 74 limit = 94 dBµV/m IC RSS-123 limit = 82 dBµV/m

Title: Shure Inc, UT1 598.6 MHz
 Comment A: Vertical, 1 meter
 Date: 11.JUN.2001 13:44:23

FINAL ^{CB}
 Genoa



EDIT PEAK LIST (Final Measurement Results)			
Trace1: FCC74A		Trace2: ---	
Trace3: ---		Trace4: ---	
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA LIMIT dB
2 Quasi Peak	399.0900 MHz	47.52	-36.48 FCC -24.48 IC

FCC Pt. 74 limit = 84 dB μ V/m IC RSS-123 limit = 72 dB μ V/m

Title: Shure Inc., UT1 598.6 MHz
Comment A: Horizontal, 3 Meters
Date: 11.JUN.2001 08:52:56

FINAL ^{CB}
Genoa



EDIT PEAK LIST (Final Measurement Results)					
Trace1: ---		Trace2: FCC74A			
Trace3: ---		Trace4: ---			
	TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB	
Fund.	2 Quasi Peak	598.6200 MHz	107.67	23.67 -17.33	270° 1.8m
1)	2 Quasi Peak	798.1600 MHz	42.79	-41.20 FCC	90° 1.8m
2)	2 Quasi Peak	997.7000 MHz	44.66	-39.33 FCC	90° 1.8m
1)				-29.20 IC	
2)				-27.33 IC	

FCC Pt. 74 limit = 84 dBµV/m IC RSS-123 limit = 72 dBµV/m Fund. limit = 125 dBµV/m

Title: Shure Inc., UT1 598.6 MHz
 Comment A: Horizontal, 3 Meters
 Date: 11.JUN.2001 10:02:09

FINAL ^{CB}
Genoa



EDIT PEAK LIST (Final Measurement Results)				
Trace1: FCC74A		Trace2: ---		
Trace3: ---		Trace4: ---		
	TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1)	1 Average	1.1972 GHz	63.50	-20.49 FCC
2)	1 Average	1.5962 GHz	59.42	-24.57 FCC
3)	1 Average	1.3967 GHz	55.20	-28.79 FCC
4)	1 Average	1.7958 GHz	54.04	-29.95 FCC
5)	1 Average	1.9954 GHz	47.80	-36.19 FCC
1)				-8.49 IC
2)				-12.57 IC
3)				-16.79 IC
4)				-17.95 IC
5)				-24.19 IC

180° 1m
 135° 1m
 135° 1.1m
 180° 1.3m
 0° 2m

FCC Pt. 74 limit = 84 dBµV/m IC RSS-123 limit = 72 dBµV/m

Title: Shure Inc., UT1 598.6 MHz
 Comment A: Horizontal, 3 meters
 Date: 11.JUN.2001 11:51:15

FINAL ^{CB}
 Genoa



EDIT PEAK LIST (Final Measurement Results)			
Trace1: FCC74B		Trace2: ---	
Trace3: ---		Trace4: ---	
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA LIMIT dB
1) 1 Average	2.9931 GHz	69.66	-24.33 FCC
2) 1 Average	2.1949 GHz	57.79	-36.20 FCC
1) 1			-12.33 IC
2) 1			-24.20 IC

FCC Pt.74 limit = 94 dB μ V/m IC RSS-123 limit = 82 dB μ V/m

200° 1.3m
0° 1.2m

Title: Shure Inc, UT1 598.6 MHz
Comment A: Horizontal, 1 meter
Comment B: ~~Vertical~~
Date: 11.JUN.2001 13:14:45

FINAL ^{CB}
Genoa



12.0 FREQUENCY STABILITY - PART 2.1055a (**Temperature**)

The frequency stability was measured from -30° to +50° centigrade at intervals of 10° centigrade throughout the range. Prior to each frequency measurement, the equipment was left alone for a sufficient period of time (approximately 30 minutes or more) to allow the components of the Shure Incorporated UT1D Low Power Transmitter oscillator circuitry to stabilize. The following information was taken:

FREQUENCY STABILITY FOR TEMPERATURE VARIATION IN MHZ:

-30°	598.645468
-20°	598.643281
-10°	0
0°	598.635399
+10°	0
+20°	598.626699
+30°	598.623819
+40°	0
+50°	598.612282

Worst Case Variance:

33186 Hz

As stated in Part 74, Section 74.861 e-4 the Frequency Tolerance and Margin for this range are as follows:

Frequency Tolerance: = **0.00005**

Ambient Frequency: = **598624135 MHz**

598624135 * 0.00005 = **29931.20675 Hz**

33186 - 29931.20675 = **3254.79325 Hz Margin**

Two frequencies (560.232 & 598.624 MHz) were tested with the worst case being well within the specified limits.




EMC Test Services
1250 Peterson Drive, Wheeling, Illinois 60090, USA


Report No. 9096


GRAPHS TAKEN FOR FREQUENCY


STABILITY WHEN VARYING THE TEMPERATURE


PART 2.1055a

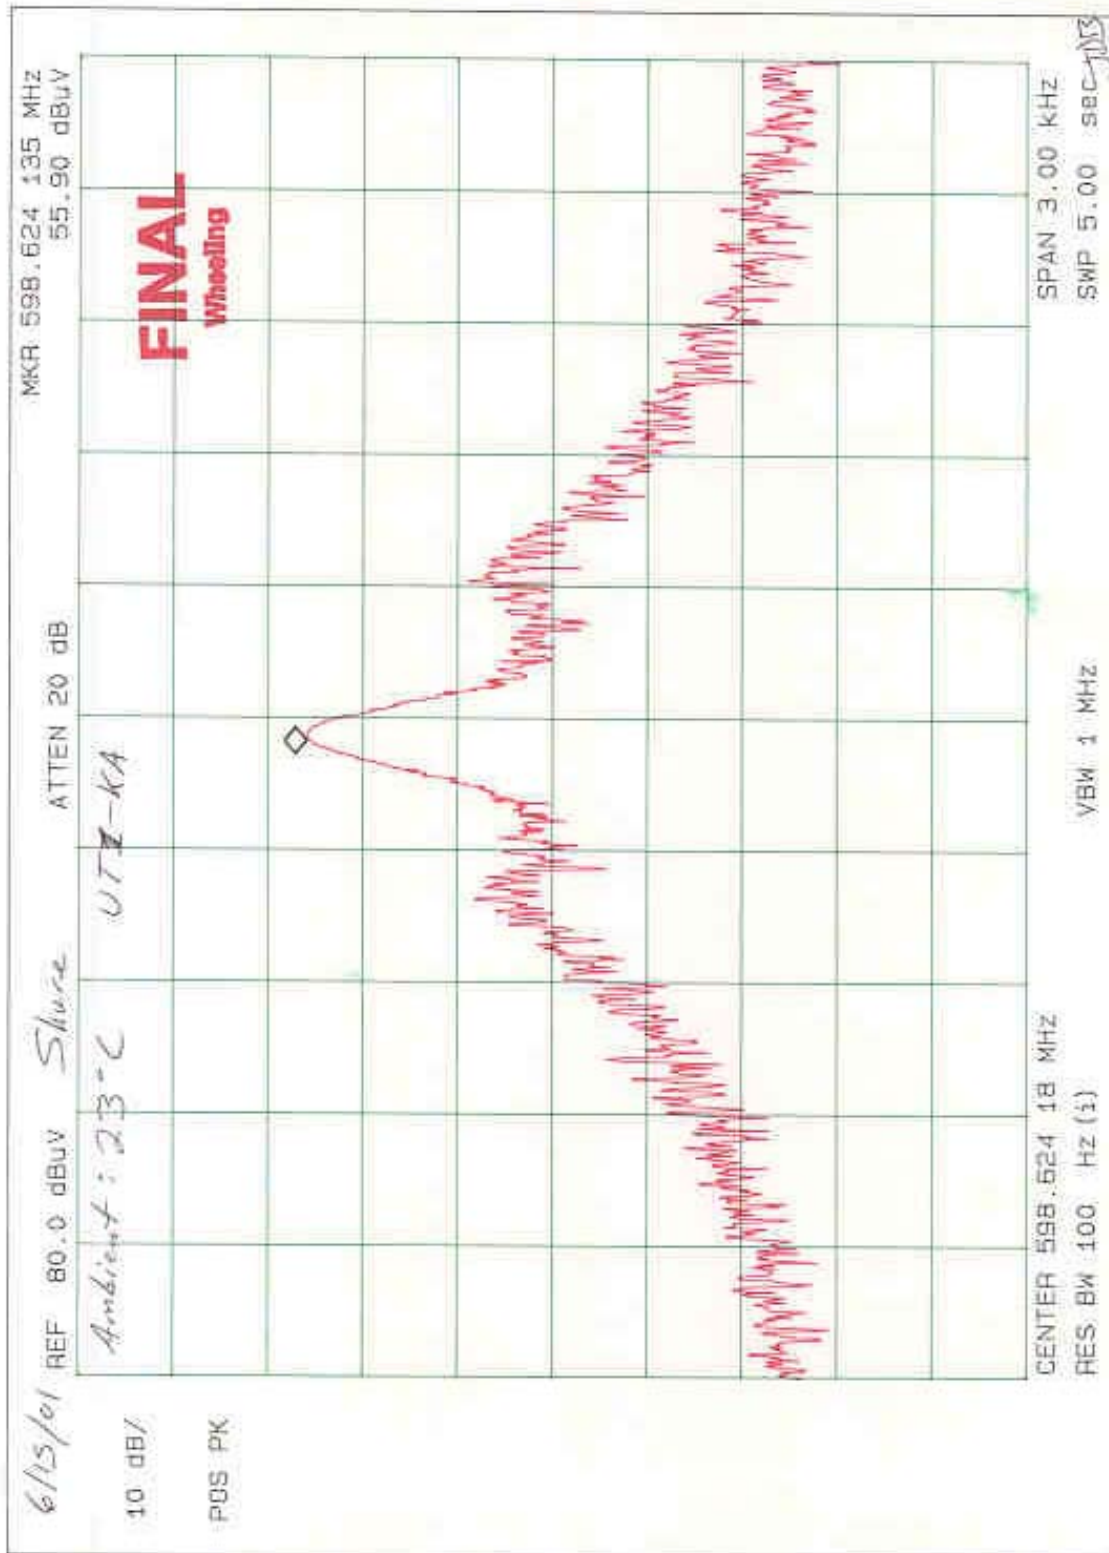


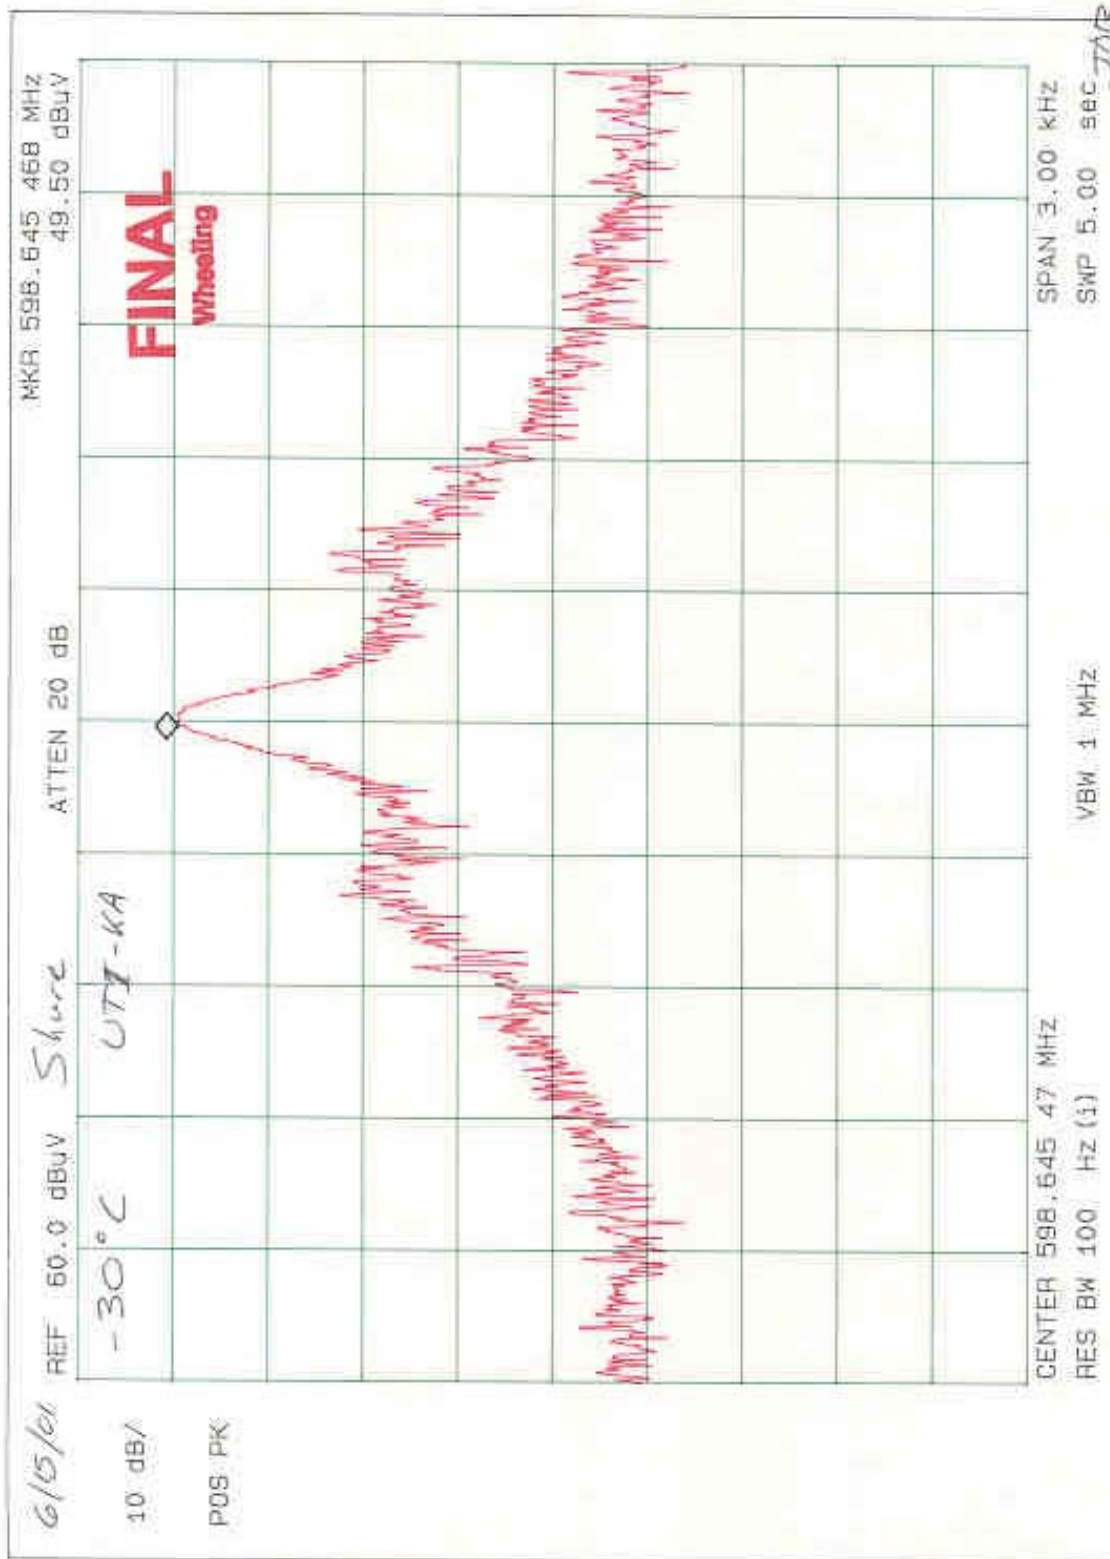


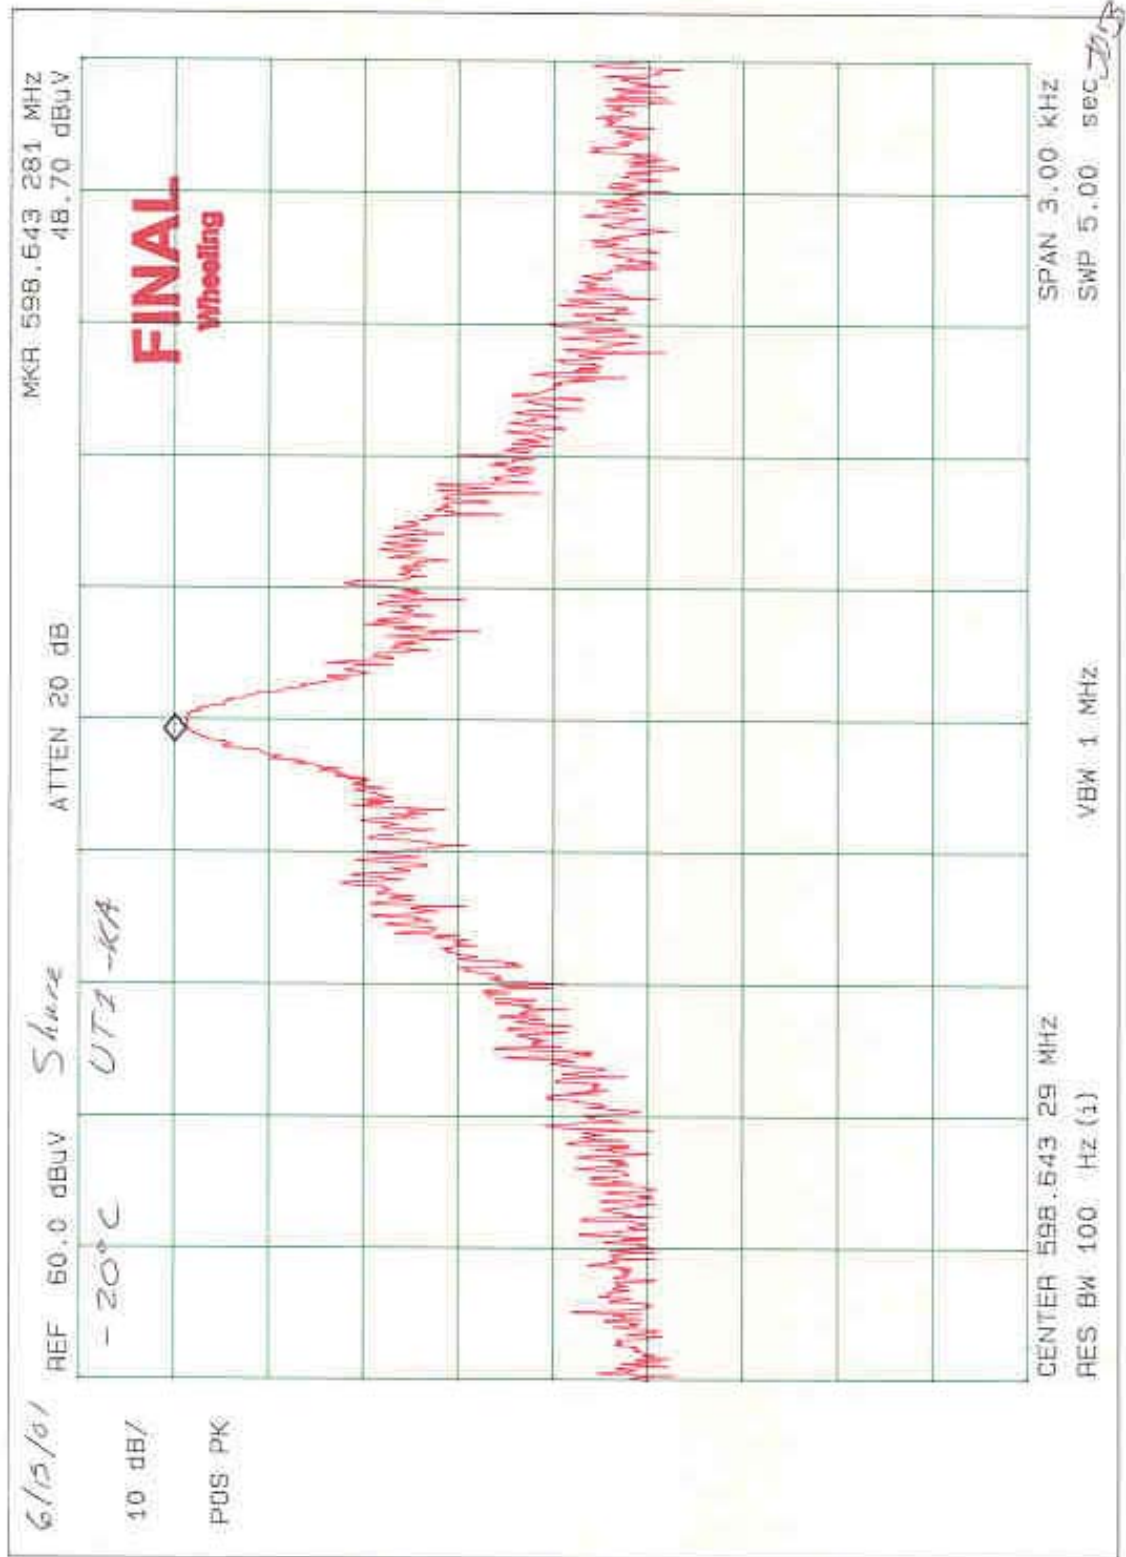

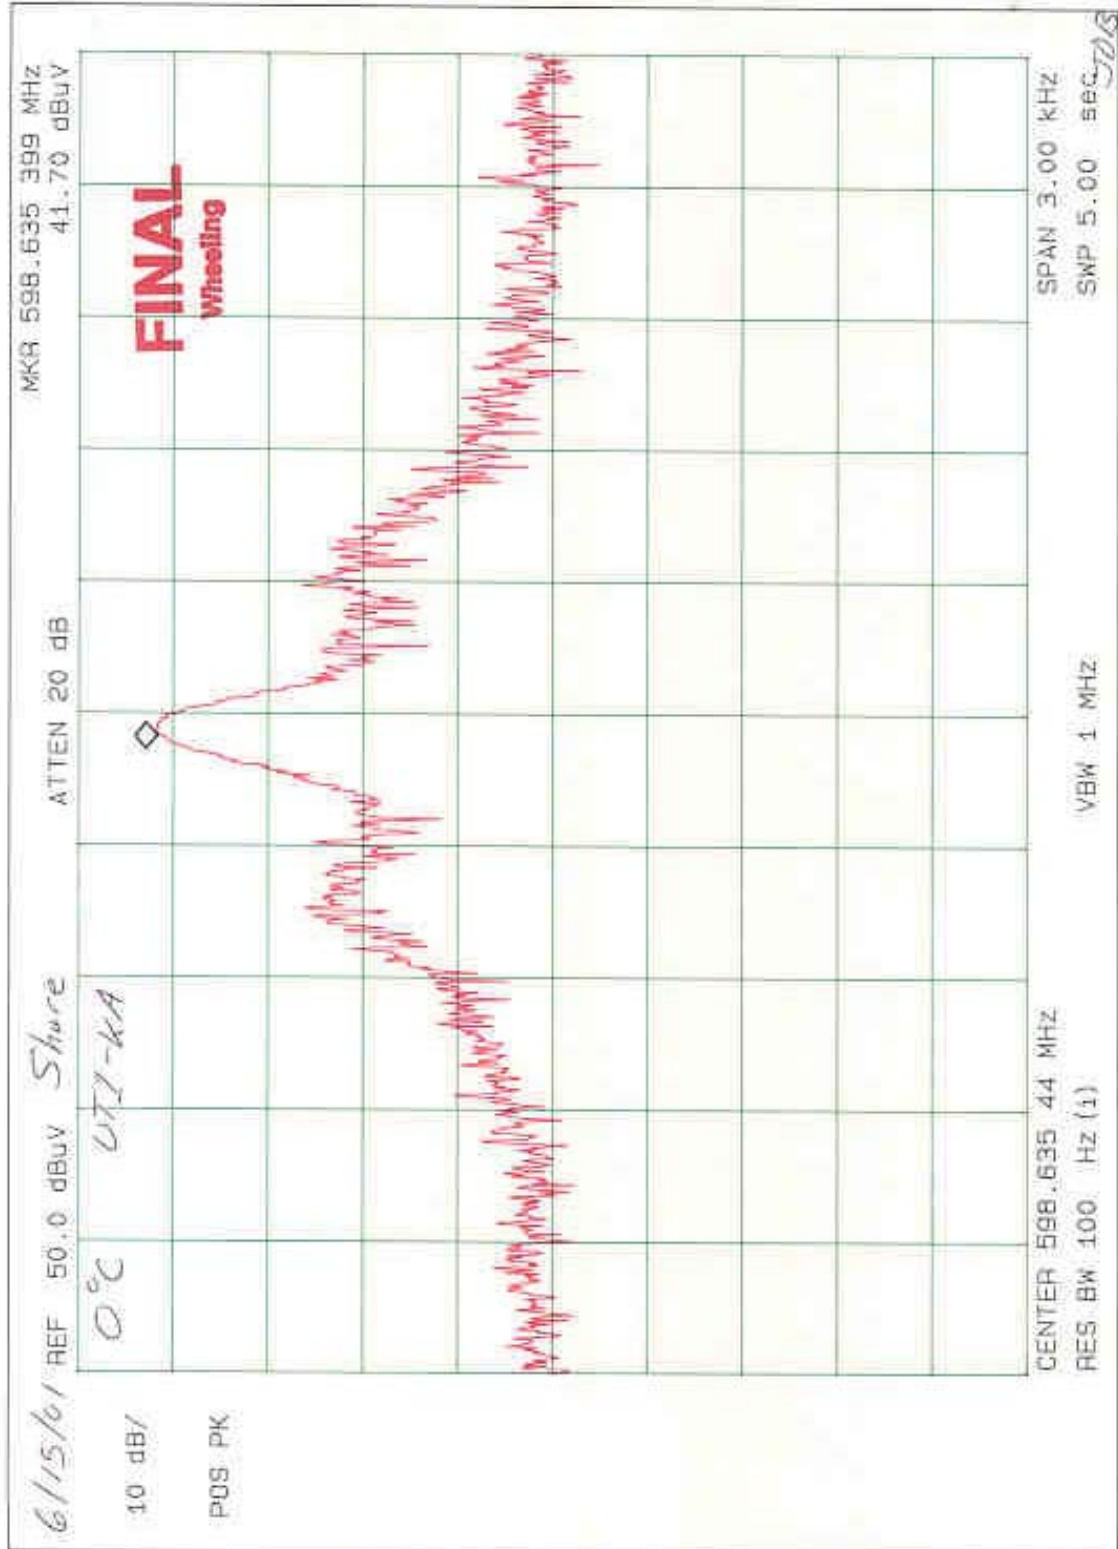

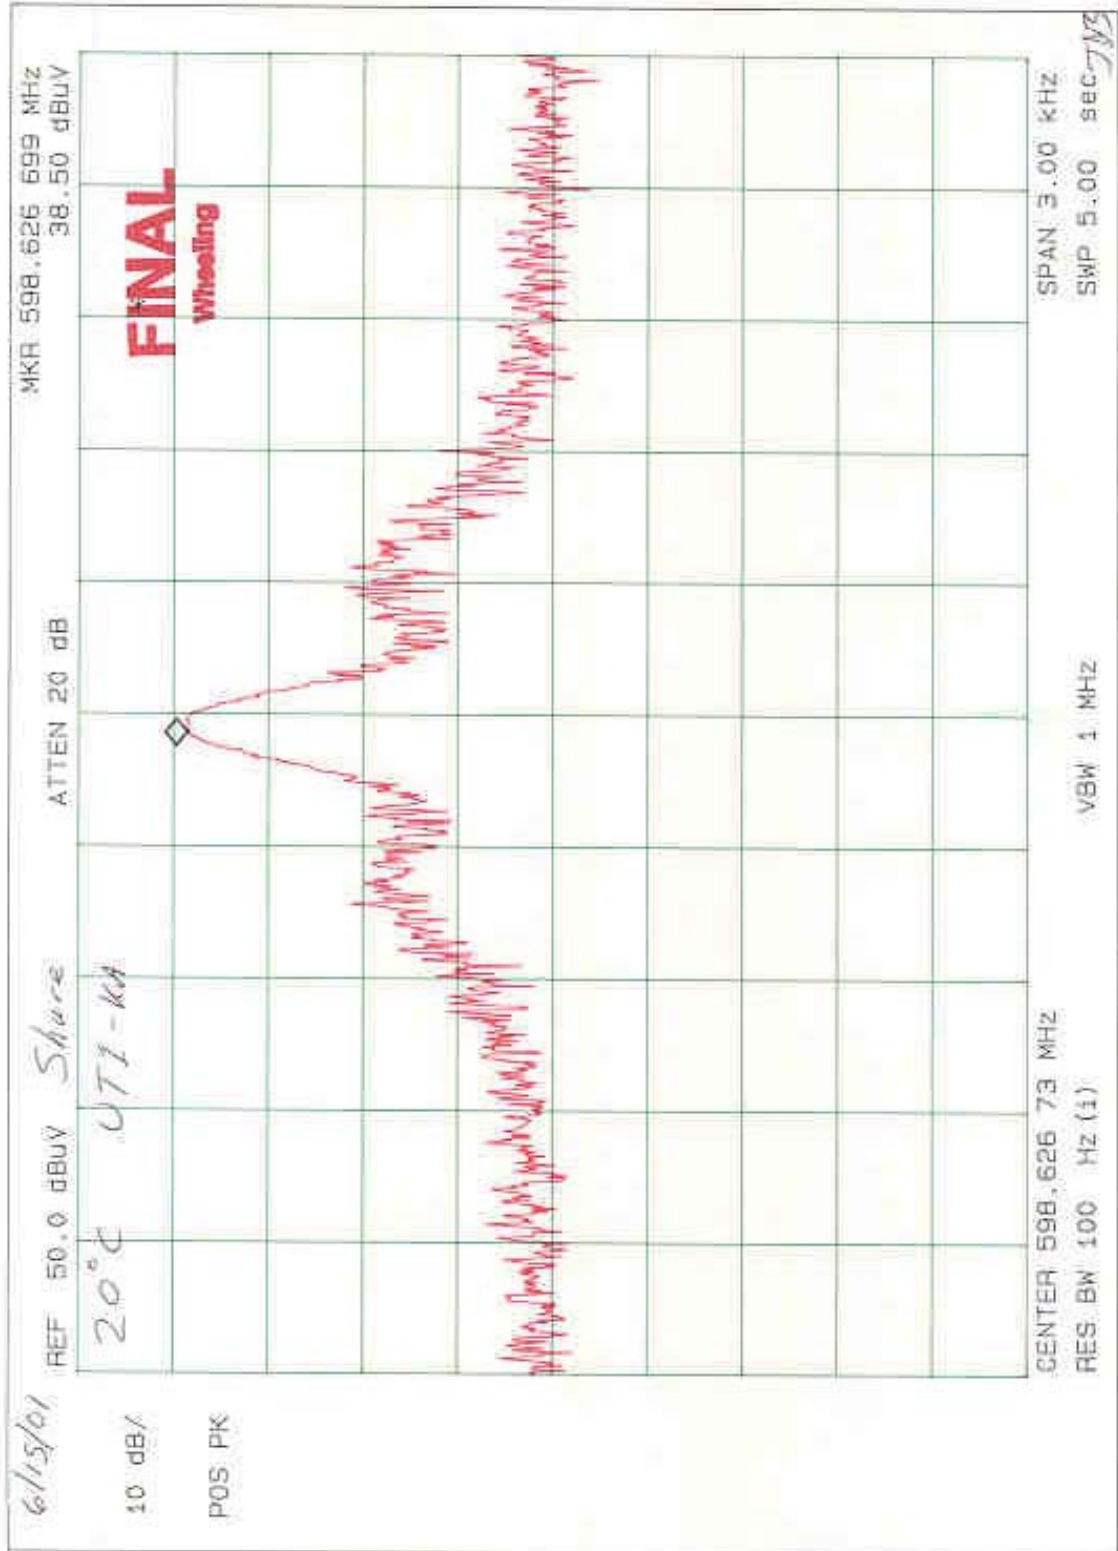

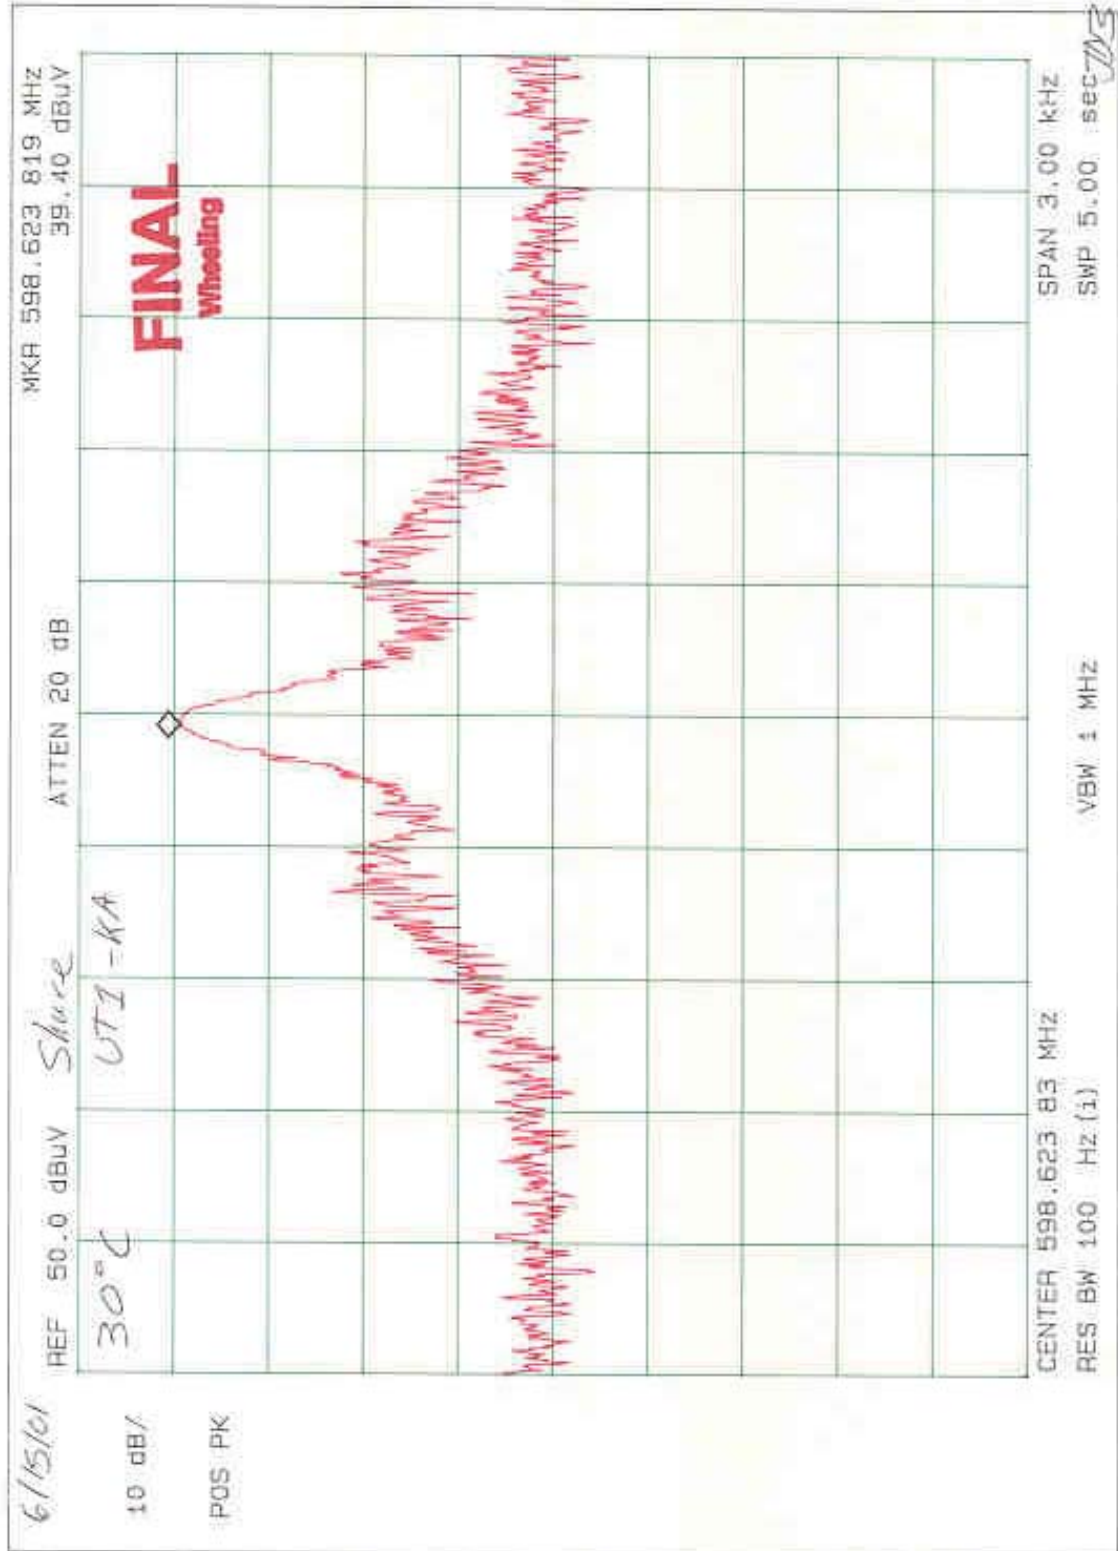

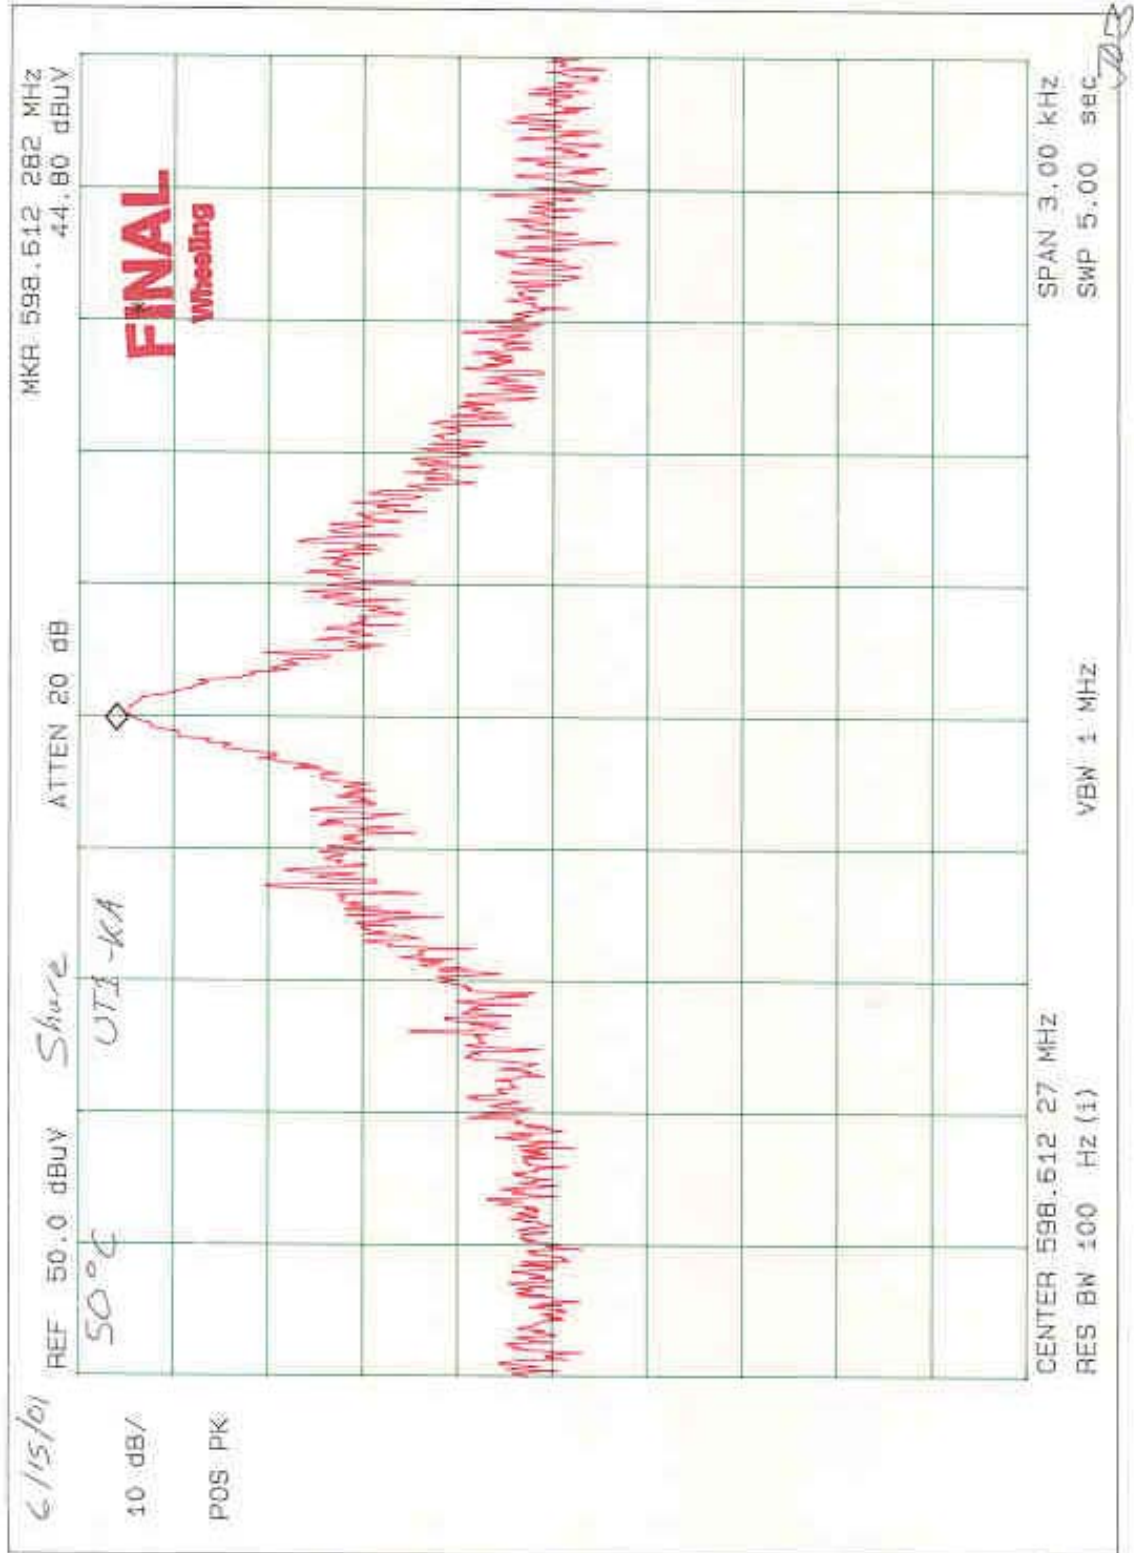



13.0 FREQUENCY STABILITY - PART 2.1055d (Voltage)

The frequency stability of Shure Incorporated UT1D Low Power Transmitter was measured by varying the primary supply voltage from 85% to 115% of nominal value for all equipment other than hand carried battery equipment.

FREQUENCY STABILITY FOR VOLTAGE VARIATION:

85%	0
100%	0
115%	0

This test was not run since the device is battery operated.

FREQUENCY STABILITY FOR HAND HELD DEVICES:

For hand carried, battery powered equipment, the supply voltage was reduced to the battery operating end point specified by the manufacturer. Readings were taken at the reduced end point and with a fresh battery:

Fresh Battery verses Battery end point:

Frequency #1 **1202.4 Hz**
Frequency #2 **0 Hz**
Frequency #3 **0 Hz**
Frequency #4 **0 Hz**
Frequency #5 **0 Hz**
Frequency #6 **0 Hz**

As stated in Part 74, Section 74.861 e-4 the Frequency Tolerance and Margin for this range are as follows:

Frequency Tolerance: 0.00005

Limit: 29.9 kHz

Margin: 28.7 kHz

This is well within the specified limits.



GRAPHS TAKEN FOR FREQUENCY

STABILITY WHEN VARYING THE


PRIMARY SUPPLY VOLTAGE

PART 2.1055d

PART 2.1053

This is well within the specified limits.


◆ Delta 2 [T2] RBW 2 kHz RF Att 10 dB
 Ref Lvl 0.04 dB
 87 dBμV -801.60320640 Hz SWT 500 ms Unit dBμV

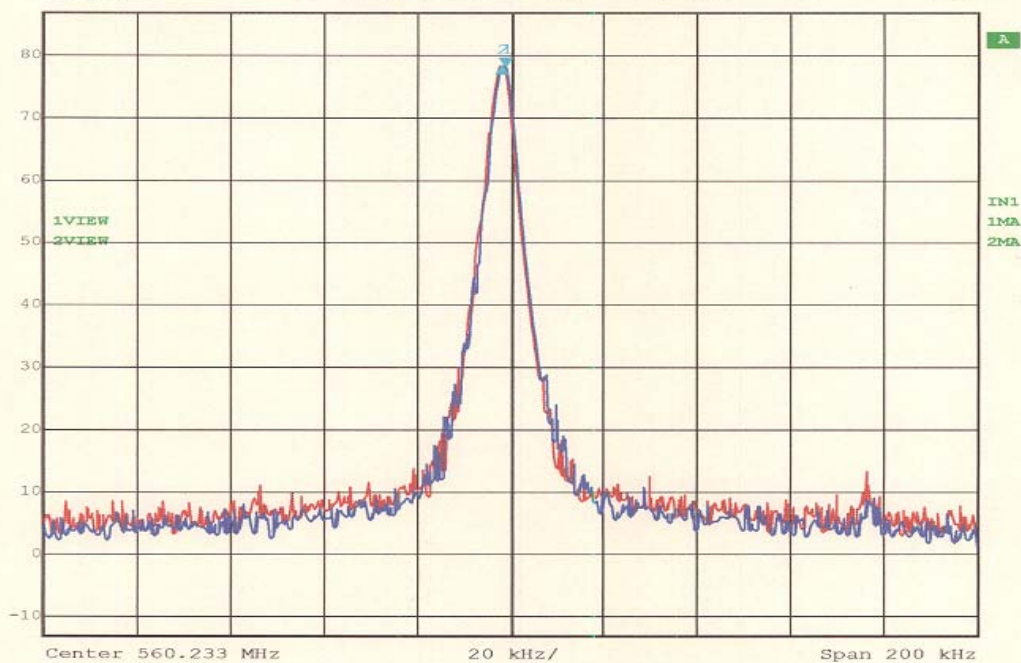

Title: Shure Inc., UT1 560 MHz Frequency Stability
 Comment A: Blue: Supply Voltage = 9.42 Volts DC
 Red: Supply Voltage = 6.88 Volts DC
 Date: 13.JUN.2001 11:01:34

Limit = 28 kHz
 margin = 27.2 kHz

FINAL ^{CB}
Genoa

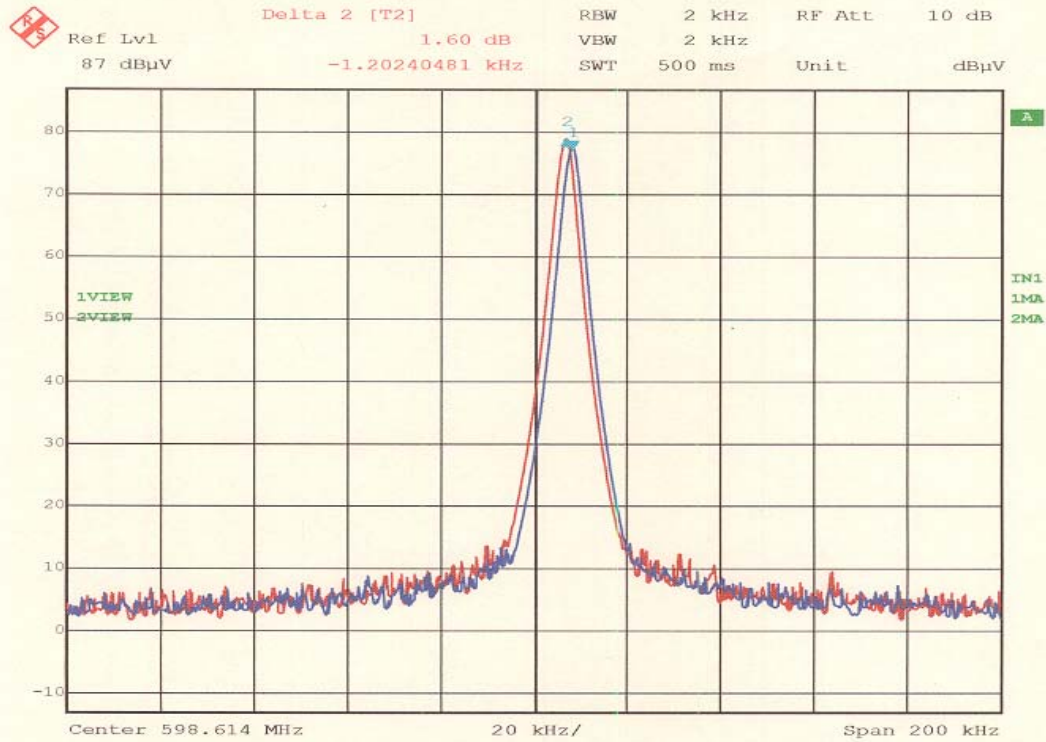

Title: Shure Inc., UT1 598.6 MHz Frequency Stability
 Comment A: Blue: Supply Voltage = 9.42 Volts DC
 Red: Supply Voltage = 6.96 Volts DC
 Date: 13.JUN.2001 12:35:40

Limit = 29.9 kHz
 margin = 28.7 kHz

FINAL ^{CP}
 Genoa



14.0 PHOTO INFORMATION AND TEST SET-UP

The test set-up can be seen on the accompanying photo page.

Item 0 Shure Incorporated UT1D Low Power Transmitter
FCC ID#: DD4UT1D SN: NA

Item 1

Item 2

Item 3

Item 4

Item 5

Item 6


Item 7

Item 8


Item 9

Item 10


15.0 RADIATED PHOTOS TAKEN DURING TESTING.

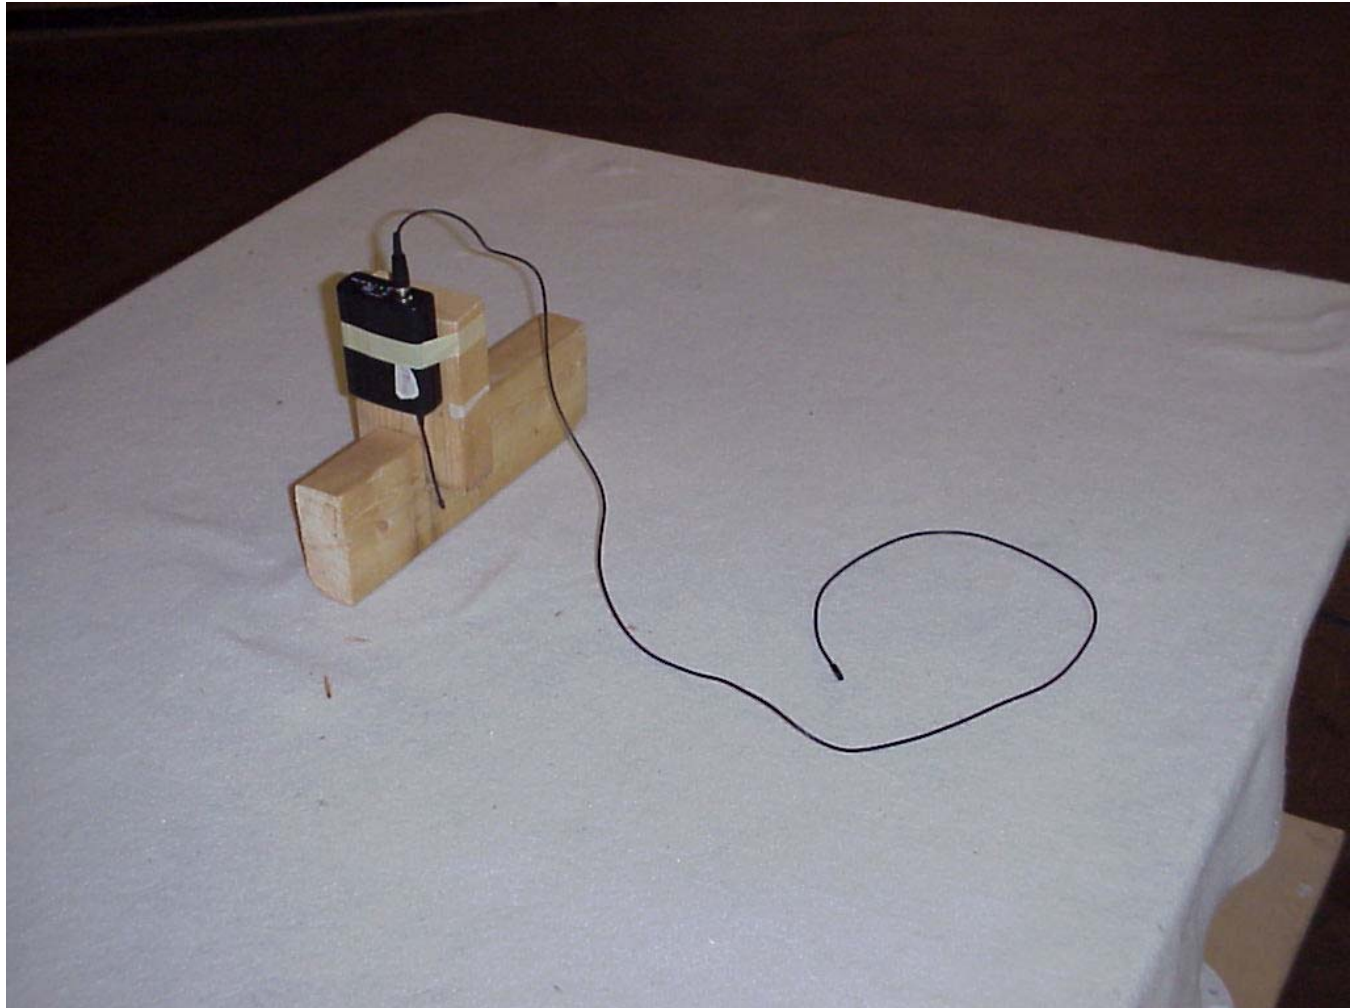

15.0 RADIATED PHOTOS TAKEN DURING TESTING

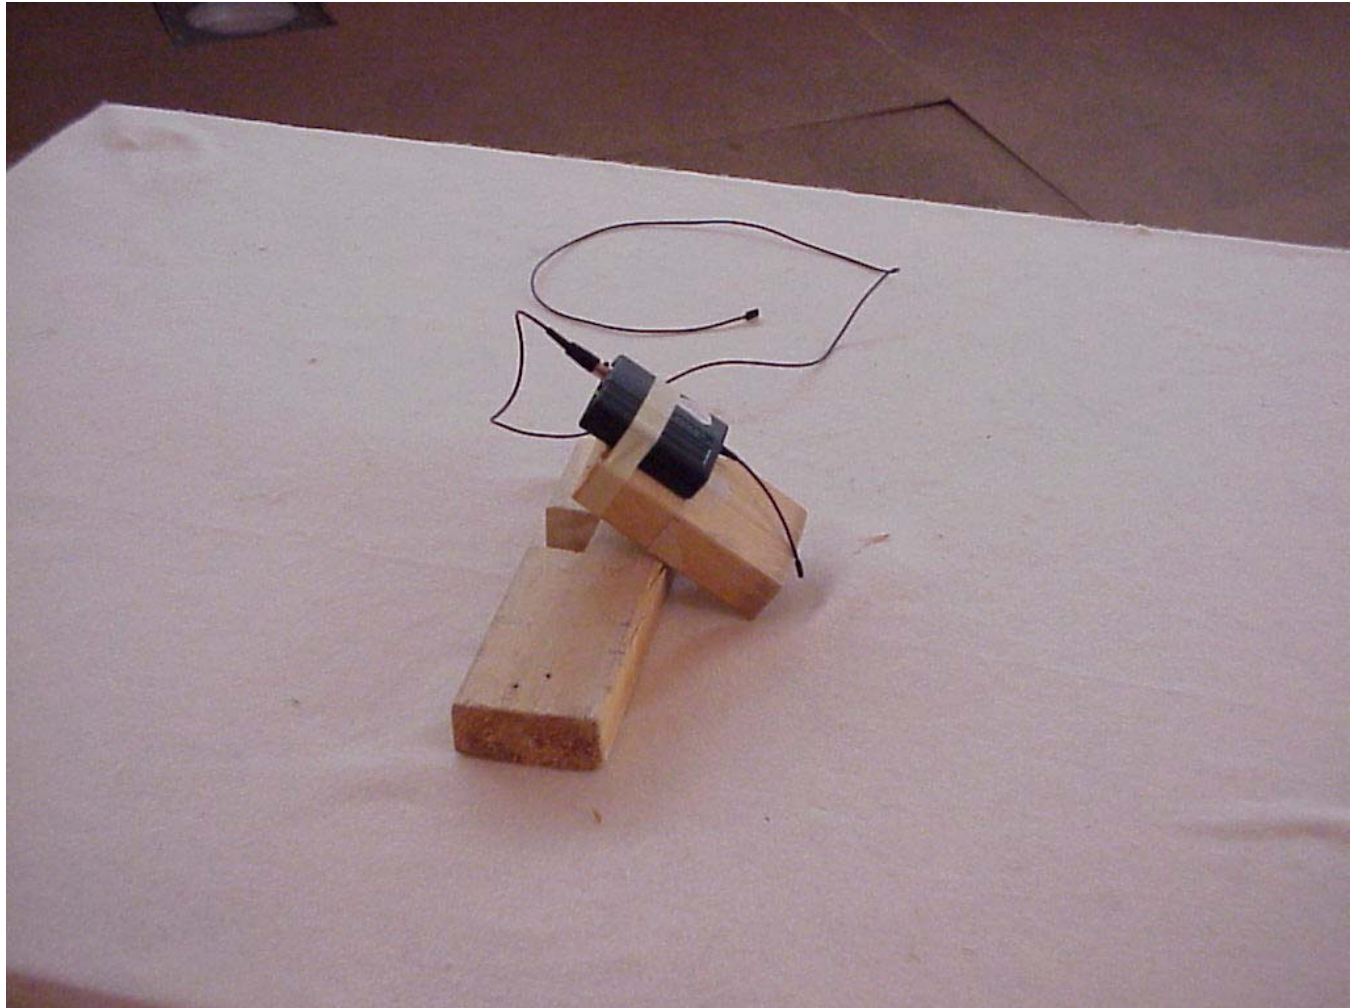

15.0 RADIATED PHOTOS TAKEN DURING TESTING

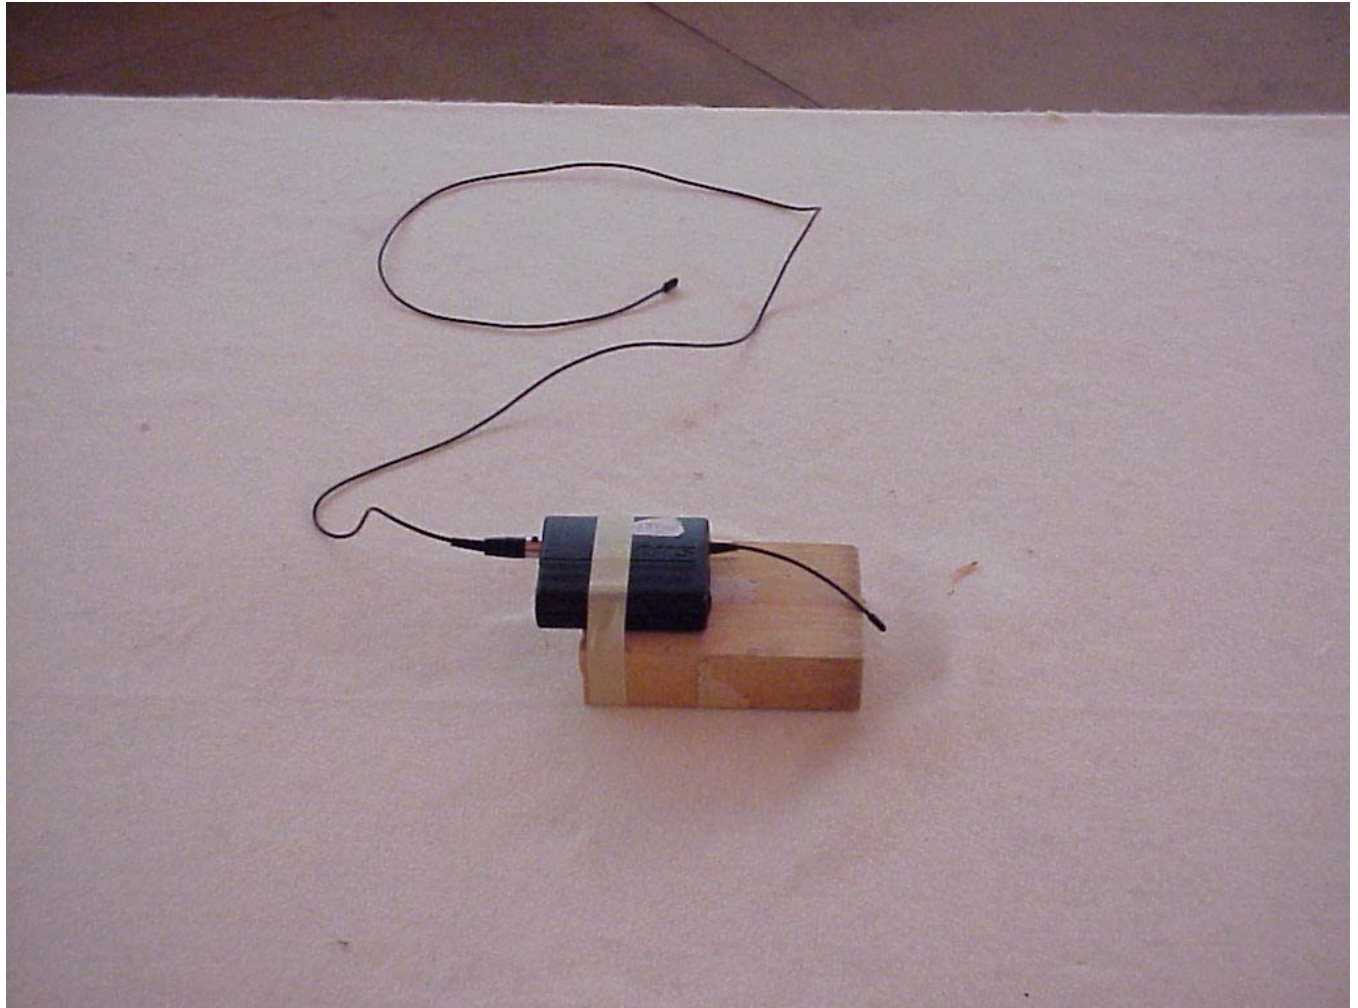



16.0 CHANGE INFORMATION

The following changes were implemented during the testing and must be incorporated into the production units to ensure compliance.

Change 1. There were no changes made at D.L.S. Electronic Systems, Inc.

Change 2.

Change 3.

Change 4.

Change 5.



16.0 CHANGE INFORMATION (CON'T)

Change 6.

Change 7.

Change 8.

Change 9.

Change 10.

The responsibility of implementing the changes listed in this report is accepted or I certify that no changes were made

by _____
Signature Title

for _____
Company Name Date



17.0 RESULTS OF TESTS

The emission test results can be seen on pages at the end of this report. Data sheets indicating the open field radiated measurements can also be found with this report. Those points on the radiated charts shown with a yellow mark are background frequencies that were verified during the test.

18.0 CONCLUSION

It was found that the Shure Incorporated UT1D Low Power Transmitter, Model Number UT1D, S/N **meets** the radio interference emission requirements of the FCC "Rules and Regulations", Part 74, Subpart H, Sections 74.801 to 74.882 for Low Power Auxiliary Stations operating in the 494 to 608 MHz Frequency Band. This test report relates only to the items tested.



TABLE 1 - EQUIPMENT LIST

Test Equipment	Manufacturer/Description	Model Number	Serial Number	Frequency Range	Cal Due Date
*Spectrum Analyzer	Hewlett/Packard	8566B	2240A 02041	25 Hz –22 GHz	10/01
Quasi-Peak Adapter	Hewlett/Packard	85650A	2043A 00121	10 kHz – 1 GHz	10/01
***Spectrum Analyzer	Hewlett/Packard	8591A	3009A 00700	9 kHz- 1.8 GHz	6/02
Receiver	Electrometrics	EMC-25 Mark-III	772	.01-1000 MHz	10/01
Meter Module	Electrometrics	CRM-25	162	.01-1000 MHz	10/01
Receiver	Electrometrics	EMC-25 Mark-III	804	.01-1000 MHz	10/01
Meter Module	Electrometrics	CRM-25	138	.01-1000 MHz	10/01
Receiver	Electrometrics	EMC-25 Mark-III	645	.01-1000 MHz	10/01
Meter Module	Electrometrics	CRM-25	116	.01-1000 MHz	10/01
Receiver	Electrometrics	EMC-30 Mark-III	44168	.01-1000 MHz	9/01
Antenna	Electrometrics	BIA-25	2453	20 - 200 MHz	4/02
Antenna	Electrometrics	LPA-25	1114	200 - 1000 MHz	4/02
Antenna	Electrometrics	BIA-25	2614	20 - 200 MHz	4/02
Antenna	Electrometrics	LPA-25	1205	200 - 1000 MHz	4/02
Antenna	Electrometrics	BIA-25	4785	20 - 200 MHz	4/02
Antenna	Electrometrics	LPA-25	4895	200 - 1000 MHz	4/02
Antenna	EMCO	3115	2479	1 – 18 GHz	3/02

*Firmware Version 29.9.86 Software Version 85864C Rev A

**Firmware Version 14.1.85 Software Version 85864C Rev A

***Firmware Version 5.1.3 Software Version 82301-12029 Rev C

I/O Initial Calibration Only