

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: sgs\_internet\_operations@sgs.com

Report No.: SZEM120300108101

Page: 1 of 87

## FCC REPORT

**Application No:** SZEM1203001081RF  
**Applicant:** MAT GLOBAL SOLUTIONS, SL  
**Manufacturer:** ETHER ELECTRONICS CO., LTD.  
**Factory:** ETHER ELECTRONICS CO., LTD.  
**Product Name:** Bluetooth hands free kit  
**Model No.(EUT):** T-HSA  
**FCC ID:** DDOHSA  
**Standards:** FCC CFR Title 47 Part 15 (2010)  
**Date of Receipt:** 2012-03-14  
**Date of Test:** 2012-03-27 to 2012-05-02  
**Date of Issue:** 2012-05-10

<b>Test Result:</b>	<b>PASS *</b>
---------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	FCC CFR Title 47 Part 15C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
<b>AC Power Line Conducted Emission</b>	FCC CFR Title 47 Part 15C Section 15.207	ANSI C63.10 (2009)	PASS
<b>Conducted Peak Output Power</b>	FCC CFR Title 47 Part 15C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
<b>20dB Occupied Bandwidth</b>	FCC CFR Title 47 Part 15C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
<b>Carrier Frequencies Separation</b>	FCC CFR Title 47 Part 15C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
<b>Hopping Channel Number</b>	FCC CFR Title 47 Part 15C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
<b>Dwell Time</b>	FCC CFR Title 47 Part 15C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	FCC CFR Title 47 Part 15C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
<b>Band-edge for RF Conducted Emissions</b>	FCC CFR Title 47 Part 15C Section 15.247(d)	ANSI C63.10 (2009)	PASS
<b>RF Conducted Spurious Emissions</b>	FCC CFR Title 47 Part 15C Section 15.247(d)	ANSI C63.10 (2009)	PASS
<b>Radiated Spurious emissions</b>	FCC CFR Title 47 Part 15C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
<b>Band Edge (Radiated Emission)</b>	FCC CFR Title 47 Part 15C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

Model No.: T-HSA

Only the model No. T-HSA (Rounded Style) was test for primary, and the model No. T-HAS (Quadrat Style with black Shell) was test Radiated Emission, Conducted Emission, Spurious Emissions and Peak output power for difference. Since the electrical circuit, design, layout, components used and internal wiring were identical for the above items, the only difference on model number, case and outline.

### 3 Contents

	Page
<b>1 COVER PAGE</b>	1
<b>2 TEST SUMMARY</b>	2
<b>3 CONTENTS</b>	3
<b>4 GENERAL INFORMATION</b>	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF EUT	4
4.3 TEST ENVIRONMENT AND MODE	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 TEST LOCATION	6
4.6 TEST FACILITY	7
4.7 DEVIATION FROM STANDARDS	7
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	7
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
4.10 TEST INSTRUMENTS LIST	8
<b>5 TEST RESULTS AND MEASUREMENT DATA</b>	10
5.1 ANTENNA REQUIREMENT	10
5.2 CONDUCTED EMISSIONS	11
5.3 CONDUCTED PEAK OUTPUT POWER	17
5.4 20dB OCCUPY BANDWIDTH	30
5.5 CARRIER FREQUENCIES SEPARATION	36
5.6 HOPPING CHANNEL NUMBER	43
5.7 DWELL TIME	46
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS	52
5.9 SPURIOUS RF CONDUCTED EMISSIONS	59
5.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	65
5.11 RADIATED SPURIOUS EMISSION	66
5.11.1 Radiated Emission below 1GHz	68
5.11.2 Transmitter Emission above 1GHz	72
5.12 BAND EDGE (RADIATED EMISSION)	78-87

## 4 General Information

### 4.1 Client Information

Applicant:	MAT GLOBAL SOLUTIONS, SL
Address of Applicant:	C/ Sant Sebastià, 202 bis 1a-E08223 TERRASSA (Barcelona)-Spain
Manufacturer:	ETHER ELECTRONICS CO., LTD.
Address of Manufacturer:	4F, 5Building, DongFangMing Industrial Park, No.83, DaBao Road, BaoAn District, ShenZhen City, China
Factory:	ETHER ELECTRONICS CO., LTD.
Address of Factory:	4F, 5Building, DongFangMing Industrial Park, No.83, DaBao Road, BaoAn District, ShenZhen City, China

### 4.2 General Description of EUT

Name:	Bluetooth hands free kit
Mode No.:	T-HSA
Trade Mark:	Twins
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Sample Type:	portable production
Test Power Grade:	255
Test Software of EUT:	CSR blue suite
Antenna Type and Gain:	Type: Integral Gain: 2.5dBi
AC Adapter:	Model: PSM05R-050CHW (R) P RIMPART NO.:ASY-07559-001 INPUT: 100-240Vac, 50-60Hz, 0.15A, 10-20VA OUTPUT: 5VDC, 0.5A
EUT Power Supply:	Battery: 3.7V lithium battery
Test Voltage:	AC 120V/60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



### 4.3 Test Environment and Mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1015mbar

### 4.4 Description of Support Units

The EUT has been tested independent unit.

### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,  
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

## 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

## 4.9 Other Information Requested by the Customer

None.

## 4.10 Test Instruments List

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-10-26
11	Band filter	Amindeon	82346	SEL0094	2012-05-26

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2012-06-10
2	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2012-05-26
3	LISN	Rohde & Schwarz	ENV216	SEL0152	2012-10-23
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2012-05-26
5	Coaxial Cable	SGS	N/A	SEL0024	2012-05-29

<b>RF conducted</b>					
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Due date (yyyy-mm-dd)</b>
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29

<b>General used equipment</b>					
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Due date (yyyy-mm-dd)</b>
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<b>EUT Antenna:</b>	

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.5dBi.

## 5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10: 2009		
Test Frequency Range:	150KHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak      Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
5-30		60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"><li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li><li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li><li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li><li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li><li>5) In order to find the maximum emission, the relative positions of Equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.</li></ol>		

Test Setup:	
Test Mode:	Charge + transmitting with non hopping mode
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass


### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Rounded Style


Live Line:

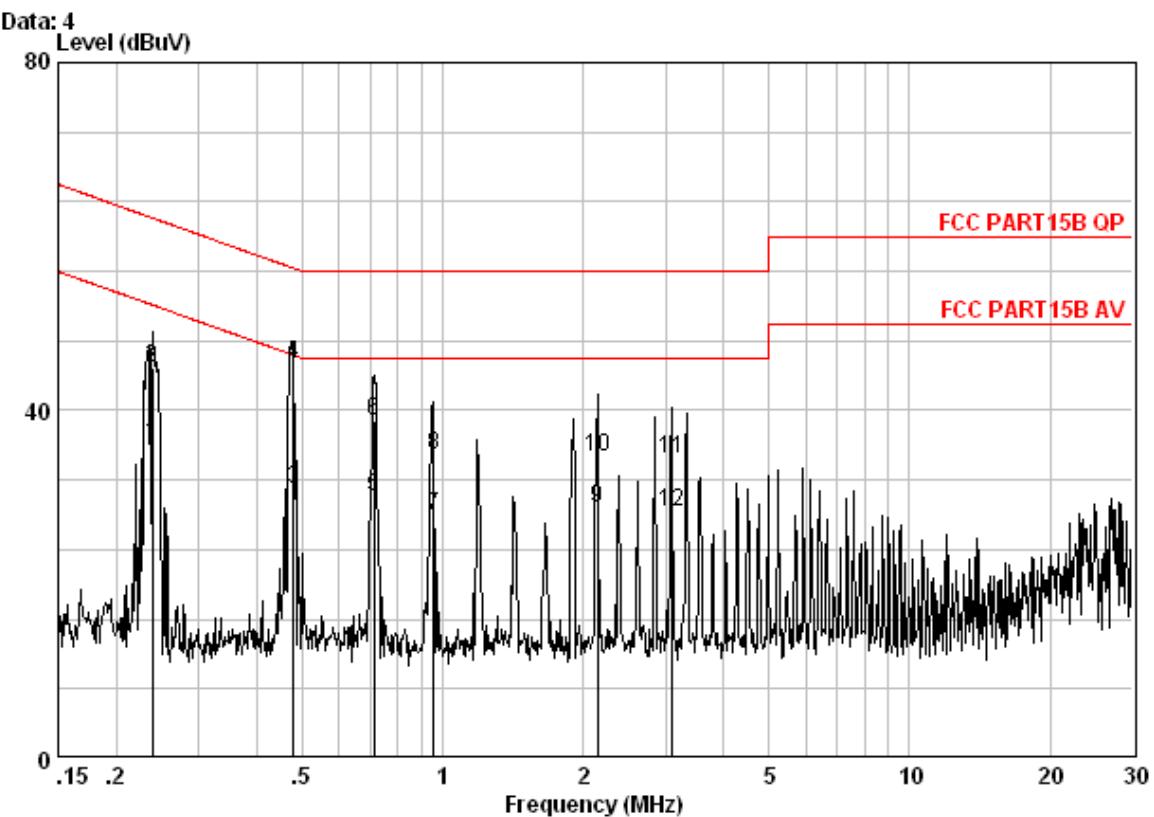

Site : Shielding Room  
Condition : FCC PART15B QP CE-20101216 LINE  
Job No. : 1081RF  
Mode : Charge+transmitting  
: T-HSA

Freq	Cable	LISN	Read	Limit	Over	Remark
	MHz	dB	dB	dBuV	dBuV	
1	0.23910	0.04	9.60	26.46	36.10	52.13 -16.02 Average
2	0.23910	0.04	9.60	35.28	44.92	62.13 -17.20 QP
3	0.47800	0.06	9.60	21.28	30.94	46.37 -15.43 Average
4	0.47800	0.06	9.60	35.62	45.28	56.37 -11.09 QP
5	0.71219	0.06	9.70	20.22	29.98	46.00 -16.02 Average
6	0.71219	0.06	9.70	29.04	38.80	56.00 -17.20 QP
7	0.95819	0.08	9.70	18.10	27.88	46.00 -18.12 Average
8	0.95819	0.08	9.70	25.15	34.93	56.00 -21.07 QP
9	2.144	0.12	9.71	18.99	28.82	46.00 -17.18 Average
10	2.144	0.12	9.71	24.76	34.59	56.00 -21.41 QP
11	3.090	0.14	9.75	24.54	34.43	56.00 -21.57 QP
12	3.090	0.14	9.75	18.35	28.24	46.00 -17.76 Average

## Neutral Line:

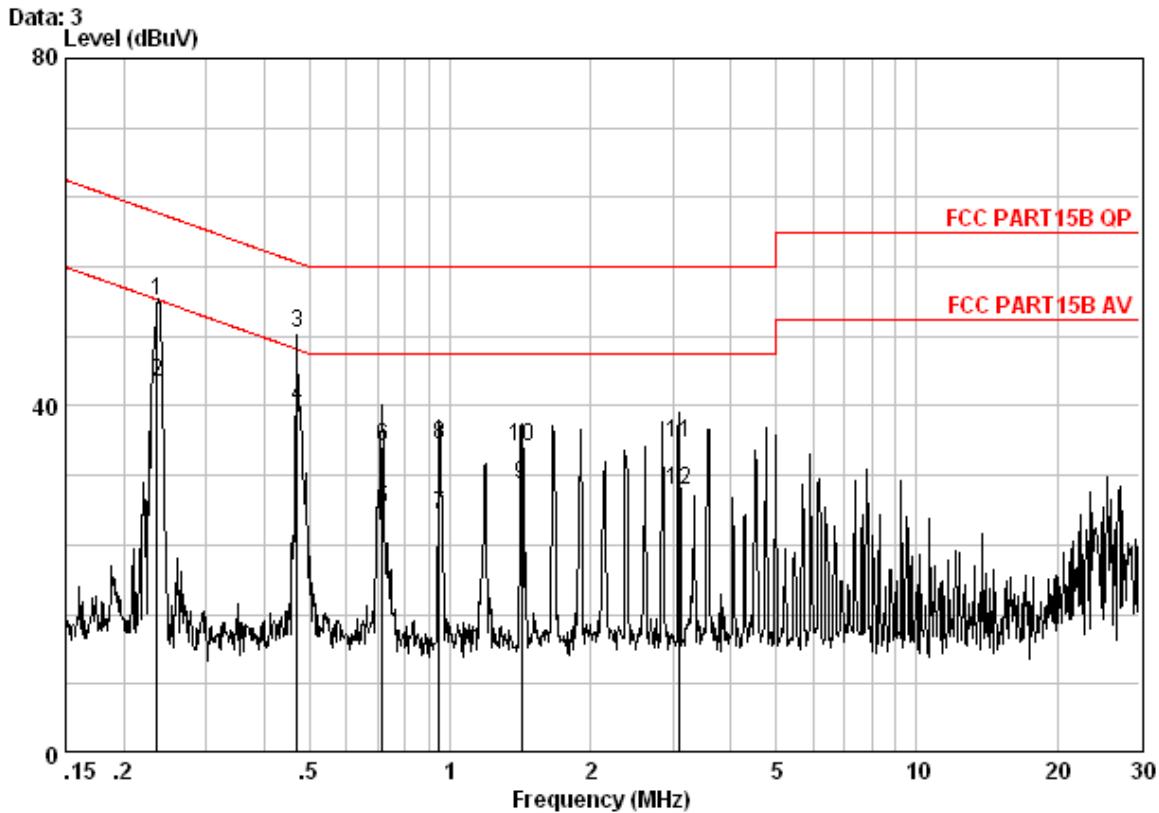


Site : Shielding Room  
 Condition : FCC PART15B QP CE-20101216 NEUTRAL  
 Job No. : 1081RF  
 Mode : Charge+transmitting  
 : T-HSA

	Freq	Cable	LISN	Read	Limit	Over	Remark
		Loss	Factor	Level	Level	Line	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1	0.23600	0.04	9.60	42.56	52.20	62.24	-10.03 QP
2	0.23600	0.04	9.60	33.18	42.82	52.24	-9.41 Average
3	0.47100	0.06	9.60	38.81	48.47	56.50	-8.03 QP
4	0.47100	0.06	9.60	30.21	39.87	46.50	-6.63 Average
5	0.71597	0.06	9.70	18.25	28.02	46.00	-17.98 Average
6	0.71597	0.06	9.70	25.56	35.32	56.00	-20.68 QP
7	0.94809	0.08	9.70	17.58	27.36	46.00	-18.64 Average
8	0.94809	0.08	9.70	25.86	35.64	56.00	-20.36 QP
9	1.426	0.10	9.70	21.06	30.86	46.00	-15.14 Average
10	1.426	0.10	9.70	25.48	35.28	56.00	-20.72 QP
11	3.090	0.14	9.75	25.78	35.67	56.00	-20.33 QP
12	3.090	0.14	9.75	20.44	30.33	46.00	-15.67 Average

Quadrat Style with black Shell

Live Line:

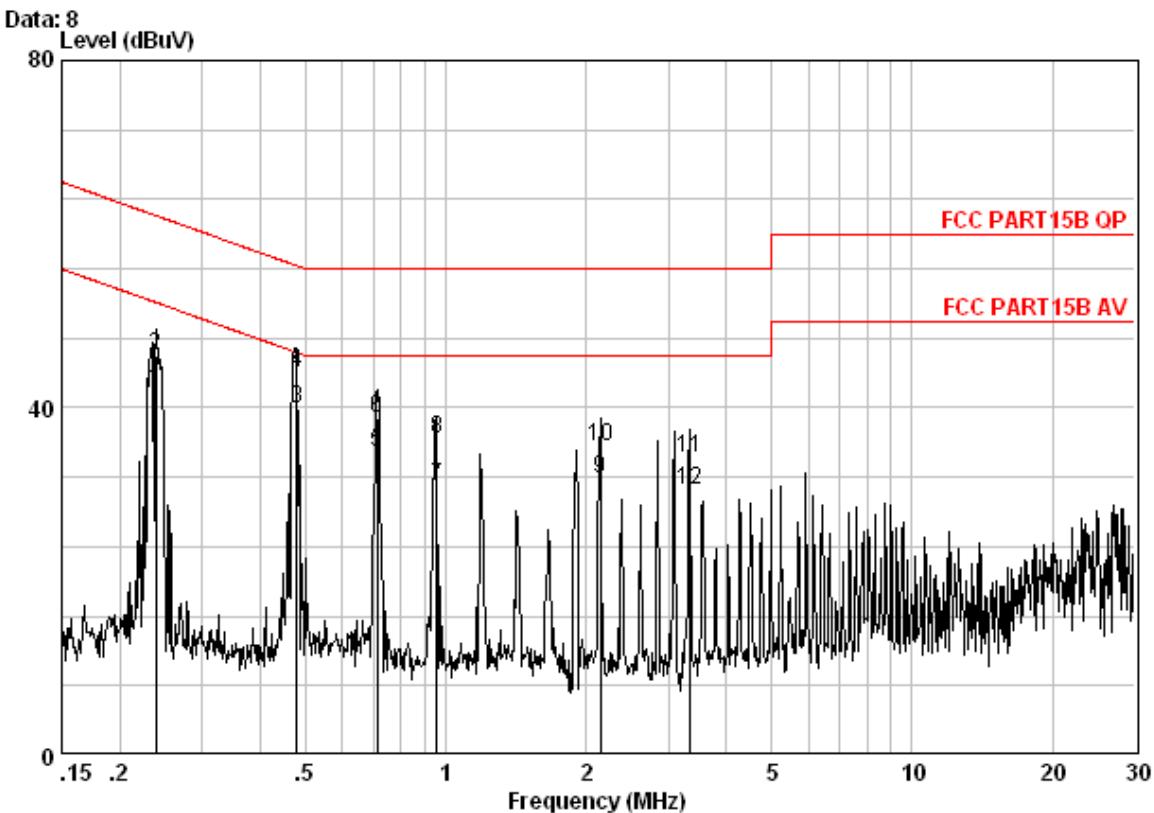


Site : Shielding Room  
 Condition : FCC PART15B QP CE-20101216 LINE  
 Job No. : 1081RF  
 Mode : Charge+transmitting

Freq	Cable	LISN	Read	Limit	Over	Remark	
	Loss	Factor	Level	Level	Line		
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.23910	0.04	9.60	32.46	42.10	52.13	-10.02 Average
2	0.23910	0.04	9.60	36.28	45.92	62.13	-16.20 QP
3	0.47865	0.06	9.60	30.27	39.93	46.36	-6.43 Average
4	0.47865	0.06	9.60	34.35	44.01	56.36	-12.35 QP
5	0.71219	0.06	9.70	25.22	34.98	46.00	-11.02 Average
6	0.71219	0.06	9.70	29.04	38.80	56.00	-17.20 QP
7	0.95819	0.08	9.70	21.10	30.88	46.00	-15.12 Average
8	0.95819	0.08	9.70	26.55	36.33	56.00	-19.67 QP
9	2.144	0.12	9.71	21.99	31.82	46.00	-14.18 Average
10	2.144	0.12	9.71	25.76	35.59	56.00	-20.41 QP
11	3.328	0.15	9.76	24.22	34.12	56.00	-21.88 QP
12	3.328	0.15	9.76	20.67	30.57	46.00	-15.43 Average



Neutral Line:

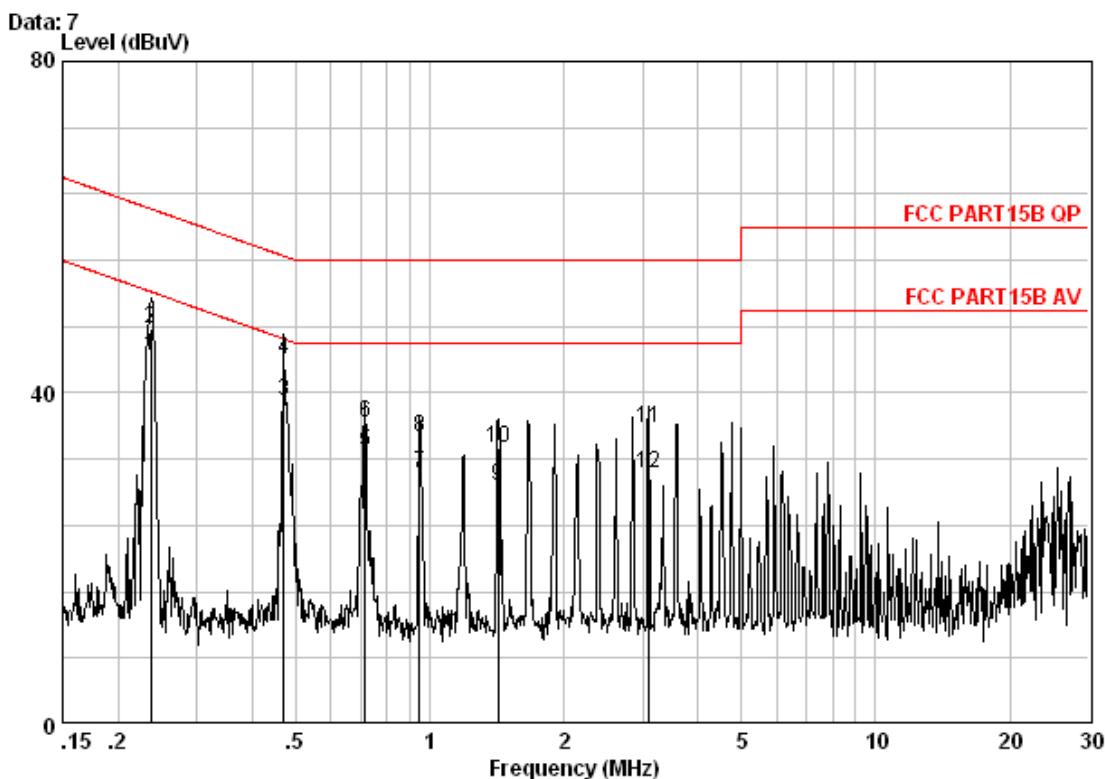


Site : Shielding Room  
 Condition : FCC PART15B QP CE-20101216 NEUTRAL  
 Job No. : 1081RF  
 Mode : Charge+transmitting

Freq	Cable	LISN	Read	Limit	Over			
	Loss	Factor	Level	Level	Line	Limit	Remark	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.23658	0.04	9.60	34.75	44.40	52.22	-7.82	Average
2	0.23658	0.04	9.60	38.07	47.71	62.22	-14.50	QP
3	0.47110	0.06	9.60	29.39	39.05	46.49	-7.44	Average
4	0.47110	0.06	9.60	34.29	43.95	56.49	-12.55	QP
5	0.71597	0.06	9.70	23.25	33.02	46.00	-12.98	Average
6	0.71597	0.06	9.70	26.56	36.32	56.00	-19.68	QP
7	0.94809	0.08	9.70	20.58	30.36	46.00	-15.64	Average
8	0.94809	0.08	9.70	24.86	34.64	56.00	-21.36	QP
9	1.426	0.10	9.70	19.06	28.86	46.00	-17.14	Average
10	1.426	0.10	9.70	23.48	33.28	56.00	-22.72	QP
11	3.090	0.14	9.75	25.78	35.67	56.00	-20.33	QP
12	3.090	0.14	9.75	20.44	30.33	46.00	-15.67	Average

## Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

### 5.3 Conducted Peak Output Power

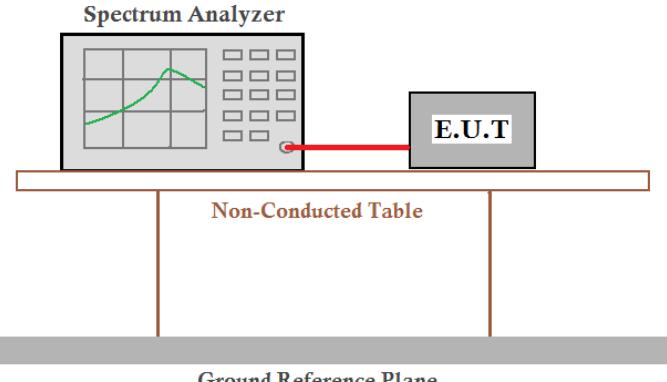Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2009
Test Setup:	 <p><b>Spectrum Analyzer</b> E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Limit:	30dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4$ DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Measurement Data****Rounded Style**

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	8.12	30.00	Pass
Middle	7.92	30.00	Pass
Highest	7.20	30.00	Pass

π/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.77	30.00	Pass
Middle	6.57	30.00	Pass
Highest	5.46	30.00	Pass

8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.94	30.00	Pass
Middle	6.74	30.00	Pass
Highest	5.81	30.00	Pass

**Quadrat Style with black Shell**

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.74	30.00	Pass
Middle	7.43	30.00	Pass
Highest	6.56	30.00	Pass

π/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.56	30.00	Pass
Middle	6.16	30.00	Pass
Highest	5.16	30.00	Pass


  

8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.83	30.00	Pass
Middle	6.53	30.00	Pass
Highest	5.51	30.00	Pass


**Test plot as follows:**

**Rounded Style**


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

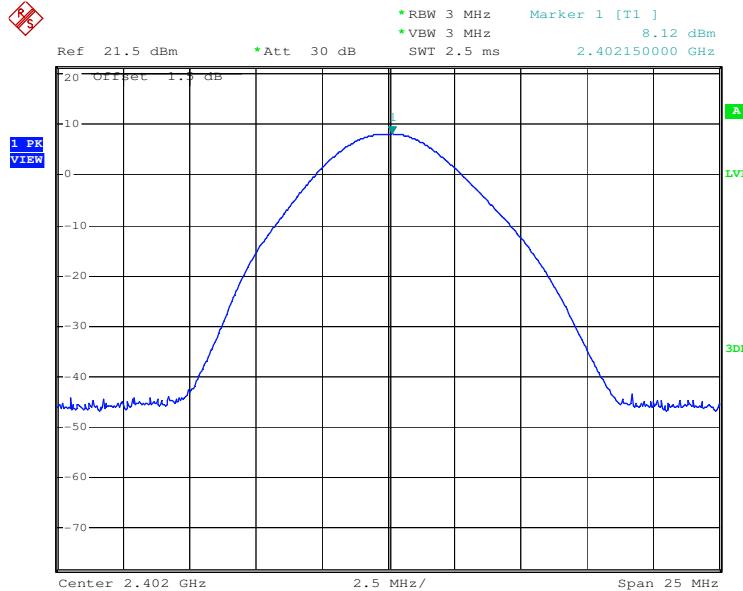


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

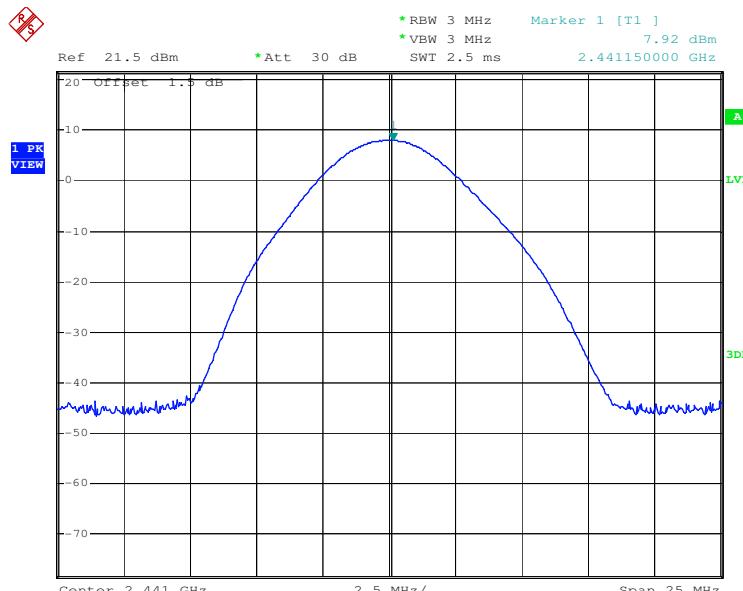


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

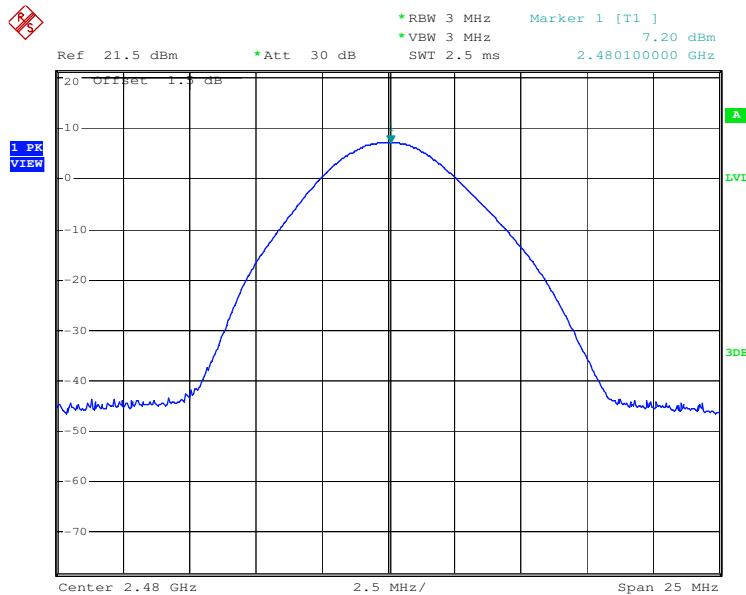


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

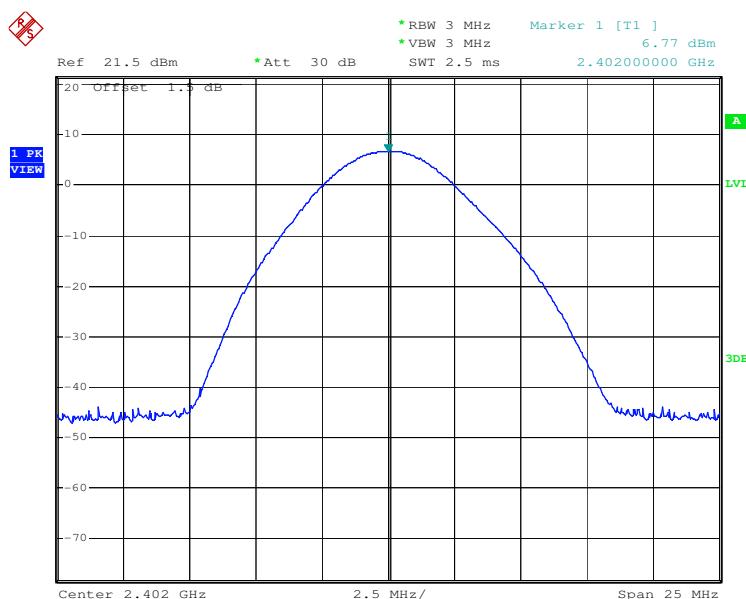


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

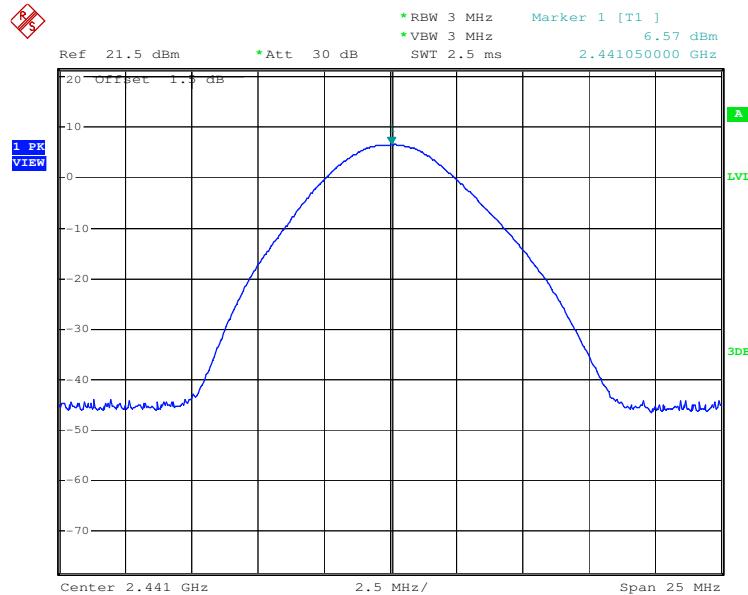


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

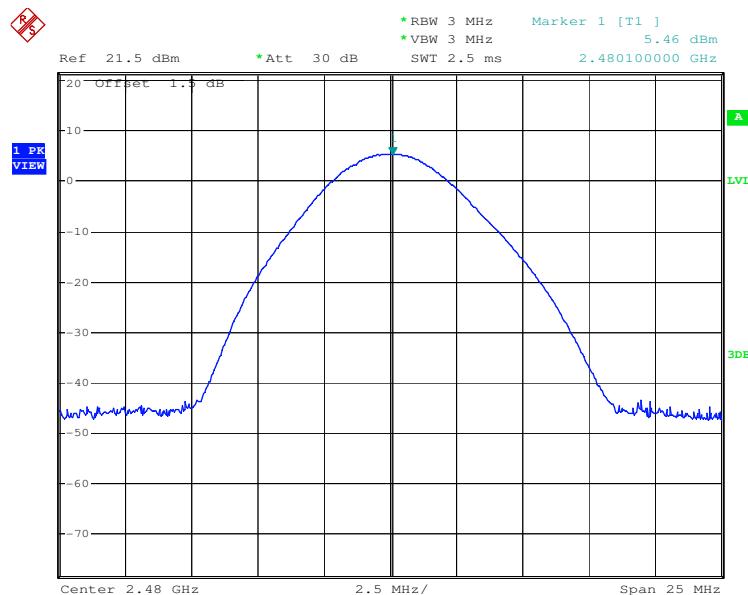


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

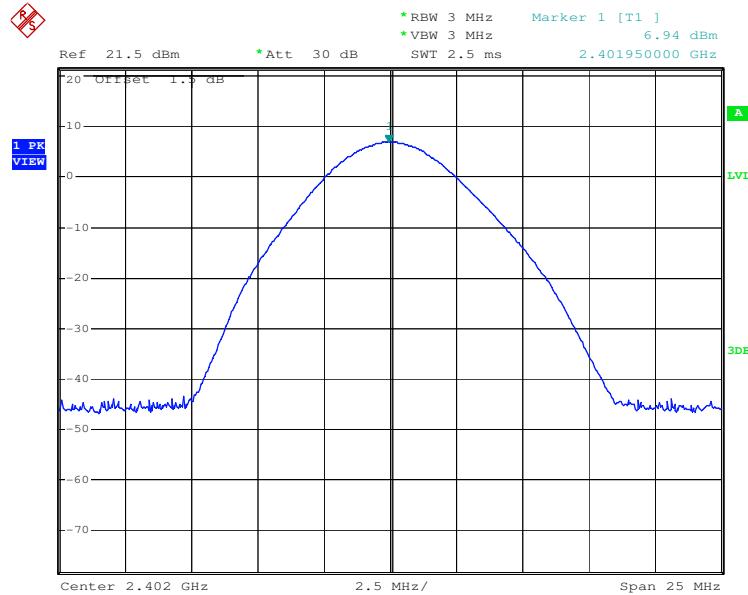

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

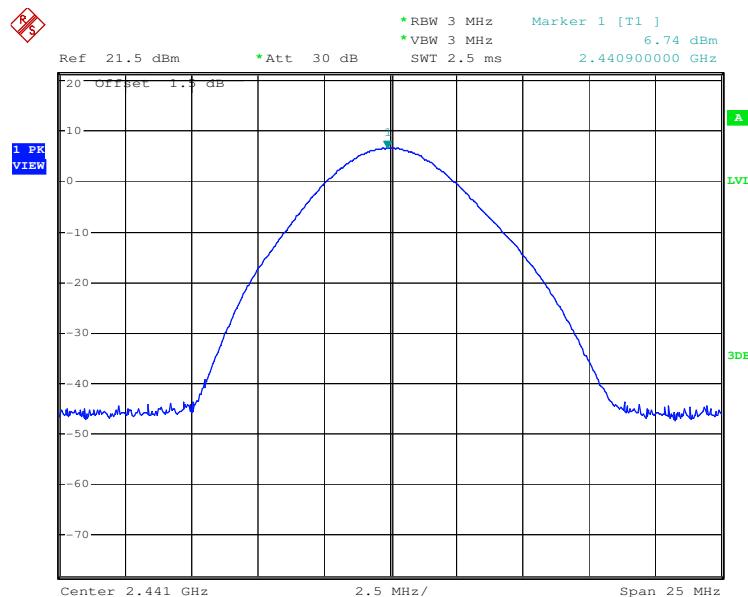


Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

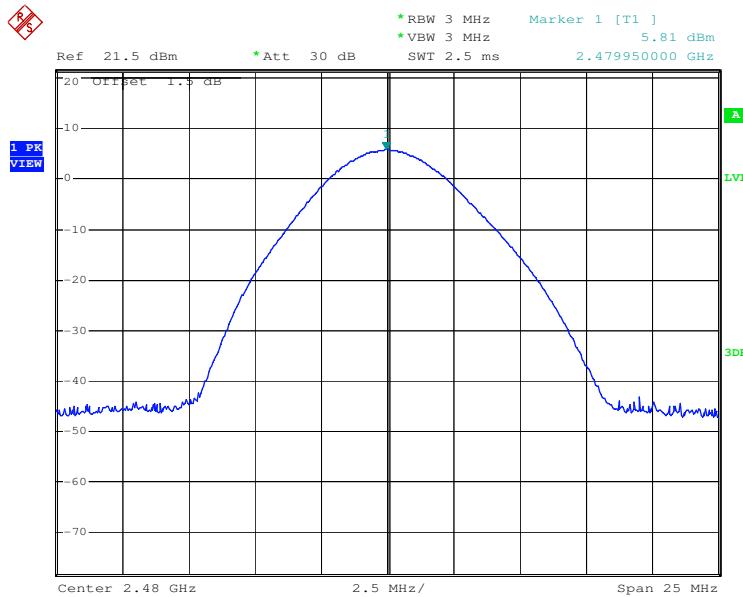


**Quadrat Style with black Shell**


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

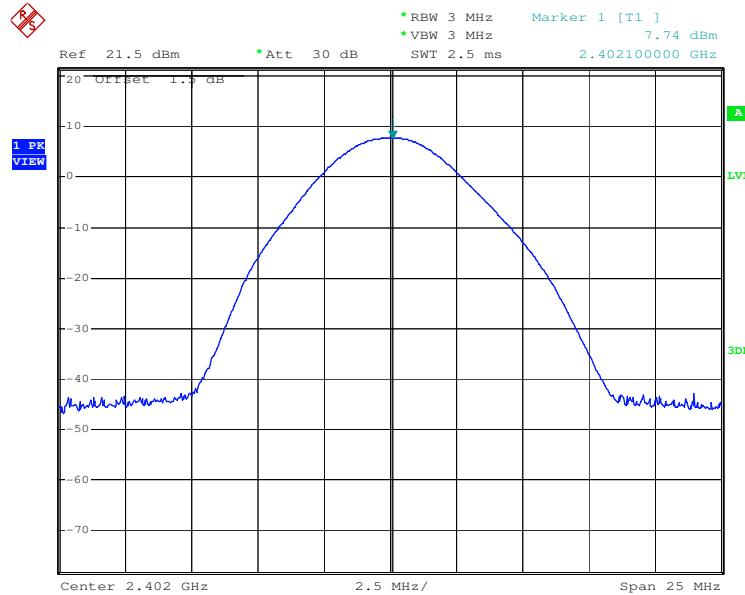


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

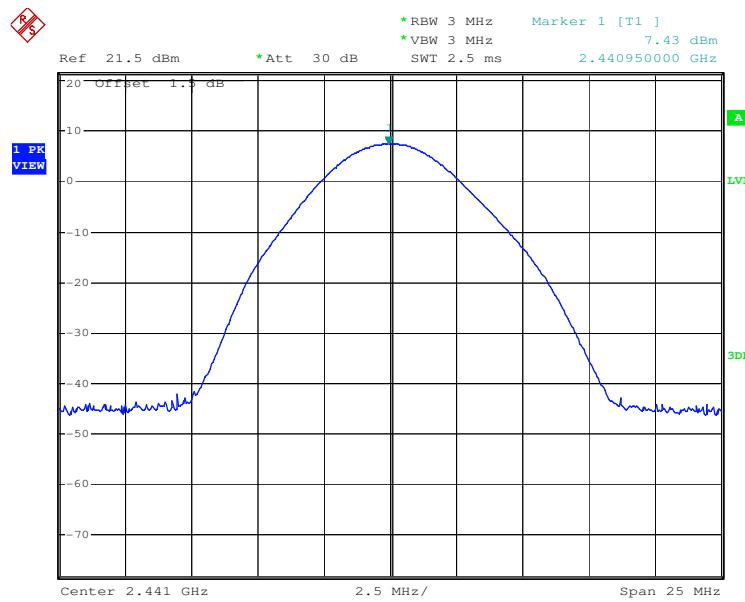


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

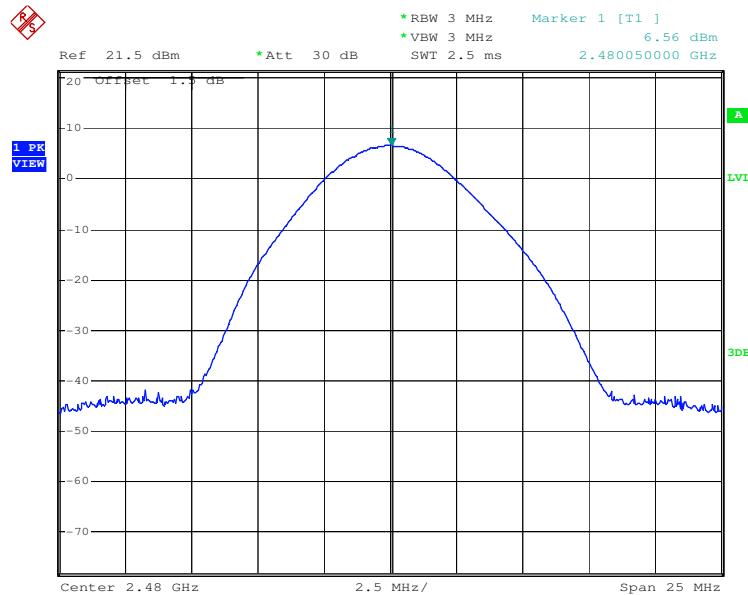


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

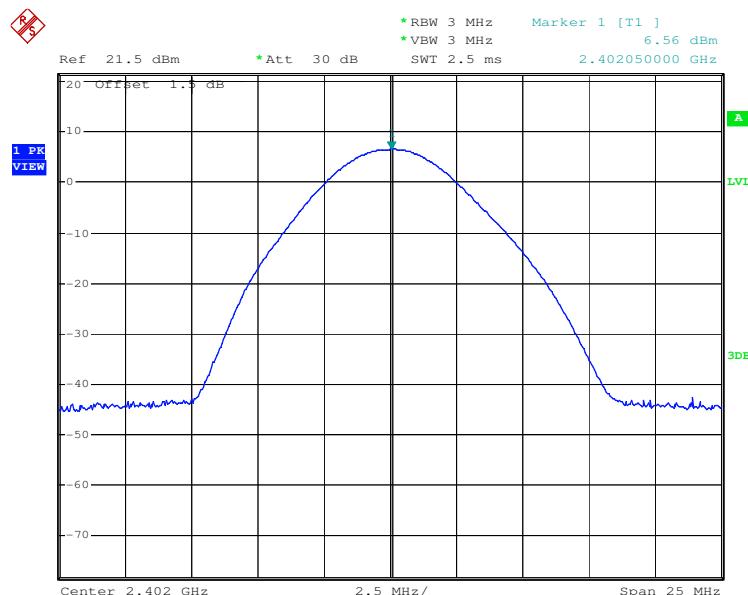


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

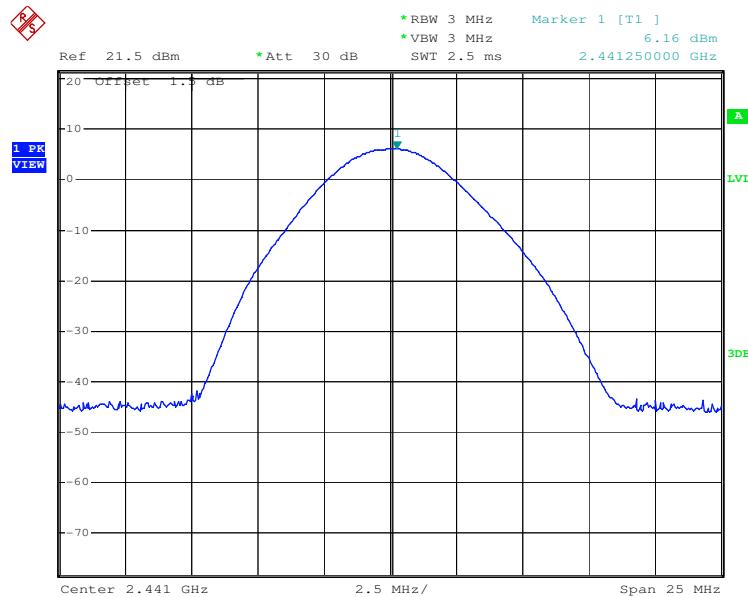


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

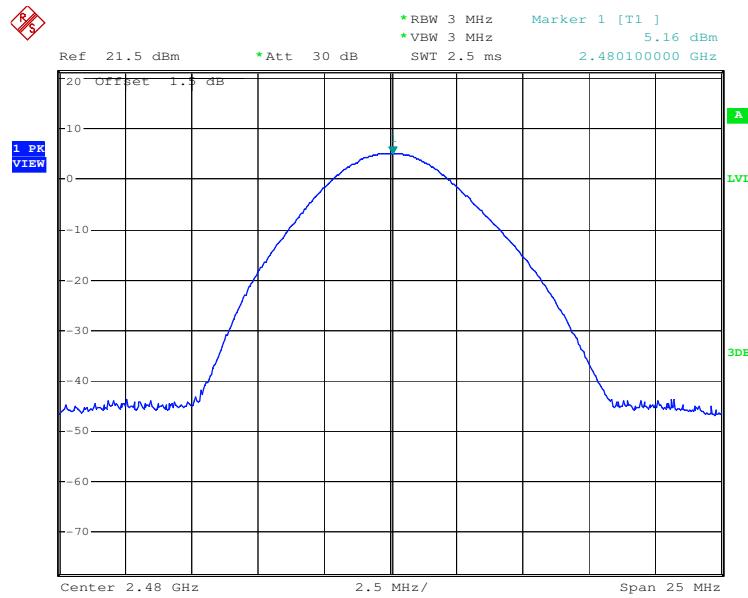


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

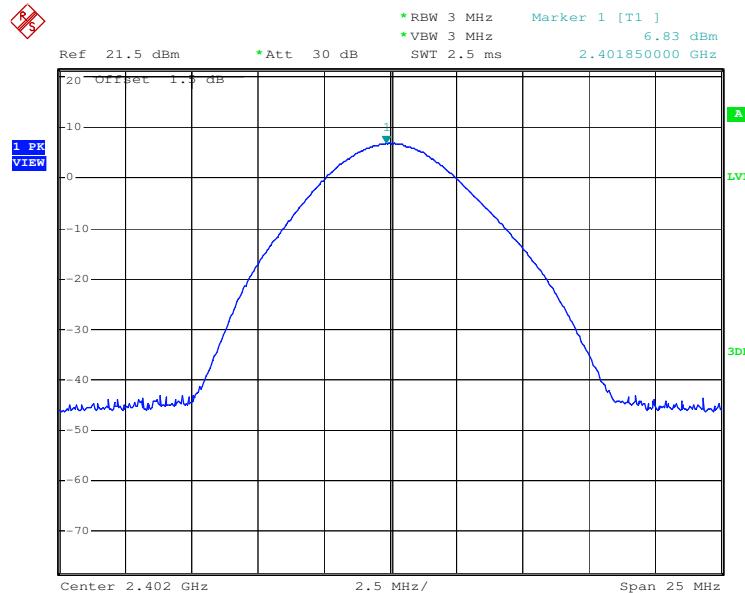

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

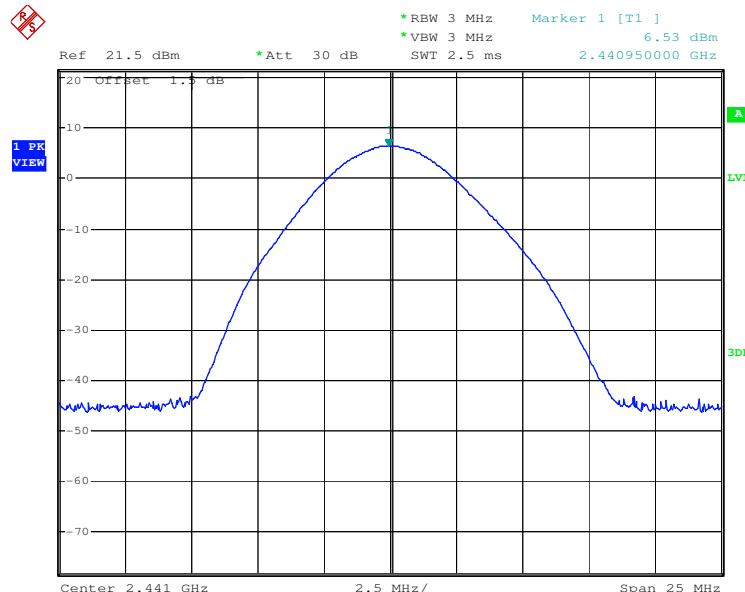

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

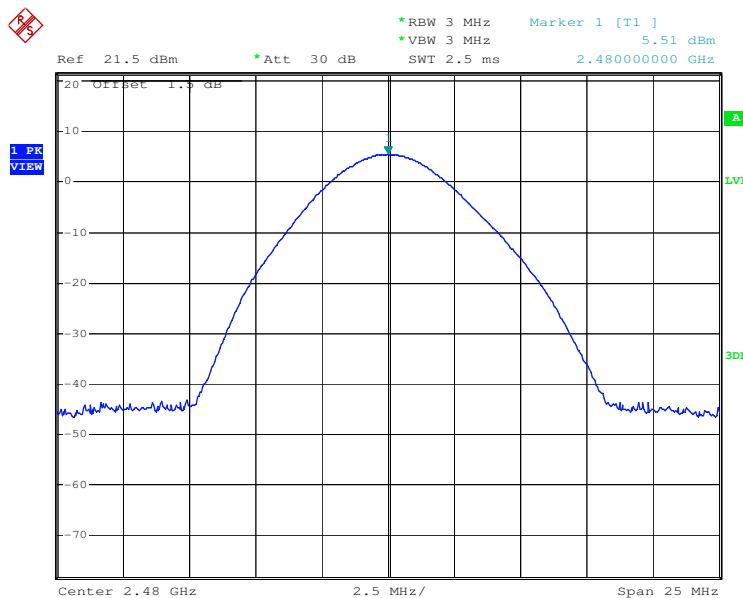

## 5.4 20dB Occupy Bandwidth


Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Test Setup:	
Limit:	NA
Exploratory Test Mode:	non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4$ DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type..
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

### Measurement Data


Test channel	20dB Occupy Bandwidth (KHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	1095	1380	1345
Middle	1095	1385	1340
Highest	1105	1375	1345

**Test plot as follows:**


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

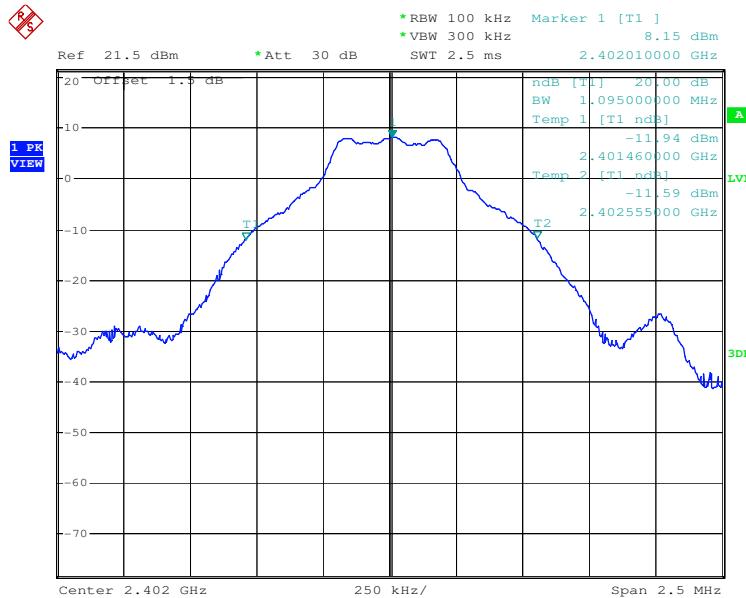

Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

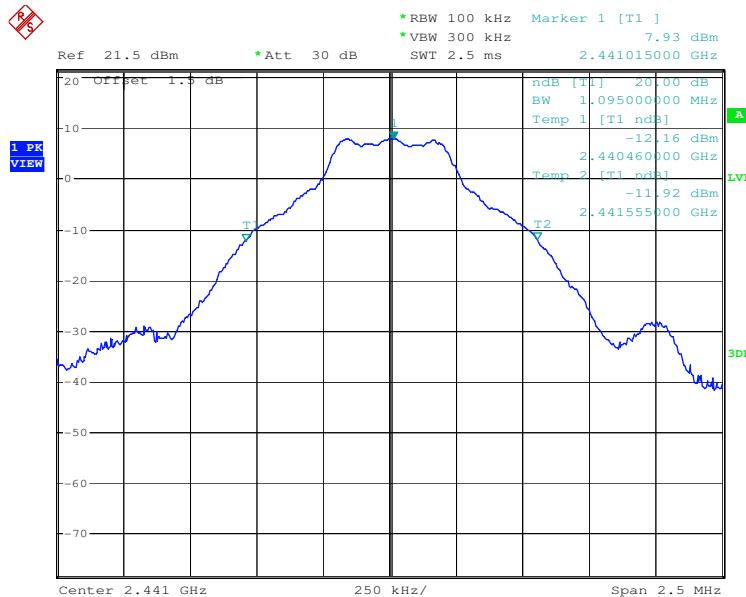


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

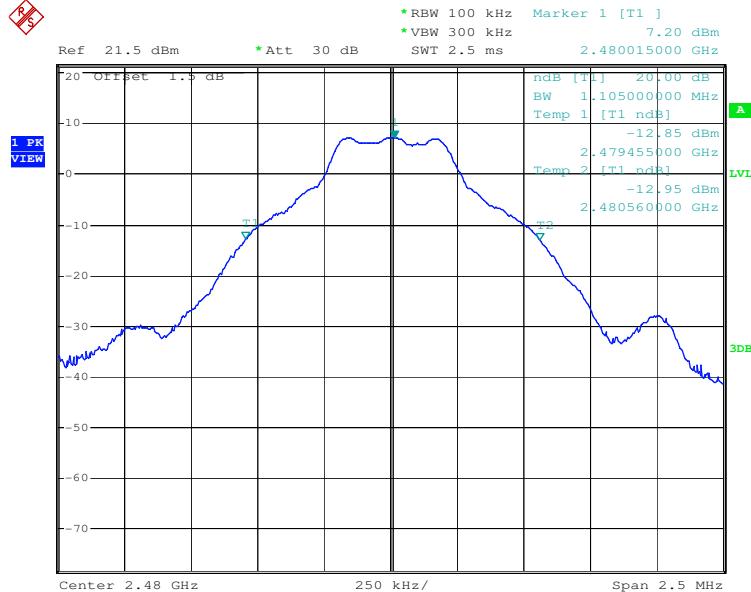


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------




Test mode:	π/4DQPSK	Test channel:	Middle
------------	----------	---------------	--------

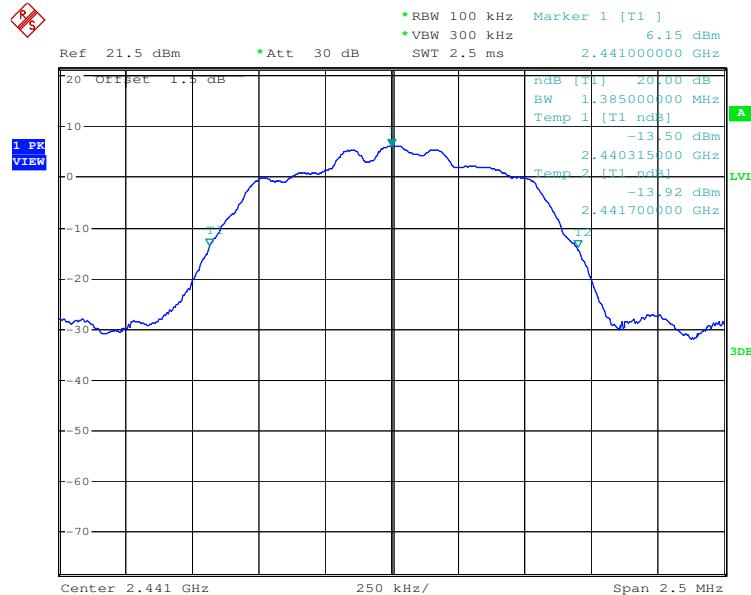


Test mode:	π/4DQPSK	Test channel:	Highest
------------	----------	---------------	---------

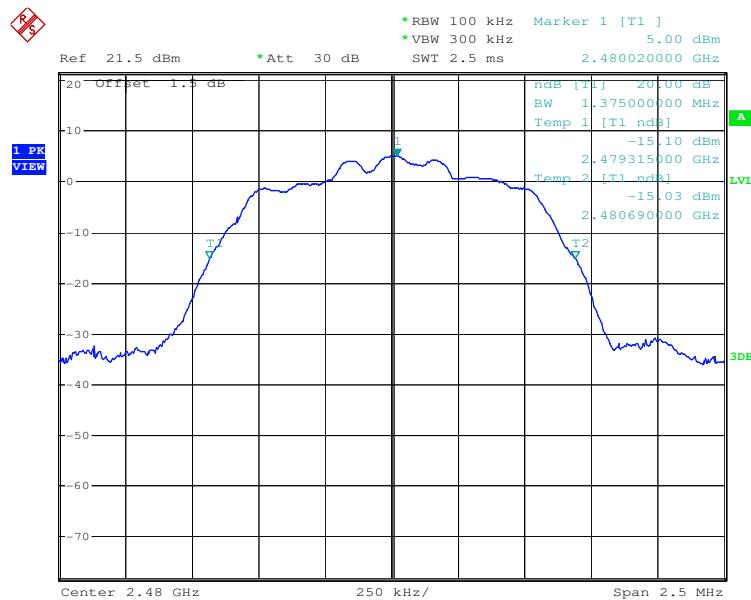


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

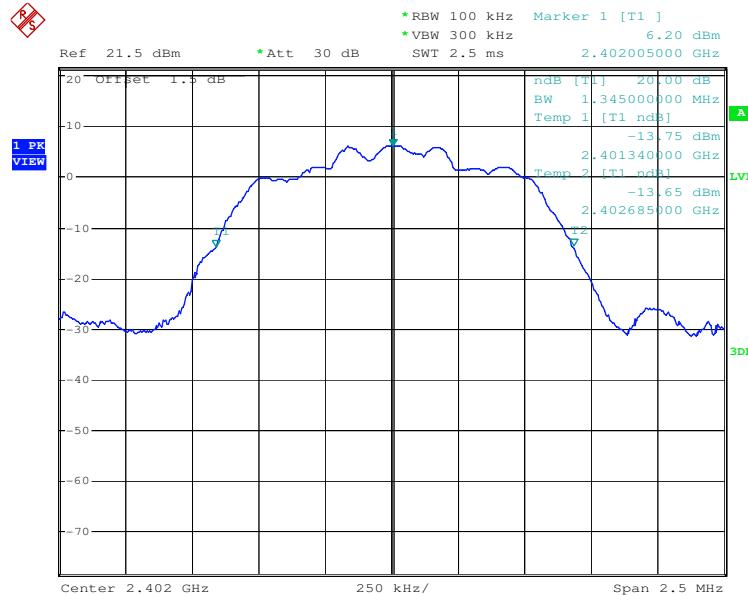

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

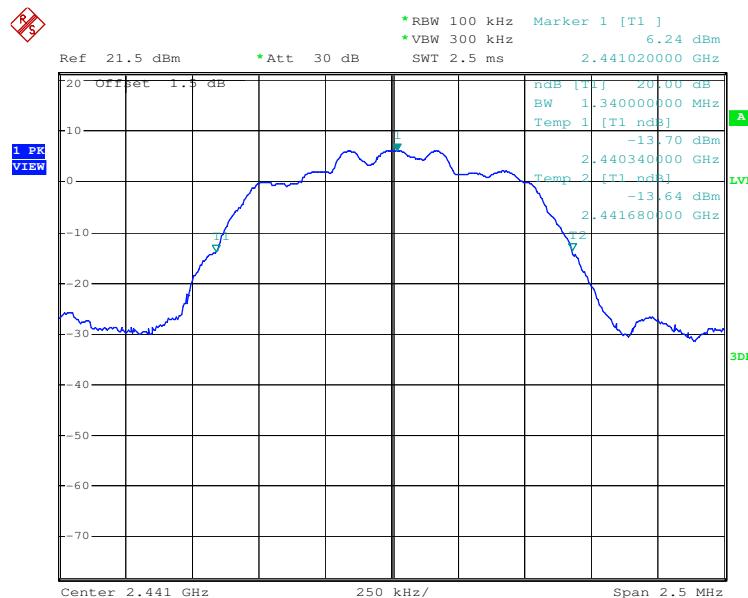


Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

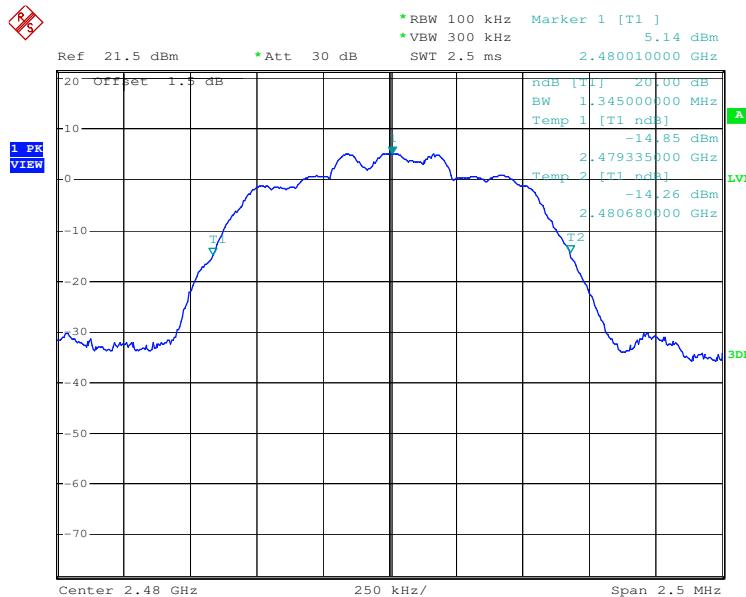

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 5.5 Carrier Frequencies Separation

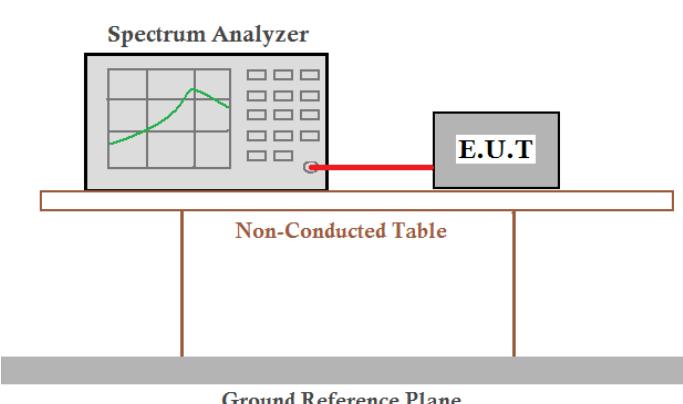Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Test Setup:	
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4$ DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Measurement Data**

GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥923.3	Pass
Middle	1000	≥923.3	Pass
Highest	1000	≥923.3	Pass

π/4DQPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥923.3	Pass
Middle	1000	≥923.3	Pass
Highest	1000	≥923.3	Pass


8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥923.3	Pass
Middle	1000	≥923.3	Pass
Highest	1000	≥923.3	Pass

Note: According to section 5.4,


Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	1105	736.7
π/4DQPSK	1385	923.3
8DPSK	1345	896.7

**Test plot as follows:**


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

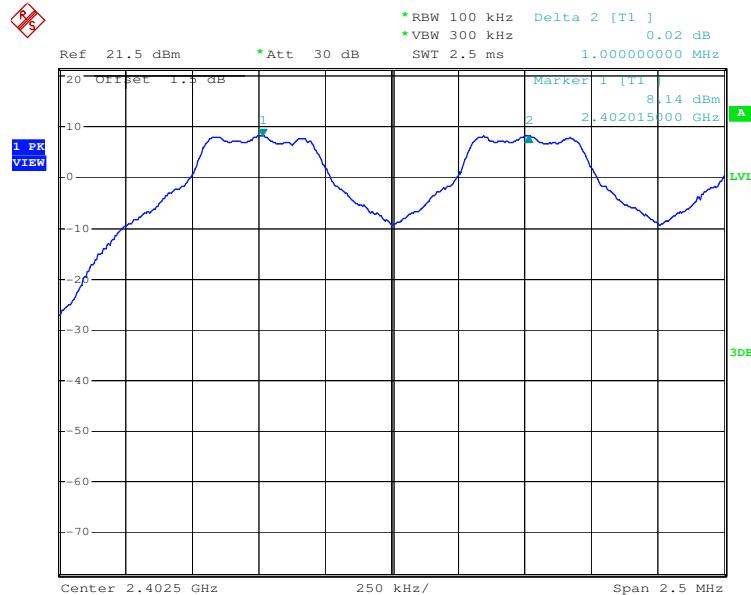


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

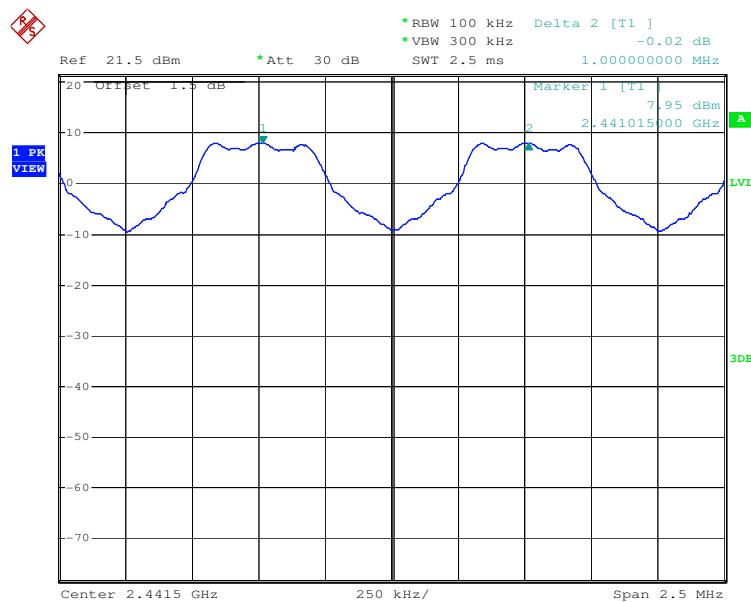


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

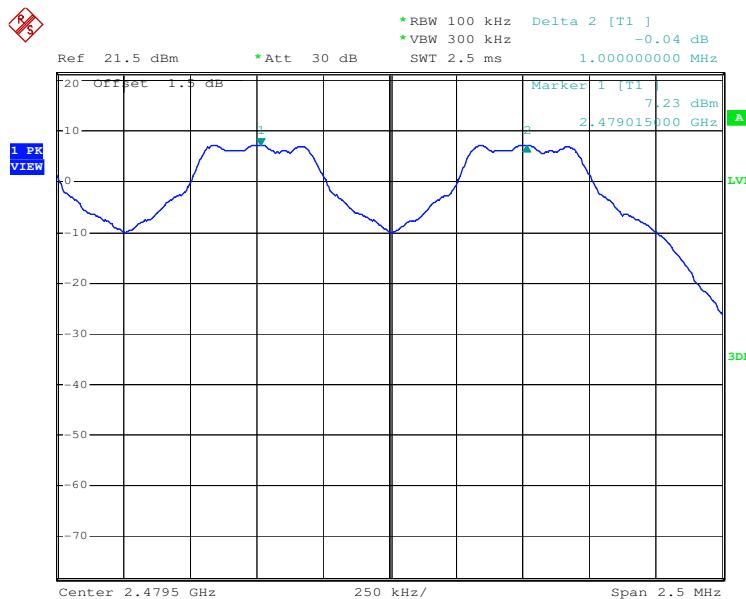


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

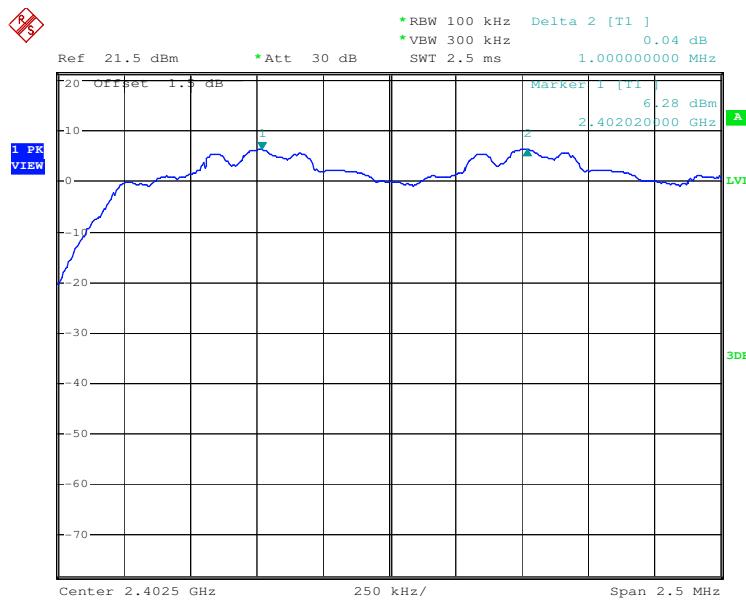


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

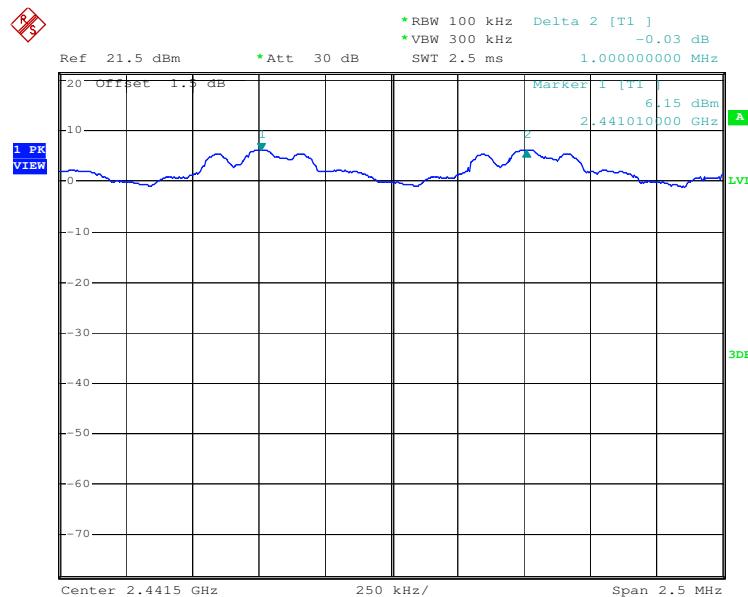


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

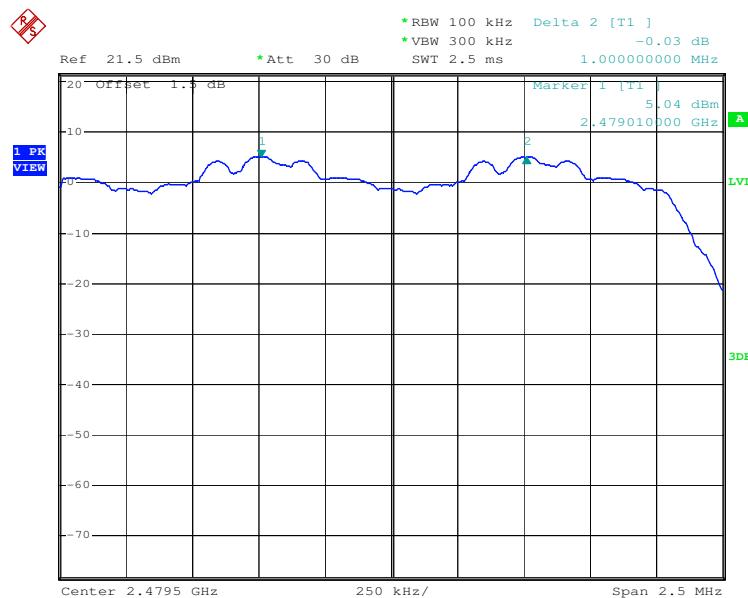


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

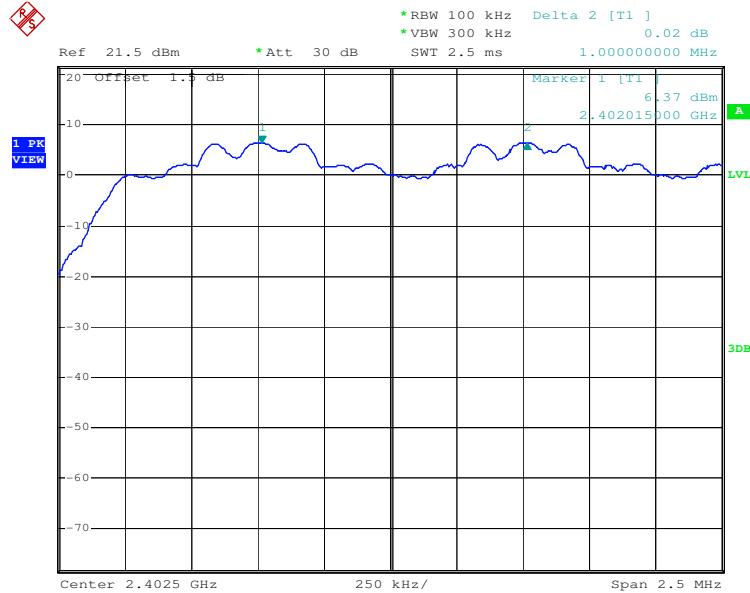


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

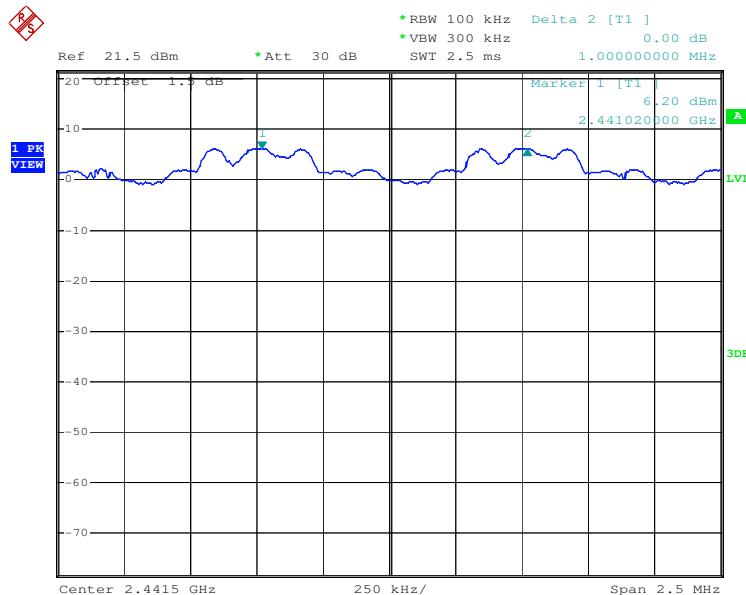

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

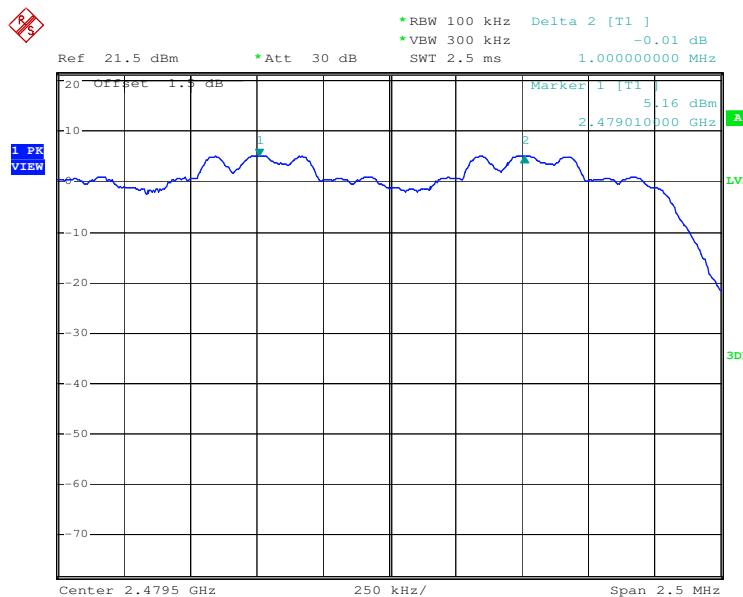

## 5.6 Hopping Channel Number

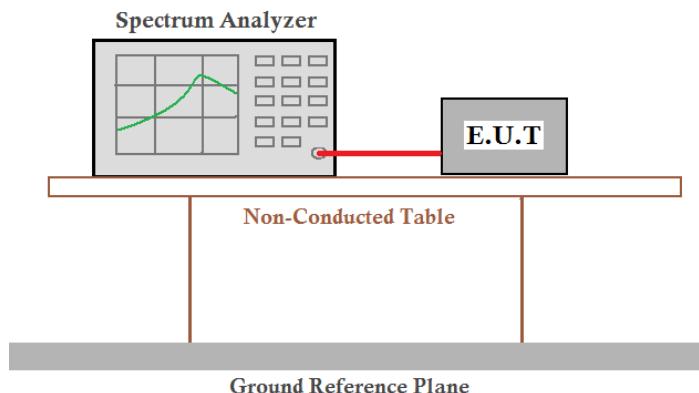Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	ANSI C63.10:2009
Test Setup:	
Test Mode:	Hopping transmitting with all kind of modulation
Limit:	At least 75 channels
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass


### Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥75
π/4DQPSK	79	≥75
8DPSK	79	≥75


**Test plot as follows**

Test mode:


GFSK

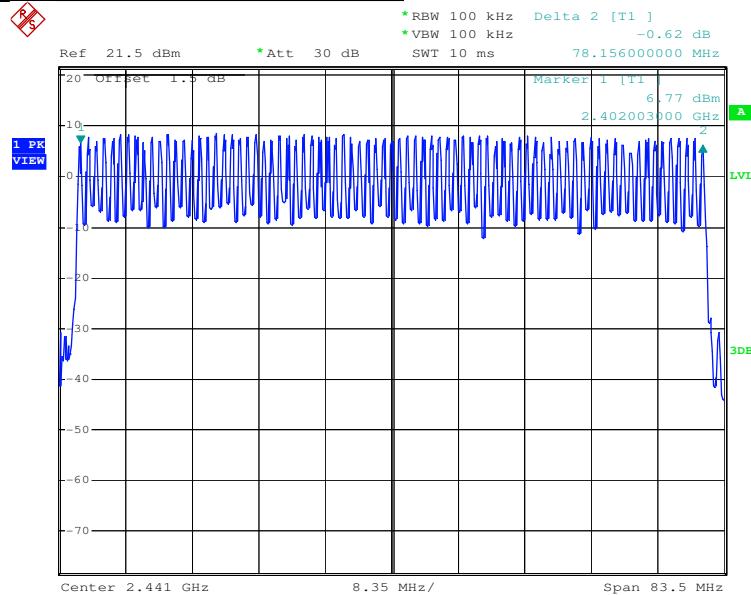

Test mode:

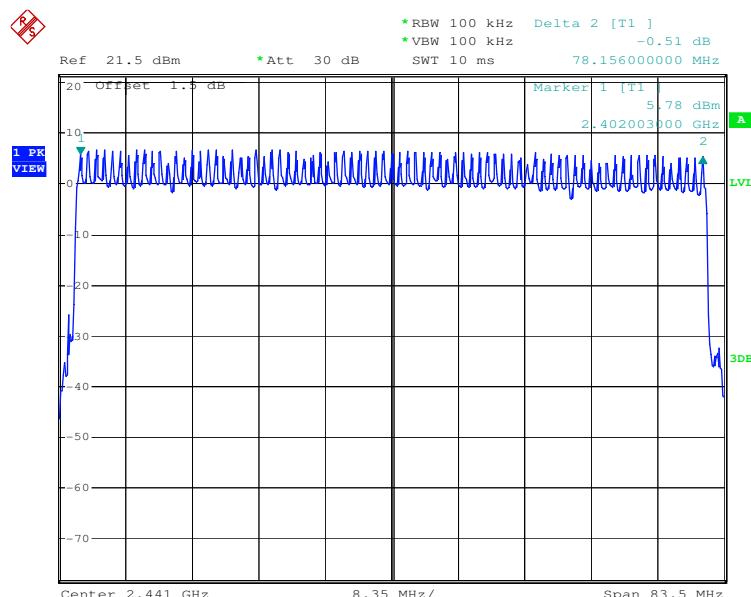 $\pi/4$ DQPSK


Test mode: 8DPSK

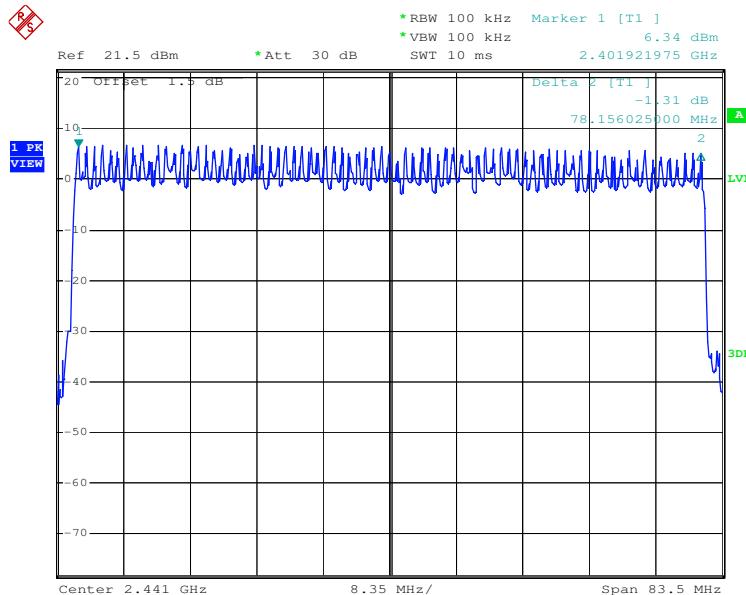

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 5.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Test Setup:	
Instruments Used:	Refer to section 4.10 for details
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

### Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1712	0.4
	DH3	0.2856	0.4
	DH5	0.3248	0.4
$\pi/4$ DQPSK	2-DH1	0.1744	0.4
	2-DH3	0.2856	0.4
	2-DH5	0.1952	0.4
8DPSK	3-DH1	0.1744	0.4
	3-DH3	0.2872	0.4
	3-DH5	0.3259	0.4

### Test Result:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below


DH1 time slot=0.535(ms)\*(1600/ (2\*79))\*31.6=171.2ms

DH3 time slot=1.785(ms)\*(1600/ (4\*79))\*31.6=285.6ms


DH5 time slot=3.045(ms)\*(1600/ (6\*79))\*31.6=324.8ms

**Test plot as follows**


GFSK	DH1
------	-----

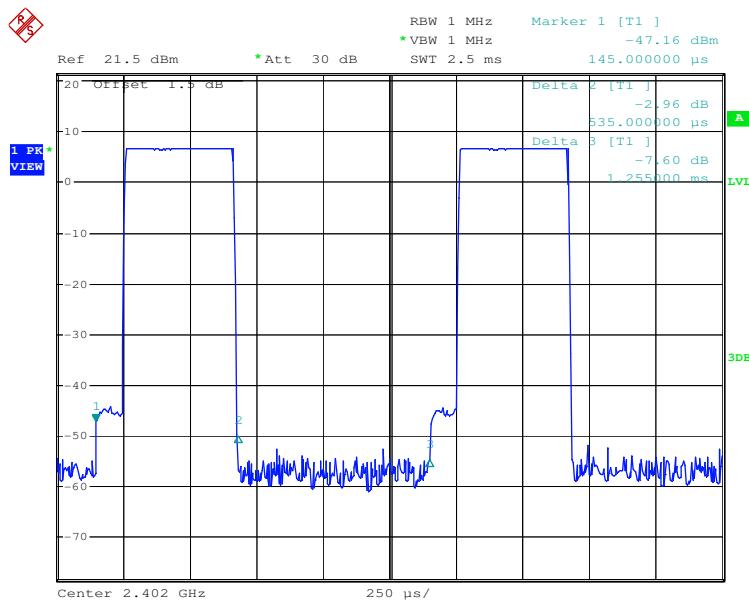


GFSK	DH3
------	-----

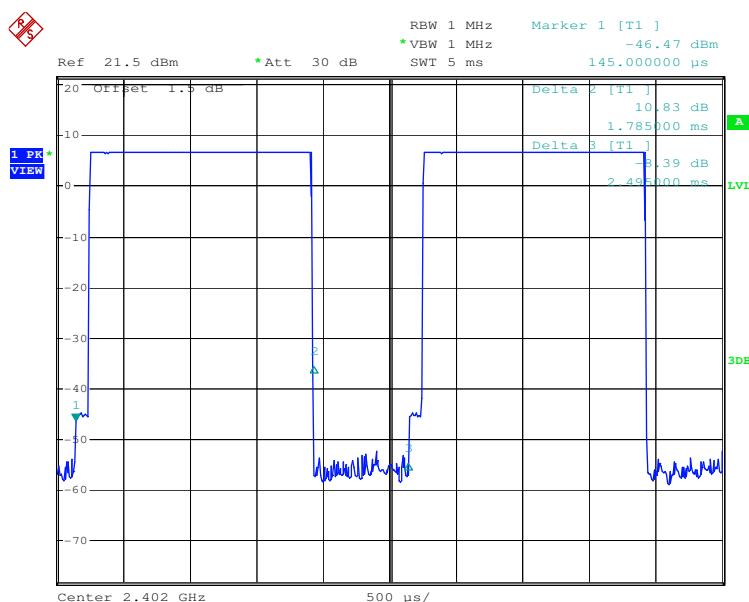


GFSK	DH5
------	-----

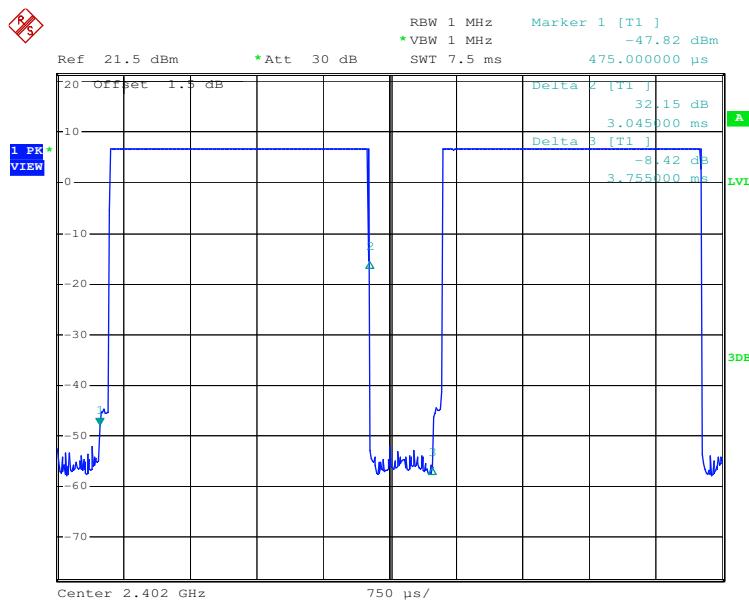


π/4DQPSK	2-DH1
----------	-------

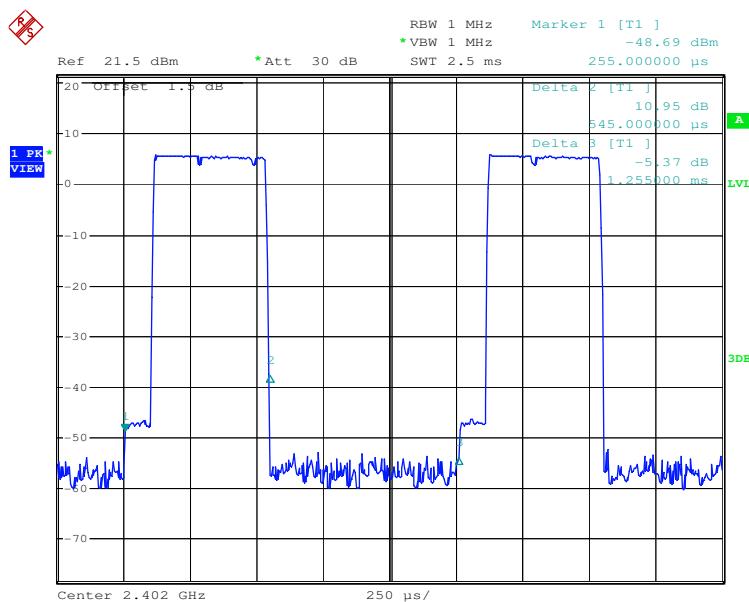


π/4DQPSK	2-DH3
----------	-------

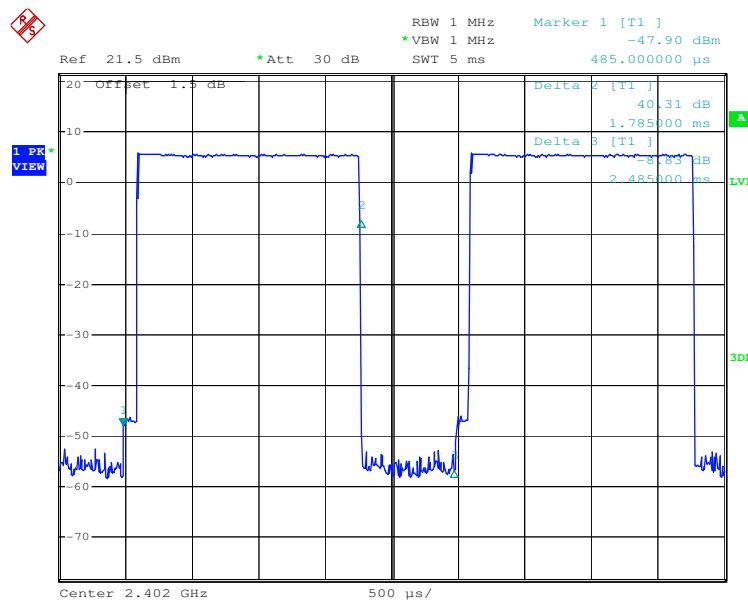


π/4DQPSK	2-DH5
----------	-------

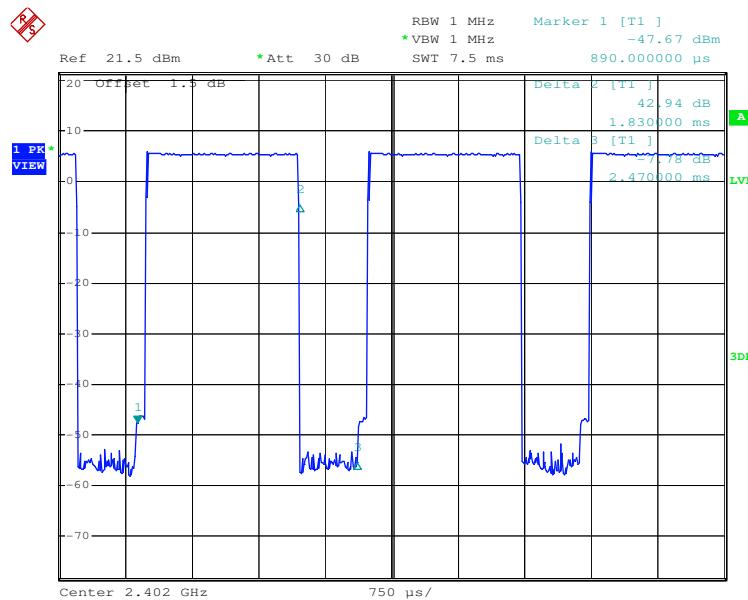


8DPSK	3-DH1
-------	-------

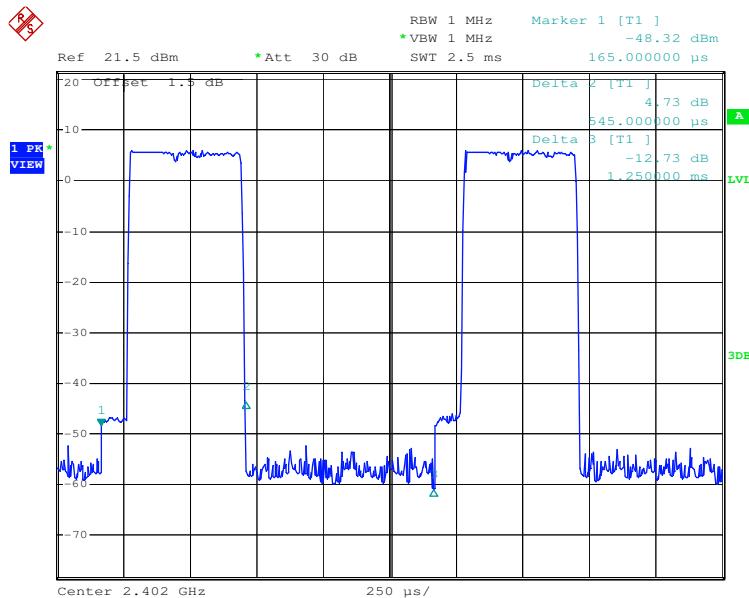


8DPSK	3-DH3
-------	-------

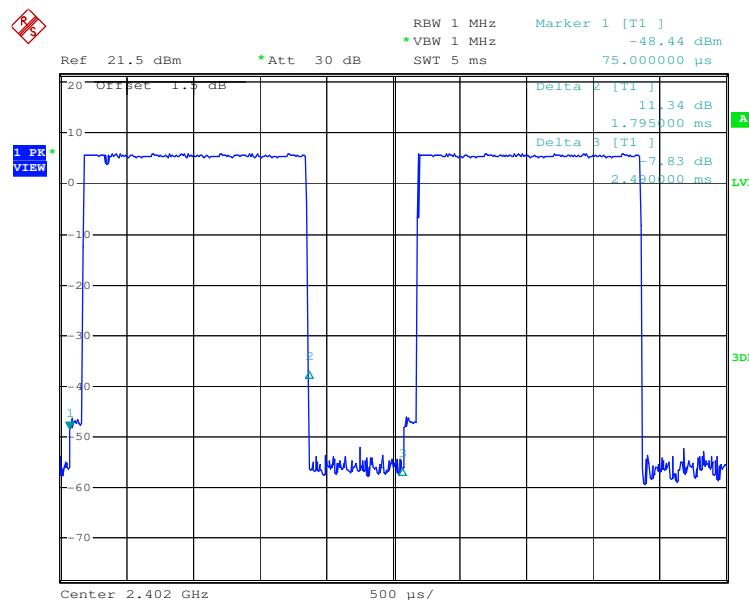

8DPSK	3-DH5
-------	-------


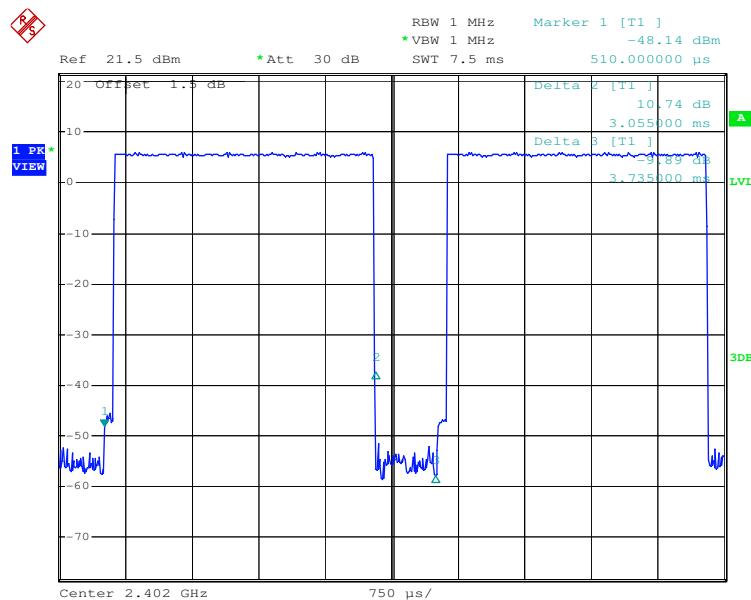


## 5.8 Band-edge for RF Conducted Emissions


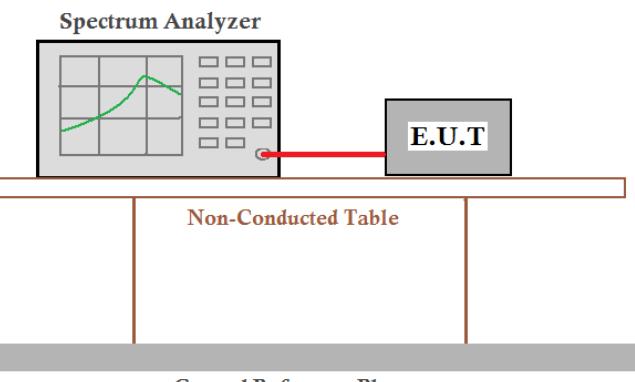
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Test Setup:	 <p>Diagram illustrating the test setup for RF Conducted Emissions. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a cable. The E.U.T is placed on a Non-Conducted Table, which is positioned above a Ground Reference Plane. The Spectrum Analyzer shows a signal spectrum.</p>
Remark:	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

## Test plot as follows:



Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

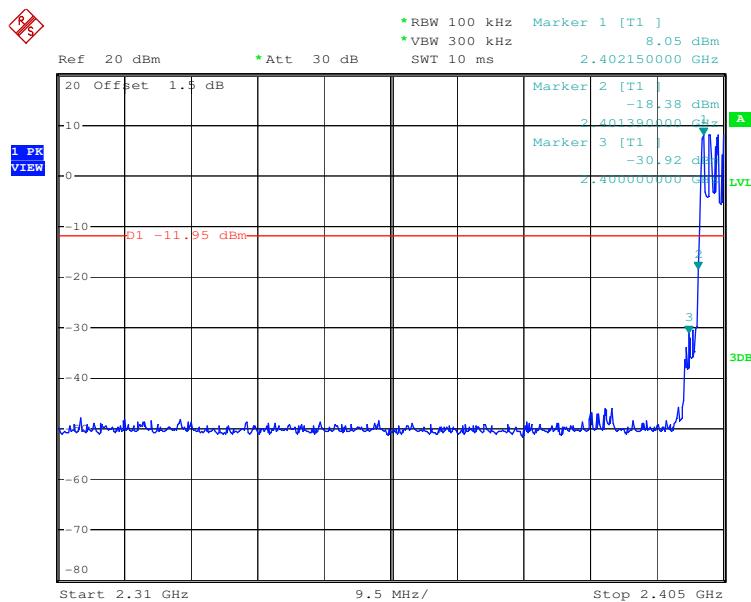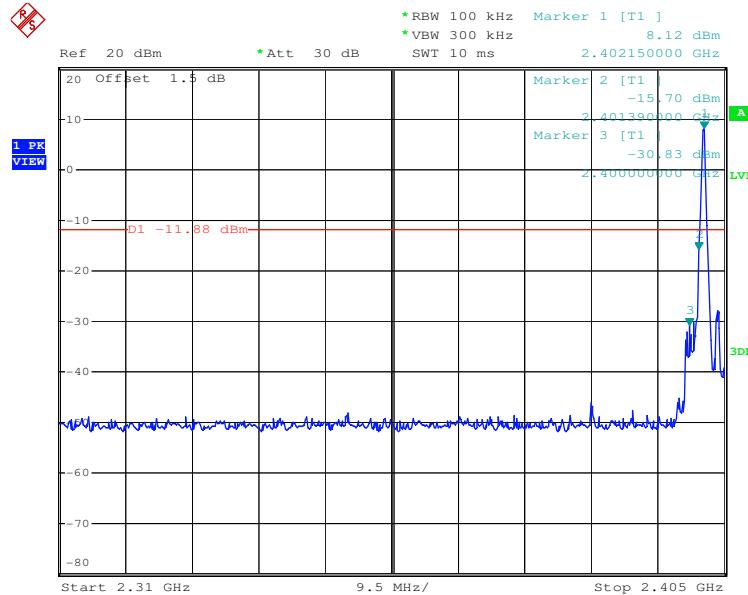



Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

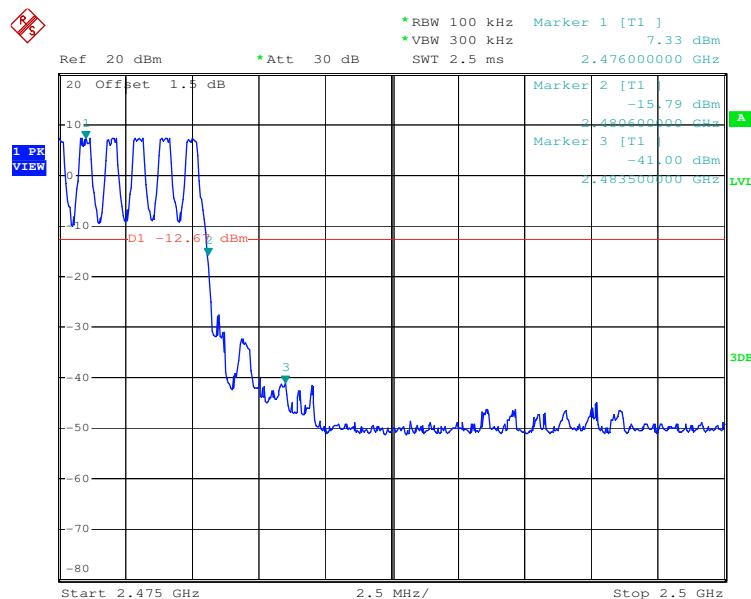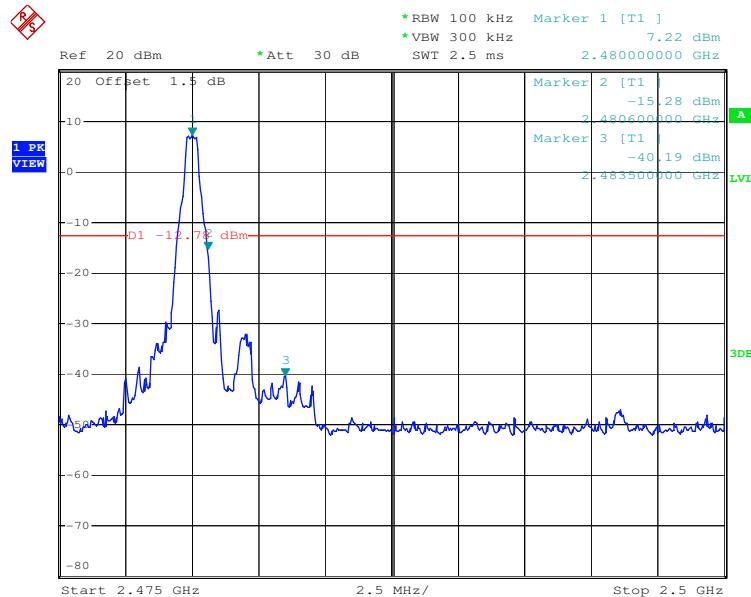



Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

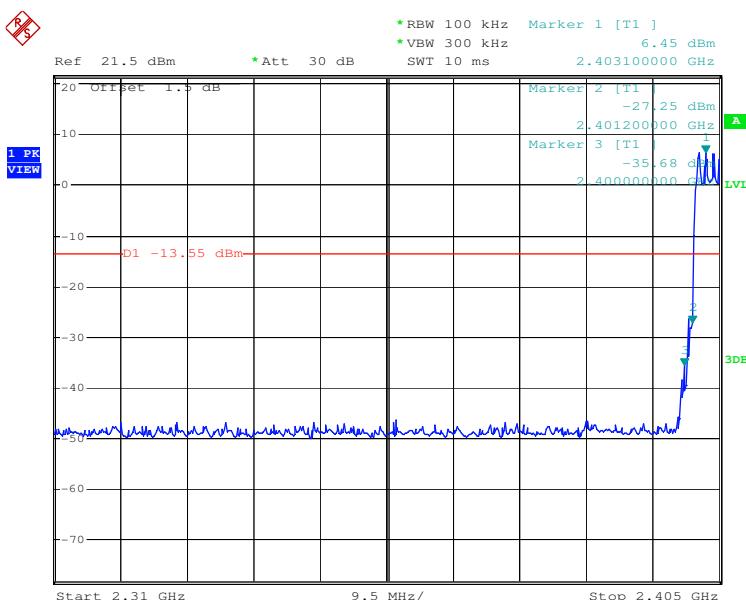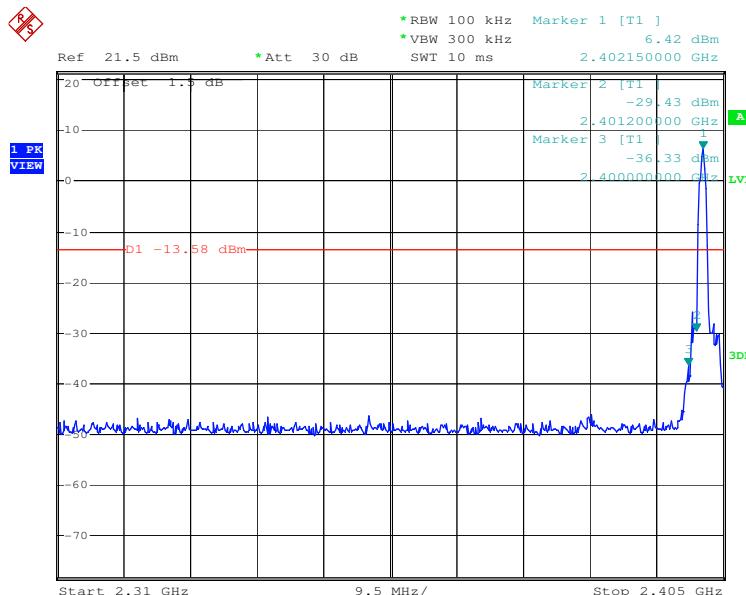



Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

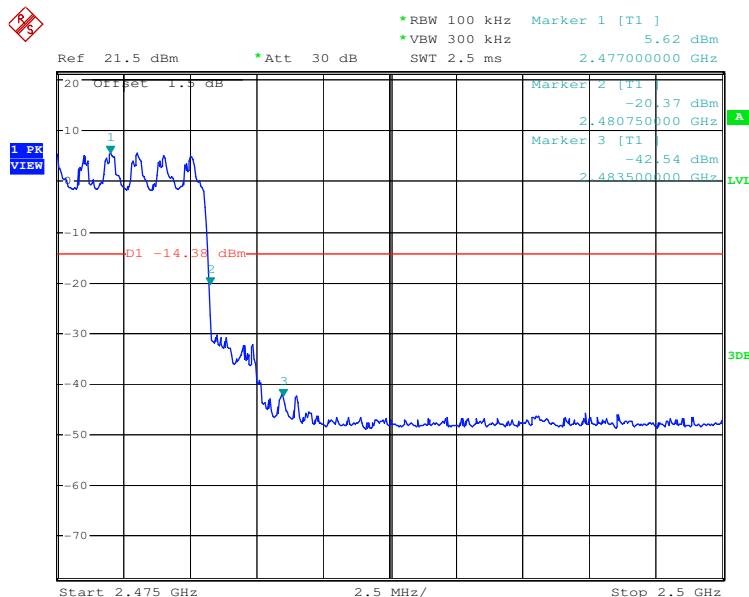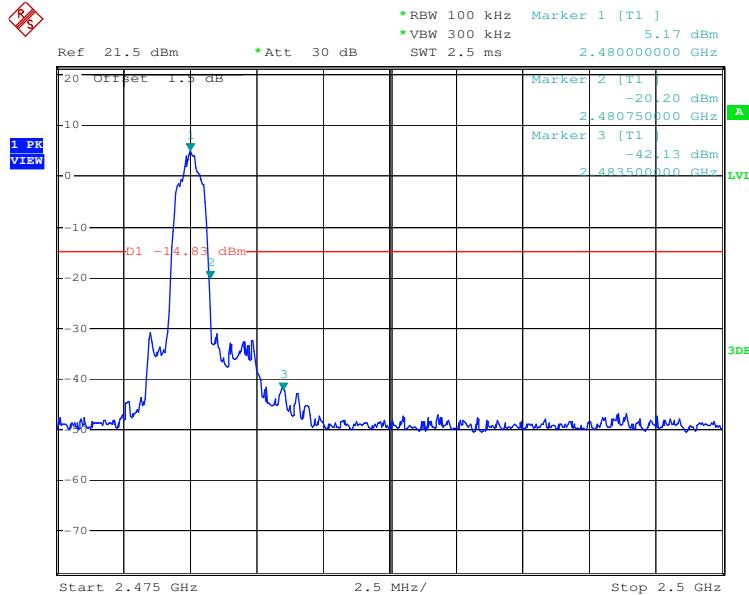


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

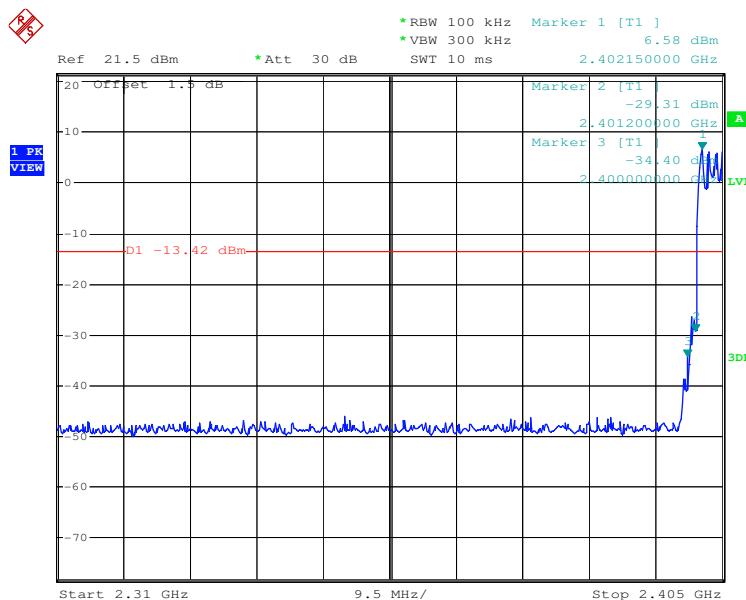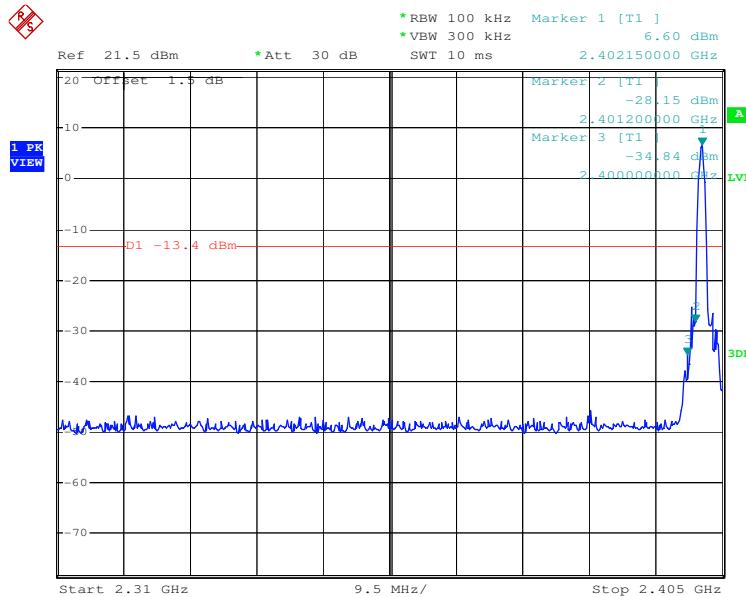


Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

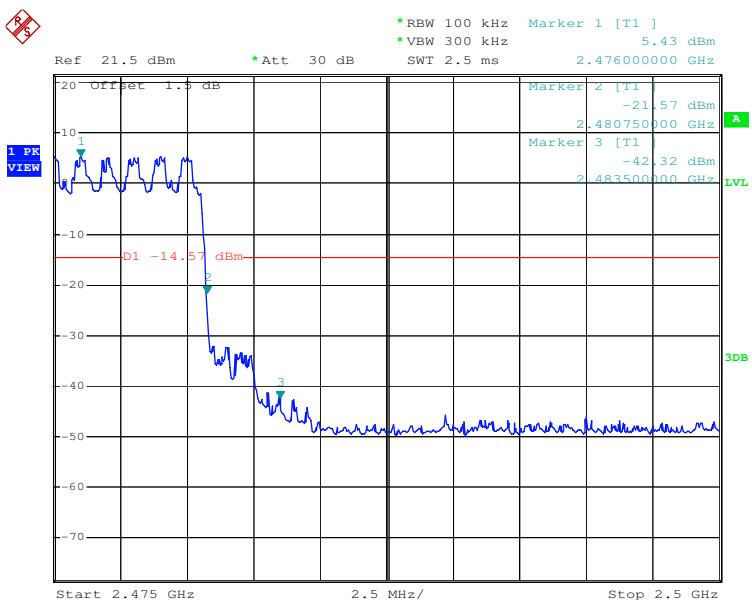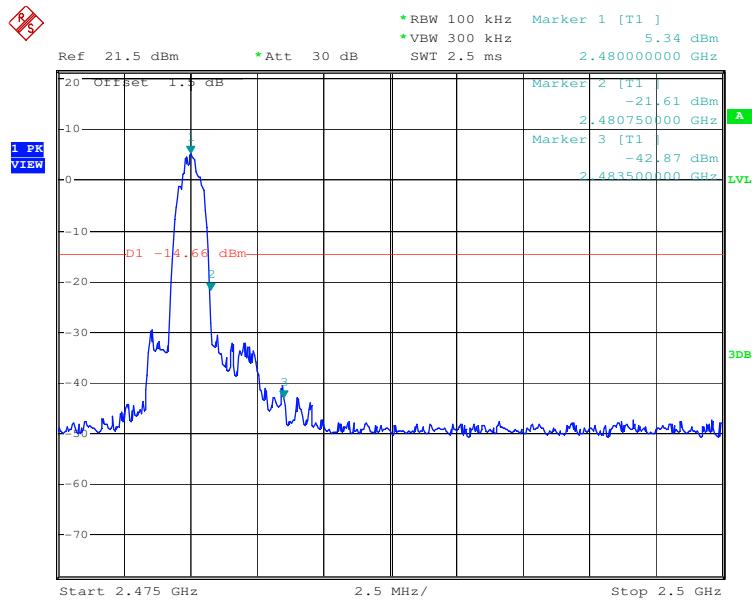


## 5.9 Spurious RF Conducted Emissions

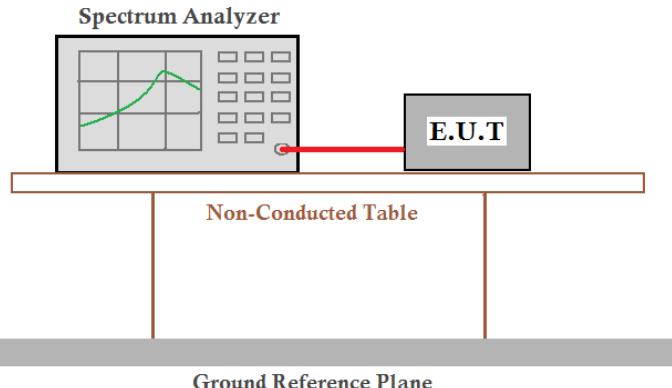Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Test Setup:	
	<p>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

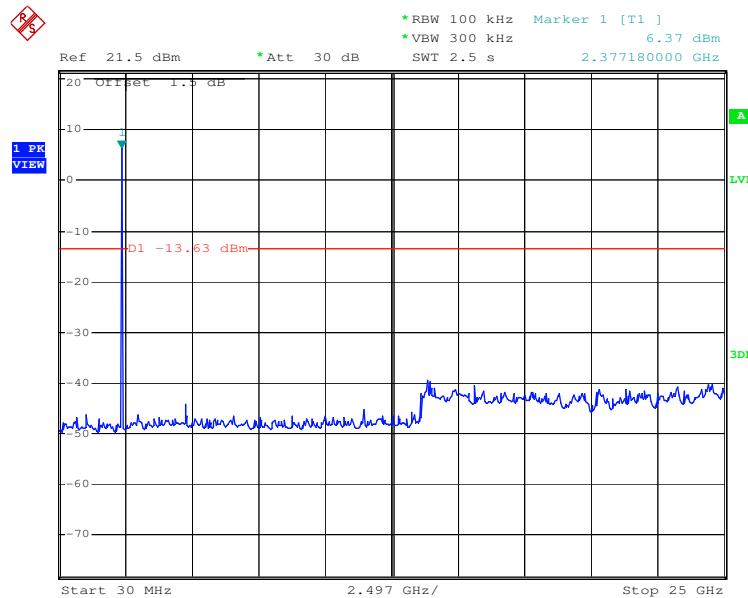


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

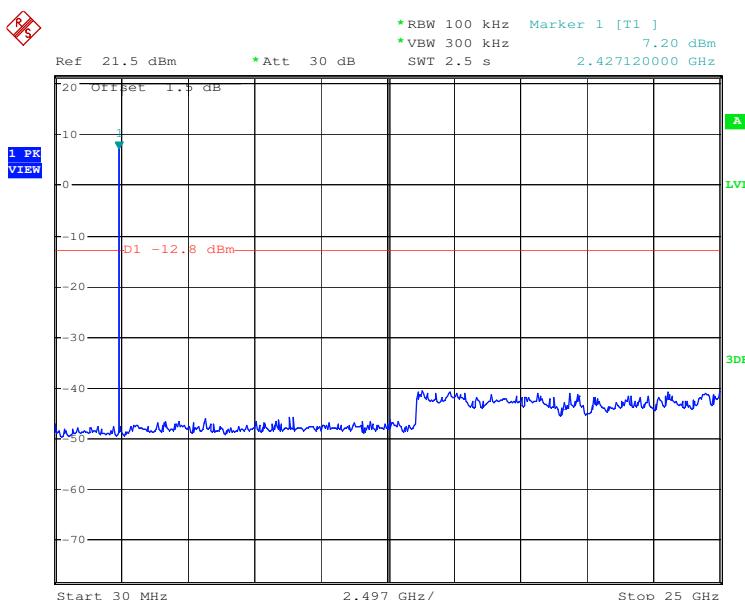


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

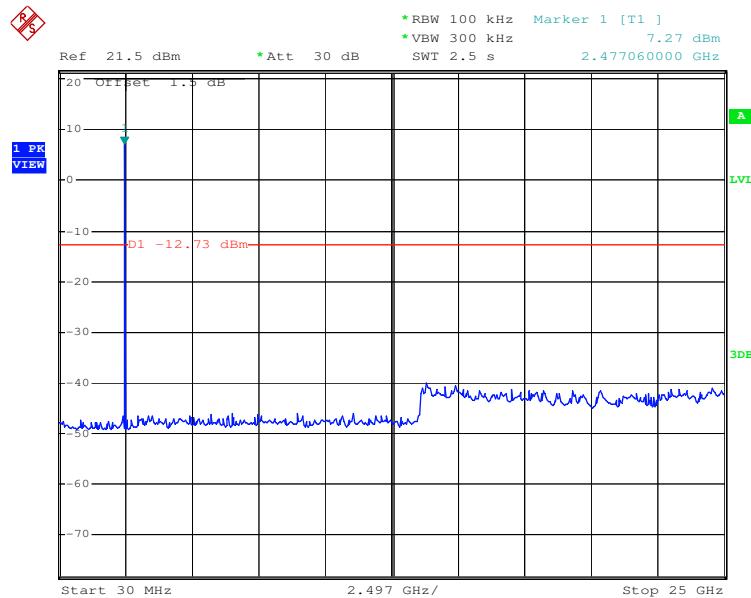


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

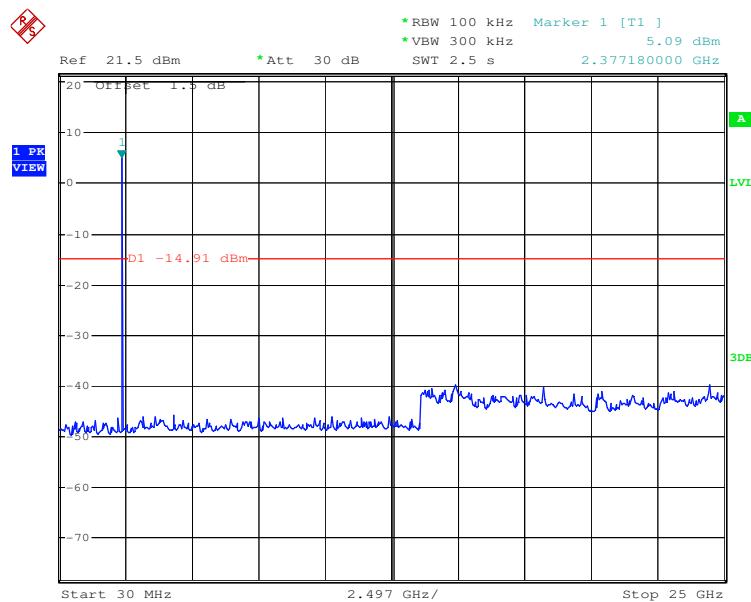


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

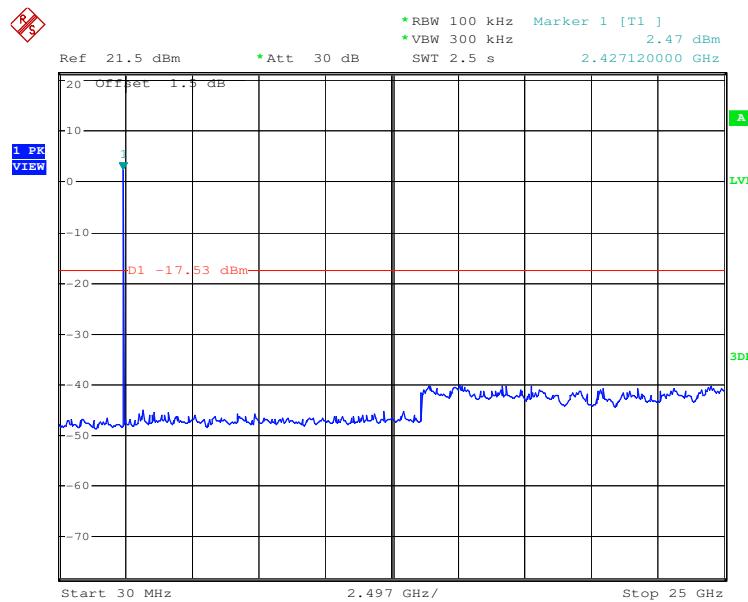


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

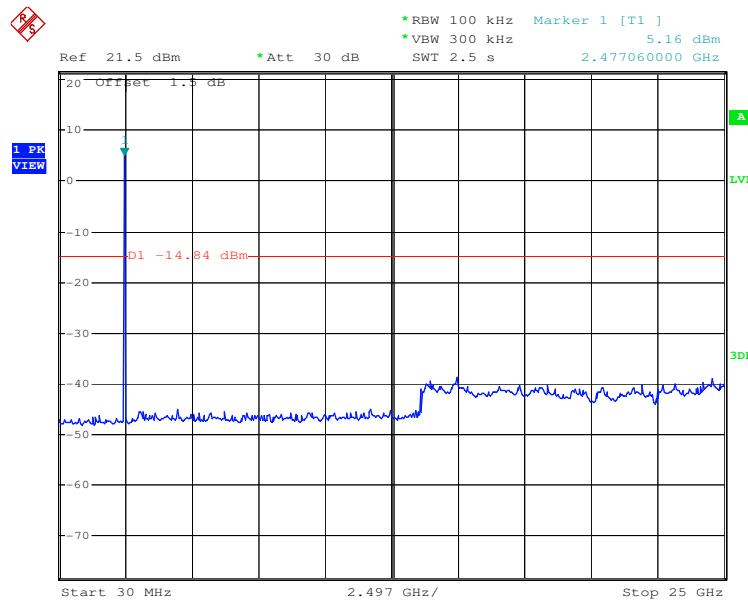


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

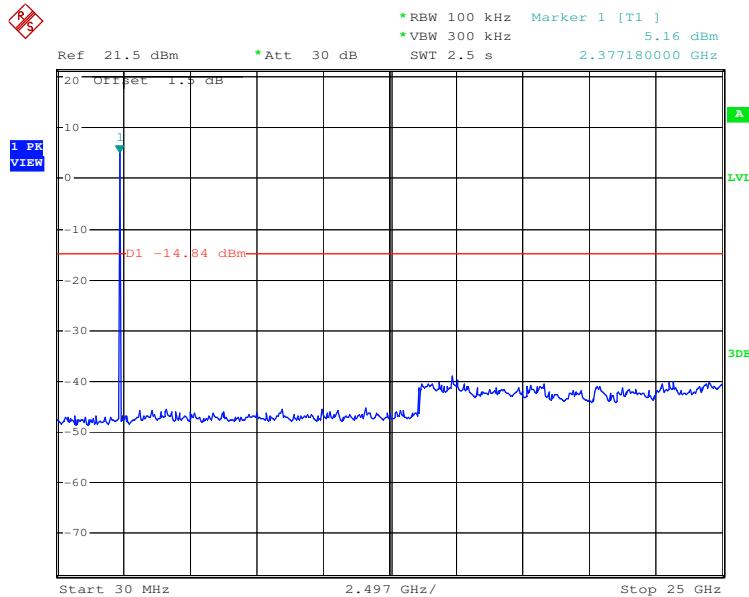

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

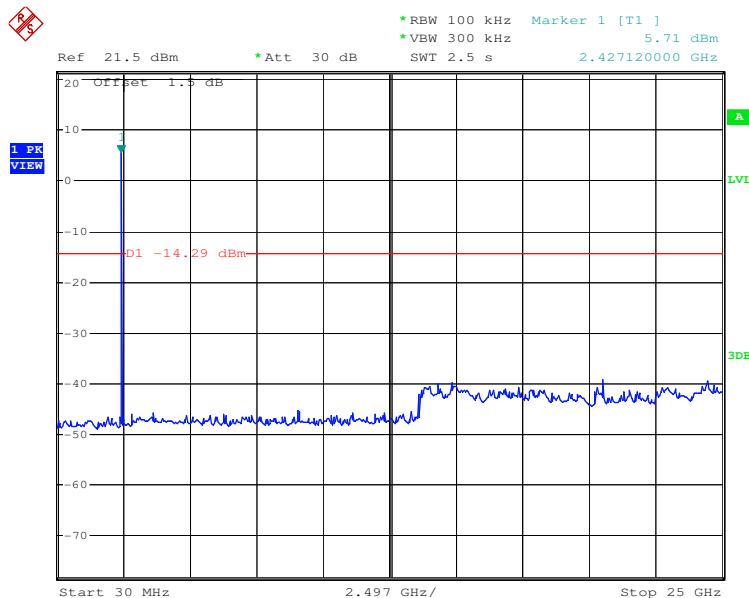

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

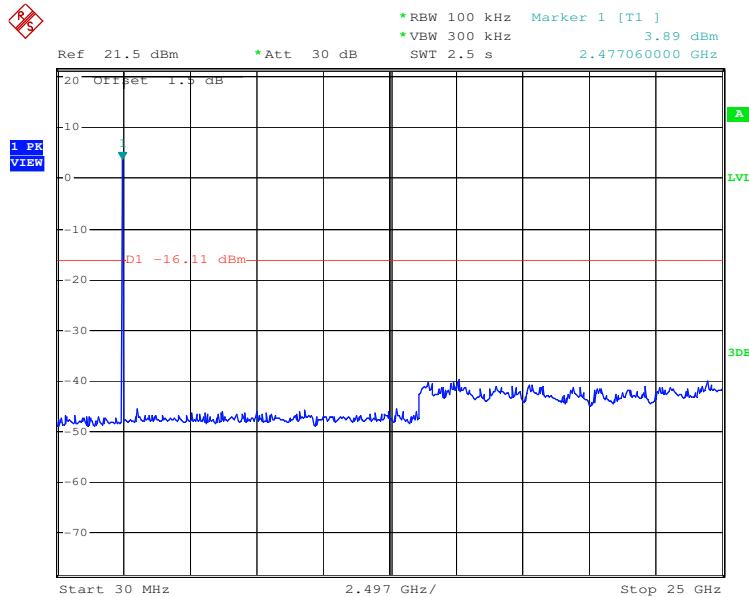

## 5.10 Pseudorandom Frequency Hopping Sequence

Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:								
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>								
<b>EUT Pseudorandom Frequency Hopping Sequence</b>									
	<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>Number of shift register stages: 9</li> <li>Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div style="text-align: center; border: 1px solid black; padding: 10px; margin: 10px 0;"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table style="width: 100%; text-align: center;"> <tr> <td style="width: 25%;">0 2 4 6</td> <td style="width: 25%;">62 64</td> <td style="width: 25%;">78 1</td> <td style="width: 25%;">73 75 77</td> </tr> <tr> <td>   </td> <td>   </td> <td>   </td> <td>   </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter.  The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	0 2 4 6	62 64	78 1	73 75 77				
0 2 4 6	62 64	78 1	73 75 77						



## 5.11 Radiated Spurious Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2009				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test Setup:					

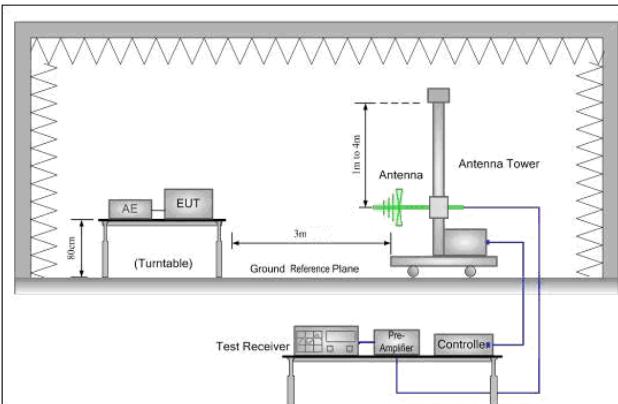


Figure 1. 30MHz to 1GHz

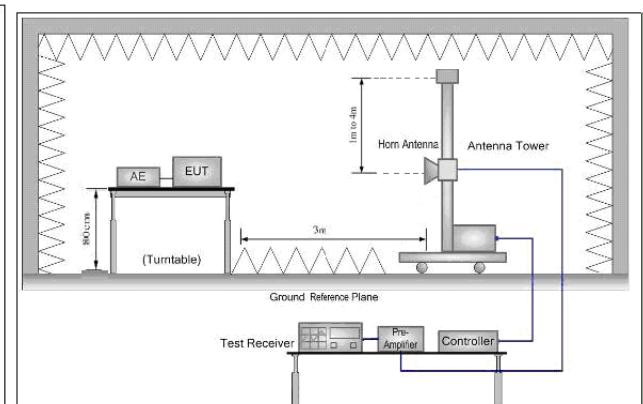
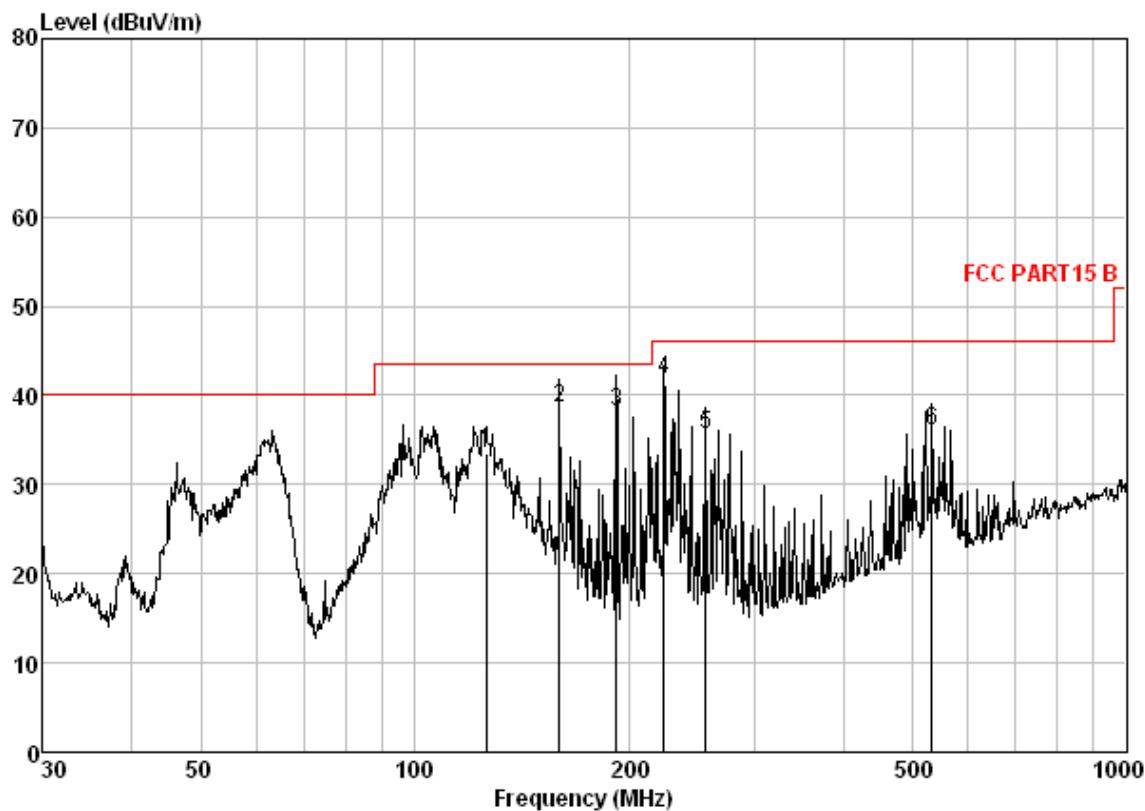


Figure 2. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"><li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li></ol>
Exploratory Test Mode:	Transmitting with non hopping mode and Charge + transmitting with non hopping mode Pre-scan was performed on the EUT on above modes, and then found the worst case mode is Charge + transmitting with non hopping mode. Only the worst case data was displayed.
Final Test Mode:	Through Pre-scan, find the DH5 of date type is the worse case of GFSK modulation type.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**5.11.1 Radiated Emission below 1GHz**

30MHz~1GHz (QP)		
Rounded Style		
Test mode:	Transmitting	Vertical

**Data: 18**

Site : chamber

Condition: FCC PART15 B 3m SAS-521-2 VERTICAL


Job.No : 1081RF

Mode : Charge + Buletooth 圆形

Freq	Cable Loss	Antenna Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
1	125.89	1.62	16.88	25.50	40.55	33.55
2	159.78	1.93	15.94	25.60	46.44	38.71
3	192.00	2.10	11.94	24.96	49.00	38.08
4	224.00	2.30	10.78	24.88	53.61	41.81
5	256.52	2.51	12.92	25.01	45.30	35.72
6	533.83	3.87	18.30	26.49	40.31	35.99
					46.00	-10.01

Test mode:	Transmitting	Horizontal
------------	--------------	------------

Data: 17

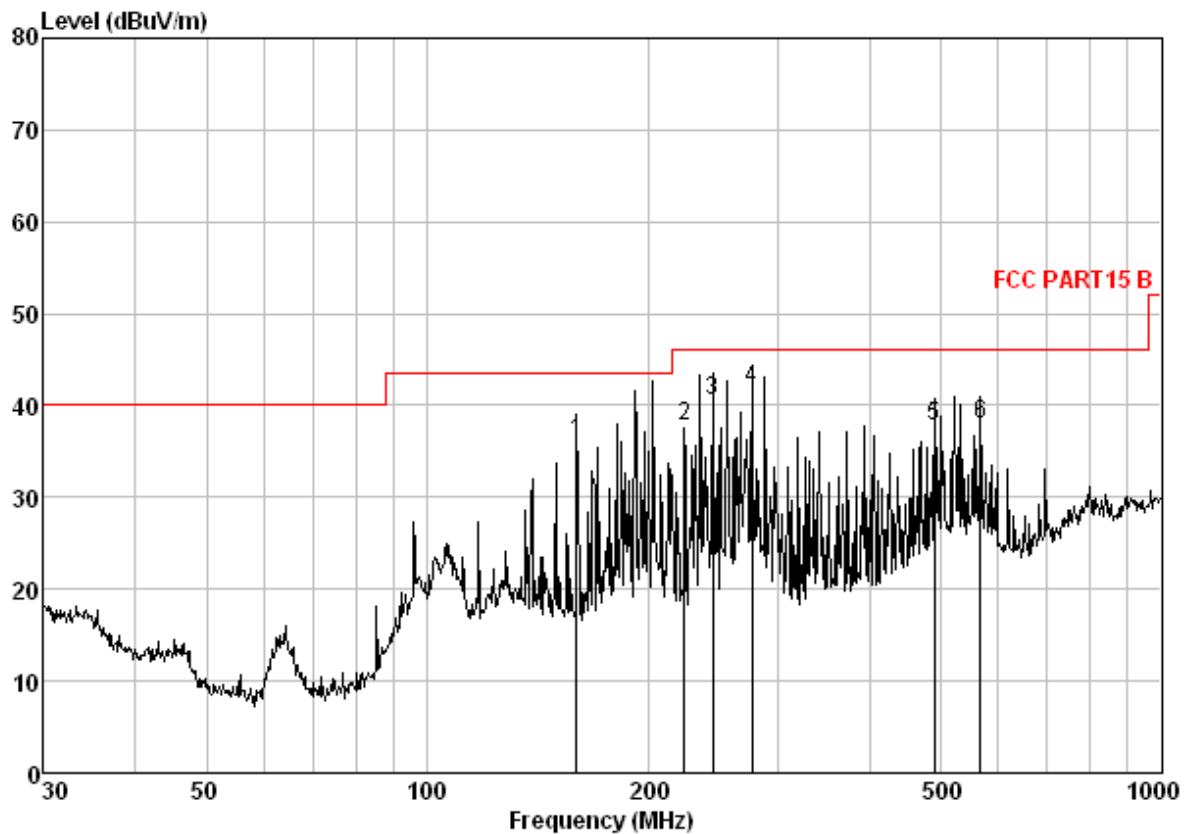

Site : chamber

Condition: FCC PART15 B 3m SAS-521-2 HORIZONTAL

Job.No : 1081RF


Mode : Charge + Buletooth 圆形

Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
				dB	dBuV	dBuV/m	dBuV/m
1 159.78	1.93	15.94	25.60	43.79	36.06	43.50	-7.44
2 224.00	2.30	10.78	24.88	49.61	37.81	46.00	-8.19
3 245.09	2.43	12.58	25.30	50.85	40.56	46.00	-5.44
4 277.30	2.62	12.71	25.00	51.40	41.73	46.00	-4.27
5 490.74	3.59	17.62	26.71	43.20	37.70	46.00	-8.30
6 566.62	4.00	18.96	26.65	41.62	37.93	46.00	-8.07

Quadrat Style with black Shell

Test mode: Transmitting Vertical

Data: 14

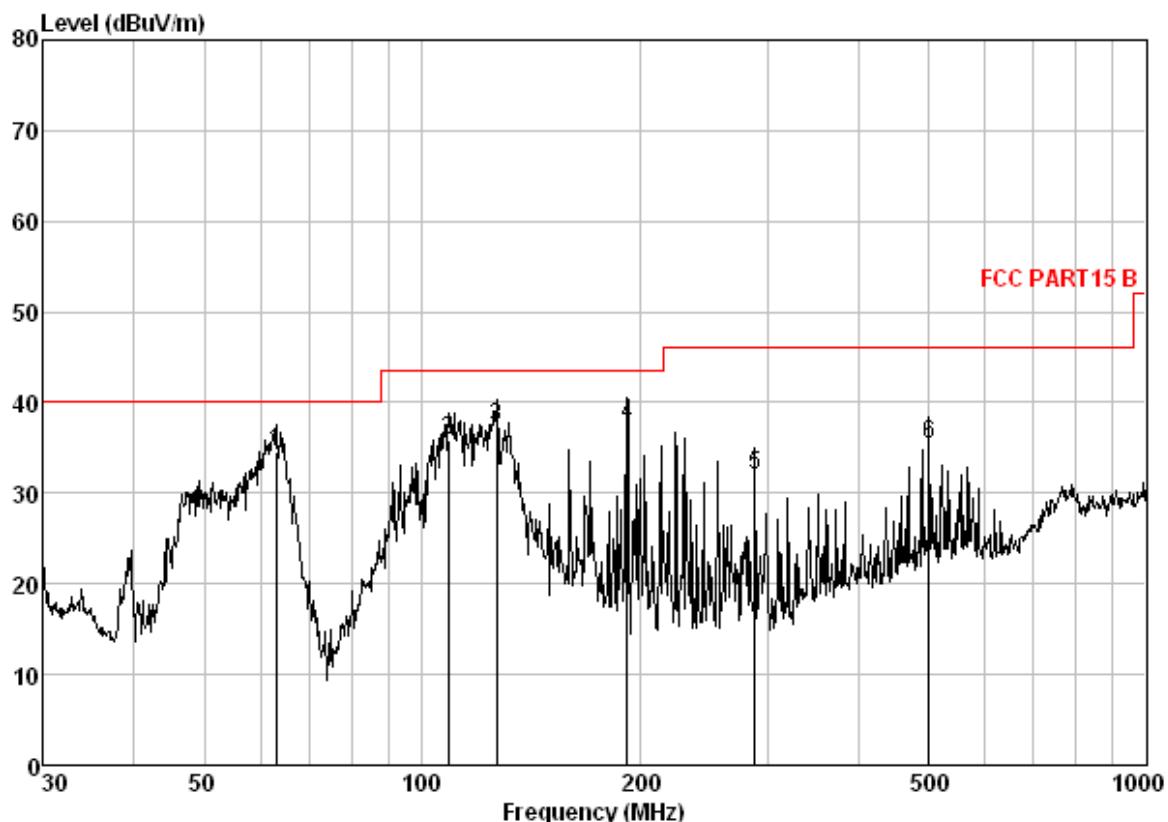

Site : chamber

Condition: FCC PART15 B 3m SAS-521-2 VERTICAL


Job.No : 1081RF

Mode : Charge+Buletooth

: T-HSAi

Freq	Cable Loss MHz	Antenna Factor	Preamp Factor	Read	Limit	Over	Limit
				Level			
1	62.87	1.09	6.32	25.90	53.04	34.55	40.00
2	108.65	1.46	14.02	25.72	46.14	35.90	43.50
3	126.77	1.64	16.85	24.88	43.72	37.33	43.50
4	191.75	2.10	11.94	24.96	48.54	37.62	43.50
5	287.99	2.68	12.75	24.45	41.03	32.01	46.00
6	501.18	3.76	17.72	26.23	40.25	35.50	46.00
							-13.99
							-10.50

Test mode:	Transmitting	Horizontal
------------	--------------	------------

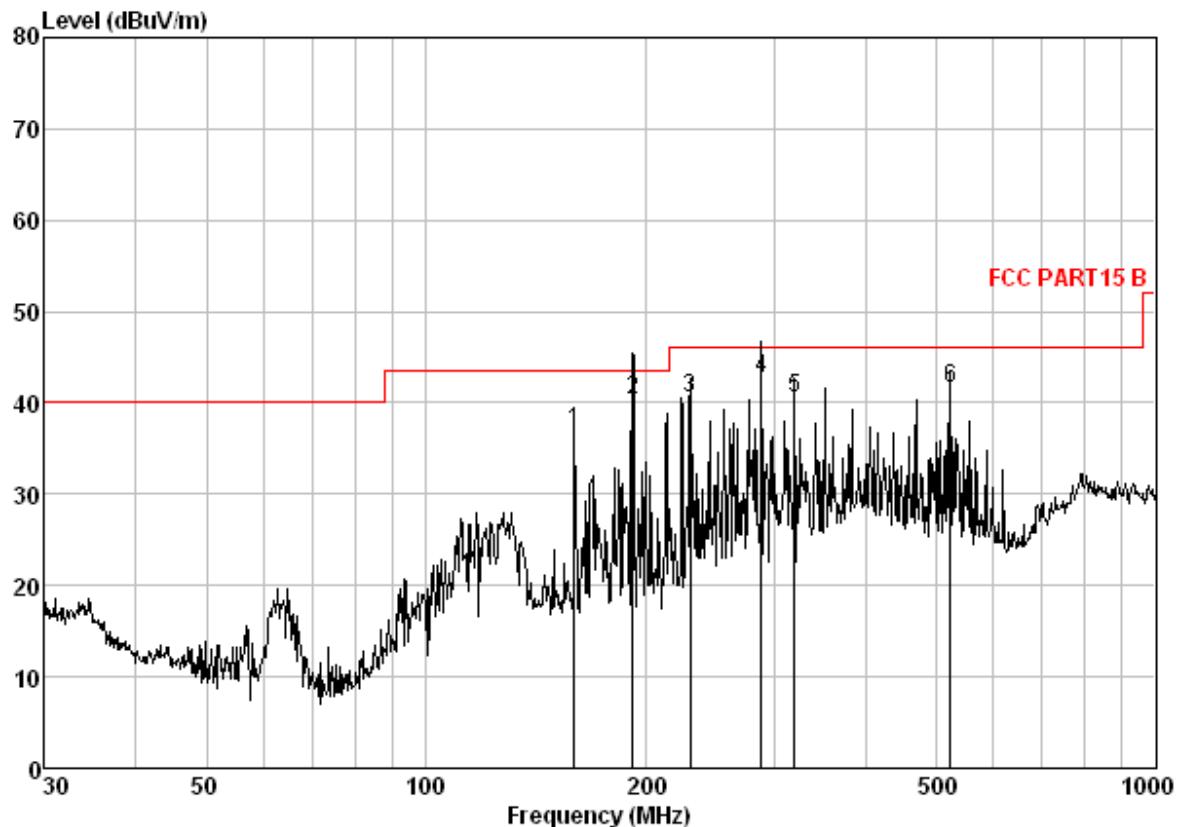**Data: 13**

Site : chamber

Condition: FCC PART15 B 3m SAS-521-2 HORIZONTAL

Job.No : 1081RF

Mode : Charge+Buletooth

: T-HSAi

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	159.78	1.93	15.94	25.60	44.69	36.96	43.50	-6.54
2	192.00	2.10	11.94	24.96	51.20	40.28	43.50	-3.22
3	230.10	2.34	11.22	24.76	51.83	40.63	46.00	-5.37
4	288.00	2.68	12.75	24.45	51.70	42.68	46.00	-3.32
5	319.94	2.89	13.37	25.01	49.34	40.59	46.00	-5.41
6	522.72	3.82	18.16	26.56	46.08	41.50	46.00	-4.50

**5.11.2 Transmitter Emission above 1GHz**

Rounded Style									
Worse case mode:		GFSK(DH5)		Test channel:		Lowest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1387.750	2.44	27.91	39.30	53.26	44.31	74.00	-29.69	Vertical	
2104.500	2.88	31.99	39.64	54.06	49.29	74.00	-24.71	Vertical	
4196.000	4.29	34.36	41.18	49.59	47.06	74.00	-26.94	Vertical	
5946.750	5.11	35.62	40.97	50.50	50.26	74.00	-23.74	Vertical	
7206.000	5.77	35.88	39.87	53.16	54.94	74.00	-19.06	Vertical	
9608.000	5.99	37.30	37.80	51.60	57.09	74.00	-16.91	Vertical	
2118.973	2.88	32.02	39.65	48.11	43.36	74.00	-30.64	Horizontal	
4014.288	4.17	33.85	41.05	50.91	47.88	74.00	-26.12	Horizontal	
4804.000	4.69	34.70	41.63	59.06	56.82	74.00	-17.18	Horizontal	
6412.427	5.23	36.18	40.56	47.91	48.76	74.00	-25.24	Horizontal	
7206.000	5.77	35.88	39.87	51.04	52.82	74.00	-21.18	Horizontal	
10062.310	5.99	37.78	37.47	46.34	52.64	74.00	-21.36	Horizontal	

Worse case mode:		GFSK(DH5)		Test channel:		Lowest		Remark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization	
1387.750	2.44	27.91	39.30	38.54	29.59	54.00	-24.41	Vertical	
2104.500	2.88	31.99	39.64	40.55	35.78	54.00	-18.22	Vertical	
4196.000	4.29	34.36	41.18	35.17	32.64	54.00	-21.36	Vertical	
5946.750	5.11	35.62	40.97	32.08	31.84	54.00	-22.16	Vertical	
7206.000	5.77	35.88	39.87	40.60	42.38	54.00	-11.62	Vertical	
9608.000	5.99	37.30	37.80	37.80	43.29	54.00	-10.71	Vertical	
2118.973	2.88	32.02	39.65	39.40	34.65	54.00	-19.35	Horizontal	
4014.288	4.17	33.85	41.05	37.18	34.15	54.00	-19.85	Horizontal	
4804.000	4.69	34.70	41.63	52.73	50.49	54.00	-3.51	Horizontal	
6412.427	5.23	36.18	40.56	34.86	35.71	54.00	-18.29	Horizontal	
7206.000	5.77	35.88	39.87	46.77	48.55	54.00	-5.45	Horizontal	
10062.310	5.99	37.78	37.47	37.93	44.23	54.00	-9.77	Horizontal	

Worse case mode:		GFSK(DH5)		Test channel:		Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
1621.985	2.59	29.09	39.41	49.26	41.53	74.00	-32.47	Vertical		
3445.704	3.69	33.22	40.63	47.62	43.90	74.00	-30.10	Vertical		
4547.561	4.53	35.12	41.44	47.02	45.23	74.00	-28.77	Vertical		
4882.000	4.72	34.59	41.68	54.59	52.22	74.00	-21.78	Vertical		
5850.919	5.07	35.45	41.06	48.46	47.92	74.00	-26.08	Vertical		
7323.000	5.92	35.93	39.77	50.26	52.34	74.00	-21.66	Vertical		
2810.846	3.21	33.14	40.16	46.93	43.12	74.00	-30.88	Horizontal		
4107.316	4.23	34.13	41.12	48.20	45.44	74.00	-28.56	Horizontal		
4882.000	4.72	34.59	41.68	53.83	51.46	74.00	-22.54	Horizontal		
6544.350	5.27	36.27	40.45	48.44	49.53	74.00	-24.47	Horizontal		
7323.000	5.92	35.93	39.77	52.67	54.75	74.00	-19.25	Horizontal		
8377.241	6.19	36.15	38.87	47.71	51.18	74.00	-22.82	Horizontal		

Worse case mode:		GFSK(DH5)		Test channel:		Middle		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization		
1621.985	2.59	29.09	39.41	40.64	32.91	54.00	-21.09	Vertical		
3445.704	3.69	33.22	40.63	34.34	30.62	54.00	-23.38	Vertical		
4547.561	4.53	35.12	41.44	39.75	37.96	54.00	-16.04	Vertical		
4882.000	4.72	34.59	41.68	49.17	46.80	54.00	-7.20	Vertical		
5850.919	5.07	35.45	41.06	40.31	39.77	54.00	-14.23	Vertical		
7323.000	5.92	35.93	39.77	44.82	46.90	54.00	-7.10	Vertical		
2810.846	3.21	33.14	40.16	38.60	34.79	54.00	-19.21	Horizontal		
4107.316	4.23	34.13	41.12	37.29	34.53	54.00	-19.47	Horizontal		
4882.000	4.72	34.59	41.68	47.68	45.31	54.00	-8.69	Horizontal		
6544.350	5.27	36.27	40.45	40.85	41.94	54.00	-12.06	Horizontal		
7323.000	5.92	35.93	39.77	46.52	48.60	54.00	-5.40	Horizontal		
8377.241	6.19	36.15	38.87	39.46	42.93	54.00	-11.07	Horizontal		

Worse case mode:		GFSK(DH5)		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
1655.354	2.62	29.33	39.42	48.99	41.52	74.00	-32.48	Vertical		
4501.492	4.49	35.20	41.40	48.28	46.57	74.00	-27.43	Vertical		
4960.000	4.76	34.46	41.74	51.40	48.88	74.00	-25.12	Vertical		
6511.117	5.26	36.30	40.48	47.25	48.33	74.00	-25.67	Vertical		
7440.000	6.04	35.98	39.67	50.08	52.43	74.00	-21.57	Vertical		
8527.851	6.18	36.23	38.73	47.32	51.00	74.00	-23.00	Vertical		
1655.354	2.62	29.33	39.42	49.44	41.97	74.00	-32.03	Horizontal		
2118.973	2.88	32.02	39.65	47.97	43.22	74.00	-30.78	Horizontal		
4501.492	4.49	35.20	41.40	48.36	46.65	74.00	-27.35	Horizontal		
4960.000	4.76	34.46	41.74	50.28	47.76	74.00	-26.24	Horizontal		
6527.712	5.27	36.28	40.46	47.25	48.34	74.00	-25.66	Horizontal		
7440.000	6.04	35.98	39.67	49.55	51.90	74.00	-22.10	Horizontal		
Worse case mode:		GFSK(DH5)		Test channel:		Highest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization		
1655.354	2.62	29.33	39.42	37.43	29.96	54.00	-24.04	Vertical		
4501.492	4.49	35.20	41.40	39.28	37.57	54.00	-16.43	Vertical		
4960.000	4.76	34.46	41.74	46.86	44.34	54.00	-9.66	Vertical		
6511.117	5.26	36.30	40.48	34.09	35.17	54.00	-18.83	Vertical		
7440.000	6.04	35.98	39.67	44.51	46.86	54.00	-7.14	Vertical		
8527.851	6.18	36.23	38.73	39.56	43.24	54.00	-10.76	Vertical		
1655.354	2.62	29.33	39.42	35.84	28.37	54.00	-25.63	Horizontal		
2118.973	2.88	32.02	39.65	37.95	33.20	54.00	-20.80	Horizontal		
4501.492	4.49	35.20	41.40	38.27	36.56	54.00	-17.44	Horizontal		
4960.000	4.76	34.46	41.74	44.66	42.14	54.00	-11.86	Horizontal		
6527.712	5.27	36.28	40.46	41.08	42.17	54.00	-11.83	Horizontal		
7440.000	6.04	35.98	39.67	43.16	45.51	54.00	-8.49	Horizontal		

Quadrat Style with black Shell								
Worse case mode:		GFSK(DH5)		Test channel:	Lowest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1387.750	2.44	27.91	39.30	53.26	44.31	74.00	-29.69	Vertical
2104.500	2.88	31.99	39.64	54.06	49.29	74.00	-24.71	Vertical
4196.000	4.29	34.36	41.18	49.59	47.06	74.00	-26.94	Vertical
5946.750	5.11	35.62	40.97	50.50	50.26	74.00	-23.74	Vertical
7206.000	5.77	35.88	39.87	53.16	54.94	74.00	-19.06	Vertical
9608.000	5.99	37.30	37.80	51.60	57.09	74.00	-16.91	Vertical
1481.750	2.50	28.07	39.34	53.17	44.40	74.00	-29.60	Horizontal
4407.500	4.43	34.92	41.33	50.20	48.22	74.00	-25.78	Horizontal
4959.750	4.76	34.46	41.74	50.45	47.93	74.00	-26.07	Horizontal
6452.000	5.24	36.24	40.53	49.34	50.29	74.00	-23.71	Horizontal
7206.000	5.77	35.88	39.87	53.29	55.07	74.00	-18.93	Horizontal
9608.000	5.99	37.30	37.80	51.87	57.36	74.00	-16.64	Horizontal

Worse case mode:		GFSK(DH5)		Test channel:		Lowest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization		
1387.750	2.44	27.91	39.30	38.54	29.59	54.00	-24.41	Vertical		
2104.500	2.88	31.99	39.64	40.55	35.78	54.00	-18.22	Vertical		
4196.000	4.29	34.36	41.18	35.17	32.64	54.00	-21.36	Vertical		
5946.750	5.11	35.62	40.97	32.08	31.84	54.00	-22.16	Vertical		
7206.000	5.77	35.88	39.87	40.60	42.38	54.00	-11.62	Vertical		
9608.000	5.99	37.30	37.80	37.80	43.29	54.00	-10.71	Vertical		
1481.750	2.50	28.07	39.34	39.59	30.82	54.00	-23.18	Horizontal		
4407.500	4.43	34.92	41.33	35.26	33.28	54.00	-20.72	Horizontal		
4959.750	4.76	34.46	41.74	37.57	35.05	54.00	-18.95	Horizontal		
6452.000	5.24	36.24	40.53	34.28	35.23	54.00	-18.77	Horizontal		
7206.000	5.77	35.88	39.87	42.19	43.97	54.00	-10.03	Horizontal		
9608.000	5.99	37.30	37.80	40.12	45.61	54.00	-8.39	Horizontal		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Worse case mode:		GFSK(DH5)		Test channel:		Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
1458.250	2.49	28.04	39.33	57.36	48.56	74.00	-25.44	Vertical		
2092.750	2.87	31.96	39.64	52.04	47.23	74.00	-26.77	Vertical		
4325.250	4.37	34.73	41.28	49.72	47.54	74.00	-26.46	Vertical		
6076.000	5.15	35.80	40.86	50.49	50.58	74.00	-23.42	Vertical		
7321.500	5.92	35.93	39.77	53.16	55.24	74.00	-18.76	Vertical		
9764.000	5.98	37.48	37.66	55.00	60.80	74.00	-13.20	Vertical		
2010.500	2.84	31.80	39.57	51.59	46.66	74.00	-27.34	Horizontal		
4877.500	4.72	34.59	41.68	51.05	48.68	74.00	-25.32	Horizontal		
6287.500	5.20	36.04	40.68	51.67	52.23	74.00	-21.77	Horizontal		
7321.500	5.92	35.93	39.77	56.47	58.55	74.00	-15.45	Horizontal		
9764.000	5.98	37.48	37.66	54.45	60.25	74.00	-13.75	Horizontal		
12174.250	6.51	39.07	38.35	50.11	57.34	74.00	-16.66	Horizontal		

Worse case mode:		GFSK(DH5)		Test channel:		Middle		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization		
1458.250	2.49	28.04	39.33	41.59	32.79	54.00	-21.21	Vertical		
2092.750	2.87	31.96	39.64	39.16	34.35	54.00	-19.65	Vertical		
4325.250	4.37	34.73	41.28	36.93	34.75	54.00	-19.25	Vertical		
6076.000	5.15	35.80	40.86	37.25	37.34	54.00	-16.66	Vertical		
7323.000	5.92	35.93	39.77	40.83	42.91	54.00	-11.09	Vertical		
9764.000	5.98	37.48	37.66	40.21	46.01	54.00	-7.99	Vertical		
2010.500	2.84	31.80	39.57	34.76	29.83	54.00	-24.17	Horizontal		
4882.000	4.72	34.59	41.68	36.04	33.67	54.00	-20.33	Horizontal		
6287.500	5.20	36.04	40.68	32.34	32.90	54.00	-21.10	Horizontal		
7323.000	5.92	35.93	39.77	41.39	43.47	54.00	-10.53	Horizontal		
9764.000	5.98	37.48	37.66	38.34	44.14	54.00	-9.86	Horizontal		
12205.000	6.52	39.11	38.36	37.25	44.52	54.00	-9.48	Horizontal		

Worse case mode:		GFSK(DH5)		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
2116.250	2.88	32.02	39.65	51.73	46.98	74.00	-27.02	Vertical		
2997.500	3.32	33.40	40.30	49.54	45.96	74.00	-28.04	Vertical		
4936.250	4.75	34.48	41.72	51.73	49.24	74.00	-24.76	Vertical		
6487.250	5.25	36.28	40.50	49.80	50.83	74.00	-23.17	Vertical		
7440.000	6.04	35.98	39.67	53.29	55.64	74.00	-18.36	Vertical		
9920.000	5.98	37.63	37.53	52.22	58.30	74.00	-15.70	Vertical		
2057.500	2.86	31.89	39.61	52.16	47.30	74.00	-26.70	Horizontal		
4936.250	4.75	34.48	41.72	53.72	51.23	74.00	-22.77	Horizontal		
5958.500	5.11	35.64	40.96	51.35	51.14	74.00	-22.86	Horizontal		
7440.000	6.04	35.98	39.67	54.50	56.85	74.00	-17.15	Horizontal		
9920.000	5.98	37.63	37.53	57.77	63.85	74.00	-10.15	Horizontal		
12400.000	6.57	39.31	38.44	48.99	56.43	74.00	-17.57	Horizontal		
Worse case mode:		GFSK(DH5)		Test channel:		Highest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization		
2116.250	2.88	32.02	39.65	32.40	27.65	54.00	-26.35	Vertical		
2997.500	3.32	33.40	40.30	32.61	29.03	54.00	-24.97	Vertical		
4936.250	4.75	34.48	41.72	36.58	34.09	54.00	-19.91	Vertical		
6487.250	5.25	36.28	40.50	30.95	31.98	54.00	-22.02	Vertical		
7440.000	6.04	35.98	39.67	40.16	42.51	54.00	-11.49	Vertical		
9920.000	5.98	37.63	37.53	38.85	44.93	54.00	-9.07	Vertical		
2057.500	2.86	31.89	39.61	35.67	30.81	54.00	-23.19	Horizontal		
4936.250	4.75	34.48	41.72	39.17	36.68	54.00	-17.32	Horizontal		
5958.500	5.11	35.64	40.96	30.50	30.29	54.00	-23.71	Horizontal		
7440.000	6.04	35.98	39.67	41.27	43.62	54.00	-10.38	Horizontal		
9920.000	5.98	37.63	37.53	41.51	47.59	54.00	-6.41	Horizontal		
12400.000	6.57	39.31	38.44	32.84	40.28	54.00	-13.72	Horizontal		

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

## 5.12 Band edge (Radiated Emission)

Test Requirement:	FCC Part15 C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2009		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

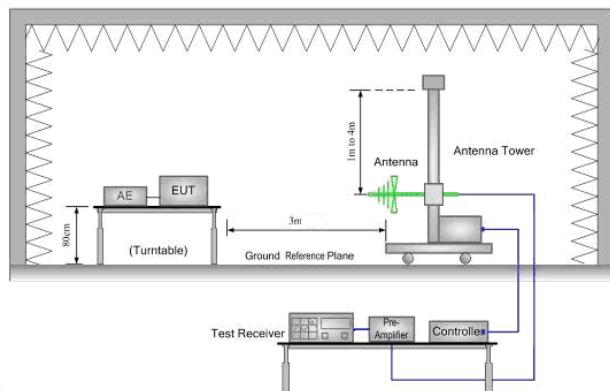


Figure 1. 30MHz to 1GHz


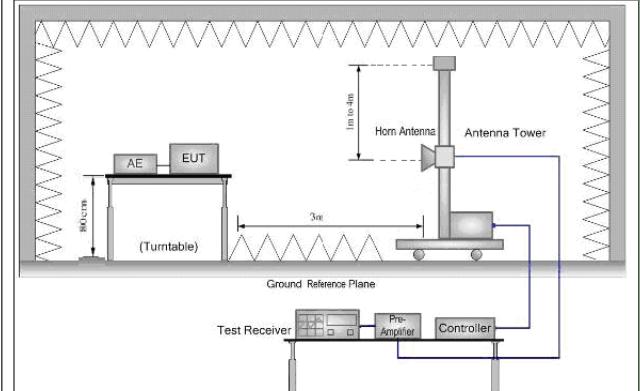


Figure 2. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"><li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li><li>g. Test the EUT in the lowest channel , the Highest channel</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li></ol>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of date type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Band edge test data**

Worse case mode:	GFSK(DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	-----------	---------------	--------	---------	------	----------

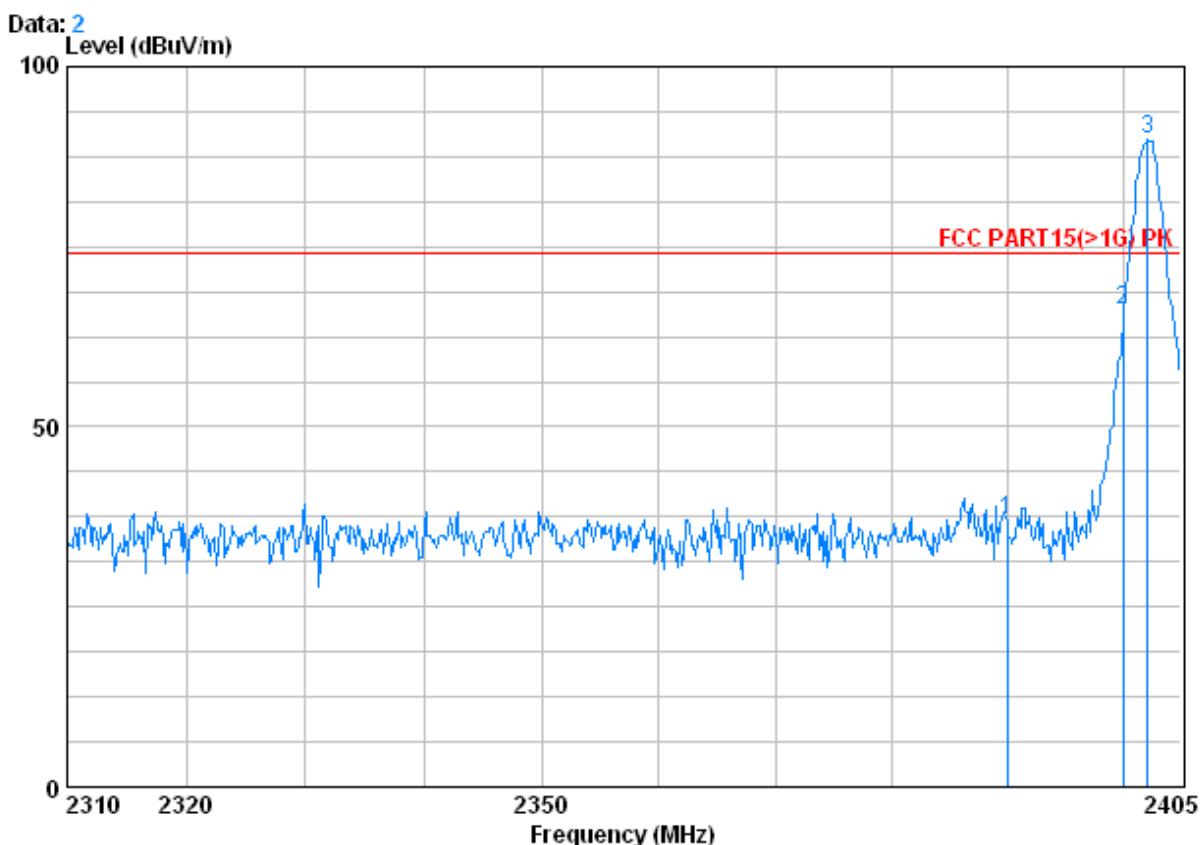


Condition : FCC PART15(&gt;1G) PK 3m VERTICAL

Job No. : 1081RF

Mode : 2402 Bandedge PK

Freq	Cable	Antenna	Preamp	Read	Limit	Over	Limit	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	41.39	37.04	74.00	-36.96
2	2400.000	2.98	32.51	39.86	70.66	66.29	74.00	-7.71
3 X	2402.150	2.98	32.51	39.86	94.16	89.79	74.00	15.79

Worse case mode:	GFSK(DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	-----------	---------------	--------	---------	------	------------

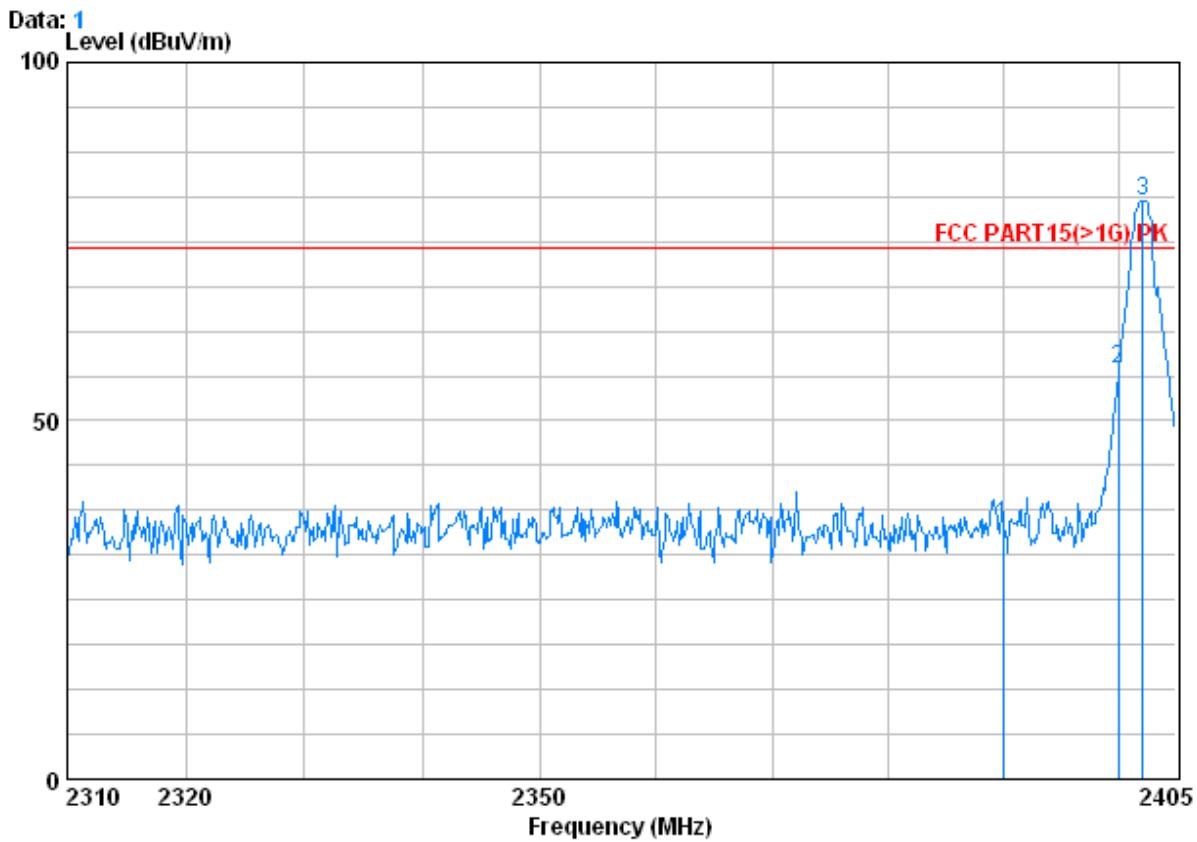


Condition : FCC PART15(&gt;1G) PK 3m HORIZONTAL

Job No. : 1081RF

Mode : 2402 Bandedge PK

Freq	Cable		Antenna	Preamp	Read	Limit	Line	Over
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	39.90	35.54	74.00	-38.46
2	2400.000	2.98	32.51	39.86	61.64	57.28	74.00	-16.72
X	2402.150	2.98	32.51	39.86	85.13	80.77	74.00	6.77

Worse case mode:	GFSK(DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	-----------	---------------	--------	---------	---------	----------

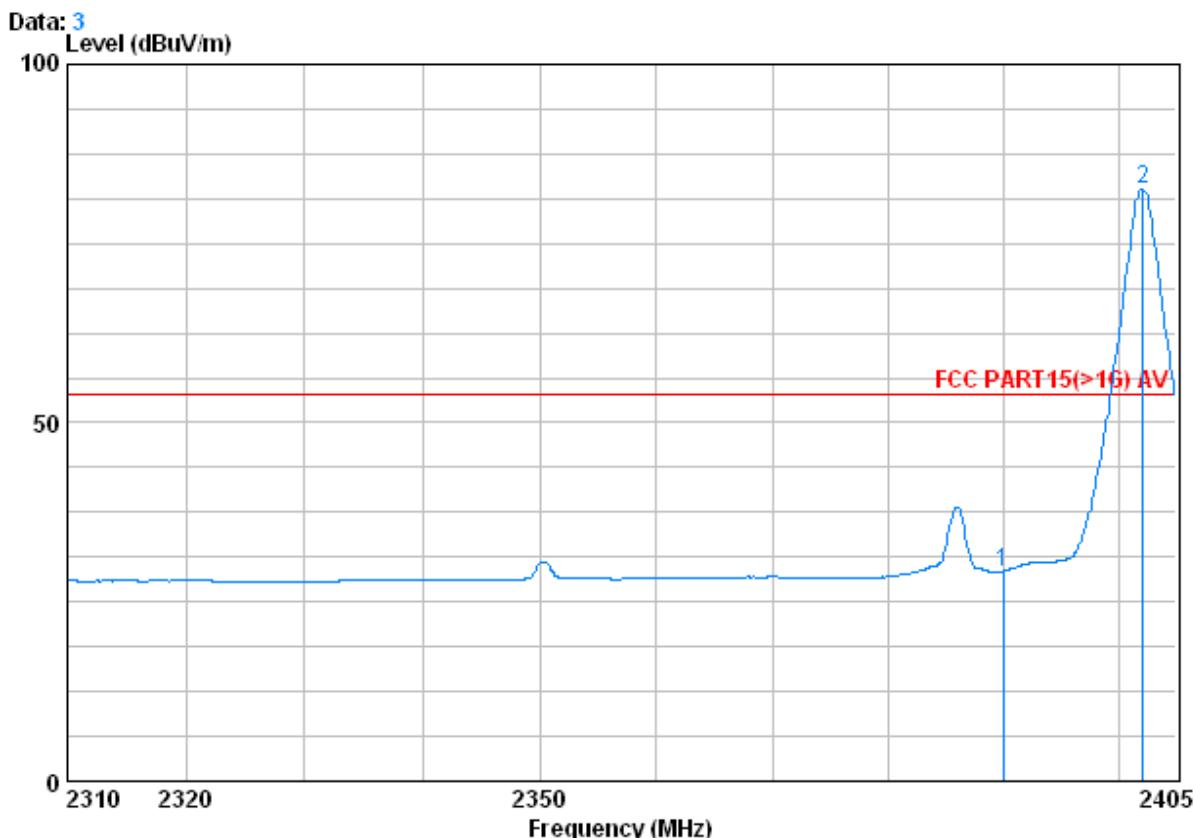


Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 1081RF

Mode : 2402 Bandedge AV

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Line Level	Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	33.61	29.25	54.00	-24.75
2 X	2402.150	2.98	32.51	39.86	86.97	82.60	54.00	28.60

Worse case mode:	GFSK(DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	-----------	---------------	--------	---------	---------	------------

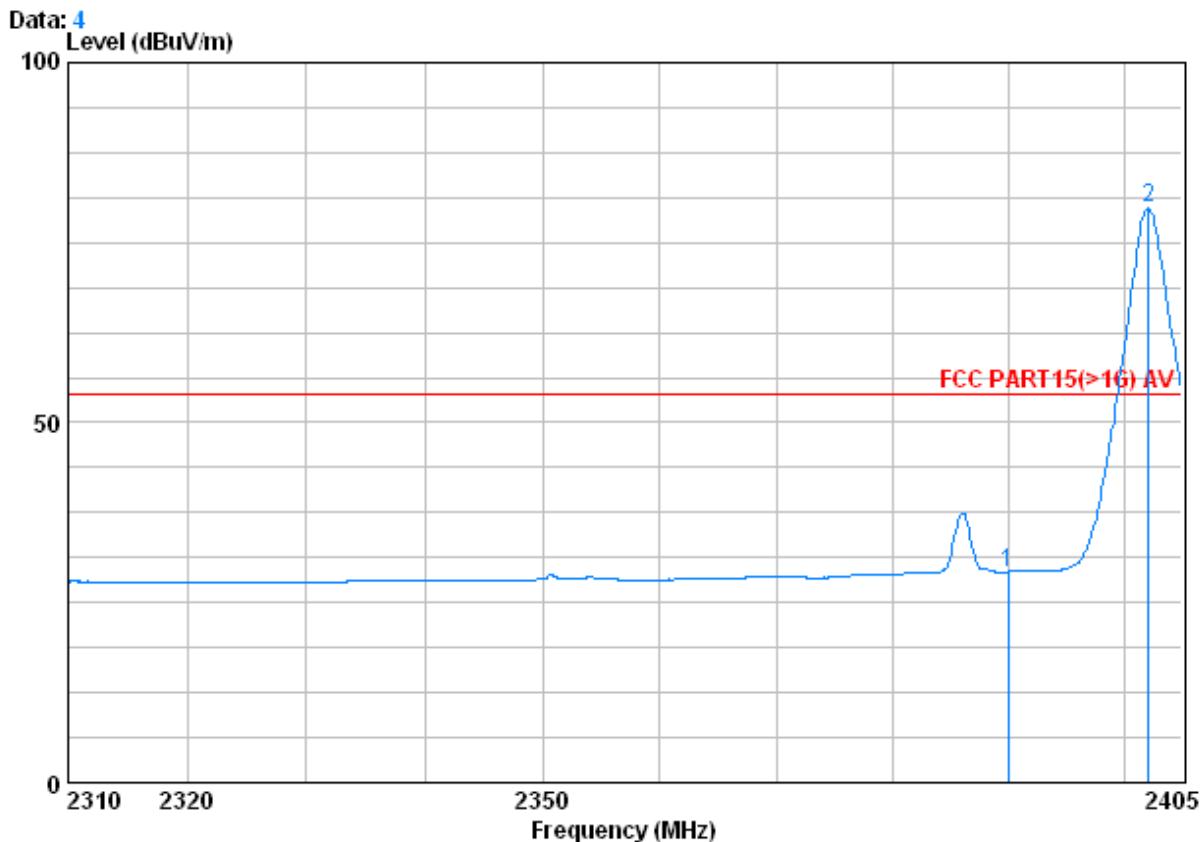


Condition : FCC PART15(&gt;1G) AV 3m HORIZONTAL

Job No. : 1081RF

Mode : 2402 Bandedge AV

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	33.60	29.25	54.00	-24.75
2 X	2402.150	2.98	32.51	39.86	84.08	79.72	54.00	25.72

Worse case mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	-----------	---------------	---------	---------	------	----------

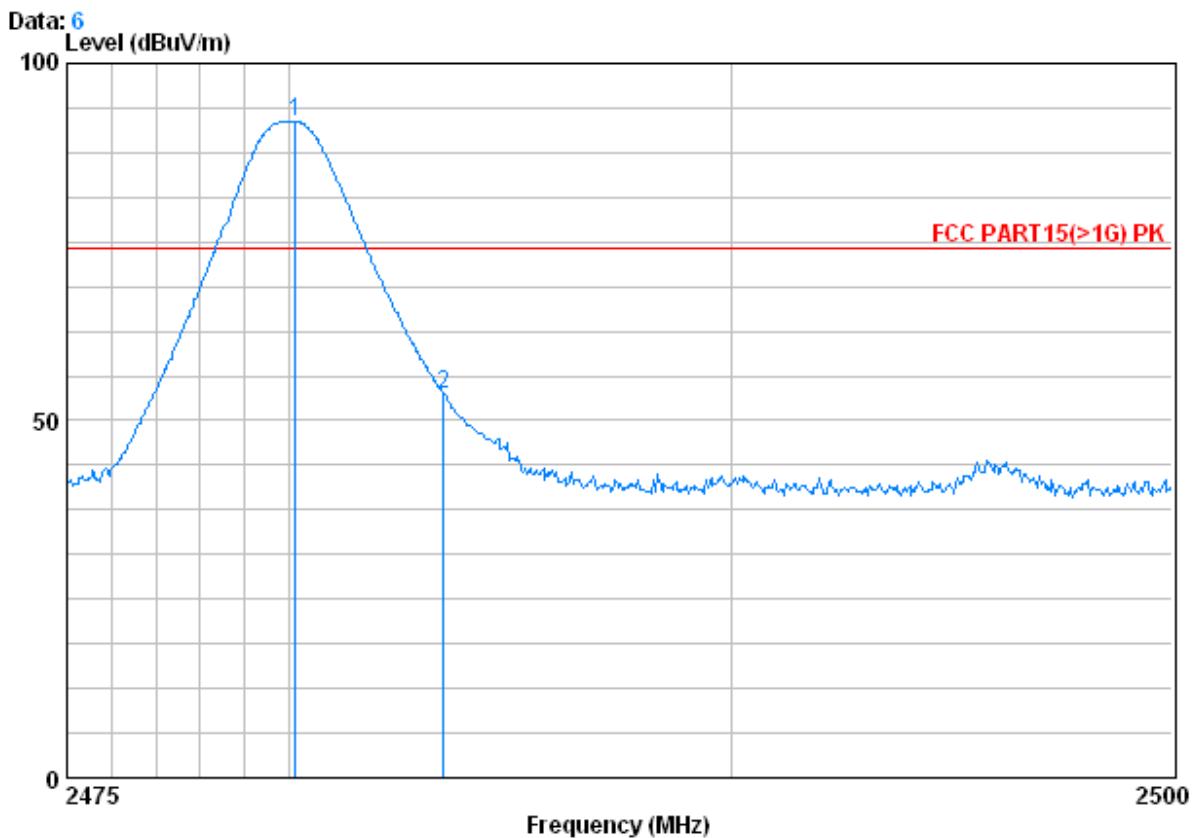


Condition : FCC PART15(&gt;1G) PK 3m VERTICAL

Job No. : 1081RF

Mode : 2480 Bandedge PK

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2480.150	3.03	32.67	39.92	96.04	91.82	74.00	17.82
2	2483.500	3.03	32.67	39.92	57.87	53.65	74.00	-20.35

Worse case mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	-----------	---------------	---------	---------	------	------------

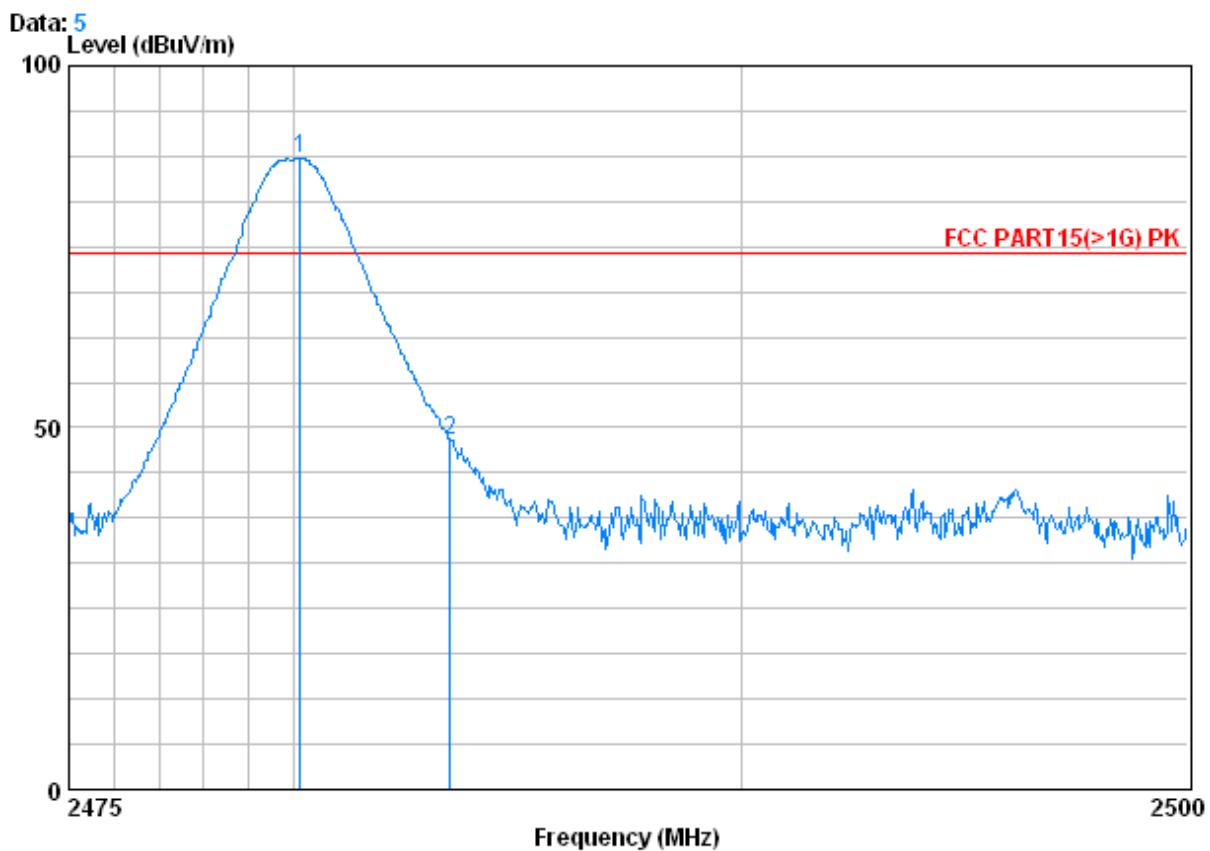

Condition : FCC PART15(>1G) PK 3m HORIZONTAL


Job No. : 1081RF

Mode : 2480 Bandedge PK

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2480.150	3.03	32.67	39.92	91.39	87.17	74.00	13.17
2	2483.500	3.03	32.67	39.92	52.56	48.34	74.00	-25.66



Worse case mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	-----------	---------------	---------	---------	---------	----------

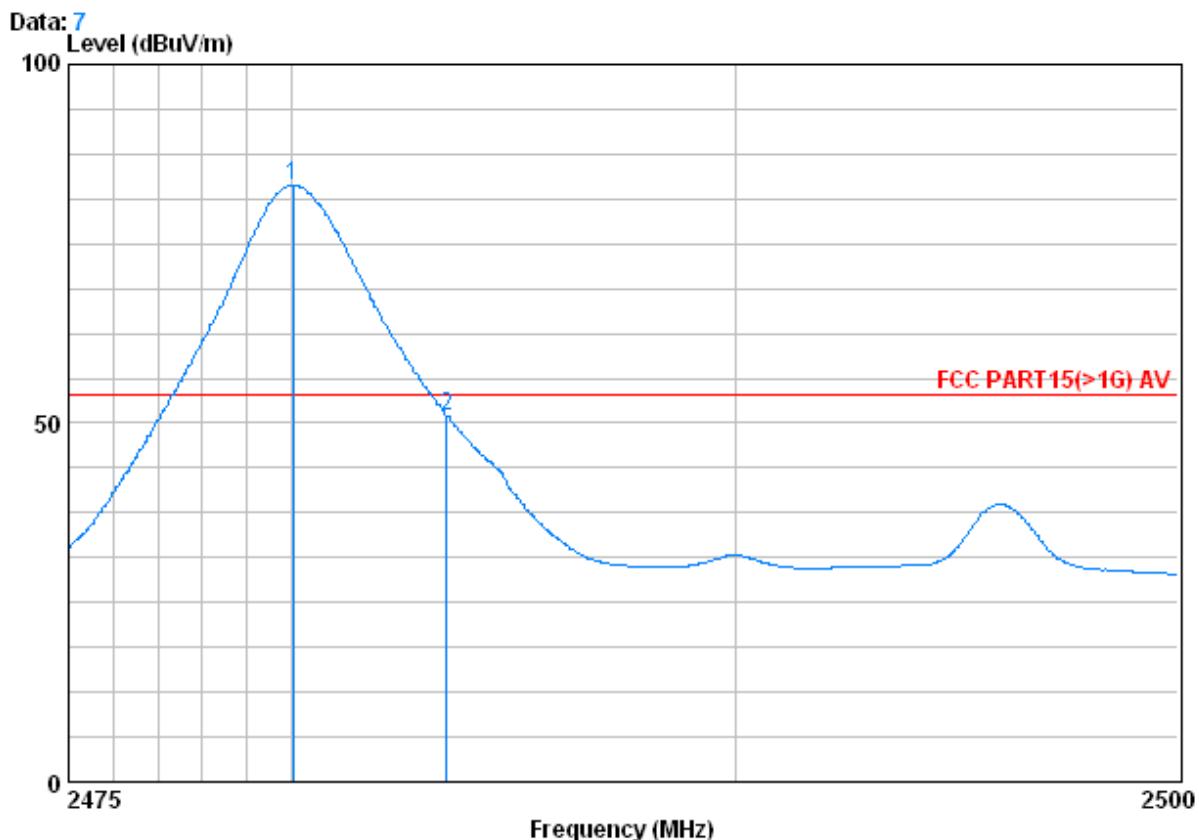


Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 1081RF

Mode : 2480 Bandedge AV

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2480.050	3.03	32.67	39.92	87.39	83.17	54.00	29.17
2	2483.500	3.03	32.67	39.92	55.20	50.98	54.00	-3.02

Worse case mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	-----------	---------------	---------	---------	---------	------------

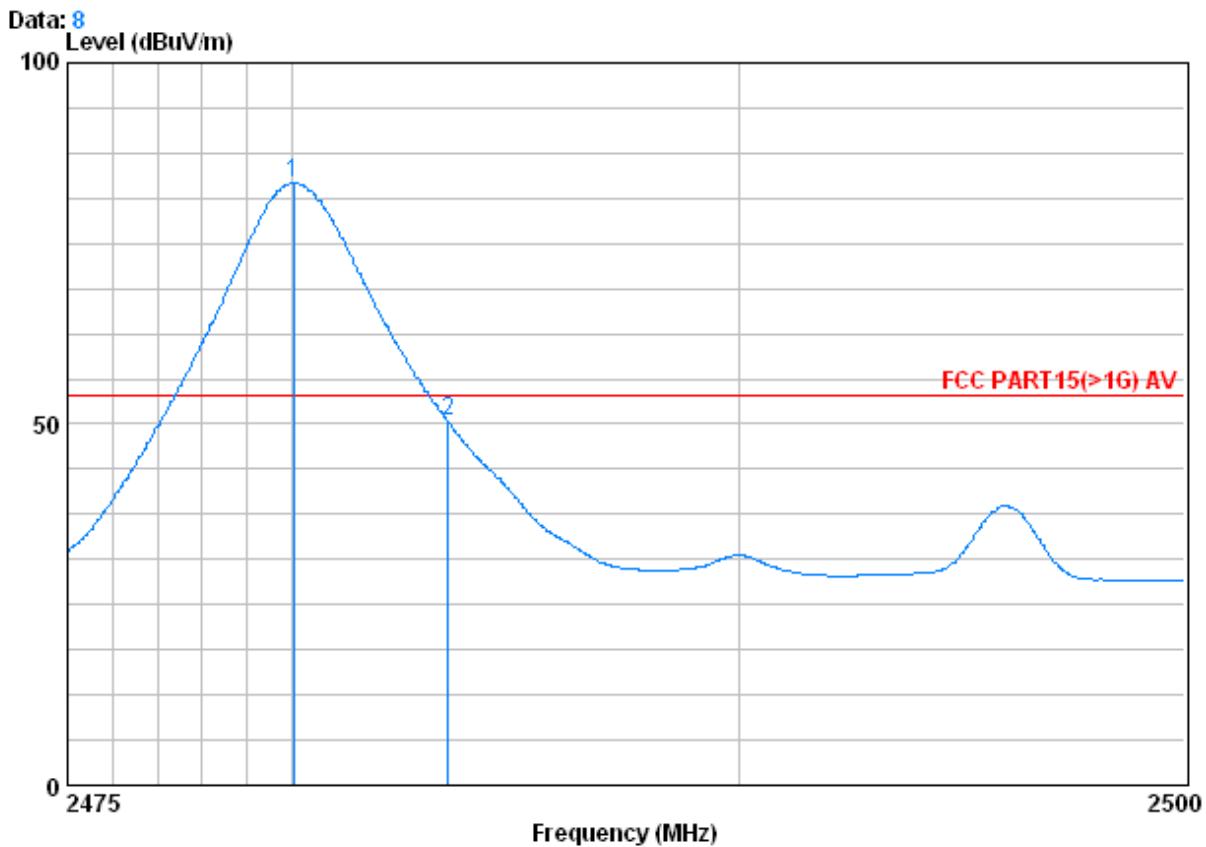

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 1081RF

Mode : 2480 Bandedge AV

Freq	Cable	Antenna	Preamp	Read	Limit	Line	Over	
	Freq	Loss	Factor	Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2480.050	3.03	32.67	39.92	87.55	83.33	54.00	29.33
2	2483.500	3.03	32.67	39.92	54.53	50.31	54.00	-3.69

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor