

RF TEST REPORT

Test item : Transmitter Assy - Folding Key
Model No. : MT FLIP 01
Order No. : DEMC1407-03023
Date of receipt : 2014-07-23
Test duration : 2014-08-05 ~ 2014-08-20
Date of issue : 2014-09-29
Use of report : FCC Original Grant

Applicant : MOTOTECH Co., Ltd..
#68-26, Mannyeon-ro, Jeongnam-myeon, Hwaseong-si, Gyeonggi-do, Korea

Test laboratory : DT&C Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : FCC Part 15 Subpart C
Test environment : See appended test report
Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

Tested by:



Engineer
SeokHwan Hong

Reviewed by:



Technical Manager
HongHee Lee

Test Report Version

| Test Report No. | Date | Description |
|-----------------|---------------|---------------|
| DRTFCC1409-1241 | Sep. 29, 2014 | Initial issue |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

CONTENTS

| | |
|---|-----------|
| 1. Equipment information..... | 4 |
| 1.1 Equipment description..... | 4 |
| 1.2 Ancillary equipment | 4 |
| 2. Information about test items..... | 5 |
| 2.1 Operating mode | 5 |
| 2.2 Tested frequency | 5 |
| 2.3 Auxiliary equipment | 5 |
| 2.4 Tested environment | 5 |
| 2.5 EMI Suppression Device(s)/Modifications | 5 |
| 3. Test Report..... | 6 |
| 3.1 Summary of tests | 6 |
| 3.2 Transmitter requirements..... | 7 |
| 3.2.1 20dB bandwidth | 7 |
| 3.2.2 Field strength of fundamental and spurious emissions..... | 8 |
| 3.2.3 Automatically deactivate..... | 10 |
| 3.2.4 Duty Cycle Correction Factor | 11 |
| 3.2.5 AC power line conducted emission..... | 12 |
| 3.2.6 Antenna requirement..... | 13 |
| APPENDIX I | 14 |

1. Equipment information

1.1 Equipment description

| | |
|-----------------------|--------------------------------|
| FCC Equipment Class | Part 15 Low Power Transmitter |
| Equipment type | Transmitter Assy - Folding Key |
| Fundamental Frequency | 433.92 MHz |
| Equipment model name | MT FLIP 01 |
| Modulation | FSK |
| Equipment serial no. | Identical prototype |
| Power | DC 3 V(Battery) |
| Antenna type | Pattern Antenna |

1.2 Ancillary equipment

| Equipment | Model No. | Serial No. | Manufacturer | Note |
|-----------|-----------|------------|--------------|------|
| - | - | - | - | - |
| - | - | - | - | - |

2. Information about test items

2.1 Operating mode

| | |
|-------------------------|---|
| Operating Mode 1 | This device was tested with continuous TX mode for field strength of fundamental and spurious emissions measurements. |
| Operating Mode 2 | Normal operating mode was used for 20 dB BW and less than 5 second requirements. |

2.2 Tested frequency

| Mode | Frequency(MHz) |
|-------------------|----------------|
| Transmitting mode | 433.92 |
| - | - |
| - | - |

2.3 Auxiliary equipment

| Equipment | Model No. | Serial No. | Manufacturer | Note |
|-----------|-----------|------------|--------------|------|
| - | - | - | - | - |

2.4 Tested environment

| | |
|---------------------------|-------------------|
| Temperature | : 24 °C |
| Relative humidity content | : 48 ~ 52 % R.H. |
| Details of power supply | : DC 3 V(Battery) |

2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
 → None

3. Test Report

3.1 Summary of tests

| FCC Part Section(s) | Parameter | Test Condition | Status Note 1 |
|--|--|-------------------|-----------------------------|
| I. Test Items | | | |
| 15.205 | Restricted bands of operation | Radiated | C |
| 15.209 | Radiated emission limits, general requirements | | C |
| 15.231(a) | Automatically deactivate | | C |
| 15.231(b) | Field strength of fundamental and spurious emissions | | C |
| 15.231(c) | 20dB bandwidth | | C |
| 15.207 | AC Power Line Conducted Emission | AC Line Conducted | NA ^{Note 2} |
| 15.203 | Antenna Requirements | - | C |
| <p>Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable</p> <p>Note 2: This device is used Battery for power supplying. Therefore this test item was not performed.</p> | | | |

The sample was tested according to the following specification:
ANSI C-63.4-2009

3.2 Transmitter requirements

3.2.1 20dB bandwidth


- Procedure:

The Transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 3 kHz. The VBW is set to 9.1 kHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

- Measurement Data: Comply

| Frequency (MHz) | 20dB Bandwidth (kHz) | Limit (kHz) |
|-----------------|----------------------|-------------|
| 433.92 | 21.010 | 1084.8 |

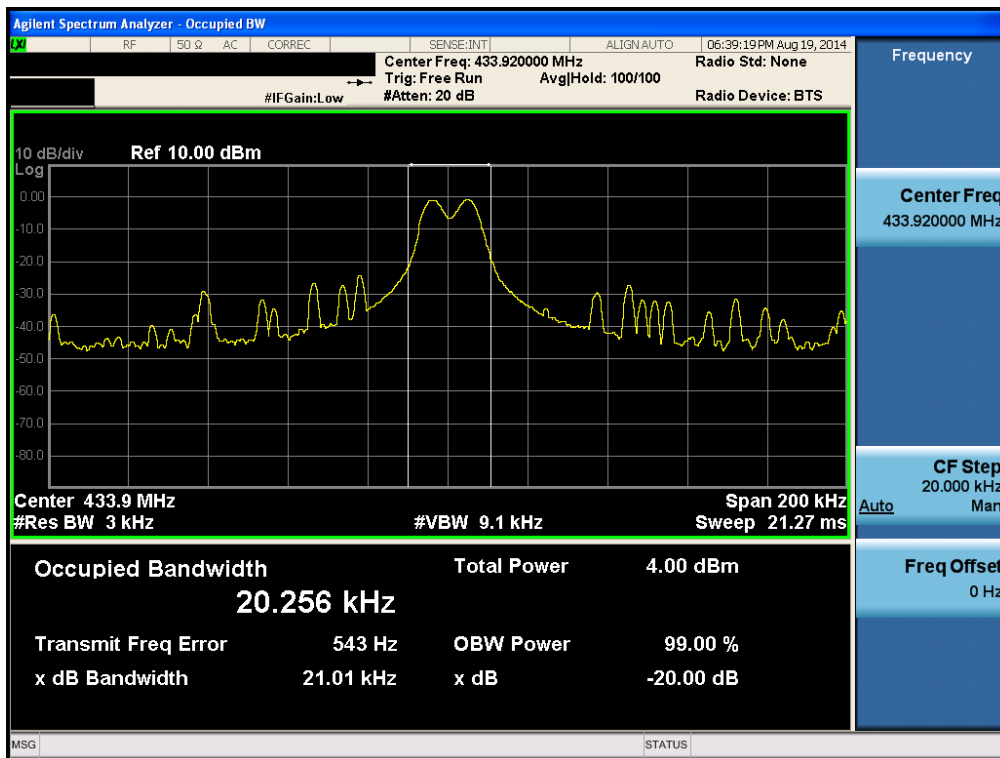

- Limit: § 15.209(c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

3.2.2 Field strength of fundamental and spurious emissions

- Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- Measurement Data: Refer to next page

- Limit:

§ 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | MHz | GHz | GHz |
|-------------------|---------------------|-------------------|-----------------|--------------|---------------|
| 0.009 ~ 0.110 | 8.41425 ~ 8.41475 | 108 ~ 121.94 | 1300 ~ 1427 | 4.5 ~ 5.15 | 14.47 ~ 14.5 |
| 0.495 ~ 0.505 | 12.29 ~ 12.293 | 123 ~ 138 | 1435 ~ 1626.5 | 5.35 ~ 5.46 | 15.35 ~ 16.2 |
| 2.1735 ~ 2.1905 | 12.51975 ~ 12.52025 | 149.9 ~ 150.05 | 1645.5 ~ 1646.5 | 7.25 ~ 7.75 | 17.7 ~ 21.4 |
| 4.125 ~ 4.128 | 12.57675 ~ 12.57725 | 156.52475 ~ | 1660 ~ 1710 | 8.025 ~ 8.5 | 22.01 ~ 23.12 |
| 4.17725 ~ 4.17775 | 13.36 ~ 13.41 | 156.52525 | 1718.8 ~ 1722.2 | 9.0 ~ 9.2 | 23.6 ~ 24.0 |
| 4.20725 ~ 4.20775 | 16.42 ~ 16.423 | 156.7 ~ 156.9 | 2200 ~ 2300 | 9.3 ~ 9.5 | 31.2 ~ 31.8 |
| 6.215 ~ 6.218 | 16.69475 ~ 16.69525 | 162.0125 ~ 167.17 | 2310 ~ 2390 | 10.6 ~ 12.7 | 36.43 ~ 36.5 |
| 6.26775 ~ 6.26825 | 16.80425 ~ 16.80475 | 167.72 ~ 173.2 | 2483.5 ~ 2500 | 13.25 ~ 13.4 | Above 38.6 |
| 6.31175 ~ 6.31225 | 25.5 ~ 25.67 | 240 ~ 285 | 2655 ~ 2900 | | |
| 8.291 ~ 8.294 | 37.5 ~ 38.25 | 322 ~ 335.4 | 3260 ~ 3267 | | |
| 8.362 ~ 8.366 | 73 ~ 74.6 | 399.90 ~ 410 | 3332 ~ 3339 | | |
| 8.37625 ~ 8.38675 | 74.8 ~ 75.2 | 608 ~ 614 | 3345.8 ~ 3358 | | |
| | | 960 ~ 1240 | 3600 ~ 4400 | | |

§ 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency [MHz] | Field Strength of Fundamental Frequency [uV/m] | Measurement Distance [m] |
|-----------------|--|--------------------------|
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

§ 15.231(b), In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

| Frequency [MHz] | Field Strength of Fundamental Frequency [uV/m] | Field Strength of Spurious Emissions [uV/m] |
|-----------------|--|---|
| 40.66 ~ 40.70 | 2,250 | 225 |
| 70 ~ 130 | 1,250 | 125 |
| 130 ~ 174 | 1,250 to 3,750 | 125 to 375 |
| 174 ~ 260 | 3,750 | 375 |
| 260 ~ 470 | 3,750 to 12,500 | 375 to 1,250 |
| Above 470 | 12,500 | 1,250 |

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

- Measurement Data: Comply

Field strength of fundamental

Measurement Distance : 3 m

| EUT Position | Frequency [MHz] | Detector Mode | ANT Pol | Reading [dBuV] | T.F [dB/m] | Averaging correction fator [dB] | Field Strength [dBuV/m] | Averaging Limit [dBuV/m] | Margin [dB] |
|--------------|-----------------|---------------|---------|----------------|------------|---------------------------------|-------------------------|--------------------------|-------------|
| X | 433.920 | PK | Hor | 75.40 | -4.90 | - | 70.50 | 80.80 | 10.30 |
| X | 433.920 | PK | Ver | 75.20 | -4.90 | - | 70.30 | 80.80 | 10.50 |
| Y | 433.920 | PK | Hor | 69.80 | -4.90 | - | 64.90 | 80.80 | 15.90 |
| Y | 433.920 | PK | Ver | 69.50 | -4.90 | - | 64.60 | 80.80 | 16.20 |
| Z | 433.920 | PK | Hor | 72.90 | -4.90 | - | 68.00 | 80.80 | 12.80 |
| Z | 433.920 | PK | Ver | 72.60 | -4.90 | - | 67.70 | 80.80 | 13.10 |

Note 1 : EUT was in continuous transmission mode and peak field strength meets AV limit.
Therefore averaging correction factor using the duty cycle is not required.

Note 2. Sample calculation

$$T.F = AF + CL - AG$$

$$/ \quad \text{Field Strength} = \text{Reading} + T.F + DF$$

$$\text{Margin} = \text{Limit} - \text{Field Strength}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

Field strength of spurious emissions

Measurement Distance : 3 m

| EUT Position | Frequency [MHz] | Detector Mode | ANT Pol | Reading [dBuV] | T.F [dB/m] | Averaging correction fator [dB] | Field Strength [dBuV/m] | Averaging Limit [dBuV/m] | Margin [dB] |
|--------------|-----------------|---------------|---------|----------------|------------|---------------------------------|-------------------------|--------------------------|-------------|
| X | 868.024 | PK | Hor | 48.40 | 2.00 | - | 50.40 | 60.80 | 10.40 |
| X | 1301.875 | PK | Hor | 43.80 | -11.30 | - | 32.50 | 60.80 | 28.30 |
| X | 1735.625 | PK | Hor | 56.70 | -9.50 | - | 47.20 | 60.80 | 13.60 |
| X | 2169.375 | PK | Hor | 46.10 | -7.70 | - | 38.40 | 60.80 | 22.40 |
| X | 2603.125 | PK | Hor | 57.10 | -5.20 | - | 51.90 | 60.80 | 8.90 |
| X | 3037.500 | PK | Hor | 61.00 | -4.00 | - | 57.00 | 60.80 | 3.80 |
| X | 3471.250 | PK | Ver | 56.60 | -3.00 | - | 53.60 | 60.80 | 7.20 |
| X | 3905.625 | PK | Hor | 46.20 | -1.00 | - | 45.20 | 60.80 | 15.60 |
| X | 4339.375 | PK | Hor | 40.90 | 0.00 | - | 40.90 | 60.80 | 19.90 |

Note 1. EUT was in continuous transmission mode and peak field strength meets AV limit.

Note 2. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 3. Sample calculation

$$T.F = AF + CL - AG$$


$$/ \quad \text{Field Strength} = \text{Reading} + T.F + DF$$

$$\text{Margin} = \text{Limit} - \text{Field Strength}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

3.2.3 Automatically deactivate

- Measurement Data:

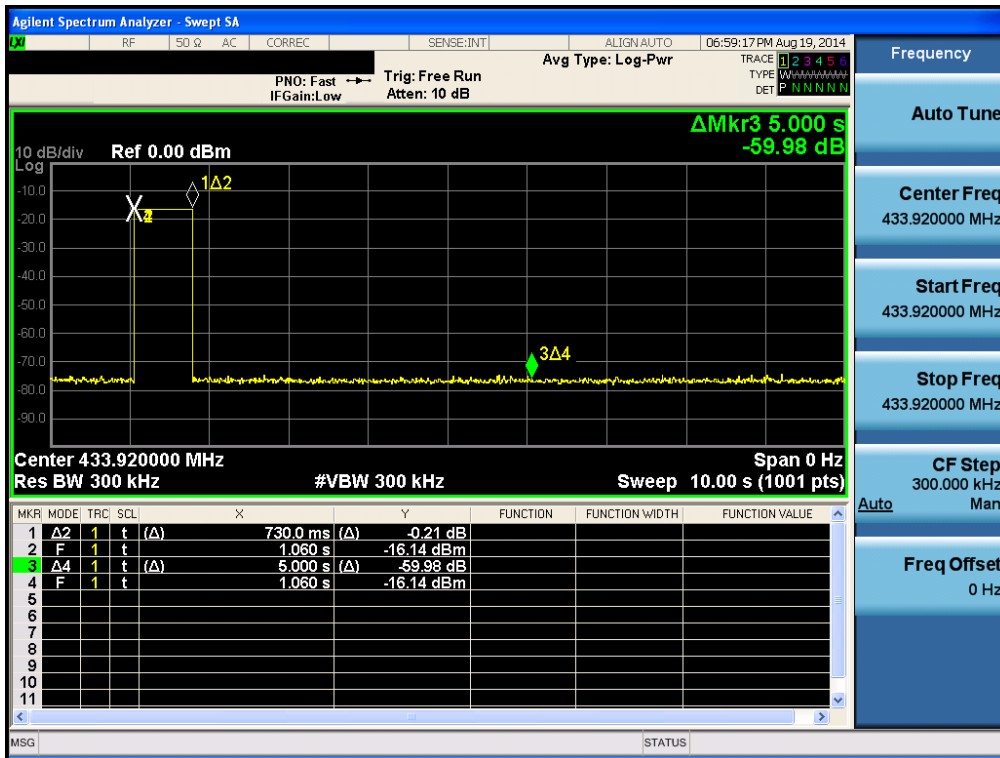


- Limit: § 15.231(a)

- (a) The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:
- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
 - (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
 - (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
 - (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition
 - (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

3.2.4 Duty Cycle Correction Factor

- Measurement Data:

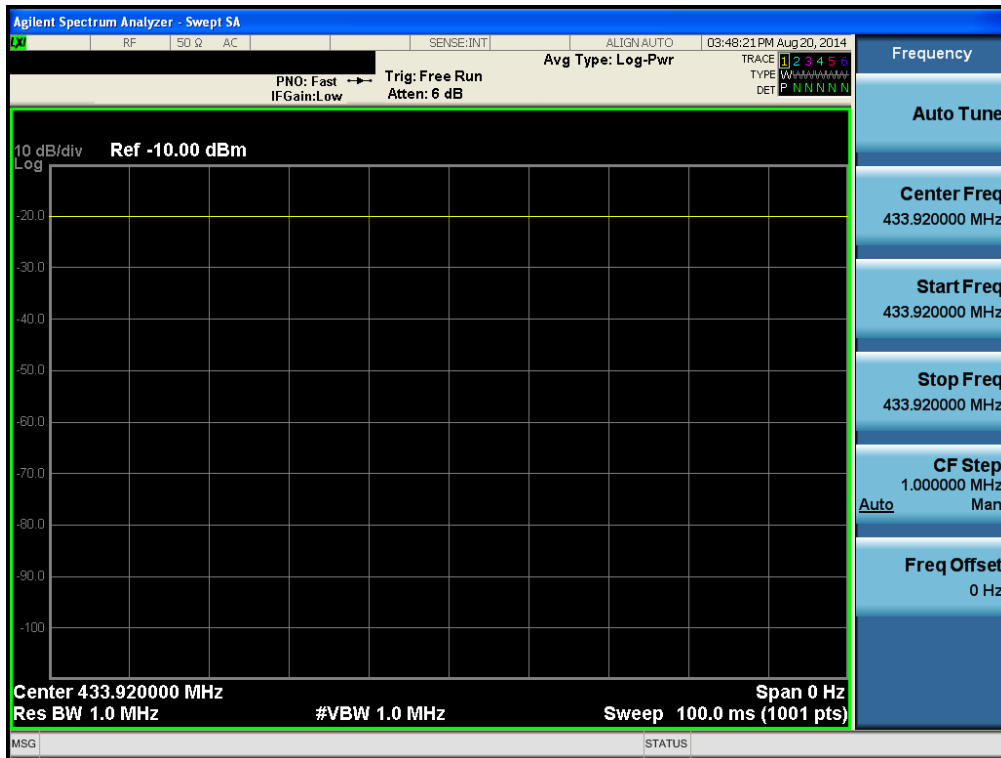

$T_{on+off} = 100 \text{ ms}$
 $T_{on} = 100 \text{ ms}$

Duty Cycle Correction Factor = $20\log(T_{on} / T_{off}) = 20\log(1) = 0$

- Limit:

No dedicated Limit specified in the Rules.

3.2.5 AC power line conducted emission

- Procedure:

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

- Measurement Data: **NA**

Note: This device is used Battery for power supplying.

Therefore this test item was not performed.

- Limit:

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Conducted Limit (dBuV) | |
|--------------------------|------------------------|------------|
| | Quasi-Peak | Average |
| 0.15 ~ 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

* Decreases with the logarithm of the frequency

3.2.6 Antenna requirement

- Procedure:

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

- Measurement Data: Comply

This device uses a pattern antenna. Please refer to internal photo.

- Limit: § 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

APPENDIX I

TEST EQUIPMENT FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

| Type | Manufacturer | Model | Cal.Date (yy/mm/dd) | Next.Cal.Date (yy/mm/dd) | S/N |
|---------------------|--------------|-----------|------------------------|-----------------------------|------------|
| MXA Signal Analyzer | Agilent | N9020A | 13/11/05 | 14/11/05 | MY48011075 |
| Thermo Hygrometer | BODYCOM | BJ5478 | 14/05/13 | 15/05/13 | 120612-2 |
| HORN ANT | Schwarzbeck | BBHA9120A | 14/04/14 | 16/04/14 | 322 |
| LOOP Antenna | Schwarzbeck | FMZB1513 | 14/04/14 | 16/04/14 | 1513-128 |
| BILOG ANTENNA | SCHAFFNER | CBL6112B | 12/11/06 | 14/11/06 | 2737 |
| Amplifier (22dB) | H.P | 8447E | 14/01/08 | 15/01/08 | 2945A02865 |
| Amplifier (30dB) | Agilent | 8449B | 14/02/27 | 15/02/27 | 3008A01590 |
| EMI TEST RECEIVER | R&S | ESU | 14/01/08 | 15/01/08 | 100014 |