

**FCC
Electromagnetic Compatibility
Test Report**

For

**Model MiY-ID
with HID Reader**

**FCC ID: DGFSSDIDHID
IC: 458A-SSDIDHID**

**Safety and Security Systems Division
St. Paul, MN**

December 1, 2011

Report Number: F0811002B

**Prepared By:
3M Regulatory Engineering and Quality
EMC Laboratory
410 Fillmore Avenue, Building 76
St. Paul, Minnesota 55144-1000**

| | | | |
|----------------|-----------------------|-----------------------|--------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 2 of 43 |

CERTIFICATE OF COMPLIANCE

| | |
|----------------------|--------------------------|
| MANUFACTURER'S NAME: | 3M™ Company |
| NAME OF EQUIPMENT: | MiY-ID (with HID reader) |
| MODEL NUMBER: | MiY-ID |
| TEST REPORT NUMBER: | F0811002B |
| DATE: | December 1, 2011 |

**USA (FCC) - Title 47, Code of Federal Regulations (2009)
Industry Canada (IC) – ICES, RSS**

EMISSIONS:

**Radiated / Conducted (FCC Part 15, Subpart B, Class A)
(IC, ICES-003)**

**Radiated / Conducted (FCC Part 15, Subpart C)
(IC, RSS-210, RSS-GEN)**

**RF Exposure (FCC - Exempt)
(IC - Complies with RSS-102)**

FCC ID: DGFSSDIDHID

IC ID: 458A-SSDIDHID

As the responsible EMC Project Engineer, I hereby declare that the equipment tested, as specified in the test report, at the 3M Product Safety EMC Laboratory is in compliance with 47 CFR, Part 15, Subpart B and Subpart C, and Industry Canada RSS & ICES Standards. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Robert E. Heller
Senior EMC Engineer



Lab Code 200033

| | | | |
|----------------|-----------------------|-----------------------|--------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 3 of 43 |

TABLE OF CONTENTS

| | |
|-------|--|
| | Title Page |
| | Certificate of Compliance |
| | Table of Contents |
| 1.0 | Test Summary |
| 2.0 | Introduction |
| 2.1 | Scope |
| 2.2 | EUT Description and Operation |
| 2.3 | Modifications to EUT |
| 2.4 | Measurement Uncertainty |
| 3.0 | Applicable Documents |
| 4.0 | Conducted Emissions |
| 4.1 | Test Procedure |
| 4.2 | Test Criteria |
| 4.3 | Test Results |
| 4.4 | Test Setup Photo |
| 5.0 | Radiated Emissions |
| 5.1 | Frequency Stability |
| 5.1.1 | Test Procedure |
| 5.1.2 | Test Criteria |
| 5.1.3 | Test Results |
| 5.1.4 | Test Setup Photo |
| 5.2 | Emissions Bandwidth |
| 5.2.1 | Test Procedure |
| 5.2.2 | Test Criteria |
| 5.2.3 | Test Results |
| 5.2.4 | Test Setup Photo |
| 5.2.5 | 99% Occupied Bandwidth Test Procedure and Test Results |
| 5.3 | Spurious Emissions (9KHz to 30 MHz) |
| 5.3.1 | Test Procedure |
| 5.3.2 | Test Criteria |
| 5.3.3 | Test Results |
| 5.3.4 | Test Setup Photo |
| 5.4 | Spurious Emissions (30 MHz to 1000 MHz) |
| 5.4.1 | Test Procedure |
| 5.4.2 | Test Criteria |
| 5.4.3 | Test Results |

| | | | |
|---|-----------------------|-----------------------|---|
|  | MiY-ID (HID) | Report # F0811002B |  |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 4 of 43 |

5.5 Radiated Emissions (30 MHz - 40 GHz)

5.5.1 Test Procedure

5.5.2 Test Criteria

5.5.3 Test Results

5.5.4 Test Setup photo

5.6 Human Exposure (EMF)

5.6.1 Test Procedure

5.6.2 Test Criteria

5.6.3 Test Results

5.6.4 Test Setup Photo

6.0 List of Test Equipment

7.0 Labeling Information

| | | | |
|----------------|-----------------------|-----------------------|--------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 5 of 43 |

1.0 TEST SUMMARY

| | |
|------------------------|---|
| Test Report Number: | F0811002B |
| Requester: | Chris Crump |
| Company: | 3M Cogent SSD 639 N Rosemead Blvd, Pasadena, CA 91107 |
| Telephone Number: | 626-325-9600 |
| Equipment Under Test: | MiY series Readers Model MiY-ID (HID) |
| Condition upon receipt | Device was in good working condition |
| Test Environment: | See individual test sheets. |
| Test Results: | Passed the following tests: Conducted Emissions: FCC Part 15 Subpart B, ICES-003 Radiated Emissions: FCC Part 15 Subpart B, ICES-003 Conducted Emissions: FCC Part 15 Subpart C, IC RSS-210, RSS-Gen Radiated Emissions: FCC Part 15 Subpart C, IC RSS-210, RSS-Gen IC RSS-102 |
| Modifications: | No modifications were required. |
| Test Location: | 3M Product Safety EMC Laboratory Building 76-1-01 410 Fillmore Ave. St. Paul, MN 55144-1000 |

| | | | |
|---|-----------------------|-----------------------|---|
|  | MiY-ID (HID) | Report # F0811002B |  |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 6 of 43 |

2.0 INTRODUCTION

2.1 Scope

This report contains results describing the conformance of the Equipment Under Test (EUT) to FCC Part 15, Subpart B and IC ICES-003 rules for unintentional radiators and FCC Part 15, Subpart C and IC RSS rules for intentional radiators.

This report is the confidential property of the client and applies only to the specific item tested under the stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. This report shall not be reproduced except in full without the written approval of the testing laboratory. The appropriate testing standards and references that were used are contained in Section 3.0. Worst case test data, test configuration, and photographs (worst case configuration) are provided in Sections 4.0 and 5.0. Equipment information is contained in Section 6.0. Documentation labeling information is contained in Section 7.0.

Subsequent tests are necessary from time to time on equipment taken at random from production. Retesting of the EUT is also required when the EMC profile has been changed or is suspected of being changed.

The 3M Regulatory Engineering and Quality EMC Laboratory is recognized under the United States Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC Guide 17025 and the relevant requirements of ISO 9002 (ANSI/ASQC Q92-1987) as suppliers of test results. Accreditation by the National Voluntary Laboratory Accreditation Program is awarded for specific services, listed on the Scope of Accreditation for: Electromagnetic Compatibility and Telecommunications FCC under Lab Code 200033. A complete copy of the Scope of Accreditation is available upon request.

The FCC Site Registration Number is 93334. The Industry Canada (IC) Site Registration Number is 458A-1.

The NVLAP accreditation or this test report does not in any way constitute or imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

| | | | |
|----------------|-----------------------|-----------------------|--------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 7 of 43 |

2.2 EUT Descriptions and Operation

The Equipment Under Test (EUT) was the 3M™ Cogent MiY-ID. The MiY-ID is 3M Cogent's latest outdoor multi-purpose, multi-factor biometric access control reader. As new security standards, companies are looking for a security product that meets current PSCA standards for PIV, CAC, TWIC and others. 3M Cogent's MiY-ID product allows them to meet current standards and easily conform to changing standards without having to replace their PACS readers. The MiY-ID contains a HID Contactless reader at 13.56 MHz, a SCM Contact reader, and a Futronic Sensor. It ships with Cogent GateApp software and supports Time and Attendance. The EUT contains an internal antenna that is 72.2 square cm (9.5 cm by 7.6 cm). The EUT was tested while exercising all functions. The EUT is powered by 12 VDC which is supplied by the customer.

The full part number for the device is: MiY-ID-2-0102-XXXX. The XXXX represents the available software options.



MiY-ID

| | | | |
|----------------|-----------------------|-----------------------|--------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 8 of 43 |

2.3 Modifications to EUT

No modifications were required.

2.4 Measurement Uncertainty

The data and test results referenced in this report are true and accurate. However, there may be deviations within the calibration limits of the test equipment and facilities that can account for deviations. The following table lists the measurement uncertainty for the emissions testing. Furthermore, EUT component and manufacturing process variables may result in additional deviation.

| Emission test | Confidence (95%) | Measurement Uncertainty | CISPR Limit |
|---|---------------------|----------------------------|----------------|
| Radiated Emissions (30 MHz – 5 GHz) | k=2.0 | 4.11 dB | 5.20 dB |
| Conducted Emissions (150 kHz – 30 MHz) | k=2.0 | 3.29 dB | 3.60 dB |

| | | | |
|----------------|-----------------------|-----------------------|--------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 9 of 43 |

3.0 APPLICABLE DOCUMENTS

The following documents were used as references. The dates that are referenced are the dates of the latest amendments. All 3M Test Procedures can be found in the Document Center of the SEMS QDS System.

| | | |
|--|--|------|
| CFR 47: 2009 | Part 15 Radio Frequency Devices, Subpart B Unintentional Radiators and Subpart C, Intentional Radiators. | |
| CISPR 16-1 | Specification for radio disturbance and immunity measuring apparatus and methods | |
| | -1 Measuring Apparatus | 2006 |
| | -2 Ancillary Equipment – Conducted Disturbance | 2004 |
| | -3 Ancillary Equipment – Disturbance Power | 2004 |
| | -4 Ancillary Equipment – Radiated Disturbance | 2004 |
| CISPR 16-2 | Specification for radio disturbance and immunity measuring apparatus and methods | |
| | -1 Conducted Disturbance Measurements | 2003 |
| | -2 Measurements of Disturbance Power | 2004 |
| | -3 Radiated Disturbance Measurements | 2003 |
| CISPR 16-4 | -1 Uncertainties in Standardized EMC Tests | 2005 |
| ANSI C63.4:2009 | American National Standard for Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz. | |
| ICES-003 | Industry Canada, Interference-Causing Equipment Standard, 2004 Issue 4 | |
| RSS-GEN | Industry Canada, Radio Standards Specification Issue 3 2010 | |
| RSS-210 | Industry Canada, Radio Standards Specification Issue 8 2010 | |
| RSS-102 | Industry Canada, Radio Frequency Exposure Compliance, Issue 4, 2010 | |
| 3M Test Procedure: Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2: | | |
| 3M Test Procedure: Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY: | | |
| 3M Test Procedure: Conducted Emissions Test (150 kHz – 30 MHz), PBLI-S8LR2 | | |
| 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM | | |
| 3M Test Procedure: 99% Power Bandwidth Test, PBLI-7C9JVN | | |

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 10 of 43 |

4.0 CONDUCTED EMISSIONS TESTING

Conducted emissions testing was performed in accordance with ANSI C63.4, FCC Part 15 and 3M Test Procedures: Conducted Emissions Test (150 kHz – 30 MHz), PBLI-6S8LR2 and 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. Conducted emissions tests were made to determine the level of electromagnetic noise that is conducted onto the power mains from the EUT.

4.1 Test Procedure:

A Line Impedance Stabilization Network (LISN) with 50Ω /50μH characteristic was used to isolate the EUT and give accurate and repeatable readings. An EMI test receiver was used for the emissions measurements in the range from 150 KHz to 30 MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Initial results were measured at discrete frequencies utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak and average measurements recorded were determined by the following: Result (dBμV) = receiver reading (μV) + LISN (dB) + cable loss (dB)

4.2 Test Criteria:

The FCC Class 'B' conducted limits are given below. The lower limit shall apply at the transition frequency.

| Mains Terminal Disturbance Limits | | |
|-----------------------------------|-----------------------------|------------------------------|
| Frequency (MHz) | Quasi-Peak (dBμV) | Average (dBμV) |
| 0.15 to 0.50 | 66 to 56 Decreasing with | 56 to 46 log of frequency |
| 0.50 to 5.0 | 56 | 46 |
| 5.0 to 30.0 | 60 | 50 |

4.3 Test Results

The EUT met the conducted emission and discontinuous requirements.

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 11 of 43 |



| | | | |
|------------------------|--------------------|---------------------------|---------|
| Report Number | F0811002B | Date | 11/1/11 |
| EUT Name | MiY series readers | EUT Power | 12 VDC |
| EUT Model | MiY-ID | Test Std | FCC |
| EUT Serial # | MiY-ID-2-0102-XXXX | Temperature (°C) | 22 |
| EUT Description | Access control | Humidity (%) | 23 |
| | | Air Pressure (kPa) | 98.7 |

MAXIMIZED FILES MiYHID 11/1/11 sc1 + - VOLTAGE/HERTZ 12 VDC

| FREQUENCY (MHz) | PEAK (dBµV) | | QUASI-PEAK (dBµV) | | | | AVERAGE (dBµV) | | | |
|--------------------|----------------|------|----------------------|------|-------|-------------------|-------------------|------|-------|-------------------|
| | + | - | + | - | Limit | Passing Margin | + | - | Limit | Passing Margin |
| .154 | 26.7 | 26.1 | - | - | 65.8 | 39.1 | - | - | 55.8 | 29.1 |
| .300 | 24.9 | 25.0 | - | - | 60.2 | 35.2 | - | - | 50.2 | 25.2 |
| 1.00 | 18.9 | 19.8 | - | - | 56 | 45.2 | - | - | 46 | 35.2 |
| 5.00 | 20.4 | 20.1 | - | - | 56 | 44.6 | - | - | 46 | 34.6 |
| 13.56 | - | - | 45.1 | 45.0 | 60 | 14.9 | 45.0 | 45.0 | 50 | 5.0 |
| 27.12 | - | - | 34.7 | 30.9 | 60 | 25.3 | 33.0 | 25.7 | 50 | 17.0 |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

| | |
|--------------------------------|------------------|
| Test Engineer: Bruce Jungwirth | Date: 1 Nov 2011 |
|--------------------------------|------------------|

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 12 of 43 |

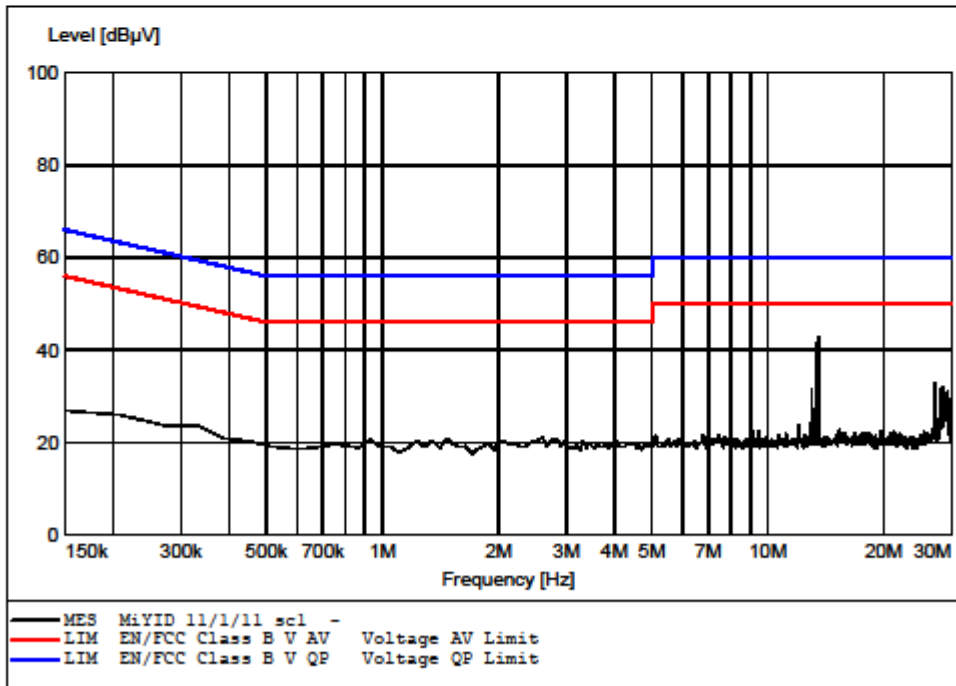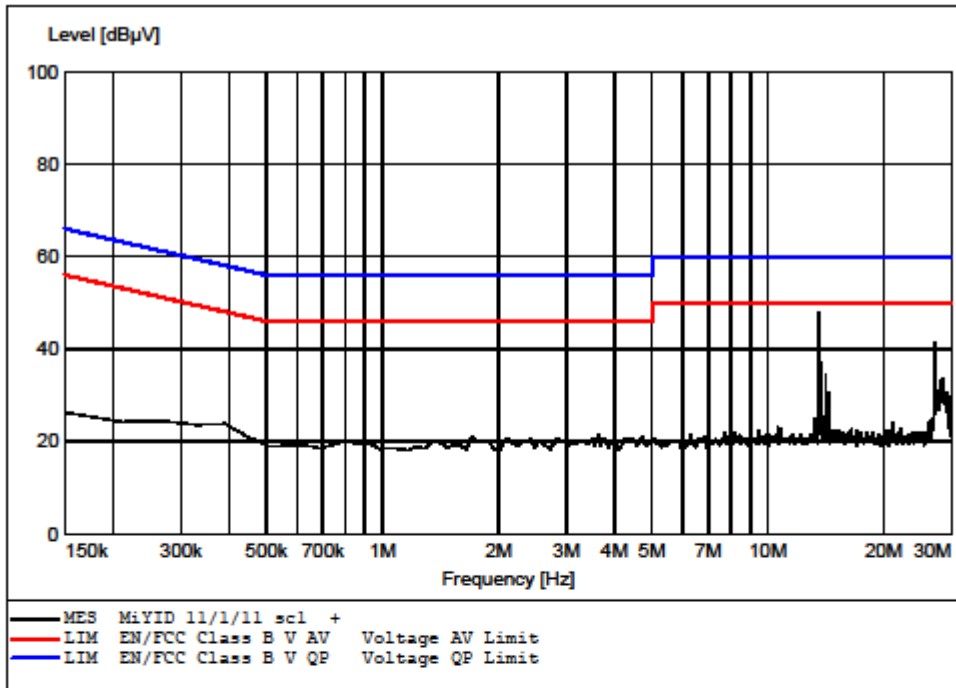

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 13 of 43 |

4.4 Test Setup Photo



Conducted Emissions

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 14 of 43 |

5.0 Radiated Emissions Testing

The EUT was placed in an anechoic chamber and radiated emissions testing was performed in accordance with FCC Part 15.225 and 3M Test Procedures: Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2, Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY and 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. Radiated emissions measurements were made to determine the level of electromagnetic energy radiating from the EUT.

5.1 Frequency Stability

The Frequency Stability testing was performed in accordance with ANSI C63.4 and FCC Part 15.225 (e) to insure that the intentional radiator frequency stability was within the allowable limits for input power and temperature variations.

5.1.1 Test Procedure

The Frequency Stability was measured using the radiated signals from the EUT so that the measurement equipment would not load the radio frequency circuits. A frequency counter was used for the frequency stability measurements. A close field probe was attached to the counter and placed near the antenna of the reader for measurement. The Reader was put into a continuous output mode through instructions from the host computer (test mode of operation). 1) The frequency was measured while the input DC power to the Intentional Radiator (RFID Reader) was varied over the required input voltage range. 2) The frequency was also measured while the ambient air temperature was varied over the required ambient temperature range (measurements are taken within 1 minute of startup, and after 10 minutes of operation at each test condition).

5.1.2 Test Criteria

The FCC Part 15, Subpart C for Frequency Stability Limits versus Supply Voltage are given as:

| Carrier Frequency (MHz) | Voltage Range % of Nominal Supply ($\pm 15\%$) | Max. Frequency Change (%) |
|-------------------------|--|---------------------------|
| 13.56 | 10.2 DC to 13.8 DC | +/- 0.01 % |

The FCC Part 15, Subpart C for Frequency Stability Limits versus Temperature is given as:

| Carrier Frequency (MHz) | Temperature Range (degrees C) | Max. Frequency Change (%) |
|-------------------------|-------------------------------|---------------------------|
| 13.56 | -20 to +50 | +/- 0.01 % |

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 15 of 43 |

5.1.3 Test Results

The EUT met all FCC Part 15, Subpart C Frequency Stability requirements. The worst case for voltage and temperature is as follows:

Frequency Stability Data Sheet

| Measurement | Startup | 2 Minutes | 5 Minutes | 10 Minutes |
|----------------|---------|-----------|-----------|------------|
| 120Vdc (+20°C) | 13.5598 | 13.5598 | 13.5598 | 13.5598 |
| +50°C (12 Vdc) | 13.5598 | 13.5598 | 13.5598 | 13.5599 |
| -20°C (12 Vdc) | 13.5598 | 13.5598 | 13.5598 | 13.5598 |
| | | | | |
| | | | | |

Note: For 13.56 MHz RFID transmitters, the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency (± 135.6 kHz).

Tested by Mike Schultz

Date 23 September 2011

Report # F0811002B
MiY ID with HID Reader

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 16 of 43 |

5.1.4 Test Setup Photo



Frequency Stability

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 17 of 43 |

5.2 Emission Bandwidth

The EUT was placed in a semi-anechoic chamber and the Emission Bandwidth testing was performed in accordance with ANSI C63.4, FCC Part 15.225 and 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM The Emission Bandwidth measurements were made to determine the intentional radiator frequency and determine the level of electromagnetic energy radiated at that frequency and at the band edges from the EUT.

5.2.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. The intentional radiator frequency and band edge frequencies utilizing quasi-peak detection were then maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak measurements recorded were determined by the following formula:

$$\text{Result (dB}\mu\text{V/m)} = \text{receiver level } (\mu\text{V)} + \text{antenna factor (dB/m)} + \text{cable loss (dB)} - \text{preamp gain (dB)} + \text{lineal conversion (dB)}.$$

5.2.2 Test Criteria

The FCC Part 15 Subpart C, Paragraph 15.225 Carrier Frequency Limits are given as:


Lower Band Edge: 13.553 MHz
Upper Band Edge: 13.567 MHz

The FCC Part 15, Subpart C radiated limits are given as:


| Frequency (MHz) | Distance (Meters) | Field Strength (dB μ V/m) |
|------------------|-------------------|-------------------------------|
| 1.705 to 13.110 | 10 | 48.62 |
| 13.110 to 13.410 | 10 | 59.58 |
| 13.410 to 13.553 | 10 | 69.55 |
| 13.553 to 13.567 | 10 | 103.00 |
| 13.567 to 13.710 | 10 | 69.55 |
| 13.710 to 14.010 | 10 | 59.58 |
| 14.010 to 30.000 | 10 | 48.62 |

Note: 40 dB/decade extrapolation factor was used per 15.31.

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 19 of 43 |

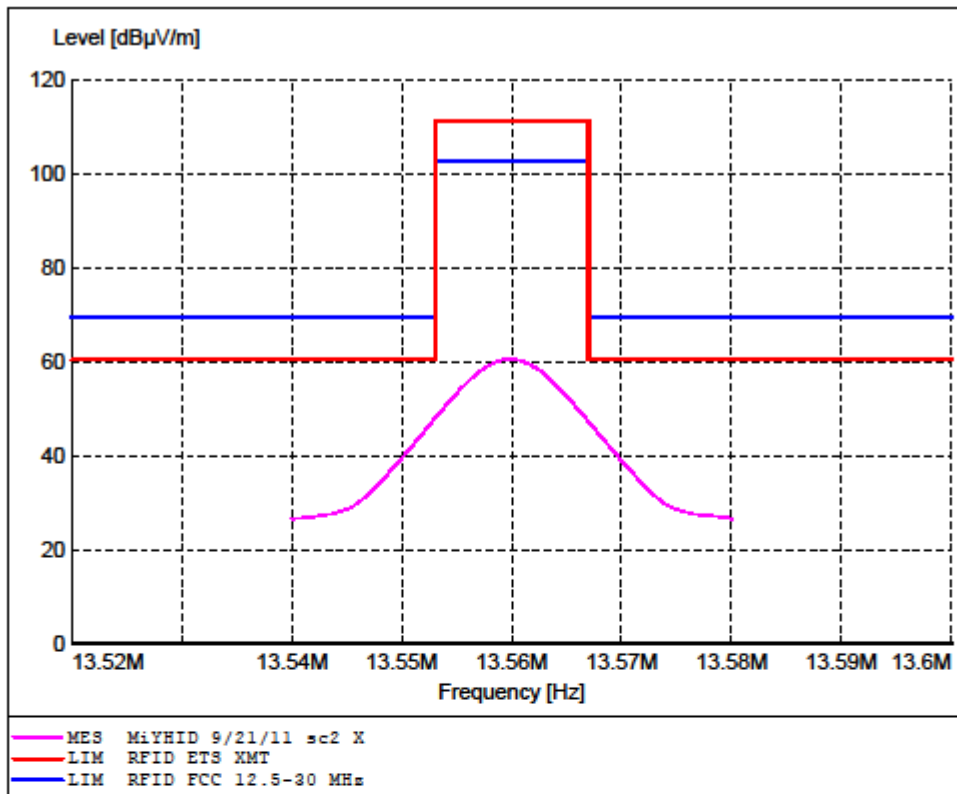


| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 20 of 43 |

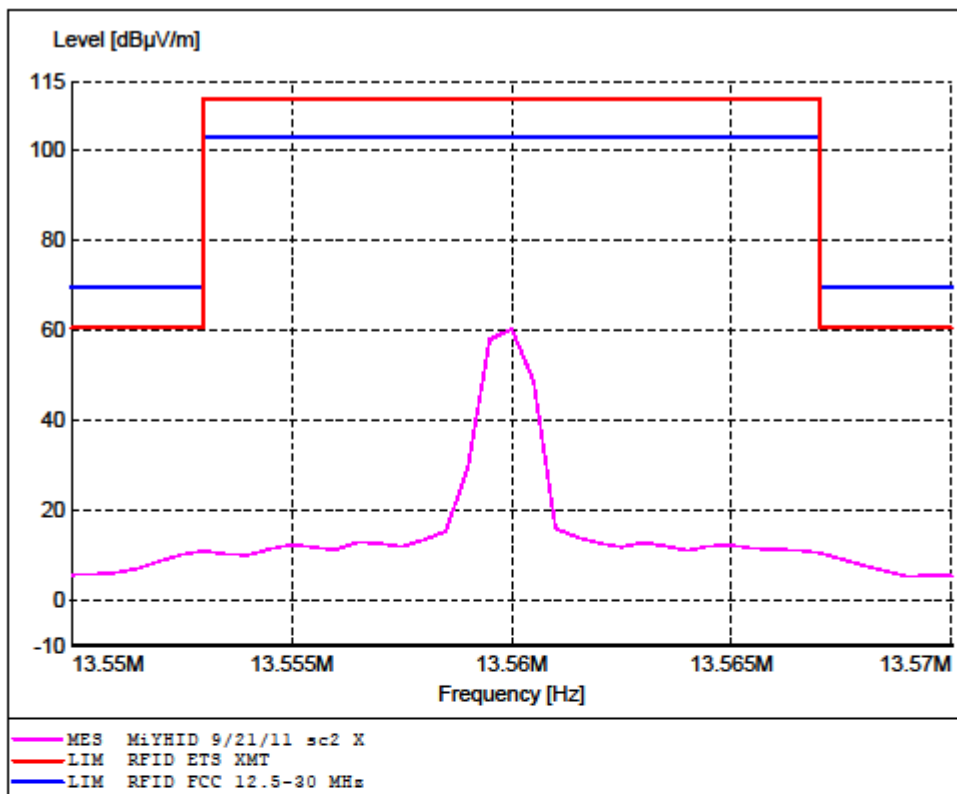

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 21 of 43 |

5.2.4 Test Setup Photo

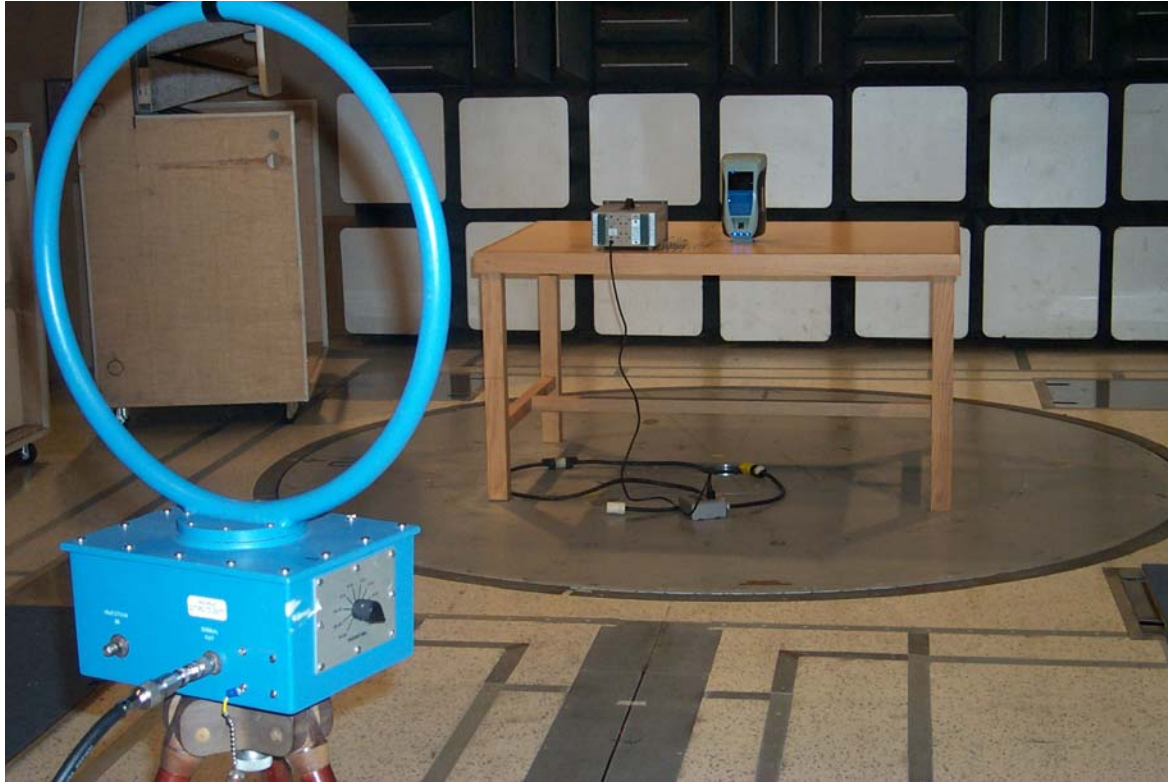


Carrier Frequency / Emissions Bandwidth / Spurious Emissions 9KHz to 30 MHz

5.2.5 Power Bandwidth Test Procedure (99%)

The EUT was placed in a shielded room and connected directly to the input of an EMI Receiver. The receiver was operated in the analyzer mode with a center frequency of 13.56 MHz. The transmitter was operated at its maximum carrier output with modulation applied under normal test conditions. The receiver's span and bandwidths were set in accordance with Industry Canada RSS-GEN (section 4.6.1). The receiver has an internal function that can be selected for the measurement of the 99% Bandwidth, and automatic placement of the markers. 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM contains the procedure for selecting the Bandwidth function and output of the result plot.

The EUT had a measured occupied bandwidth of: **89.7796 kHz.**

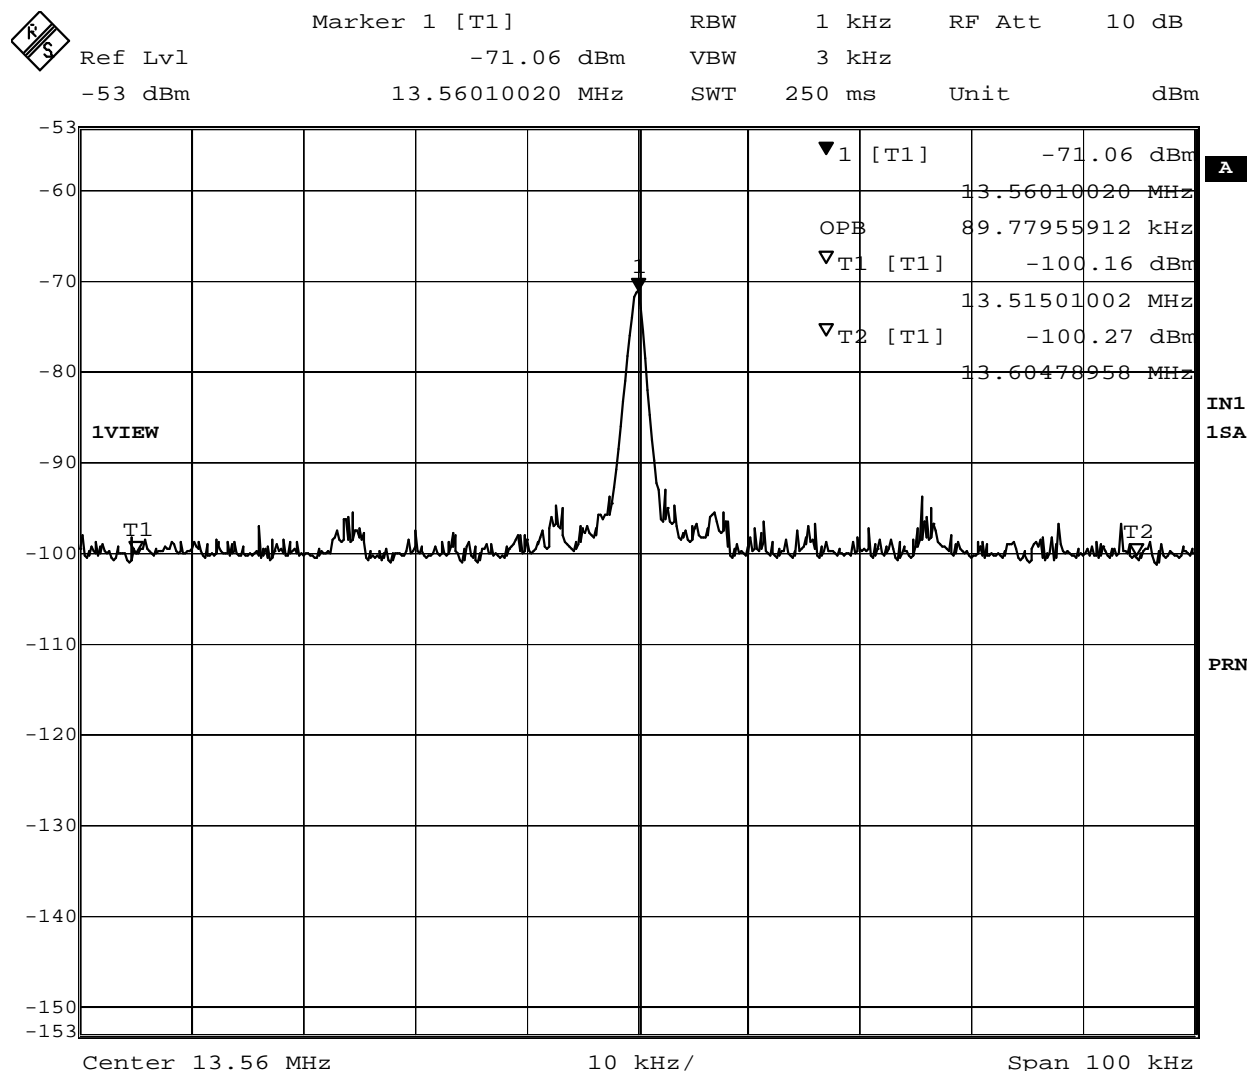

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 23 of 43 |

5.3 Spurious Emissions (12 kHz to 30 MHz.)

The EUT was placed in a semi-anechoic chamber and the Spurious Emissions testing was performed in accordance with ANSI C63.4, FCC Part 15, Subpart C and 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. The Spurious Emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT.

5.3.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis of these sweeps was used to determine which discrete frequencies, other than the intentional radiator frequency and band edge frequencies were to be maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Final measurements were taken utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final measurements recorded were determined by the following formula:

Result (dB μ V/m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).


5.3.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

| Frequency (MHz) | Distance (Meters) | Field Strength (dB μ V/m) |
|------------------|-------------------|-------------------------------|
| 12.000 to 13.110 | 10 | 48.62 |
| 13.110 to 13.410 | 10 | 59.58 |
| 13.410 to 13.553 | 10 | 69.55 |
| 13.553 to 13.567 | 10 | 103.00 |
| 13.567 to 13.710 | 10 | 69.55 |
| 13.710 to 14.010 | 10 | 59.58 |
| 14.010 to 30.000 | 10 | 48.62 |


Note: A 40 dB/decade extrapolation factor was used per 15.31.

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 25 of 43 |

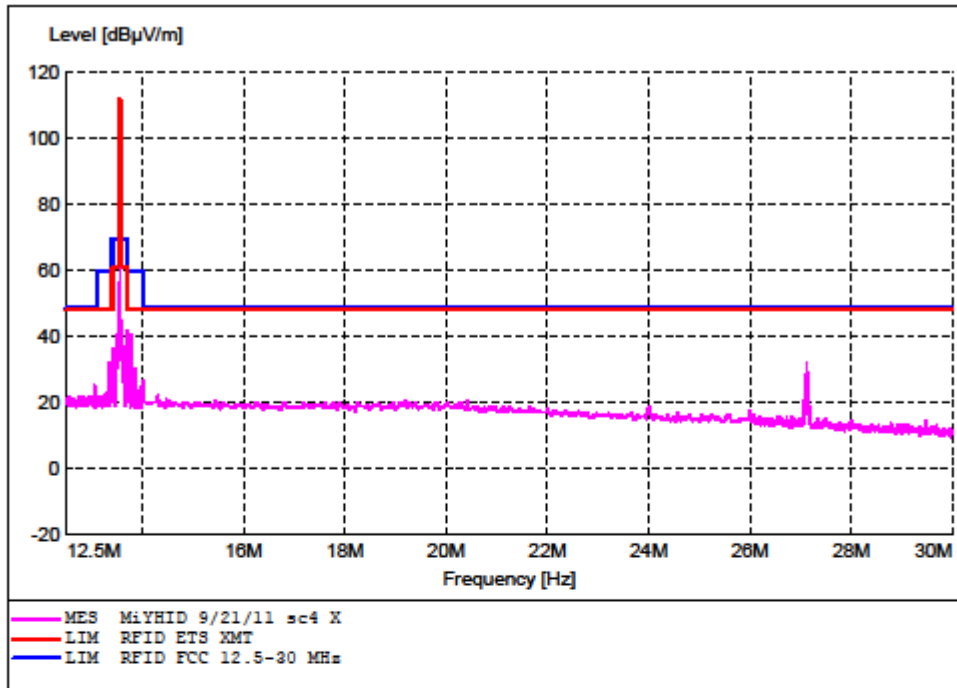

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 26 of 43 |

5.3.4 Test Setup Photo

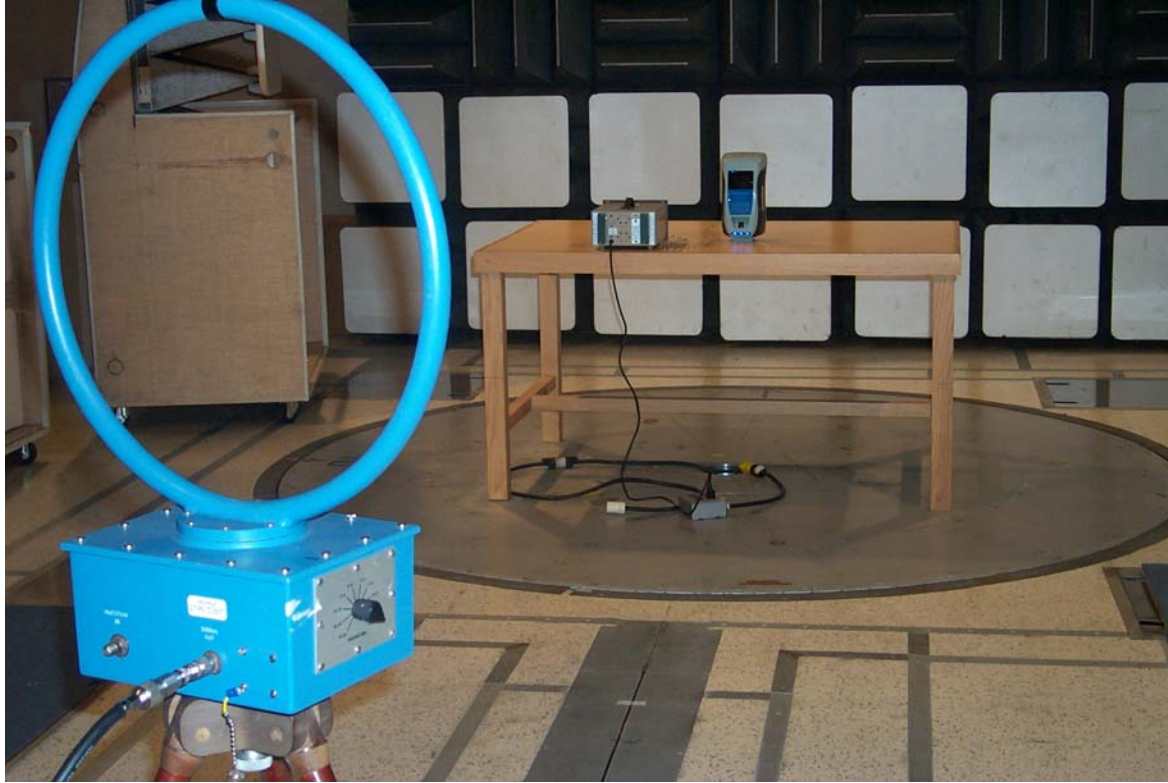

Spurious emissions below 30 MHz

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 27 of 43 |

5.4 Spurious Emissions (30 to 1000 MHz.)

The EUT was placed in a semi-anechoic chamber for spurious emissions testing in accordance with ANSI C63.4, FCC Part 15, Subpart C and 3M Test Procedures: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM and Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2. The Spurious Emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT while in the transmit mode.

5.4.1 Test Procedure

The EUT was placed in the center of a turntable. An EMI receiver was used for the emissions measurements in the range of 30MHz to 1000MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Peak results were maximized at discrete frequencies utilizing quasi-peak detection. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling every 4 degrees) and varying the antenna height between 1 and 4 meters at the angles of the highest emissions levels found. Measurements were taken in both vertical and horizontal antenna polarization. The final measurements recorded were determined by the following formula:

Result (dB μ V /m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB)

5.4.2 Test Criteria



The FCC Part 15, Subpart C radiated limits are given below.

| Frequency (MHz) | Distance (Meters) | Field Strength (dB μ V/m) |
|-----------------|-------------------|-------------------------------|
| 30 - 88 | 10 | 29.54 |
| 88 - 216 | 10 | 33.06 |
| 216 - 960 | 10 | 35.56 |
| 960 and higher | 10 | 43.52 |

5.4.3 Test Results


The EUT met the FCC Part 15, Subpart C Spurious Emissions (30 to 1000 MHz.) requirements. No spurious emissions above 1000 MHz.

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 29 of 43 |

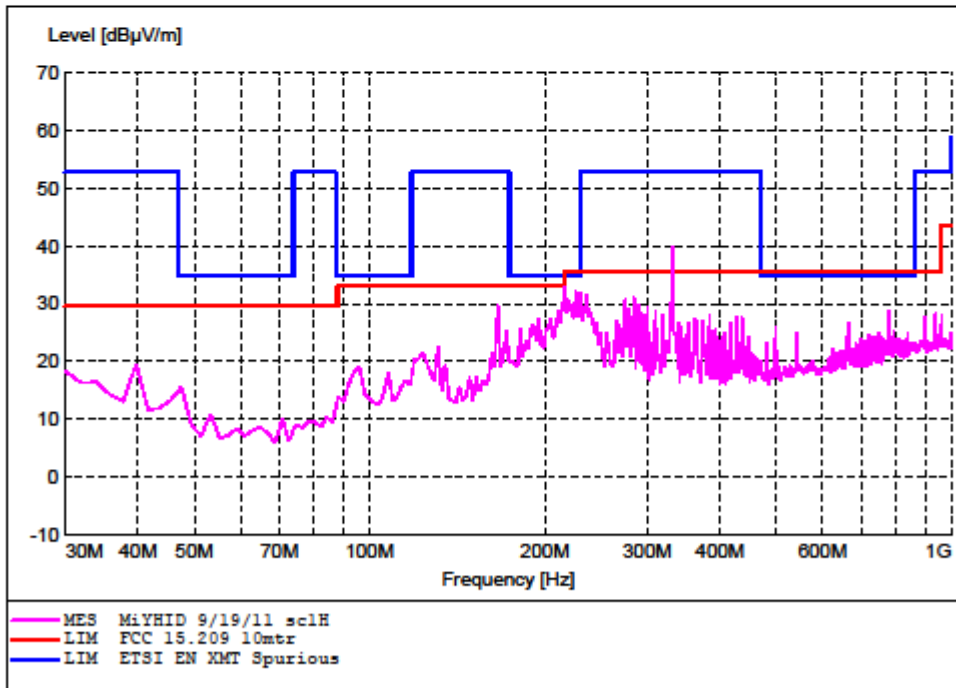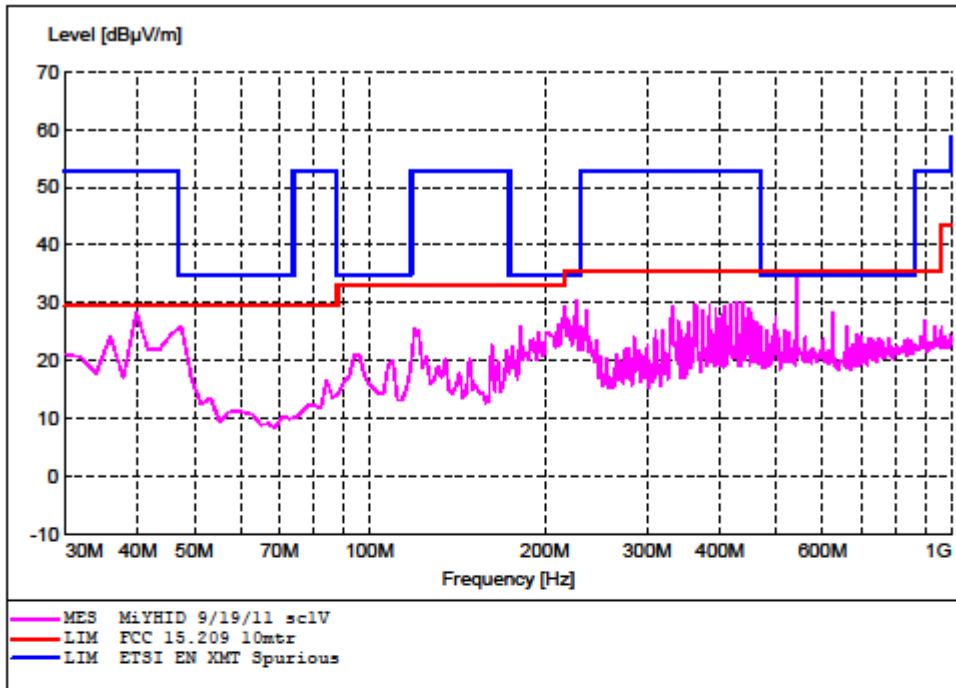

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 30 of 43 |

5.4.4 Test Setup Photo

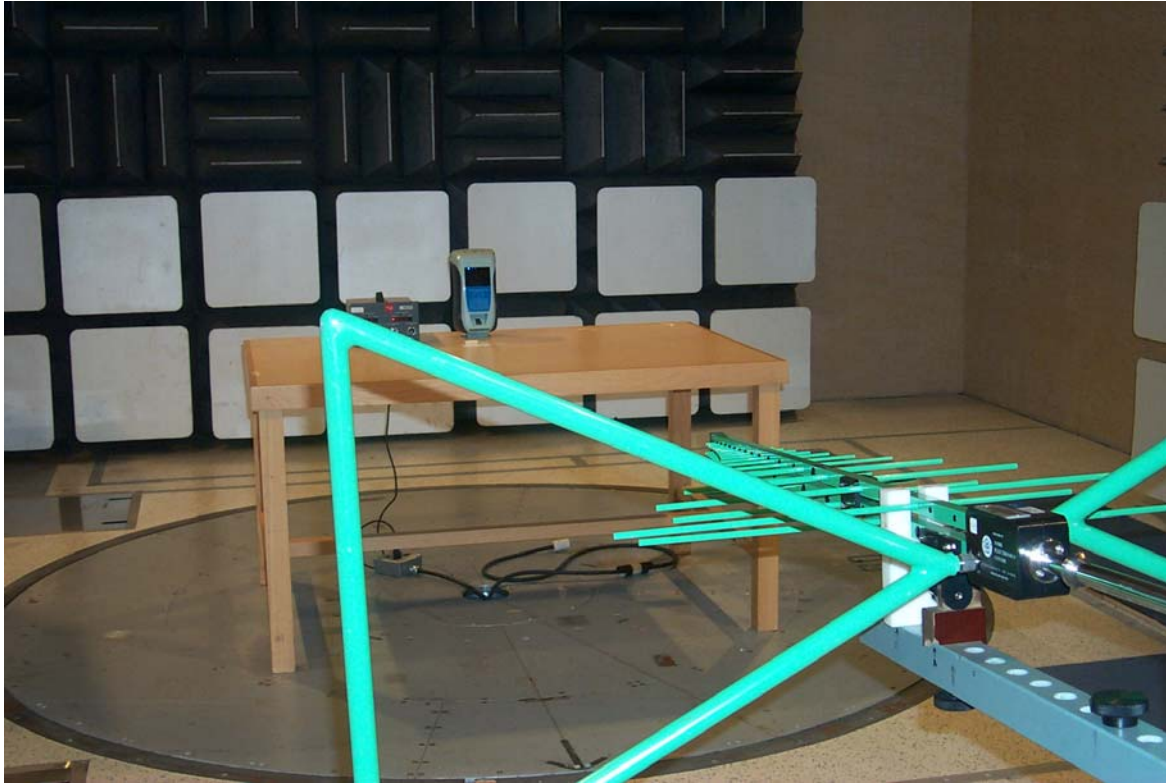

Spurious Emissions above 30 MHz

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 31 of 43 |

5.5 Digital Radiated Emissions (30 MHz - 6000 MHz)

The EUT was placed in an anechoic chamber and radiated emissions testing was performed in accordance with ANSI C63.4, FCC Part 15 and 3M Test Procedures: Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2, and Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY. Radiated emissions measurements were made to determine the level of electromagnetic energy radiating from the EUT.

5.5.1 Test Procedure

The EUT was placed in the center of a turntable. An EMI receiver was used for the emissions measurements in the range of 30MHz to 40GHz (the upper limit of measurement is determined by the 5th harmonic of the highest frequency generated in the device or 40 GHz whichever is lower). Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Peak results were maximized at discrete frequencies utilizing quasi-peak detection. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling every 4 degrees) and varying the antenna height between 1 and 4 meters at the angles of the highest emissions levels found. Measurements were taken in both vertical and horizontal antenna polarization. The final quasi-peak measurements recorded were determined by the following (the detector used above 1000 MHz is both average and peak):



Result (dB μ V /m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB)

5.5.2 Test Criteria

The FCC Class 'A' radiated limits are given below. The lower limit shall apply at the transition frequency.

| Frequency (MHz) | Distance (Meters) | Field Strength (dB μ V/m) |
|-----------------|-------------------|-------------------------------|
| 30 - 88 | 10 | 39.08 |
| 88 - 216 | 10 | 43.52 |
| 216 - 960 | 10 | 46.44 |
| 960 - 1000 | 10 | 49.54 |
| 1000 – 40000 | 10 | 49.54 AVG 69.54 PEAK |

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 33 of 43 |

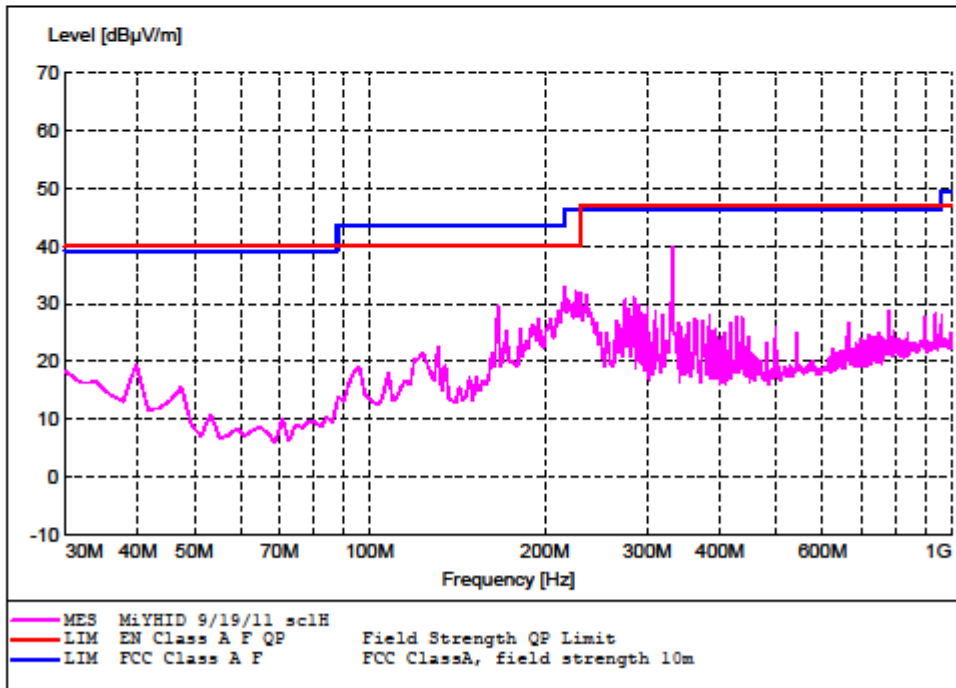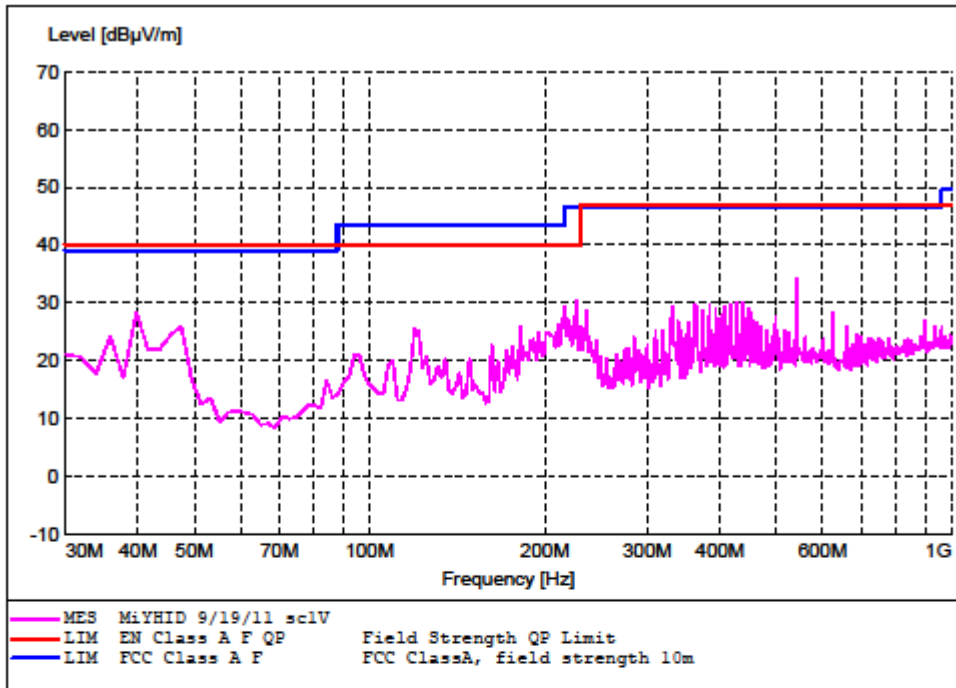

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 34 of 43 |


| | | | |
|------------------------|--------------------|---------------------------|-------------------|
| Report Number | F0811002B | Date | 19 September 2011 |
| EUT Name | MiY series readers | EUT Power | 12 VDC |
| EUT Model | MiY-ID | Test Std | FCC |
| EUT Serial # | MiY-ID-2-0102-XXXX | Temperature (°C) | 23 |
| EUT Description | Access control | Humidity (%) | 33 |
| | HID Reader | Air Pressure (kPa) | 98.7 |

MAXIMIZED FILES _____ MiYHID 9/19/11 sc2 V-H _____

| FREQ. (MHz) | MAXIMIZED AVG SIGNAL | | LIMIT LINE (dBµV/m) | PASSING MARGIN (dB) | MAXIMIZED PEAK SIGNAL | | LIMIT LINE (dBµV/m) | PASSING MARGIN (dB) | TURN TABLE (degrees) | ANTENNA HEIGHT (m) |
|----------------|-------------------------|--------------|---------------------------|---------------------------|--------------------------|----------|---------------------------|---------------------------|----------------------------|--------------------------|
| | H/V | (dBµV/ m) | | | H/V | (dBµV/m) | | | | |
| 1199.519 | H | 2.69 | 49.54 | 46.85 | H | 9.45 | 69.54 | 60.09 | 0 | 1.0 |
| 1296.312 | V | 2.75 | 49.54 | 46.79 | V | 9.35 | 69.54 | 60.19 | 100 | 1.5 |
| 1392.264 | H | 3.16 | 49.54 | 43.38 | H | 9.92 | 69.54 | 59.62 | 0 | 1.0 |
| 1494.950 | H | 5.63 | 49.54 | 43.91 | H | 12.00 | 69.54 | 57.54 | 180 | 1.0 |
| 1659.640 | V | 5.00 | 49.54 | 44.54 | V | 11.64 | 69.54 | 11.64 | 245 | 1.5 |
| 1826.292 | V | 10.33 | 49.54 | 39.21 | V | 16.69 | 69.54 | 52.85 | 247 | 1.5 |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |


| | |
|-----------------------------|-------------------------|
| Test Engineer: Mike Schultz | Date: 19 September 2011 |
|-----------------------------|-------------------------|

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 35 of 43 |

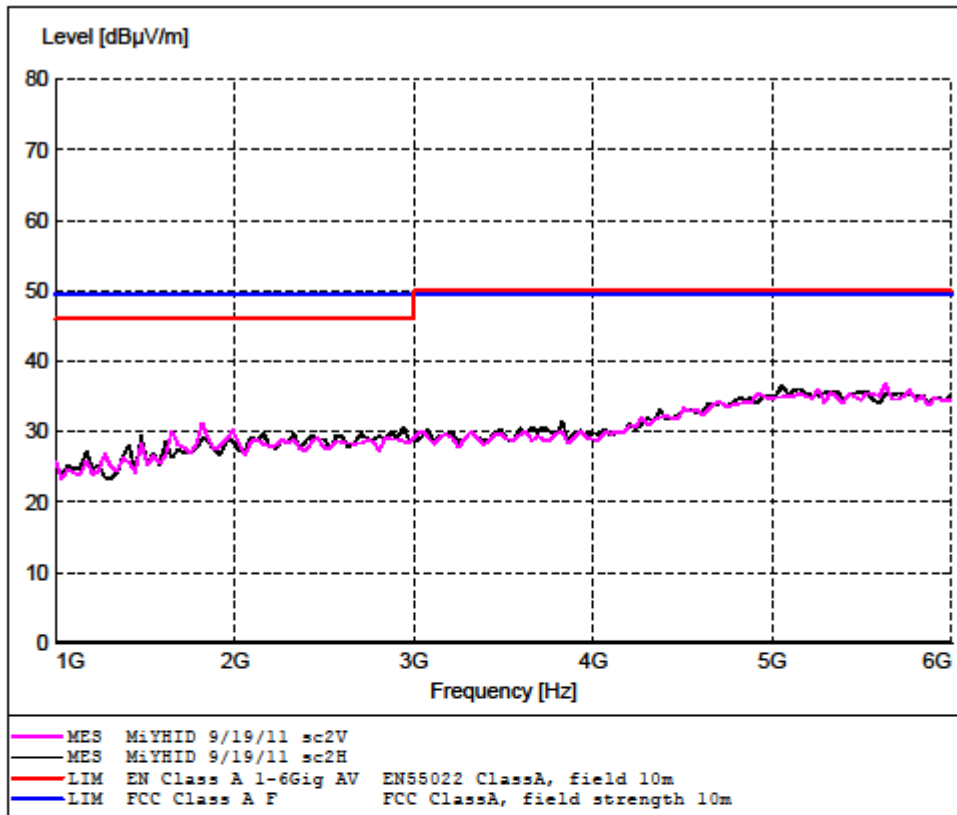

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 36 of 43 |

5.5.4 Test Photos

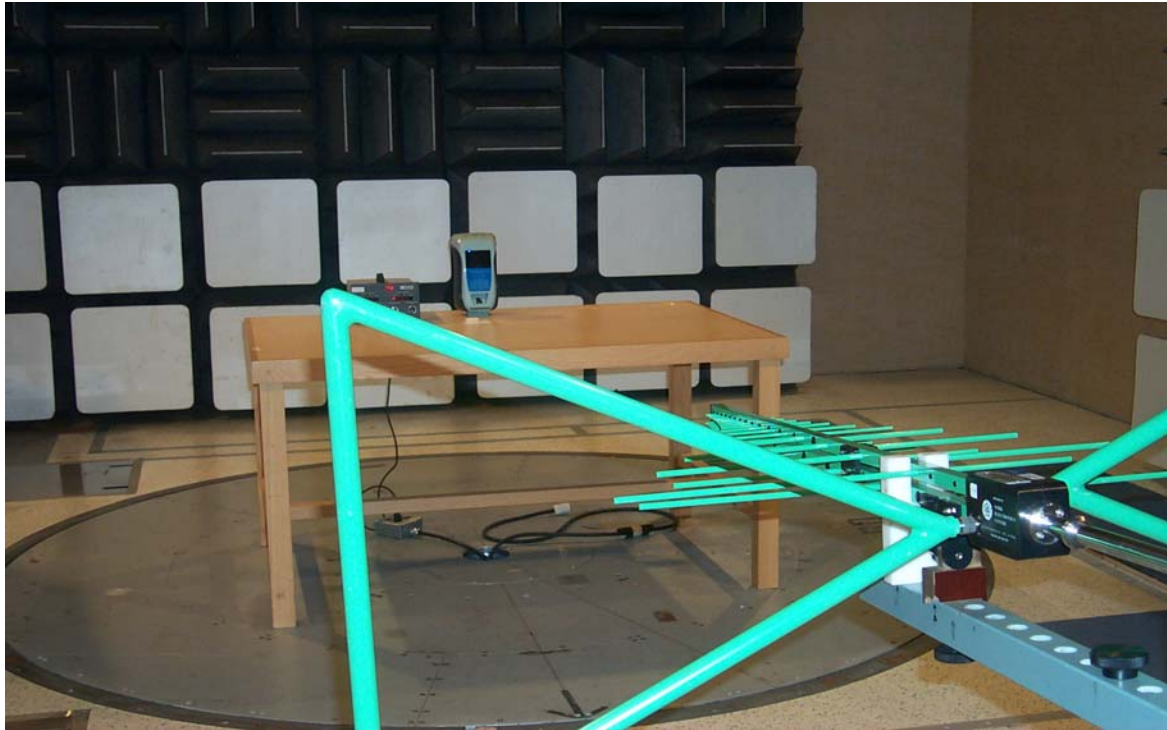

MiY-ID 30-1000 MHz (top), 1-6 GHz (bottom)

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 37 of 43 |

5.6 Human Exposure (EMF)

This procedure is for the evaluation of human exposure to electromagnetic fields (EMF) from devices containing RFID. The testing is in accordance with RSS-102 and 3M Test Procedure: EMF Test w/EMR-300, PBLI-7FAM2G. The EUT is FCC exempt.

5.6.1 Test Procedure

The EUT was setup in a shielded room and measurements were made of both the electric and magnetic fields at 13.56 MHz at a distance of 20 cm around the equipment using EMF exposure meters.

5.6.2 Test Criteria

For general public exposure, the results shall be compared with the exposure limits 4.2 of RSS-102. For 13.56 MHz, the limits are as follows:

E-Field 28 V/m

H-Field 0.073 A/m

5.6.3 Test Results

The EUT met the general public exposure criteria for both the electric field and the magnetic field.

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 38 of 43 |

| | | | |
|------------------------|--------------------|---------------------------|-------------------|
| Report Number | F0811002B | Date | 26 September 2011 |
| EUT Name | MiY series readers | EUT Power | 120 Vdc |
| EUT Model | MiY-ID | Test Std | RSS-102 |
| EUT Serial # | MiY-ID-2-0102-XXXX | Temperature (°C) | 23 |
| EUT Description | Access contol | Humidity (%) | 33 |
| | HID Reader | Air Pressure (kPa) | 98.7 |

| Test Position | Frequency | Distance | Measurement | Limit | Margin |
|---------------|------------|----------|-------------|-------|--------|
| E-FIELD | | | | | |
| | 10-400 MHz | 20 cm | 0.34 | 28 | 27.66 |
| | 10-400 MHz | 20 cm | 0.41 | 28 | 27.59 |
| | 10-400 MHz | 20 cm | 0.54 | 28 | 27.46 |
| | 10-400 MHz | 20 cm | 0.47 | 28 | 27.53 |
| | 10-400 MHz | 20 cm | 0.40 | 28 | 27.60 |
| | 10-400 MHz | 20 cm | 0.46 | 28 | 27.54 |
| Average | | | 0.43 | 28 | 27.56 |
| H-FIELD | | | | | |
| | 10-400 MHz | 20 cm | .0159 | .0730 | .0571 |
| | 10-400 MHz | 20 cm | .0149 | .0730 | .0581 |
| | 10-400 MHz | 20 cm | .0168 | .0730 | .0562 |
| | 10-400 MHz | 20 cm | .0163 | .0730 | .0567 |
| | 10-400 MHz | 20 cm | .0170 | .0730 | .0560 |
| | 10-400 MHz | 20 cm | .0177 | .0730 | .0553 |
| Average | | | 0164 | .0730 | .0565 |

| | |
|-----------------------------|-------------------------|
| Test Engineer: Mike Schultz | Date: 26 September 2011 |
|-----------------------------|-------------------------|

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 39 of 43 |

5.6.4 Test Setup Photo



RF Exposure Measurement E-Field and H-Field

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 40 of 43 |

6.0 LIST OF TEST EQUIPMENT

The following test equipment was used to perform the indicated tests. All test equipment was calibrated by an accredited calibration laboratory or by the manufacturer. All calibration intervals are one year. All equipment calibrations, test procedures, and test facility are traceable to the standards of the National Institute of Standards and Technology (NIST). The test facility site attenuation verification results fall within the normalized site attenuation (NSA) criteria for open area test sites using volumetric measurements.

RADIATED EMISSIONS

Electro Metrics Large Loop Antenna, Model ALR25M, Serial No. 603 (cal due date: 20 Oct 12)
Schaffner Biconilog Antenna, Model CBL6112B, Serial No. 27491 (cal due date: 21 Oct 12)
A. H Systems Horn Antenna, Model SAS_200/571 Serial No: 234 (cal due date: 22 Oct 12)
HP Pre-Amplifier, Model 8447D, Serial No. 1937A03090 (cal due date: 21 Oct 12)
HP Pre-Amplifier, Model 83017A, Serial No. 3123A00259 (cal due date: 20 Oct 12)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 12)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

CONDUCTED EMISSIONS

EMCO LISN, Model 3825-2, Serial No. 1039 (cal due date: 20 Oct 12)
Solar High Pass Filter, Model 8131 - 5.0 (cal due date: 30 Aug 12)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 12)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

FREQUENCY STABILITY / POWER OUTPUT

Agilent Freq. Counter Model 53131A, Serial No. MY40012264 (cal due date: 21 Oct 12)
HP Spectrum Analyzer Model 8591A, Serial No. 3108A02041 (cal due date: 9 Oct 12)
Envirotronics Environ. Chamber, EH16-1-1.5AC, SN:10066639 (cal due date: 1 Nov 12)

OCCUPIED BANDWIDTH

Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 12)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

EMF MEASUREMENT

Narda EMR 300 Exposure Meter, Model 2244/31 (cal due date: 15 Jan 12)
Narda Type 8 E-Probe, s/n BG0030 (cal due date: 13 Jan 12)
Narda Type 12 H-Probe, s/n AE0020 (cal due date: 13 Jan 12)

TEST FACILITY

Lindgren Semi-Anechoic Chamber, (verification due date: 30 Aug 12)
FCC Site Registration Number: 93334
Canadian Site Registration Number: 458A-1

SOFTWARE

EMI Measurement Software, Rohde & Schwarz ESIB-K1 Vers. 1.20

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 41 of 43 |

7.0 LABELING INFORMATION

The following labeling information is required by the FCC (Federal Communications Commission) and IC (Industry Canada) for Class A digital devices. Since the equipment contains both intentional and unintentional radiators, it must be labeled as a digital device and as an intentional radiator.

Labels on the Product

The following statements shall be placed in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**FCC ID: DGFSSDIDHID
IC ID: 458A-SSDIDHID**

"This Class A digital apparatus complies with Canadian ICES-003."

"Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada."

Statements in the Manuals

The following statement shall be placed in a prominent location in the text of the user manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide a reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

FCC ID: DGFSSDIDHID

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 42 of 43 |

NO MODIFICATIONS. Modifications to this device shall not be made without the written consent of 3M, Company. Unauthorized modifications may void the authority granted under Federal Communications Commission and Industry Canada Rules permitting the operation of this device.

"This Class A digital apparatus complies with Canadian ICES-003."

"Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada."

IC ID: 458A-SSDIDHID

| | | | |
|----------------|-----------------------|-----------------------|---------------|
| 3M | MiY-ID (HID) | Report # F0811002B | 3M |
| EMC Laboratory | Reg. Eng. And Quality | December 1, 2011 | Page 43 of 43 |

This is the last page of the Test Report