

**FCC
Electromagnetic Compatibility
Test Report**

For

MD6000 Mobile ID Reader

**FCC ID: DGFSSDMD6000
IC: 458A-SSDMD6000**

Safety and Security Systems Division

St. Paul, MN

November 8, 2011

Report Number: F0411003

**Prepared By:
3M Regulatory Engineering and Quality
EMC Laboratory
410 Fillmore Avenue, Building 76
St. Paul, Minnesota 55144-1000**

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 2 of 42

CERTIFICATE OF COMPLIANCE

MANUFACTURER'S NAME:	3M™ Company
NAME OF EQUIPMENT:	Mobile ID Reader
DESIGNATION:	Short Range Device (RFID)
MODEL NUMBER:	MD6000
TEST REPORT NUMBER:	F0411003
DATE:	November 8, 2011

USA (FCC) - Title 47, Code of Federal Regulations (2009)
Industry Canada (IC) – ICES, RSS

EMISSIONS:

Radiated / Conducted (FCC Part 15, Subpart B, Class A)
(IC, ICES-003)

Radiated / Conducted (FCC Part 15, Subpart C)
(IC, RSS-210, RSS-GEN)

RF Exposure (FCC - Exempt)
(IC - Complies with RSS-102)

FCC ID: DGFSSDMD6000
IC ID: 458A-SSDMD6000

As the responsible EMC Project Engineer, I hereby declare that the equipment tested, as specified in the test report, at the 3M Product Safety EMC Laboratory is in compliance with 47 CFR, Part 15, Subpart B and Subpart C, and Industry Canada RSS & ICES Standards. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Robert E. Heller
Senior EMC Engineer



Lab Code 200033

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 3 of 42

TABLE OF CONTENTS

	Title Page
	Certificate of Compliance
	Table of Contents
1.0	Test Summary
2.0	Introduction
2.1	Scope
2.2	EUT Description and Operation
2.3	Modifications to EUT
2.4	Measurement Uncertainty
3.0	Applicable Documents
4.0	Conducted Emissions
4.1	Test Procedure
4.2	Test Criteria
4.3	Test Results
4.4	Test Setup Photo
5.0	Radiated Emissions
5.1	Frequency Stability
5.1.1	Test Procedure
5.1.2	Test Criteria
5.1.3	Test Results
5.1.4	Test Setup Photo
5.2	Emissions Bandwidth
5.2.1	Test Procedure
5.2.2	Test Criteria
5.2.3	Test Results
5.2.4	Test Setup Photo
5.2.5	99% Occupied Bandwidth Test Procedure and Test Results
5.3	Spurious Emissions (9KHz to 30 MHz)
5.3.1	Test Procedure
5.3.2	Test Criteria
5.3.3	Test Results
5.3.4	Test Setup Photo
5.4	Spurious Emissions (30 MHz to 1000 MHz)
5.4.1	Test Procedure
5.4.2	Test Criteria
5.4.3	Test Results

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 4 of 42

5.5 Radiated Emissions (30 MHz - 40 GHz)

5.5.1 Test Procedure

5.5.2 Test Criteria

5.5.3 Test Results

5.5.4 Test Setup photo

5.6 Human Exposure (EMF)

5.6.1 Test Procedure

5.6.2 Test Criteria

5.6.3 Test Results

5.6.4 Test Setup Photo

6.0 List of Test Equipment

7.0 Labeling Information

8.0 Signatures

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 5 of 42

1.0 TEST SUMMARY

Test Report Number:	F0411003
Requester:	Roger Edwards
Company:	3M Rochford-Thompson Security Systems Division Berkshire, UK
Telephone Number:	*8 011-44-1635-264111
Equipment Under Test:	Mobile ID Reader Model MD6000
Condition upon receipt	Device was in good working condition
Test Environment:	See individual test sheets.
Test Results:	Passed the following tests: Conducted Emissions: FCC Part 15 Subpart B, ICES-003 Radiated Emissions: FCC Part 15 Subpart B, ICES-003 Conducted Emissions: FCC Part 15 Subpart C, IC RSS-210, RSS-Gen Radiated Emissions: FCC Part 15 Subpart C, IC RSS-210, RSS-Gen IC RSS-102
Modifications:	No modifications were required.
Test Location:	3M Product Safety EMC Laboratory Building 76-1-01 410 Fillmore Ave. St. Paul, MN 55144-1000

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 6 of 42

2.0 INTRODUCTION

2.1 Scope

This report contains results describing the conformance of the Equipment Under Test (EUT) to FCC Part 15, Subpart B and IC ICES-003 rules for unintentional radiators and FCC Part 15, Subpart C and IC RSS rules for intentional radiators.

This report is the confidential property of the client and applies only to the specific item tested under the stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. This report shall not be reproduced except in full without the written approval of the testing laboratory. The appropriate testing standards and references that were used are contained in Section 3.0. Worst case test data, test configuration, and photographs (worst case configuration) are provided in Sections 4.0 and 5.0. Equipment information is contained in Section 6.0. Documentation labeling information is contained in Section 7.0.

Subsequent tests are necessary from time to time on equipment taken at random from production. Retesting of the EUT is also required when the EMC profile has been changed or is suspected of being changed.

The 3M Regulatory Engineering and Quality EMC Laboratory is recognized under the United States Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC Guide 17025 and the relevant requirements of ISO 9002 (ANSI/ASQC Q92-1987) as suppliers of test results. Accreditation by the National Voluntary Laboratory Accreditation Program is awarded for specific services, listed on the Scope of Accreditation for: Electromagnetic Compatibility and Telecommunications FCC under Lab Code 200033. A complete copy of the Scope of Accreditation is available upon request.

The FCC Site Registration Number is 93334. The Industry Canada (IC) Site Registration Number is 458A-1.

The NVLAP accreditation or this test report does not in any way constitute or imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 7 of 42

2.2 EUT Descriptions and Operation

The Equipment Under Test (EUT) was the 3M™ MD6000 Mobile ID Reader. The MD6000 is a hand-held, portable data capture designed to capture biometric data from ID documents and individuals, and to deliver that data securely to a host for processing. The reader is capable of reading OCR, magnetic strip, and chip data from e-passports, ID cards, and other documents presented as proof of identification. An optical fingerprint reader allows the capture of fingerprint data for verification of the individual. The EUT was tested while exercising all functions and at an input power of 120 VAC, 60 Hz.

The EUT contains two transmitters. One transmits at the RFID frequency of 13.56 MHz and it is the subject of this report. The other is a Bluetooth transmitter, model cB-OBS411, which transmits at 2.4 GHz. It was tested to the RTTE and EMC Directives by connectBlue™ AB of Sweden.



Mobile ID Reader

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 8 of 42

2.3 Modifications to EUT

No modifications were required.

2.4 Measurement Uncertainty

The data and test results referenced in this report are true and accurate. However, there may be deviations within the calibration limits of the test equipment and facilities that can account for deviations. The following table lists the measurement uncertainty for the emissions testing. Furthermore, EUT component and manufacturing process variables may result in additional deviation.

Emission test	Confidence (95%)	Measurement Uncertainty	CISPR Limit
Radiated Emissions (30 MHz – 5 GHz)	k=2.0	4.11 dB	5.20 dB
Conducted Emissions (150 kHz – 30 MHz)	k=2.0	3.29 dB	3.60 dB

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 9 of 42

3.0 APPLICABLE DOCUMENTS

The following documents were used as references. The dates that are referenced are the dates of the latest amendments. All 3M Test Procedures can be found in the Document Center of the SEMS QDS System.

CFR 47: 2009	Part 15 Radio Frequency Devices, Subpart B Unintentional Radiators and Subpart C, Intentional Radiators.	
CISPR 16-1	Specification for radio disturbance and immunity measuring apparatus and methods	
	-1 Measuring Apparatus	2006
	-2 Ancillary Equipment – Conducted Disturbance	2004
	-3 Ancillary Equipment – Disturbance Power	2004
	-4 Ancillary Equipment – Radiated Disturbance	2004
CISPR 16-2	Specification for radio disturbance and immunity measuring apparatus and methods	
	-1 Conducted Disturbance Measurements	2003
	-2 Measurements of Disturbance Power	2004
	-3 Radiated Disturbance Measurements	2003
CISPR 16-4	-1 Uncertainties in Standardized EMC Tests	2005
ANSI C63.4:2009	American National Standard for Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz.	
ICES-003	Industry Canada, Interference-Causing Equipment Standard, 2004 Issue 4	
RSS-GEN	Industry Canada, Radio Standards Specification Issue 3 2010	
RSS-210	Industry Canada, Radio Standards Specification Issue 8 2010	
RSS-102	Industry Canada, Radio Frequency Exposure Compliance, Issue 4, 2010	
3M Test Procedure: Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2:		
3M Test Procedure: Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY:		
3M Test Procedure: Conducted Emissions Test (150 kHz – 30 MHz), PBLI-S8LR2		
3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM		
3M Test Procedure: 99% Power Bandwidth Test, PBLI-7C9JVN		

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 10 of 42

4.0 CONDUCTED EMISSIONS TESTING

Conducted emissions testing was performed in accordance with ANSI C63.4, FCC Part 15 and 3M Test Procedures: Conducted Emissions Test (150 kHz – 30 MHz), PBLI-6S8LR2 and 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. Conducted emissions tests were made to determine the level of electromagnetic noise that is conducted onto the power mains from the EUT.

4.1 Test Procedure:

A Line Impedance Stabilization Network (LISN) with 50Ω /50μH characteristic was used to isolate the EUT and give accurate and repeatable readings. An EMI test receiver was used for the emissions measurements in the range from 150 KHz to 30 MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Initial results were measured at discrete frequencies utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak and average measurements recorded were determined by the following: Result (dBμV) = receiver reading (μV) + LISN (dB) + cable loss (dB)

4.2 Test Criteria:

The FCC Part 15 Subpart B conducted limits are given below. The lower limit shall apply at the transition frequency.

Mains Terminal Disturbance Limits		
Frequency (MHz)	Quasi-Peak (dBμV)	Average (dBμV)
0.15 to 0.50	79	66
0.50 to 30.0	73	60

4.3 Test Results

The EUT met the conducted emission and discontinuous requirements.



3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 11 of 42

Report Number	F0411003	Date	24 August 2011
EUT Name	Mobile ID Reader	EUT Power	120 VAC, 60 Hz
EUT Model	MD6000	Test Std	FCC Part 15
EUT Serial #	G0001	Temperature (°C)	23
EUT Description	Handheld data capture device.	Humidity (%)	33
		Air Pressure (kPa)	98.7

FREQUENCY (MHz)	PEAK (dBµV)		QUASI-PEAK (dBµV)				AVERAGE (dBµV)			
	L1 Line	L2 N	L1 Line	L2 N	Limit	Passing Margin	L1 Line	L2 N	Limit	Passing Margin
MD6000 8/24/11 sc1 L1 L2 120 VAC / 50 HZ										
.174	X	X	26.4	30.2	64.7	34.5	7.5	10.9	54.7	43.8
.880	X	X	33.9	37.9	56.0	18.1	21.1	23.7	46.0	22.3
1.215	X	X	38.6	40.4	56.0	15.6	25.0	27.2	46.0	18.8
1.825	X	X	35.7	43.5	56.0	12.5	23.7	30.8	46.0	15.2
2.545	X	X	42.5	44.7	56.0	11.3	31.9	33.5	46.0	12.5
2.671	X	X	45.8	43.1	56.0	10.2	34.4	32.7	46.0	11.6
3.375	X	X	42.4	44.6	56.0	11.4	32.7	34.0	46.0	12.0
3.965	X	X	40.4	43.7	56.0	23.3	31.5	33.5	46.0	12.5
3.470	X	X	44.4	41.6	56.0	11.6	33.6	33.6	46.0	12.4
4.616	X	X	38.9	42.0	56.0	14.0	30.4	32.0	46.0	14.0
MD6000 8/24/11 sc1 L1 L2 230 VAC / 50 Hz										
.337	X	X	40.6	40.5	59.2	18.6	31.7	35.4	49.2	13.8
.423	X	X	41.3	40.9	57.3	16.0	30.8	34.3	47.3	13.0
.508	X	X	40.4	40.1	56.0	15.6	30.7	33.1	46.0	12.9
.675	X	X	38.4	38.0	56.0	17.6	28.3	30.2	46.0	15.8
1.273	X	X	43.8	43.0	56.0	12.2	31.4	32.0	46.0	14.0
1.861	X	X	44.0	43.4	56.0	12.0	32.3	35.4	46.0	10.6
2.030	X	X	44.1	44.4	56.0	11.6	32.9	35.5	46.0	10.5
2.728	X	X	45.8	43.9	56.0	10.2	34.5	35.2	46.0	10.8
3.400	X	X	44.0	43.1	56.0	12.0	34.0	35.2	46.0	10.8
4.227	X	X	39.6	40.4	56.0	15.6	30.2	32.9	46.0	13.1
4.935	X	X	39.0	38.0	56.0	17.0	28.1	30.2	46.0	15.8
Notes: Tested with charger. Charger is a 2-wire device										

Test Engineer: Mike Schultz	Date: 24 August 2011
-----------------------------	----------------------

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 12 of 42

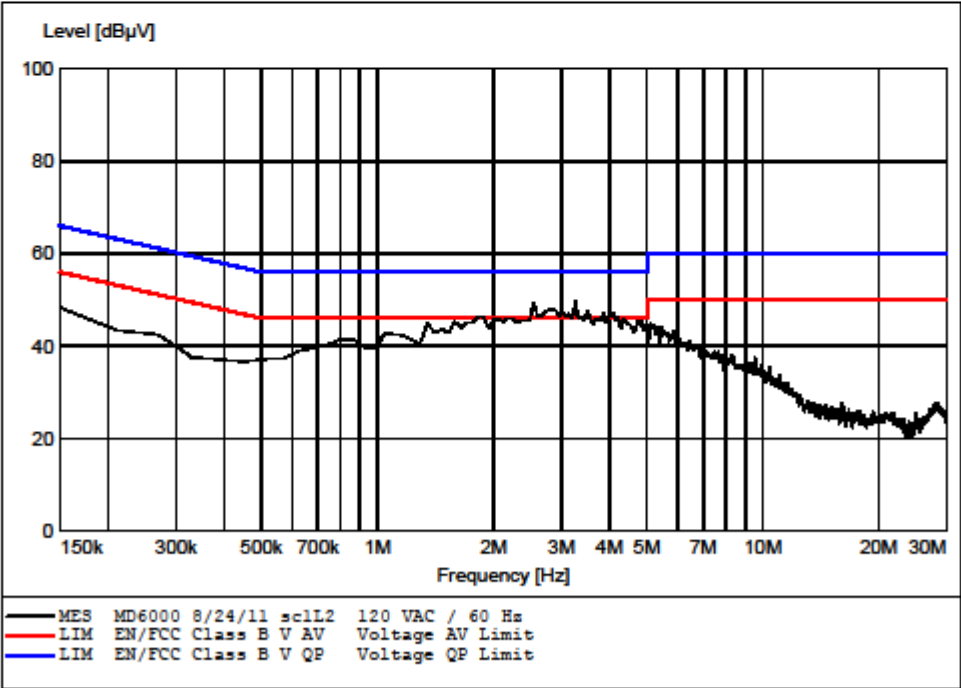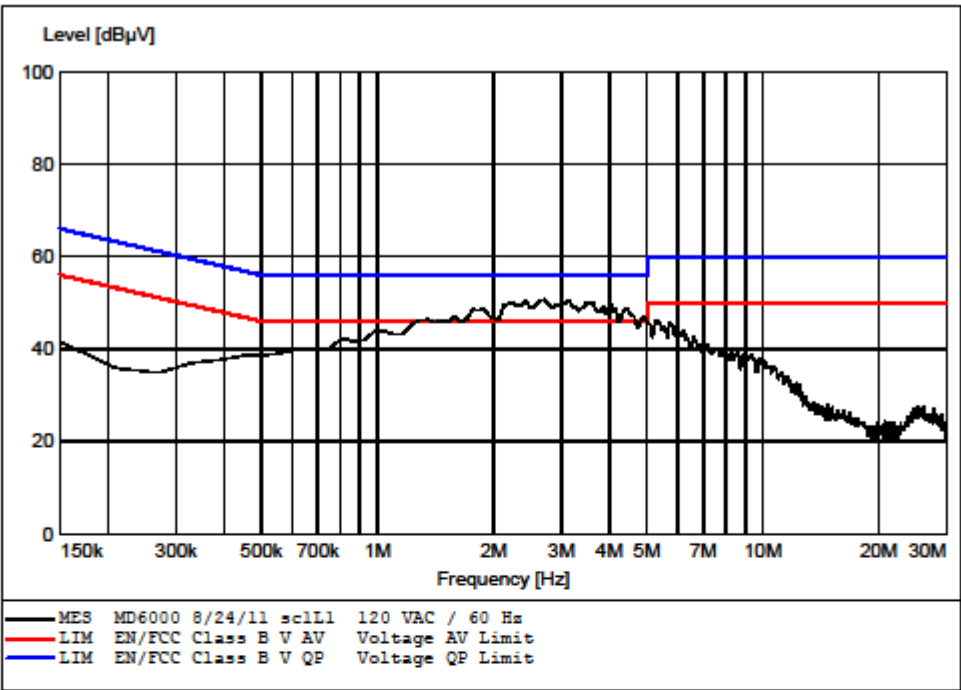

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 13 of 42

4.4 Test Setup Photo



Conducted Emissions (with charger)

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 14 of 42

5.0 Radiated Emissions Testing

The EUT was placed in an anechoic chamber and radiated emissions testing was performed in accordance with FCC Part 15.225 and 3M Test Procedures: Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2, Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY and 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. Radiated emissions measurements were made to determine the level of electromagnetic energy radiating from the EUT.

5.1 Frequency Stability

The Frequency Stability testing was performed in accordance with ANSI C63.4 and FCC Part 15.225 (e) to insure that the intentional radiator frequency stability was within the allowable limits for input power and temperature variations.

5.1.1 Test Procedure

The Frequency Stability was measured using the radiated signals from the EUT so that the measurement equipment would not load the radio frequency circuits. A frequency counter was used for the frequency stability measurements. A close field probe was attached to the counter and placed near the antenna of the reader for measurement. The Reader was put into a continuous output mode through instructions from the host computer (test mode of operation). 1) The frequency was measured while the input DC power to the Intentional Radiator (RFID Reader) was varied over the required input voltage range. 2) The frequency was also measured while the ambient air temperature was varied over the required ambient temperature range (measurements are taken within 1 minute of startup, and after 10 minutes of operation at each test condition).

5.1.2 Test Criteria

The FCC Part 15, Subpart C for Frequency Stability Limits versus Supply Voltage are given as:

Carrier Frequency (MHz)	Voltage Range % of Nominal Supply (85 % to 115 %)	Max. Frequency Change (%)
13.56	4.25 DC to 5.75 DC	+/- 0.01 %

The FCC Part 15, Subpart C for Frequency Stability Limits versus Temperature is given as:

Carrier Frequency (MHz)	Temperature Range (degrees C)	Max. Frequency Change (%)
13.56	-20 to +50	+/- 0.01 %

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 15 of 42

5.1.3 Test Results

The EUT met all FCC Part 15, Subpart C Frequency Stability requirements. The worst case for voltage and temperature is as follows:

Frequency Stability Data Sheet

Report Number	F0411003	Date	1 September 2011
EUT Name	Mobile ID Reader	EUT Power	Battery with charger attached
EUT Model	MD6000	Test Std	FCC Part 15
EUT Serial #	G0001	Temperature (°C)	23
EUT Description	Handheld data capture device.	Humidity (%)	33
		Air Pressure (kPa)	98.7

Measurement	Startup	2 Minutes	5 Minutes	10 Minutes
120 V (+20°C)	13.5602	13.5588	13.5605	13.5598
102 V (+20°C)	13.5590	13.5592	13.5590	13.5595
138 V (+20°C)	13.5595	13.5595	13.5592	13.5595
+50°C (120 V)	13.5592	13.5592	13.5595	13.5595
-20°C (120 V)	13.5595	13.5600	13.5595	13.5595

Note: For 13.56 MHz RFID transmitters, the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency (± 1.356 kHz).

Tested by Mike Schultz

Date 1 September 2011

Report # F0411003

Frequency Stability v1.0

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 16 of 42

5.1.3 Test Setup Photo



Frequency Stability

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 17 of 42

5.2 Emission Bandwidth

The EUT was placed in a semi-anechoic chamber and the Emission Bandwidth testing was performed in accordance with ANSI C63.4, FCC Part 15.225 and 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. The Emission Bandwidth measurements were made to determine the intentional radiator frequency and determine the level of electromagnetic energy radiated at that frequency and at the band edges from the EUT.

5.2.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. The intentional radiator frequency and band edge frequencies utilizing quasi-peak detection were then maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak measurements recorded were determined by the following formula:

$$\text{Result (dB}\mu\text{V/m)} = \text{receiver level } (\mu\text{V)} + \text{antenna factor (dB/m)} + \text{cable loss (dB)} - \text{preamp gain (dB)} + \text{lineal conversion (dB)}.$$

5.2.2 Test Criteria

The FCC Part 15 Subpart C, Paragraph 15.225 Carrier Frequency Limits are given as:

Lower Band Edge: 13.553 MHz
Upper Band Edge: 13.567 MHz

The FCC Part 15, Subpart C radiated limits are given as:

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
1.705 to 13.110	10	48.62
13.110 to 13.410	10	59.58
13.410 to 13.553	10	69.55
13.553 to 13.567	10	103.00
13.567 to 13.710	10	69.55
13.710 to 14.010	10	59.58
14.010 to 30.000	10	48.62

Note: 40 dB/decade extrapolation factor was used per 15.31.

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 18 of 42

5.2.3 Test Results

The EUT met the FCC Part 15, Subpart C Emission Bandwidth requirements. The intentional radiator frequencies were within the allowed band and all maximized quasi-peak measurements for the EUT were below the quasi-peak limits.

Report Number	F0411003	Date	11 August 2011
EUT Name	Mobile ID Reader	EUT Power	Battery
EUT Model	MD6000	Test Std	FCC part 15
EUT Serial #	G0001	Temperature (°C)	23
EUT Description	Handheld data capture device.	Humidity (%)	33
		Air Pressure (kPa)	98.7

MODULATION SPECTRUM MASK


(To convert to dB μ A/m, subtract 51.5)

Frequency	B/W	QP E-Field FCC and EU Limits @ 10 m		QP Level dB μ V/m
13.553 MHz	1 kHz	FCC 69.6 dB μ V/m	EU 60.5 dB μ V/m	7.24
13.567 MHz	1 kHz	FCC 69.6 dB μ V/m	EU 60.5 dB μ V/m	7.44
13.5485 MHz	9 kHz	FCC 69.6 dB μ V/m	EU 60.5 dB μ V/m	33.20
13.5715 MHz	9 kHz	FCC 69.6 dB μ V/m	EU 60.5 dB μ V/m	29.09
13.41 MHz	1 kHz	FCC 59.6 dB μ V/m	EU 48 dB μ V/m	1.41
13.71 MHz	1 kHz	FCC 59.6 dB μ V/m	EU 48 dB μ V/m	1.23
13.4055 MHz	9 kHz	FCC 59.6 dB μ V/m	EU 48 dB μ V/m	15.85
13.7141 MHz	9 kHz	FCC 59.6 dB μ V/m	EU 48 dB μ V/m	15.81
13.11 MHz	1 kHz	FCC 48.6 dB μ V/m	EU 41.5 dB μ V/m	1.60
14.01 MHz	1 kHz	FCC 48.6 dB μ V/m	EU 41.5 dB μ V/m	.61
13.1055 MHz	9 kHz	FCC 48.6 dB μ V/m	EU 41.5 dB μ V/m	15.37
14.0145 MHz	9 kHz	FCC 48.6 dB μ V/m	EU 41.5 dB μ V/m	14.68

1 - Intentional Radiator Frequency

2 - Band edges measured with a receiver bandwidth setting of 1 KHz. Per ANSI C63.4 Paragraph 13.1.7.


3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 19 of 42

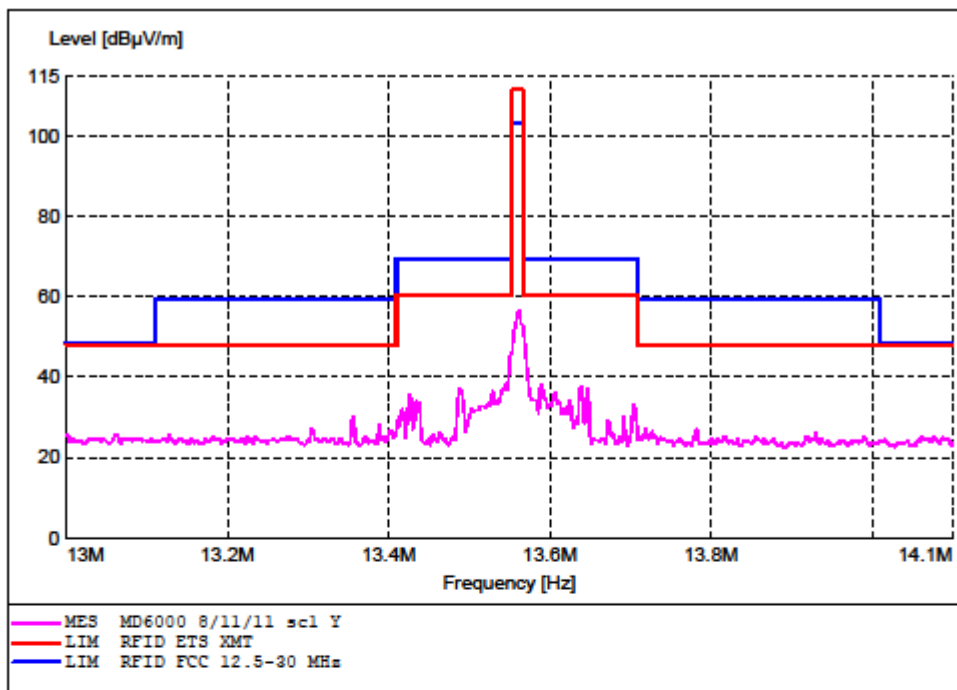

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 20 of 42


SCAN TABLE: "RFID BW 1 KHz"

Short Description: RFID 13-14 Mhz
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw. LOOP ALR25M Ef1d
 13.6 MHz 13.6 MHz 500.0 Hz QuasiPeak 500.0 ms 1 kHz

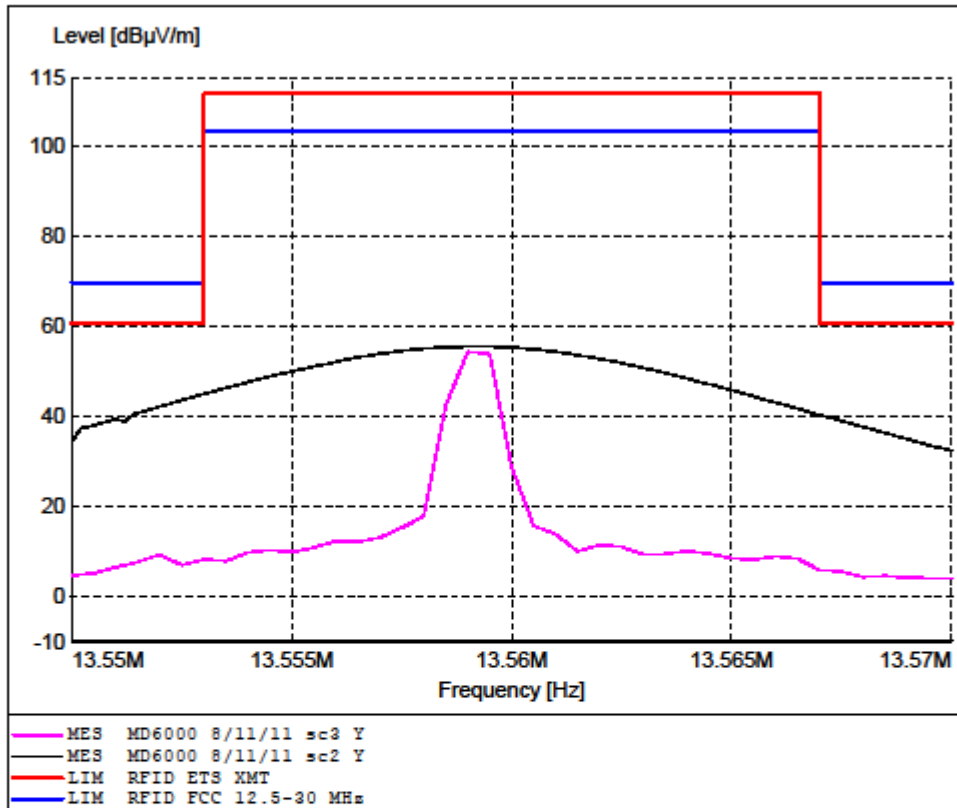

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 21 of 42

5.2.4 Test Setup Photo

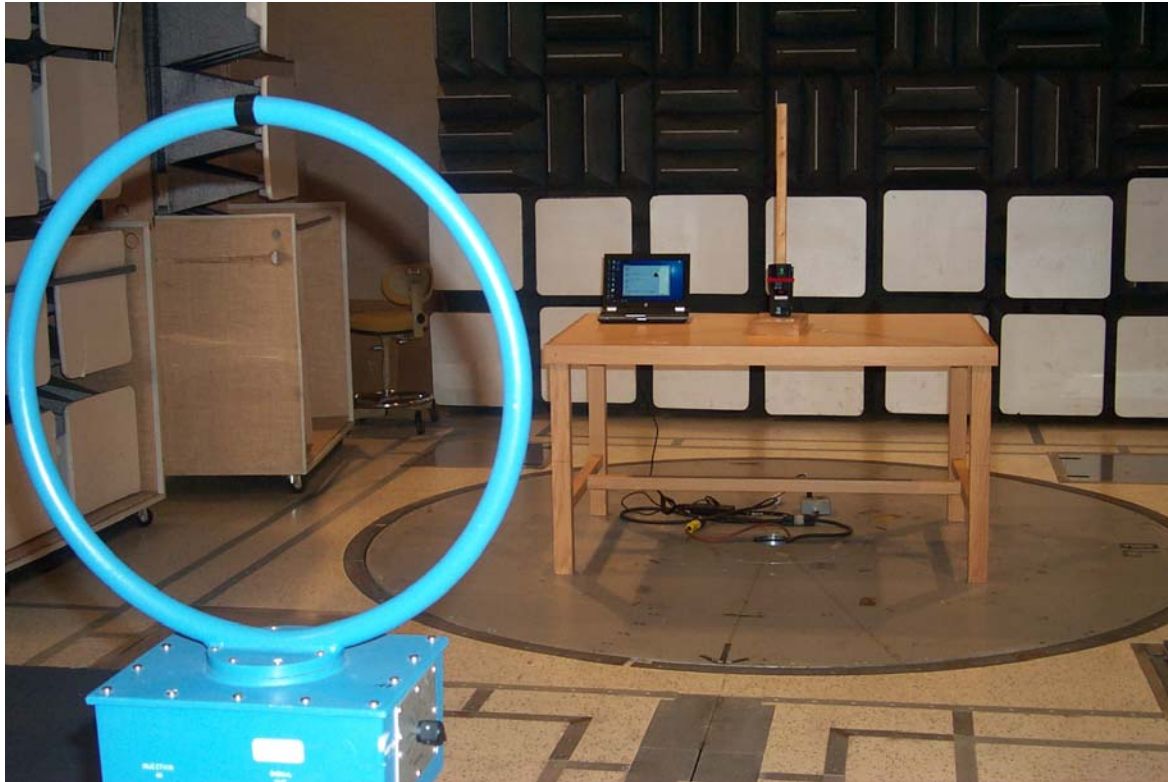


Carrier Frequency / Emissions Bandwidth / Spurious Emissions 9KHz to 30 MHz

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 22 of 42

5.2.5 Power Bandwidth Test Procedure (99%)

The EUT was placed in a shielded room and connected directly to the input of an EMI Receiver. The receiver was operated in the analyzer mode with a center frequency of 13.56 MHz. The transmitter was operated at its maximum carrier output with modulation applied under normal test conditions. The receiver's span and bandwidths were set in accordance with Industry Canada RSS-GEN (section 4.6.1). The receiver has an internal function that can be selected for the measurement of the 99% Bandwidth, and automatic placement of the markers. 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM contains the procedure for selecting the Bandwidth function and output of the result plot.

The EUT had a measured occupied bandwidth of: **21.4429 kHz.**

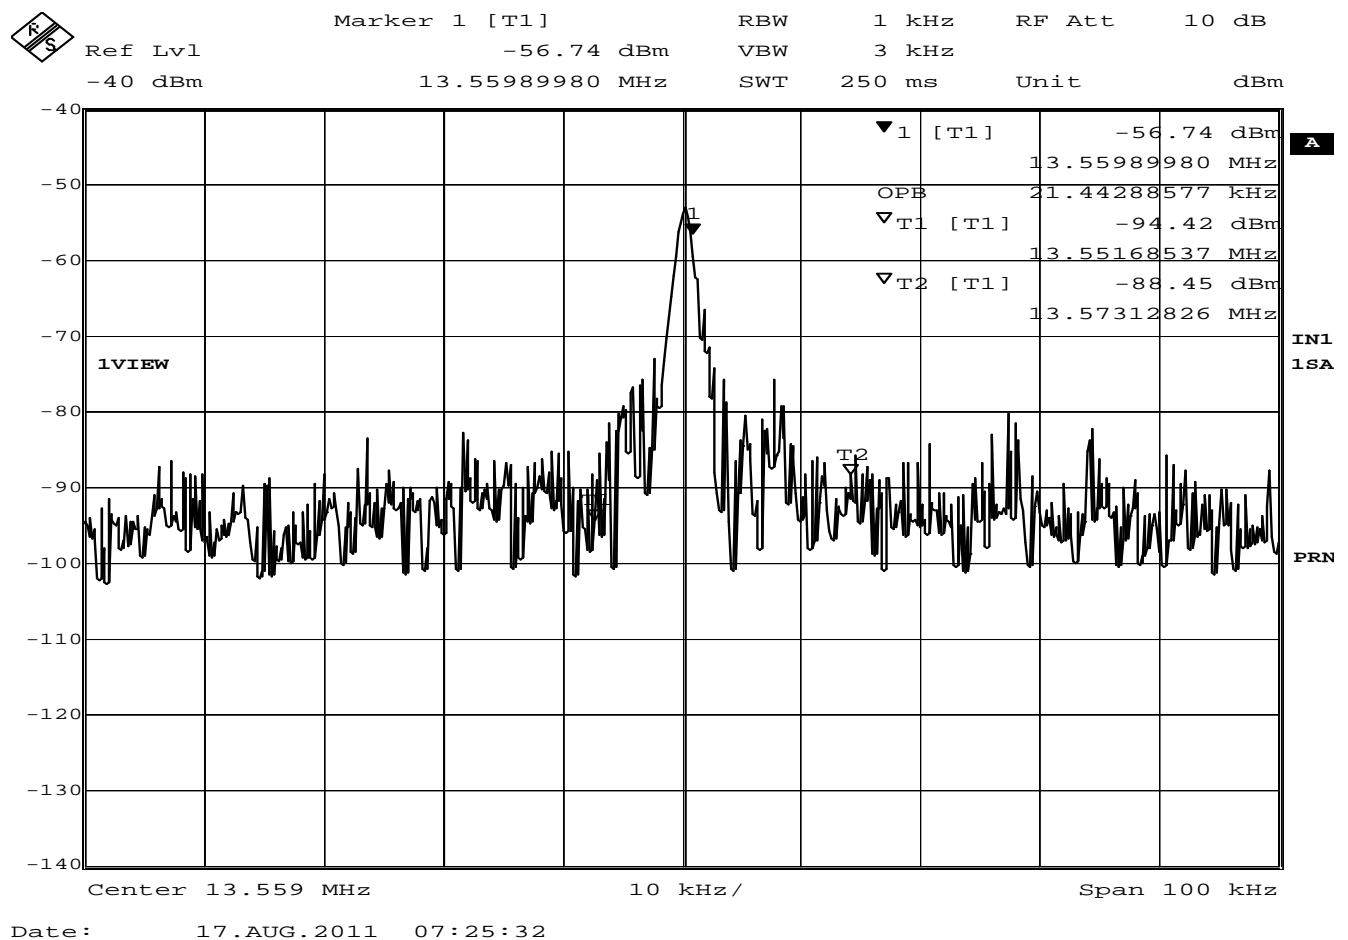

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 23 of 42

5.3 Spurious Emissions (12 kHz to 30 MHz.)

The EUT was placed in a semi-anechoic chamber and the Spurious Emissions testing was performed in accordance with ANSI C63.4, FCC Part 15, Subpart C and 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. The Spurious Emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT.

5.3.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis of these sweeps was used to determine which discrete frequencies, other than the intentional radiator frequency and band edge frequencies were to be maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Final measurements were taken utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final measurements recorded were determined by the following formula:

Result (dB μ V/m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

5.3.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
12.000 to 13.110	10	48.62
13.110 to 13.410	10	59.58
13.410 to 13.553	10	69.55
13.553 to 13.567	10	103.00
13.567 to 13.710	10	69.55
13.710 to 14.010	10	59.58
14.010 to 30.000	10	48.62

Note: A 40 dB/decade extrapolation factor was used per 15.31.

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 24 of 42

5.3.3 Test Results


The EUT met the FCC Part 15, Subpart C Spurious Emissions (12 kHz to 30 MHz.) requirements. No measurable spurious emissions were detected below 12.5MHz or from 12.5 MHz to 30 MHz. All spurious emissions from the reader were below the noise floor.

Report Number	F0411003	Date	11 August 2011
EUT Name	Mobile ID Reader	EUT Power	Battery
EUT Model	MD6000	Test Std	FCC Part 15
EUT Serial #	G0001	Temperature (°C)	23
EUT Description	Handheld data capture device.	Humidity (%)	33
		Air Pressure (kPa)	98.7

Freq. (MHz)	QP Level (dBµV/m)	QP Limit (dBµV/m)	Passing Margin (dB)	Turntable (degrees)	Antenna Orientation/Angle (Polarity/degrees)
27.1182	17.8	48.0	30.2	80	Y + 10° CW

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 25 of 42

5.3.4 Test Setup Photo

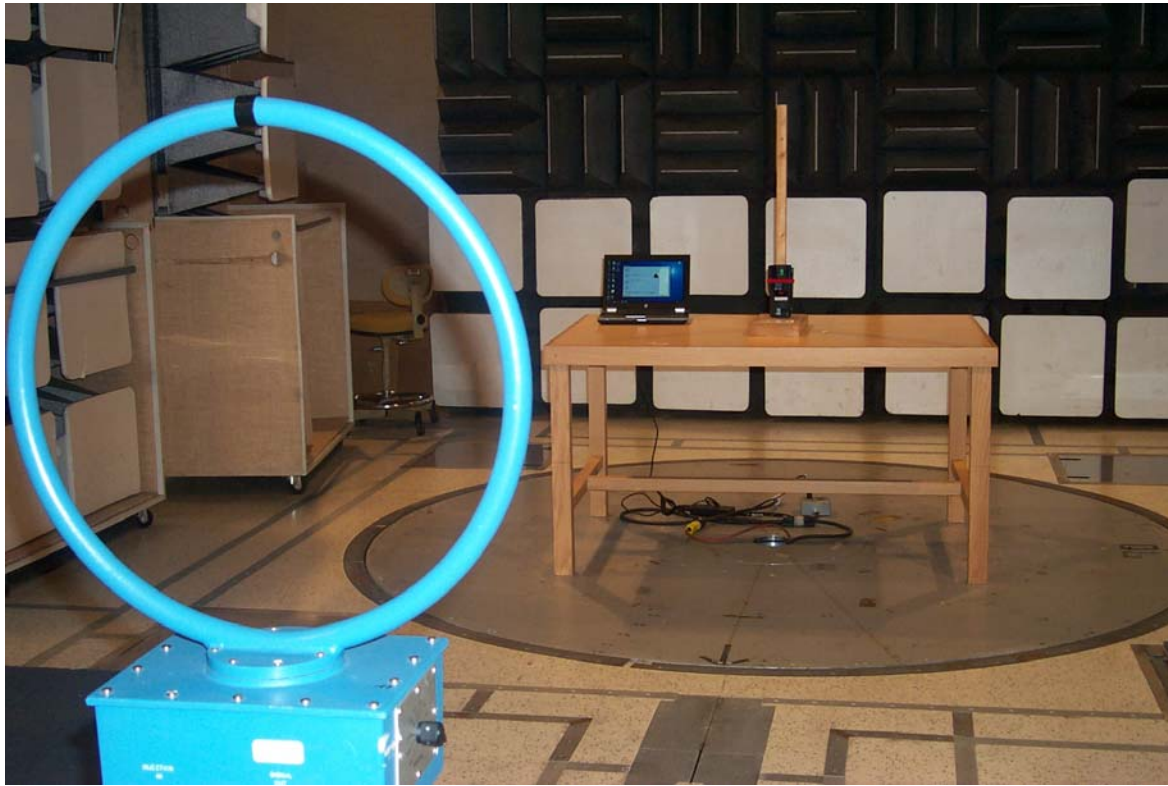

Spurious emissions below 30 MHz

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 26 of 42

5.4 Spurious Emissions (30 to 1000 MHz.)

The EUT was placed in a semi-anechoic chamber for spurious emissions testing in accordance with ANSI C63.4, FCC Part 15, Subpart C and 3M Test Procedures: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM and Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2. The Spurious Emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT while in the transmit mode.

5.4.1 Test Procedure

The EUT was placed in the center of a turntable. An EMI receiver was used for the emissions measurements in the range of 30MHz to 1000MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Peak results were maximized at discrete frequencies utilizing quasi-peak detection. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling every 4 degrees) and varying the antenna height between 1 and 4 meters at the angles of the highest emissions levels found. Measurements were taken in both vertical and horizontal antenna polarization. The final measurements recorded were determined by the following formula:

Result (dB μ V /m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB)

5.4.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
30 - 88	10	29.54
88 - 216	10	33.06
216 - 960	10	35.56
960 and higher	10	43.52

5.4.3 Test Results

The EUT met the FCC Part 15, Subpart C Spurious Emissions (30 to 18000 MHz.) requirements. No spurious emissions above 1000 MHz.

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 27 of 42

Report Number	F0411003	Date	10 August 2011
EUT Name	Mobile ID Reader	EUT Power	Battery
EUT Model	MD6000	Test Std	FCC Part 15
EUT Serial #	G0001	Temperature (°C)	23
EUT Description	Handheld data capture device.	Humidity (%)	33
		Air Pressure (kPa)	98.7



MAXIMIZED FILES _____ MD6000 8/10/11 sc1 V-H _____

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE	PASSING MARGIN	MAXIMIZED POSITION		REMARKS
	H/V	dBµV	dBµV	dBµV	TURNTABLE (°)	ANTENNA (M)	
40.683	V	18.48	29.54	11.06	259	1.0	Spurious 3 rd Harmonic FCC 15.209 limit line
195.000	H	23.75	43.52	19.77	270	1.0	Digital
216.663	H	18.06	46.44	28.38	256	1.0	Digital
232.334	H	22.91	46.44	23.53	260	1.0	Digital
233.272	H	22.60	46.44	23.84	250	1.0	Digital
238.252	H	19.71	46.44	26.73	90	1.0	Digital
489.408	V	23.93	46.44	22.51	175	1.0	Digital
617.464	H	31.78	46.44	14.66	150	1.0	Digital
769.138	H	32.28	46.44	14.16	150	1.0	Digital
Notes: No other spurious emissions detected.							

* - All readings have the correction factors applied.


Test Engineer: Mike Schultz	Date: 10 August 2011
-----------------------------	----------------------

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 28 of 42

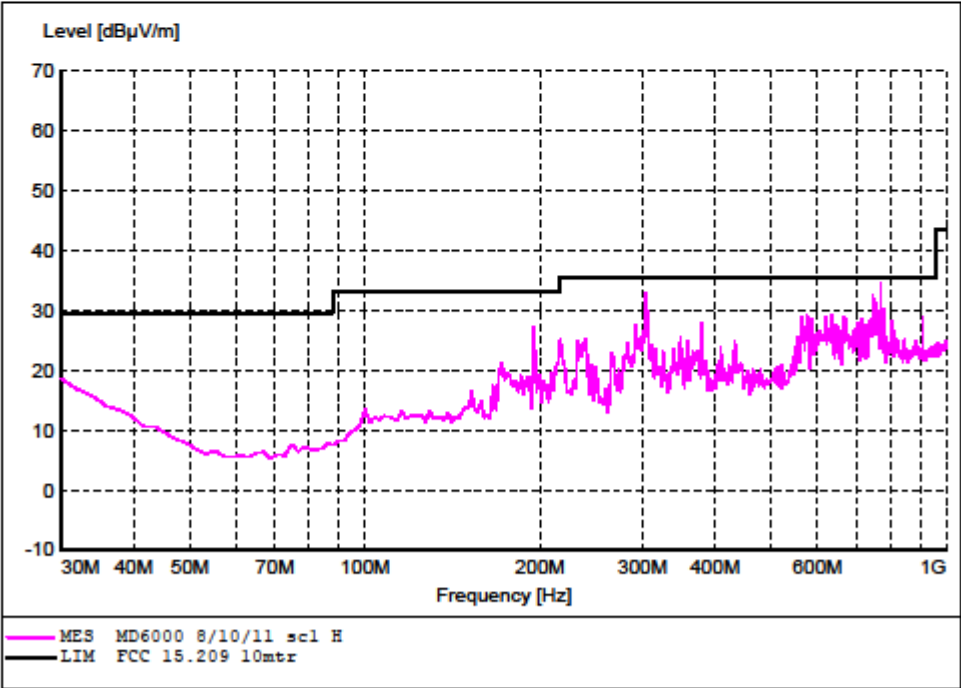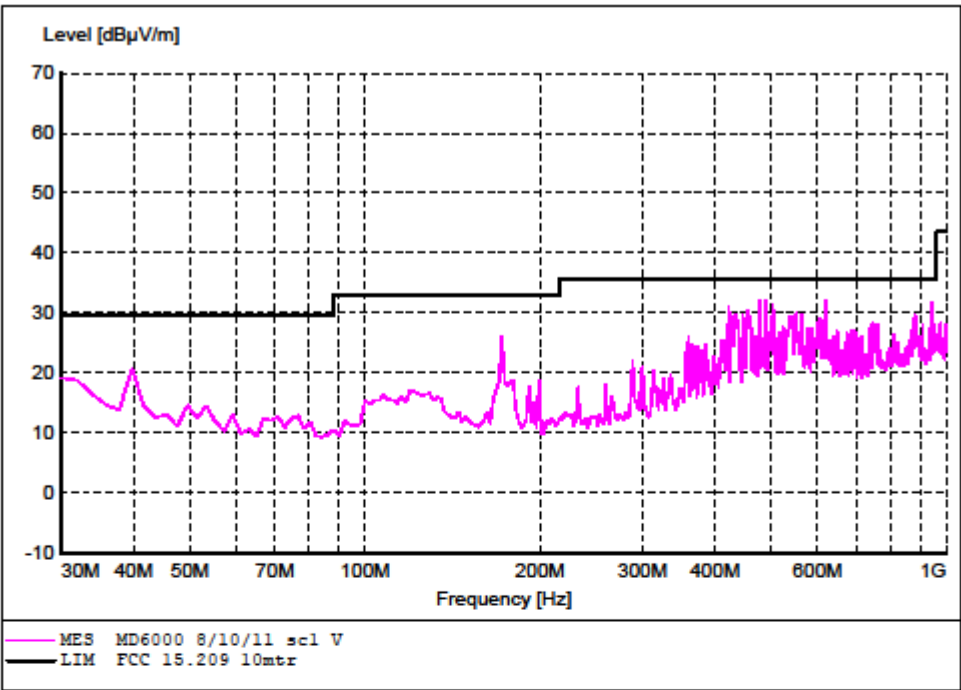

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 29 of 42

5.4.4 Test Setup Photo

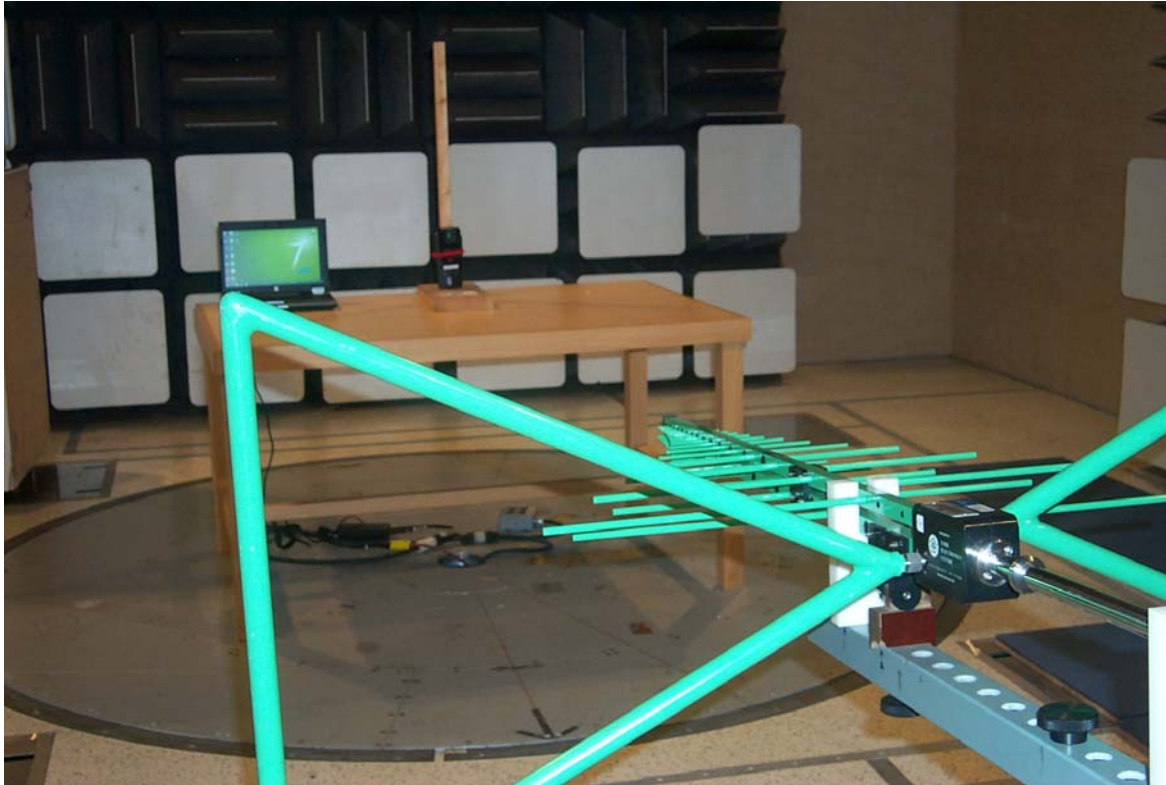

Spurious Emissions above 30 MHz

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 30 of 42

5.5 Digital Radiated Emissions (30 MHz - 18000 MHz)

The EUT was placed in an anechoic chamber and radiated emissions testing was performed in accordance with ANSI C63.4, FCC Part 15 and 3M Test Procedures: Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2, and Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY. Radiated emissions measurements were made to determine the level of electromagnetic energy radiating from the EUT.

5.5.1 Test Procedure

The EUT was placed in the center of a turntable. An EMI receiver was used for the emissions measurements in the range of 30MHz to 40GHz (the upper limit of measurement is determined by the 5th harmonic of the highest frequency generated in the device or 40 GHz whichever is lower). Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Peak results were maximized at discrete frequencies utilizing quasi-peak detection. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling every 4 degrees) and varying the antenna height between 1 and 4 meters at the angles of the highest emissions levels found. Measurements were taken in both vertical and horizontal antenna polarization. The final quasi-peak measurements recorded were determined by the following (the detector used above 1000 MHz is both average and peak):

Result (dB μ V /m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB)

5.5.2 Test Criteria

The FCC Class 'A' radiated limits are given below. The lower limit shall apply at the transition frequency.

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
30 - 88	10	39.08
88 - 216	10	43.52
216 - 960	10	46.44
960 - 1000	10	49.54
1000 – 40000	10	49.54 AVG 69.54 PEAK

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 31 of 42

5.5.3 Test Results

The EUT met the FCC Class 'A' radiated emission requirements. The upper Limit of testing was 15000 MHz. All maximized quasi-peak measurements for the EUT were below the quasi-peak limit.

Report Number	F0411003	Date	10 August 2011
EUT Name	Mobile ID Reader	EUT Power	Battery
EUT Model	MD6000	Test Std	FCC Part 15
EUT Serial #	G0001	Temperature (°C)	23
EUT Description	Handheld data capture device.	Humidity (%)	33
		Air Pressure (kPa)	98.7



MAXIMIZED FILES MD6000 8/10/11 sc1 V-H

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE	PASSING MARGIN	MAXIMIZED POSITION		REMARKS
	H/V	dBµV			dBµV	dBµV	
40.683	V	18.48	29.54	11.06	259	1.0	Spurious 3 rd Harmonic FCC 15.209 limit line
195.000	H	23.75	43.52	19.77	270	1.0	Digital
216.663	H	18.06	46.44	28.38	256	1.0	Digital
232.334	H	22.91	46.44	23.53	260	1.0	Digital
233.272	H	22.60	46.44	23.84	250	1.0	Digital
238.252	H	19.71	46.44	26.73	90	1.0	Digital
489.408	V	23.93	46.44	22.51	175	1.0	Digital
617.464	H	31.78	46.44	14.66	150	1.0	Digital
769.138	H	32.28	46.44	14.16	150	1.0	Digital
Notes: No other spurious emissions detected.							

* - All readings have the correction factors applied.

Test Engineer: Mike Schultz	Date: 10 August 2011
-----------------------------	----------------------

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 32 of 42

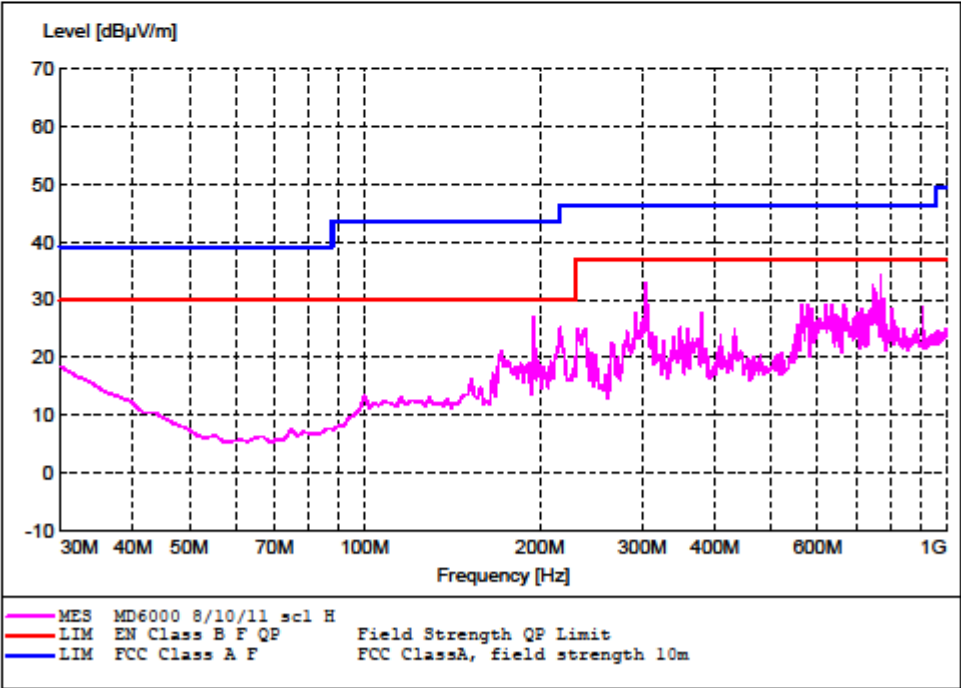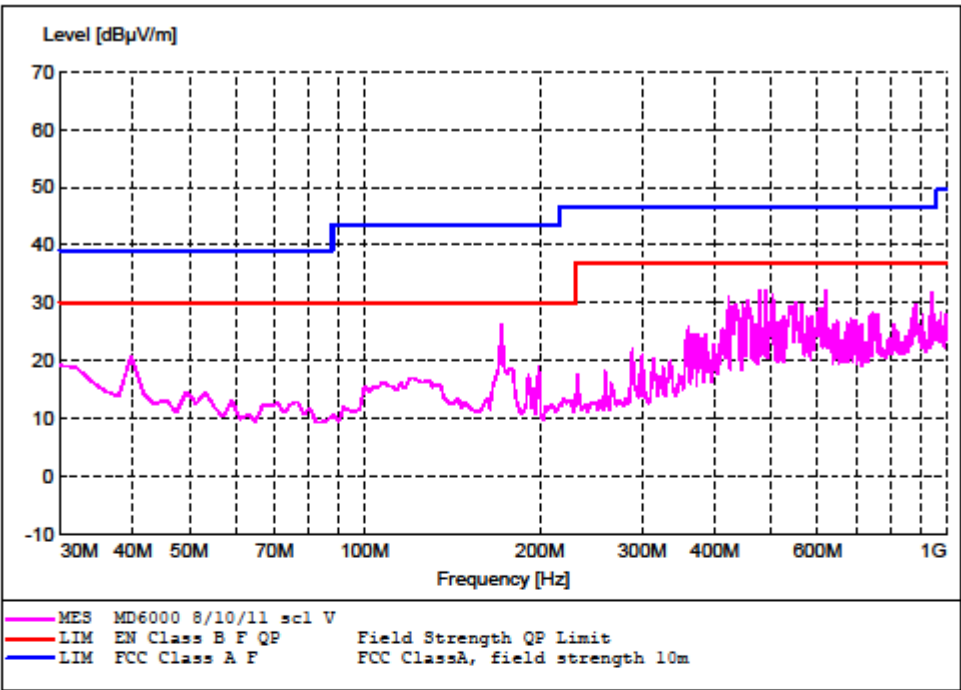

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 33 of 42

Report Number	F0411003	Date	16 August 2011
EUT Name	Mobile ID Reader	EUT Power	Battery
EUT Model	MD6000	Test Std	FCC Part 15
EUT Serial #	G0001	Temperature (°C)	23
EUT Description	Handheld data capture device.	Humidity (%)	33
		Air Pressure (kPa)	98.7


MAXIMIZED FILES MD6000 8/16/11 sc1 V-H

FREQ. (GHz)	MAXIMIZED AVG SIGNAL		LIMIT LINE (dBµV/m)	PASSING MARGIN (dB)	MAXIMIZED PEAK SIGNAL		LIMIT LINE (dBµV/m)	PASSING MARGIN (dB)	TURN TABLE (degrees)	ANTENNA HEIGHT (m)
	H/V	(dBµV/ m)			H/V	(dBµV/m)				
1007.014	V	9.64	49.54	39.90	V	32.70	69.54	36.84	170	1.0
1063.126	V	7.12	49.54	42.42	V	33.27	69.54	36.27	170	1.0
1495.600	V	9.15	49.54	40.39	V	35.54	69.54	34.00	270	1.0
1330.260	V	4.28	49.54	45.26	V	35.46	69.54	34.08	180	1.0
1595.800	V	10.78	49.54	38.76	V	35.40	69.54	34.14	180	1.0
2126.250	V	8.06	49.54	41.48	V	41.75	69.54	27.79	180	1.0

Notes: Digital frequencies recorded. No spurious emissions detected.


Test Engineer: Mike Schultz	Date: 16 August 2011
-----------------------------	----------------------

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 34 of 42

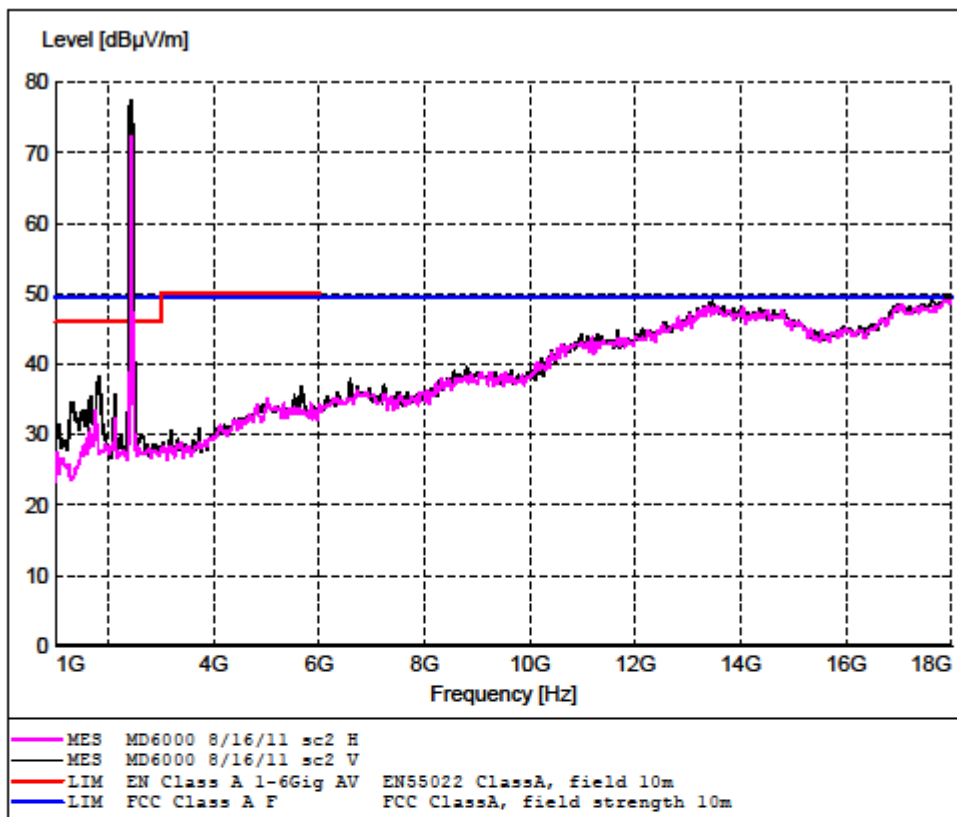


3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 35 of 42

5.5.4 Test Setup Photo

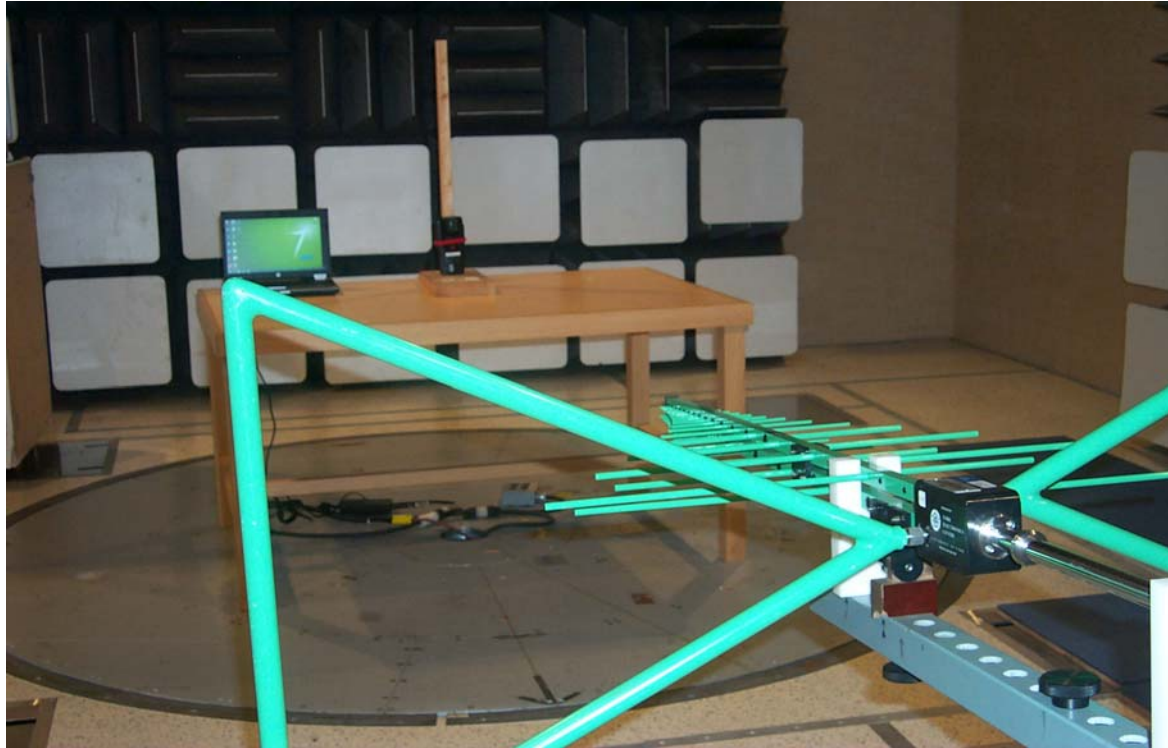

Radiated Emissions 30 to 1000 MHz

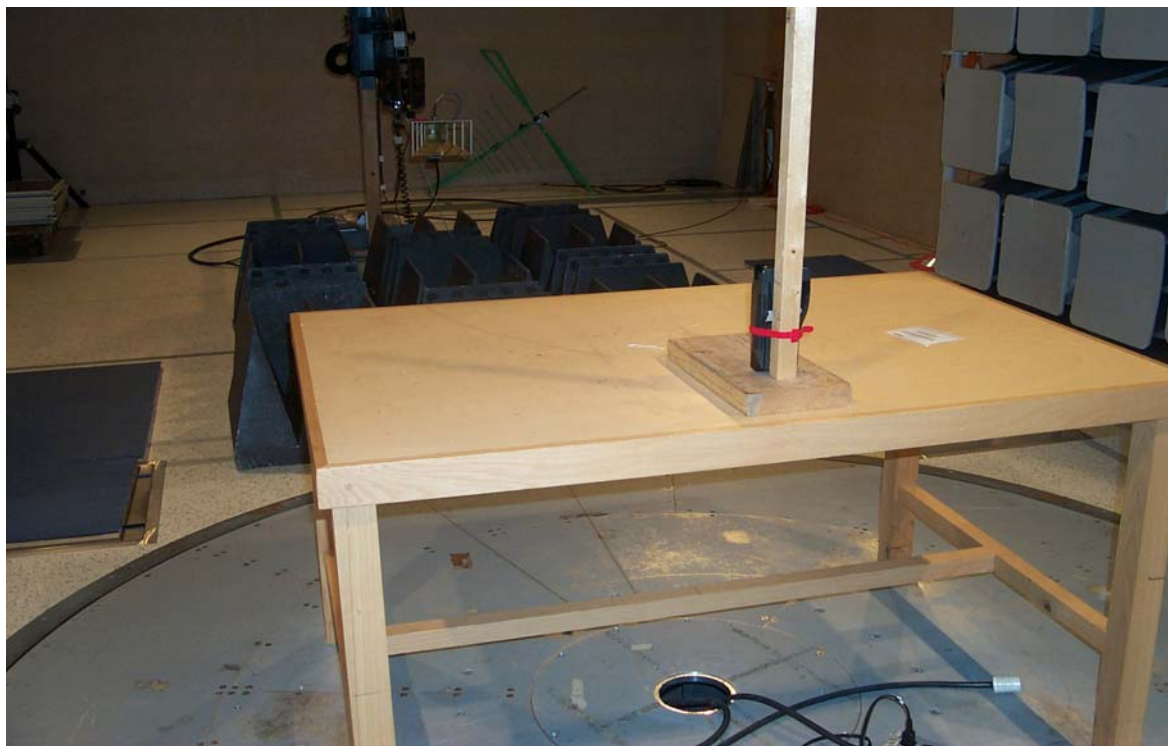

Radiated Emissions 1 to 18 GHz

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 36 of 42

5.6 Human Exposure (EMF)

This procedure is for the evaluation of human exposure to electromagnetic fields (EMF) from devices containing RFID. The testing is in accordance with RSS-102 and 3M Test Procedure: EMF Test w/EMR-300, PBLI-7FAM2G.

5.6.1 Test Procedure

The EUT was setup in a shielded room and measurements were made of both the electric and magnetic fields at 13.56 MHz at a distance of 20 cm around the equipment using EMF exposure meters.

4.10.2 Performance Criteria

For general public exposure, the results shall be compared with the exposure limits 4.2 of RSS-102. For 13.56 MHz, the limits are as follows:

Freq Range	V/m	A/m	W/m ²	EUT Power
10-30 MHz	28.0	0.162	-	424 mw

4.10.3 Test Results

The EUT met the general public exposure criteria for both the electric field and the magnetic field.

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 37 of 42

Test Position	Frequency	Distance	Measurement	Limit	Margin
E-FIELD					
	10-400 MHz	20 cm	.800	28	27.20
	10-400 MHz	20 cm	.760	28	27.24
	10-400 MHz	20 cm	1.000	28	27.00
	10-400 MHz	20 cm	.980	28	27.02
	10-400 MHz	20 cm	.660	28	27.34
	10-400 MHz	20 cm	1.100	28	26.90
Average			.883	28	26.61
H-FIELD					
	10-400 MHz	20 cm	.0126	.0730	.0604
	10-400 MHz	20 cm	.0103	.0730	.0627
	10-400 MHz	20 cm	.0092	.0730	.0638
	10-400 MHz	20 cm	.0120	.0730	.0610
	10-400 MHz	20 cm	.0126	.0730	.0604
	10-400 MHz	20 cm	.0120	.0730	.0610
Average			.0114	.0730	.0615

Test Engineer: Mike Schultz	Date: 27 September 2011
-----------------------------	-------------------------

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 38 of 42

4.10.4 Test Setup Photo



RF Exposure Measurement

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 39 of 42

6.0 LIST OF TEST EQUIPMENT

The following test equipment was used to perform the indicated tests. All test equipment was calibrated by an accredited calibration laboratory or by the manufacturer. All calibration intervals are one year. All equipment calibrations, test procedures, and test facility are traceable to the standards of the National Institute of Standards and Technology (NIST). The test facility site attenuation verification results fall within the normalized site attenuation (NSA) criteria for open area test sites using volumetric measurements.

RADIATED EMISSIONS

Electro Metrics Large Loop Antenna, Model ALR25M, Serial No. 603 (cal due date: 20 Oct 12)
Schaffner Biconilog Antenna, Model CBL6112B, Serial No. 27491 (cal due date: 21 Oct 12)
A. H Systems Horn Antenna, Model SAS_200/571 Serial No: 234 (cal due date: 22 Oct 12)
HP Pre-Amplifier, Model 8447D, Serial No. 1937A03090 (cal due date: 21 Oct 12)
HP Pre-Amplifier, Model 83017A, Serial No. 3123A00259 (cal due date: 20 Oct 12)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 12)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

CONDUCTED EMISSIONS

EMCO LISN, Model 3825-2, Serial No. 1039 (cal due date: 20 Oct 12)
Solar High Pass Filter, Model 8131 - 5.0 (cal due date: 30 Aug 12)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 12)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

FREQUENCY STABILITY / POWER OUTPUT

Agilent Freq. Counter Model 53131A, Serial No. MY40012264 (cal due date: 21 Oct 12)
HP Spectrum Analyzer Model 8591A, Serial No. 3108A02041 (cal due date: 9 Oct 12)
Envirotronics Environ. Chamber, EH16-1-1.5AC, SN:10066639 (cal due date: 1 Nov 12)

OCCUPIED BANDWIDTH

Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 12)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

EMF MEASUREMENT

Narda EMR 300 Exposure Meter, Model 2244/31 (cal due date: 15 Jan 12)
Narda Type 8 E-Probe, s/n BG0030 (cal due date: 13 Jan 12)
Narda Type 12 H-Probe, s/n AE0020 (cal due date: 13 Jan 12)

TEST FACILITY

Lindgren Semi-Anechoic Chamber, (verification due date: 30 Aug 12)
FCC Site Registration Number: 93334
Canadian Site Registration Number: 458A-1

SOFTWARE

EMI Measurement Software, Rohde & Schwarz ESIB-K1 Vers. 1.20

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 40 of 42

7.0 LABELING INFORMATION

The following labeling information is required by the FCC (Federal Communications Commission) and IC (Industry Canada) for Class A digital devices. Since the equipment contains both intentional and unintentional radiators, it must be labeled as a digital device and as an intentional radiator.

Labels on the Product

The following statements shall be placed in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**FCC ID: DGFESPE130
IC ID: 458A-ESPE130**

"This Class A digital apparatus complies with Canadian ICES-003."

"Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada."

Statements in the Manuals

The following statement shall be placed in a prominent location in the text of the user manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide a reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

FCC ID: DGFSSDMD6000

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 41 of 42

NO MODIFICATIONS. Modifications to this device shall not be made without the written consent of 3M, Company. Unauthorized modifications may void the authority granted under Federal Communications Commission and Industry Canada Rules permitting the operation of this device.

"This Class A digital apparatus complies with Canadian ICES-003."

"Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada."

IC ID: 458A-SSDMD6000

3M	MD6000	Report # F0411003	3M
EMC Laboratory	Reg. Eng. And Quality	November 8, 2011	Page 42 of 42

This is the last page of the Test Report