

**FCC
Electromagnetic Compatibility
Test Report**

For

**3M™ Document Reader
Model PV30 (ACG)**


**3M Security Systems Division
St. Paul, MN 55144-1000**

27 December 2006

Report Number: F1106001

Prepared By:

**3M Corporate Research Laboratories
SEMS Product Safety - EMC Laboratory
Building 76-1-01
410 East Fillmore Avenue
St. Paul, Minnesota 55144-1000**

3M Product Safety SEMS Technology Center Building 76-1-01 St. Paul, MN 55144-1000	Phone: 651-778-6279 FAX: 651-778-6252	 EMC Laboratory
--	--	--

CERTIFICATE OF COMPLIANCE

USA STANDARD 47 CODE OF FEDERAL REGULATIONS

Radiated Emissions (FCC Part 15, Subpart B, Class A)
Conducted Emissions (FCC Part 15, Subpart B, Class A)
Radiated Emissions (FCC Part 15, Subpart C)
Conducted Emissions (FCC Part 15, Subpart C)

MANUFACTURER'S NAME	3M Company
NAME OF EQUIPMENT	3M™ Document Reader PV30
MODEL NUMBER	PV30 ACG
SERIAL NUMBER	PV30B974
DESCRIPTION	Passport Reader with RFID
TEST REPORT NUMBER	F1106001
DATE	27 December 2006

As the responsible EMC Engineer, I hereby declare that the equipment tested, as specified in the test report, at the 3M Product Safety EMC Laboratory is in compliance with 47 CFR, Part 15, Subpart B and Subpart C. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Robert Heller
Senior EMC Engineer

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 3 of 31

TABLE OF CONTENTS

Title Page
Certificate of Compliance
Table of Contents

1.0	Test Summary
2.0	Introduction
2.1	Scope
2.2	EUT Description and Operation
2.3	Block Diagram
2.4	Part List
2.5	Modifications to EUT
2.6	Measurement Uncertainty
3.0	Applicable Documents
4.0	Conducted Emissions
4.1	Test Procedure
4.2	Test Criteria
4.3	Test Results
5.0	Radiated Emissions
5.1	Frequency Stability
5.1.1	Test Procedure
5.1.2	Test Criteria
5.1.3	Test Results
5.2	Emissions Bandwidth
5.2.1	Test Procedure
5.2.2	Test Criteria
5.2.3	Test Results
5.3	Spurious Emissions (12.5 to 30 MHz.)
5.3.1	Test Procedure
5.3.2	Test Criteria
5.3.3	Test Results
5.4	Radiated Emissions (30 to 40000 MHz.)
5.4.1	Test Procedure
5.4.2	Test Criteria
5.4.3	Test Results
6.0	List of Test Equipment
7.0	Labeling Information

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 4 of 31

1.0 TEST SUMMARY

Test Report Number: F1106001

Requester: Stephen Bernard, 3M-AiT Canada

Company: 3M Security Systems Division
St. Paul, MN 55144

Telephone Number: (613) 725-1485 x 1555

Test Dates: November 6, 14, 15, 16, 17, 2006

Equipment Under Test Model PV30 Document Reader (with ACG RFID reader)

Date Of Receipt: November 1, 2006; EUT was in good working order

Test Environment Temperature: 21 degrees C
 Relative Humidity: 41 % RH
 Barometric Pressure (inHg): 30.26

Test Results: Passed the following tests:
 Conducted Emissions: FCC Part 15 Subpart B Class A
 Radiated Emissions: FCC Part 15 Subpart B Class A
 Conducted Emissions: FCC Part 15 Subpart C
 Radiated Emissions: FCC Part 15 Subpart C

Modifications: None

Test Location: 3M Corporate Research Laboratories
 SEMS Product Safety - EMC Laboratory
 Building 76-1-01
 410 East Fillmore Avenue
 St. Paul, Minnesota 55144-1000

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 5 of 31

2.0 INTRODUCTION

2.1 Scope

This report contains results describing the conformance of the Equipment Under Test (EUT) to FCC Part 15, Subpart B, "Class A" rules for unintentional radiators and FCC Part 15, Subpart C rules for intentional radiators.

This report is the confidential property of the client and applies only to the specific item tested under the stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. This report shall not be reproduced without the written approval of the testing laboratory. When approval has been granted, the report shall be reproduced in its entirety.

The appropriate testing standards and references are contained in Section 3.0. The worst case test data, test configuration, and photographs (worst case configuration) are provided in Sections 4.0 and 5.0. Test equipment and EUT labeling information is contained in Sections 6.0 and 7.0.

Subsequent tests of the EUT are necessary from time to time on equipment taken at random from production. A retest is also required when the EMC profile has been changed or is suspected of being changed.

The 3M Product Safety EMC Laboratory is recognized under the United States Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC Guide 25 and the relevant requirements of ISO 9002 (ANSI/ASQ Q92-1987) as suppliers of test results. Accreditation by the National Voluntary Laboratory Accreditation Program is awarded for specific services, listed on the Scope of Accreditation for: Electromagnetic Compatibility and Telecommunications, FCC, under Lab Code 200033. A complete copy of the Scope of Accreditation is available upon request. The FCC Site Registration Number is 93334.

The NVLAP accreditation or this test report does not in any way constitute or imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 6 of 31

2.2 EUT Descriptions and Operation

The Equipment Under Test (EUT) is the Model PV30 Document Reader utilizing an ACG RFID reader module, Serial Number PV30B974. The Model PV30 Document Reader (with RFID) is a full-image capture device that provides automated data capture from a variety of personal identification documents.

The reader has a transmit frequency of 13.55992 MHz and a power output level of 200 mW (EIRP). This maximum output is factory preset.

The EUT contains a figure-8 antenna that is 140mm x 145mm (one part of the "8" is 140mm x 90mm and the other is 140mm x 55mm). The antenna is mounted on the top of the unit surrounding the document access window. The antenna is cabled to the RFID reader board and the antenna connection is via coax cable and a MMCX connector.

All tests were made using an input of 120 V RMS, 60 Hz, and single-phase power. The EUT was tested by running a diagnostic software program via a laptop PC connected via a USB link to exercise all imaging functions. The RFID Reader was set to the fastest read time and was reading RFID tags during all testing (except for the image only (digital) testing).

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 7 of 31

2.3 Block Diagram

Block diagram is on a separate exhibit.

2.4 Parts List

Parts list is on a separate exhibit.

2.5 Modifications to the EUT

No modifications were required.

2.6 Measurement Uncertainty

The data and test results referenced in this report are true and accurate. However, there may be deviations within the calibration limits of the test equipment and facilities that can account for a nominal measurement deviation of ± 2 dB. Furthermore, EUT component and manufacturing process variables may result in additional deviation. The calculated confidence level is 95 %.

3.0 APPLICABLE DOCUMENTS

The following documents were used as reference for the limits and test procedures specified herein.

CFR 47	Part 15 Radio Frequency Devices	2004
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz.	2003
CISPR 16-1	Specification for radio disturbance and immunity measuring apparatus and methods	
	-1 Measuring Apparatus	2003
	-2 Ancillary Equipment – Conducted Disturbance	2004
	-3 Ancillary Equipment – Disturbance Power	2004
	-4 Ancillary Equipment – Radiated Disturbance	2004
CISPR 16-2	Specification for radio disturbance and immunity measuring apparatus and methods	
	-1 Conducted Disturbance Measurements	2003
	-2 Measurements of Disturbance Power	2004
	-3 Radiated Disturbance Measurements	2003
CISPR 16-4	-1 Uncertainties in Standardized EMC Tests	2005

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 8 of 31

4.0 CONDUCTED EMISSIONS

A conducted emissions test was performed in accordance with ANSI C63.4. The limits are prescribed in FCC Part 15, Subpart B and in FCC Part 15, Subpart C. Conducted emissions tests were made to determine the level of electromagnetic noise that is conducted onto the power mains from the EUT.

4.1 Test Procedure

A Line Impedance Stabilization Network (LISN) with 500/50 μ H characteristic was used to isolate the EUT and give accurate and repeatable readings. An EMI test receiver was used for the emissions measurements in the range from 150kHz to 30MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Initial results were measured at discrete frequencies utilizing quasi-peak detection. Measurement results were automatically calculated via were determined by the following:
software running the EMI receiver. The final quasi-peak and average measurements recorded

Result (dB μ V) = receiver reading (μ V) + LISN (dB) + cable loss (dB)

4.2 Test Criteria

The FCC Class 'B' conducted limits are given below. The lower limit shall apply at the transition frequency.

Mains Terminal Disturbance Limits		
Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)
0.15 to 0.50	66 to 56 decreases with log(f)	56 to 46 decreases with log(f)
0.50 to 5.0	56	46
5.0 to 30.0	60	50

4.3 Test Results

4.3 Test Results

The EUT met the FCC Class 'B' conducted emission requirements. The worst-case quasi-peak emission was as follows:

3M™ PV30 (with ACG reader)				
Frequency (MHz)	QP Limit (dB μ V)	QP L1 (dB μ V)	QP L2 (dB μ V)	Passing Margin (dB)
1.566	56.00	49.7	49.8	6.2

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 9 of 31

CONDUCTED EMISSIONS





TEST REPORT # F1106001 SHEET 1 OF 1
 EUT MODEL # PV30 EUT SERIAL # PV30B974
 DESCRIPTION Document Reader (with ACG RFID reader)


FREQUENCY (MHz)	PEAK (dB μ V)		QUASI-PEAK (dB μ V)				AVERAGE (dB μ V)			
	L1 Line	L2 Neut	L1 Line	L2 Neut	Limit	Pass	L1 Line	L2 Neut.	Limit	Pass
0.344	-	-	45.8	46.3	59.1	12.8	42.1	42.4	49.1	6.7
0.518	-	-	47.1	46.2	56.0	8.9	42.3	42.7	46.0	3.3
0.692	-	-	47.0	46.7	56.0	9.0	41.2	41.0	46.0	4.8
0.864	-	-	39.8	40.0	56.0	16.0	32.3	32.5	46.0	13.5
1.389	-	-	46.1	46.2	56.0	9.8	38.4	38.9	46.0	7.1
1.566	-	-	49.7	49.8	56.0	6.2	44.6	44.8	46.0	1.2
1.740	-	-	49.2	49.3	56.0	6.7	43.6	43.7	46.0	2.3
1.915	-	-	49.1	49.1	56.0	6.9	42.8	43.0	46.0	3.0
2.091	-	-	43.6	44.3	56.0	11.7	36.0	36.7	46.0	9.3
2.440	-	-	46.7	46.5	56.0	9.3	42.0	41.5	46.0	4.0
2.605	-	-	38.0	38.7	56.0	17.3	21.7	22.5	46.0	23.5

Test Engineer: R. Heller Date: 11-15-06

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 10 of 31

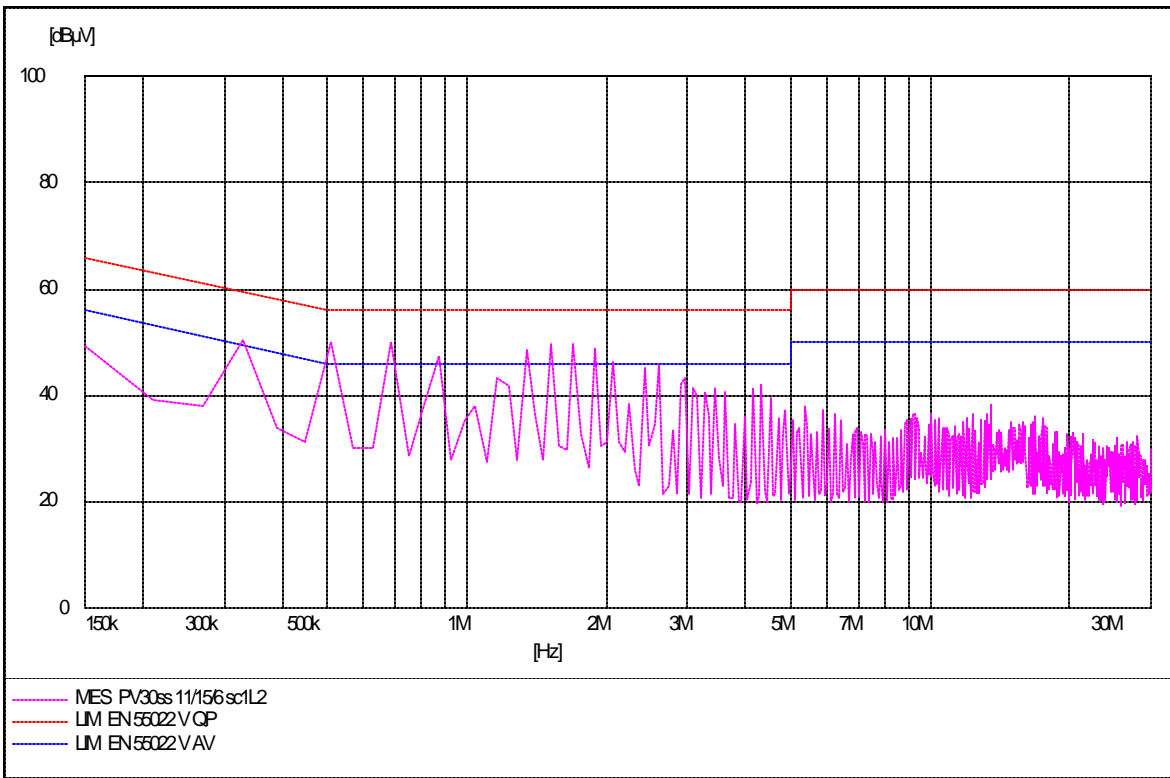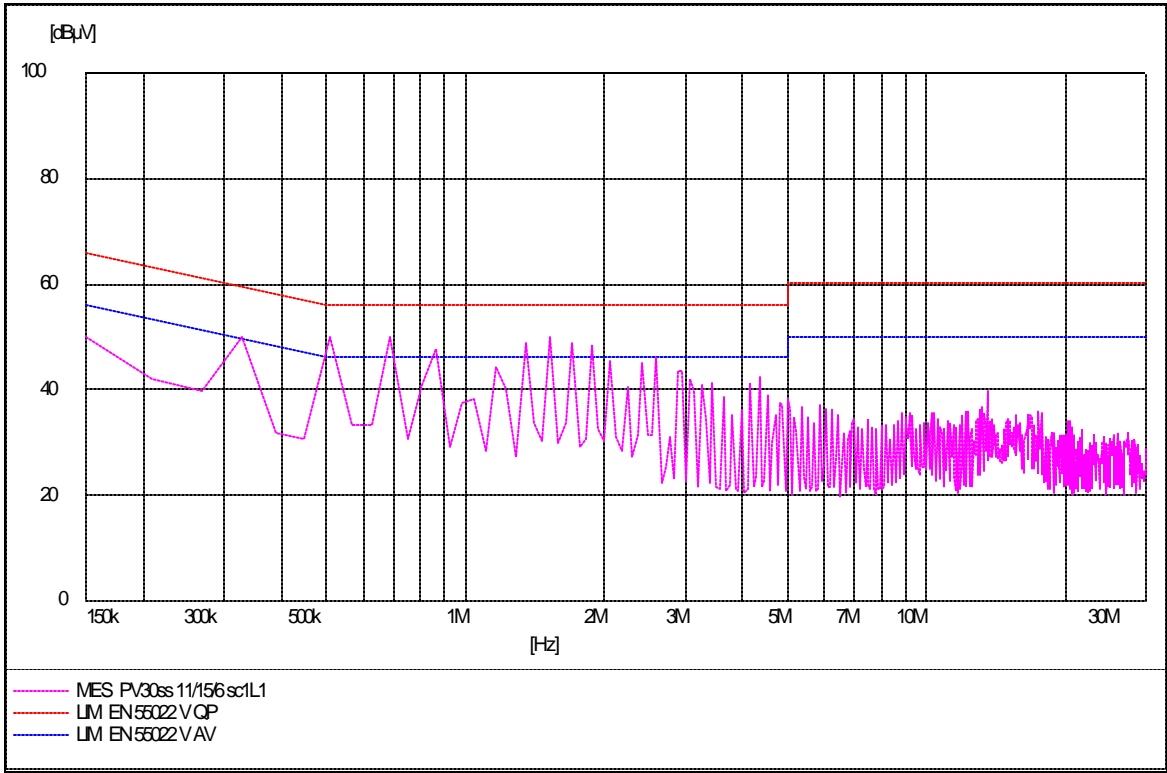

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 11 of 31

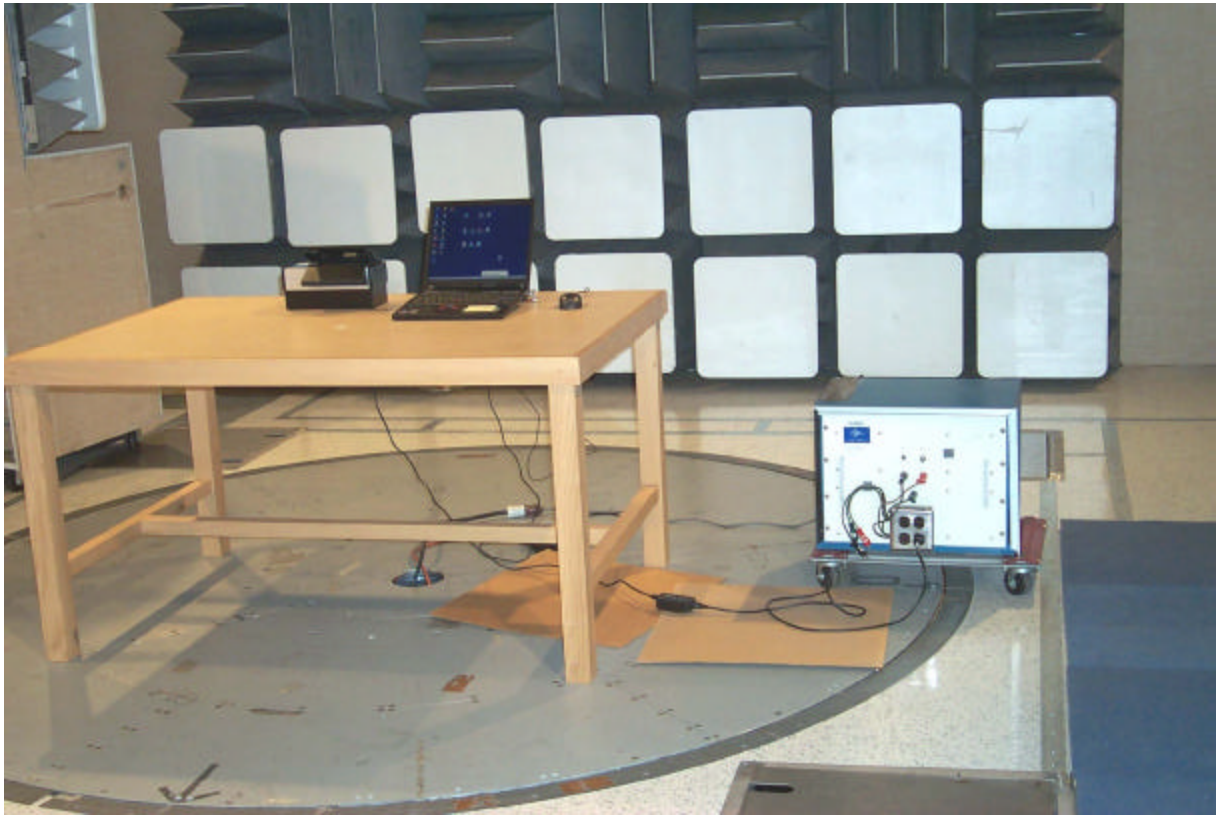

PV30 ACG Conducted Emissions

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 12 of 31

5.0 RADIATED EMISSIONS

Radiated emission testing is performed in accordance with ANSI C63.4. The limits are prescribed in FCC Part 15, Subpart B and in FCC Part 15, Subpart C. Radiated emissions measurements were made to determine the level of electromagnetic energy radiating from the EUT.

5.1 Frequency Stability

The frequency stability test was performed in accordance with ANSI C63.4 and FCC Part 15 to insure that the intentional radiator frequency stability was within the allowable limits for input power and temperature variations.

5.1.1 Test Procedure

The frequency stability was measured using the radiated signals from the EUT so that the measurement equipment would not load the radio frequency circuits. An EMI receiver was used for the frequency stability measurements. The Reader was put into a continuous output mode through instructions from the host computer (test mode of operation). 1) The frequency was measured while the input AC power to the external power supply was varied over the required input voltage range. 2) The frequency was also measured while the ambient air temperature was varied over the required ambient temperature range (at startup, 2 minutes, 5 minutes, and 10 minutes).

5.1.2 Test Criteria

The FCC Part 15, Subpart C for Frequency Stability Limits versus Supply Voltage are given as:

Carrier Frequency (MHz)	Voltage Range % of Nominal Supply (85 % to 115 %)	Max.Frequency Change (%)
13.56	102 to 138 V RMS	+/- 0.01 %

The FCC Part 15, Subpart C for Frequency Stability Limits versus Temperature is given as:

Carrier Frequency (MHz)	Temperature Range (degrees C)	Max.Frequency Change (%)
13.56	-20 to +50	+/- 0.01 %

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 13 of 31

5.1.3 Test Results

The EUT met all FCC Part 15, Subpart C Frequency Stability requirements.

Carrier Frequency Stability versus Supply Voltage			
Voltage (60Hz)	115 VAC	97.75 VAC	132.25 VAC
Frequency (MHz)	13.5596	13.5597	13.5597

Carrier Frequency Stability versus Temperature			
Temperature Interval	At Temperature Stabilization	+10 Minutes	+30 Minutes
-20C	13.5596	13.5596	n/a
-10C	13.5597	13.5597	n/a
0C	13.5596	13.5595	n/a
+10C	13.5596	13.5597	n/a
+20C	13.5596	13.5597	n/a
+30C	13.5595	13.5596	n/a
+40C	13.5597	13.5597	n/a
+50C	13.5595	13.5597	13.5595

Carrier Frequency Stability MIN/MAX		
	Measured Value	Limit
Lowest Frequency (MHz)	13.5595	13.553000
Highest Frequency (MHz)	13.5597	13.567000

Test Engineer: Bob Heller
Date: 11-28-2006

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 14 of 31



PV30 ACG Frequency Stability

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 15 of 31

5.2 Emission Bandwidth

The EUT was placed in a semi-anechoic chamber and a emission bandwidth test was performed in accordance with ANSI C63.4 and FCC Part 15, Paragraph 15.225. The emission bandwidth measurements were made to determine the intentional radiator frequency and determine the level of electromagnetic energy radiated at that frequency and at the band edges from the EUT.

5.2.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. The intentional radiator frequency and band edge frequencies utilizing quasi-peak detection were then maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). The antenna was rotated until the highest emissions levels were found. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak measurements recorded were determined by the following formula:

Result (dB μ V/m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

5.2.2 Test Criteria

The FCC Part 15 Subpart C, Section 15.225 Carrier Frequency Limits are given as:

Lower Band Edge:	13.5586 MHz
Upper Band Edge:	13.5615 MHz

The FCC Part 15, Subpart C radiated limits are given as:

Frequency (MHz)	Test Distance (Meters)	Field Strength (dB μ V/m)
1.705 to 13.110	10	48.62
13.110 to 13.410	10	59.58
13.410 to 13.553	10	69.55
13.553 to 13.567	10	103.00
13.567 to 13.710	10	69.55
13.710 to 14.010	10	59.58
14.010 to 30.000	10	48.62

Note: A 40 dB/decade extrapolation factor was used per 15.31.

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 16 of 31

5.2.3 Test Results


The EUT met the FCC Part 15, Subpart C Emission Bandwidth requirements. The intentional radiator frequency was within the allowed band and all maximized quasi-peak measurements for the EUT were below the quasi-peak limits.

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Passing Margin (dB)	Turntable (degrees)	Antenna Orientation/Angle (Polarity/degrees)
13.5599 ¹	51.76	103.00	51.24	125	+20 degrees from the X-axis.
13.5530 ²	0.73	69.55	68.82	125	+20 degrees from the X-axis.
13.5670 ²	0.72	69.55	68.83	125	+20 degrees from the X-axis.
13.1100 ²	0.99	59.58	58.59	125	+20 degrees from the X-axis.
14.0100 ²	0.47	59.58	59.11	125	+20 degrees from the X-axis.

1 - Intentional Radiator Frequency

2 - Band edges measured with a receiver bandwidth setting of 1 KHz. Per ANSI C63.4 Paragraph 13.1.7.

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 17 of 31

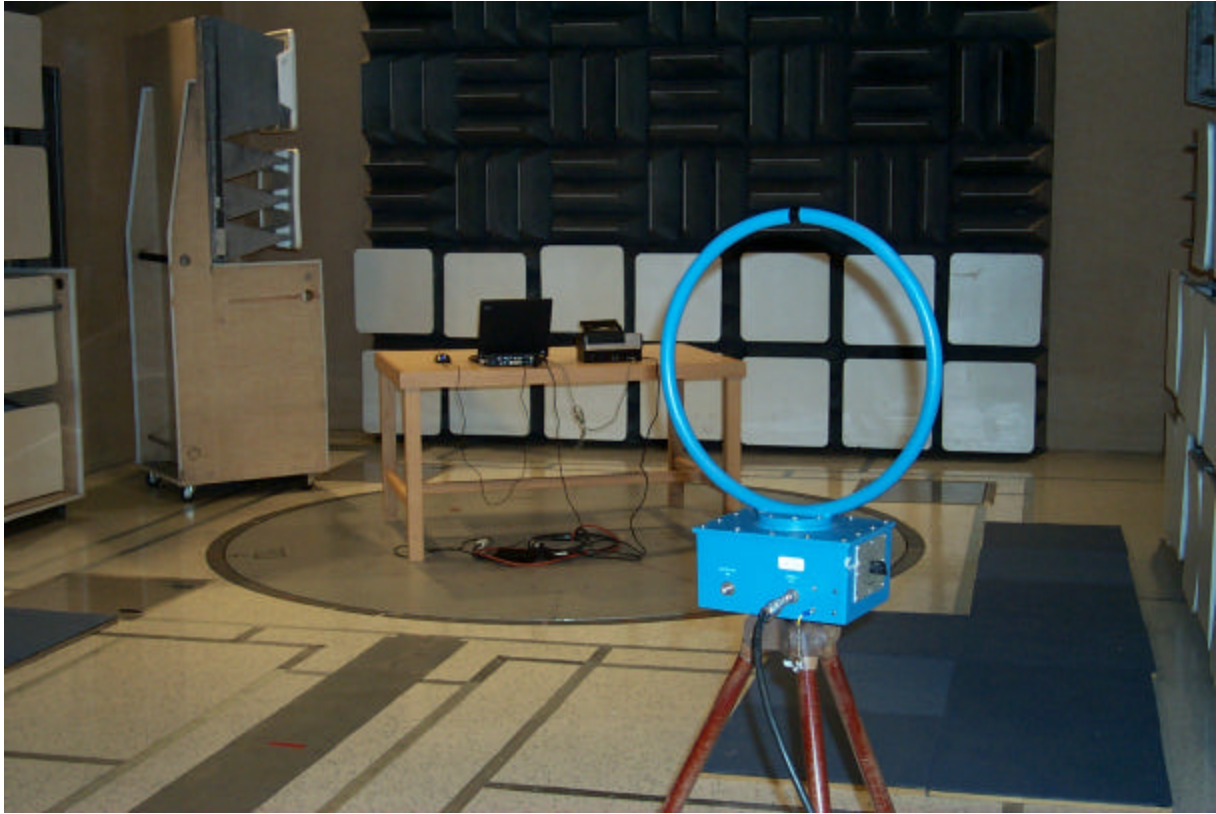

PV30 ACG Modulation Bandwidth

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 18 of 31

5.3 Spurious Emissions (12.5 to 30 MHz.)

The EUT was placed in a semi-anechoic chamber and a spurious emissions test was performed in accordance with ANSI C63.4 and FCC Part 15, Subpart C. The spurious emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT.

5.3.1 Test Procedure

A measurement loop antenna was positioned at a distance of 5 meters from the center of the EUT (to insure far field measurements). An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis of these sweeps was used to determine which discrete frequencies, other than the intentional radiator frequency and band edge frequencies, were to be maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). The antenna was rotated until the highest emissions levels were found. Final measurements were taken utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final measurements recorded were determined by the following formula:

Result (dB μ V/m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

5.3.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Test Distance (Meters)	Field Strength (dB μ V/m)
1.705 to 13.110	10	48.62
13.110 to 13.410	10	59.58
13.410 to 13.553	10	69.55
13.553 to 13.567	10	103.00
13.567 to 13.710	10	69.55
13.710 to 14.010	10	59.58
14.010 to 30.000	10	48.62

Note: A 40 dB/decade extrapolation factor was used per 15.31.


3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 19 of 31

5.3.3 Test Results

The EUT met the FCC Part 15, Subpart C Spurious Emissions (12.5 to 30 MHz.) requirements. All maximized quasi-peak measurements for the EUT were below the quasi-peak limits. The worst-case quasi-peak emission was as follows:

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Passing Margin (dB)	Turntable (degrees)	Antenna Orientation/Angle (Polarity/degrees)
27.1198	19.37	48.62	29.25	125	20 degrees from the X-axis.

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 20 of 31

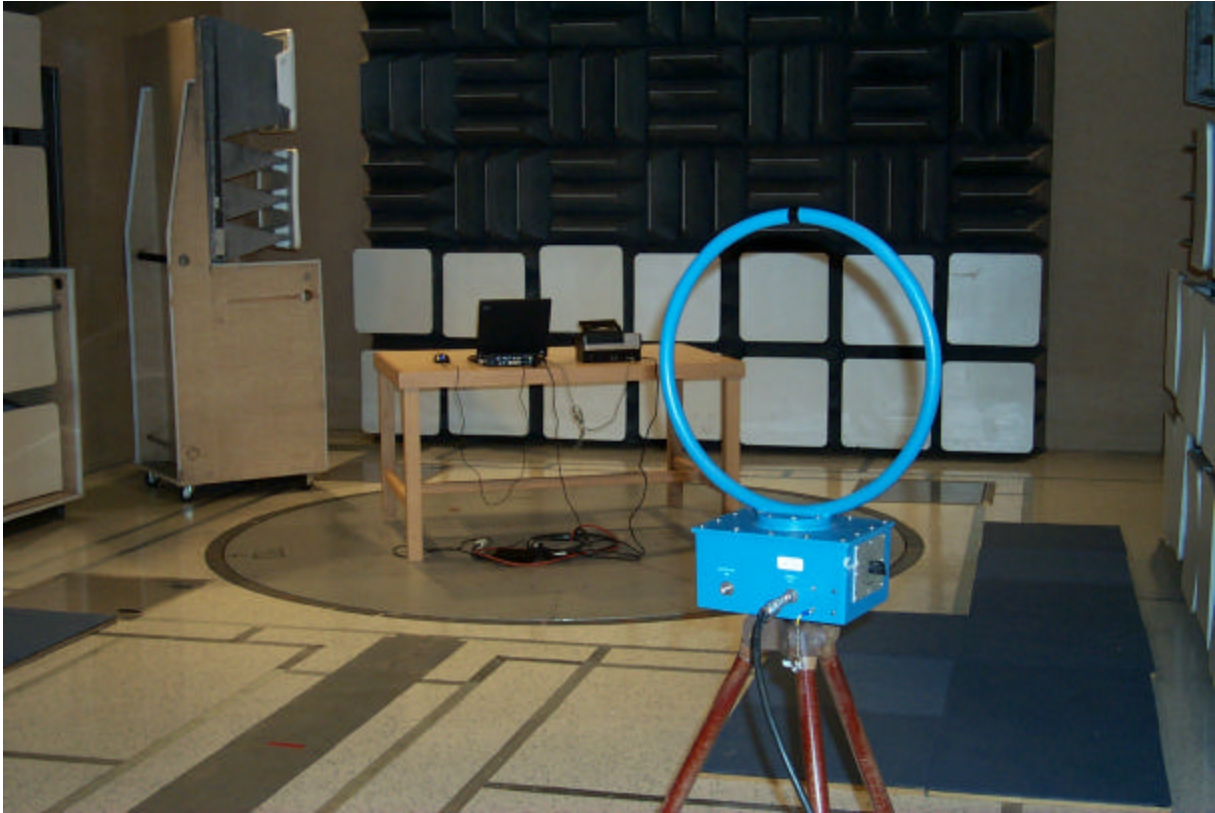

PV30 ACG 12 MHz to 30 MHz

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 21 of 31

5.4 Radiated Emissions (30 to 40000 MHz)

The EUT was placed in an anechoic chamber and the Spurious Emissions testing was performed in accordance with ANSI C63.4, FCC Part 15, Subpart B "Class A", and FCC Part 15, Subpart C. The Radiated Emission measurements were made to determine the level of electromagnetic energy radiated from the EUT.

5.4.1 Test Procedure

A measurement antenna was positioned at a distance of 3 meters from the center of the EUT. An EMI receiver was used for the emissions measurements in the range of 30 MHz to 5000 MHz (the upper limit of measurement is determined by Paragraph 15.33). Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis of these sweeps was made to determine which discrete frequencies were to be maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees) and varying antenna height between 1 and 4 meters at the angle of highest emissions levels found. Final measurements were taken utilizing quasi-peak detection (peak and average detectors were used above 1000 MHz). Measurement results were automatically calculated via software running the EMI receiver. The final measurements recorded were determined by the following formula:

Result (dB μ V/m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

5.4.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (m)	Field Strength (dB μ V/m)
30 to 88	10	29.54
88 to 216	10	33.06
216 to 960	10	35.56
960 to 40000	3	53.98 and 73.98

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 22 of 31

The FCC Part 15, Subpart B, "Class A" radiated limits are given below. The lower limit shall apply at the transition frequency.

Frequency (MHz)	Distance (m)	Field Strength (dB μ V/m)
30 to 88	10	39.08
88 to 216	10	43.52
216 to 960	10	46.44
960 to 1000	10	49.54
1000 to 40000	3	59.54 and 79.54*

* Per 15.35(B)

5.4.3 Test Results

The EUT met the FCC Part 15, Subpart C and the FCC Part 15, Subpart B, "Class A" Radiated Emissions (30 to 40000MHz.) requirements. All maximized quasi-peak measurements for the EUT were below the quasi-peak limits. There were no emissions above 5000 MHz. Emission scans are shown using the peak detector. The worst-case quasi-peak emission was as follows:

Subpart B

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Passing Margin (dB)	Turntable (degrees)	Antenna (Meters/Polarity)
480.261	39.20	46.44	7.24	200	1.0/V

Subpart C

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Passing Margin (dB)	Turntable (degrees)	Antenna (Meters/Polarity)
40.701	26.90	29.54	2.64	0	1.0/V

Subparts B and C (1000 MHz to 5000 MHz)

Frequency (MHz)	QP Level (dB μ V/m)	Avg Limit (dB μ V/m)	Passing Margin (dB)	Turntable (degrees)	Antenna (Meters/Polarity)
1036.74	50.00	53.98	3.98	0	1.0/H

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 23 of 31

RADIATED EMISSIONS



3 EMC Lab

TEST REPORT # F1106001 SHEET 1 OF 1
 EUT MODEL # PV30 EUT SERIAL # PV30B974
 DESCRIPTION Document Reader (with ACG RFID reader turned off – Class A limits)

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE (dBµV/m)	PASSING MARGIN (dB)	MAXIMIZED POSITION		REMARKS
	H/V	(dBµV/m)			TURNTABLE (degrees)	ANTENNA (meters)	
41.984	V	31.4	39.08	7.68	380	1.0	
47.485	V	26.2	39.08	12.88	0	1.0	
119.399	V	24.3	43.52	19.22	0	1.0	
166.353	V	29.8	43.52	13.72	180	1.0	
166.353	H	32.6	43.52	10.92	95	1.0	
200.300	H	22.5	43.52	21.02	280	1.0	
233.086	V	27.4	46.44	19.04	20	1.0	
233.086	H	27.7	46.44	18.74	80	1.0	
364.529	H	30.1	46.44	16.34	250	1.0	
480.261	V	39.2	46.44	7.24	200	1.0	
480.261	H	36.3	46.44	10.14	150	1.0	

Test Engineer: R. Heller Date: 11-14-2006

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 24 of 31

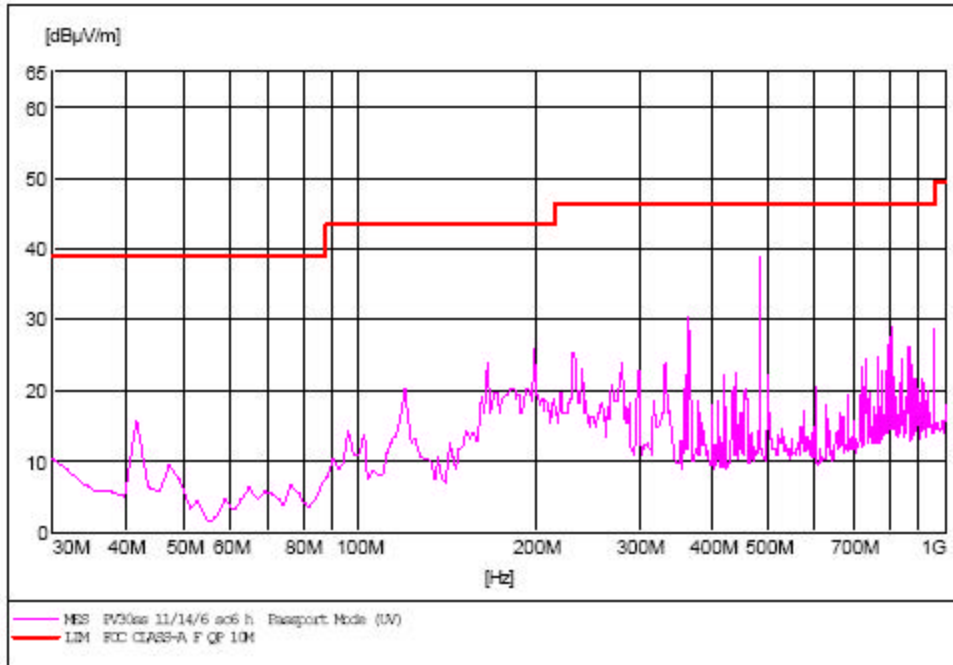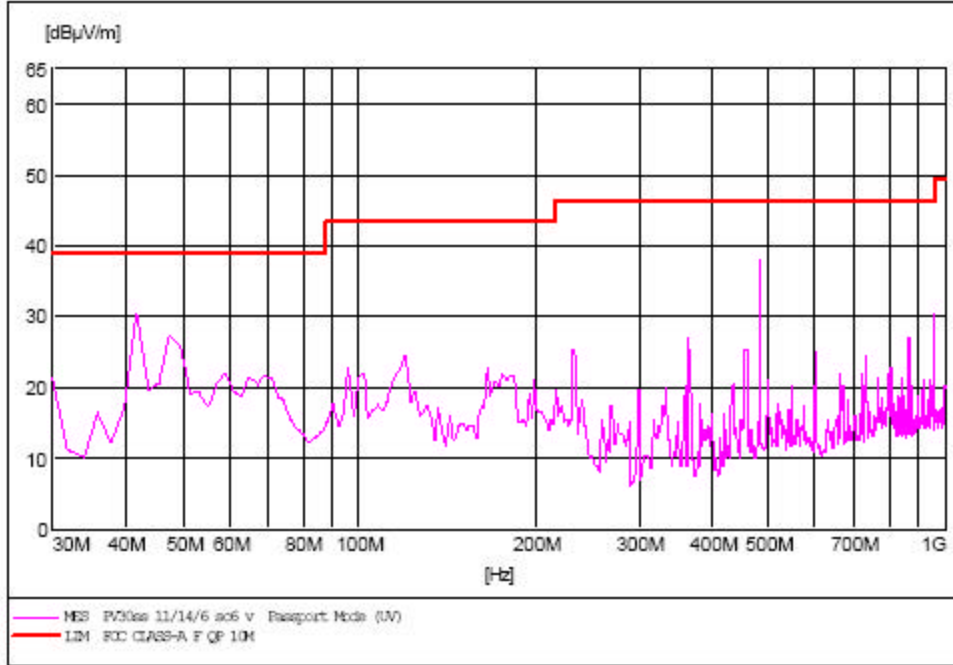

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 25 of 31

RADIATED EMISSIONS




TEST REPORT # F1106001 SHEET 1 OF 1
 EUT MODEL # PV30 EUT SERIAL # PV30B974
 DESCRIPTION Document Reader (with ACG RFID reader turned on – Part C limits)

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE (dBμV/m)	PASSING MARGIN (dB)	MAXIMIZED POSITION		REMARKS
	H/V	(dBμV/m)			TURNTABLE (degrees)	ANTENNA (meters)	
40.701	V	26.90	29.54	2.64	0	1.0	3 rd
148.018	H	3.10	33.06	29.96	0	1.0	11th
162.645	V	19.70	33.06	13.36	0	1.0	12th
176.273	H	29.00	33.06	4.06	0	1.0	13th
189.900	H	19.40	33.06	13.66	0	1.0	14th
203.527	H	13.60	33.06	19.46	0	1.0	15th
216.954	H	22.9	35.56	12.66	0	1.0	16th

Test Engineer: R. Heller Date: 11-14-2006

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 26 of 31

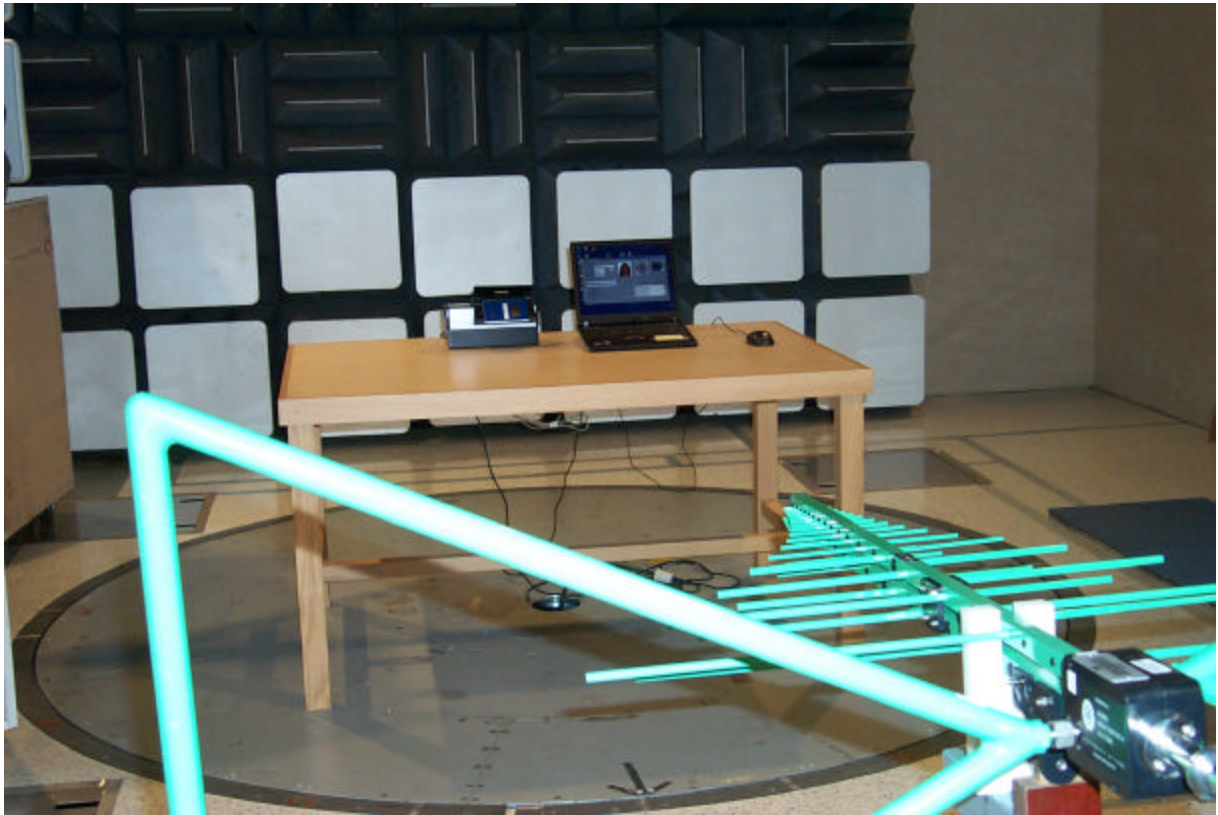

PV30 ACG 30 MHz to 1000 MHz

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 27 of 31

RADIATED EMISSIONS HIGH 1000 to 5000MHz



TEST REPORT # F1106001 SHEET 1 OF 1
 EUT MODEL # PV30 (Subparts B and C) EUT SERIAL # PV30B974
 DESCRIPTION Document Reader (with ACG RFID reader turned on)

FREQ. (MHz)	MAXIMIZED QP SIGNAL		AVG LIMIT LINE	PASSING MARGIN	MAXIMIZED POSITION		REMARKS
	H/V	(dBμV/m)	(dBμV/m)	(dB)	TURNTABLE (degrees)	ANTENNA (meters)	
1018.23	V	48.2	53.98	5.78	0	1.0	
1020.51	V	48.1	53.98	5.88	0	1.0	
1036.74	H	50.0	53.98	3.98	0	1.0	
1046.49	V	44.2	53.98	9.78	0	1.0	
1048.76	H	48.8	53.98	5.18	0	1.0	

Test Engineer: R. Heller Date: 11-14-2006

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 28 of 31



PV30 ACG 1000 MHz to 5000 MHz

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 29 of 31

6.0 LIST OF TEST EQUIPMENT

The following test equipment was used to perform the indicated tests. All of the test equipment was calibrated by an accredited calibration laboratory or by the manufacturer. All calibration intervals are one year. All equipment calibrations, test procedures, and the test facility are traceable to the standards of the National Institute of Standards and Technology (NIST). The test facility site attenuation verification results fall within the normalized site attenuation (NSA) criteria for open area test sites using volumetric measurements.

FREQUENCY STABILITY

Agilent Frequency Counter, Model 53131A, s/n MY40012264 (cal due date: 15 Sep 07)
Pacific Power Source, Model 140-TMX, s/n 838761 (cal not required)
EMCO Loop Probe, Model 7405-901, s/n none, (cal not required)
Environtronics Chamber, Model FLX900-2-6-wc-h, s/n 08046208 (cal date 4 Apr 07)

CONDUCTED EMISSIONS

EMCO LISN, Model 3825-2, Serial No. 1039 (cal due date: 12 Sep 07)
Solar High Pass Filter, Model 8131 - 5.0 (cal due date: 30 Jun 07)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 12 Sep 07)
Rohde & Schwarz ESIB 40 Firmware Version 4.32.3

RADIATED EMISSIONS

Schaffner Biconilog Antenna, Model CBL6112B, Serial No. 27491 (cal due date: 11 Sep 07)
HP Pre-Amplifier, Model 8447D, Serial No. 2944A08064 (cal due date: 12 Sep 07)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 12 Sep 07)
Rohde & Schwarz ESIB 40 Firmware Version 4.32.3

TEST FACILITY

Lindgren Semi-Anechoic Chamber, (verification due date: 29 Aug 07)

The radiated and conducted emission measurements were performed in our Anechoic Chamber located at 3M Building 76, 410 Fillmore Street, St. Paul, MN. Details concerning the site are on file with the FCC laboratory Division in Columbia Maryland. The FCC Facility Registration Number is 93334, 31-March – 2003.

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 30 of 31

7.0 LABELING INFORMATION

The FCC (Federal Communications Commission) requires the following labeling information. Since the equipment has intentional and unintentional radiators, it must be labeled as a digital device and as an intentional radiator.

Labels on the Product

The following statement shall be placed in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: DGFSSDPV30ACG

Labels in the Manuals

The following statements shall be placed in a prominent location in the text of the user manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide a reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC ID: DGFSSDPV30ACG

NO MODIFICATIONS. Modifications to this device shall not be made without the written consent of 3M Company. Unauthorized modifications may void the authority granted under Federal Communications Commission Rules permitting the operation of this device.

3	PV30	Report Number F1106001	3
EMC Laboratory	Product Safety	December 27, 2006	Page 31 of 31

Last page of the report.