

**FCC
Electromagnetic Compatibility
Test Report**

For

3M™ AT9000 Full Page Reader

FCC ID: DGFSSDPV40

IC: 458A-SSDPV40

3M™ Security Systems Division

St. Paul, MN

April 20, 2009

Report Number: F0209002

**Prepared By:
3M Regulatory Engineering and Quality
EMC Laboratory
410 Fillmore Avenue, Building 76
St. Paul, Minnesota 55144-1000**

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 2 of 46

CERTIFICATE OF COMPLIANCE

MANUFACTURER'S NAME:	3M™ Company
NAME OF EQUIPMENT:	3M™ AT9000 Full Page Reader
MODEL NUMBER:	PV40-02-17-00-03
FCC ID	DGFSSDPV40
IC	IC: 458A-SSDPV40
TEST REPORT NUMBER:	F0209002
DATE OF ISSUE:	April 20, 2009

**USA (FCC) - Title 47, Code of Federal Regulations (2007)
Industry Canada (IC) – ICES, RSS**

EMISSIONS:

Radiated / Conducted

**FCC Part 15, Subpart B, Class A
IC, ICES-003**

Radiated / Conducted


**FCC Part 15, Subpart C
IC, RSS-210, RSS-GEN**

RF Exposure

FCC - Exempt, IC - Complies with RSS-102

As the responsible EMC Project Engineer, I hereby declare that the equipment tested, as specified in the test report, at the 3M Product Safety EMC Laboratory is in compliance with 47 CFR, Part 15, Subpart B and Subpart C, and IC RSS & ICES Standards. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Bruce R. Jungwirth

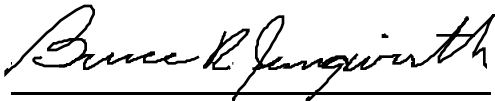

Bruce Jungwirth
Senior EMC Engineer





NVLAP Lab Code 200033

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 3 of 46

TABLE OF CONTENTS

	Title Page
	Certificate of Compliance
	Table of Contents
1.0	Test Summary
2.0	Introduction
2.1	Scope
2.2	EUT Description and Operation
2.3	Modifications to EUT
2.4	Measurement Uncertainty
3.0	Applicable Documents
4.0	Conducted Emissions
4.1	Test Procedure
4.2	Test Criteria
4.3	Test Results
4.4	Test Setup Photo
5.0	Radiated Emissions
5.1	Frequency Stability
5.1.1	Test Procedure
5.1.2	Test Criteria
5.1.3	Test Results
5.1.4	Test Setup Photo
5.2	Emissions Bandwidth
5.2.1	Test Procedure
5.2.2	Test Criteria
5.2.3	Test Results
5.2.4	Test Setup Photo
5.2.5	99% Occupied Bandwidth Test Procedure and Test Results
5.3	Spurious Emissions (9KHz to 30 MHz)
5.3.1	Test Procedure
5.3.2	Test Criteria
5.3.3	Test Results
5.3.4	Test Setup Photo
5.4	Spurious Emissions (30 MHz to 1000 MHz)
5.4.1	Test Procedure
5.4.2	Test Criteria
5.4.3	Test Results

	AT9000 Reader Model PV40	Report # F0209002	
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 4 of 46

5.5 Radiated Emissions (30 MHz - 40 GHz)

5.5.1 Test Procedure

5.5.2 Test Criteria

5.5.3 Test Results

5.5.4 Test Setup photo

5.6 Human Exposure (EMF)

5.6.1 Test Procedure

5.6.2 Test Criteria

5.6.3 Test Results

5.6.4 Test Setup Photo

6.0 List of Test Equipment



7.0 Labeling Information

8.0 Signatures

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 5 of 46

1.0 TEST SUMMARY

Test Report Number:	F0209002
Requester:	Stephen Bernard, 3M-AIT Canada
Company:	3M Company Security Systems Division Building 209 St. Paul, MN 55144
Telephone Number:	(613) 725-1485 x 1555
Test Dates:	March 19, 29,2009
Equipment Under Test:	3M™ AT9000 Full Page Reader, Model PV40-02-17-00-03
Date Of Receipt:	March 10, 2009
Condition upon receipt	Device was in good working condition
Test Environment:	See individual test sheets.
Test Results:	Passed the following tests: Conducted Emissions: FCC Part 15 Subpart B, ICES-003 Radiated Emissions: FCC Part 15 Subpart B, ICES-003 Conducted Emissions: FCC Part 15 Subpart C, IC RSS-210, RSS-Gen Radiated Emissions: FCC Part 15 Subpart C, IC RSS-210, RSS-Gen IC RSS-102
Modifications:	No modifications were required.
Test Location:	3M Product Safety EMC Laboratory Building 76-1-01 410 Fillmore Ave. St. Paul, MN 55144-1000

	AT9000 Reader Model PV40	Report # F0209002	
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 6 of 46

2.0 INTRODUCTION

2.1 Scope

This report contains results describing the conformance of the Equipment Under Test (EUT) to FCC Part 15, Subpart B, IC ICES-003 rules for unintentional radiators and FCC Part 15, Subpart C, IC RSS rules for intentional radiators.

This report is the confidential property of the client and applies only to the specific item tested under the stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. This report shall not be reproduced except in full without the written approval of the testing laboratory. The appropriate testing standards and references that were used are contained in Section 3.0. Worst case test data, test configuration, and photographs (worst case configuration) are provided in Sections 4.0 and 5.0. Equipment information is contained in Section 6.0. Documentation labeling information is contained in Section 7.0.

Subsequent tests are necessary from time to time on equipment taken at random from production. Retesting of the EUT is also required when the EMC profile has been changed or is suspected of being changed.

The 3M Regulatory Engineering and Quality EMC Laboratory is recognized under the United States Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC Guide 17025 and the relevant requirements of ISO 9002 (ANSI/ASQC Q92-1987) as suppliers of test results. Accreditation by the National Voluntary Laboratory Accreditation Program is awarded for specific services, listed on the Scope of Accreditation for: Electromagnetic Compatibility and Telecommunications FCC under Lab Code 200033. A complete copy of the Scope of Accreditation is available upon request.

The FCC Site Registration Number is 93334. The Industry Canada Site Registration Number is 458A-1.

The NVLAP accreditation or this test report does not in any way constitute or imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 7 of 46

2.2 EUT Description and Operation

The Equipment Under Test (EUT) was the 3M™ AT9000 Full Page Reader, Model PV40-02-17-00-03 . The reader optically scans passports, ID cards, and other travel documents, as well as reading contactless integrated circuit chips contained in travel documents. The reader reads ISO 14443 Type A and Type B ICs. The reader is intended to be used only in an indoor environment and has not been evaluated for other environmental conditions.

The reader has a transmit frequency of 13.5608 MHz and a measured power output level of 200 milliwatts (23 dBm) measured into a 50-ohm load. This maximum output is factory preset.

The reader contains 2 internal antennas. One antenna is located under the document glass and has an 161.12 square cm. The other antenna is positioned at the outer backside edge of the reader board and is located at the front bezel of the EUT and this (bezel) antenna has an area of 62.9 square cm. The bezel antenna is connected to the reader through board etches and the glass antenna is cabled to the reader via a short 4 pin ribbon cable. The two antennas are required to read the RFID chip when it is shielded for unauthorized readers.

All tests were made using an input of 120 V RMS, 60 Hz, and single-phase power. The EUT was tested while exercising all functions. The EUT was set to read tags and optically scan documents during testing.

2.3 Modifications to EUT

No modifications were required.

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 8 of 46

2.4 Measurement Uncertainty

The data and test results referenced in this report are true and accurate. However, there may be deviations within the calibration limits of the test equipment and facilities that can account for deviations. The following table lists the measurement uncertainty for the emissions testing. Furthermore, EUT component and manufacturing process variables may result in additional deviation.

Emission test	Confidence (95%)	Measurement Uncertainty	CISPR Limit
Radiated Emissions (30 MHz – 5000 MHz)	k=2.0	4.11 dB	5.20 dB
Conducted Emissions (150 kHz – 30 MHz)	k=2.0	3.29 dB	3.60 dB

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 9 of 46

3.0 APPLICABLE DOCUMENTS

The following documents were used as references. The dates that are referenced are the dates of the latest amendments. All 3M Test Procedures can be found in the Document Center of the SEMS QDS System.

CFR 47: 2007	Part 15 Radio Frequency Devices, Subpart B Unintentional Radiators and Subpart C, Intentional Radiators.	
CISPR 16-1	Specification for radio disturbance and immunity measuring apparatus and methods	
	-1 Measuring Apparatus	2003
	-2 Ancillary Equipment – Conducted Disturbance	2004
	-3 Ancillary Equipment – Disturbance Power	2004
	-4 Ancillary Equipment – Radiated Disturbance	2004
CISPR 16-2	Specification for radio disturbance and immunity measuring apparatus and methods	
	-1 Conducted Disturbance Measurements	2003
	-2 Measurements of Disturbance Power	2004
	-3 Radiated Disturbance Measurements	2003
CISPR 16-4	-1 Uncertainties in Standardized EMC Tests	2005
ANSI C63.4:2003	American National Standard for Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz.	
ICES-003	Industry Canada, Interference-Causing Equipment Standard, 2004 Issue 4	
RSS-GEN	Industry Canada, Radio Standards Specification Issue 2 2007	
RSS-210	Industry Canada, Radio Standards Specification Issue 7 2007	
RSS-102	Industry Canada, Radio Frequency Exposure Compliance, Issue 2 2005	
3M Test Procedure:	Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2:	
	Issue 1 – Released Effective – 08/09/2006	
3M Test Procedure:	Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY:	
	Issue 1 – Released Effective – 08/14/2006	
3M Test Procedure:	Conducted Emissions Test (150 kHz – 30 MHz), PBLI-6S8LR2: Issue 1 – Released Effective – 07/31/2006	
3M Test Procedure:	13.56 MHz RFID Emissions Test, PBLI-6WHLEM: Issue 1 Released Effective 12/18/2006	
3M Test Procedure:	99% Power Bandwidth Test, PBLI-7C9JVN: Issue 1 Released Effective 03/04/2008	

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 10 of 46

4.0 CONDUCTED EMISSIONS TESTING

Conducted emissions testing was performed in accordance with ANSI C63.4, FCC Part 15 and 3M Test Procedures: Conducted Emissions Test (150 kHz – 30 MHz), PBLI-6S8LR2 and 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. Conducted emissions tests were made to determine the level of electromagnetic noise that is conducted onto the power mains from the EUT.

4.1 Test Procedure:

A Line Impedance Stabilization Network (LISN) with 50Ω /50μH characteristic was used to isolate the EUT and give accurate and repeatable readings. An EMI test receiver was used for the emissions measurements in the range from 150 KHz to 30 MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Initial results were measured at discrete frequencies utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak and average measurements recorded were determined by the following: Result (dBμV) = receiver reading (μV) + LISN (dB) + cable loss (dB)

4.2 Test Criteria:

The FCC Part 15 Subpart C conducted limits are given below. The lower limit shall apply at the transition frequency.

Mains Terminal Disturbance Limits		
Frequency (MHz)	Quasi-Peak (dBμV)	Average (dBμV)
0.15 to 0.50	66 to 56 (decreasing with log of freq)	56 to 46 (decreasing with log of freq)
0.50 to 5.0	56	46
5.0 to 30.0	60	50

4.3 Test Results

The EUT met the conducted emission and discontinuous requirements. The worst-case quasi-peak emission was as follows:

Model PV40-02-17-00-03					
Frequency (MHz)	Limit (dBμV)	L1 (dBμV)	L2 (dBμV)	Passing Margin (dB)	
0.267	61.2	51.1	51.0	10.1	

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 11 of 46

--

Report Number	F0209002	Date	19 Mar, 2009
EUT Name	AT9000	EUT Power	120 VAC / 60 Hz
EUT Model	PV4-02-17-00-03	Test Std	FCC B
EUT Serial #	n/a	Temperature (°C)	24 °C
EUT Description	Full Page Reader	Humidity (%)	23 %
		Air Pressure (kPa)	100.5 kPa


File PV40 3/29/9 sc1 L1/L2

FREQUENCY (MHz)	PEAK (dBµV)		QUASI-PEAK (dBµV)				AVERAGE (dBµV)			
	L1 Line	L2 N	L1 Line	L2 N	Limit	Passing Margin	L1 Line	L2 N	Limit	Passing Margin
0.150	-	-	54.1	52.2	66.0	11.9	-	-	56.0	-
0.158	-	-	52.1	51.7	65.6	13.5	-	-	55.6	-
0.180	-	-	50.3	47.4	64.5	15.2	-	-	54.5	-
0.267	-	-	51.1	51.0	61.2	10.1	-	-	51.2	-
0.390	-	-	47.3	47.2	58.0	10.7	-	-	48.0	-
0.530	-	-	42.6	41.3	56.0	13.4	-	-	46.0	-

Test Engineer: Robert Heller	Date: 19 March, 2009
------------------------------	----------------------

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 12 of 46


PV40 L1

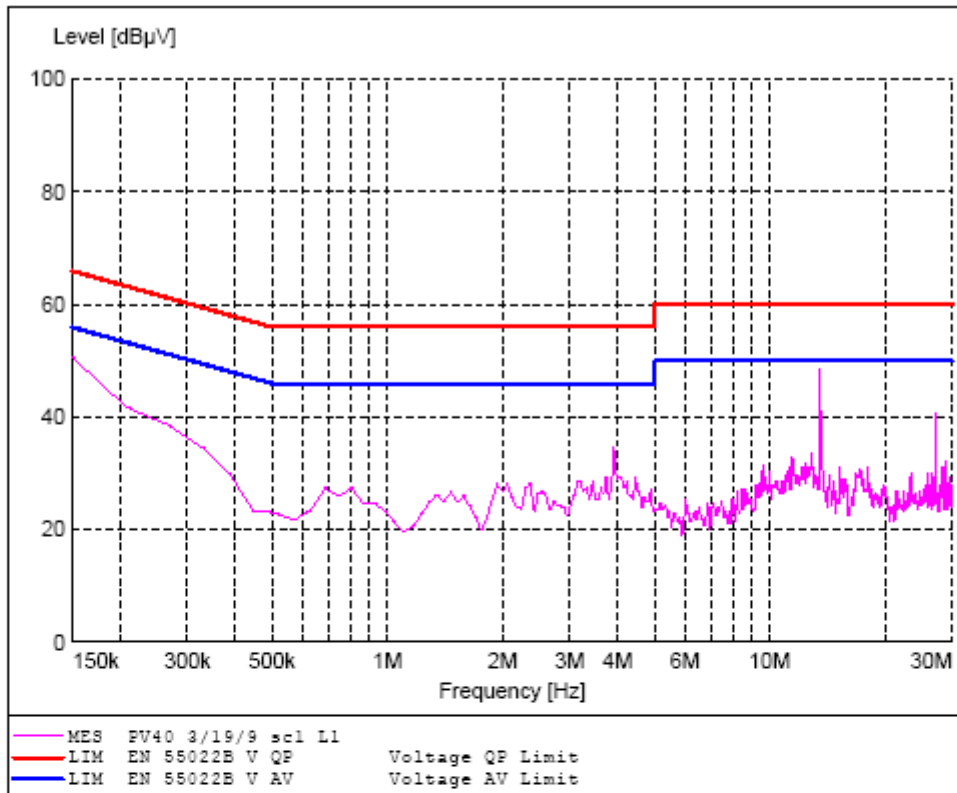

NOTE: Plots show Max Peak values only

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 13 of 46

PV40 L1

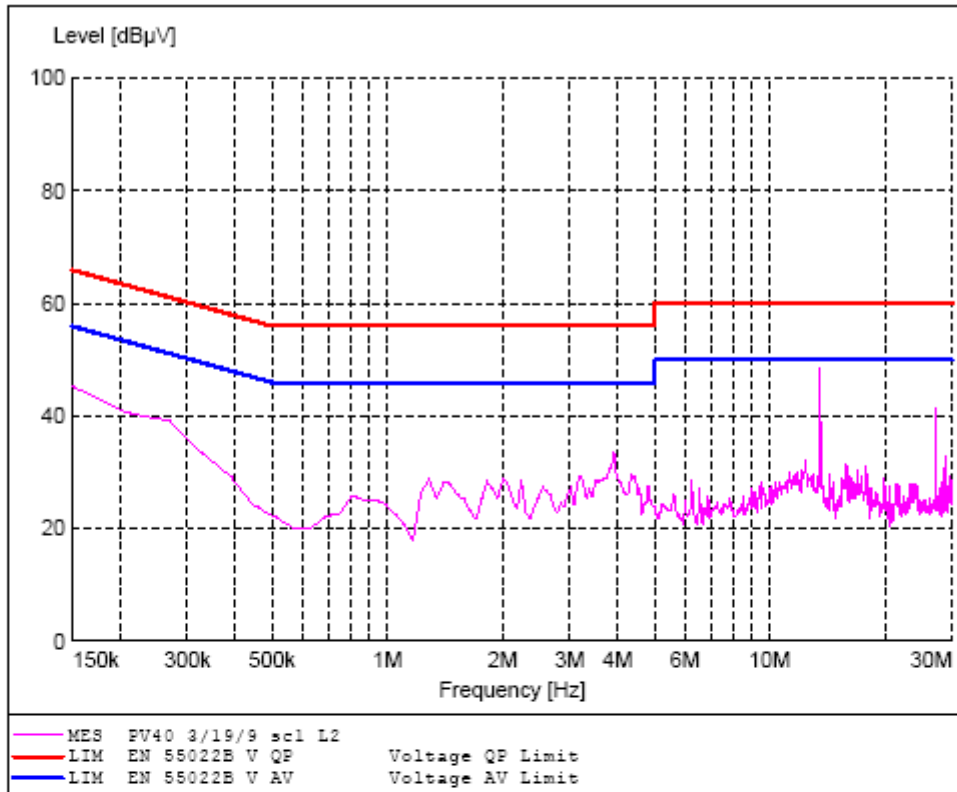

NOTE: Plots show Max Peak values only

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 14 of 46

4.4 Test Setup Photo



Conducted Emissions

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 15 of 46

5.0 Radiated Emissions Testing

The EUT was placed in an anechoic chamber and radiated emissions testing was performed in accordance with FCC Part 15.225 and 3M Test Procedures: Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2, Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY and 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. Radiated emissions measurements were made to determine the level of electromagnetic energy radiating from the EUT.

5.1 Frequency Stability

The Frequency Stability testing was performed in accordance with ANSI C63.4 and FCC Part 15.225 (e) to insure that the intentional radiator frequency stability was within the allowable limits for input power and temperature variations.

5.1.1 Test Procedure

The Frequency Stability was measured using the radiated signals from the EUT so that the measurement equipment would not load the radio frequency circuits. A spectrum analyzer was used for the frequency stability measurements. A close field probe was attached to the analyzer and placed near the antenna of the reader for measurement. The Reader was put into a transmit mode. 1) The frequency was measured while the input DC power to the Intentional Radiator (RFID Reader) was varied over the required input voltage range. 2) The frequency was also measured while the ambient air temperature was varied over the required ambient temperature range. Measurements are taken at startup, and 2, 5, and 10 minutes after startup.

5.1.2 Test Criteria

The FCC Part 15, Subpart C for Frequency Stability Limits versus Supply Voltage are given as:

Carrier Frequency (MHz)	Voltage Range % of Nominal Supply (85 % to 115 % at 20 C)	Max. Frequency Change (%)
13.56	102 to 138 V AC	+/- 0.01 %

The FCC Part 15, Subpart C for Frequency Stability Limits versus Temperature is given as:

Carrier Frequency (MHz)	Temperature Range (degrees C)	Max. Frequency Change (%)
13.56	-20 to +50	+/- 0.01 %

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 16 of 46

5.1.3 Test Results

The EUT met all FCC Part 15, Subpart C Frequency Stability requirements.

Worst Case Carrier Frequency Stability versus Supply Voltage			
Carrier Frequency (MHz)	Lowest Frequency (MHz)	Highest Frequency (MHz)	Max. Frequency Change (%)
13.5608	13.5595	13.5612	-0.000098 +0.00003

Worst Case Carrier Frequency Stability versus Temperature			
Carrier Frequency (MHz)	Lowest Frequency (MHz)	Highest Frequency (MHz)	Max. Frequency Change (%)
13.5608	13.5606	13.5608	-0.000015 +0.0

Measurement	Startup	2 Minutes	5 Minutes	10 Minutes
120 V (+20°C)	13.5608	13.5608	13.5608	13.5608
102 V (+20°C)	13.5595	13.5595	13.5595	13.5595
138 V (+20°C)	13.5612	13.5612	13.5612	13.5610
+50°C (120 V)	13.5608	13.5608	13.5608	13.5608
-20°C (120 V)	13.5606	13.5606	13.5606	13.5606

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 17 of 46

5.1.3 Test Setup Photo



Frequency Stability

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 18 of 46

5.2 Emission Bandwidth

The EUT was placed in a semi-anechoic chamber and the Emission Bandwidth testing was performed in accordance with ANSI C63.4, FCC Part 15.225 and 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM The Emission Bandwidth measurements were made to determine the intentional radiator frequency and determine the level of electromagnetic energy radiated at that frequency and at the band edges from the EUT.

5.2.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. The intentional radiator frequency and band edge frequencies utilizing quasi-peak detection were then maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak measurements recorded were determined by the following formula:

$$\text{Result (dB}\mu\text{V/m)} = \text{receiver level } (\mu\text{V)} + \text{antenna factor (dB/m)} + \text{cable loss (dB)} - \text{preamp gain (dB)} + \text{lineal conversion (dB)}.$$

5.2.2 Test Criteria

The FCC Part 15 Subpart C, Paragraph 15.225 Carrier Frequency Limits are given as:

Lower Band Edge: 13.553 MHz
Upper Band Edge: 13.567 MHz

The FCC Part 15, Subpart C radiated limits are given as:

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
1.705 to 13.110	10	48.62
13.110 to 13.410	10	59.58
13.410 to 13.553	10	69.55
13.553 to 13.567	10	103.00
13.567 to 13.710	10	69.55
13.710 to 14.010	10	59.58
14.010 to 30.000	10	48.62

Note: 40 dB/decade extrapolation factor was used per 15.31.

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 19 of 46

5.2.3 Test Results


The EUT met the FCC Part 15, Subpart C Emission Bandwidth requirements. The intentional radiator frequency was within the allowed band and all maximized quasi-peak measurements for the EUT were below the quasi-peak limits.

3M™ AT9000 Full Page Reader						
Freq. (MHz)	BW (kHz)	QP Level (dBμV/m)	QP Limit (dBμV/m)	Passing Margin (dB)	Turntable (degrees)	Antenna Orientation/Angle (Polarity/degrees)
13.5608 ¹	9	63.63	103.00	39.37	180	X + 20°
13.553 ²	1	15.12	69.60	54.48	180	X + 20°
13.567 ²	1	15.43	69.60	54.17	180	X + 20°
13.5485	9	39.19	69.60	30.41	180	X + 20°
13.5715	9	37.89	69.60	31.71	180	X + 20°
13.41 ²	1	2.28	59.60	57.32	180	X + 20°
13.71 ²	1	2.34	59.60	57.26	180	X + 20°
13.4055	9	19.72	59.60	39.88	180	X + 20°
13.7141	9	20.01	59.60	39.59	180	X + 20°
13.11 ²	1	1.47	48.60	47.13	180	X + 20°
14.01	1	0.90	48.60	47.70	180	X + 20°
13.1055	9	15.60	48.60	33.00	180	X + 20°
14.0145	9	14.79	48.60	33.81	180	X + 20°

1 - Intentional Radiator Frequency


2 - Band edges measured with a receiver bandwidth setting of 1 KHz. Per ANSI C63.4 Paragraph 13.1.7.

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 20 of 46

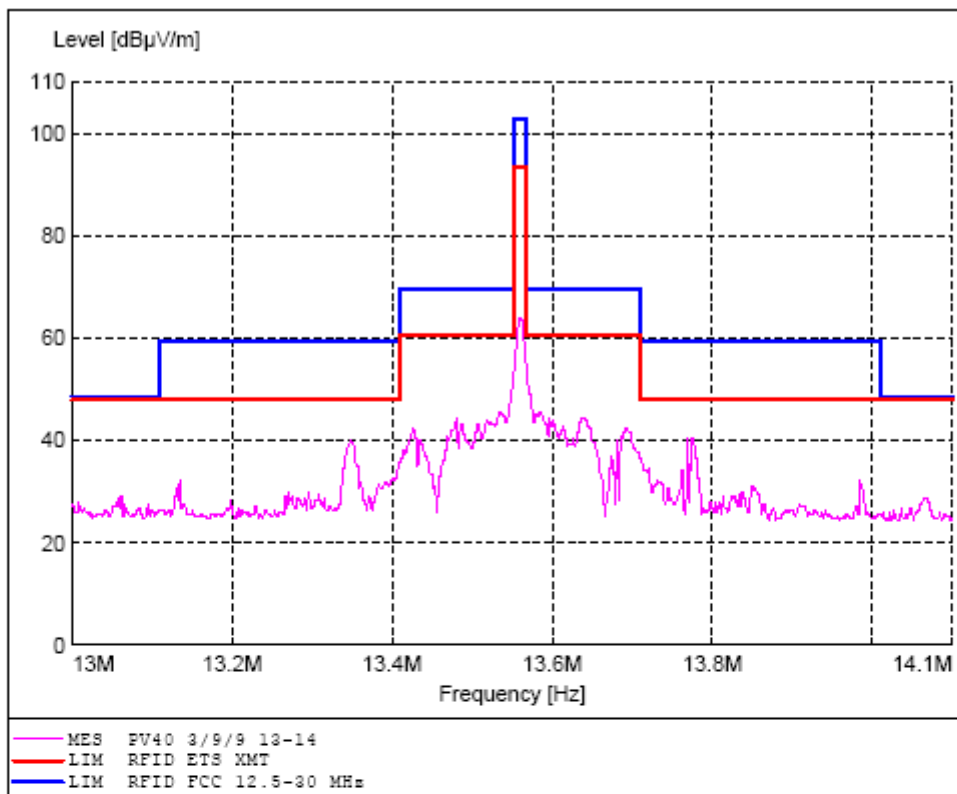

RF Carrier Output

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 21 of 46

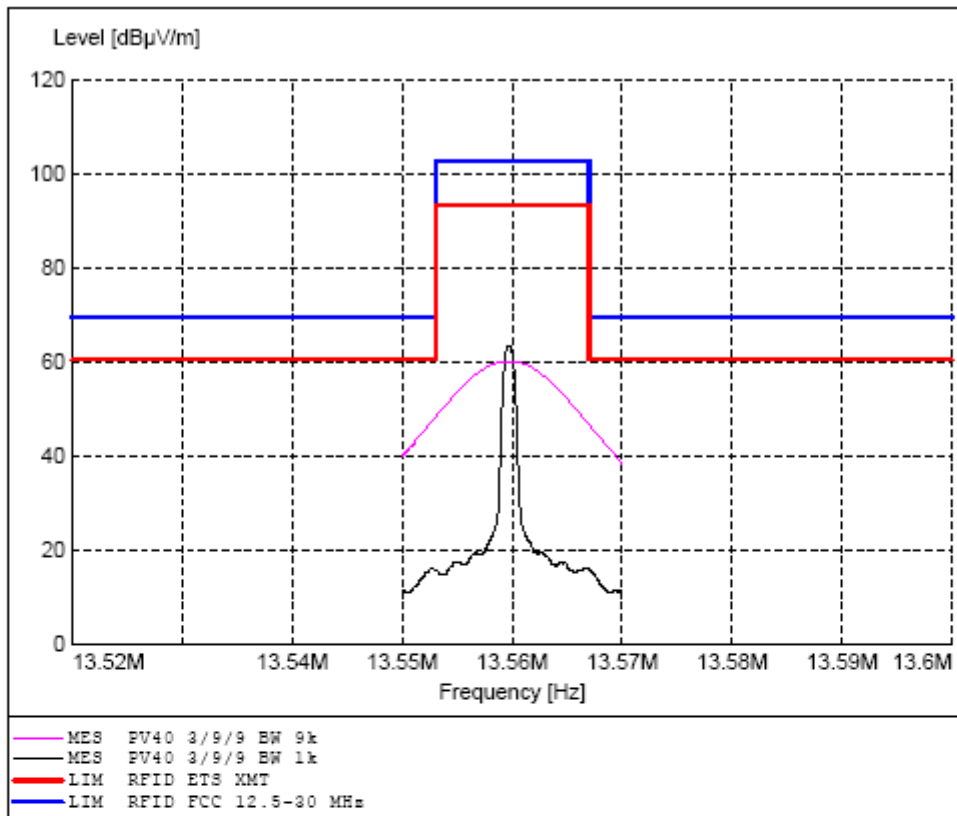

Violet 9 KHz BW QP Scan
 Black 1 KHz BW QP Scan

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 22 of 46

5.2.4 Test Setup Photo




Model AT9000 Full Page Reader
Carrier Frequency / Emissions Bandwidth / Spurious Emissions 9KHz to 30 MHz

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 23 of 46

5.2.5 Power Bandwidth Test Procedure (99%)

The EUT was placed in a shielded room and connected directly to the input of an EMI Receiver. The receiver was operated in the analyzer mode with a center frequency of 13.56 MHz. The transmitter was operated at its maximum carrier output with modulation applied under normal test conditions. The receiver's span and bandwidths were set in accordance with Industry Canada RSS-GEN (section 4.6.1). The receiver has an internal function that can be selected for the measurement of the 99% Bandwidth, and automatic placement of the markers. 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM contains the procedure for selecting the Bandwidth function and output of the result plot.

The EUT had a measured bandwidth of **66.733 kHz**.

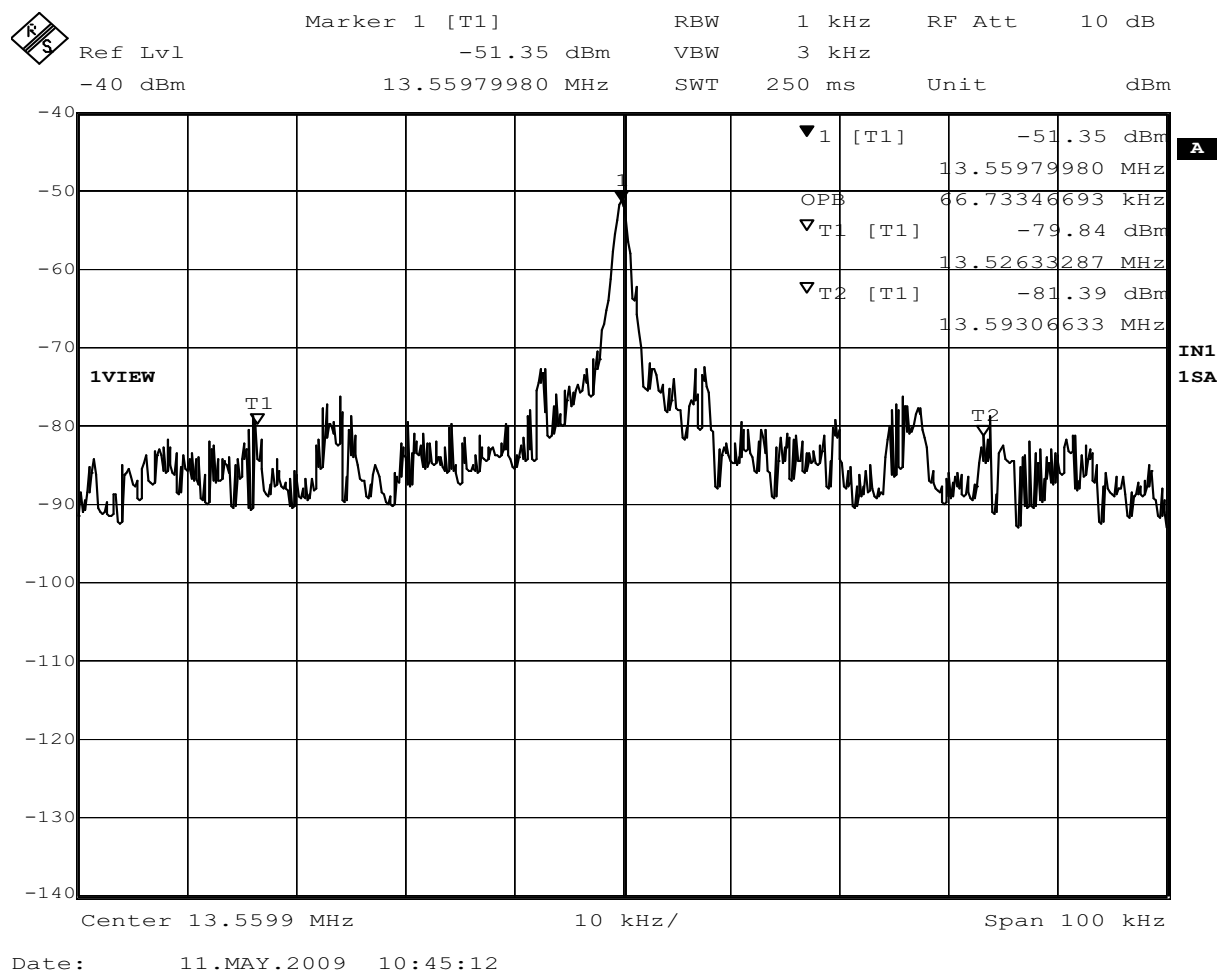

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 24 of 46

5.3 Spurious Emissions (12 kHz to 30 MHz.)

The EUT was placed in a semi-anechoic chamber and the Spurious Emissions testing was performed in accordance with ANSI C63.4, FCC Part 15, Subpart C and 3M Test Procedure: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM. The Spurious Emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT.

5.3.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis of these sweeps was used to determine which discrete frequencies, other than the intentional radiator frequency and band edge frequencies were to be maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Final measurements were taken utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final measurements recorded were determined by the following formula:

Result (dB μ V/m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

5.3.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
12.000 to 13.110	10	48.62
13.110 to 13.410	10	59.58
13.410 to 13.553	10	69.55
13.553 to 13.567	10	103.00
13.567 to 13.710	10	69.55
13.710 to 14.010	10	59.58
14.010 to 30.000	10	48.62

Note: A 40 dB/decade extrapolation factor was used per 15.31.


3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 25 of 46

5.3.3 Test Results

The EUT met the FCC Part 15, Subpart C Spurious Emissions (12 kHz to 30 MHz.) requirements. No measurable spurious emissions were detected below 12.5MHz. The worst-case emission was as follows:

3M™ AT9000 Full Page Reader			
Frequency (MHz)	Limit (dBμV)	Maximized QP Signal (dBμV)	Passing Margin (dB)
27.1198 ¹	48.0	26.8	21.2

1. 2nd Harmonic of Intentional Radiator

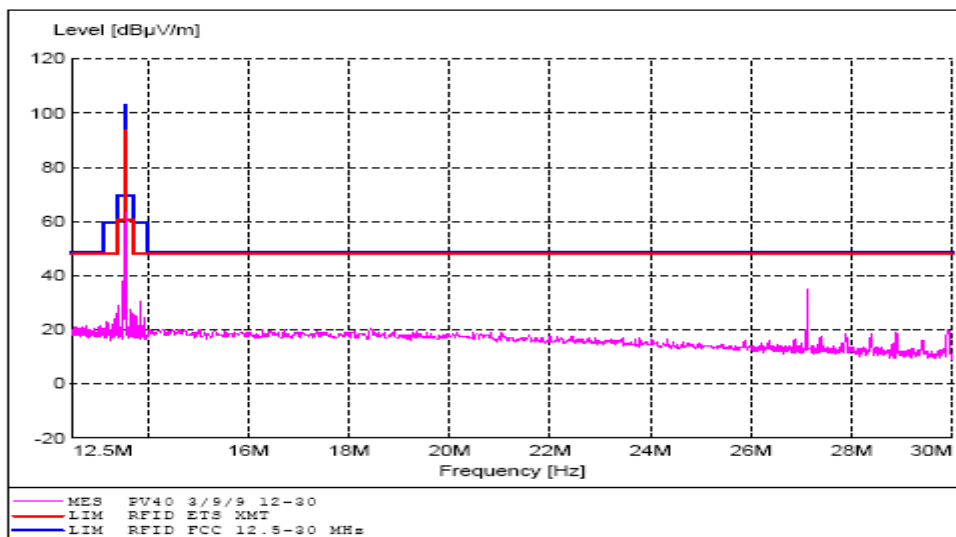

5.3.4 Test Setup Photo

See Section 5.2.4

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 26 of 46

5.4 Spurious Emissions (30 to 1000 MHz.)

The EUT was placed in a semi-anechoic chamber for spurious emissions testing in accordance with ANSI C63.4, FCC Part 15, Subpart C and 3M Test Procedures: 13.56 MHz RFID Emissions Test, PBLI-6WHLEM and Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2. The Spurious Emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT while in the transmit mode.

5.4.1 Test Procedure

The EUT was placed on a 0.80 meter high wooden table in the center of a turntable. An EMI receiver was used for the emissions measurements in the range of 30MHz to 1000MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Peak results were maximized at discrete frequencies utilizing quasi-peak detection. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling every 4 degrees) and varying the antenna height between 1 and 4 meters at the angles of the highest emissions levels found. Measurements were taken in both vertical and horizontal antenna polarization. The final measurements recorded were determined by the following formula:

Result (dB μ V /m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB)

5.4.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
30 - 88	10	29.54
88 - 216	10	33.06
216 - 960	10	35.56
960 and higher	10	43.52

5.4.3 Test Results

The EUT met the FCC Part 15, Subpart C Spurious Emissions (30 to 1000 MHz.) requirements.

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 27 of 46

Report Number	F0209002	Date	19 March 2009
EUT Name	AT9000	EUT Power	120 VAC / 60 Hz
EUT Model	PV40-02-17-00-03	Test Std	FCC Class B
EUT Serial #	n/a	Temperature (°C)	23 °C
EUT Description	Full Page Reader	Humidity (%)	24 %
		Air Pressure (kPa)	99.4 kPa


PV40 3/19/9 sc5 v/h

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE	PASSING MARGIN	MAXIMIZED POSITION		REMARKS
	H/V	dBµV	dBµV	dBµV	TURNTABLE (°)	ANTENNA (M)	
30.00	V	17.70	29.54	11.84	0	1.0	
40.66	V	21.50	29.54	8.04	265	1.0	3rd Harmonic
48.10	V	17.8	29.54	11.74	315	1.0	
54.28	V	27.7	29.54	1.84	0	1.0	4 TH Harmonic
143.92	V	25.8	33.06	7.26	295	1.0	
240.02	H	31.5	35.56	4.06	90	1.0	
480.17	H	30.7	35.56	4.86	140	1.0	
672.42	V	19.1	35.56	16.46	0	1.0	
815.98	H	34.4	35.56	1.16	180	1.0	
817.27	V	17.4	35.56	18.16	220	1.0	
911.98	H	34.5	35.56	1.06	300	1.0	worst case
960.72	V	11.2	43.52	32.32	0	1.0	
960.72	H	24.8	43.52	18.72	0	1.0	

* - All readings have the correction factors applied.


Test Engineer: Robert Heller	Date: 19 March 2009
------------------------------	---------------------

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 28 of 46

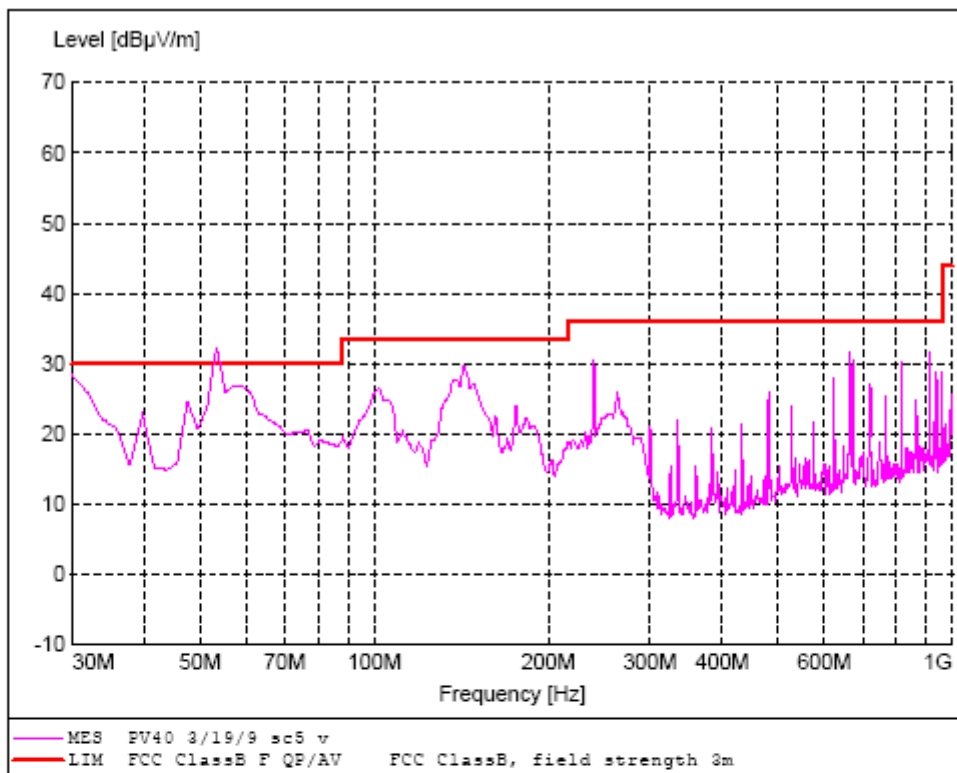

AT9000 Spurious Emissions Vertical (RFID on) (peak detector scan)

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 29 of 46

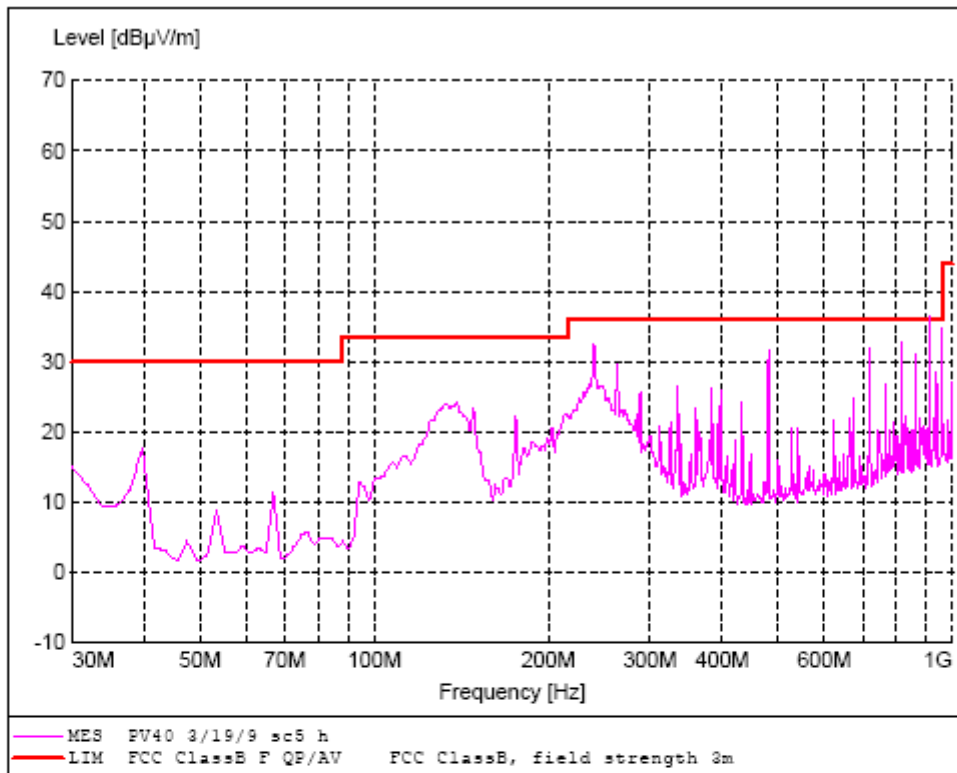

AT9000 Spurious Emissions Horizontal (RFID on) (peak detector scan)

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 30 of 46

5.4.4 Test Setup Photo



Spurious Emissions above 30 MHz

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 31 of 46

5.5 Digital Radiated Emissions (30 MHz - 5000 MHz)

The EUT was placed in an anechoic chamber and radiated emissions testing was performed in accordance with ANSI C63.4, FCC Part 15 and 3M Test Procedures: Radiated Emissions Test (30 MHz – 1 GHz), PBLI-6SHLK2, and Radiated Emissions Test (1 GHz – 5 GHz), PBLI-6SNHFY. Radiated emissions measurements were made to determine the level of electromagnetic energy radiating from the EUT.

5.5.1 Test Procedure

The EUT was placed on a 0.80 meter high wooden table in the center of a turntable. An EMI receiver was used for the emissions measurements in the range of 30MHz to 40GHz (the upper limit of measurement is determined by the 5th harmonic of the highest frequency generated in the device or 40 GHz whichever is lower). Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Peak results were maximized at discrete frequencies utilizing quasi-peak detection. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling every 4 degrees) and varying the antenna height between 1 and 4 meters at the angles of the highest emissions levels found. Measurements were taken in both vertical and horizontal antenna polarization. The final quasi-peak measurements recorded were determined by the following (the detector used above 1000 MHz is both average and peak):

Result (dB μ V /m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB)

5.5.2 Test Criteria

The FCC Class 'A' radiated limits are given below. The lower limit shall apply at the transition frequency.

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
30 - 88	10	39.08
88 - 216	10	43.52
216 - 960	10	46.44
960 - 1000	10	49.54
1000 – 40000	10	49.54 AVG 69.54 PEAK

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 32 of 46

5.5.3 Test Results

The EUT met the FCC Class 'A' radiated emission requirements. The upper Limit of testing was 5000 MHz. All maximized quasi-peak measurements for the EUT were below the quasi-peak limit.

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 33 of 46

Report Number	F0209002	Date	19 March 2009
EUT Name	AT9000	EUT Power	120 VAC / 60 Hz
EUT Model	PV40-02-17-00-03	Test Std	FCC Class A
EUT Serial #	n/a	Temperature (°C)	23 °C
EUT Description	Full Page Reader	Humidity (%)	24 %
		Air Pressure (kPa)	99.4 kPa


PV40 3/19/9 sc4 v/h

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE	PASSING MARGIN	MAXIMIZED POSITION		REMARKS
	H/V	dBµV	dBµV	dBµV	TURNTABLE (°)	ANTENNA (M)	
30.00	V	17.7	39.08	21.38	0	1.0	
48.10	V	17.8	39.08	21.28	315	1.0	
143.92	V	25.8	43.52	17.72	295	1.0	
240.02	H	31.5	46.44	14.94	90	1.0	
480.17	H	30.7	46.44	15.74	140	1.0	
672.42	V	19.1	46.44	27.34	0	1.0	
815.98	H	34.4	46.44	12.04	180	1.0	worst case
817.27	V	17.4	46.44	29.04	220	1.0	
911.98	H	34.5	46.44	11.94	300	1.0	
960.72	V	11.2	49.54	38.34	0	1.0	
960.72	H	24.8	49.54	24.74	0	1.0	

* - All readings have the correction factors applied.


Test Engineer: Robert Heller	Date: 19 March 2009
------------------------------	---------------------

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 34 of 46

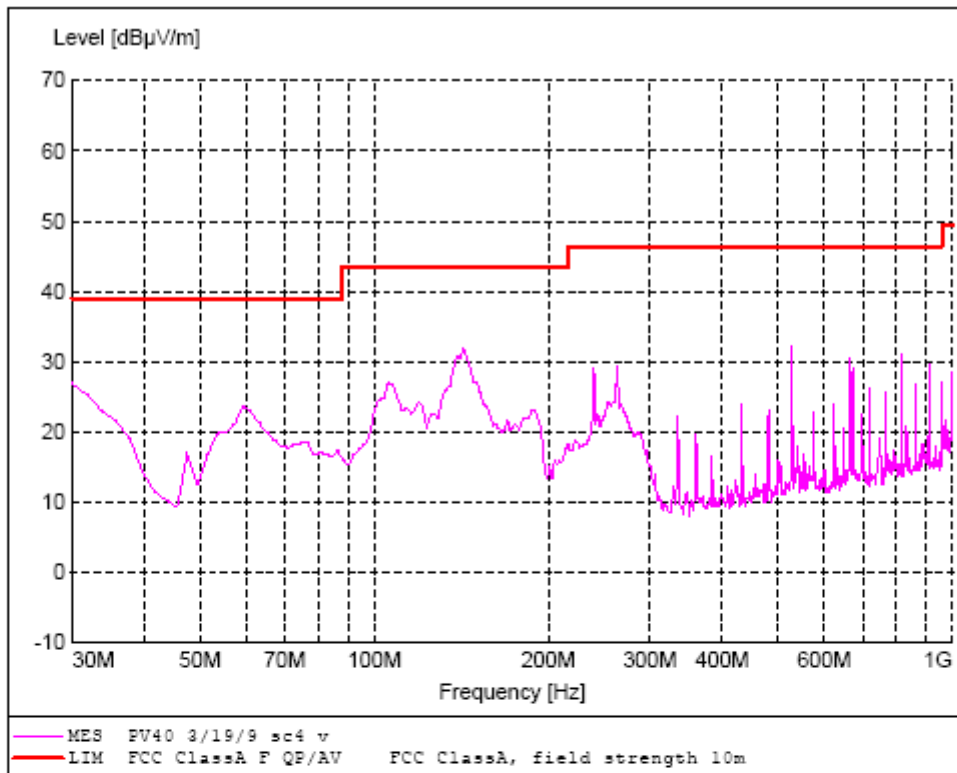

AT9000 Full Page Reader (Digital) (RFID off) vertical (peak detector scan)

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 35 of 46

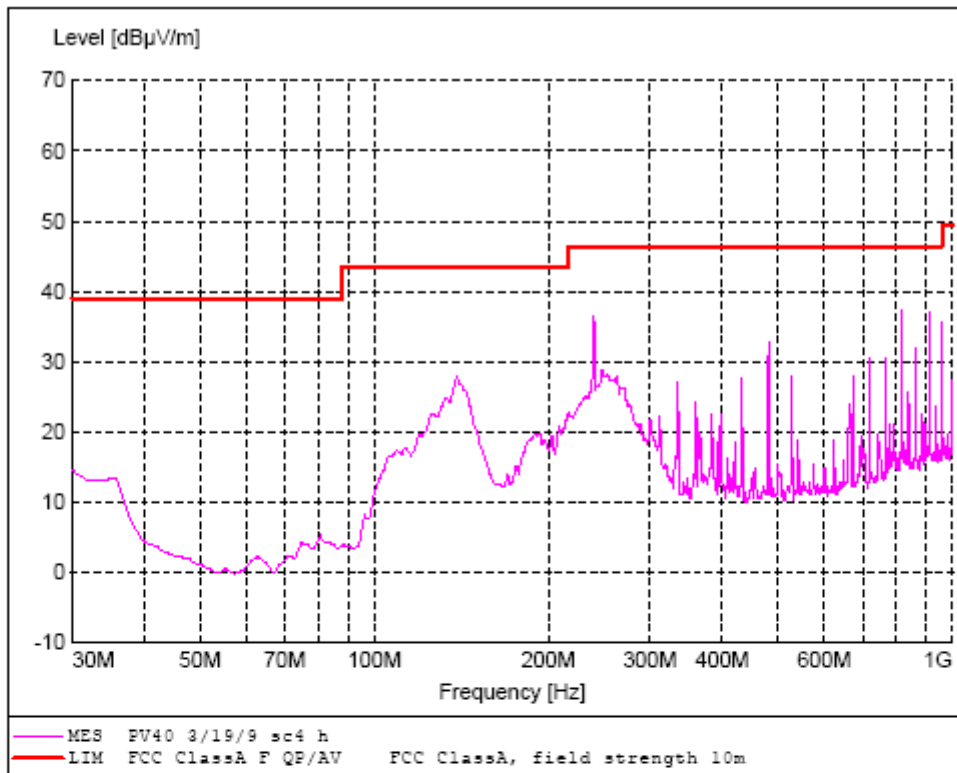

AT9000 Full Page Reader (Digital) (RFID off) horizontal (peak detector scan)

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 36 of 46


Report Number	F0209002	Date	29 March 2009
EUT Name	AT9000	EUT Power	120 VAC / 60 Hz
EUT Model	PV40-02-17-00-03	Test Std	FCC Class A
EUT Serial #	n/a	Temperature (°C)	23 °C
EUT Description	Full Page Reader	Humidity (%)	24 %
		Air Pressure (kPa)	99.4 kPa

PV40 3/19/9 hi sc1 v/h

FREQ. (GHz)	MAXIMIZED AVG SIGNAL		LIMIT LINE	MAXIMIZED PEAK SIGNAL		LIMIT LINE	TURN TABLE	ANTENNA HEIGHT
	H/V	(dBµV/m)	(dBµV/m)	H/V	(dBµV/m)	(dBµV/m)	(degrees)	(m)
1.170	V	24.7	49.54	V	39.8	69.54	0	1.0
1.217	V	24.2	49.54	V	38.7	69.54	0	1.0
1.243	H	23.1	49.54	H	40.2	69.54	0	1.0
1.477	V	22.4	49.54	V	40.4	69.54	0	1.0
1.486	H	35.7	49.54	H	45.1	69.54	0	1.0
1.525	V	22.5	49.54	V	38.3	69.54	0	1.0


Test Engineer: Robert Heller	Date: 29 March 2009
------------------------------	---------------------

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 37 of 46

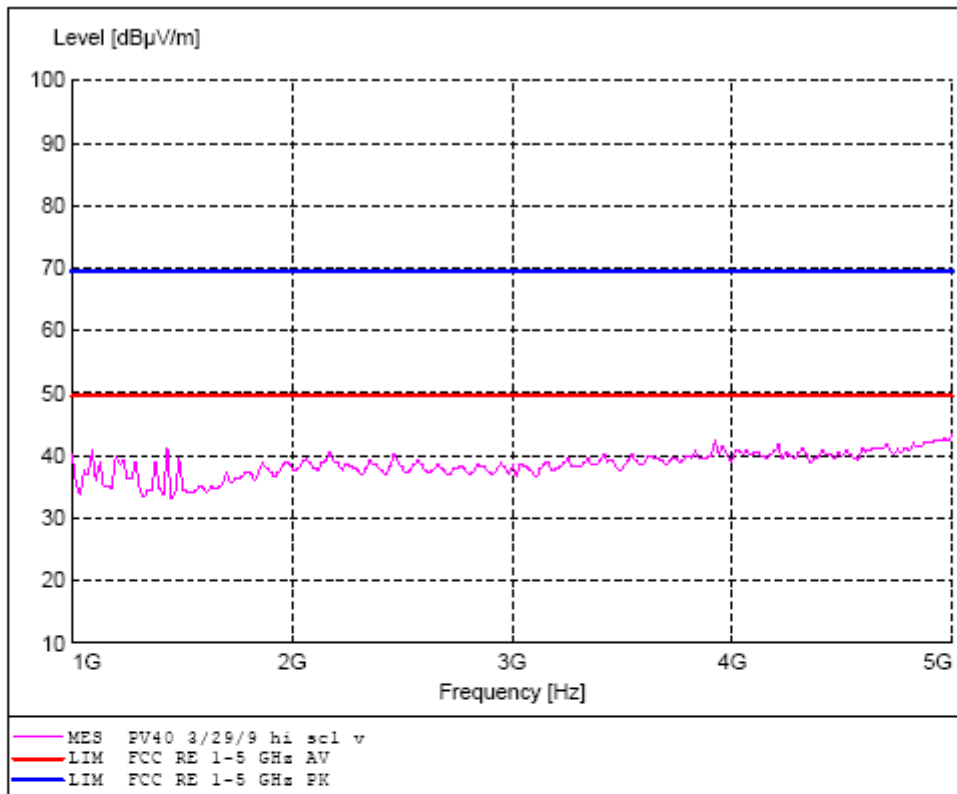

AT9000 Radiated Emissions > 1 GHz vert

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 38 of 46

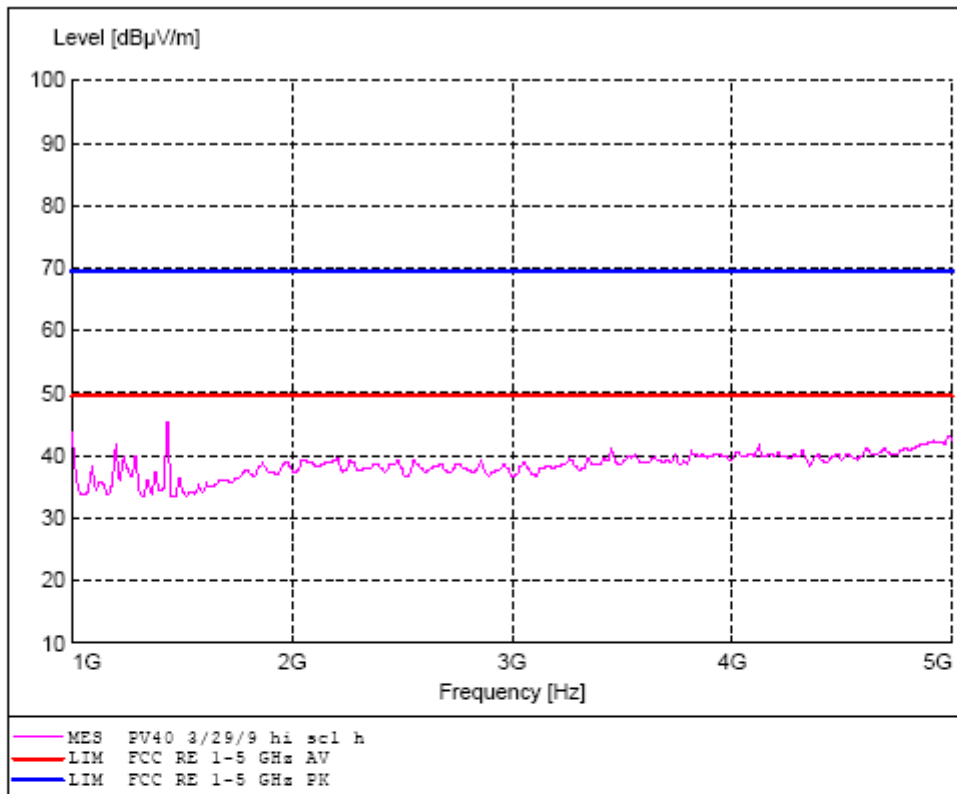

AT9000 Radiated Emissions > 1 GHz hori

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 39 of 46

5.5.4 Test Setup Photo



Radiated Emissions 1 to 5 GHz

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 40 of 46

5.6 Human Exposure (EMF)

This procedure is for the evaluation of human exposure to electromagnetic fields (EMF) from devices containing RFID. The testing is in accordance with RSS-102 and 3M Test Procedure: EMF Test w/EMR-300, PBLI-7FAM2G.

5.6.1 Test Procedure

The EUT was setup in a shielded room and measurements were made of both the electric and magnetic fields at 13.56 MHz at a distance of 20 cm around the equipment using EMF exposure meters.

4.10.2 Performance Criteria

For general public exposure, the results shall be compared with the exposure limits 4.2 of RSS-102. For 13.56 MHz, the limits are as follows:

Freq Range	V/m	A/m	W/m ²	EUT Power
10-30 MHz	28.0	0.162	-	200 mw

4.10.3 Test Results

The EUT met the general public exposure criteria for both the electric field and the magnetic field.

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 41 of 46

Report Number	0209002	Date	March 23, 2009
EUT Name	AT9000	EUT Power	230 VAC / 50 Hz
EUT Model	PV40-02-17-00-03	Test Std	RSS-102
EUT Serial #	n/a	Temperature (°C)	22 °C
EUT Description	Full Page Reader (with RFID)	Humidity (%)	25 %
		Air Pressure (kPa)	100.8 kPa

Test Position (area of highest reading)	Frequency (MHz)	Distance (cm)	Measurement	Limit	Margin
Directly above read area	13.56	20	0.047 A/m	0.162 A/m	.115 A/m
In front of unit	13.56	20	1.29 V/m	28 V/m	26.71 V/m


Test Engineer: Bruce Jungwirth	Date: March 23, 2009
--------------------------------	----------------------

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 42 of 46

4.10.4 Test Setup Photo



H-Field Measurement

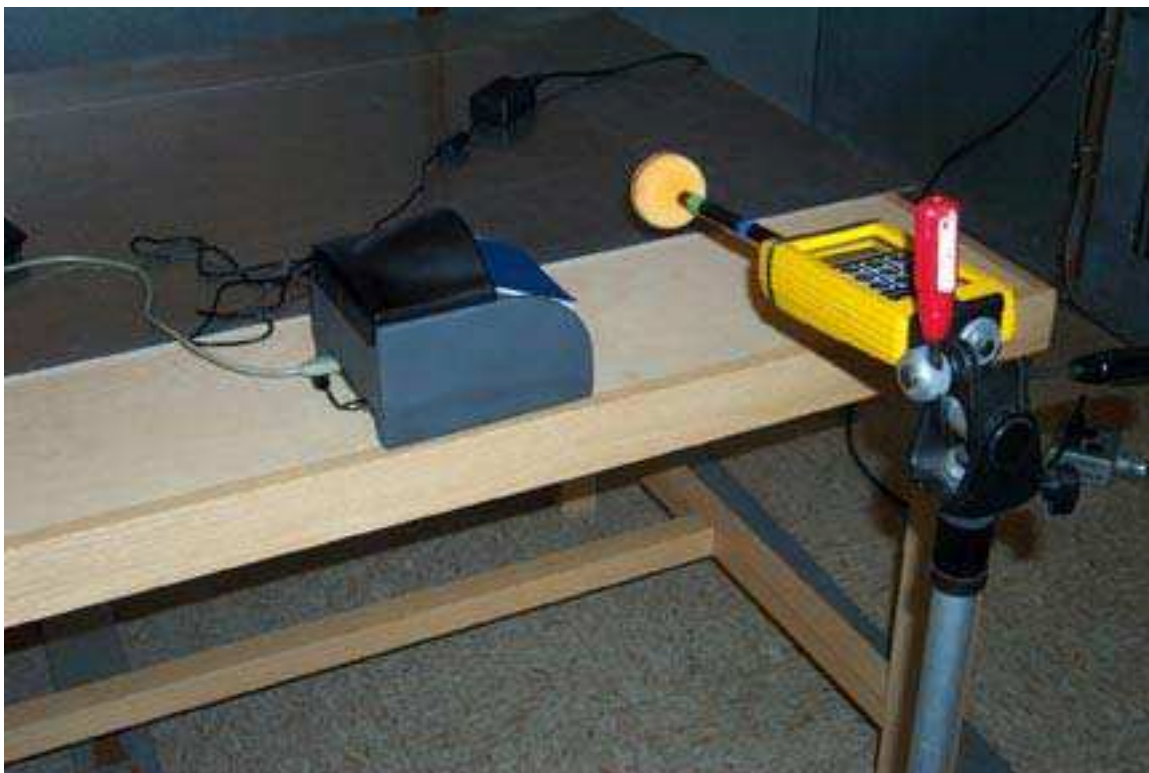

E-Field Measurement

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 43 of 46

6.0 LIST OF TEST EQUIPMENT

The following test equipment was used to perform the indicated tests. All test equipment was calibrated by an accredited calibration laboratory or by the manufacturer. All calibration intervals are one year. All equipment calibrations, test procedures, and test facility are traceable to the standards of the National Institute of Standards and Technology (NIST). The test facility site attenuation verification results fall within the normalized site attenuation (NSA) criteria for open area test sites using volumetric measurements.

RADIATED EMISSIONS

Electro Metrics Large Loop Antenna, Model ALR25M, Serial No. 603 (cal due date: 20 Oct 09)
Schaffner Biconilog Antenna, Model CBL6112B, Serial No. 27491 (cal due date: 21 Oct 09)
A. H Systems Horn Antenna, Model SAS_200/571 Serial No: 234 (cal due date: 22 Oct 09)
HP Pre-Amplifier, Model 8447D, Serial No. 1937A03090 (cal due date: 21 Oct 09)
HP Pre-Amplifier, Model 83017A, Serial No. 3123A00259 (cal due date: 20 Oct 09)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 09)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

CONDUCTED EMISSIONS

EMCO LISN, Model 3825-2, Serial No. 1039 (cal due date: 20 Oct 09)
Solar High Pass Filter, Model 8131 - 5.0 (cal due date: 30 Aug 09)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 09)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

FREQUENCY STABILITY / POWER OUTPUT

R&S Spectrum Analyzer ESCS30, Serial No. 232702 (cal due date: 10 Oct 09)
HP Spectrum Analyzer Model 8591A, Serial No. 3108A02041 (cal due date: 9 Oct 09)
Envirotronics Environ. Chamber, EH16-1-1.5AC, SN:10066639 (cal due date: 1 Nov 09)

OCCUPIED BANDWIDTH

Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 23 Oct 09)
Rohde & Schwarz ESIB 40 Firmware Version 4.34.3

EMF MEASUREMENT

Narda EMR 300 Exposure Meter, Model 2244/31 (cal due date: 15 Jan 10)
Narda Type 8 E-Probe, s/n BG0030 (cal due date: 13 Jan 10)
Narda Type 12 H-Probe, s/n AE0020 (cal due date: 13 Jan 10)

TEST FACILITY

Lindgren Semi-Anechoic Chamber, (verification due date: 30 Aug 09)
FCC Site Registration Number: 93334
Canadian Site Registration Number: 458A-1

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 44 of 46

7.0 LABELING INFORMATION

The following labeling information is required by the FCC (Federal Communications Commission) and IC (Industry Canada) for Class A digital devices. Since the equipment contains both intentional and unintentional radiators, it must be labeled as a digital device and as an intentional radiator.

Labels on the Product

The following statements shall be placed in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**FCC ID: DGFSSDPV40
IC ID: 458A-SSDPV40**

"This Class A digital apparatus complies with Canadian ICES-003."

"Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada."

Statements in the Manuals

The following statement shall be placed in a prominent location in the text of the user manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide a reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

FCC ID: DGFSSDPV40

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 45 of 46

NO MODIFICATIONS. Modifications to this device shall not be made without the written consent of 3M, Company. Unauthorized modifications may void the authority granted under Federal Communications Commission and Industry Canada Rules permitting the operation of this device.

"This Class A digital apparatus complies with Canadian ICES-003."

"Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada."


IC ID: 458A-SSDPV40

3M	AT9000 Reader Model PV40	Report # F0209002	3M
EMC Laboratory	Reg. Eng. And Quality	April 20, 2009	Page 46 of 46


8.0 REPORT SIGNATURES

This page contains the secured digital signatures of the parties responsible for reviewing and approving the contents of this report:

Bruce R. Jungwirth

APPROVER:  DATE: 20 Apr 2009
Bruce Jungwirth

Robert E. Heller

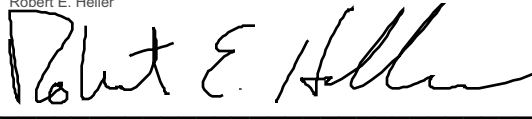TEST ENGINEER:  DATE: 20 Apr 2009
Robert E. Heller

This is the last page of the Test Report