

EMC TEST REPORT



NVLAP Lab Code 200033-0

Standard(s):


47 CFR FCC Part 15.225
FCC Parts 15.107 and 15.109
RSS 210, Issue 8, 2010
ICES 003, Issue 5, 2012

FCC ID: DGFTSSD5400
IC: 458F-TSSD5400

Product: 3M™ Double-Sided ID1 Reader
Model: CR5400
3M Division: TSSD

Report Number: RE1501030-3
Report Issue Date: April 8, 2015

Report Prepared By:

Signature: 

Yuriy Litvinov
Lead EMC Engineer

Tested By:
3M EMC Laboratory
410 E. Fillmore Avenue, Building 76-01-1
St. Paul, Minnesota 55107-1000

This report is the confidential property for the exclusive internal use of 3M Company and applies only to the specific item tested under the stated test conditions. This test report shall not be reproduced except in full, without written approval of the 3M EMC laboratory. Any changes impacting the attributes, functionality or operational characteristics documented in this report shall be communicated to the body responsible for approving (certifying) the subject equipment.

**TABLE OF CONTENTS**

Item	Description	Page
1.0	Test Summary	3
1.1	Measurement Uncertainty	3
2.0	Equipment Description	4
2.1	Equipment Under Test	4
3.0	EUT Configuration	5
3.1	Support Equipment	5
3.2	Input/output Ports	5
3.3	Operating Condition of EUT	5
3.4	Exercising of EUT	5
4.0	Test Conditions and Results	6
4.1	Conducted Emissions	6
4.2	Radiated Emissions outside of the specified band	10
4.3	20dB Bandwidth	13
4.4	Field Strength of Fundamental	15
4.5	Frequency Stability	18
5.0	Test Equipment	21
6.0	Revision History	21
	Certificate of Conformity	22



1.0 Test Summary

Based on the results of our investigation, we have concluded the product tested complies with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

No	Standard	Test Requirements	Result	Comments
4.1	15.107/15.207/RSS-Gen	Conducted Emissions	pass	
4.2	15.225(d)/15.209 RSS210	Radiated Emissions outside of the specified band	pass	
4.3	2.1049/RSS Gen	20dB Bandwidth	pass	
4.4	15.225(a)(b)(c)/RSS210	Field Strength of Fundamental	pass	
4.5	15.225(e)/RSS210	Frequency Stability	pass	

Note:

1.1 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements. The measurement uncertainty figures were calculated and correspond to a coverage factor of $k=2$, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Radiated emissions	5.20 dB
Conducted emissions	3.60 dB
Harmonics and Flicker	3.32 dB



2.0 Equipment Description

2.1	Equipment Under Test	
Description:	The 3M CR5400 Double-sided ID1 Reader inspects and images government issued identity documents ID1 sized (85 x 54mm) in a variety of market segments like Retail, Financial and Hospitality.	
Model(s):	CR5400	
Serial number:	N/A	
Client Contact:	Stephen P. Bernard	
Phone:	613 722 2070 ext 1755	
3M Division:	TSSD	
Modifications:	n/a	
Frequency Range (MHz) :	13.56MHz	<input type="checkbox"/>
Modulation Type:	ASK	<input type="checkbox"/>
Channel No.:	1	<input type="checkbox"/>
Maximum Output Power:	N/A	<input type="checkbox"/>
Antenna:	Internal Loop Antenna	
Equipment Category:	<input checked="" type="checkbox"/> General <input type="checkbox"/> Portable <input type="checkbox"/> Indoor Use	
Rated Power:	Voltage: <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> <input type="checkbox"/> VDC Frequency: <input checked="" type="checkbox"/> 50Hz <input type="checkbox"/> 60Hz Current: <input checked="" type="checkbox"/> 1.0Amps	
Test Dates:	02/25-03/12/2015	
Received Date:	01/10/2015	
Received Conditions:	<input type="checkbox"/> Poor <input checked="" type="checkbox"/> Good <input checked="" type="checkbox"/> Prototype <input type="checkbox"/> Production	



3.0 EUT Configuration

3.1 Support Equipment

No.	Product Type	Manufacturer	Model	Comments
1	Power Supply	DVE	DSA-12CA-05	
2	EMC Lab Laptop	HP	Elite Book 8540W	

3.2 Cables

No.	Name	Type	Length	Shielding	Comments
1	USB Cable		1m	Yes	Mini-B USB-USB 2.0 with molded ferrites on each end

3.3 Operating Condition of EUT

Operation Modes	
<input type="checkbox"/>	Stand by
<input type="checkbox"/>	Continuous Monitored Operation
<input type="checkbox"/>	Continuous Unmonitored Operation
<input checked="" type="checkbox"/>	Passport Reader was connected to the PC over USB cable to read the plastic card image using AutoCal SW00355 2.04 software

3.4 Exercising of EUT

No.	Description of EUT Exercising
1	Continues transmission of modulated signal at 13.56MHz
2	

**4.0 Test Conditions and Results**

4.1		Conducted Emissions Data		
Method:	The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment were at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN.			
Test Verification: <input checked="" type="checkbox"/>	Laboratory Ambient Temperature	21°C		
	Relative Humidity	35%		
Reference Standard:	<input checked="" type="checkbox"/> ANSI C63.4:2009 <input type="checkbox"/> ANSI C63.10:2009 <input checked="" type="checkbox"/> FCC Part 15.207/RSS Gen <input type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/>	Measurement Point <input checked="" type="checkbox"/> Mains <input type="checkbox"/> Telecommunication ports <input type="checkbox"/>		
Frequency Range:	<input checked="" type="checkbox"/> 150KHz to 30KHz <input type="checkbox"/>			
Nominal Voltage:	<input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/>			
Tested By:	Mike Schultz <i>MS</i>	Date: 02/26/2015		
Limits				
Frequency (MHz)	Limit dB (µV)			
	Quasi-Peak	Average	Result	Comments
0.15 to 0.50	66 to 56	56 to 46	pass	
0.50 to 5	56	46	pass	
5 to 30	60	50	pass	

Modifications:	
Note:	The RF exclusion 13.56MHz band applied to RFID




Frequency (MHz)	QP Line 1 dB (μ V)	AVG Line 1 dB (μ V)	QP Limit dB (μ V)	AVG Limit dB (μ V)	QP Margin dB	AVG Margin dB
0.168	37.3	28.39	65.04	55.04	-27.74	-26.65
3.976	34.66	26.17	56	46	-21.34	-19.83
5.073	34.94	26.36	60	50	-25.06	-23.64
5.67	38.45	29.74	60	50	-21.55	-20.26
5.946	37.87	30.75	60	50	-22.13	-19.25
6.004	36.8	29.25	60	50	-23.2	-20.75
6.27	38.2	28.79	60	50	-21.8	-21.21
Frequency (MHz)	QP Line 2 dB (μ V)	AVG Line 2 dB (μ V)	QP Limit dB (μ V)	AVG Limit dB (μ V)	QP Margin dB	AVG Margin dB
0.155	41.93	32.37	65.74	55.74	-23.81	-23.37
0.206	33.46	25.75	63.36	53.36	-29.91	-27.61
0.359	41.62	41	58.75	48.75	-17.13	-7.74
4.38	37.26	29.74	56	46	-18.74	-16.26
6.055	36.72	28.32	60	50	-23.28	-21.68
6.693	35.28	27.19	60	50	-24.72	-22.81
6.796	37.38	31.29	60	50	-22.62	-18.71
0.155	41.93	32.37	65.74	55.74	-23.81	-23.37
Voltage		<input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/>				
Notes						



3M Company
Conducted Emissions
CISPR22_FCC Part 15, Class B, Line 1

RE Project # - RE1402035
Model # - CR5400
EUT Description - Passport Reader
Serial # -
EUT Power - 120 VAC / 60 Hz

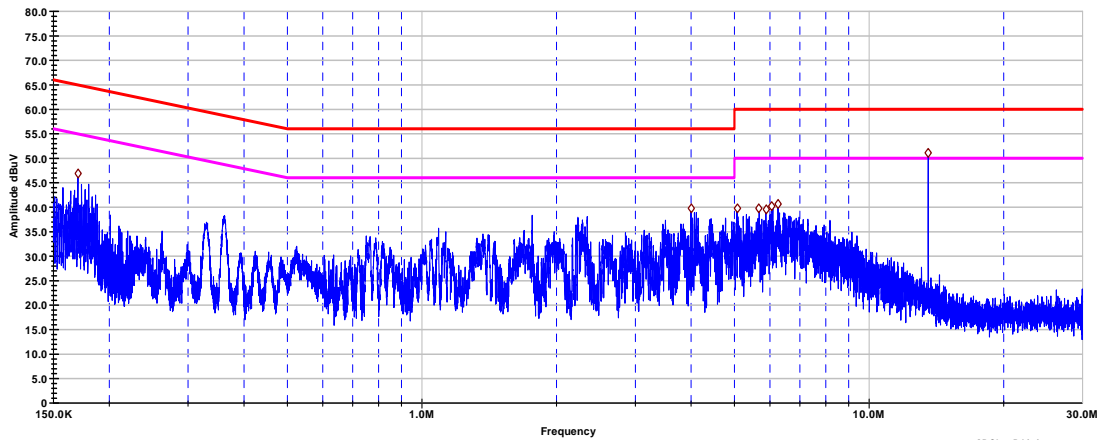


Configuration:
Connected via USB to laptop computer, reading a card.
Tested with USB cable with molded ferrite on each of the cable.
Digital & RF cables taped and isolated from each other.

OP Class B Limit
AVG Class B Limit
Scan
Top Peaks



3M Company
Conducted Emissions
CISPR22_FCC Part 15, Class B, Line 2

RE Project # - RE1402035
Model # - CR5400
EUT Description - Passport Reader
Serial # -
EUT Power - 120 VAC / 60 Hz

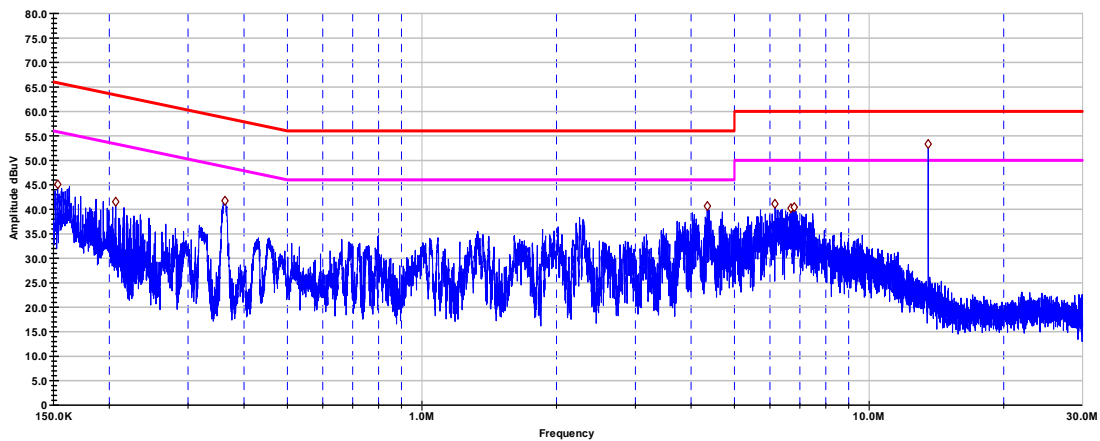

Configuration:
Connected via USB to laptop computer, reading a card.
Tested with USB cable with molded ferrite on each of the cable.
Digital & RF cables taped and isolated from each other.

OP Class B Limit
AVG Class B Limit
Scan
Top Peaks


**Test Set Up Photo**





4.2 Radiated Emissions Data				
Method:	Measurements were made in a 3-meter semi-anechoic chamber that complies to CISPR 16. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.			
Test Verification: <input checked="" type="checkbox"/>	Laboratory Ambient Temperature	23°C		
	Relative Humidity	35%		
Reference Standard:	<input checked="" type="checkbox"/> ANSI C63.4:2009 <input type="checkbox"/> ANSI C63.10:2009 <input checked="" type="checkbox"/> FCC Part 15.109/ICES 003 <input type="checkbox"/> FCC Part 15.247/RSS 210 <input checked="" type="checkbox"/> FCC Part 15.209	Measurement Distance		
		<input checked="" type="checkbox"/> 3 Meters <input type="checkbox"/>		
Frequency Range:	<input checked="" type="checkbox"/> 30 MHz TO 10GHz <input type="checkbox"/>			
Nominal Voltage:	<input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/>			
Tested By:	Mike Schultz <i>MS</i>	Date: 02/27/2015		
Limits				
Frequency (MHz)	Limit dB (µV/m)			
	Quasi-Peak	Average	Distance	Results
0.009-0.490		2400/F(KHz)	300	pass
0.490-1.705	24000/F(KHz)		30	pass
1.705-30	29.5		30	pass
30 to 88	40		3	pass
88-216	43.5		3	pass
216-960	46		3	pass
Above 960		54	3	N/A
Modifications:				
Note:	For emission in the restricted bands, the limit of 15.209 was used.			



Frequency (MHz)	Pol.	QP Reading dB μ V/m	Total CF dB	Net at 3 m dB μ V/m	Limit (dB μ V/m)	Margin dB
16.59		-10.3	37.3	26.7	69.5	-42.8
27.12		-10.1	32.6	22.5	69.5	-47.0
128.005	V	5.11	15.67	20.78	43.52	-22.74
192.745	H	18.42	13.29	31.71	43.52	-11.81
222.111	H	21.85	13.29	35.14	46.02	-10.88
250.022	H	25.48	16.43	41.91	46.02	-4.11
311.901	H	26.45	17.68	44.13	46.02	-1.89
391.505	H	19.18	19.77	38.94	46.02	-7.08
475.529	V	12.33	21.6	33.93	46.02	-12.09
509.703	H	15.92	22.21	38.13	46.02	-7.89
959.915	H	13.23	26.06	39.28	46.02	-6.74
Notes	Total CF = Antenna Factor + Cable Factor - AMP Gain					

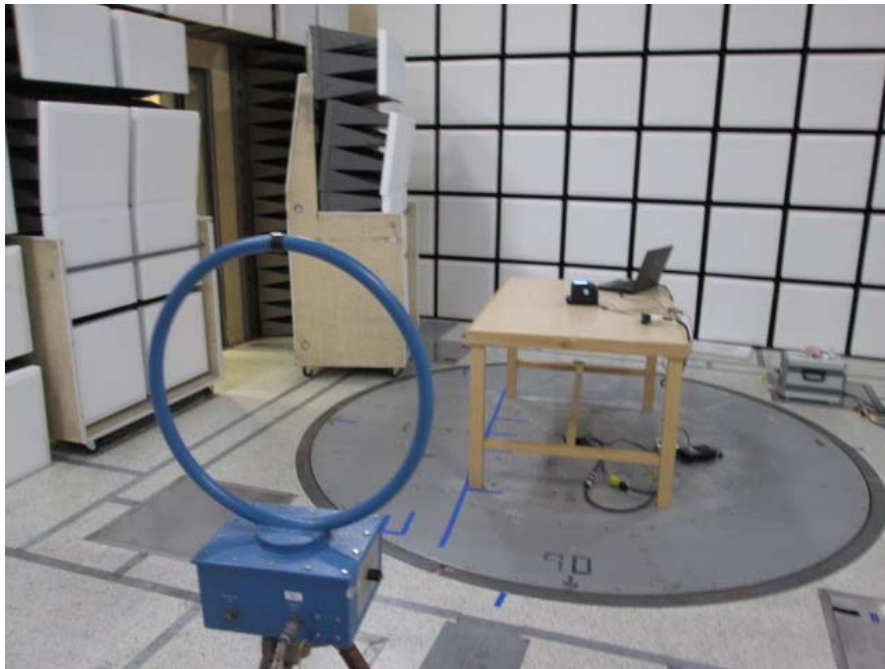


Test Set Up Photo

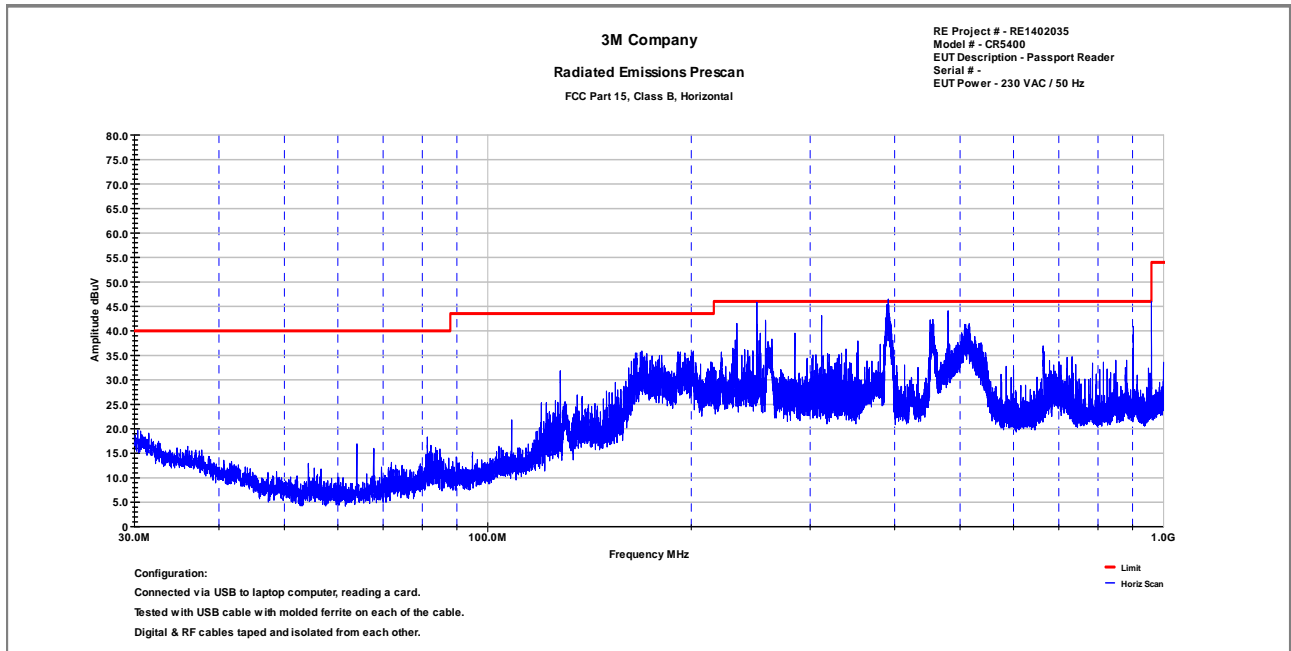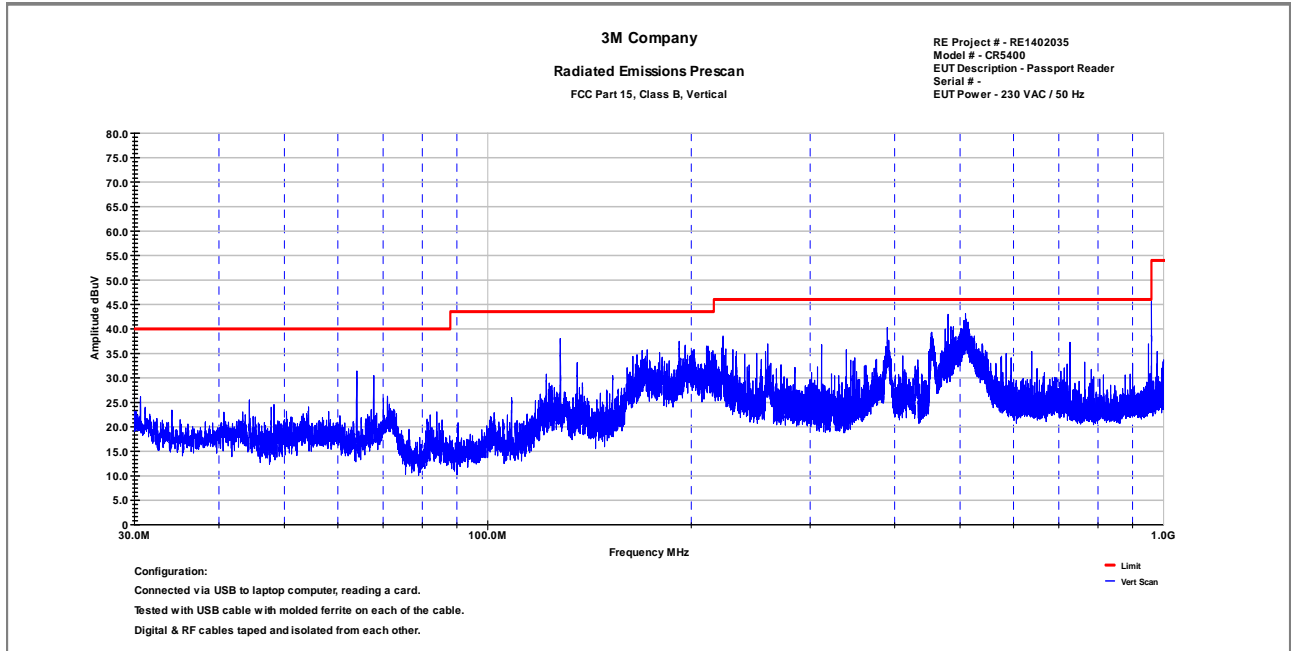



4.3		20dB Bandwidth	
Method:	The 20dB bandwidth was measured with a spectrum analyzer connected via Loop antenna placed near the EUT while the EUT is operating in transmissions mode		
	Laboratory Ambient Temperature	23°C	
	Relative Humidity	35%	
Reference Standard:	<input checked="" type="checkbox"/> ANSI C63.10:2013 <input type="checkbox"/> FCC Part 15.109/ICES 003 <input type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/> FCC Part 15.209	Measurement Point <input type="checkbox"/> Conducted <input checked="" type="checkbox"/> Radiated <input type="checkbox"/>	
Frequency Range:	<input checked="" type="checkbox"/> 13.553 MHz -13.567MHz	RBW ≥ 1% of the 20 dB bandwidth VBW ≥ RBW	
Nominal Voltage:	<input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> VDC		
Tested By:	Mike Schultz <i>MS</i>	Date: 03/12/2015	
Note:			

Frequency (MHz) (PR-ASK)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)	Results
13.553 MHZ -13.567	2.548	2.170	pass


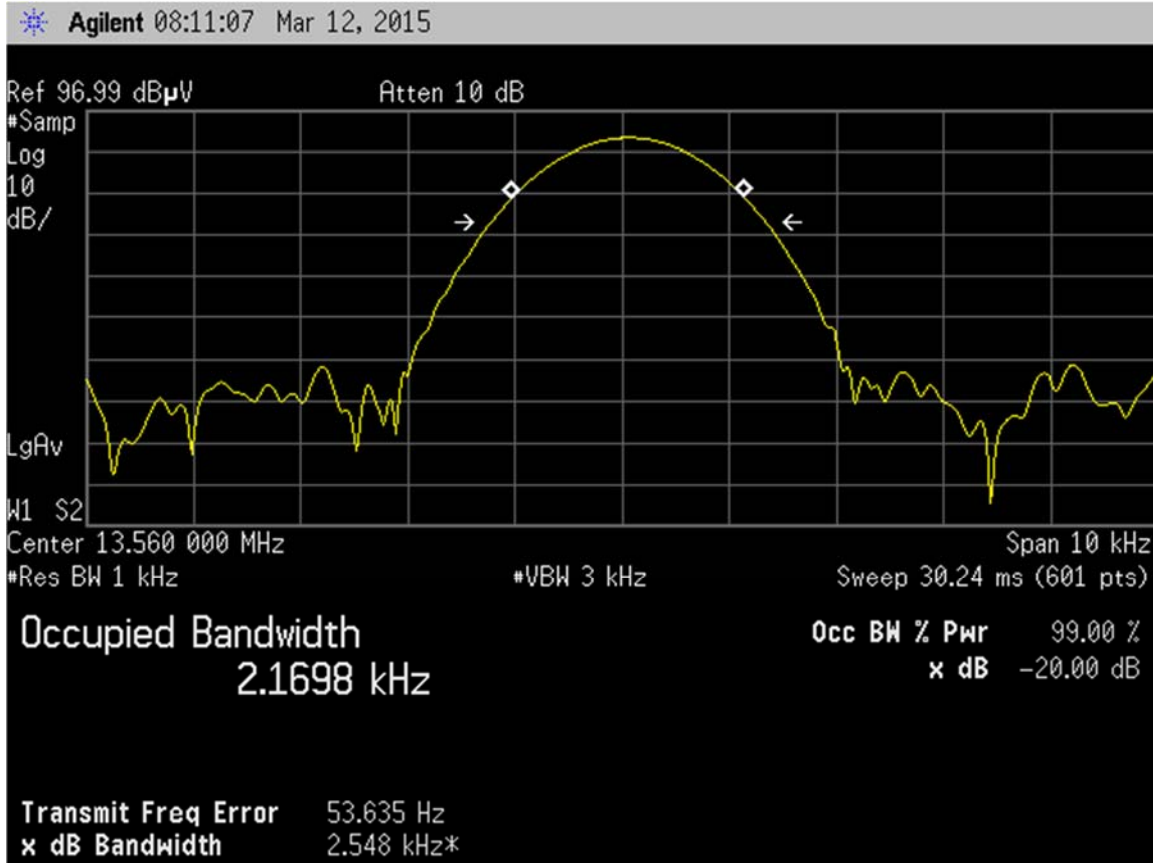




4.4	Field Strength of Fundamental		
Method:	Measurements was performed with modulated carrier at the highest power level at which the transmitter is intended to operate. The analyzer offset was adjusted to compensate for the attenuator and other losses.		
	Laboratory Ambient Temperature	21°C	
	Relative Humidity	45%	
Reference Standard:	<input checked="" type="checkbox"/> ANSI C63.10:2013 <input checked="" type="checkbox"/> FCC Part 15.255/RSS210 <input type="checkbox"/> FCC Part 15.109/ICES 003 <input type="checkbox"/> FCC Part 15.209		Measurement Point <input type="checkbox"/> Conducted <input checked="" type="checkbox"/> Radiated at 3 meters
Frequency Range:	<input checked="" type="checkbox"/> 13.553 MHz -13.567MHz		
	Frequency (MHz)	Field Strength uV/m at 30m	Field Strength dBuV/m at 3m
Limit	1.705-13.110	30	69.5
	13.110-13.410	106	80.5
	13.410-13.553	334	90.5
	13.553-13.567	15848	124.0
	13.567-13.710	334	90.5
	13.710-14.010	106	80.5
	14.010-30.0	30	69.5
Nominal Voltage:	<input type="checkbox"/> 230VAC <input checked="" type="checkbox"/> 120VAC		
Tested By:	Yuriy Litvinov		Date: 03/12/2015

Note:	
--------------	--

Frequency (MHz)	Pol (XYZ)	QP Reading dBµV/m	Limit (3m) (dBµV/m)	Margin dB	Antenna Height (m)
13.56	Y	62.5	124	-61.5	1.0

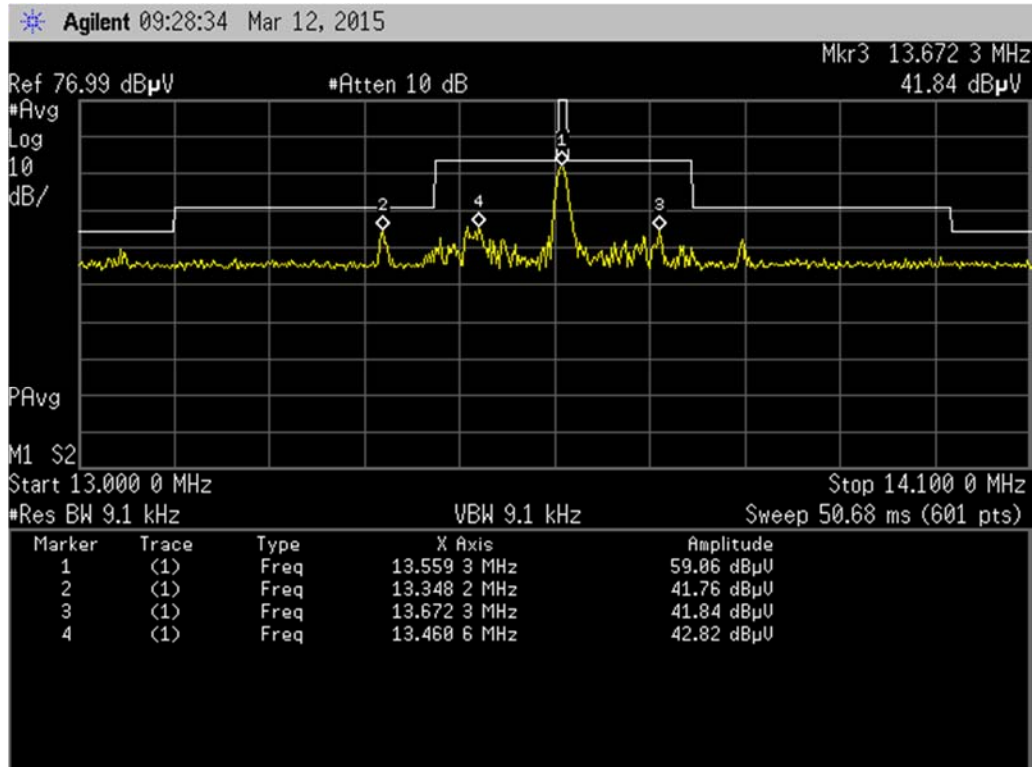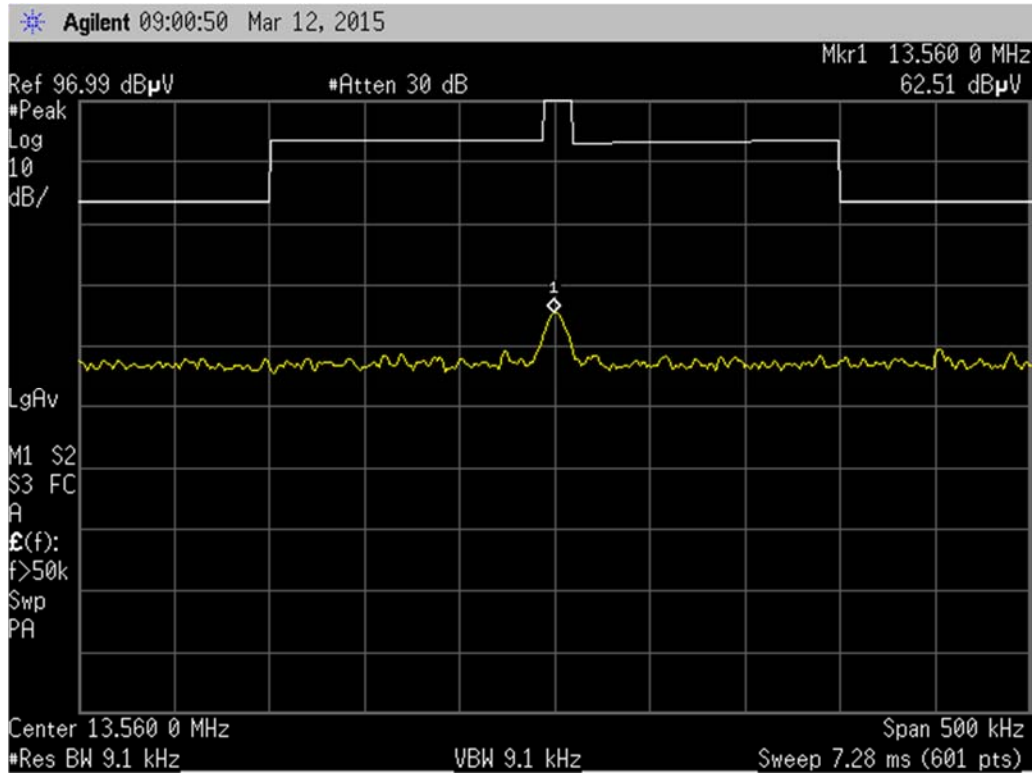



4.5		Frequency Stability	
Method:	Measurements was performed with modulated carrier at the highest power level at which the transmitter is intended to operate. The frequency was measured under normal and extreme test conditions test conditions. The analyzer offset was adjusted to compensate for the attenuator and other losses. During extreme test conditions, both extreme temperature and voltage apply simultaneously.		
	Laboratory Ambient Temperature	21°C	
	Relative Humidity	35%	
Reference Standard:	<input checked="" type="checkbox"/> Part 15.225 <input checked="" type="checkbox"/> ANSI C63.10:2013	Measurement Point <input type="checkbox"/> Conducted <input checked="" type="checkbox"/> Radiated	
Frequency Range:	<input checked="" type="checkbox"/> 13.553 MHz -13.567MHz	Maximum Deviation	
Limit:	<input checked="" type="checkbox"/> ± 100ppm	7.5 ppm	
Nominal Voltage:	<input type="checkbox"/> 230VAC <input checked="" type="checkbox"/> 120VAC		
Extreme Temperature Ranges (C°)	<input checked="" type="checkbox"/> General	<input checked="" type="checkbox"/> - 20.0 to +50.0	
	<input type="checkbox"/> Portable	<input type="checkbox"/>	
	<input type="checkbox"/> Indoor Use	<input type="checkbox"/>	
Extreme Test Voltages:	<input checked="" type="checkbox"/> Mains Voltage	<input checked="" type="checkbox"/> ± 15%	
	<input type="checkbox"/> Battery	<input type="checkbox"/> 0.85 <input type="checkbox"/> 1.15	
Tested By:	Mike Schultz <i>MS</i>		Date:03/13/2015



Channels Frequency (MHz)	Temperature C ⁰	Voltage (VAC/50Hz)	Measured Frequency (MHz)	Frequency Deviation (MHz)	Result
13.56MHz	55	102	13.5603	0	pass
		120	13.5603	0	pass
		138	13.5603	0	pass
	30	102	13.5603	0	pass
		120	13.5603	0	pass
		138	13.5603	0	pass
	20	102	13.5603	0	pass
		120	13.5603	0	pass
		138	13.5603	0	pass
	10	102	13.5603	0	pass
		120	13.5603	0	pass
		138	13.5603	0	pass
	0	102	13.5603	0	pass
		120	13.5603	0	pass
		138	13.5603	0	pass
	-10	102	13.5604	0.0001	pass
		120	13.5604	0.0001	pass
		138	13.5604	0.0001	pass
	-20	102	13.5604	0.0001	pass
		120	13.5604	0.0001	pass
		138	13.5604	0.0001	pass



Test Set Up Photo



5.0	Test Equipment				
Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Due	Check
Biconilog Antenna	Schaffner	CBL6112B	27491	10/2015	<input checked="" type="checkbox"/>
Horn Antenna	AH Systems	SAS 571	1010	10/2015	<input type="checkbox"/>
Loop Antenna	EMCO	ALR25M	1011	10/2015	<input checked="" type="checkbox"/>
EMI Receiver	Rohde & Schwarz	ESIB 40	100235	10/2015	<input type="checkbox"/>
EMI Receiver	Agilent	E4448A	1530975	10/2015	<input checked="" type="checkbox"/>
Signal Analyzer	Agilent	N9000A	MY53031040	10/2015	<input checked="" type="checkbox"/>
LISN	TESEQ	NNB51	1130	10/2015	<input checked="" type="checkbox"/>
Harmonic/Flicker Source	Cal. Instruments	C4-5001iX	57162	10/2015	<input type="checkbox"/>
Amplifier	AR	250W1000AM	14354	10/2015	<input type="checkbox"/>
Amplifier	AR	25S1G4A	4003	10/2015	<input type="checkbox"/>
Signal Generator	HP	8656A	2326A05125	10/2015	<input type="checkbox"/>
Signal Generator	Agilent	E8257D	160895	10/2015	<input type="checkbox"/>
Field Probe	AR	FL7006	25019	10/2015	<input type="checkbox"/>
Field Monitor	AR	FM2000	14292	10/2015	<input type="checkbox"/>
AC CDN	Schaffner	M316,	21937	10/2015	<input type="checkbox"/>
AC CDN	Teseq	M016,	26131	10/2015	<input type="checkbox"/>
Current Injection Coil	A.H. Systems	ICP-200/521	149	10/2015	<input type="checkbox"/>
RF Conducted System	TESEQ	NSG 4070-75	1141	10/2015	<input type="checkbox"/>
ESD Generator	KeyTek	MZ-15/EC	609325	10/2015	<input type="checkbox"/>
EFT/Surge Generator	ThermoFisher	EMC Pro Plus	1146	10/2015	<input type="checkbox"/>
EMF Meter	NARDA	ELT400	1139	10/2015	<input type="checkbox"/>
EMF Test Generator	FCC	F-1000-4-8-G	9940	10/2015	<input type="checkbox"/>
AC Power System	Titan	MAC-03	6619921	10/2015	<input type="checkbox"/>
EMC Software	ETS-Lindgren	TILE 6		10/2015	<input checked="" type="checkbox"/>

6.0	Report revision history		
Revision Level	Date	Report Number	Notes
0	04/08/2015	RE1501030-3	Original Issue



Certificate of Conformity

3M EMC Laboratory

SEMS Global Regulatory Engineering
Building 76-01-01
St. Paul, MN 55144-1000, USA

MANUFACTURER'S NAME	3M COMPANY
NAME OF EQUIPMENT	3M™ Double-Sided ID1 Reader
MODEL NUMBER(S)	CR5400
TEST REPORT NUMBER	RE1501030-3
DATE OF ISSUE	April 8, 2015

Referring to the performance criteria and operating mode during the tests specified in this report the equipment complies with the essential requirements herein specified:

47 CFR Part 15 - Subpart C - Intentional Radiator

FCC Part 15.225

License-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

RSS 210, Issue 8, 2010

47 CFR:2014, FCC Parts 15.107 and 15.109
ICES-003, Issue 5, 2012

Comments:

Yuriy Litvinov
Lead EMC Engineer



NVLAP Lab Code 200033-0