

RF Exposure Evaluation

FCC ID : DGI-MOMI13
Applicant : Inventec Corporation
Application Type : Certification
Product : Tablet PC
Model No. : MOMI-13
Brand Name : Inventec
FCC Rule Part(s) : Part 2.1093 (Portable)
Received Date : March 5, 2024

Tested By : *Kaunaz Lee*
(Kaunaz Lee)
Reviewed By : *Paddy Chen*
(Paddy Chen)
Approved By : *Chenz Ker*
(Chenz Ker)



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2403TWA402-U3	1.0	Original Report	2024-04-15	

CONTENTS

Description	Page
1. INTRODUCTION.....	5
1.1. Scope	5
1.2. MRT Test Location	5
2. PRODUCT INFORMATION.....	6
2.1. Feature of Equipment under Test	6
2.2. Description of Available Antennas.....	6
3. RF Exposure Evaluation	7
3.1. Limits.....	7
3.2. Test Result of RF Exposure Evaluation.....	8

General Information

Applicant	Inventec Corporation
Applicant Address	No. 66, Hou-Kang Street., Shilin District, Taipei 11170, Taiwan
Manufacturer	Inventec Taoyuan Operation
Manufacturer Address	No.349, Sec. 2, Renhe Rd., Daxi Dist., Taoyuan City, Taiwan
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
MRT IC Registration No.	21723
Test Device Serial No.	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

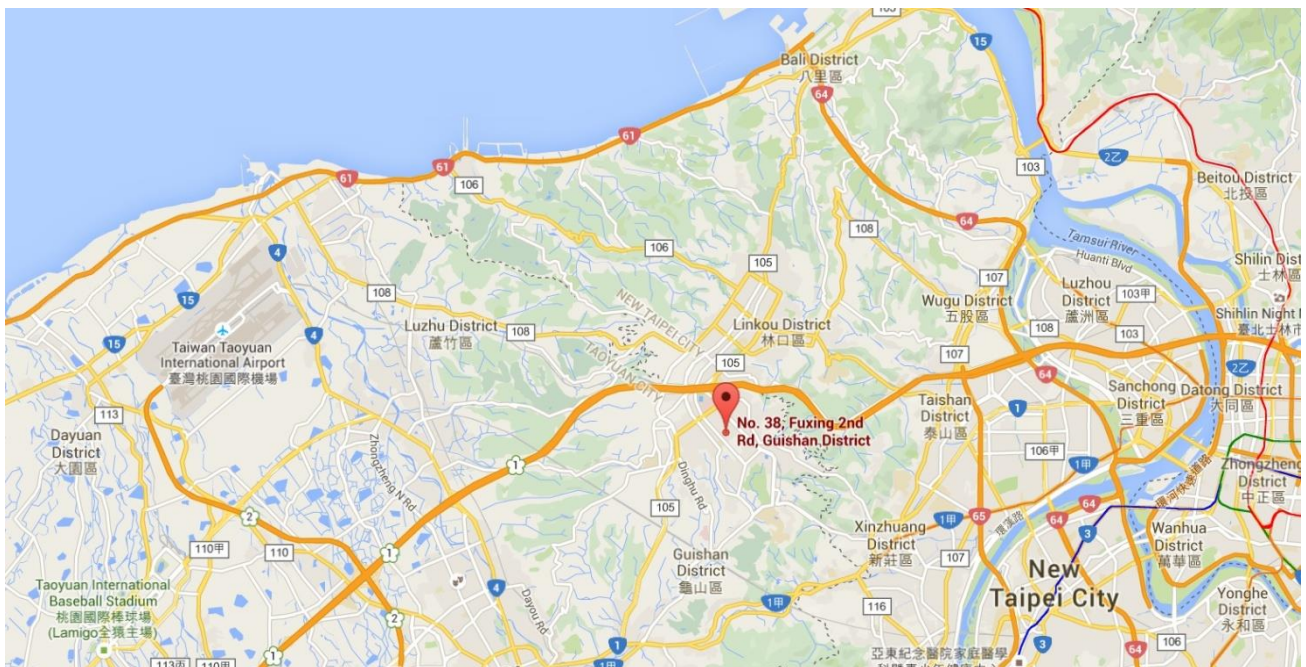

2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	Tablet PC
Model No.:	MOMI-13
Brand Name:	Inventec
RFID Specification	13.56MHz
Accessory	
Power Adapter #1	Brand Name: FSP Model: FSP090-RBBM1 Input: AC 100-240V~1.5-0.6A, 50-60Hz Output: DC 19.0V=4.74A 90.0W
Power Adapter #2	Brand Name: ADAPTER TECH Model: ATM065T-A190 Input: AC 100-240V~50-60Hz 1.6-0.7A Output: DC 19.0V=3.43A 65.17W

2.2. Description of Available Antennas

Antenna Type	PCB Loop Antenna
--------------	------------------

3. RF Exposure Evaluation

3.1. Limits

The 1 mW Blanket Exemption of § 1.1307(b)(3)(i)(A) applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power of no more than 1 mW, regardless of separation distance.

The 1 mW blanket exemption applies at separation distances less than 0.5 cm, including where there is no separation. This exemption shall not be used in conjunction with other exemption criteria other than those for multiple RF sources in paragraph § 1.1307(b)(3)(ii)(A).

The 1 mW exemption is independent of service type and covers the full range of 100 kHz to 100 GHz, but it shall not be used in conjunction with other exemption criteria or in devices with higher-power transmitters operating in the same time-averaging period. Exposure from such higher-power transmitters would invalidate the underlying assumption that exposure from the lower-power transmitter is the only contributor to SAR in the relevant volume of tissue.

3.2. Test Result of RF Exposure Evaluation

Product	Tablet PC
Test Item	RF Exposure Evaluation

Mode	Frequency Band (MHz)	EIRP Output Power (dBm)	EIRP Output Power (mW)	SAR Test Exclusion Limit (mW)
NFC	13.56	-29.32	0.0011694	1

So, this device can complies the SAR test exclusion.

Note:

Output power reference the following report: NFC report number is 2403TWA402-U2.

_____ The End _____