


FCC Test Report

EQUIPMENT : Montblance 338
BRAND NAME : Traveler 137
MODEL NAME : Montblance 338
FCC ID : DGIBC0338AAA000
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Spread Spectrum (DSS)
APPLICANT : Inventec Corporation

No. 166, Sec. 4, Chengde Rd., Shihlin District, Taipei 11167, Taiwan

The product sample received on Mar. 03, 2009 and completely tested on Mar. 10, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test.....	5
1.4 Testing Site.....	7
1.5 Applied Standards	7
1.6 Ancillary Equipment List	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 RF Output Power.....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 RF Utility	10
3 TEST RESULT	11
3.1 Number of Channel Measurement	11
3.2 20dB Bandwidth Measurement	13
3.3 Hopping Channel Separation Measurement	20
3.4 Dwell Time Measurement.....	23
3.5 Peak Output Power Measurement	25
3.6 Band Edges Measurement.....	32
3.7 Spurious Emission Measurement.....	35
3.8 AC Conducted Emission Measurement.....	39
3.9 Radiated Emission Measurement.....	43
3.10 Antenna Requirements.....	51
4 LIST OF MEASURING EQUIPMENT.....	52
5 UNCERTAINTY OF EVALUATION.....	53
6 CERTIFICATION OF TAF ACCREDITATION	55
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR930301B	Rev. 01	Initial issue of report	Mar. 19, 2009

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(b)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.5	15.247(a)(1)	A8.1(b)	Peak Output Power	$\leq 1\text{W}$	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 19.0 dB at 0.422 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.77 dB at 2483.50 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Inventec Corporation

No. 166, Sec. 4, Chengde Rd., Shihlin District, Taipei 11167, Taiwan

1.2 Manufacturer

Inventec Corporation

No. 166, Sec. 4, Chengde Rd., Shihlin District, Taipei 11167, Taiwan

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Montblance 338
Brand Name	Traveler 137
Model Name	Montblance 338
FCC ID	DGIBC0338AAA000
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : -0.92 dBm (0.81 mW) Bluetooth EDR (2Mbps) : -0.34dBm (0.92 mW) Bluetooth EDR (3Mbps) : -0.09dBm (0.98 mW)
Antenna Type	PIFA Antenna with gain 1.8 dBi
Antenna Connector Type	N/A
HW Version	V0.2
SW Version	DBL.PHAROS.09.086
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Production Unit

List of Accessory:

Accessories Specification		
AC Adapter	Brand Name	PI ELECTRONICS
	Model Name	AD7112B (Type : 02LF)
	Power Rating	I/P: 100-240Vac, 50-60Hz, 0.25A; O/P: 5Vdc, 1A
	AC Power Cord Type	1.65 meter shielded cable without ferrite core
Battery	Brand Name	SMP Technology CO., LTD.
	Model Name	P3-01
	Power Rating	3.7Vdc, 1380mAh, 5.106Wh
	Type	Li-ion
Earphone	Brand Name	Kingstate electronics CO., LTD.
	Signal Line Type	1.6 meter non-shielded cable without ferrite core
USB Cable	Brand Name	WIESON electronics CO., LTD.
	Model Name	G9904HT0220-002
	Signal Line Type	1.0 meter shielded cable without ferrite core
LCD Panel	Brand Name	LG
	Model Name	LH350WV1 VD02
Camera 1	Brand Name	Nano Focus
	Model Name	AFL-3M-D85-4P
Camera 2	Brand Name	Sertek
	Model Name	SM-JZ02-MI03

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. For accessories equipped with this EUT, please refer to the appendix of the external photo.
4. For other wireless features of this EUT, test report will be issued separately.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH06-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 7

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	BT Base Station	Anritus	8852A	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-628	KADIR628A2	N/A	Unshielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-100	PYA1YH	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	-1.41 dBm	-0.47 dBm	-0.34 dBm
Ch39	2441MHz	-1.40 dBm	-0.60 dBm	-0.37 dBm
Ch78	2480MHz	-0.92 dBm	-0.34 dBm	-0.09 dBm

Remark:

1. The data rate 3Mbps was set for all the test cases, due to the highest RF output power.
2. The data rate 3Mbps was set for dwell time test case.
3. The EUT is programmed to transmit signal continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	■ Mode 1: CH00_2402 MHz ■ Mode 2: CH39_2441 MHz ■ Mode 3: CH78_2480 MHz	■ Mode 4: CH00_2402 MHz ■ Mode 5: CH39_2441 MHz ■ Mode 6: CH78_2480 MHz	■ Mode 7: CH00_2402 MHz ■ Mode 8: CH39_2441 MHz ■ Mode 9: CH78_2480 MHz
Radiated TCs	N/A	N/A	■ Mode 1: CH00_2402 MHz ■ Mode 2: CH39_2441 MHz ■ Mode 3: CH78_2480 MHz
AC Conducted Emission	■ Mode 1 : GSM850 Idle + BT Link + WLAN Link + GPS Rx + Adapter		
Remark:			
1. The worst case of conducted TCs is Bluetooth 3Mbps, only the test data of these modes was reported.			
2. The worst case of radiated emission were Bluetooth 3Mbps Tx mode; only the test data of this mode was reported.			

2.3 Connection Diagram of Test System

<Conducted Emission>

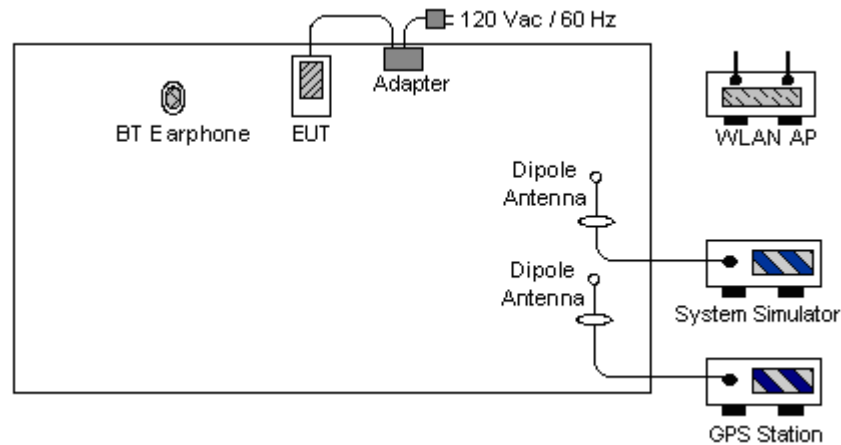

<Radiated Emission>

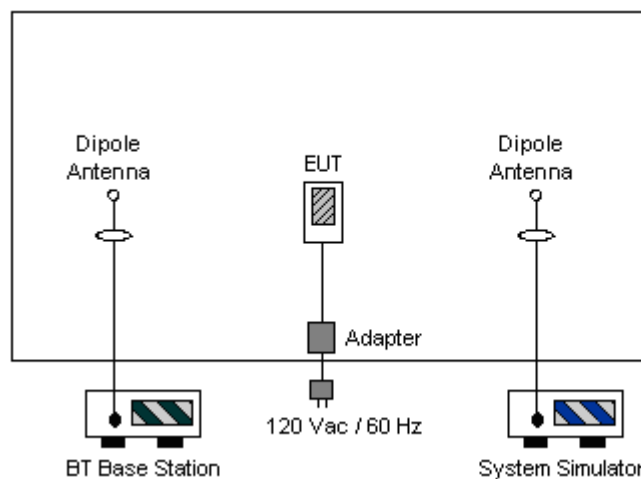

2.4 RF Utility

For Bluetooth function, the RF Utility, "Bluetooth Test" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with BT base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; $RBW \geq 1\%$ of the span; $VBW \geq RBW$; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


3.1.4 Test Setup

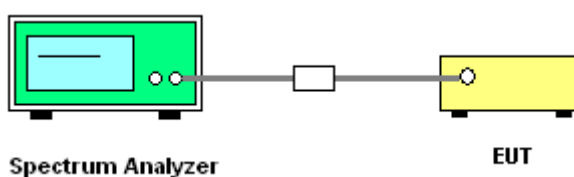

3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 1~9	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

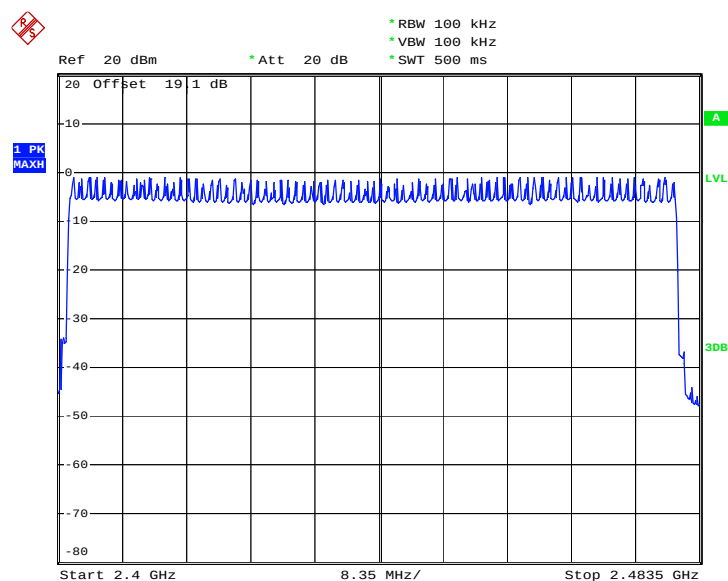

HAC-189-E

Date: 9.MAR.2009 14:45:46

3.2 20dB Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

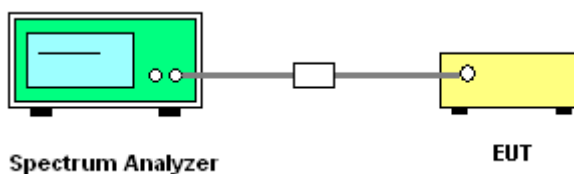


3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.862
39	2441	0.860
78	2480	0.856

20 dB Bandwidth Plot on Channel 00

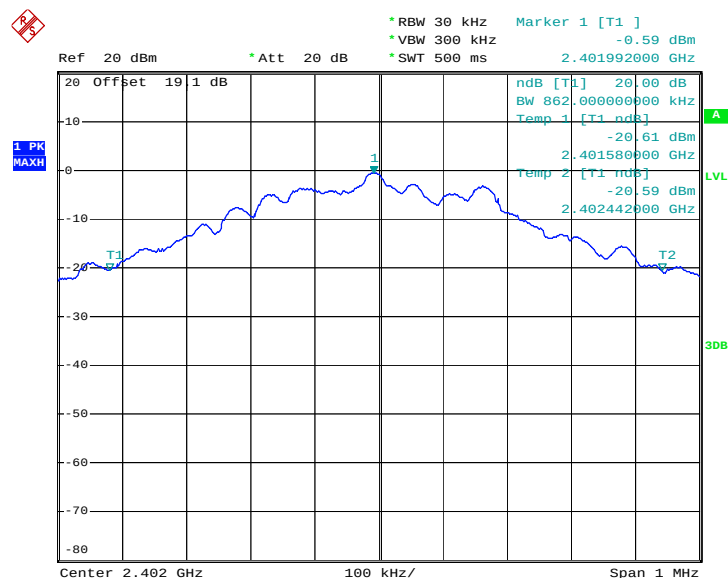


HAC-189-E

Date: 9.MAR.2009 13:11:01




20 dB Bandwidth Plot on Channel 39

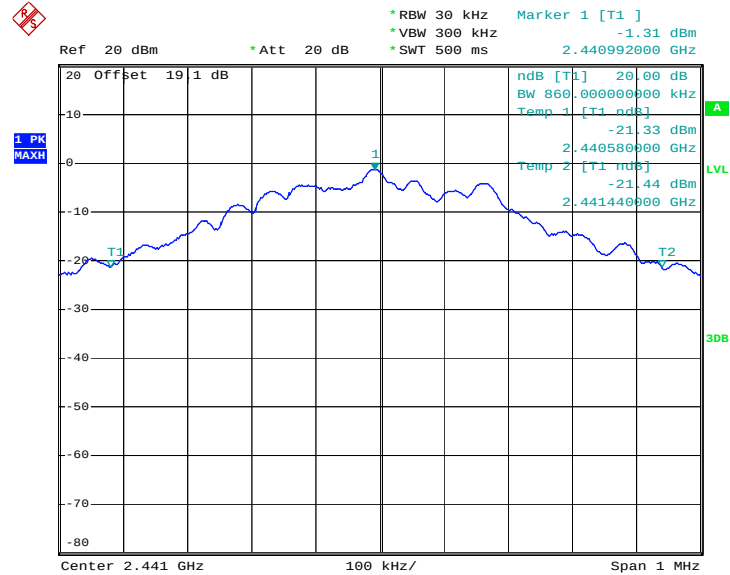

HAC-189-E

Date: 9.MAR.2009 13:10:00

20 dB Bandwidth Plot on Channel 78

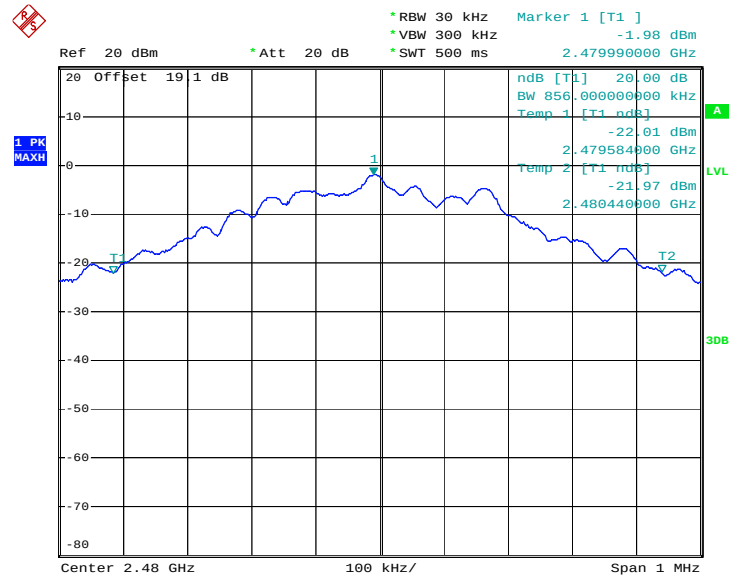

HAC-189-E


Date: 9.MAR.2009 13:10:36



Test Mode :	Mode 4, 5, 6	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.280
39	2441	1.260
78	2480	1.260

20 dB Bandwidth Plot on Channel 00

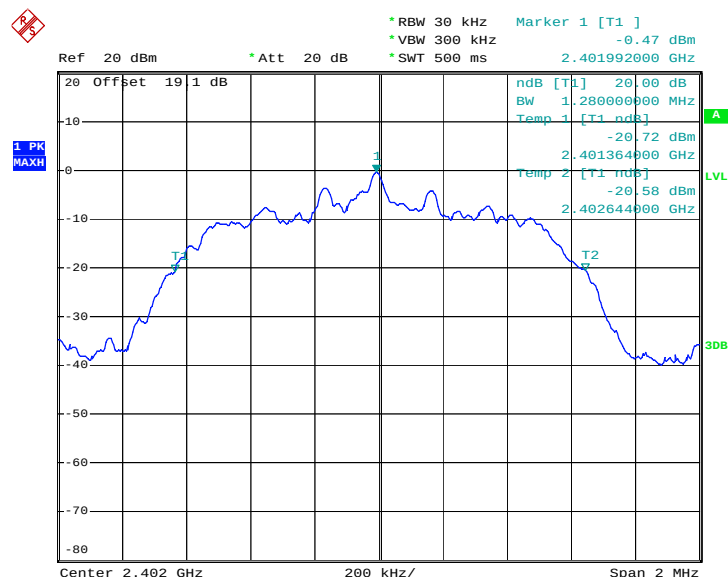


HAC-189-E

Date: 9.MAR.2009 13:12:53




20 dB Bandwidth Plot on Channel 39

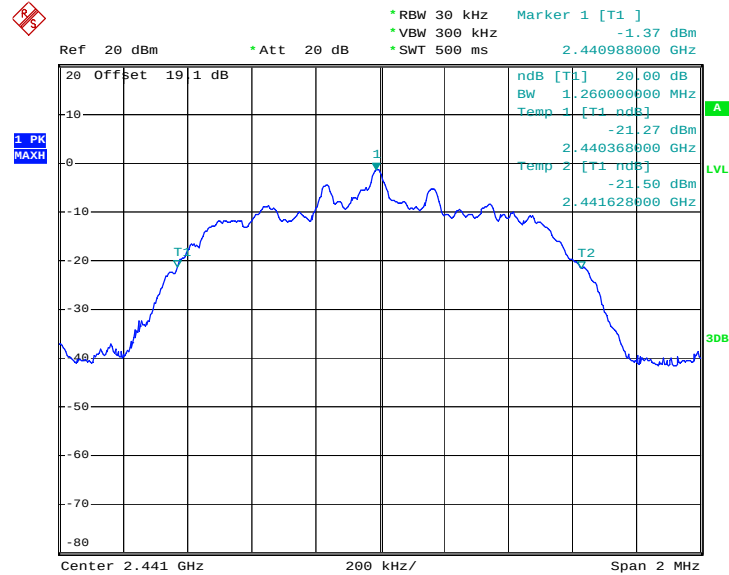

HAC-189-E

Date: 9.MAR.2009 13:14:04

20 dB Bandwidth Plot on Channel 78

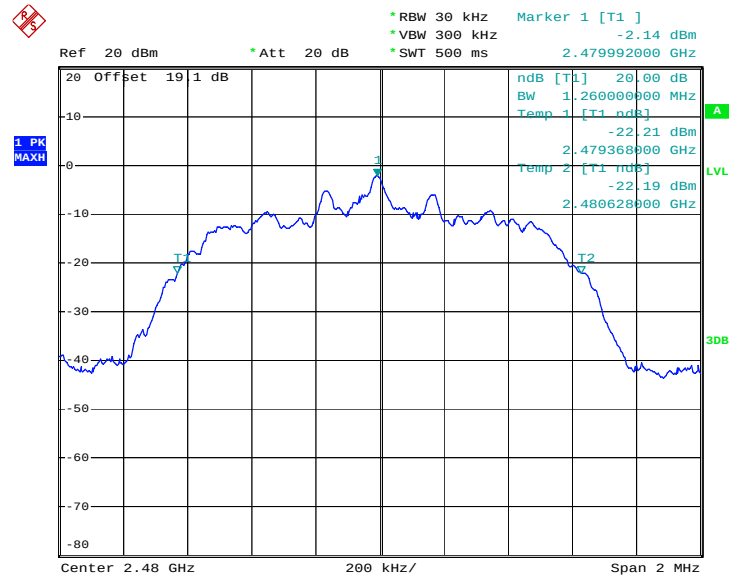


HAC-189-E

Date: 9.MAR.2009 13:14:37



Test Mode :	Mode 7, 8, 9	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.284
39	2441	1.268
78	2480	1.268

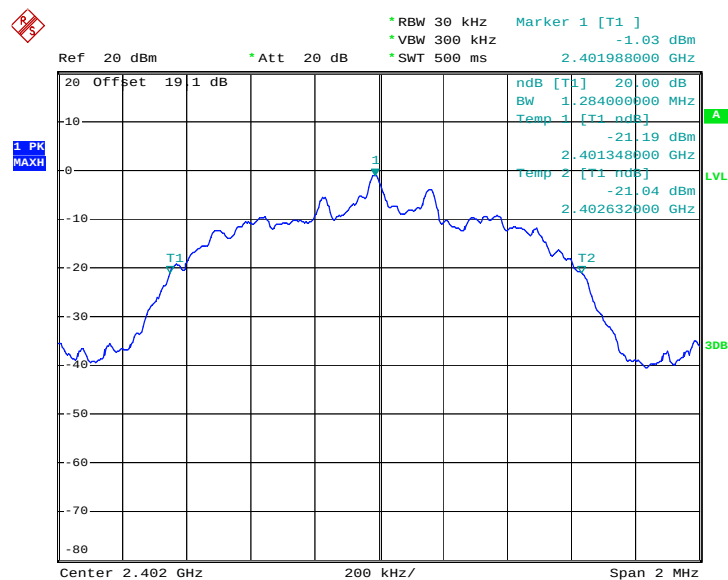
20 dB Bandwidth Plot on Channel 00

HAC-189-E

Date: 9.MAR.2009 13:28:41




20 dB Bandwidth Plot on Channel 39

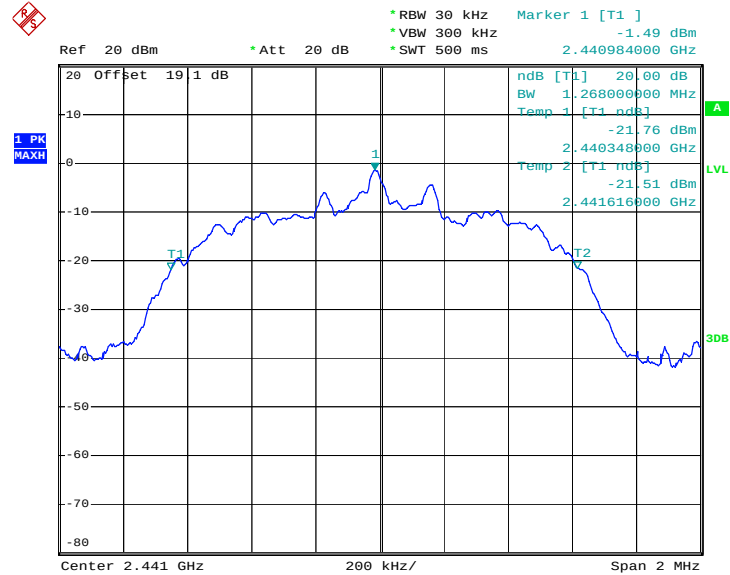

HAC-189-E

Date: 9.MAR.2009 13:29:06

20 dB Bandwidth Plot on Channel 78

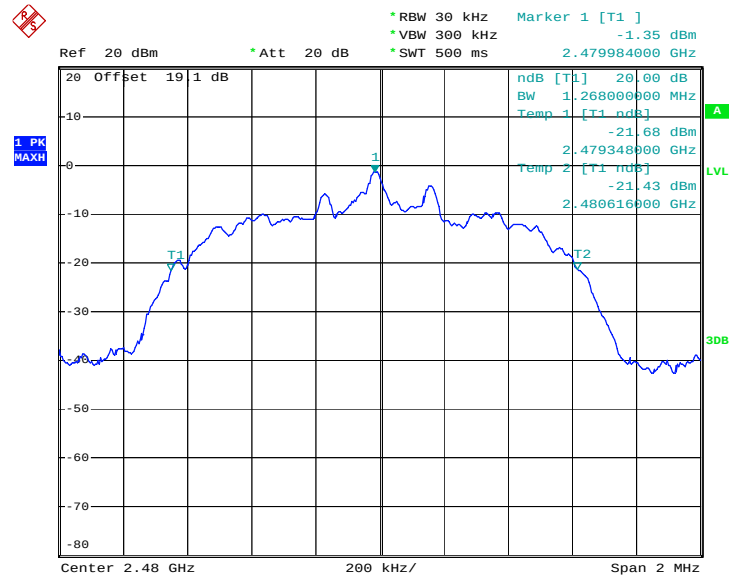

HAC-189-E

Date: 9.MAR.2009 13:29:25

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

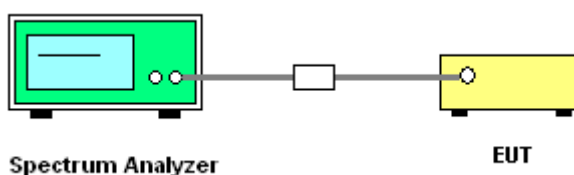




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 7, 8, 9	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.856	Pass
39	2441	1.000	0.845	Pass
78	2480	1.000	0.845	Pass

Channel Separation Plot on Channel 00 - 01

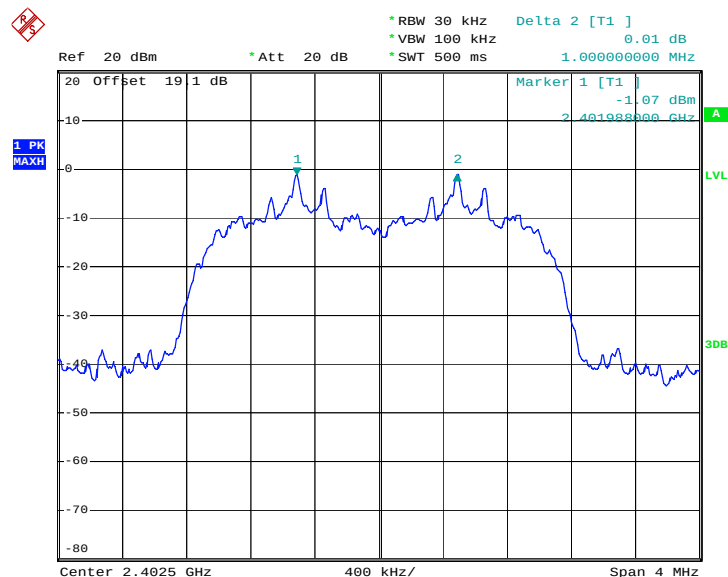


HAC-189-E

Date: 9.MAR.2009 14:15:26




Channel Separation Plot on Channel 39 - 40

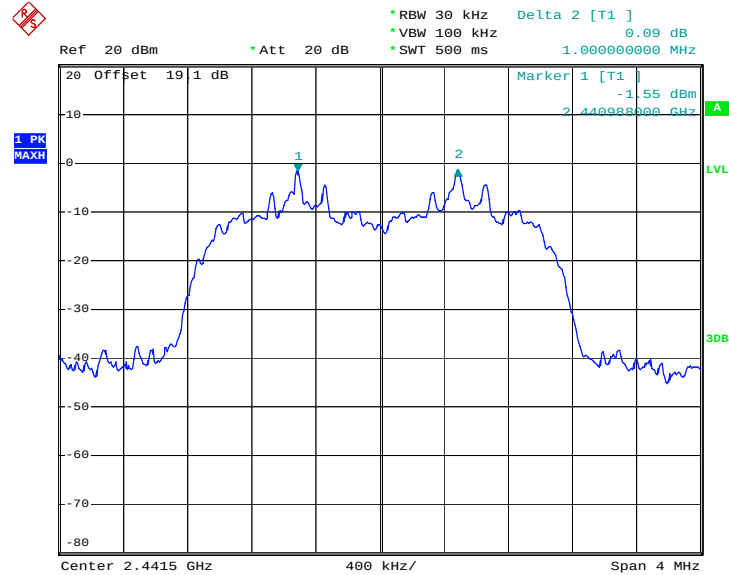

HAC-189-E

Date: 9.MAR.2009 14:19:08

Channel Separation Plot on Channel 77 - 78

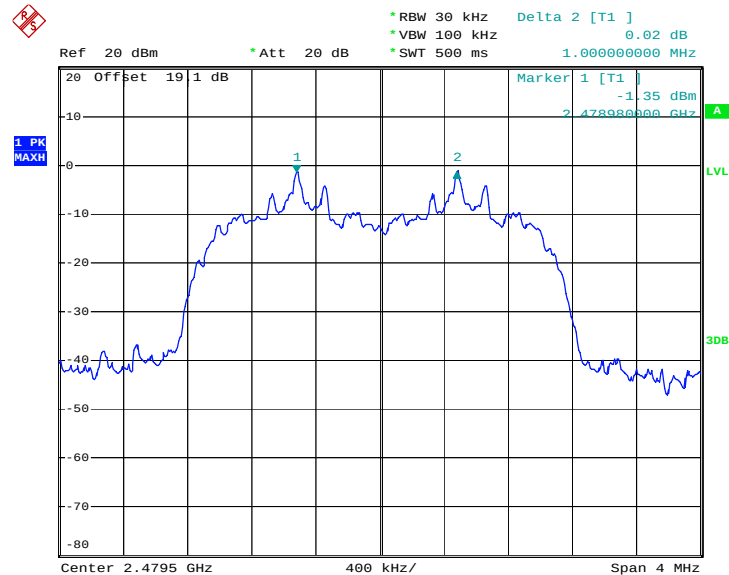

HAC-189-E

Date: 9.MAR.2009 14:21:03

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

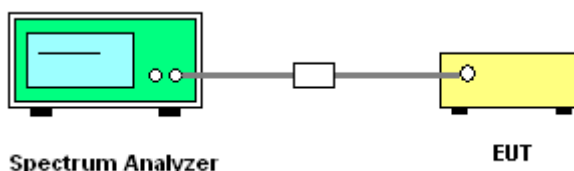


3.4.5 Test Result of Dwell Time

Test Mode :	Mode 8	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%

Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	3.10	3110.00	0.30	0.4	Pass


Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)

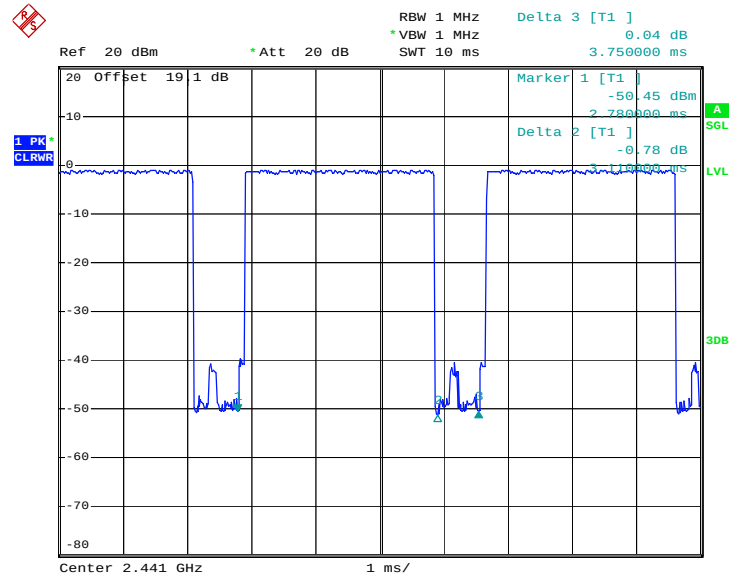3DH5 Dwell Time (One Pulse) Plot on Channel 39


HAC-189-E

Date: 9.MAR.2009 14:32:48

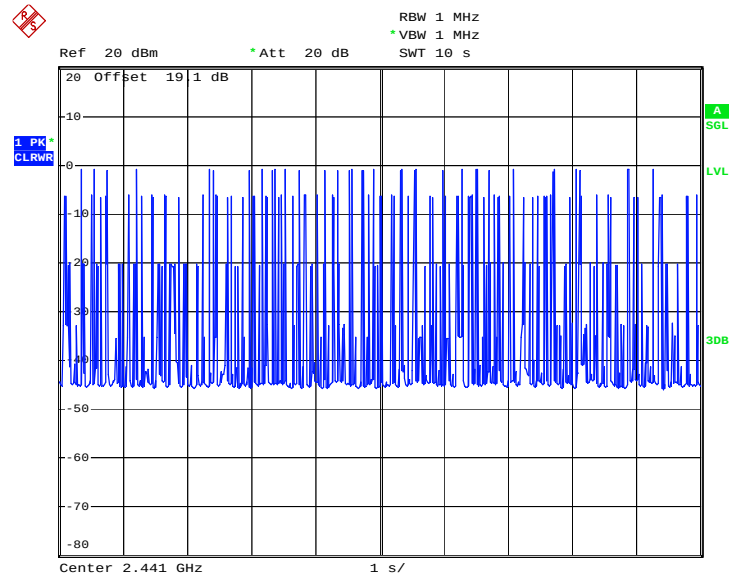3DH5 Dwell Time (Count Pulses) Plot on Channel 39


HAC-189-E

Date: 9.MAR.2009 14:36:53

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the peak power meter by a low loss cable.

3.5.4 Test Setup

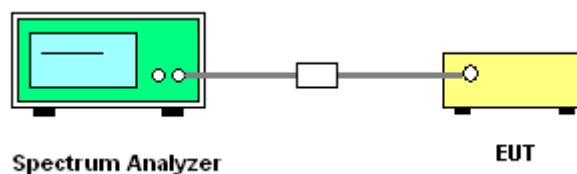


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	-1.41	30	Pass
39	2441	-1.40	30	Pass
78	2480	-0.92	30	Pass


Peak Output Power Plot on Channel 00

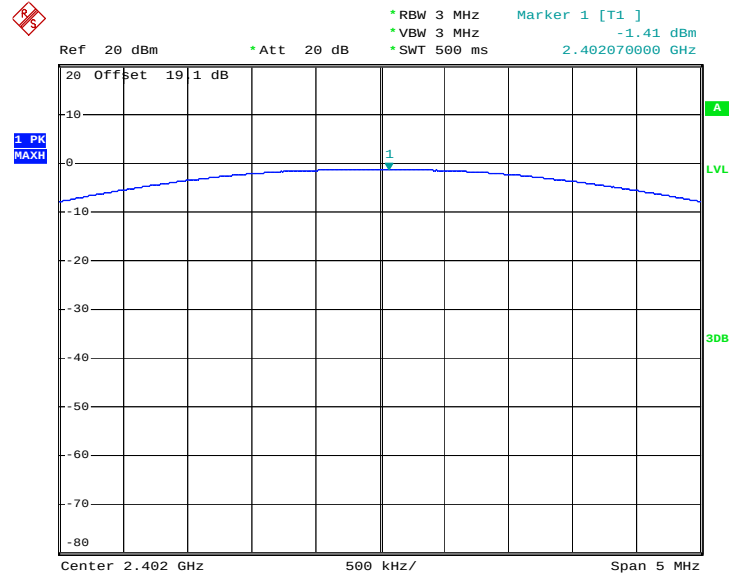

HAC-189-E


Date: 9.MAR.2009 15:52:40

Peak Output Power Plot on Channel 39

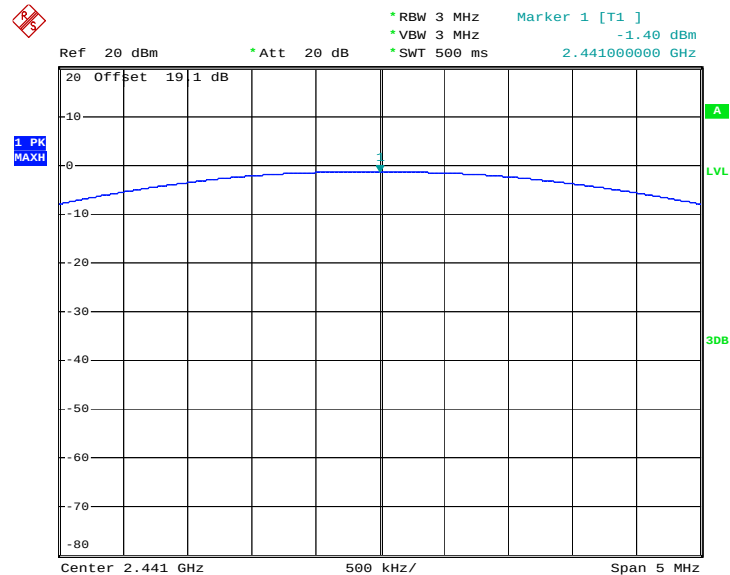

HAC-189-E

Date: 9.MAR.2009 15:55:49

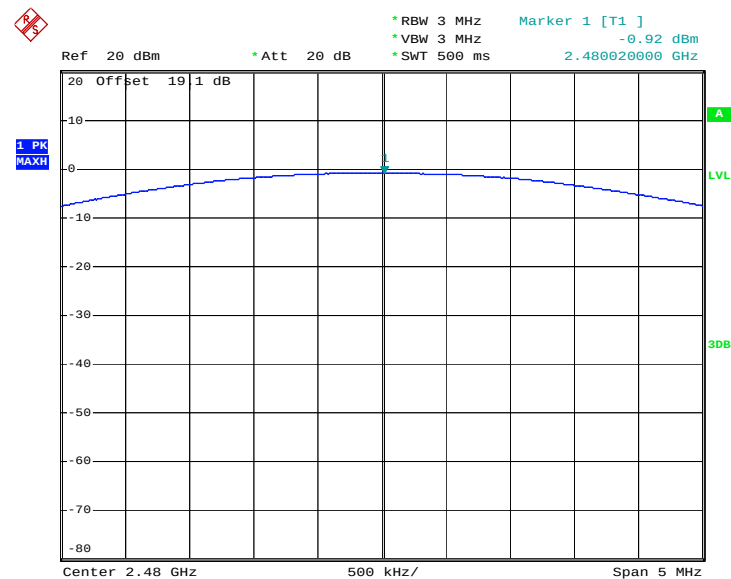**Peak Output Power Plot on Channel 78**

HAC-189-E


Date: 9.MAR.2009 15:58:00

Test Mode :	Mode 4, 5, 6	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	-0.47	30	Pass
39	2441	-0.60	30	Pass
78	2480	-0.34	30	Pass




Peak Output Power Plot on Channel 00

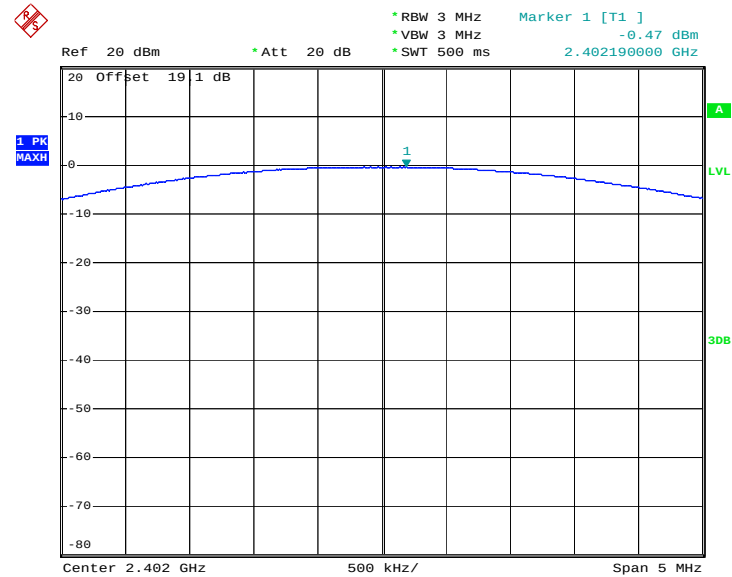

HAC-189-E


Date: 9.MAR.2009 15:53:07

Peak Output Power Plot on Channel 39

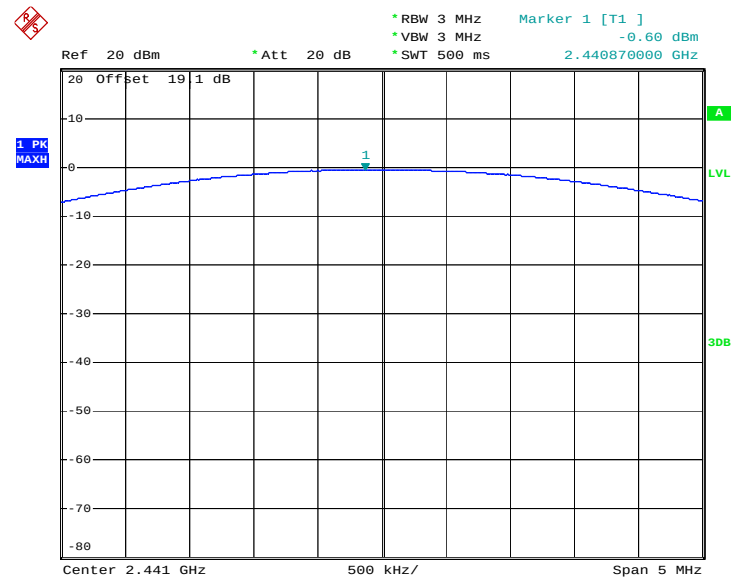

HAC-189-E

Date: 9.MAR.2009 15:56:52

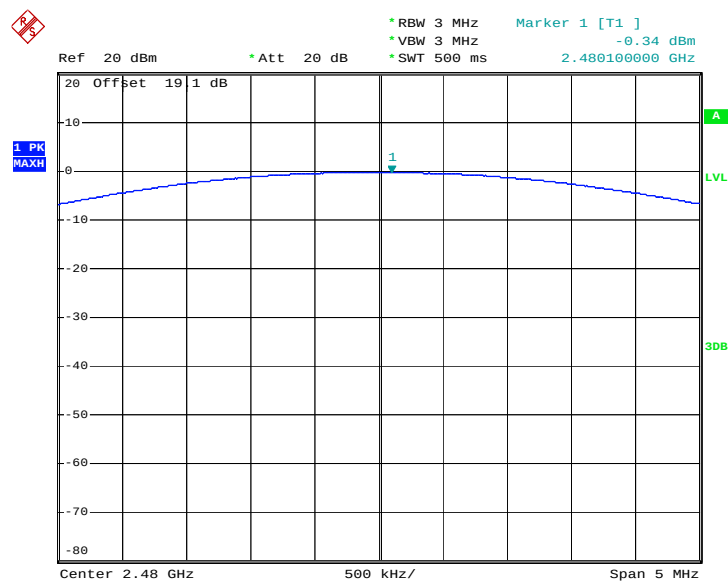Peak Output Power Plot on Channel 78


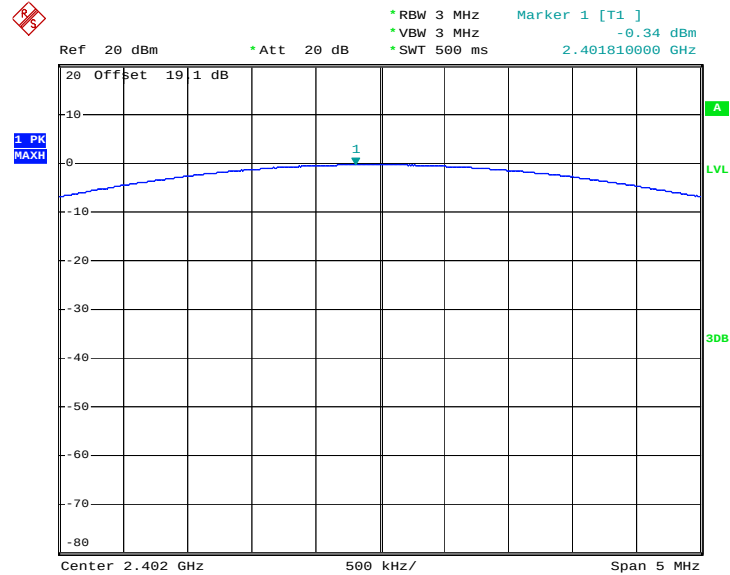
HAC-189-E

Date: 9.MAR.2009 15:59:33

Test Mode :	Mode 7, 8, 9	Temperature :	21~23°C
Test Engineer :	Eric Hum	Relative Humidity :	42~46%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	-0.34	30	Pass
39	2441	-0.37	30	Pass
78	2480	-0.09	30	Pass


Peak Output Power Plot on Channel 00



HAC-189-E

Date: 9.MAR.2009 15:54:36

Peak Output Power Plot on Channel 39

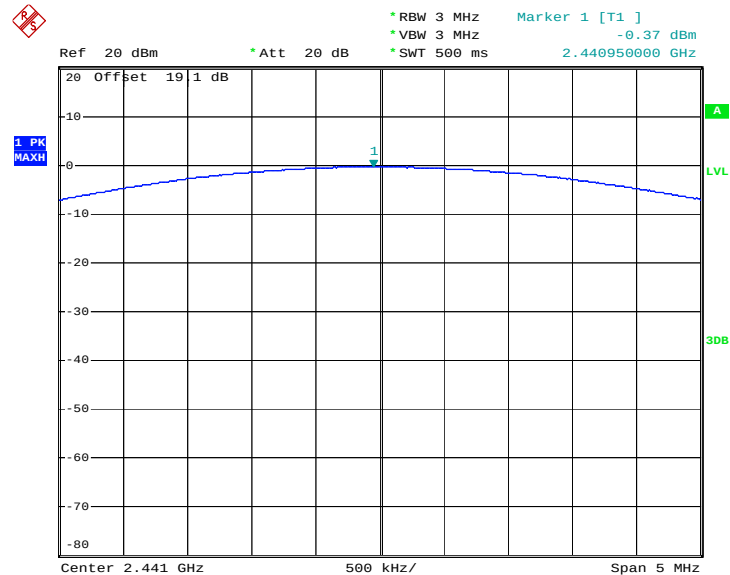


HAC-189-E

Date: 9.MAR.2009 15:57:20



Peak Output Power Plot on Channel 78

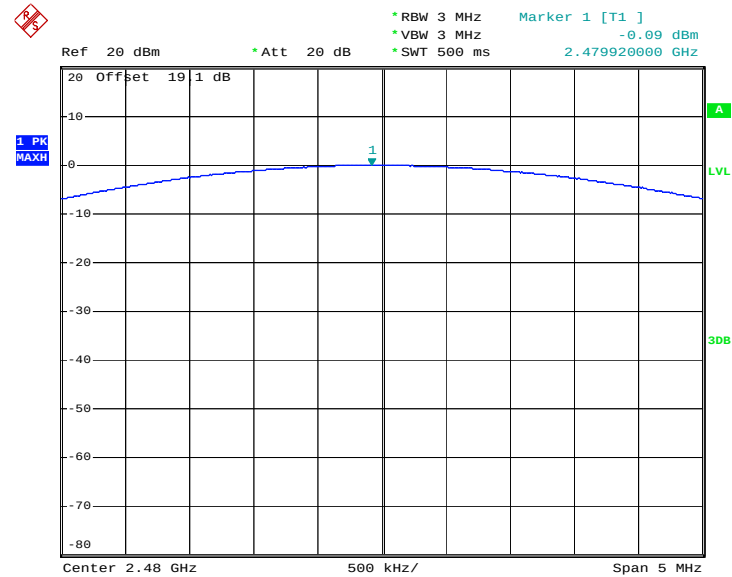

HAC-189-E

Date: 9.MAR.2009 15:59:57

3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).

3.6.4 Test Setup

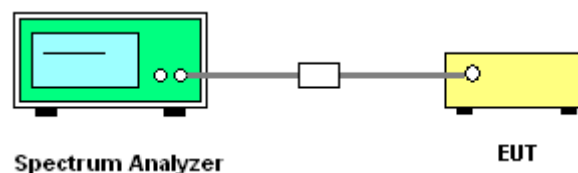

3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 7	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	42~46%
		Test Engineer :	Kai Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.38	44.98	-29.02	74	45.36	31.98	3.92	36.28	100	354	Peak
2386.38	31.09	-22.91	54	31.47	31.98	3.92	36.28	100	354	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2353.13	44.17	-29.83	74	44.65	31.93	3.86	36.27	151	334	Peak
2353.13	30.23	-23.77	54	30.71	31.93	3.86	36.27	151	334	Average

Test Mode :	Mode 9	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	42~46%
		Test Engineer :	Kai Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	61.17	-12.83	74	61.33	32.08	4.05	36.29	102	339	Peak
2483.5	48.23	-5.77	54	48.39	32.08	4.05	36.29	102	339	Average


ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	59.91	-14.09	74	60.07	32.08	4.05	36.29	180	323	Peak
2483.5	47.59	-6.41	54	47.75	32.08	4.05	36.29	180	323	Average



3.6.6 Test Result of Conducted Band Edges

Test Mode :	Mode 7 and 9	Temperature :	21~23°C
Test Channel :	00 and 78	Relative Humidity :	42~46%
		Test Engineer :	Eric Hum


Low Band Edge Plot on Channel 00

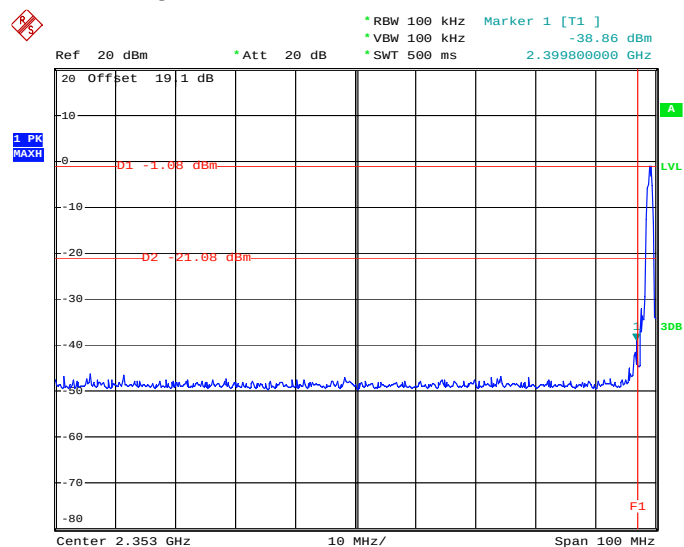

HAC-189-E

Date: 9.MAR.2009 13:41:20

High Band Edge Plot on Channel 78

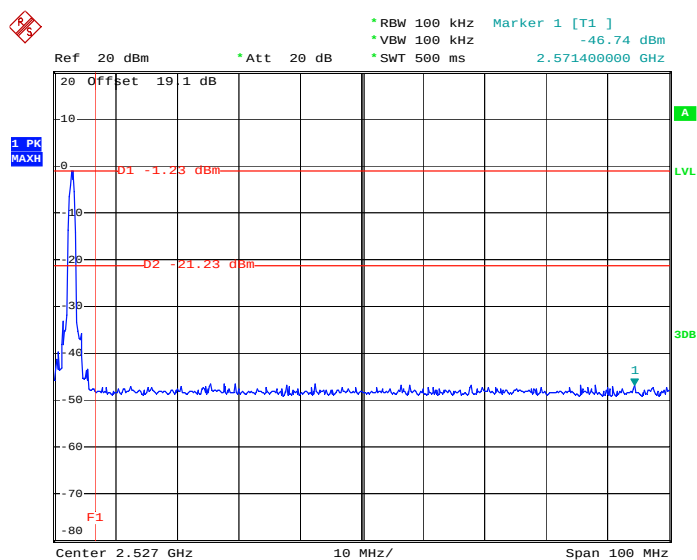

HAC-189-E

Date: 9.MAR.2009 13:32:03

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

3.7.4 Test Setup

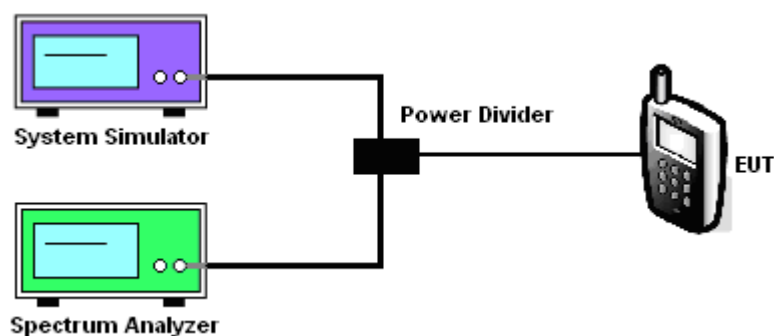




3.7.5 Test Result

Test Mode :	Mode 7	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	42~46%
		Test Engineer :	Eric Hum


Conducted Spurious Emission Plot between 9K-3G

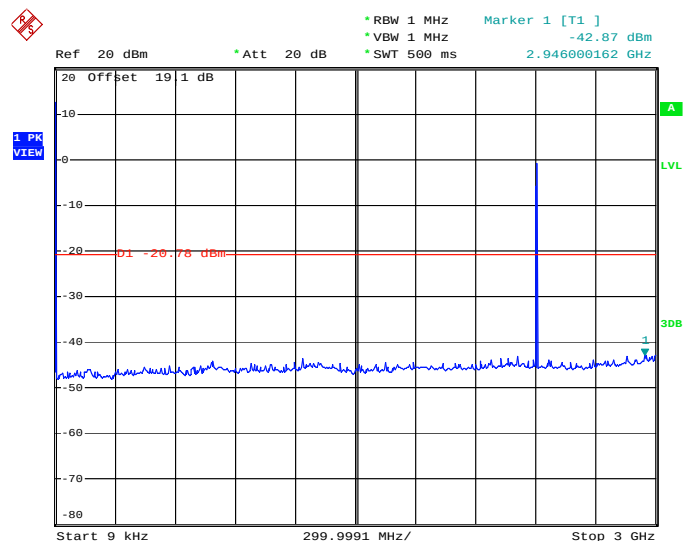

HAC-189-E

Date: 12.MAR.2009 08:04:55

Conducted Spurious Emission Plot between 1G-25G

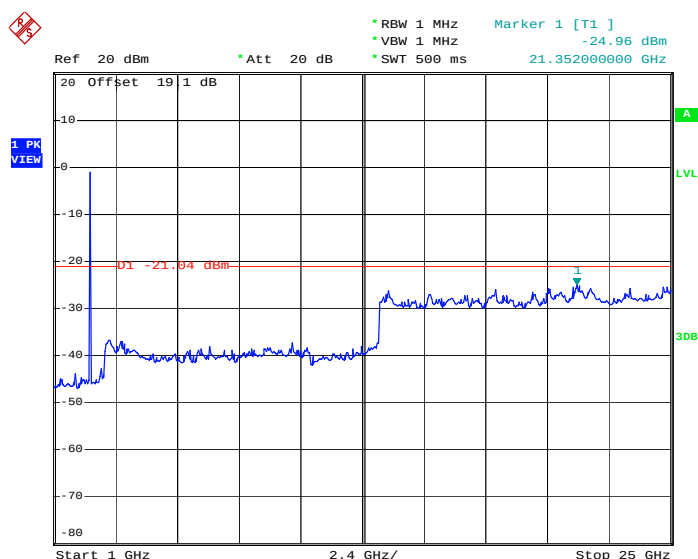


HAC-189-E

Date: 12.MAR.2009 08:05:09



Test Mode :	Mode 8	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	42~46%
		Test Engineer :	Eric Hum


Conducted Spurious Emission Plot between 9K-3G

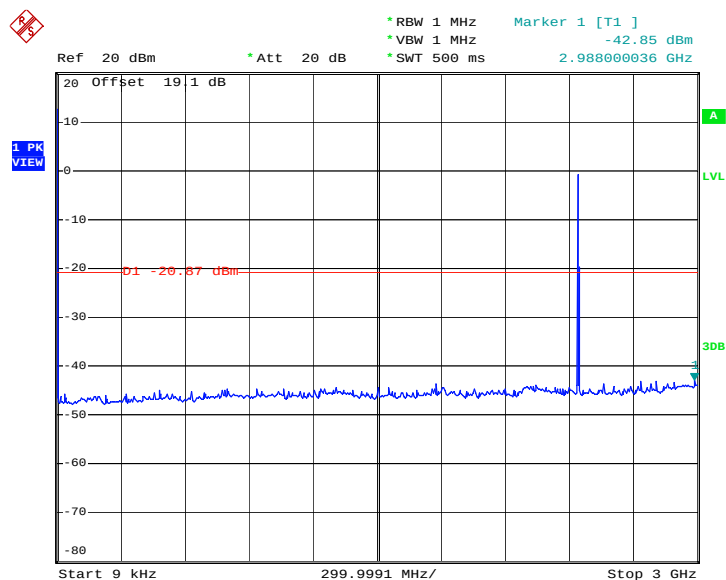

HAC-189-E

Date: 12.MAR.2009 08:05:26

Conducted Spurious Emission Plot between 1G-25G

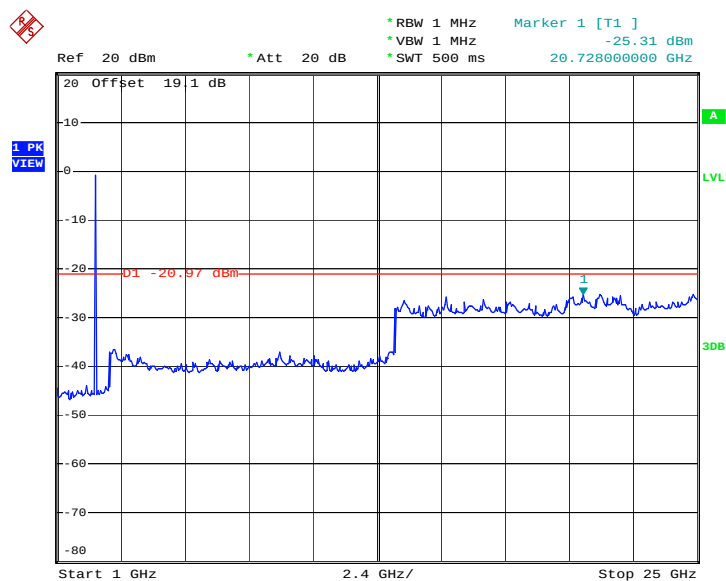


HAC-189-E

Date: 12 MAR 2009 08:05:44




Test Mode :	Mode 9	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	42~46%
		Test Engineer :	Eric Hum

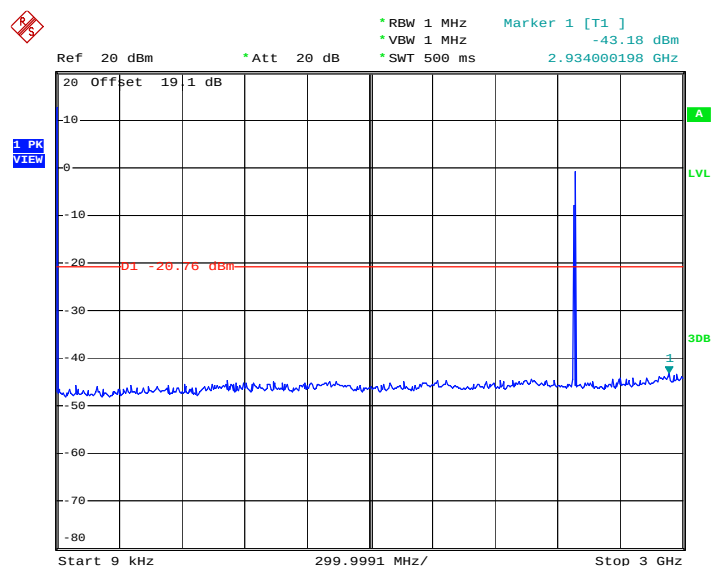Conducted Spurious Emission Plot between 9K-3G

HAC-189-E

Date: 12.MAR.2009 08:05:57

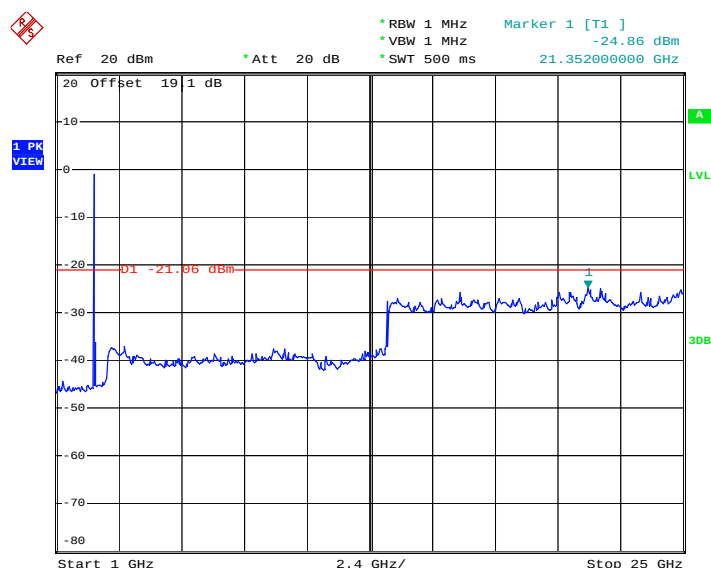Conducted Spurious Emission Plot between 1G-25G

HAC-189-E

Date: 12.MAR.2009 08:06:12

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

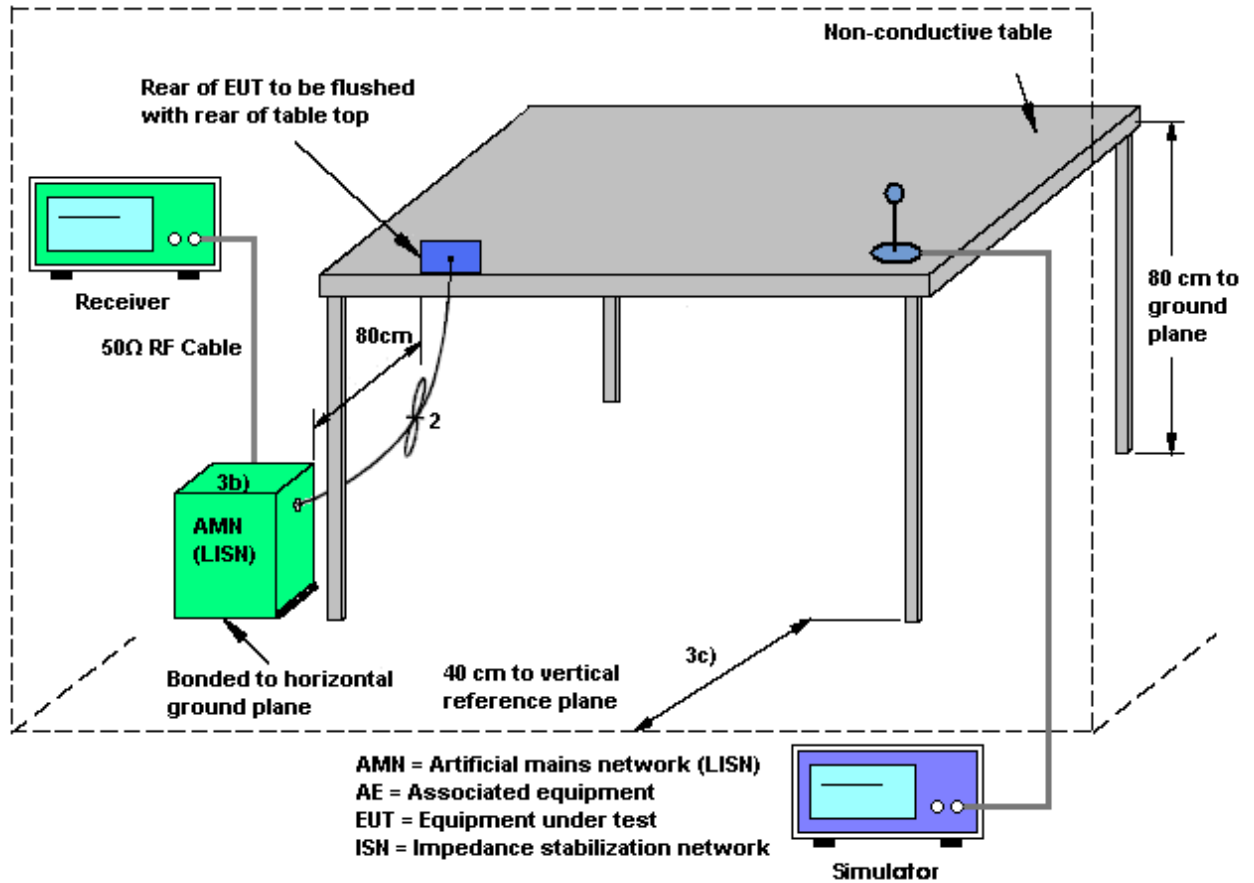

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Cona Huang	Relative Humidity :	44~45%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + BT Link + WLAN Link + GPS Rx + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

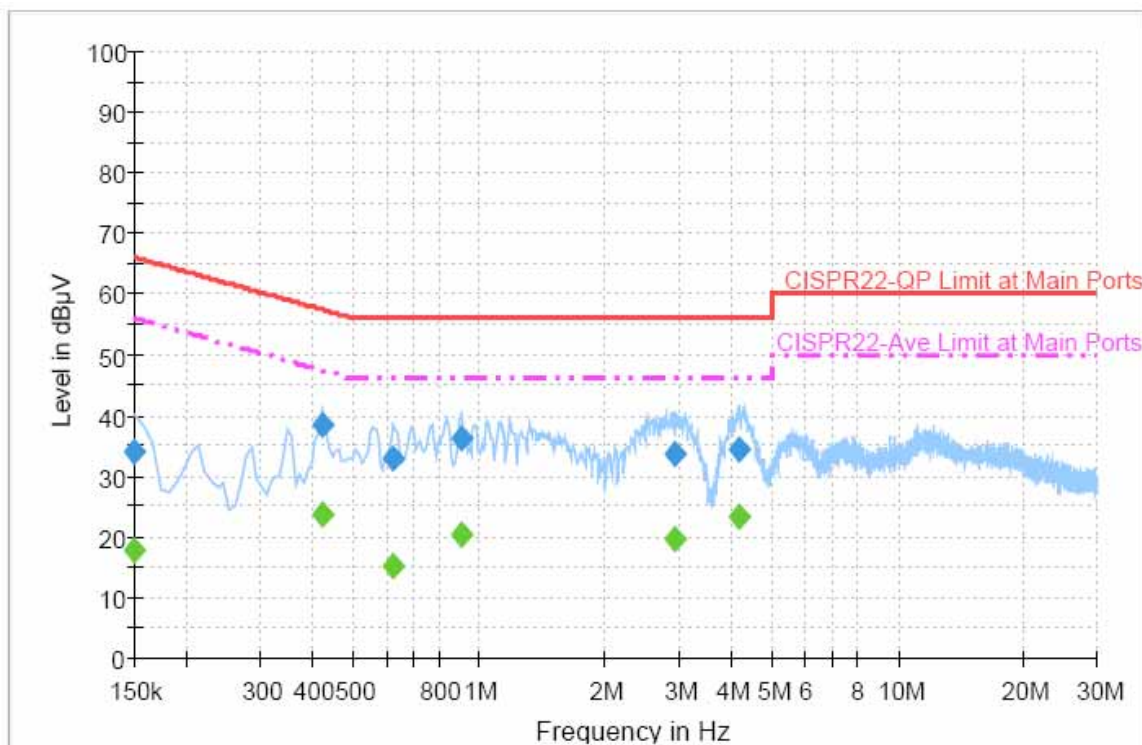


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	34.0	Off	L1	19.4	32.0	66.0
0.422000	38.4	Off	L1	19.4	19.0	57.4
0.622000	32.9	Off	L1	19.3	23.1	56.0
0.910000	36.3	Off	L1	19.4	19.7	56.0
2.926000	33.6	Off	L1	19.5	22.4	56.0
4.174000	34.4	Off	L1	19.5	21.6	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	17.8	Off	L1	19.4	38.2	56.0
0.422000	23.7	Off	L1	19.4	23.7	47.4
0.622000	15.2	Off	L1	19.3	30.8	46.0
0.910000	20.3	Off	L1	19.4	25.7	46.0
2.926000	19.6	Off	L1	19.5	26.4	46.0
4.174000	23.1	Off	L1	19.5	22.9	46.0

Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Cona Huang	Relative Humidity :	44~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + BT Link + WLAN Link + GPS Rx + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

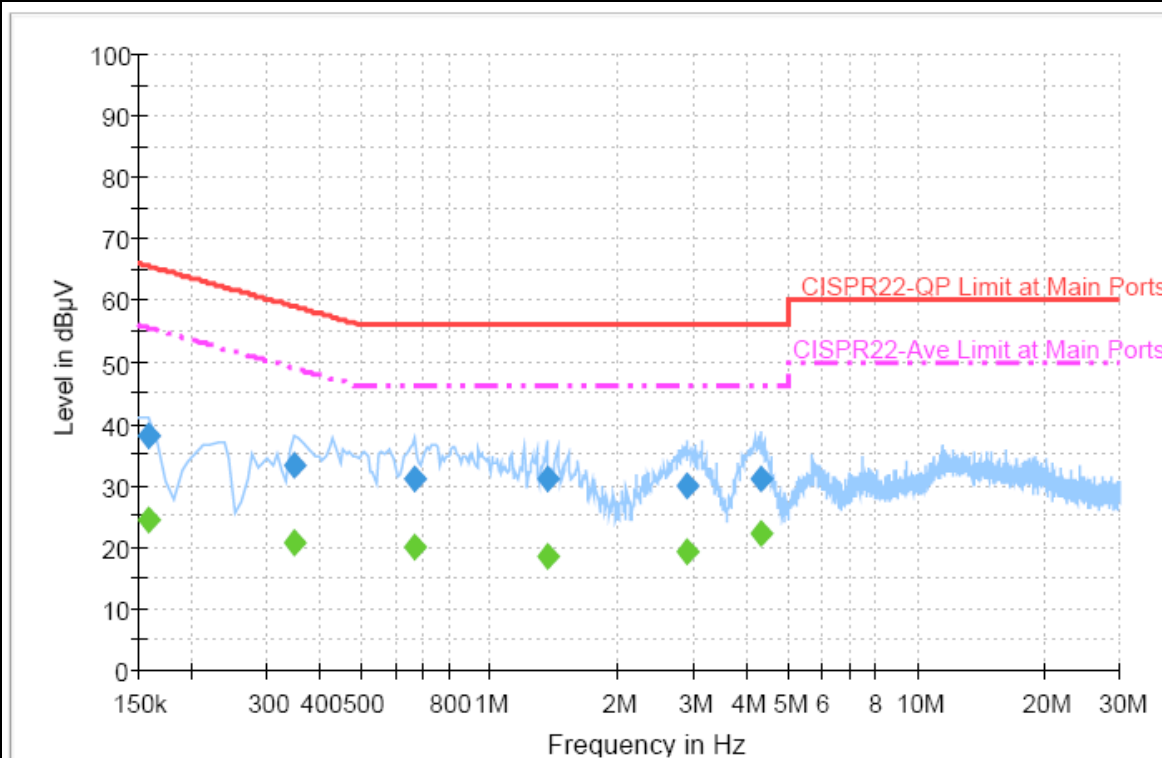
Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	37.8	Off	N	19.4	27.8	65.6
0.350000	33.3	Off	N	19.3	25.7	59.0
0.670000	30.9	Off	N	19.4	25.1	56.0
1.366000	30.9	Off	N	19.5	25.1	56.0
2.894000	29.7	Off	N	19.5	26.3	56.0
4.334000	31.0	Off	N	19.5	25.0	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	24.3	Off	N	19.4	31.3	55.6
0.350000	20.8	Off	N	19.3	28.2	49.0
0.670000	19.9	Off	N	19.4	26.1	46.0
1.366000	18.5	Off	N	19.5	27.5	46.0
2.894000	19.0	Off	N	19.5	27.0	46.0
4.334000	22.0	Off	N	19.5	24.0	46.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.9.4 Test Setup

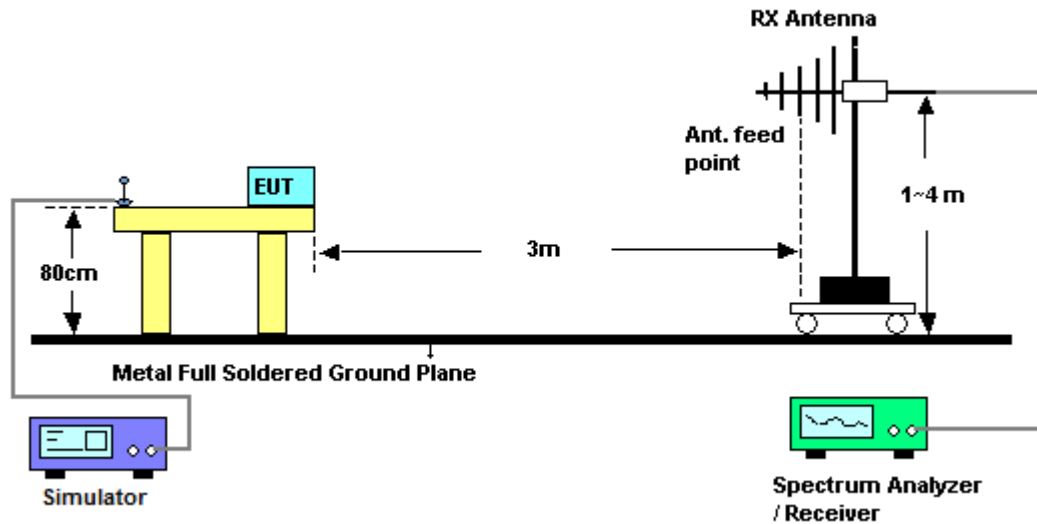

3.9.5 Test Result of Radiated Emission

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	42~46%
Test Engineer :	Kai Wang	Polarization :	Horizontal
Remark :	#9 and #10 are Mobile Station Signal which can be ignored.		

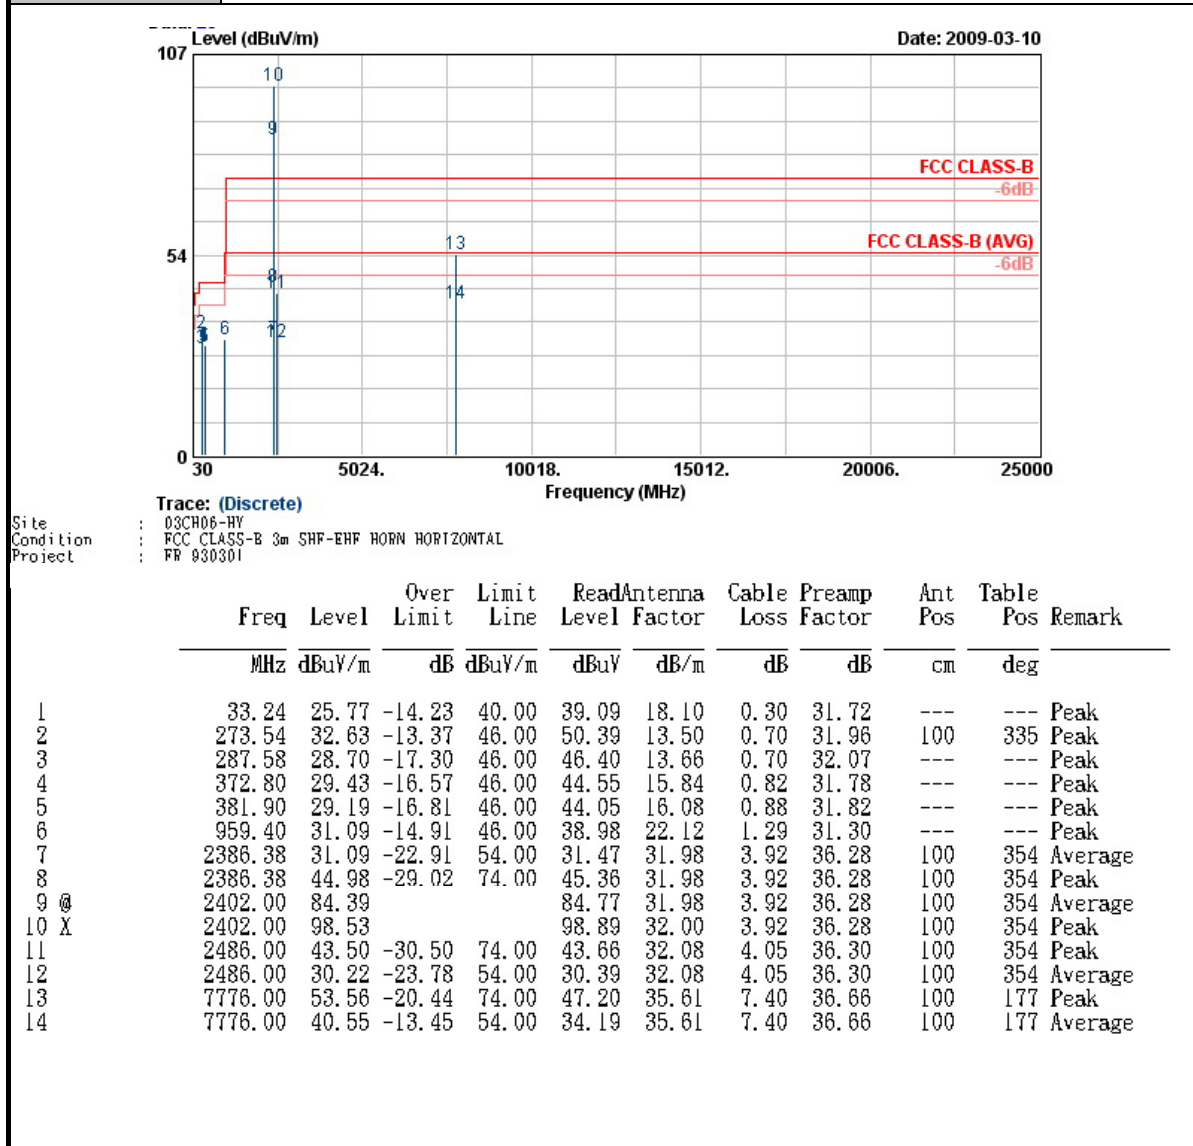




FCC Test Report

Report No. : FR930301B

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	42~46%
Test Engineer :	Kai Wang	Polarization :	Vertical
Remark :	#9 and #10 are Mobile Station Signal which can be ignored.		

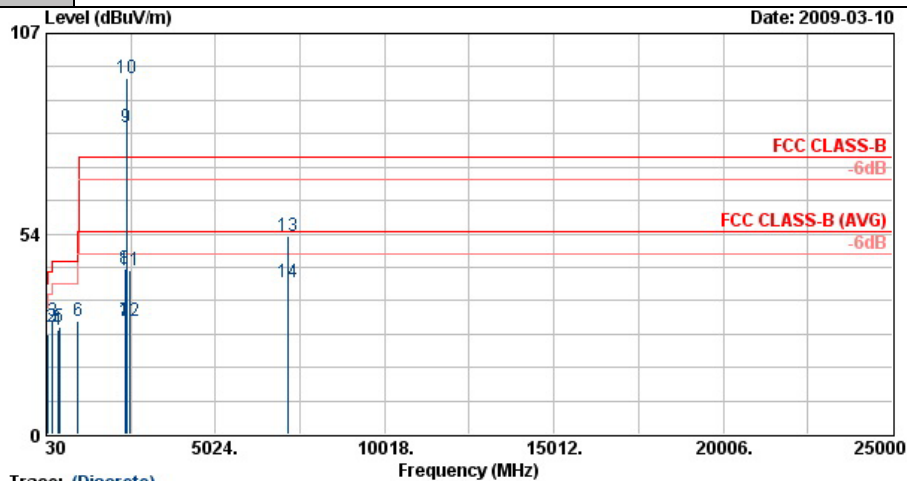

Site : 03CH06-HY
Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
Project : FR 930301
Memo : Mode 1


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	54.03	26.49	-13.51	40.00	49.95	8.08	0.38	31.92	---	---	Peak
2	191.19	28.72	-14.78	43.50	50.48	9.67	0.60	32.03	---	---	Peak
3	214.68	30.32	-13.18	43.50	51.15	10.62	0.64	32.09	100	356	Peak
4	372.80	27.76	-18.24	46.00	42.88	15.84	0.82	31.78	---	---	Peak
5	411.30	28.50	-17.50	46.00	42.87	16.66	0.89	31.92	---	---	Peak
6	959.40	30.15	-15.85	46.00	38.04	22.12	1.29	31.30	---	---	Peak
7	2353.13	30.23	-23.77	54.00	30.71	31.93	3.86	36.27	151	334	Average
8	2353.13	44.17	-29.83	74.00	44.65	31.93	3.86	36.27	151	334	Peak
9 X	2402.00	81.94			82.32	31.98	3.92	36.28	151	334	Average
10 X	2402.00	95.24			95.60	32.00	3.92	36.28	151	334	Peak
11	2484.00	43.77	-30.23	74.00	43.93	32.08	4.05	36.30	151	334	Peak
12	2484.00	30.32	-23.68	54.00	30.49	32.08	4.05	36.30	151	334	Average
13	7182.00	52.72	-21.28	74.00	46.41	35.62	7.16	36.47	100	301	Peak
14	7182.00	40.53	-13.47	54.00	34.22	35.62	7.16	36.47	100	301	Average



FCC Test Report

Report No. : FR930301B

Test Mode :	Mode 2	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	42~46%
Test Engineer :	Kai Wang	Polarization :	Horizontal
Remark :	#9 and #10 are Mobile Station Signal which can be ignored.		

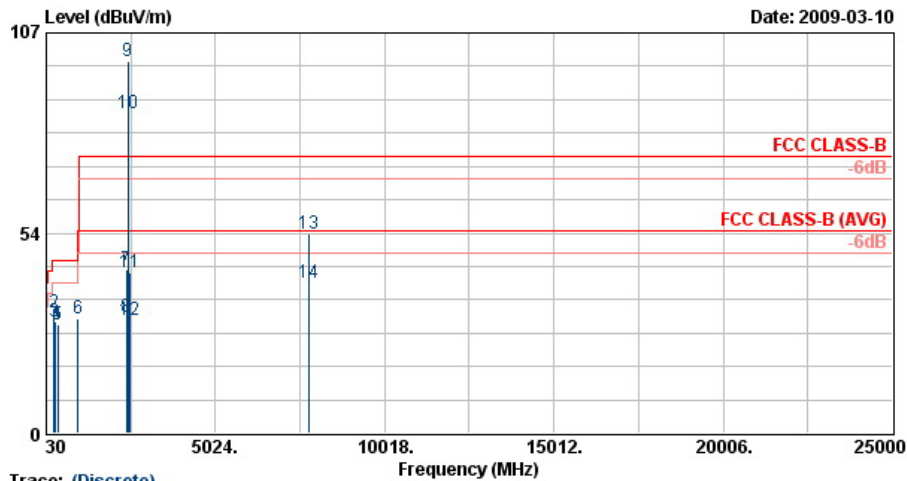

Site : 03CH06-HY
Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
Project : FR 930301


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.54	25.37	-14.63	40.00	37.39	19.30	0.30	31.61	---	---	Peak
2	272.19	32.29	-13.71	46.00	50.04	13.50	0.70	31.95	100	330	Peak
3	286.23	29.83	-16.17	46.00	47.57	13.62	0.70	32.05	---	---	Peak
4	371.40	29.01	-16.99	46.00	44.16	15.82	0.81	31.78	---	---	Peak
5	381.90	28.93	-17.07	46.00	43.79	16.08	0.88	31.82	---	---	Peak
6	959.40	30.46	-15.54	46.00	38.35	22.12	1.29	31.30	---	---	Peak
7	2390.00	43.73	-30.27	74.00	44.11	31.98	3.92	36.28	100	351	Peak
8	2390.00	31.17	-22.83	54.00	31.55	31.98	3.92	36.28	100	351	Average
9 X	2441.00	99.50			99.77	32.04	3.99	36.29	100	351	Peak
10 @	2441.00	85.51			85.78	32.04	3.99	36.29	100	351	Average
11	2486.00	42.99	-31.01	74.00	43.15	32.08	4.05	36.30	100	351	Peak
12	2486.00	30.31	-23.69	54.00	30.48	32.08	4.05	36.30	100	351	Average
13	7782.00	53.26	-20.74	74.00	46.88	35.61	7.41	36.66	100	123	Peak
14	7782.00	40.17	-13.83	54.00	33.80	35.61	7.41	36.66	100	123	Average



FCC Test Report

Report No. : FR930301B

Test Mode :	Mode 2	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	42~46%
Test Engineer :	Kai Wang	Polarization :	Vertical
Remark :	#9 and #10 are Mobile Station Signal which can be ignored.		

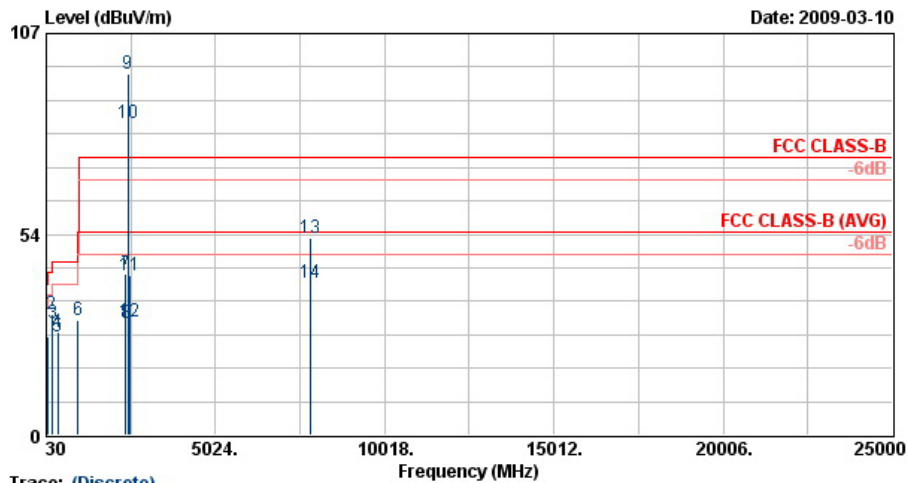

Site : 03CH06-HV
Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
Project : FR 930301


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	54.84	26.13	-13.87	40.00	49.78	7.85	0.40	31.90	---	---	Peak
2	190.38	32.12	-11.38	43.50	53.94	9.60	0.60	32.02	100	236	Peak
3	214.68	29.71	-13.79	43.50	50.54	10.62	0.64	32.09	---	---	Peak
4	371.40	27.52	-18.48	46.00	42.67	15.82	0.81	31.78	---	---	Peak
5	381.90	26.10	-19.90	46.00	40.97	16.08	0.88	31.82	---	---	Peak
6	959.40	30.67	-15.33	46.00	38.55	22.12	1.29	31.30	---	---	Peak
7	2366.00	42.79	-31.21	74.00	43.24	31.93	3.89	36.28	189	309	Peak
8	2366.00	29.88	-24.12	54.00	30.33	31.93	3.89	36.28	189	309	Average
9 X	2441.00	96.40			96.67	32.04	3.99	36.29	189	309	Peak
10 @	2441.00	83.02			83.29	32.04	3.99	36.29	189	309	Average
11	2484.00	42.75	-31.25	74.00	42.91	32.08	4.05	36.30	189	309	Peak
12	2484.00	30.28	-23.72	54.00	30.45	32.08	4.05	36.30	189	309	Average
13	7827.00	52.59	-21.41	74.00	46.20	35.63	7.42	36.67	100	241	Peak
14	7827.00	40.38	-13.62	54.00	33.99	35.63	7.42	36.67	100	241	Average



FCC Test Report

Report No. : FR930301B

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	42~46%
Test Engineer :	Kai Wang	Polarization :	Horizontal
Remark :	#9 and #10 are Mobile Station Signal which can be ignored.		

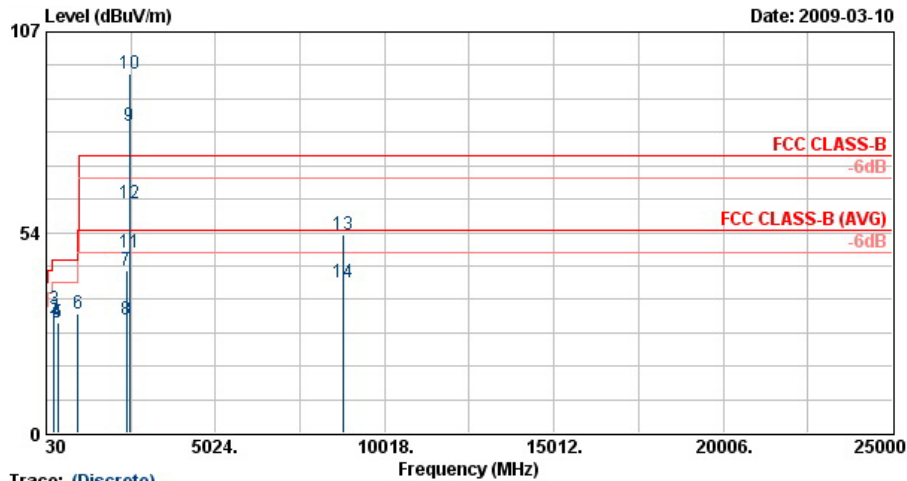

Site : 03CH06-HY
Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
Project : FR 930301


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.27	25.15	-14.85	40.00	36.51	19.90	0.30	31.56	---	---	Peak
2	264.09	30.78	-15.22	46.00	48.29	13.68	0.70	31.89	---	---	Peak
3	272.19	33.02	-12.98	46.00	50.78	13.50	0.70	31.95	100	350	Peak
4	372.80	29.28	-16.72	46.00	44.40	15.84	0.82	31.78	---	---	Peak
5	381.90	29.41	-16.59	46.00	44.28	16.08	0.88	31.82	---	---	Peak
6	959.40	31.73	-14.27	46.00	39.62	22.12	1.29	31.30	---	---	Peak
7	2388.00	43.26	-30.74	74.00	43.64	31.98	3.92	36.28	102	339	Peak
8	2388.00	30.31	-23.69	54.00	30.69	31.98	3.92	36.28	102	339	Average
9 @	2480.00	81.95			82.12	32.08	4.05	36.30	102	339	Average
10 X	2480.00	95.85			96.02	32.08	4.05	36.30	102	339	Peak
11 !	2483.50	48.23	-5.77	54.00	48.40	32.08	4.05	36.30	102	339	Average
12	2483.50	61.17	-12.83	74.00	61.34	32.08	4.05	36.30	102	339	Peak
13	8772.00	53.10	-20.90	74.00	46.41	35.97	7.53	36.81	100	130	Peak
14	8772.00	40.03	-13.97	54.00	33.34	35.97	7.53	36.81	100	130	Average



FCC Test Report

Report No. : FR930301B

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	42~46%
Test Engineer :	Kai Wang	Polarization :	Vertical
Remark :	#9 and #10 are Mobile Station Signal which can be ignored.		

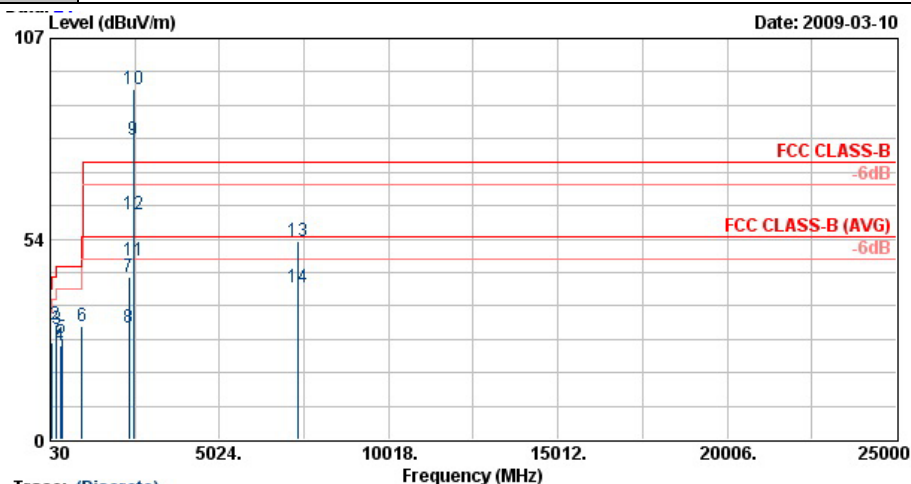

Site : 03CH06-RY
Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
Project : FR 930301

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	54.84	26.04	-13.96	40.00	49.69	7.85	0.40	31.90	---	Peak
2	190.38	30.63	-12.87	43.50	52.45	9.60	0.60	32.02	100	335 Peak
3	220.08	29.30	-16.70	46.00	49.99	10.50	0.70	31.89	---	Peak
4	323.80	25.26	-20.74	46.00	41.81	14.57	0.80	31.93	---	Peak
5	372.80	27.10	-18.90	46.00	42.22	15.84	0.82	31.78	---	Peak
6	959.40	30.04	-15.96	46.00	37.93	22.12	1.29	31.30	---	Peak
7	2356.00	43.41	-30.59	74.00	43.89	31.93	3.86	36.27	180	323 Peak
8	2356.00	30.01	-23.99	54.00	30.49	31.93	3.86	36.27	180	323 Average
9 @	2480.00	79.84			80.01	32.08	4.05	36.30	180	323 Average
10 X	2480.00	93.43			93.60	32.08	4.05	36.30	180	323 Peak
11	2483.50	47.59	-6.41	54.00	47.76	32.08	4.05	36.30	180	323 Average
12	2483.50	59.91	-14.09	74.00	60.08	32.08	4.05	36.30	180	323 Peak
13	7362.00	53.00	-21.00	74.00	46.76	35.56	7.22	36.54	100	219 Peak
14	7362.00	40.72	-13.28	54.00	34.49	35.56	7.22	36.54	100	219 Average

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	105934	N/A	Nov. 08, 2008	Nov. 07, 2009	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 26, 2008	Jun. 25, 2009	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 19, 2009	Feb. 18, 2010	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 19, 2009	Feb. 18, 2010	Conducted (TH02-HY)
Thermal Chamber	TEN BILLION	TTH-D35P	TBN-930701	N/A	Aug. 01, 2008	Jul. 31, 2009	Conducted (TH02-HY)
EMI Receiver	R&S	ESCS 30	100356	9kHz~2.75GHz	Aug. 01, 2008	Jul. 31, 2009	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz~30MHz	Nov. 26, 2008	Nov. 25, 2009	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz~30MHz	Nov. 26, 2008	Nov. 25, 2009	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9kHz~26.5GHz	Oct. 24, 2008	Oct. 23, 2009	Radiation (03CH06-HY)
Spectrum Analyzer	R&S	FSP40	100057	9kHz~40GHz	Oct. 16, 2008	Oct. 15, 2009	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz~1000M Hz	Apr. 24, 2008	Apr. 23, 2009	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz~2GHz	Nov. 12, 2008	Nov. 11, 2009	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1G~18GHz	Aug. 18, 2008	Aug. 17, 2009	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Training Research	AF-0801	95119	8G~18G	Oct. 28, 2008	Oct. 27, 2009	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	BBHA9170251	15G - 40GHz	Oct. 16, 2008	Oct. 15, 2009	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G~26.5GHz	Nov. 11, 2008	Nov. 10, 2009	Radiation (03CH06-HY)
Pre Amplifier	Agilent	310N	186713	9kHz~1GHz	Apr. 21, 2008	Apr. 20, 2009	Radiation (03CH06-HY)
BT Base Station	Anritsu	MT8852B	6K00005722	N/A	Oct. 23, 2007	Oct. 22, 2009	Radiation (03CH06-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
Combined standard uncertainty Uc(y)	1.13		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.26		

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
Combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	± 0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	± 1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	± 0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				

6 Certification of TAF Accreditation



Certificate No. : L1190-081212

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 12, 2008

P1, total 18 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Appendix A. Photographs of EUT

Please refer to Sporton report number EP930301 as below.