



Measurement of RF Interference from a  
Model CA5500B Base Charger

For : Intermatic  
Spring Grove, IL

P.O. No. : 912824

Date Received : January 6, 2006

Date Tested : January 6, 2006

Test Personnel : Richard E. King

Specification : FCC "Code of Federal Regulations" Title 47  
Part 15, Subpart B and Subpart C, Section 15.249  
for Intentional Radiators Operating within the  
902MHz to 928MHz band

Test Report By : *Richard E. King*  
Richard E. King

Witnessed By : Bryan Povish  
Intermatic

Approved By : *Craig W. Fanning*  
Craig W. Fanning  
NARTE Certified: ATL-0188-E  
and EMC-000296-NT



TABLE OF CONTENTS

<u>PARAGRAPH</u>	<u>DESCRIPTION OF CONTENTS</u>	<u>PAGE NO.</u>
1.0	INTRODUCTION.....	4
1.1	Description of Test Item.....	4
1.2	Purpose .....	4
1.3	Deviations, Additions and Exclusions.....	4
1.4	Applicable Documents .....	4
1.5	Laboratory Identification .....	4
1.6	Laboratory Conditions .....	4
2.0	TEST ITEM SET-UP AND OPERATION .....	4
2.1	Power Input.....	5
2.2	Grounding.....	5
2.3	Peripheral Equipment.....	5
2.4	Interconnect Cables .....	5
2.5	Operational Mode.....	5
2.6	Test Item Modifications .....	5
3.0	TEST EQUIPMENT .....	5
3.1	Test Equipment List .....	5
3.2	Calibration Traceability.....	5
3.3	Measurement Uncertainty .....	5
4.0	REQUIREMENTS, PROCEDURES AND RESULTS .....	6
4.1	Powerline Conducted Emissions .....	6
4.1.1	Requirements .....	6
4.1.2	Procedures.....	6
4.1.3	Results .....	6
4.2	Radiated Measurements .....	7
4.2.1	Receiver.....	7
4.2.1.1	Requirements.....	7
4.2.1.2	Procedures .....	7
4.2.1.3	Results .....	8
4.2.2	Transmitters .....	8
4.2.2.1	Requirements.....	8
4.2.2.2	Procedures .....	9
4.2.2.3	Results .....	9
4.3	Occupied Bandwidth Measurements.....	10
4.3.1	Requirement.....	10
4.3.2	Procedures.....	10
4.3.3	Results .....	10
5.0	CONCLUSIONS .....	10
6.0	CERTIFICATION.....	10
7.0	ENDORSEMENT DISCLAIMER.....	10
	TABLE I - EQUIPMENT LIST .....	12

**THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.**



REVISION HISTORY

Revision	Date	Description
—	20 July 2006	Initial release

## Measurement of RF Emissions from a model CA5500B Base Charger

### **1.0 INTRODUCTION:**

**1.1 Description of Test Item** - This document represents the results of the series of radio interference measurements performed on a model CA5500B Base Charger, (hereinafter referred to as the test item). No serial number was assigned to the test item. The test item was manufactured and submitted for testing by Intermatic located in Spring Grove, IL.

**1.2 Purpose** - The test series was performed to determine if the test item meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109 for receivers, and Subpart C, Sections 15.207 and 15.249 for Intentional Radiators Operating within the 902MHz -928MHz band. Testing was performed in accordance with ANSI C63.4-2003.

**1.3 Deviations, Additions and Exclusions** - There were no deviations, additions to, or exclusions from the test specification during this test series.

**1.4 Applicable Documents** - The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2005
- ANSI C63.4-2003, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

**1.5 Laboratory Identification** - This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

**1.6 Laboratory Conditions** The temperature at the time of the test was 23°C and the relative humidity was 25%.

### **2.0 TEST ITEM SET-UP AND OPERATION:**

The test item is a Base Charger, model CA5500B. A block diagram of the test item setup is shown as Figure 1.

**2.1 Power Input** - The test item obtained 120V 60Hz power via a 3 wire, one meter long, unshielded power cord. The high and low leads were connected through a line impedance stabilization network (LISN) which was located on the copper ground plane. The network complies with the requirements of Paragraph 4.1.2 of ANSI C63.4-2003.

**2.2 Grounding** - The test item was grounded through the third wire of its input power cord.

**2.3 Peripheral Equipment** - The test item was submitted for testing with no peripheral equipment.

**2.4 Interconnect Cables** - The test item has no ports for interconnect cables.

**2.5 Operational Mode** - For all tests, the test item was placed on an 80cm high non-conductive stand. The test item was energized. For the transmitter tests, the test item was set up so that upon power up it would transmit continuously at 908.4MHz. For the receiver tests, the test item was then reprogrammed so that upon power up it would receive continuously at 908.4MHz.

**2.6 Test Item Modifications** - No modifications were required for compliance.

**3.0 TEST EQUIPMENT:**

**3.1 Test Equipment List** - A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

**3.2 Calibration Traceability** Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

**3.3 Measurement Uncertainty** - All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements		
Combined Standard Uncertainty	1.07	-1.07
Expanded Uncertainty (95% confidence)	2.1	-2.1

Radiated Emission Measurements		
Combined Standard Uncertainty	2.26	-2.18
Expanded Uncertainty (95% confidence)	4.5	-4.4

**4.0 REQUIREMENTS, PROCEDURES AND RESULTS:**

**4.1 Powerline Conducted Emissions**

**4.1.1 Requirements** – All radio frequency voltages on the power lines for any frequency or frequencies of an intentional radiator shall not exceed the limits in the following table:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the test item is considered to have met both requirements and measurements do not need to be performed using the Average detector.

**4.1.2 Procedures** - The interference on each power lead was measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. The meter terminal of the LISN not under test was terminated with 50 ohm. Measurements were first made over the entire frequency range from 150kHz through 30MHz with a peak detector and the results were automatically plotted. The data thus obtained was then searched by the computer for the highest levels. Quasi-peak measurements were automatically performed at the frequencies selected from the highest peak measurements, and the results printed.

**4.1.3 Results** - The plots of the peak preliminary conducted voltage levels on each power line with the test item in receiver mode are presented on pages 16 and 17. The conducted limit for receivers is shown as a reference. The final quasi-peak results are presented on pages 18 and 19.

The plots of the peak preliminary conducted voltage levels on each power line with the test item in transmit mode are presented on pages 20 and 21. The conducted limit for intentional radiators is shown as a reference. The final quasi-peak results are presented on pages 22 and 23.

Photographs of the test setup for conducted emission levels are shown on Figure 2.

## 4.2 Radiated Measurements

### 4.2.1 Receiver

#### 4.2.1.1 Requirements - All emanations from a receiver shall be below the levels

shown on the following table:

#### RADIATION LIMITS FOR RECEIVERS

Frequency MHz	Distance between Test Item And Antenna in Meters	Field Strength uV/m	Field Strength dBuV/m
30-88	3	100	40
88-216	3	150	43.5
216-960	3	200	46
Above 960	3	500	54

Note: The tighter limit shall apply at the edge between the two frequency bands. Measurements are required up to 30MHz to 5GHz.

#### 4.2.1.2 Procedures - All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-

tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4 2003 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Since quasi-peak and average measurements require long integration times, it is not practical to automatically sweep through the quasi-peak or average levels. Therefore, radiated emissions from the test item were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector.

For preliminary radiated emissions sweeps from 30MHz to 5GHz, the broadband measuring antenna was positioned at a 3 meter distance from the test item. The frequency range from 30MHz to 5GHz was investigated using a peak detector function with the bilog antenna below 1GHz and the double-ridged waveguide antenna above 1GHz. The maximum levels were plotted.



Final radiated emissions were performed on all significant broadband and narrowband emissions found in the preliminary sweeps using the following methods:

- 1) Measurements below 1GHz were made using a quasi-peak detector and a bilog antenna. Measurements above 1GHz were made using an average detector and a double ridged waveguide antenna.
- 2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken:
  - a. The test item was rotated so that all of its sides were exposed to the receiving antenna.
  - b. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - c. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.

**4.2.1.3 Results** - The preliminary plots, with the test item receiving at 908.4MHz, are presented on pages 24 through 27. The plots are presented for a reference only, and are not used to determine compliance. The final radiated levels are presented on page 28. As can be seen from the data, all emissions measured from the test item were within the specification limits for receivers. The emissions level closet to the limit (worst case) occurred at 908.4MHz. The emissions level at this frequency was 8.9dB within the limit. Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown on Figure 3.

**4.2.2 Transmitters -**

**4.2.2.1 Requirements** - The test item must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq.

Paragraph 15.249(a) has the following radiated emission limits:

Fundamental Frequency MHz	Field Intensity mV/m @ 3 meters	Field Strength Harmonics and Spurious uV/m @ 3 meters
902 to 928	50	500

In addition, emissions appearing in the Restricted Bands of Operation listed in paragraph 15.205(a) shall not exceed the general requirements shown in paragraph 15.209.



**4.2.2.2 Procedures** - All measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

A preliminary radiated emissions test was performed to determine the emission characteristics of the test item. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the test item. The entire frequency range from 30MHz to 10GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final emission tests were then manually performed over the frequency range of 30MHz to 9.1GHz. Between 30MHz and 1000MHz, a bilog antenna was used as the pick-up device. A broadband double ridged waveguide antenna was used as the pick-up device for all frequencies above 1GHz. All significant broadband and narrowband signals were measured and recorded.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- (1) The test item was rotated so that all of its sides were exposed to the receiving antenna.
- (2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- (3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- (4) For hand-held or body-worn devices, the test item was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.

**4.2.2.3 Results** - The preliminary plots, with the test item transmitting at 908.4MHz, are presented on data pages 29 through 32. The plots are presented for a reference only, and are not used to determine compliance. The final radiated levels, with the test item transmitting at 908.4MHz, are presented on data page 33. As can be seen from the data, all emissions measured from the test item were within the specification limits. The emissions level closest to the limit (worst case) occurred at 908.4MHz. The emissions level at this frequency was 3.6dB within the limit. Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown on Figure 3.



### **4.3 Occupied Bandwidth Measurements**

**4.3.1 Requirement** - In accordance with paragraph 15.249(d), all emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuate by at least 50dB below the level of the fundamental or to the general radiated emissions limits in 15.209, which ever is the lesser attenuation.

**4.3.2 Procedures** - The test item was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 100 kHz and span was set to 33 MHz. The frequency spectrum near the fundamental was plotted.

**4.3.3 Results** - The plot of the emissions near the fundamental frequency is presented on data page 34. As can be seen from this data page, the transmitter met the occupied bandwidth requirements. In addition, the 99% emission bandwidth measured 150 kHz when using the analyzer's special function key with the measurement BW set to 30 kHz.

### **5.0 CONCLUSIONS:**

It was determined that the Intermatic Base Charger, Part No. CA5500B, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109 for receivers, and Subpart C, Sections 15.207 and 15.249 for Intentional Radiators Operating within the 902MHz -928MHz band, when tested per ANSI C63.4-2003.

### **6.0 CERTIFICATION:**

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the test item at the test date as operated by Intermatic personnel. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

### **7.0 ENDORSEMENT DISCLAIMER:**

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



TABLE I: TEST EQUIPMENT LIST

ELITE ELECTRONIC ENG. INC.								Page: 1
Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Cal Inv	Due Date
Equipment Type: ACCESSORIES, MISCELLANEOUS								
XLJW	5W, 50 OHM TERMINATION	JFW INDUSTRIES	50T-052	31	DC-2GHZ	10/10/05	12	10/10/06
XZG4	ATTENUATOR/SWITCH DRIVER	HEWLETT PACKARD	11713A	2223A01683	---		N/A	
Equipment Type: AMPLIFIERS								
APK4	PREAMPLIFIER OPT HO2	HEWLETT PACKARD	8449B	3008A00329	1-26.5GHZ	01/27/05	12	01/27/06
Equipment Type: ANTENNAS								
NDO0	TUNED DIPOLE ANTENNA	EMCO	3121C-DB4	311	400-1000MHZ	02/01/05	12	02/01/06
NTA1	BIBLOG ANTENNA	CHASE EMC LTD.	BIBLOG CBL611	2054	0.03-2GHZ	08/08/05	12	08/08/06
NWHO	RIDGED WAVE GUIDE	SENSOR	4105	2081	1-12.4GHZ	10/01/05	12	10/01/06
Equipment Type: ATTENUATORS								
T1E1	10DB, 25W ATTENUATOR	WEINSCHTEL	46-10-43	AU1883	DC-18GHZ	12/02/04	12	12/02/05
Equipment Type: CONTROLLERS								
CDS2	COMPUTER	GATEWAY	MFATXPNT NMZ	0028483108	1.8GHZ			N/A
Equipment Type: PROBES; CLAMP-ON & LISNS								
PLL9	50UH LISN 462D	ELITE	462D/70A	010	0.01-400MHZ	03/04/05	12	03/04/06
PLLA	50UH LISN 462D	ELITE	462D/70A	011	0.01-400MHZ	03/04/05	12	03/04/06
Equipment Type: PRINTERS AND PLOTTERS								
HRE1	LASER JET 5P	HEWLETT PACKARD	C3150A	USHB061052	---			N/A
Equipment Type: RECEIVERS								
RACA	RF PRESELECTOR	HEWLETT PACKARD	85685A	2926A00980	20HZ-2GHZ	02/05/05	12	02/05/06
RAEC	SPECTRUM ANALYZER	HEWLETT PACKARD	8566B	3014A06690	100HZ-22GHZ	02/02/05	12	02/02/06
RAF3	QUASI PEAK ADAPTER	HEWLETT PACKARD	85650A	3303A01775	0.01-1000MHZ	02/04/05	12	02/04/06

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable  
 Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

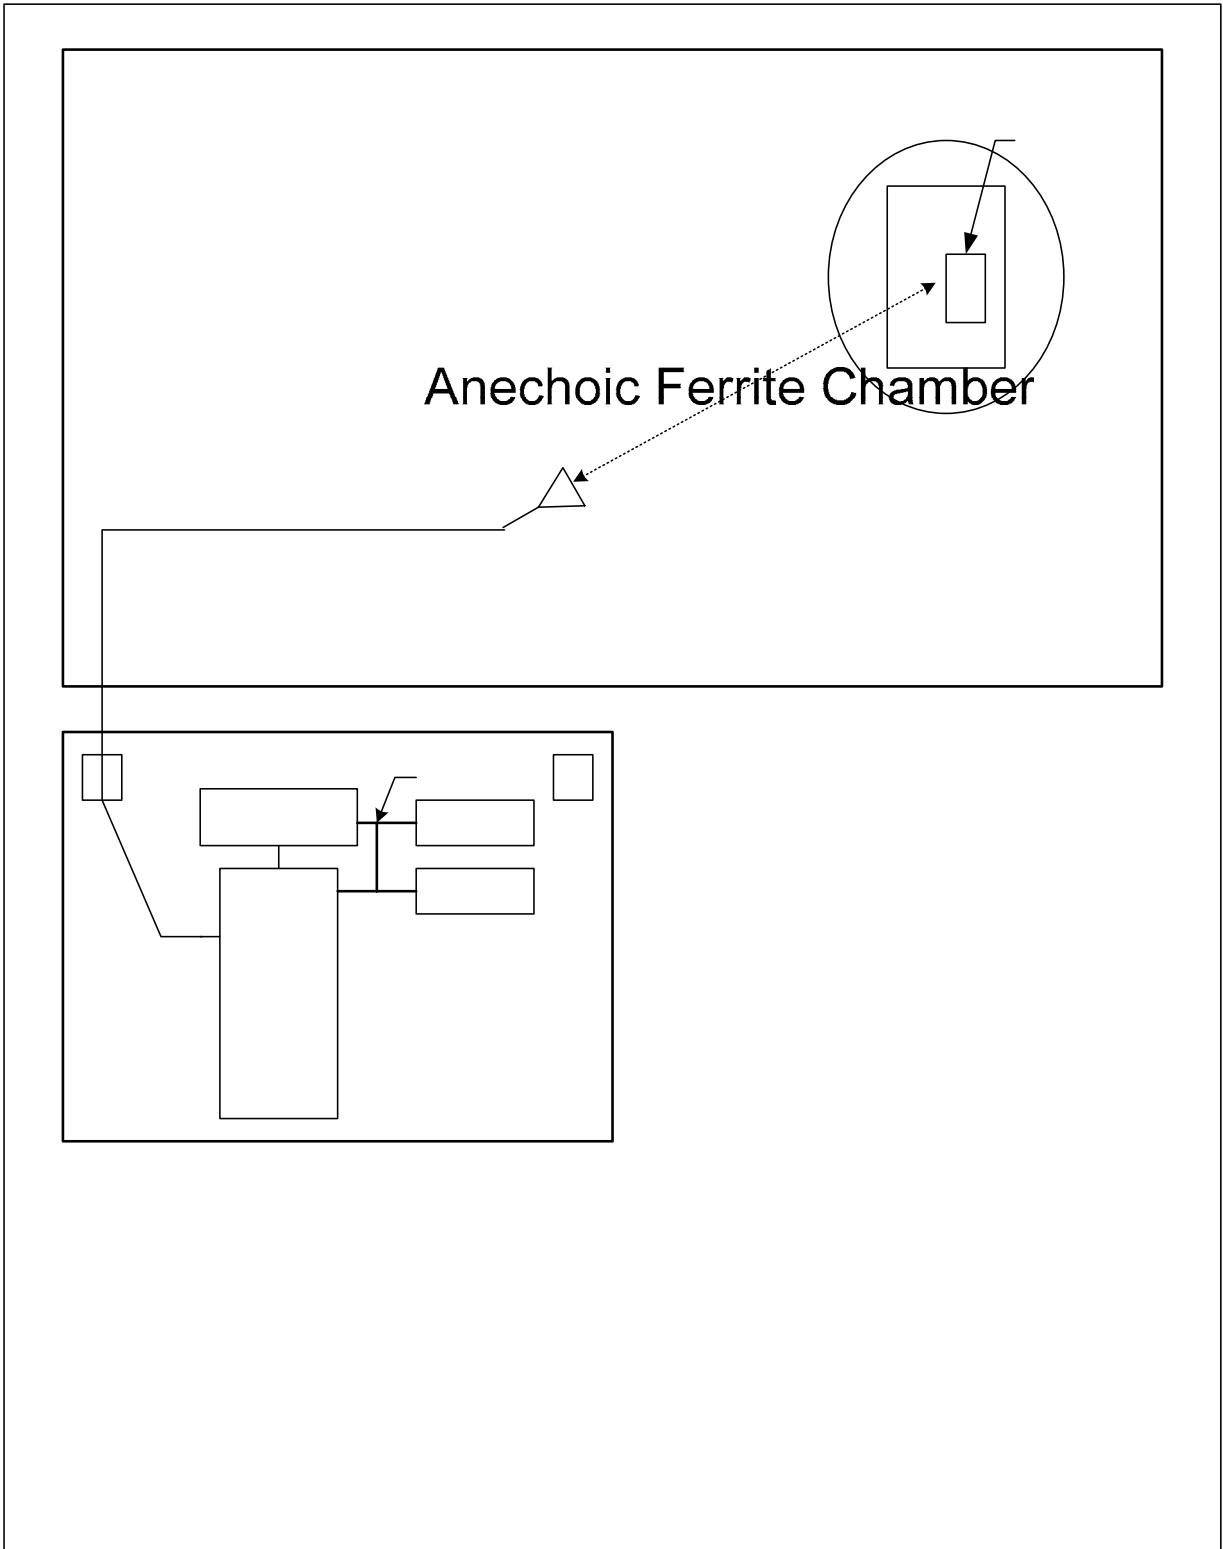


Figure 2



Test Set-up for Conducted Emissions




Figure 3




Test Set-up for Radiated Emissions, 30MHz to 1GHz – Horizontal Polarization



Test Set-up for Radiated Emissions, 30MHz to 1GHz – Vertical Polarization

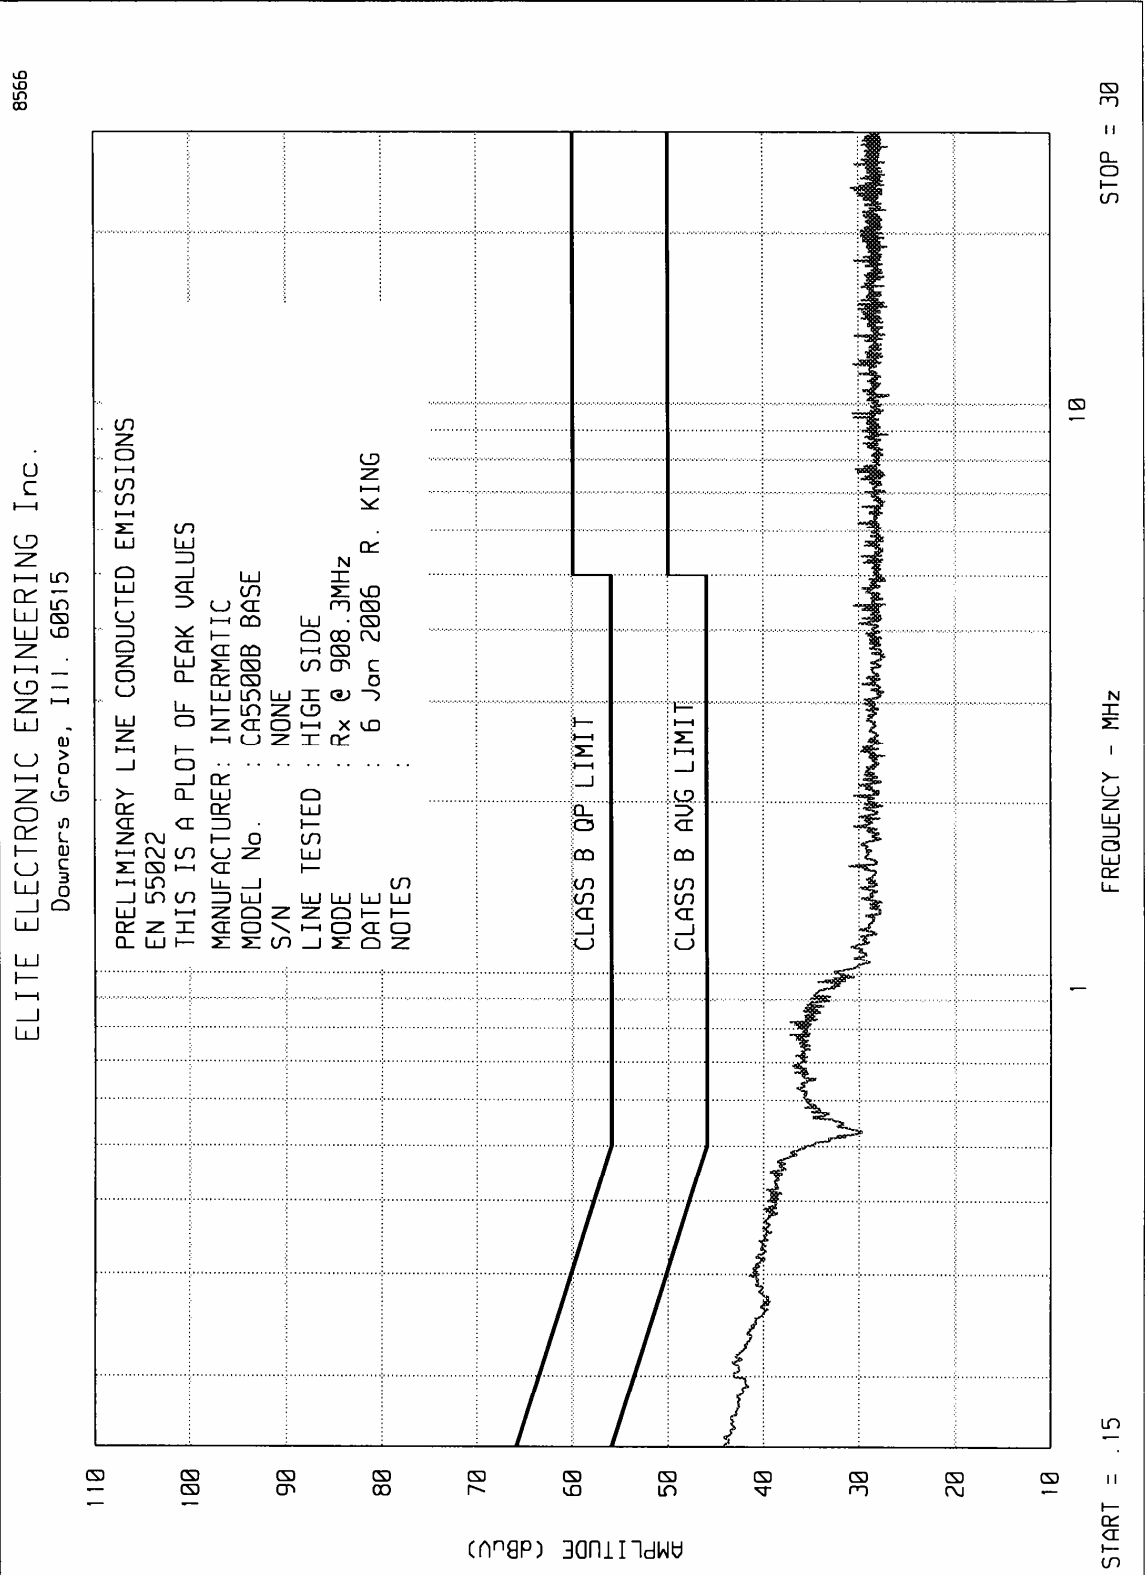

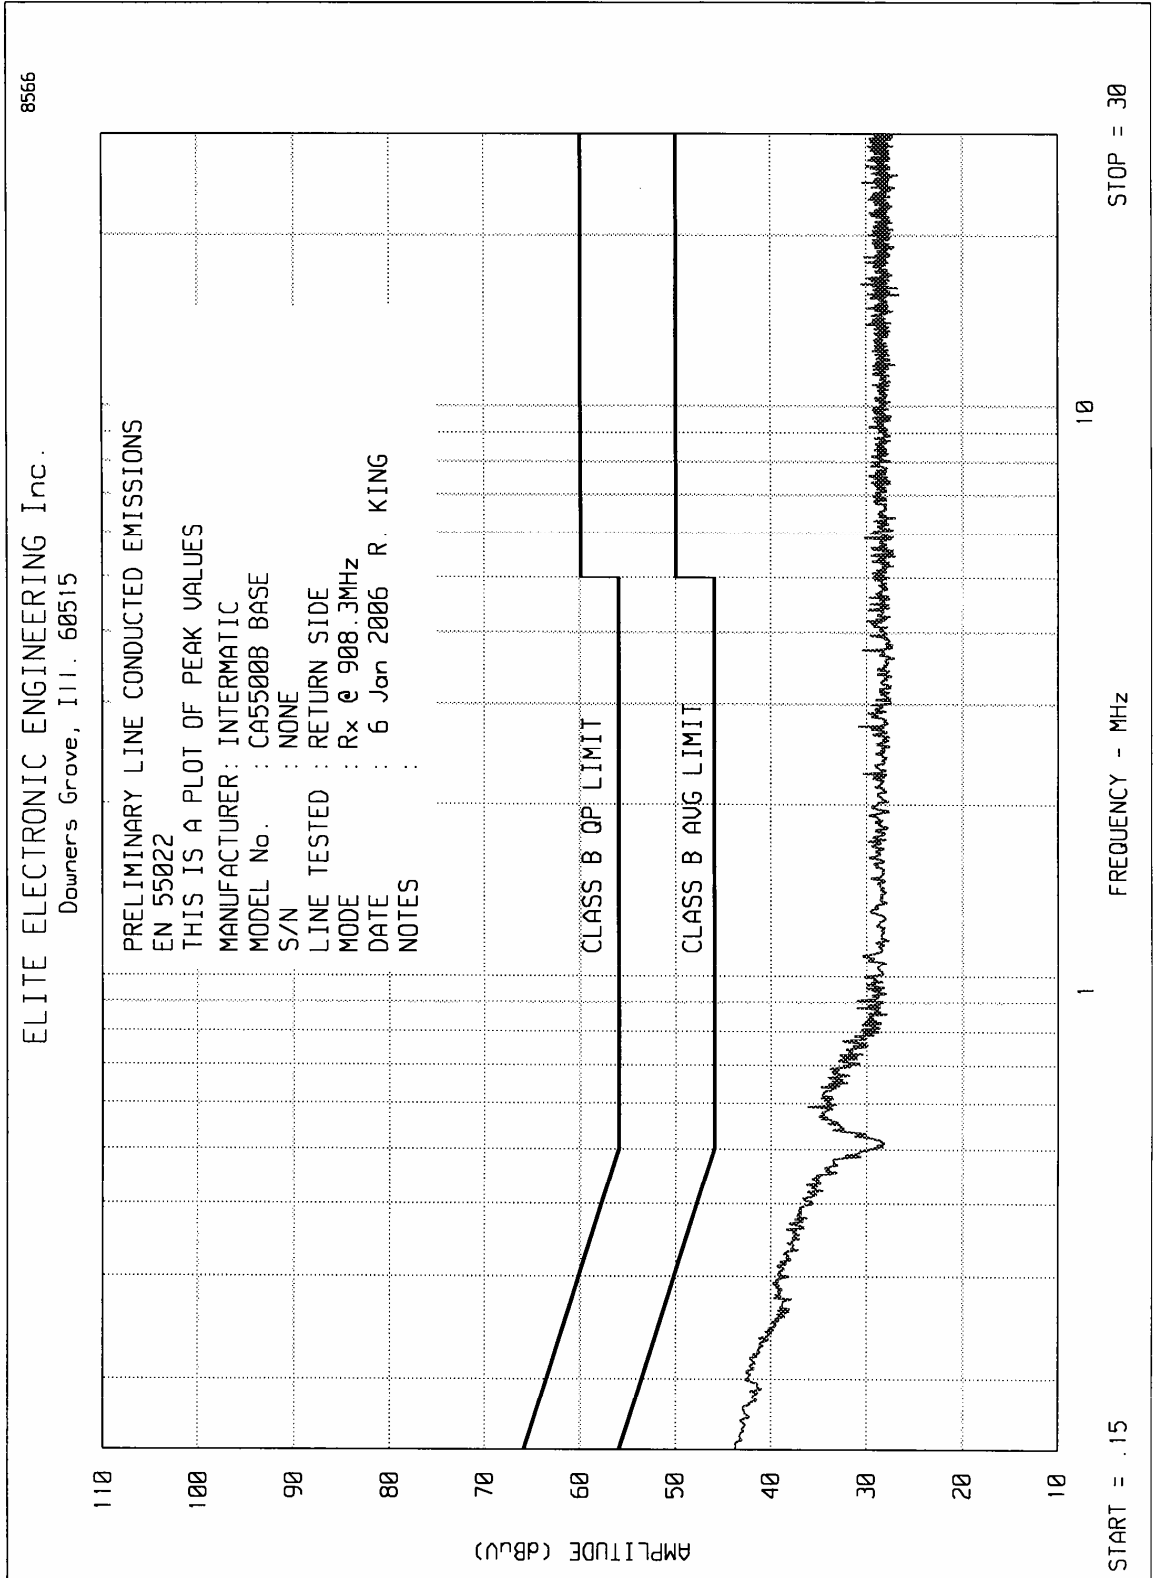





ETR No.  
ELITE ELECTRONIC ENGINEERING CO.

MANUFACTURER : INTERMATIC  
MODEL : CA5500B BASE  
S/N : NONE  
SPECIFICATION : EN 55022, CLASS B  
TEST : LINE CONDUCTED EMISSIONS  
LINE TESTED : HIGH SIDE  
MODE : Rx @ 908.3MHz  
DATE : 6 Jan 2006  
NOTES :  
RECEIVER : HP 8566 w/ HP85650A QP ADAPTOR  
VALUES MEASURED WITH QP DETECTOR USING 9kHz BANDWIDTH

FREQUENCY MHz	METER RDG. dBuV	QP LIMIT dBuV	AVG RDG dBuV	AVG LIMIT dBuV	NOTES
.150	34.8	66.0		56.0	
.287	30.7	60.6		50.6	
.305	30.5	60.1		50.1	
.352	29.7	58.9		48.9	
.447	28.2	56.9		46.9	
.460	27.8	56.7		46.7	
.771	26.2	56.0		46.0	
.826	25.9	56.0		46.0	
1.802	24.6	56.0		46.0	
3.115	24.3	56.0		46.0	
5.004	23.4	60.0		50.0	
6.202	23.8	60.0		50.0	
9.582	23.6	60.0		50.0	
11.692	23.6	60.0		50.0	
15.200	23.6	60.0		50.0	
19.753	23.6	60.0		50.0	
20.148	23.4	60.0		50.0	
24.599	23.6	60.0		50.0	
26.852	23.4	60.0		50.0	

CHECKED BY: Richard King  
R. KING





ETR No.  
ELITE ELECTRONIC ENGINEERING CO.

MANUFACTURER : INTERMATIC  
MODEL : CA5500B BASE  
S/N : NONE  
SPECIFICATION : EN 55022, CLASS B  
TEST : LINE CONDUCTED EMISSIONS  
LINE TESTED : RETURN SIDE  
MODE : Rx @ 908.3MHz  
DATE : 6 Jan 2006  
NOTES :  
RECEIVER : HP 8566 w/ HP85650A QP ADAPTOR  
VALUES MEASURED WITH QP DETECTOR USING 9kHz BANDWIDTH

FREQUENCY MHz	METER RDG. dBuV	QP LIMIT dBuV	AVG RDG dBuV	AVG LIMIT dBuV	NOTES
.150	34.2	66.0		56.0	
.281	28.8	60.8		50.8	
.350	27.3	59.0		49.0	
.444	25.3	57.0		47.0	
.581	25.5	56.0		46.0	
.630	25.1	56.0		46.0	
.829	24.6	56.0		46.0	
1.478	24.5	56.0		46.0	
2.738	24.4	56.0		46.0	
4.372	24.4	56.0		46.0	
6.934	23.8	60.0		50.0	
9.159	24.0	60.0		50.0	
11.727	23.8	60.0		50.0	
15.617	23.6	60.0		50.0	
19.334	23.4	60.0		50.0	
21.658	23.6	60.0		50.0	
24.643	23.6	60.0		50.0	
26.969	23.6	60.0		50.0	

CHECKED BY: Richard King  
R. KING

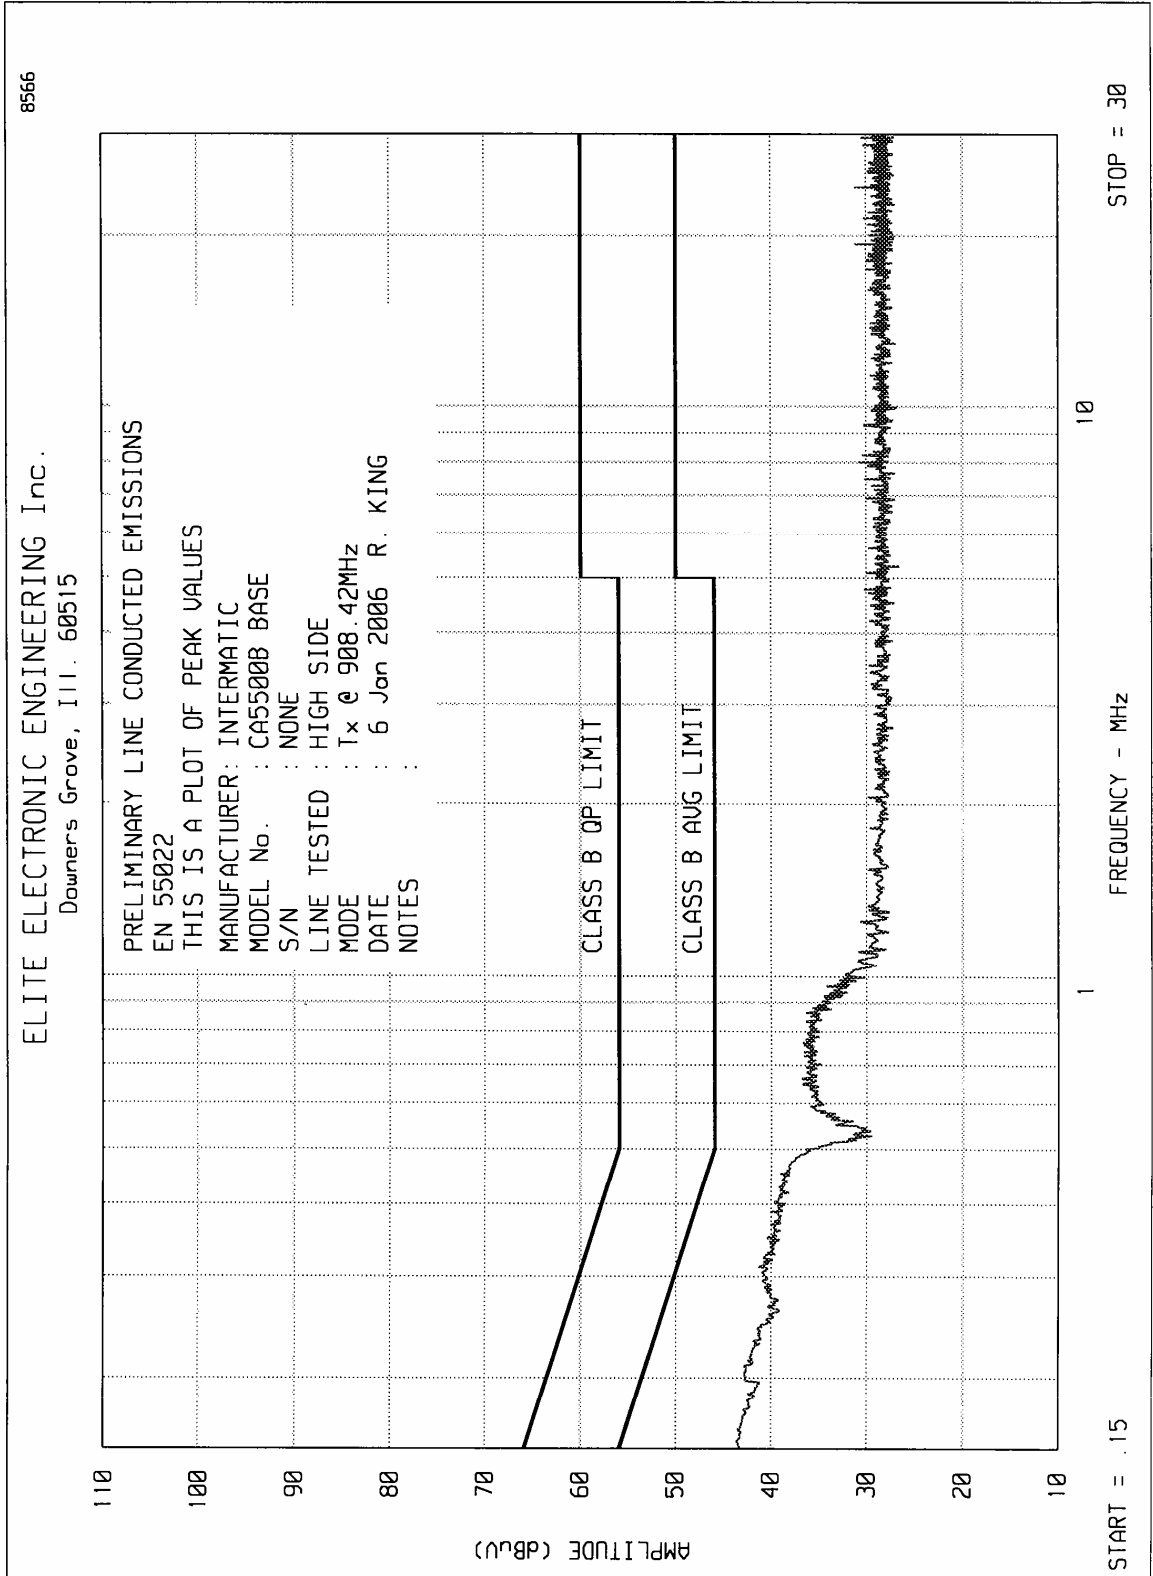

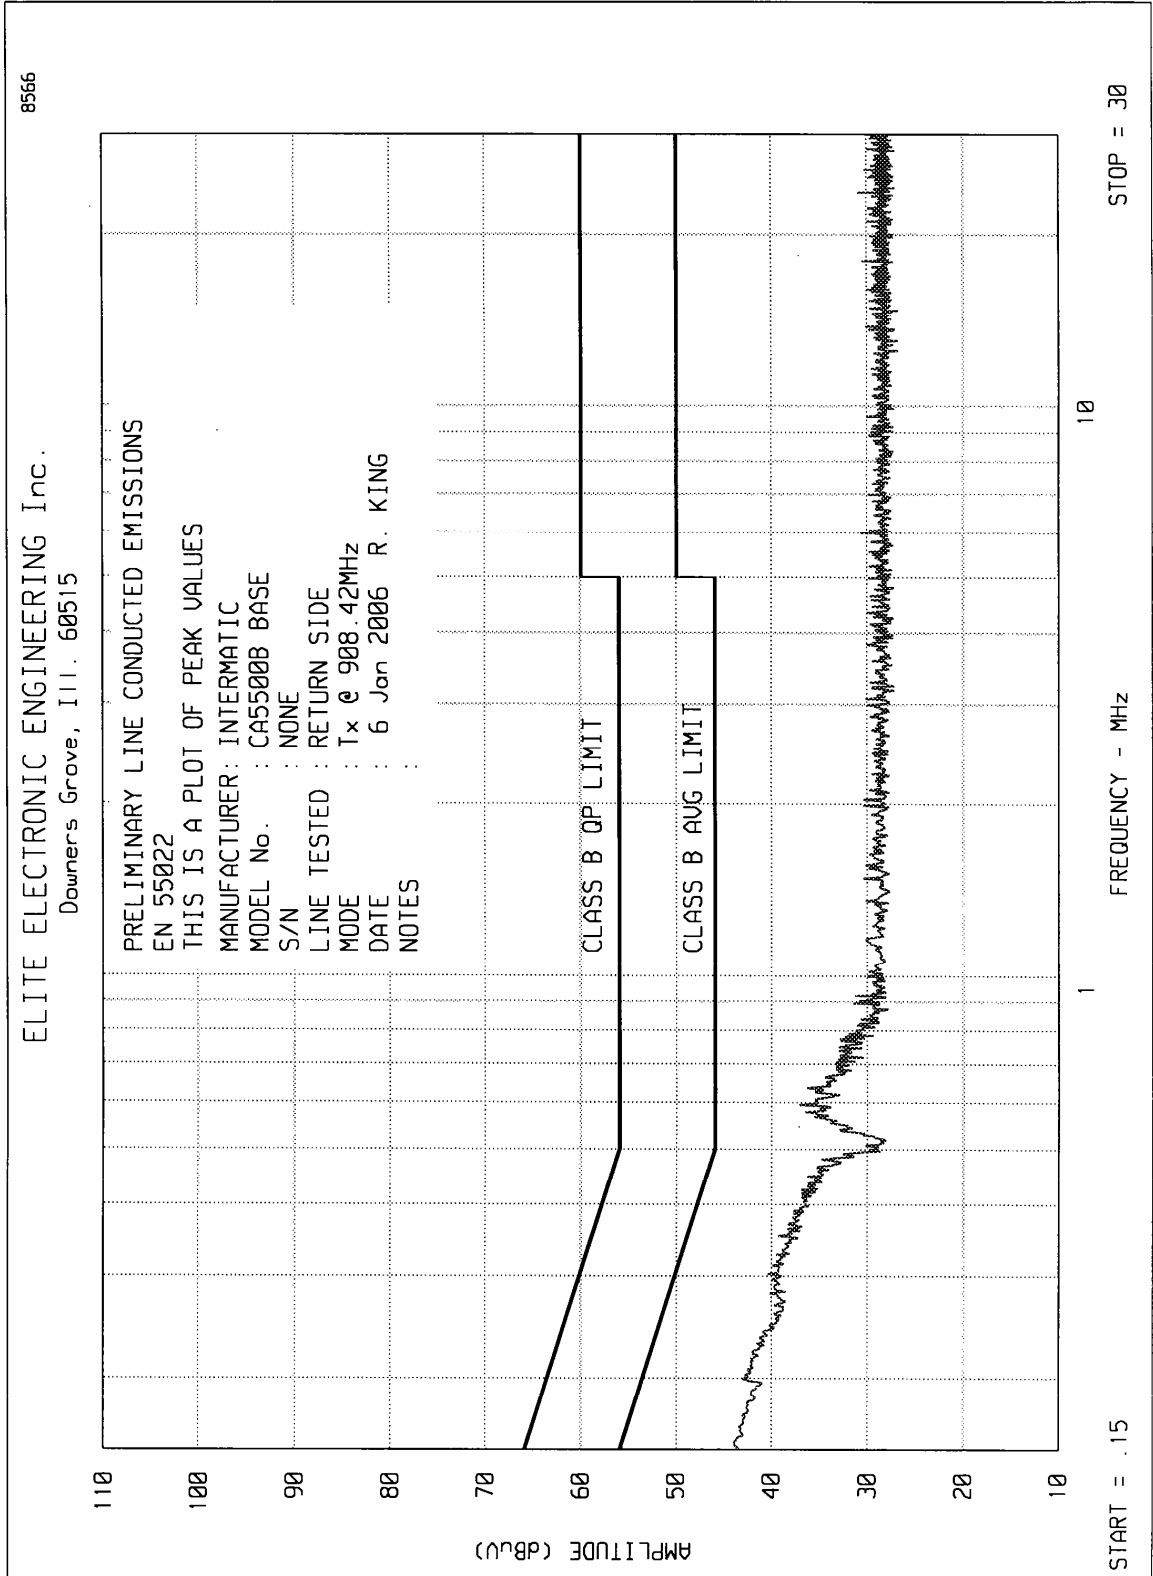



ETR No.  
ELITE ELECTRONIC ENGINEERING CO.

MANUFACTURER : INTERMATIC  
MODEL : CA5500B BASE  
S/N : NONE  
SPECIFICATION : EN 55022, CLASS B  
TEST : LINE CONDUCTED EMISSIONS  
LINE TESTED : HIGH SIDE  
MODE : Tx @ 908.42MHz  
DATE : 6 Jan 2006  
NOTES :  
RECEIVER : HP 8566 w/ HP85650A QP ADAPTOR  
VALUES MEASURED WITH QP DETECTOR USING 9kHz BANDWIDTH

FREQUENCY MHz	METER RDG. dBuV	QP LIMIT dBuV	AVG RDG dBuV	AVG LIMIT dBuV	NOTES
.150	35.0	66.0		56.0	
.301	30.9	60.2		50.2	
.343	30.3	59.1		49.1	
.441	28.5	57.0		47.0	
.652	26.3	56.0		46.0	
.823	25.7	56.0		46.0	
.850	25.9	56.0		46.0	
2.044	24.3	56.0		46.0	
3.490	24.4	56.0		46.0	
4.790	24.3	56.0		46.0	
7.330	23.4	60.0		50.0	
9.298	23.6	60.0		50.0	
12.102	23.6	60.0		50.0	
16.017	23.6	60.0		50.0	
19.241	23.4	60.0		50.0	
21.392	23.4	60.0		50.0	
24.222	23.6	60.0		50.0	
27.315	23.6	60.0		50.0	

CHECKED BY: Richard King  
R. KING





ETR No.  
ELITE ELECTRONIC ENGINEERING CO.

MANUFACTURER : INTERMATIC  
MODEL : CA5500B BASE  
S/N : NONE  
SPECIFICATION : EN 55022, CLASS B  
TEST : LINE CONDUCTED EMISSIONS  
LINE TESTED : RETURN SIDE  
MODE : Tx @ 908.42MHz  
DATE : 6 Jan 2006  
NOTES :  
RECEIVER : HP 8566 w/ HP85650A QP ADAPTOR  
VALUES MEASURED WITH QP DETECTOR USING 9kHz BANDWIDTH


FREQUENCY MHz	METER RDG. dBuV	QP LIMIT dBuV	AVG RDG dBuV	AVG LIMIT dBuV	NOTES
.150	34.4	66.0		56.0	
.292	29.4	60.5		50.5	
.343	27.9	59.1		49.1	
.585	25.6	56.0		46.0	
.625	25.4	56.0		46.0	
.888	24.5	56.0		46.0	
1.978	24.4	56.0		46.0	
3.031	24.4	56.0		46.0	
4.597	24.4	56.0		46.0	
6.964	23.6	60.0		50.0	
9.565	23.6	60.0		50.0	
12.336	23.6	60.0		50.0	
15.637	23.6	60.0		50.0	
19.136	23.6	60.0		50.0	
21.742	23.6	60.0		50.0	
23.681	23.6	60.0		50.0	
28.232	23.6	60.0		50.0	


CHECKED BY: Richard King  
R. KING

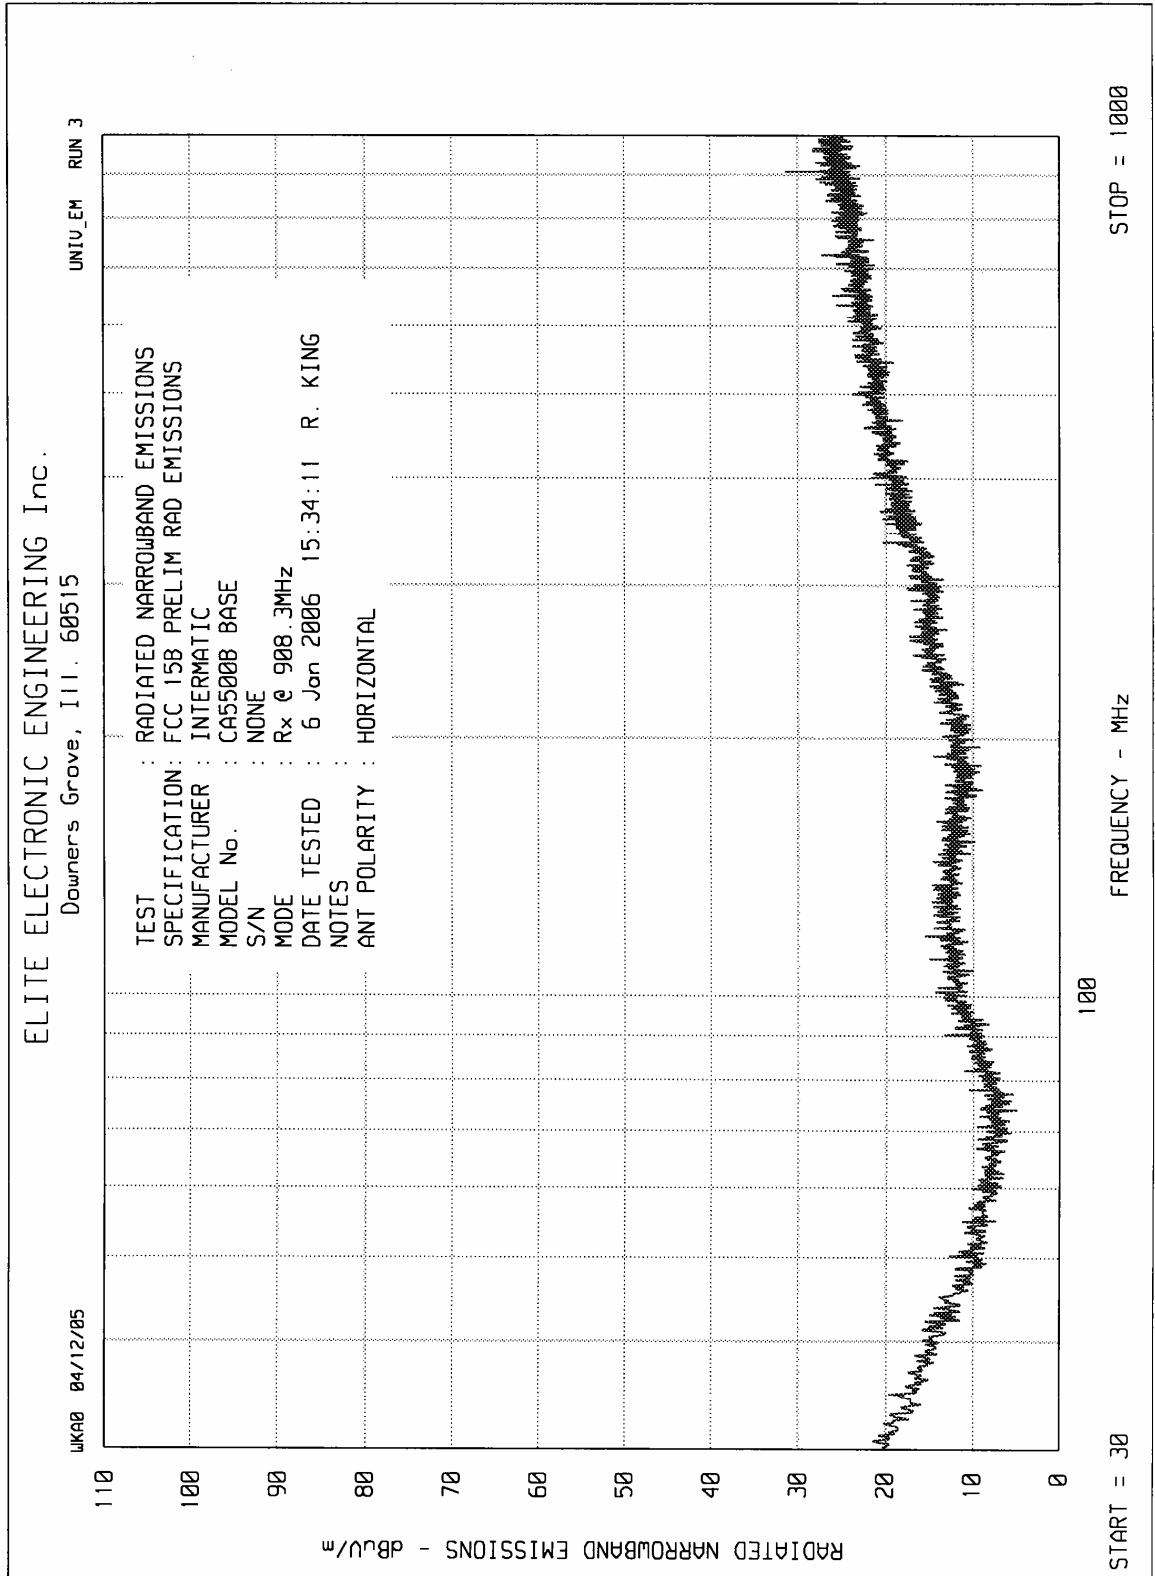

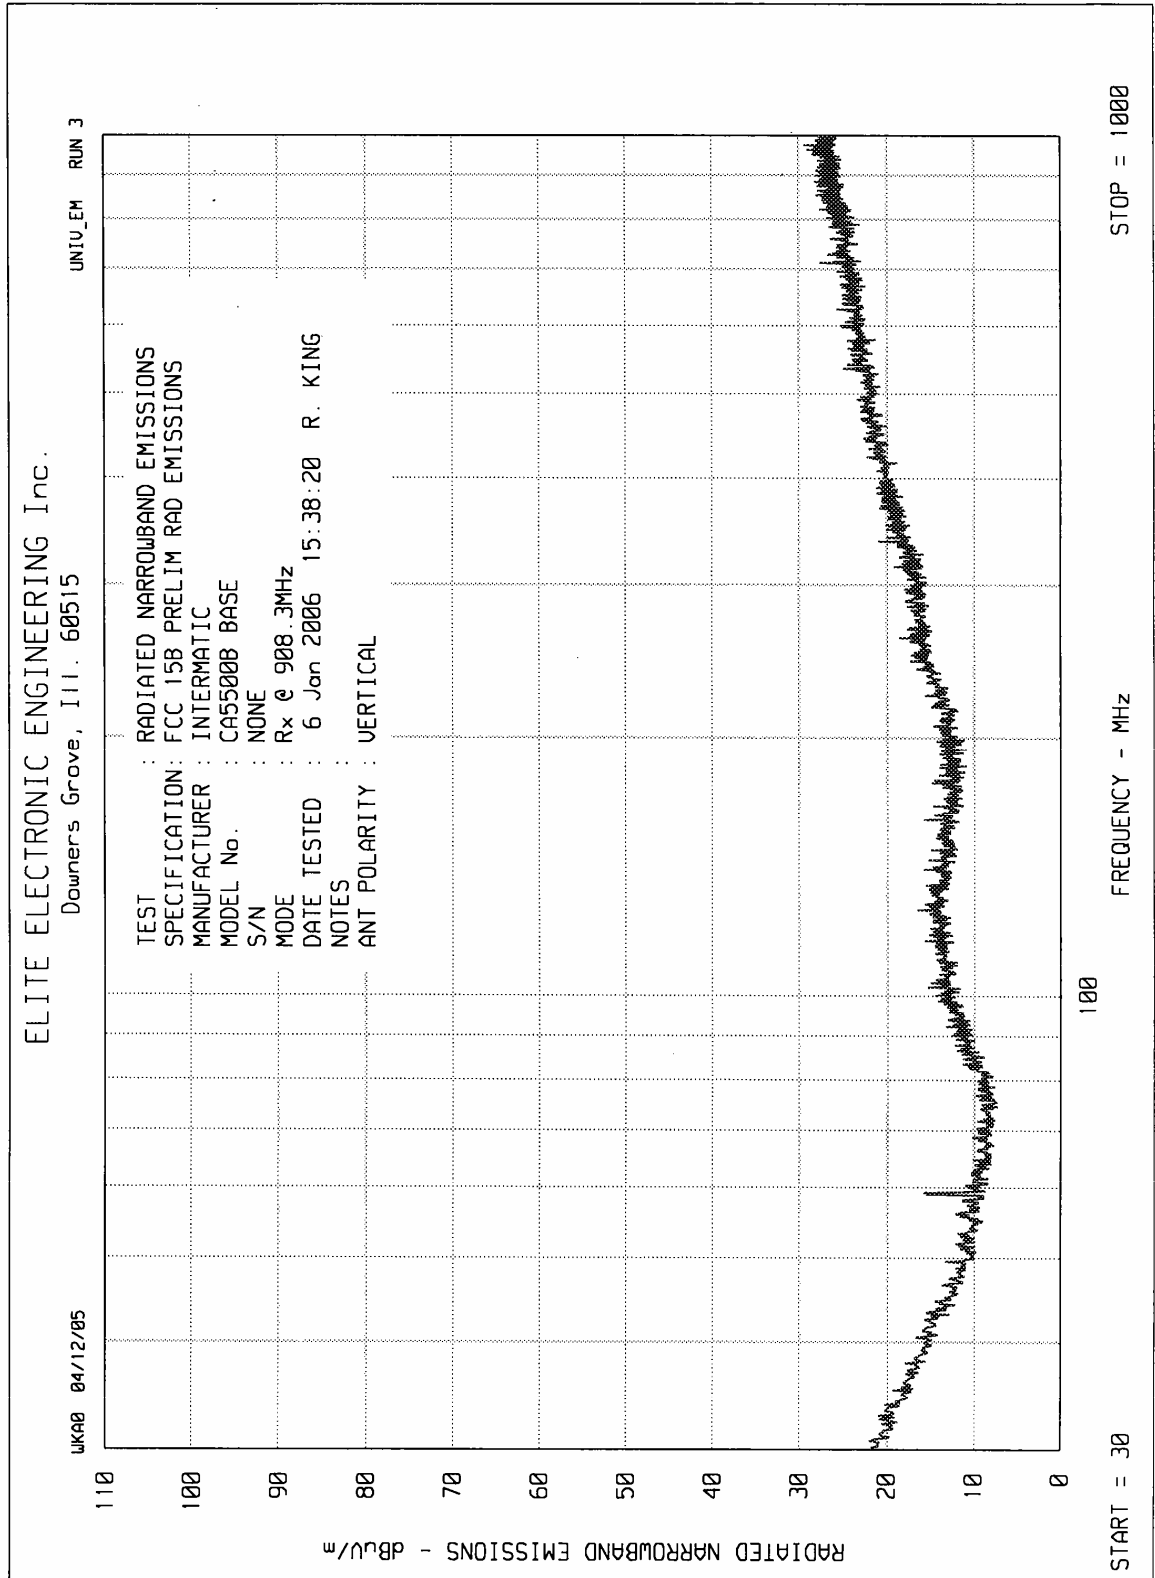



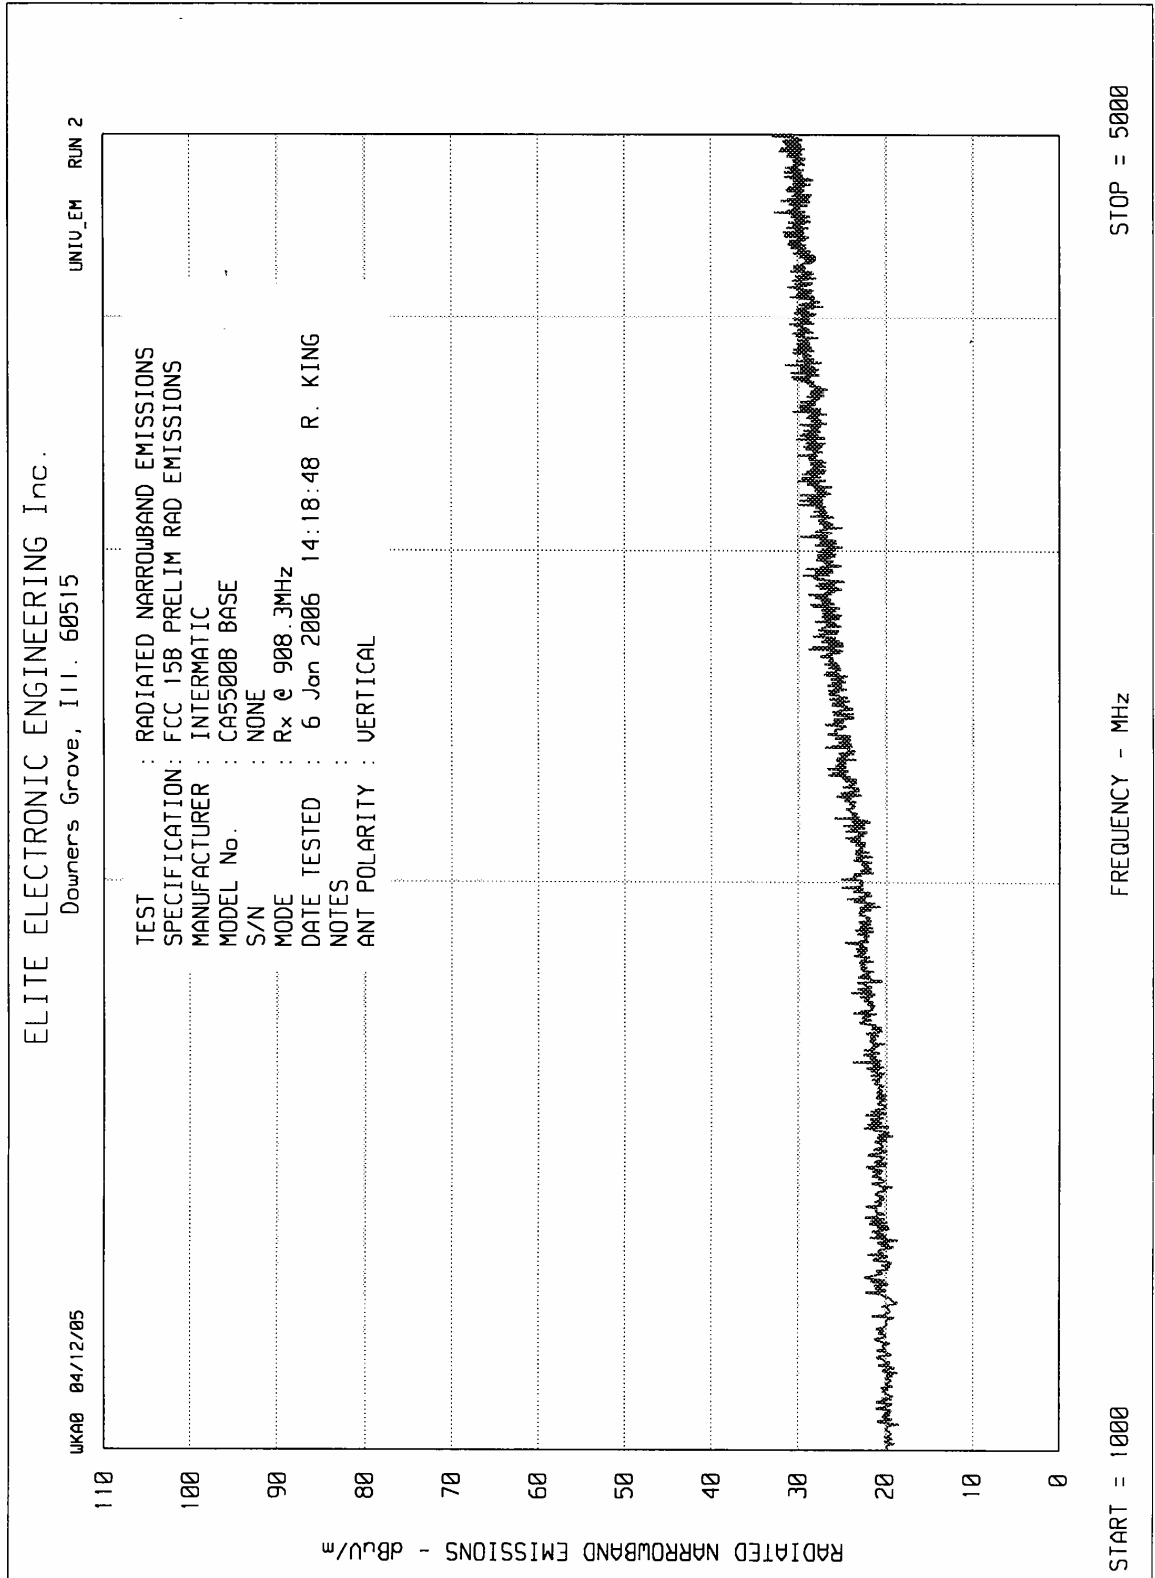

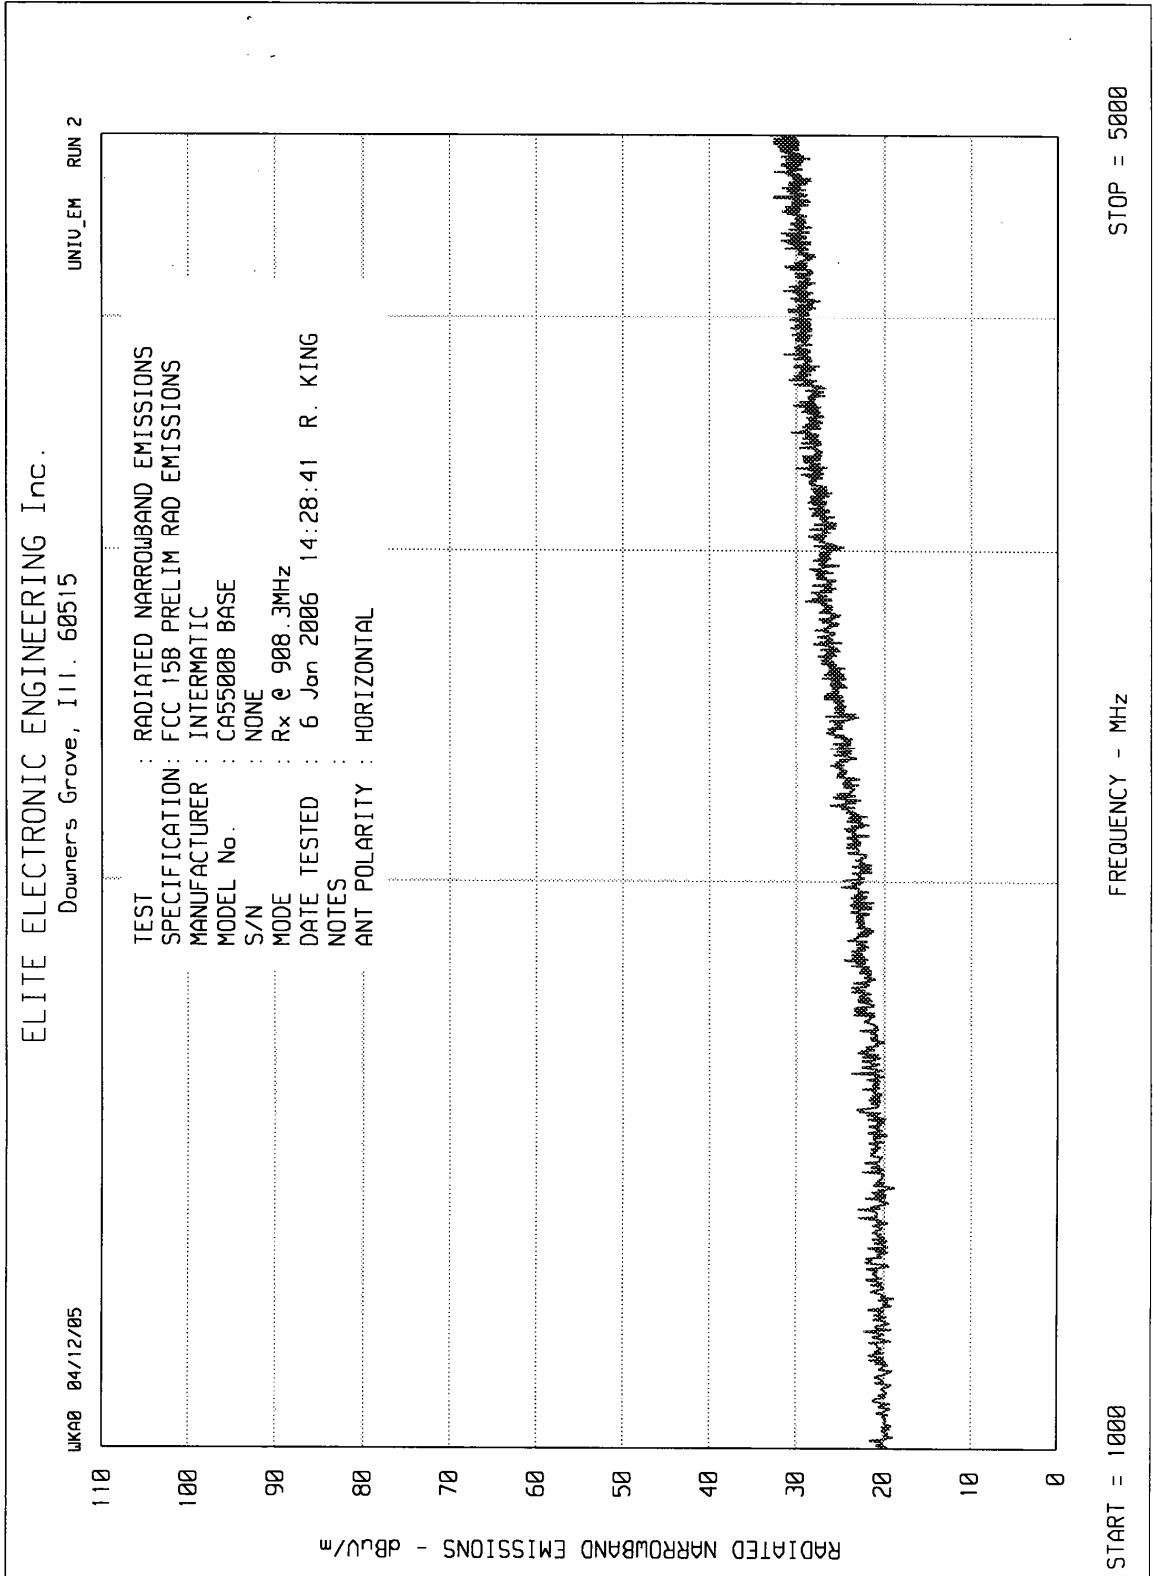





**MANUFACTURER** : Intermatic  
**MODEL** : CA5500B  
**S/N** : None Assigned  
**SPECIFICATION** : FCC-15B Radiated Emissions  
**MODE** : Rx @ 908.42MHz  
**DATE** : January 6, 2006  
**NOTES** :


Freq (MHz)	Ant Pol	Meter Reading (dBUV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
908.3	H	5.1		1.9	27.8	0.0	0.0	34.8	55.3	200.0	-11.2
908.3	V	7.4		1.9	27.8	0.0	0.0	37.1	72.0	200.0	-8.9
1816.6	H	20.1	*	2.9	27.5	0.0	0.0	50.5	334.3	500.0	-3.5
1816.6	V	20.3	*	2.9	27.5	0.0	0.0	50.7	342.1	500.0	-3.3
2724.8	H	43.0	*	3.8	30.2	-34.5	0.0	42.5	133.6	500.0	-11.5
2724.8	V	43.2	*	3.8	30.2	-34.5	0.0	42.7	136.7	500.0	-11.3
3633.1	H	39.2	*	4.4	33.9	-34.6	0.0	42.9	139.4	500.0	-11.1
3633.1	V	39.0	*	4.4	33.9	-34.6	0.0	42.7	136.3	500.0	-11.3
4541.4	H	40.1	*	4.8	34.0	-34.7	0.0	44.3	163.4	500.0	-9.7
4541.4	V	39.8	*	4.8	34.0	-34.7	0.0	44.0	157.8	500.0	-10.0
5449.7	H	39.4	*	5.2	36.4	-34.2	0.0	46.8	218.2	500.0	-7.2
5449.7	V	39.1	*	5.2	36.4	-34.2	0.0	46.5	210.8	500.0	-7.5


Checked BY : *RICHARD E. KING*

Richard E. King

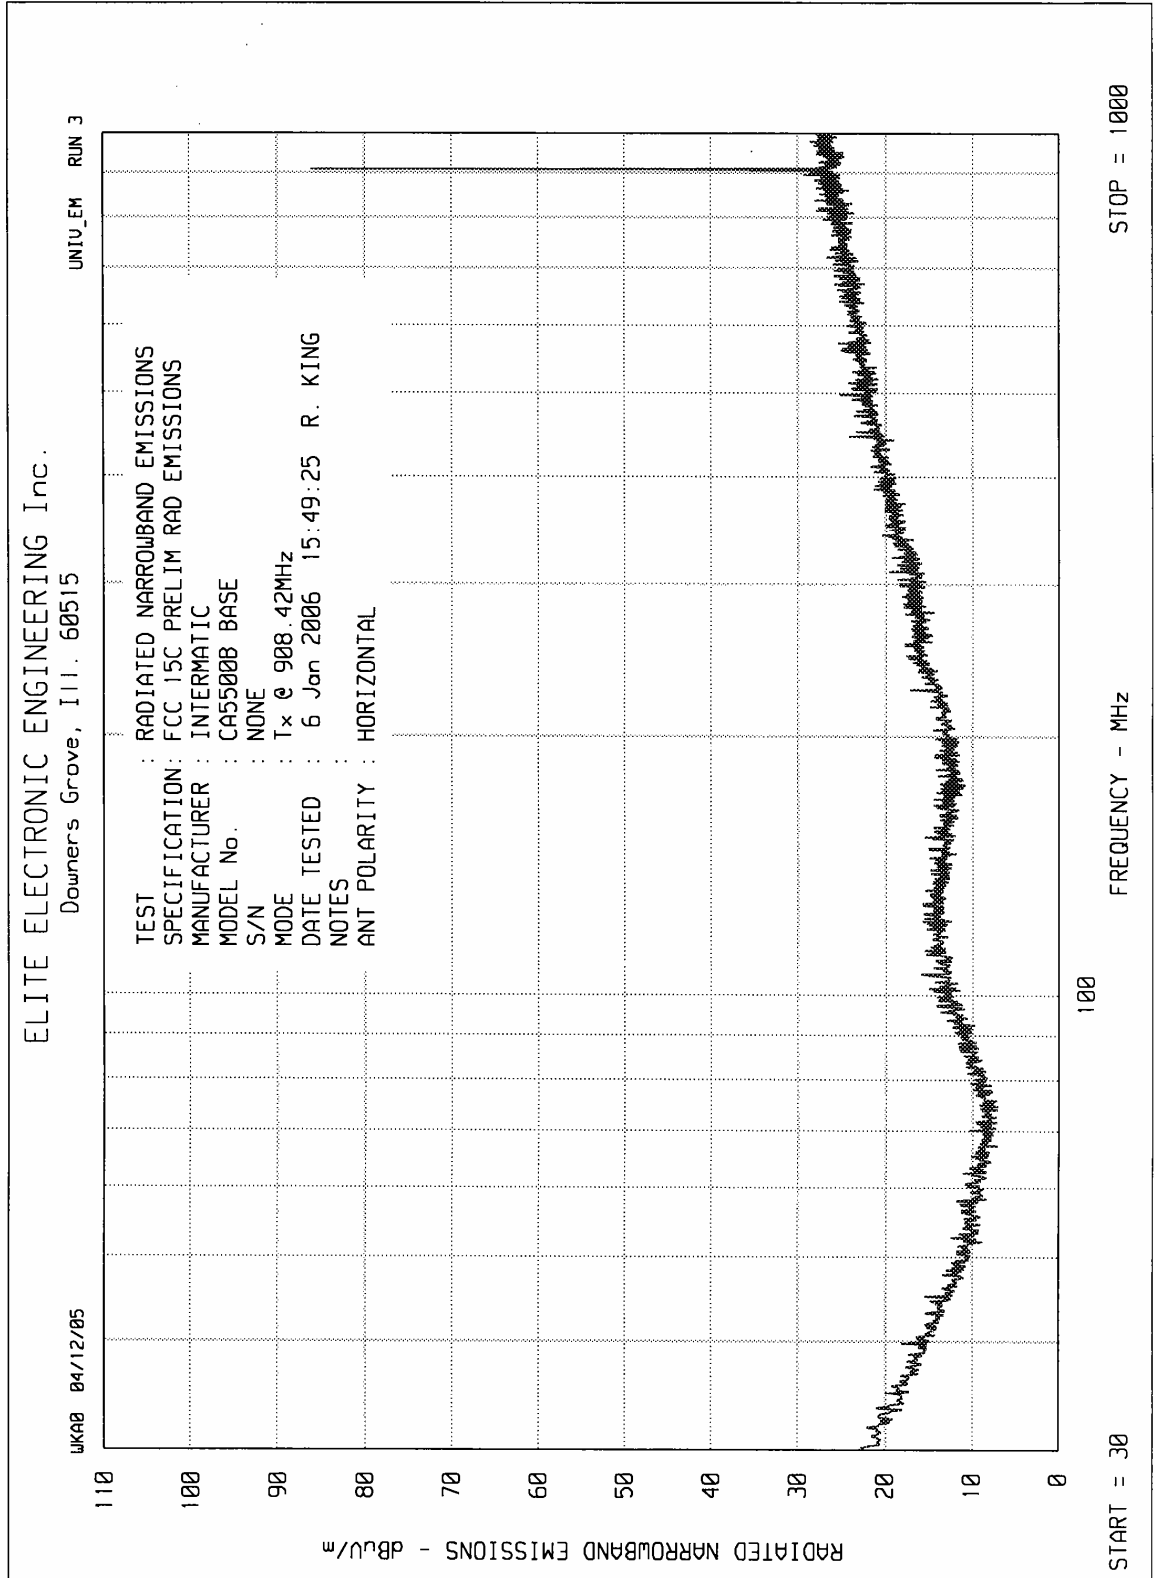

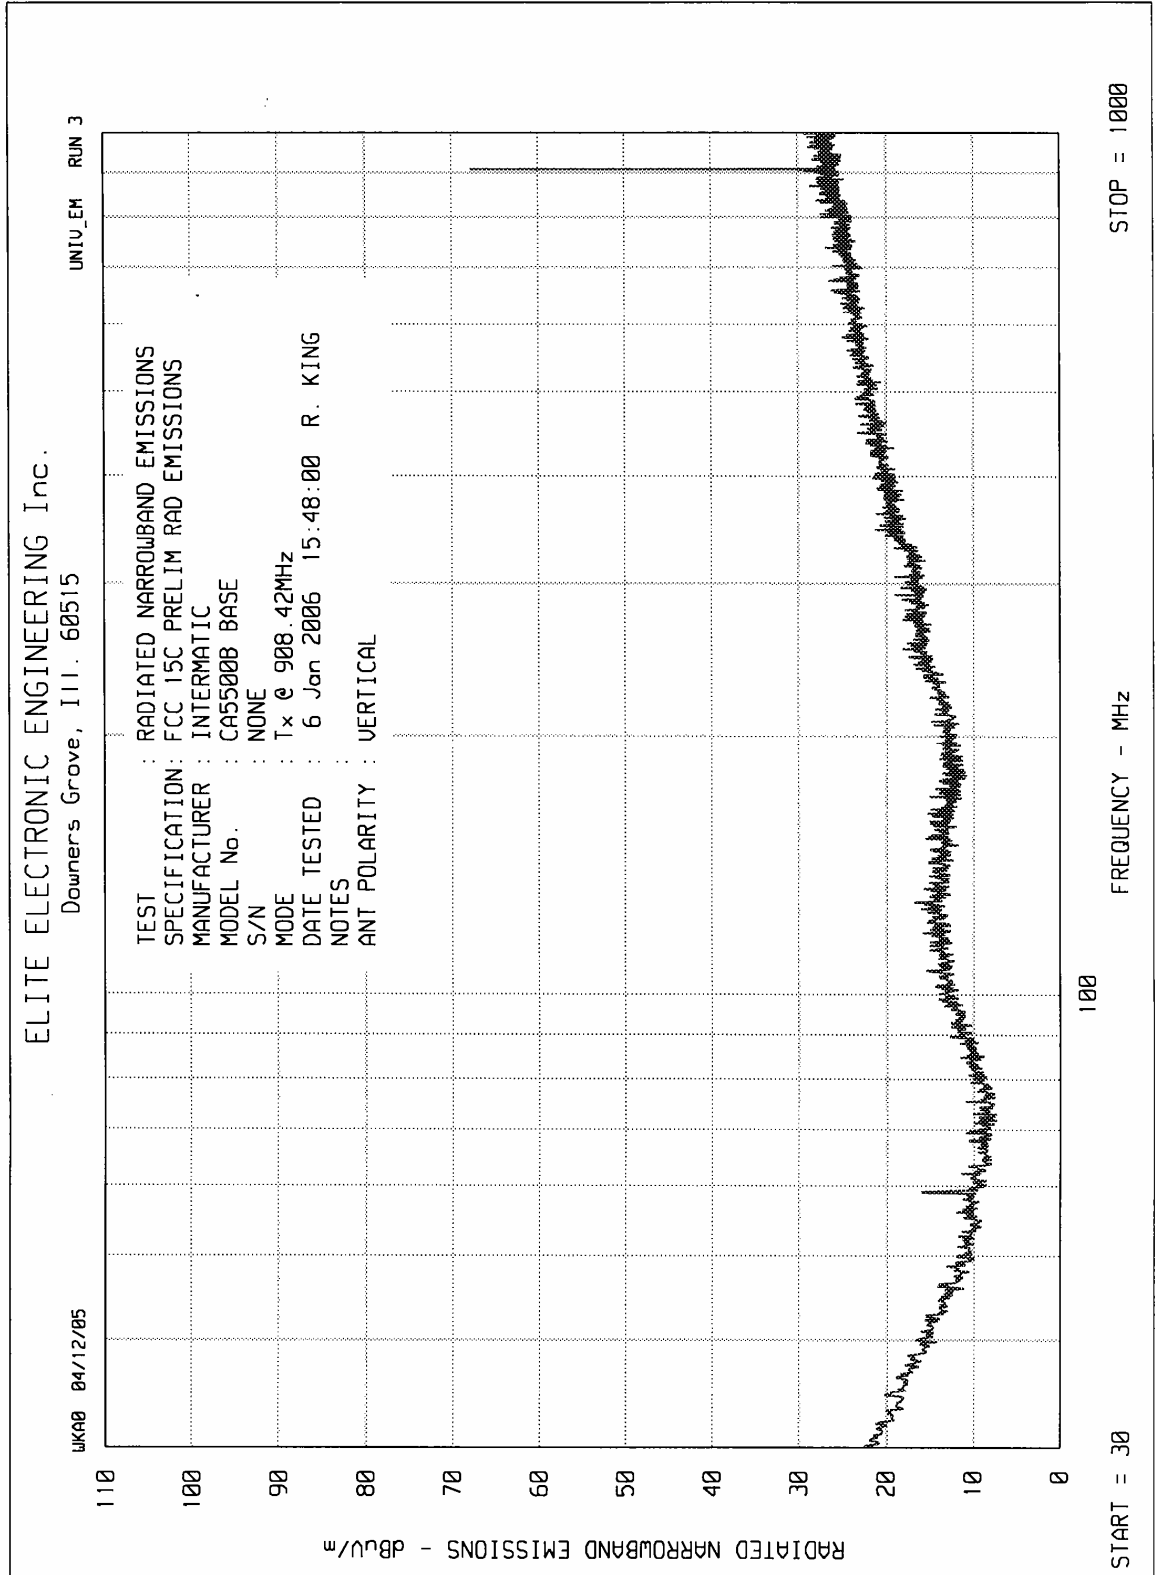

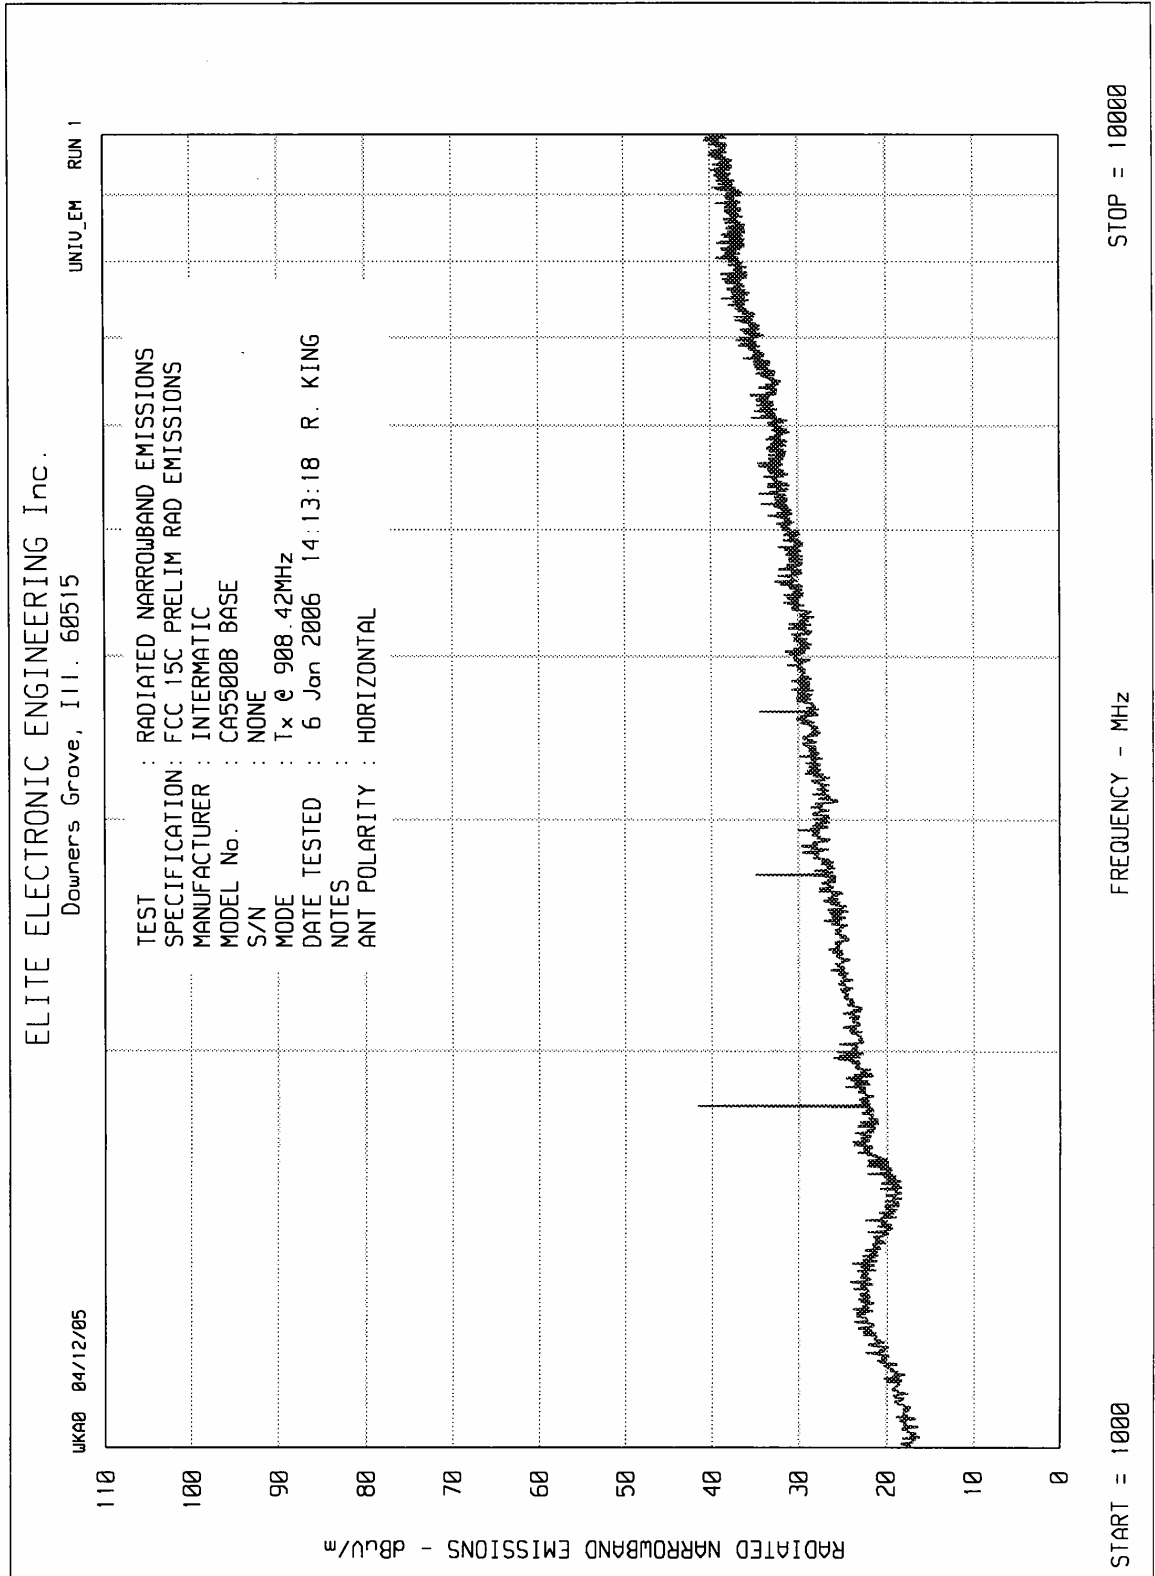

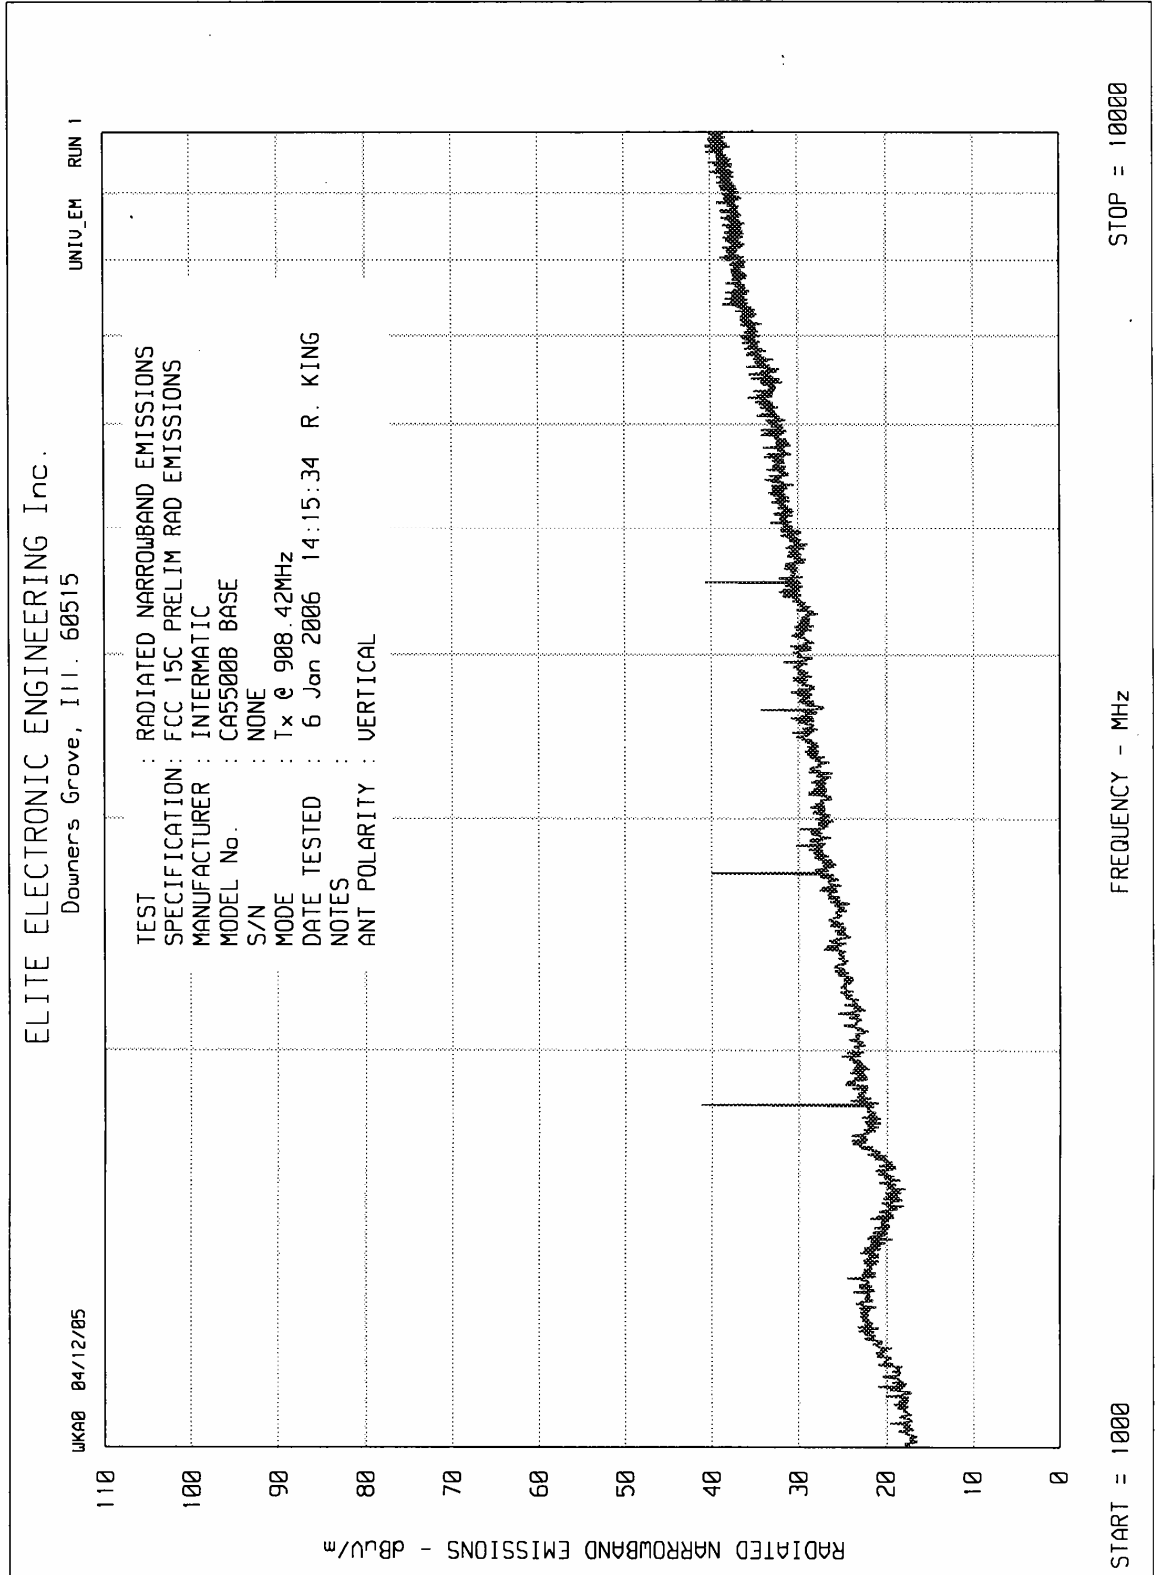



**MANUFACTURER** : Intermatic  
**MODEL** : CA5500B  
**S/N** : None Assigned  
**SPECIFICATION** : FCC-15C Radiated Emissions  
**MODE** : Tx @ 908.42MHz  
**DATE** : January 6, 2006  
**NOTES** :

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
908.4	H	60.6		1.9	27.8	0.0	0.0	90.3	32921.3	50000.0	-3.6
908.4	V	53.8		1.9	27.8	0.0	0.0	83.5	15048.0	50000.0	-10.4
1816.8	H	54.1		2.9	27.5	-34.5	0.0	50.0	315.3	500.0	-4.0
1816.8	V	49.2		2.9	27.5	-34.5	0.0	45.1	179.6	500.0	-8.9
2725.3	H	48.0		3.8	30.2	-34.5	0.0	47.5	237.8	500.0	-6.5
2725.3	V	42.0		3.8	30.2	-34.5	0.0	41.5	118.5	500.0	-12.5
3633.7	H	36.6		4.4	33.9	-34.6	0.0	40.2	102.8	500.0	-13.7
3633.7	V	34.5		4.4	33.9	-34.6	0.0	38.2	81.2	500.0	-15.8
4542.1	H	39.9		4.8	34.0	-34.7	0.0	44.0	159.2	500.0	-9.9
4542.1	V	41.7		4.8	34.0	-34.7	0.0	45.9	196.5	500.0	-8.1
5450.5	H	27.2		5.2	36.4	-34.2	0.0	34.6	53.6	500.0	-19.4
5450.5	V	29.1		5.2	36.4	-34.2	0.0	36.5	66.7	500.0	-17.5
6358.9	H	29.4	*	5.9	36.2	-34.5	0.0	36.9	70.0	500.0	-17.1
6358.9	V	29.5	*	5.9	36.2	-34.5	0.0	37.1	71.2	500.0	-16.9
7267.4	H	28.6	*	6.6	38.1	-34.6	0.0	38.8	87.2	500.0	-15.2
7267.4	V	28.7	*	6.6	38.1	-34.6	0.0	38.9	88.0	500.0	-15.1
8175.8	H	29.3	*	7.1	37.9	-34.7	0.0	39.6	95.8	500.0	-14.3
8175.8	V	29.5	*	7.1	37.9	-34.7	0.0	39.8	97.6	500.0	-14.2
9084.2	H	28.7	*	7.5	38.5	-34.7	0.0	40.1	100.6	500.0	-13.9
9084.2	V	28.9	*	7.5	38.5	-34.7	0.0	40.3	103.0	500.0	-13.7


Checked BY : RICHARD E. KING

Richard E. King



ELITE ELECTRONIC ENGINEERING Inc.

MKR 908.34 MHz  
60.60 dBuV

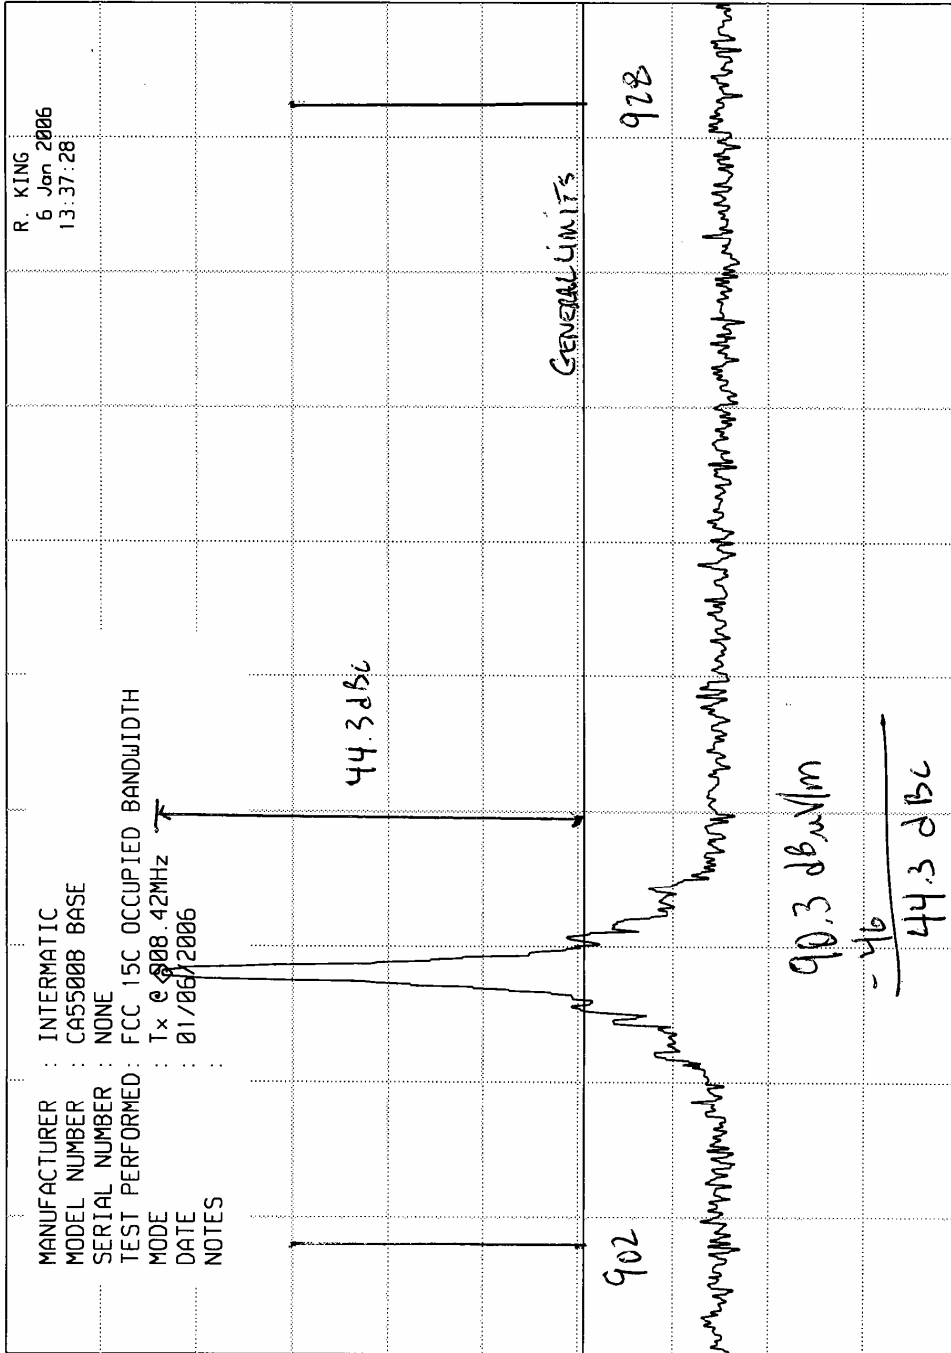

hp

10 dB/

OFFSET  
-20.0  
dB

DL  
16.3  
dBuV

START 900.0 MHz  
RES BW 100 kHz (i)  
STOP 930.0 MHz  
SWP 22.5 msec

VBW 1 MHz