

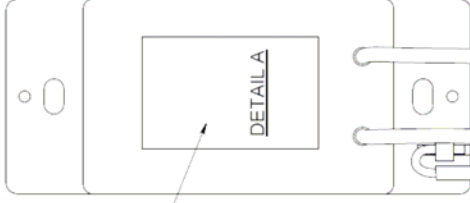


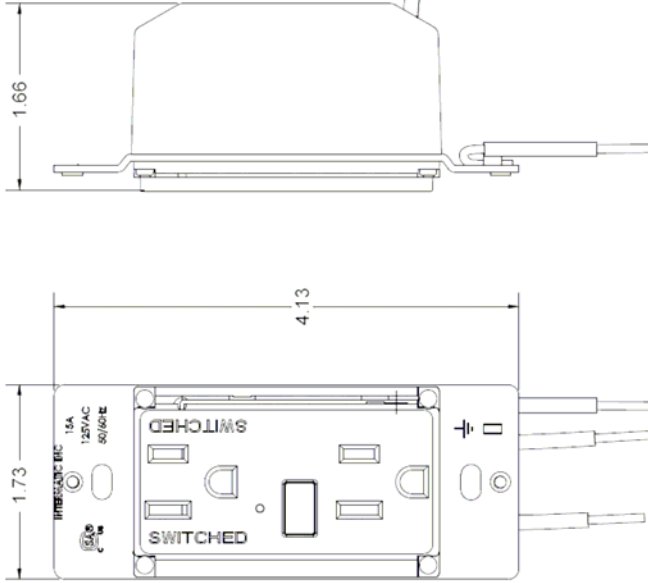

# 133HA1519REF

DO NOT REVISE RASTER FILE  
REVISE SOLID MODEL

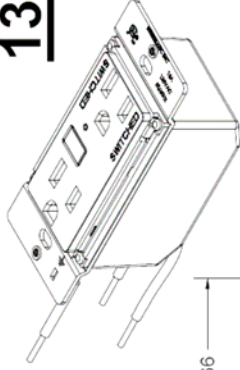

UNIT LABEL  
APPROX.  
LOCATION

14 AWG GREEN LEAD 6" MIN. LENGTH  
500" ± 100" SEMI-STRIP AND 1.0"  
STRIP ON CRIMP END.

14 AWG WHITE LEAD  
6" MIN. LENGTH  
500" ± 100" SEMI-STRIP.

DETAIL REFERENCES	
ITEM	REF. NUMBER
MODEL NUMBER	HA01
TECHNICAL SPECS	157HA2700REF 157HA2780REF
UNIT LABEL	PER DETAIL A

**MODEL: HA01**  
IN-WALL DUPLEX RECEPTACLE  
15 Amp 125Vac at 50/60 Hz  
FCC ID: DGZH0001 IC: 4898A-H0001



Refer to owners manual  
for complete instructions

USE 75°C COPPER WIRE ONLY

**SUITABLE FOR INDOOR USE ONLY.**

INTERMATIC INC., Spring Grove, IL 60081-9698  
www.homesettings.com MADE IN CHINA  
PATENT(S) PENDING

DETAIL A - UNIT LABEL  
Approx. Size  
1.25" x 1.50"

**NOTES (UNLESS OTHERWISE SPECIFIED):**

- DIMENSIONS ARE INCHES FOR REFERENCE ONLY.
- ALL GRAPHICS AND PRINTING TO BE PER INTERMATIC APPROVED ARTWORK.
- NO CHANGES ARE PERMITTED WITHOUT PRIOR APPROVAL FROM INTERMATIC AND SUBSEQUENT ACCEPTANCE FROM RECOGNIZED LISTING AGENCY.
- BULK SWITCHES SHIPPED IN PACKAGING SUFFICIENT TO ENDURE SHIPPING, HANDLING AND STORAGE MUST MEET THE REQUIREMENTS OF INTERMATIC QUALITY TESTING PROCEDURES 7.3.12. PRESHIPMENT TEST.
- UNIT LABEL MATERIAL TO COMPLY WITH UL FILE MH13600.
- DATE CODE ON UNIT LABEL.

INTERMATIC INCORPORATED	
DRAWN BY: MPC	NAME: SWITCH-HA01
DATE: 12/19/06	SCALE: NONE
BY: PJA	APPROVED: SEE NOTES
DATE: 12/19/06	FRESH: SEE NOTES
SUPERSEDES:	HEAT TREAT: NONE

TOOL TOL:	
1	REL TO ELECT DATA
REV	REVISION DESCRIPTION

TOLERANCES: DECIMALS (UNLESS OTHERWISE SPECIFIED); TWO PLACE (00) ± .015; THREE (000) ± .005; ANGLES ± .50 MINUTES. ALL DIMENSIONS MUST BE MET BEFORE PATING.

DO NOT USE FOR RE-TOOLING