

hp

MKA 35.000 msec

REF 107.0 dB μ V

AT 10 dB

.30 dB

PEAK

LOG

10
dB/


*

Manual Transmission
Duration

VA SB

SC FC

CORR

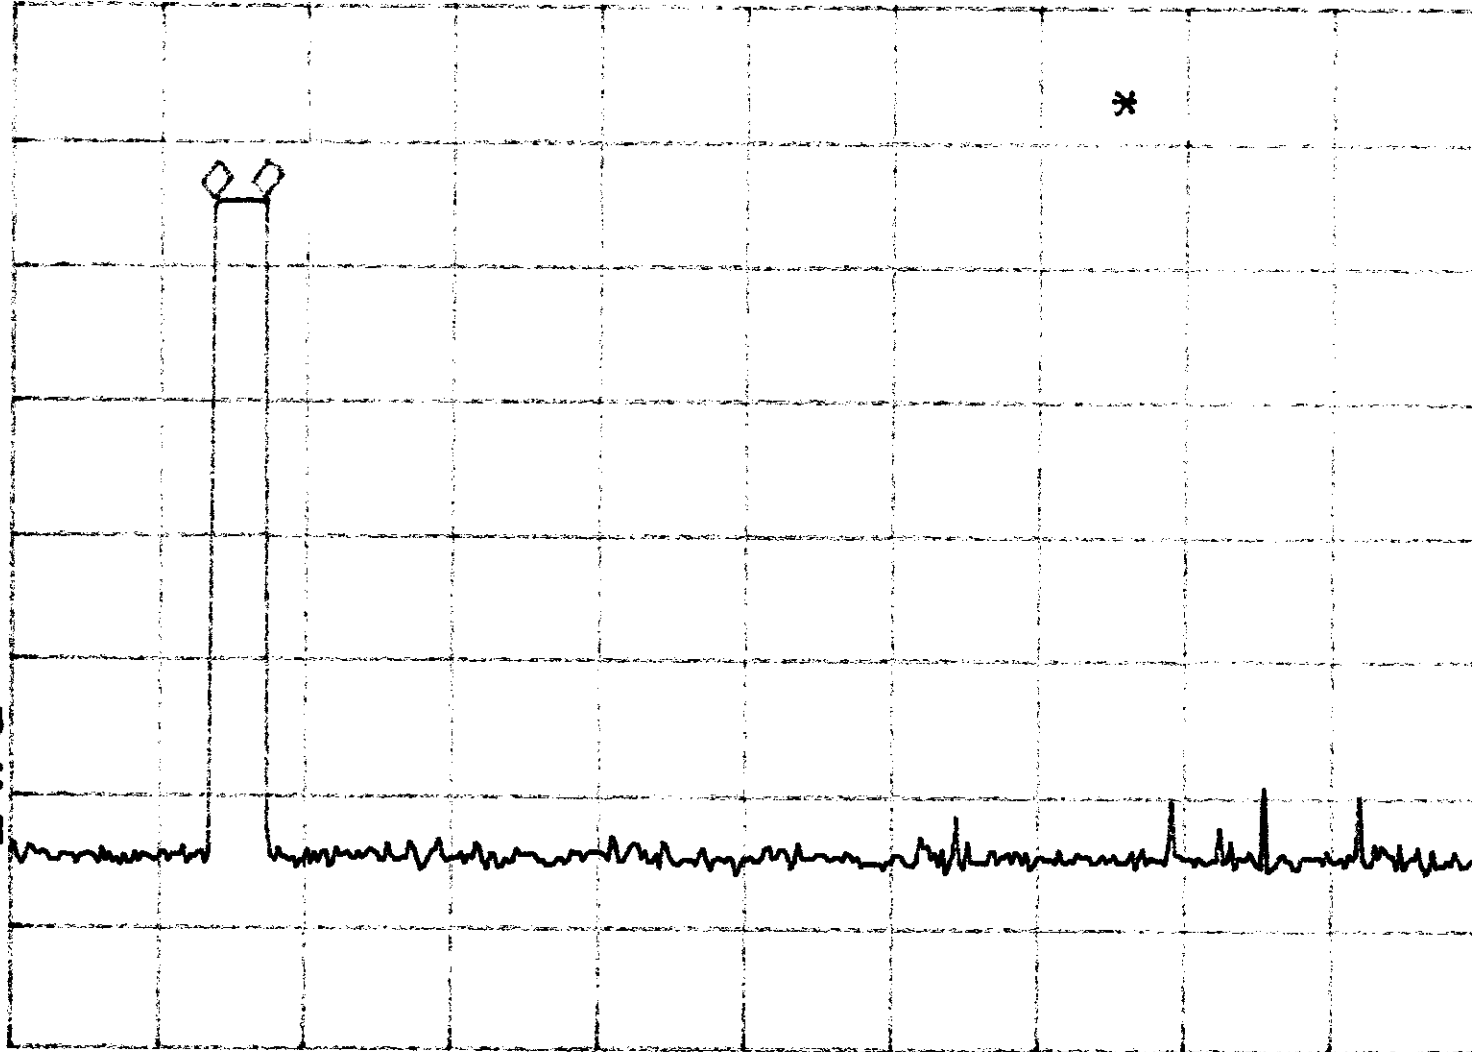

CENTER 350.000 MHz

SPAN 0 Hz

#RES BW 1.0 MHz


#VBW 3 MHz

#SWP 1.00 sec

hp

REF 107.0 dB μ V AT 10 dB

PEAK
LOG
10
dB/

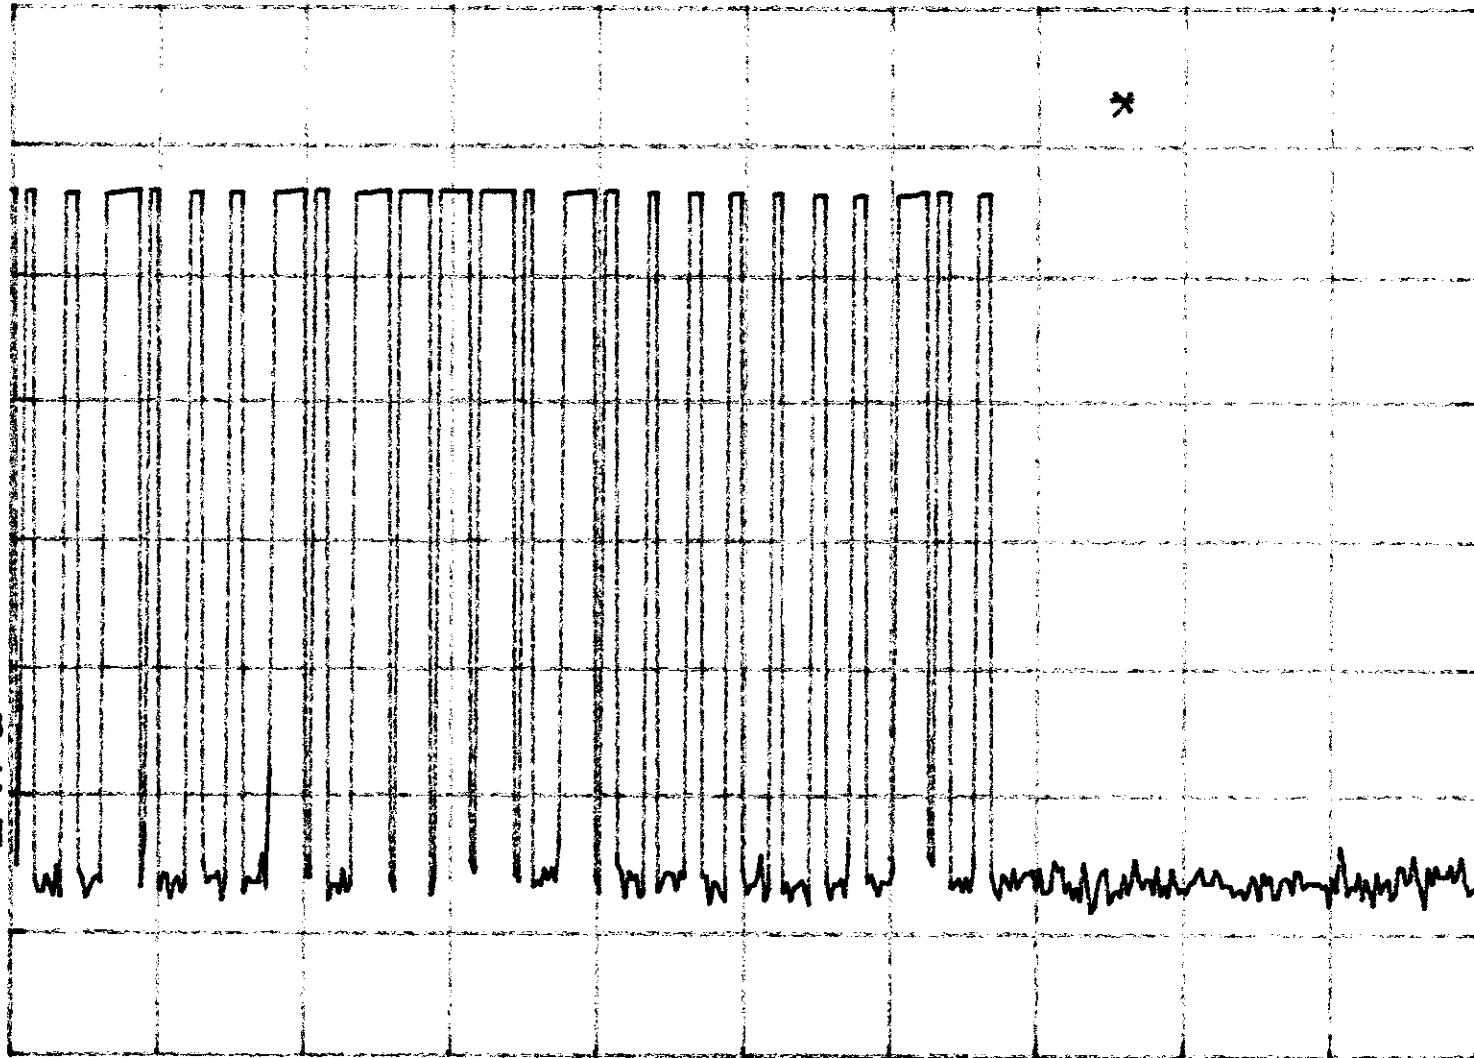

Average Factor
 $= \frac{16 \times 0.34 + 8 \times 1.05}{35}$
 $= 0.395$ or -8 dB

VA SB
SC VC
CORR

CENTER 350.000 MHz

SPAN 0 Hz

#RES BW 1.0 MHz

#VBW 3 MHz

#SWP 50.0 msec

hp

MKR 337.00 μ sec

REF 107.0 dB μ V

AT 10 dB


.05 dB

PEAK

LOG

10

dB/

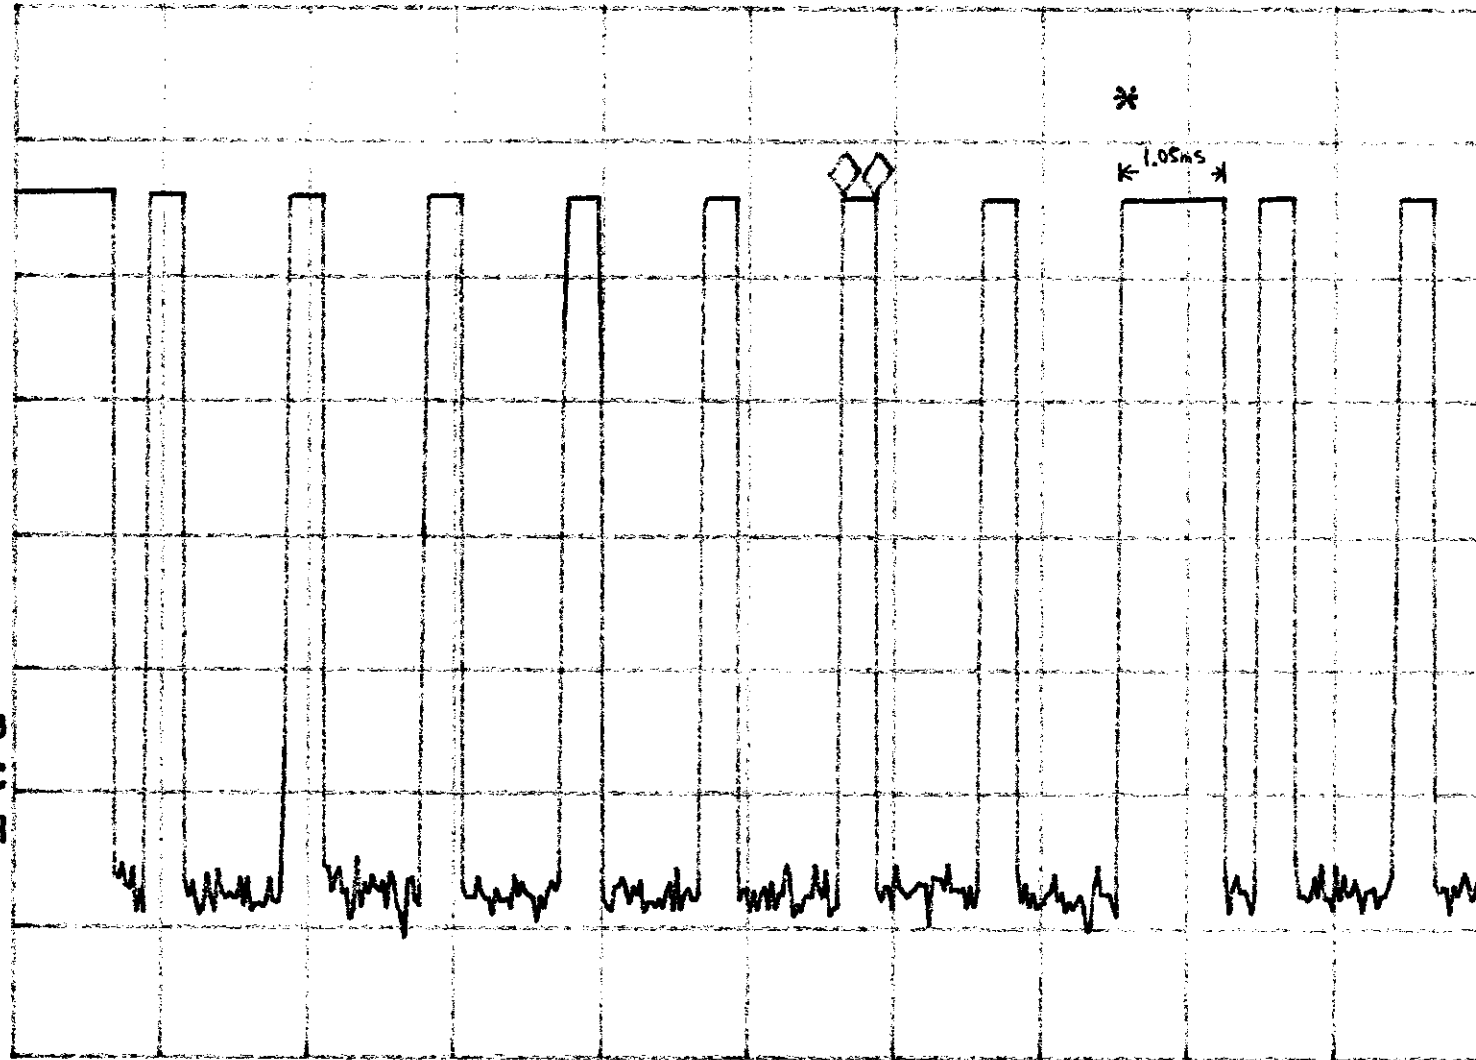

VA SB
SC FC
CORR

CENTER 350.000 MHz

SPAN 0 Hz

#RES BW 1.0 MHz

#VBW 3 MHz


#SWP 15.0 msec

hp

REF 107.0 dB μ V

AT 10 dB

PEAK
LOG
10
dB/

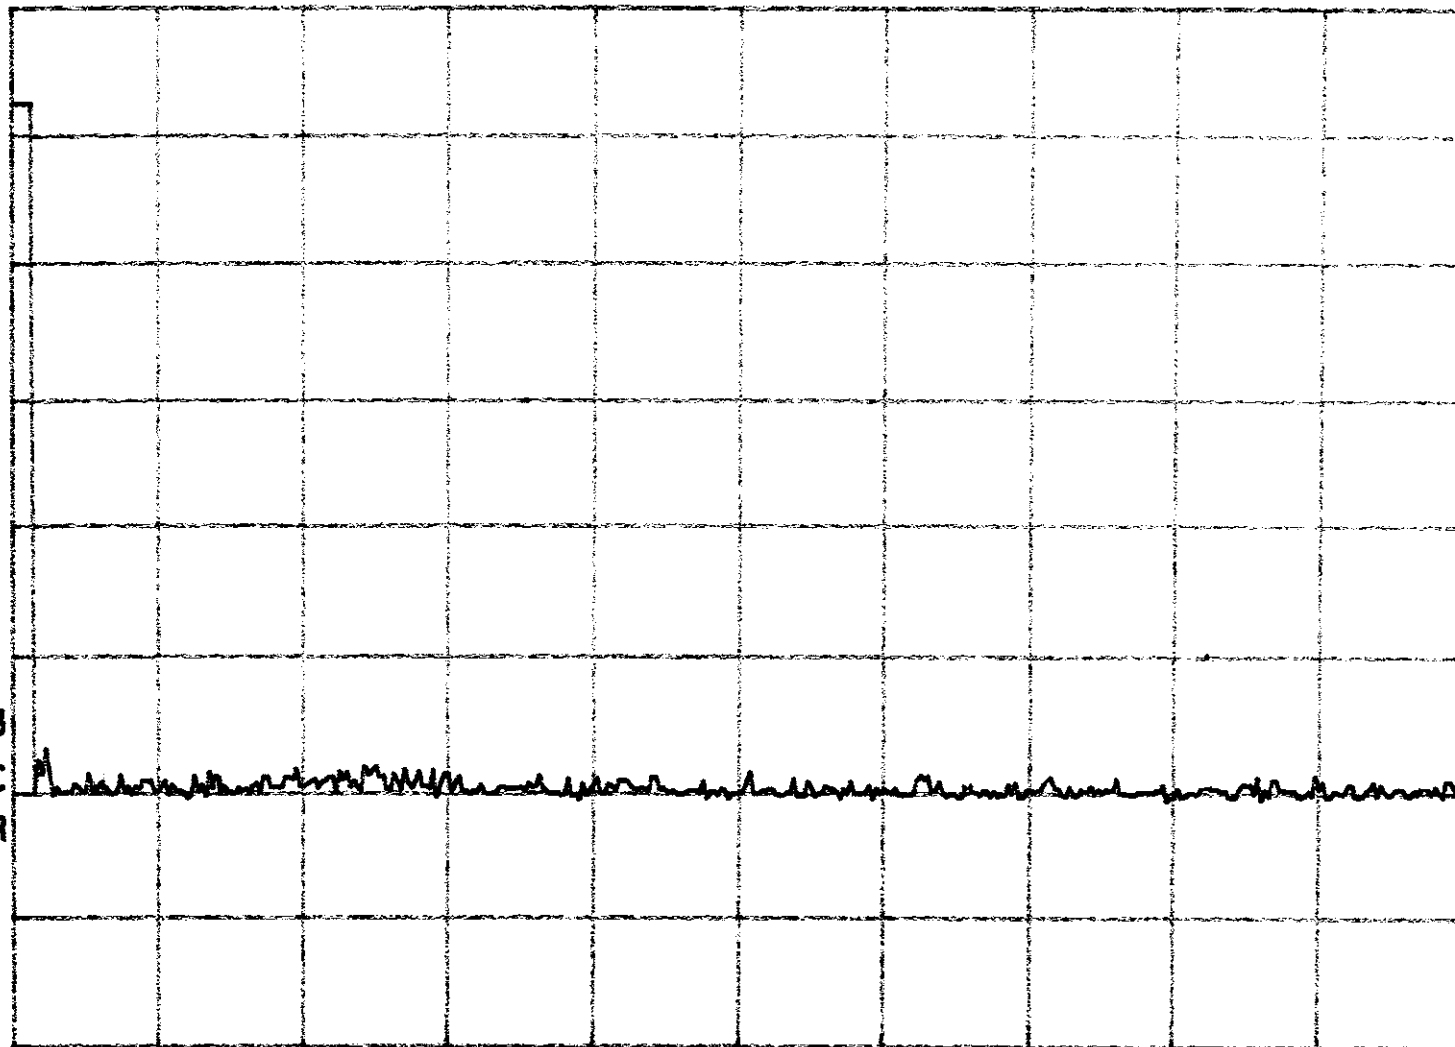

Acknowledge signal timing
(for out-of-range purpose)
detecting

VA SB
SC VC
CORR

CENTER 350.000 MHz

RES BW 3.0 MHz

VBW 1 MHz

SPAN 0 Hz

#SWP 50.0 sec

hp

MKR 2.4875 sec


REF 107.0 dBμV

AT 10 dB

100.74 dBμV

PEAK
LOG
10
dB/

Hi: automatic transmission duration

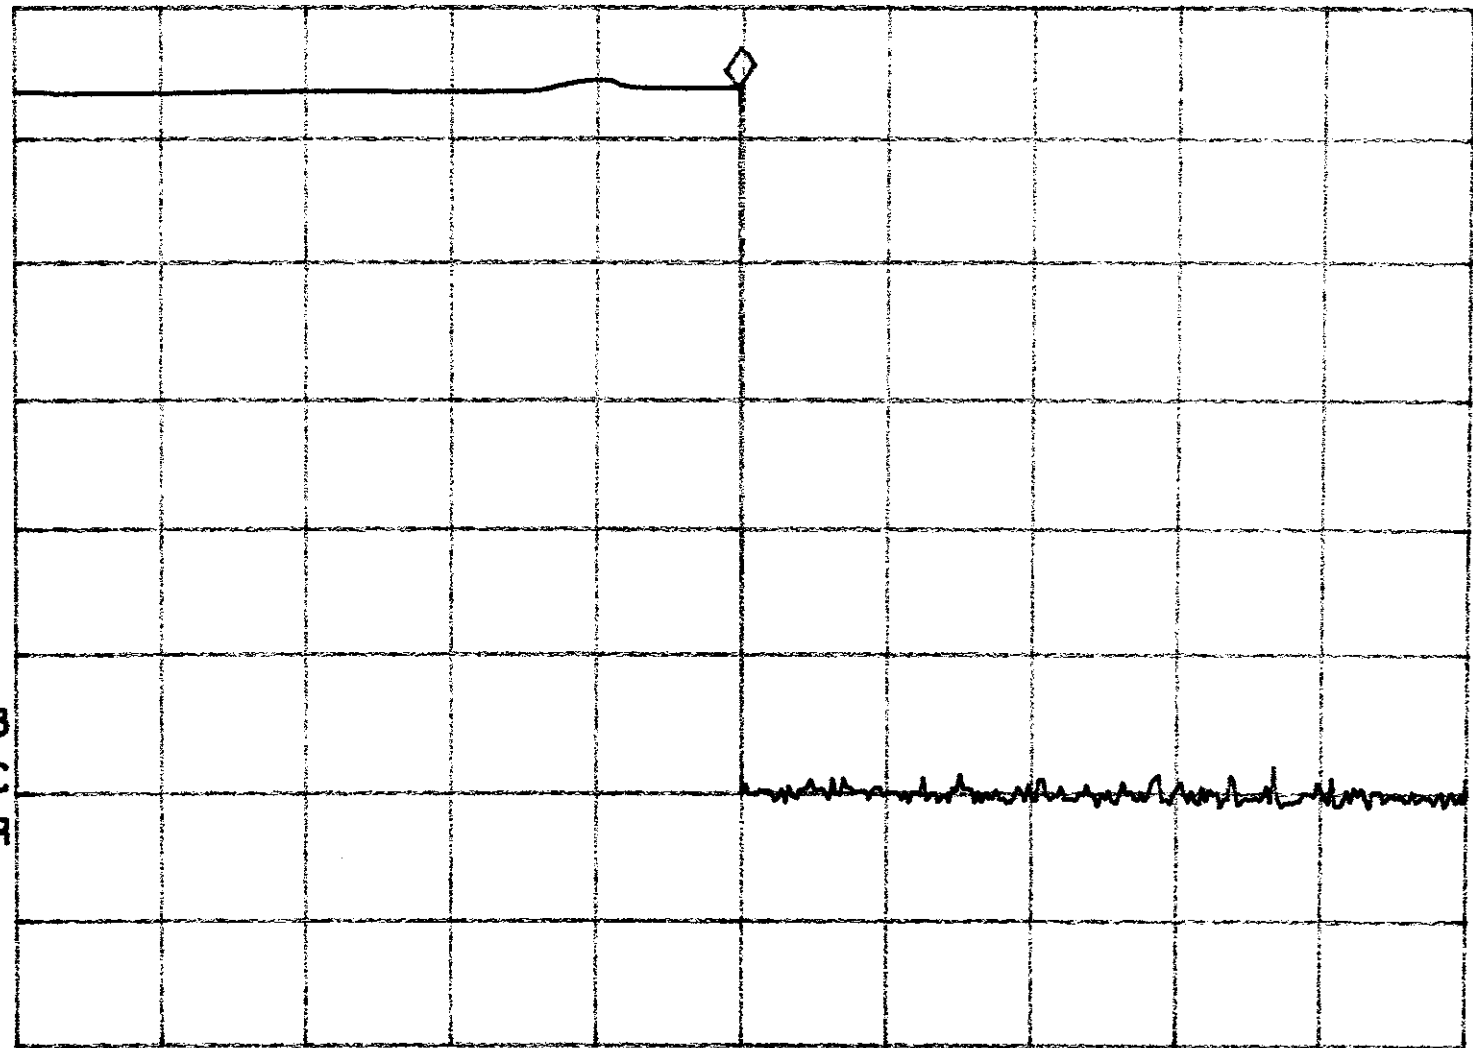

VA SB
SC VC
CORR


CENTER 350.000 MHz

SPAN 0 Hz

#RES BW 1.0 MHz

#VBW 3 MHz

#SWP 5.00 sec

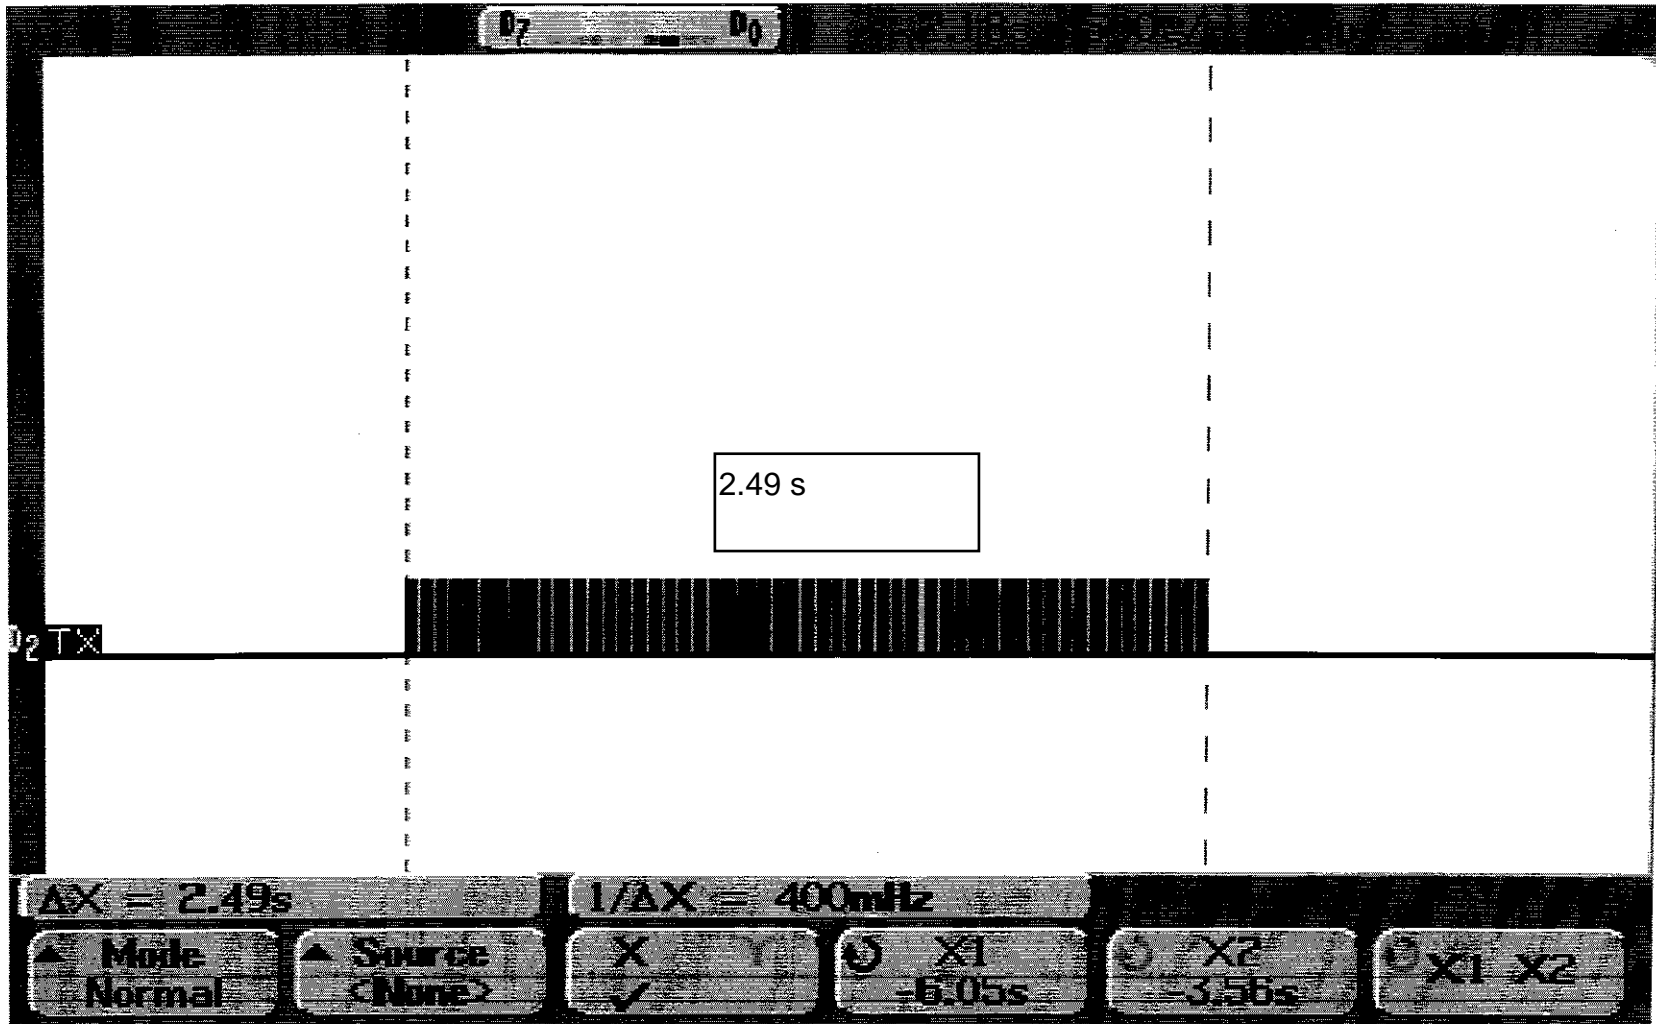

Low battery detection
Transmission timing