

hp

MKR 24.563 msec

REF -30.0 dBm

AT 10 dB

.03 dB

PEAK

LOG

10

dB/

Average Factor \square

$= (10 \times 0.6 + 3 \times 0.3) / 24.563$

$= 6.9 / 24.563 \square$

$= 0.28$ or -11.0 dB

WA SB

SC VS

CORR


CENTER 350.000 MHz

SPAN 0 Hz

RES BW 300 kHz

#VBW 300 kHz

#SWP 75.0 msec

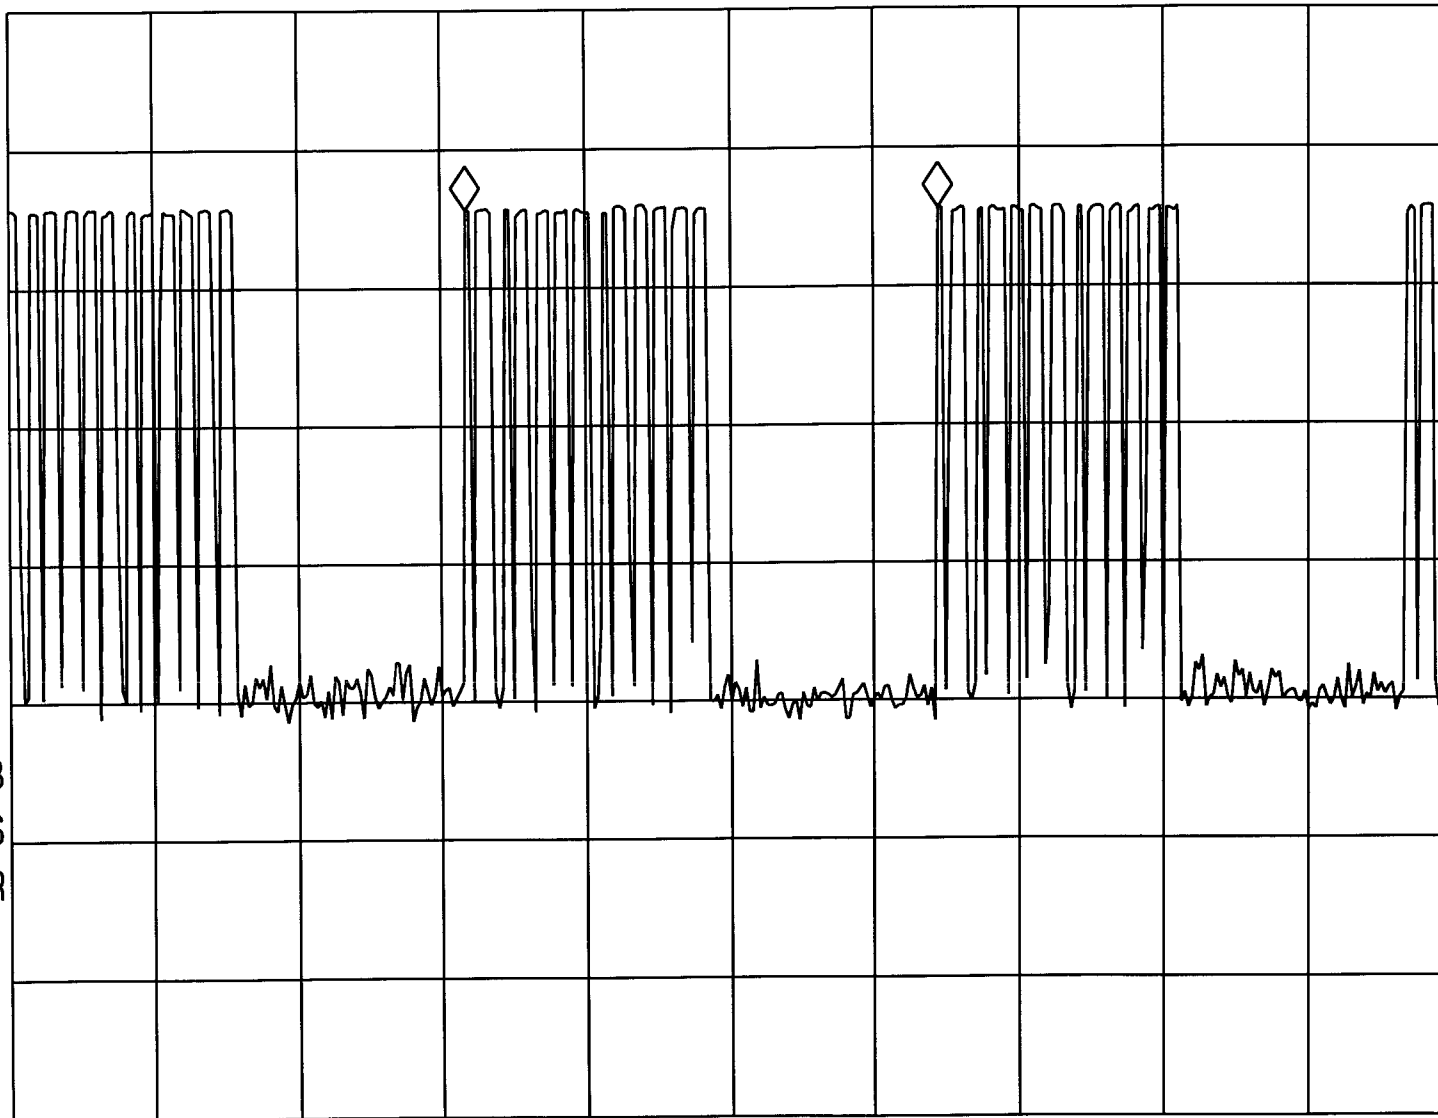

hp

REF -30.0 dBm

AT 10 dB

PEAK

LOG


10

dB/

WA SB

SC VC

CORR

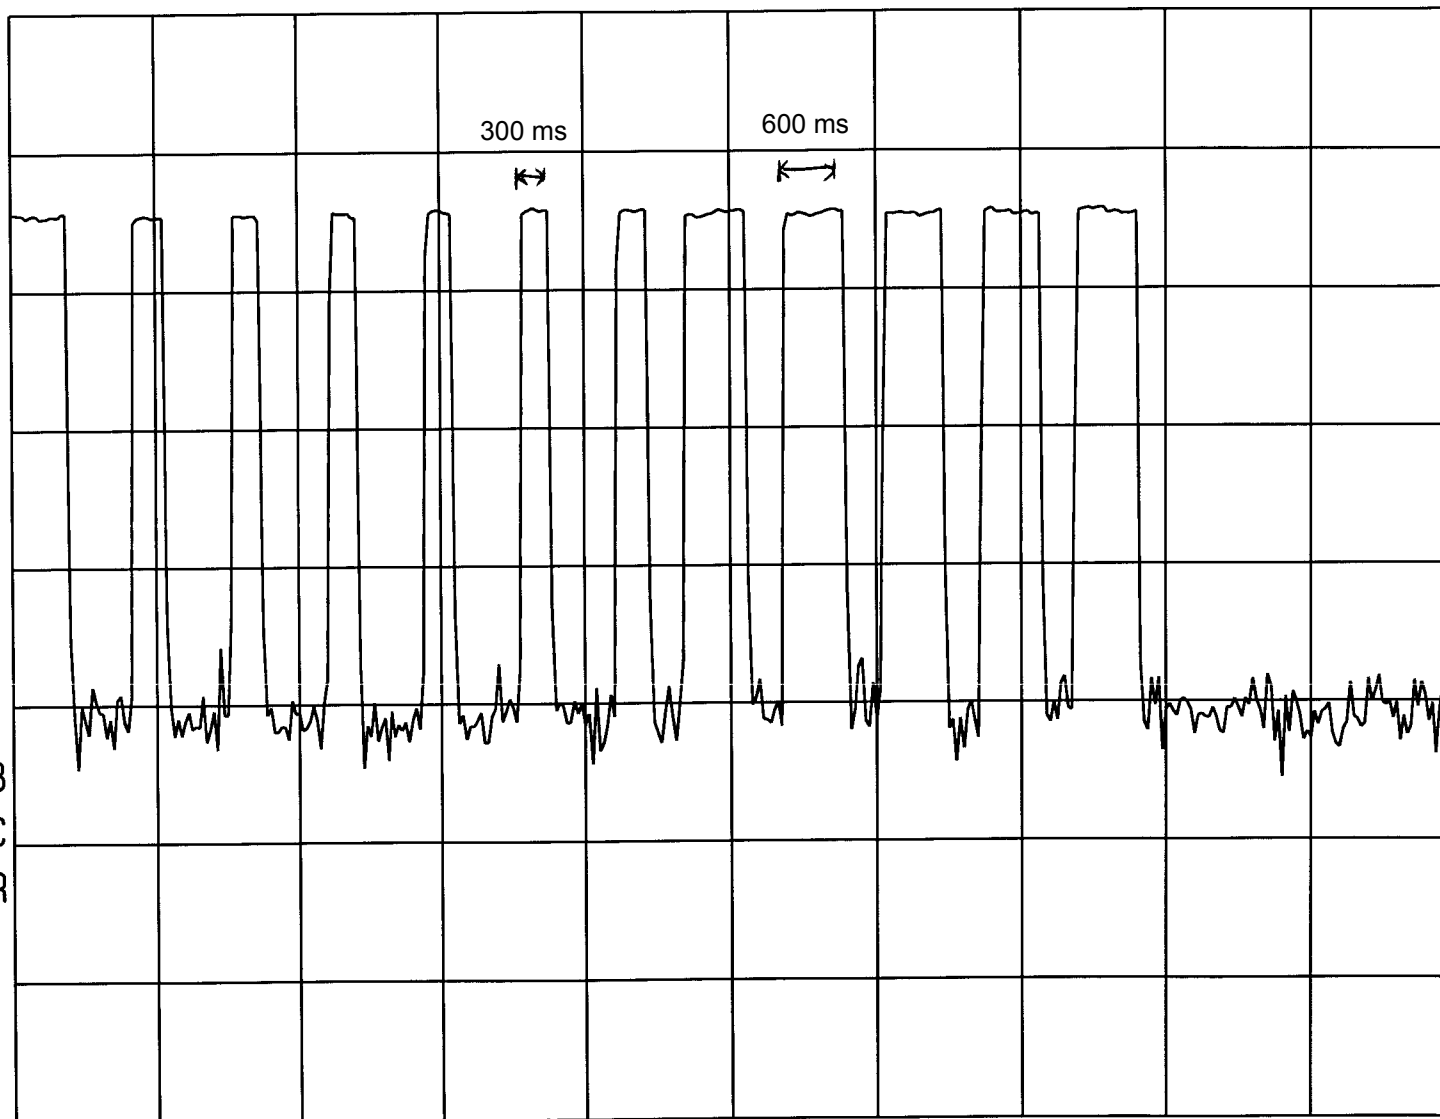

CENTER 350.000 MHz

RES BW 300 kHz

#VBW 300 kHz

SPAN 0 Hz

#SWP 15.0 msec

hp

REF 67.0 dB μ V

AT 10 dB

MKR 2.9250 sec

63.96 dB μ V

Manual
On/off

PEAK

LOG


10

dB/

VA SB

SC VC

CORR

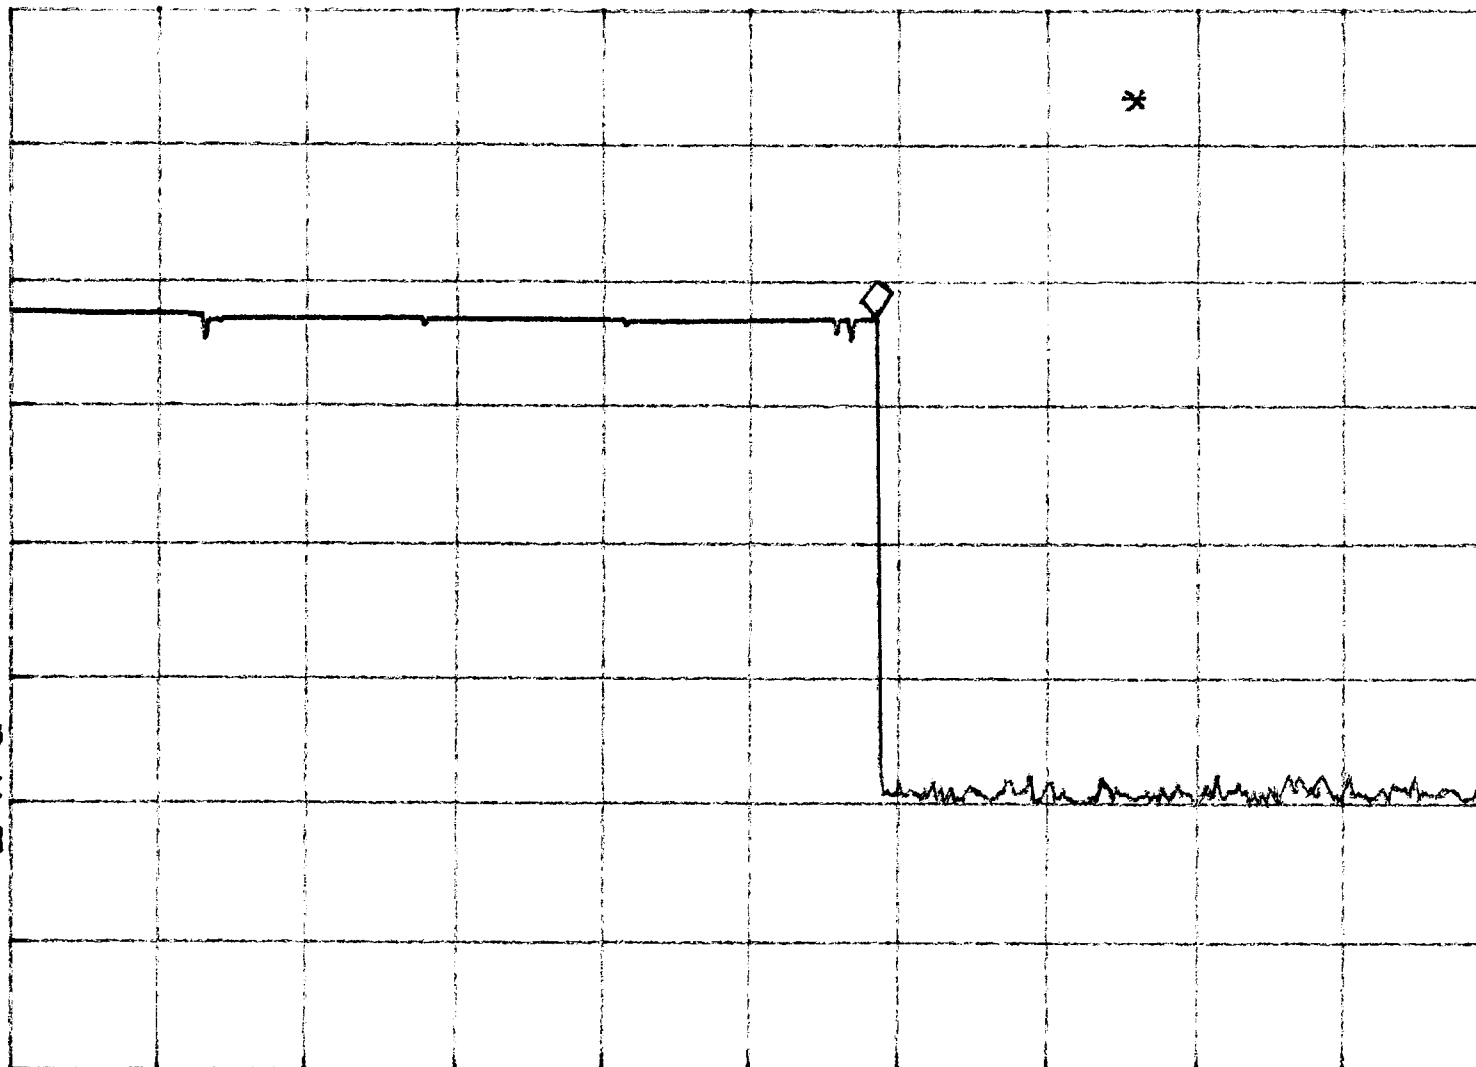

CENTER 350.000 MHz

SPAN 0 Hz

#RES BW 100 kHz

#VBW 100 kHz

#SWP 5.00 sec

hp

REF 67.0 dB μ V

AT 10 dB

MKR 4.8938 sec

61.26 dB μ V

PEAK

LOG

10

dB/

Thermal Shutdown, ☐

Low battery, ☐

Continuous touch, ☐

Automatic shutdown

WA SB

SC VC

CORR

CENTER 350.000 MHz

SPAN 0 Hz

#RES BW 100 KHz

#VBW 100 KHz

#SWP 7.50 sec

