

fig


MKR 24.375 msec

REF 77.0 dB $\mu$ V

AT 10 dB

-1.13 dB

PEAK  
LOG  
10  
dB/

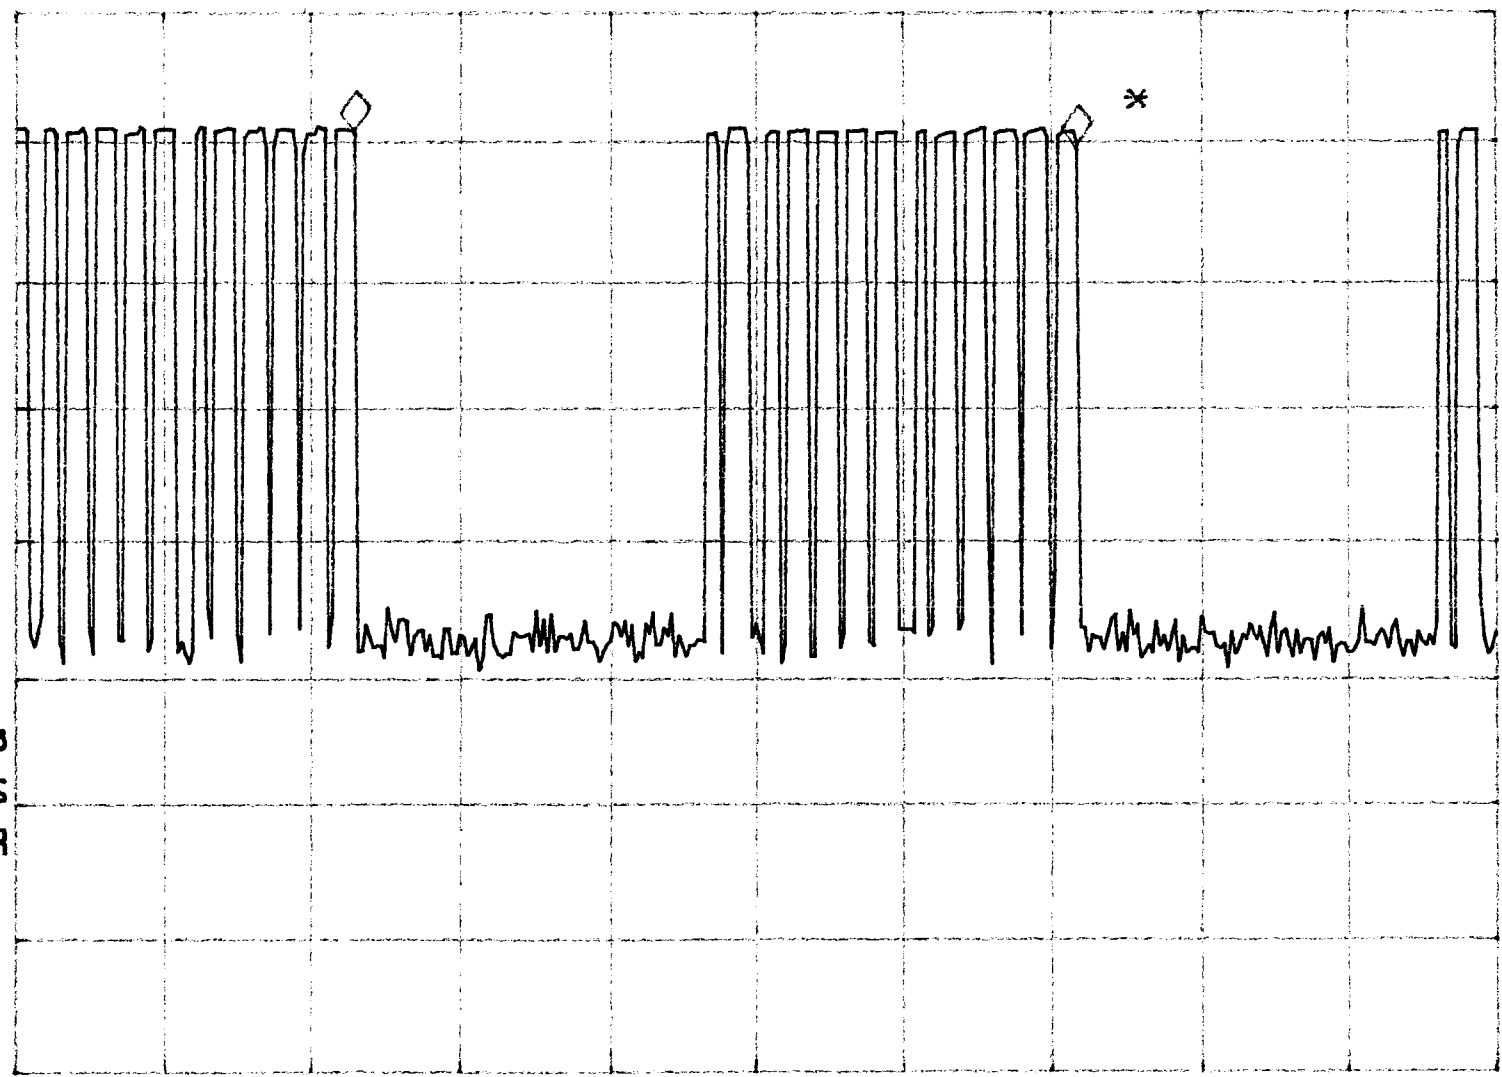

Average Factor  
 $= \frac{0.6 \times 10 + 0.3 \times 3}{24.375}$   
 $= \frac{6.9}{24.375}$   
 $= 0.28 \text{ or } -11.0 \text{ dB}$

VA SB  
SC VS  
CORR

CENTER 349.900 MHz

SPAN 0 Hz

#RES BW 1.0 MHz

#VBW 1 MHz

#SWP 50.0 msec

hp


MKR 500.00  $\mu$ sec

REF 77.0 dB $\mu$ V

AT 10 dB

.42 dB

PEAK  
LOG  
10  
dB/

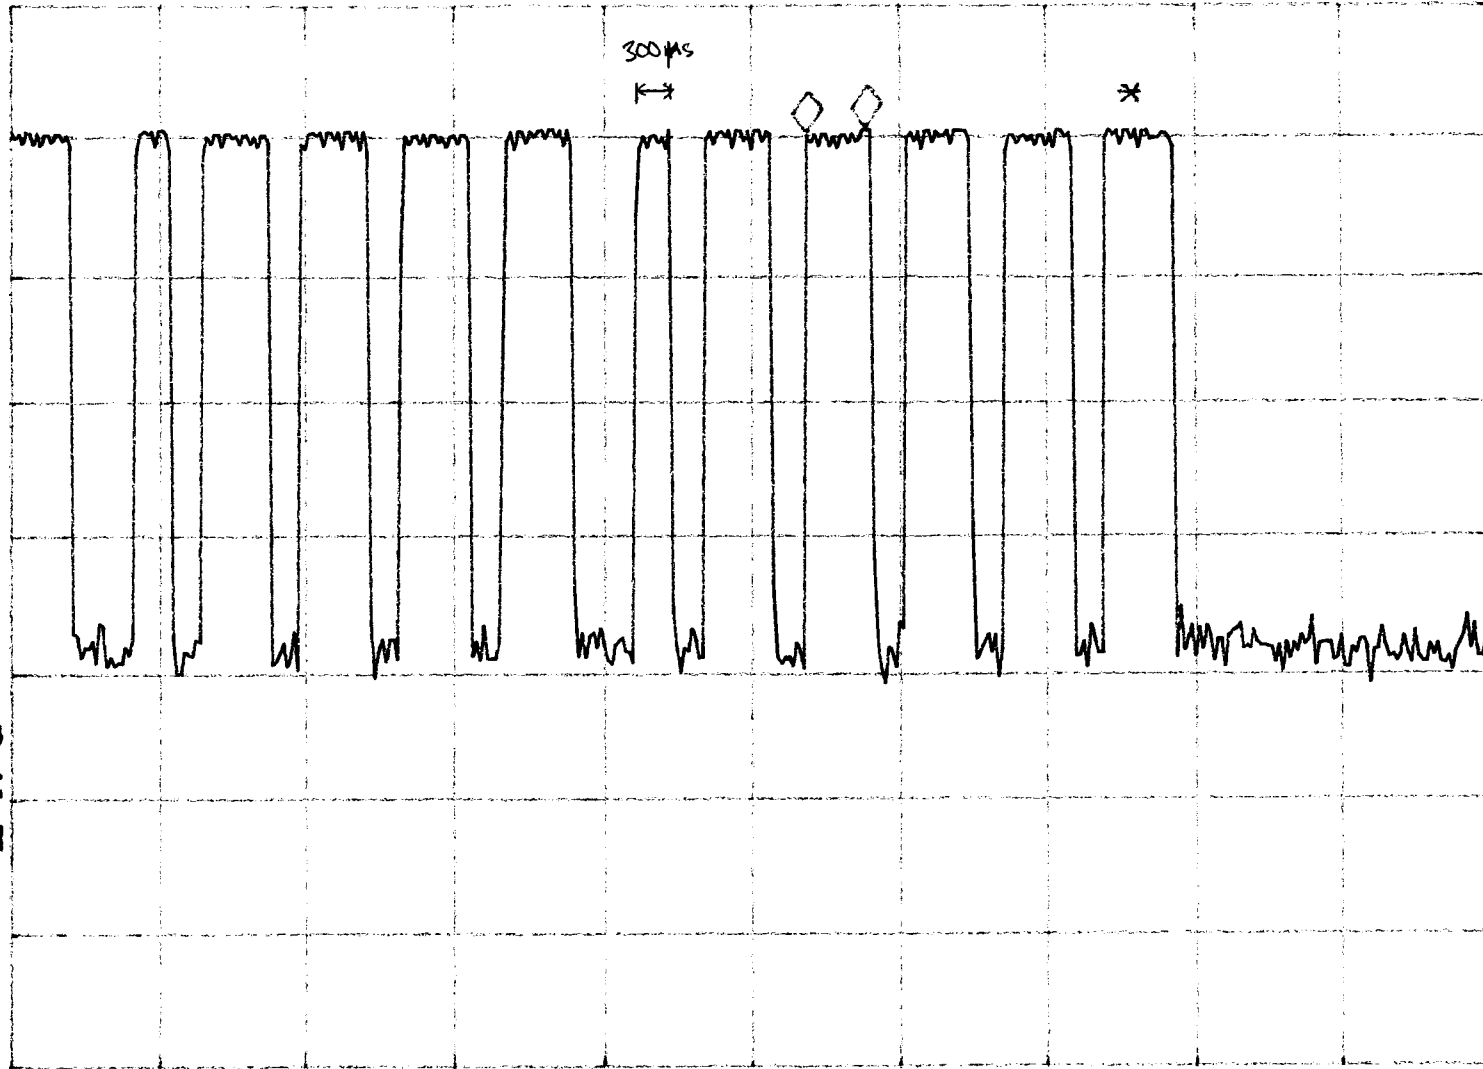

VA SB  
SC VS  
CORR

CENTER 349.900 MHz

SPAN 0 Hz

#RES BW 1.0 MHz

#VBW 1 MHz

#SWP 15.0 msec

10

MKR 2.9250 sec

REF 77.0 dB $\mu$ V

AT 10 dB


65.19 dB $\mu$ V

PEAK

LOG

10

dB/

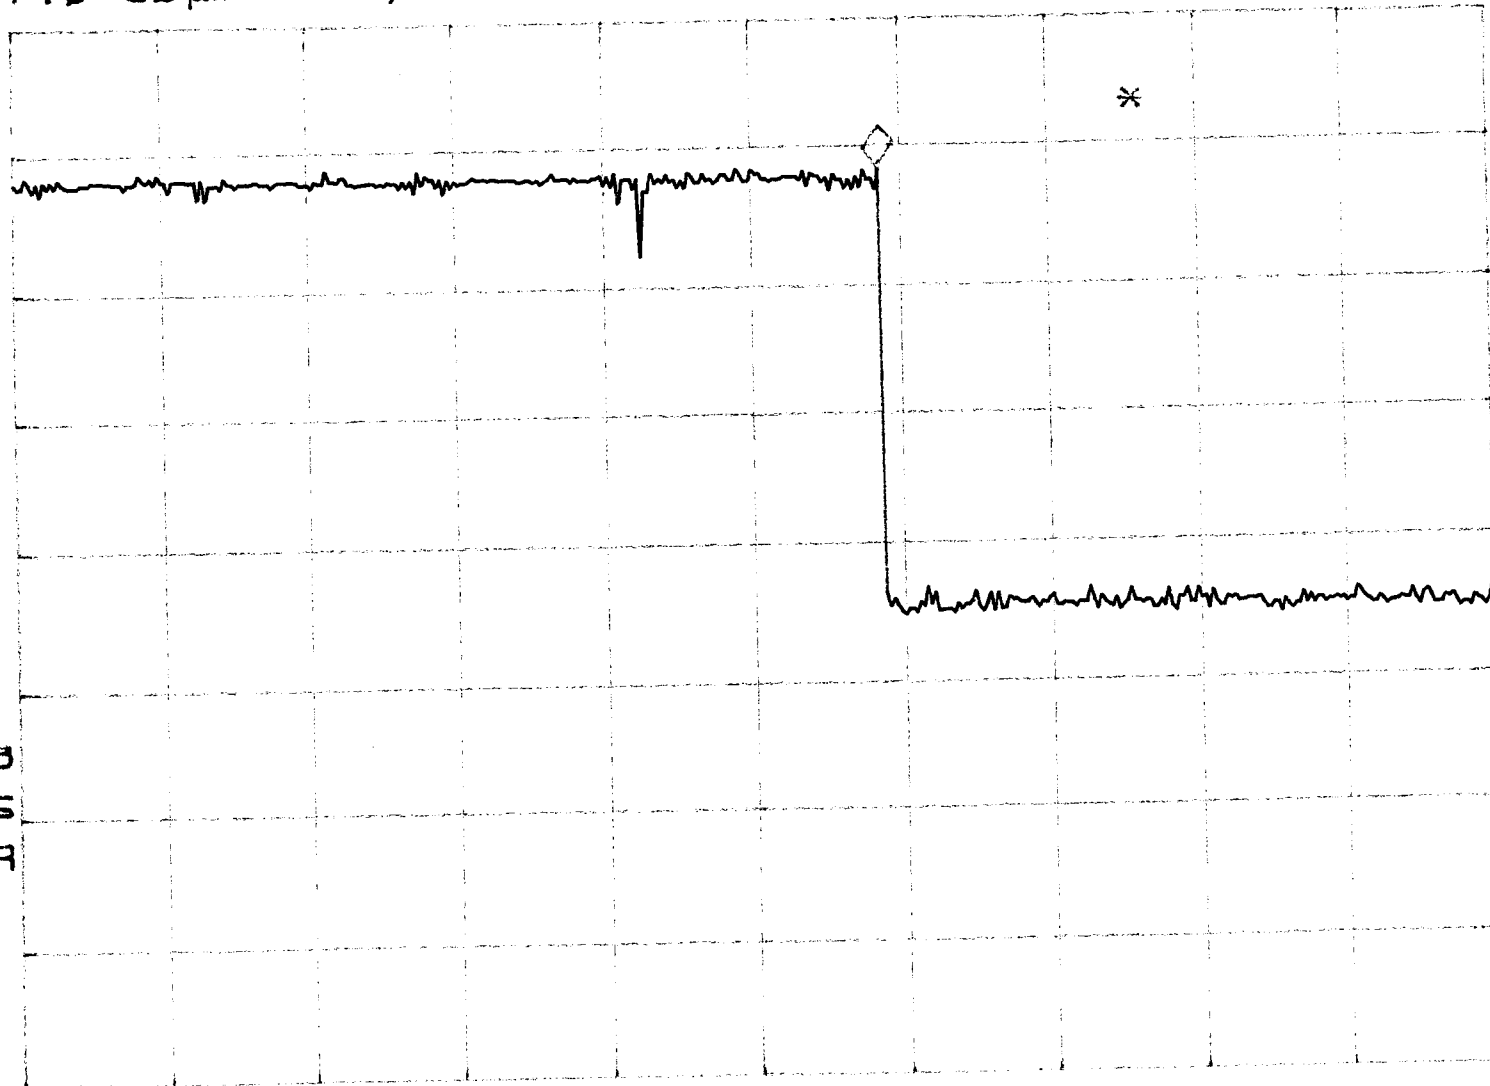

Manual On/Off;  
Thermostat On/Off

VA SB

SC VS

CORR

CENTER 349.900 MHz

#RES BW 1.0 MHz

#VBW 1 MHz

SPAN 0 Hz

#SWP 5.00 sec

HP


MKR 4.9000 sec

REF 77.0 dBμV

AT 10 dB

61.39 dBμV

PEAK  
LOG  
10  
dB/

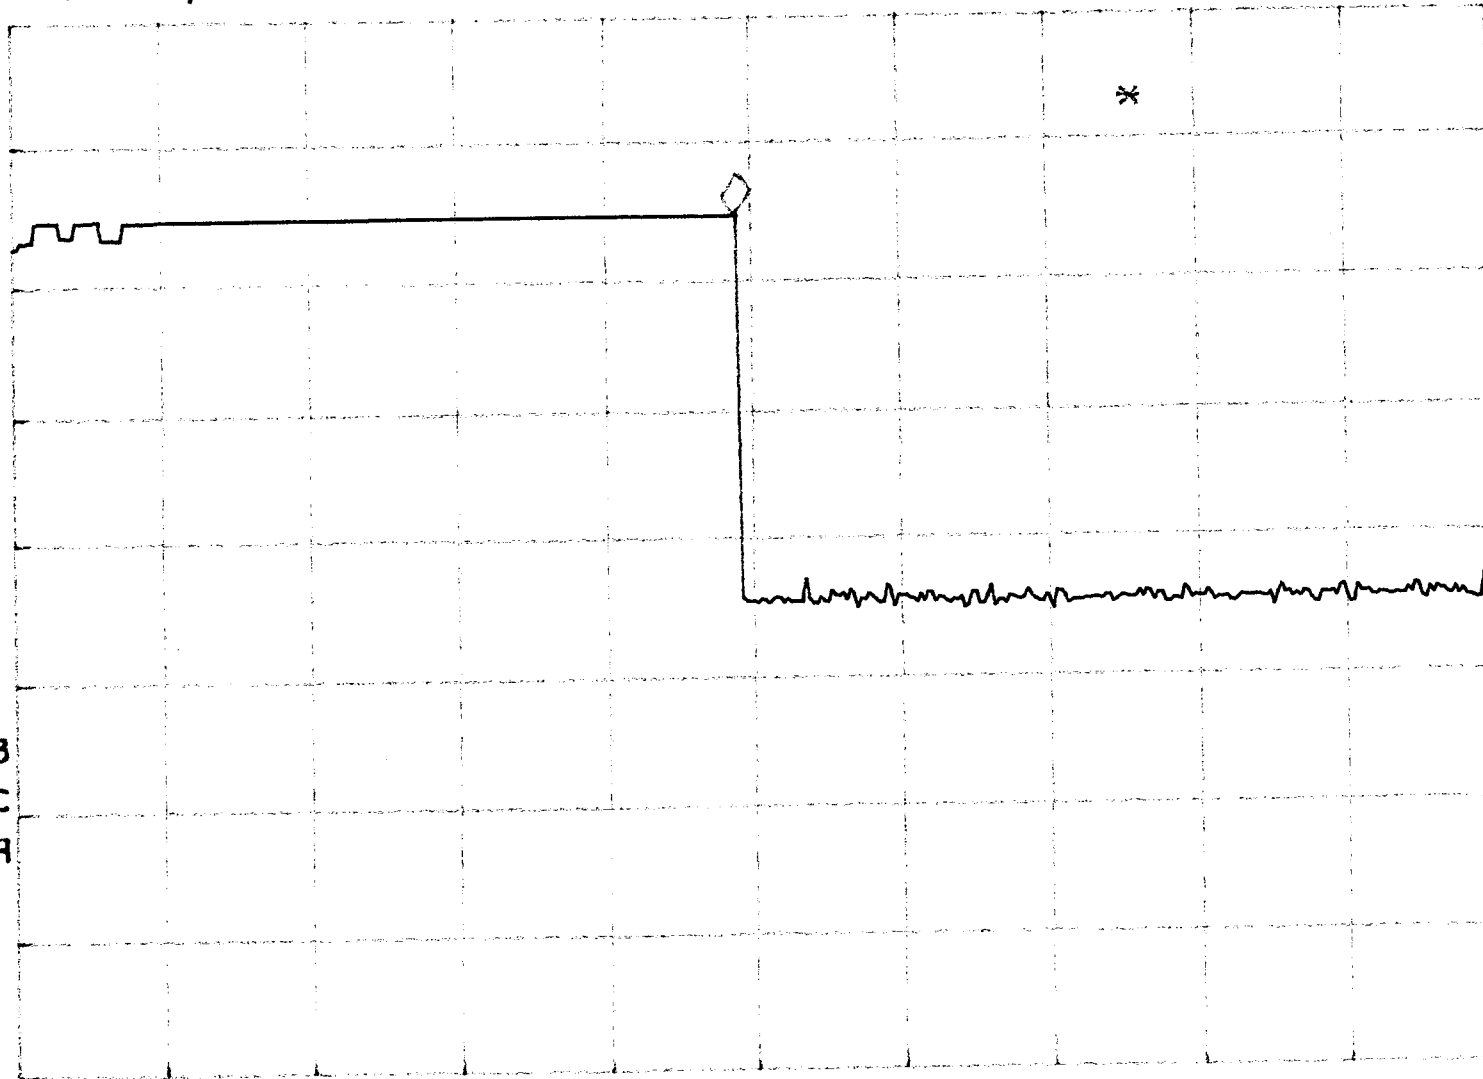

Thermal Shutdown;  
Low Battery;  
Continuous Touch;  
Automatic Shutdown

VA SB  
SC VC  
CORR

CENTER 349.900 MHz

SPAN 0 Hz

#RES BW 1.0 MHz

#VBW 1 MHz

#SWP 10.0 sec