



TEST REPORT

Report Number.: 13618993-E3V2

Applicant : DISH TECHNOLOGIES LLC
90 INVERNESS CIRCLE EAST
ENGLEWOOD, CO 80112, UNITED STATES

Model : D35

Brand : DISH

FCC ID : DKNBC88

EUT Description : TV SET TOP BOX CLIENT

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date of Issue:

April 06, 2021

Prepared by:

UL VERIFICATION SERVICES

47173 Benicia Street

Fremont, CA 94538 U.S.A.

TEL: (510) 319-4000

FAX: (510) 661-0888



NVLAP Lab code: 200065-0

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	3/30/2021	Initial Issue	--
V2	4/6/2021	Added AC power line I/O cables/block diagram on Section 6.6	Tina Chu

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULTS SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
5.4. SAMPLE CALCULATION	8
6. EQUIPMENT UNDER TEST	9
6.1. EUT DESCRIPTION	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
6.4. SOFTWARE AND FIRMWARE.....	9
6.5. WORST-CASE CONFIGURATION AND MODE.....	9
6.6. DESCRIPTION OF TEST SETUP.....	10
7. MEASUREMENT METHOD.....	13
8. TEST AND MEASUREMENT EQUIPMENT	14
9. ANTENNA PORT TEST RESULTS	15
9.1. ON TIME AND DUTY CYCLE.....	15
9.2. 99% BANDWIDTH.....	16
9.3. 6 dB BANDWIDTH.....	17
9.4. OUTPUT POWER.....	18
9.5. AVERAGE POWER.....	19
9.6. POWER SPECTRAL DENSITY.....	20
9.7. CONDUCTED SPURIOUS EMISSIONS.....	21
10. RADIATED TEST RESULTS	23

10.1.	LIMITS AND PROCEDURE.....	23
10.2.	TRANSMITTER ABOVE 1 GHz.....	25
10.3.	WORST CASE BELOW 30MHz	35
10.4.	WORST CASE BELOW 1 GHz	36
10.5.	WORST CASE 18-26 GHz.....	38
10.6.	SPURIOUS EMISSIONS FOR CO-LOCATION.....	40
11.	AC POWER LINE CONDUCTED EMISSIONS	43
12.	SETUP PHOTOS	46

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: DISH TECHNOLOGIES LLC
90 INVERNESS CIRCLE EAST
ENGLEWOOD, CO 80112, UNITED STATES

EUT DESCRIPTION: TV SET TOP BOX CLIENT

MODEL: D35

SERIAL NUMBER: CONDUCTED: E4EXVH00009A
RADIATED: E4EXVH00006A

SAMPLE RECEIPT DATE: FEBRUARY 12, 2021

DATE TESTED: FEBRUARY 17, 2021- MARCH 18, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.


This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Francisco deAnda
Staff Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Jose Martinez
Laboratory Engineer
Consumer Technology Division
UL Verification Services Inc.

Reviewed By:



Tina Chu
Senior Project Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULTS SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

FCC Clause	Requirement	Result	Comment
See Comment	Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	6dB BW	Complies	None.
15.247 (b) (3)	Output Power	Complies	None.
See Comment	Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	PSD	Complies	None.
15.247 (d)	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	Radiated Emissions	Complies	None.
15.207	AC Mains Conducted Emissions	Complies	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01.

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538	US0104	2324A	208313
<input type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538	US0104	22541	208313
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538	US0104	2324B	208313

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.84 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.74 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a TV Set Top Box Client with RF4CE Zigbee, BLE (2Mbps), and BT radios.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2425-2475	ZIGBEE	5.71	3.72

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna gain(s) and type, as provided by the manufacturer, are as follows:

The radio utilizes a PCB Inverted F antenna, with a maximum gain of 4.1 dBi.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was Dish Agency Build 3.4.

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

The EUT is a desktop device, therefore, all final radiated testing was performed with the EUT in X orientation.


This EUT supports BLE/BT + Zigbee simultaneous transmission, radiated emission test was performed.

Data rate provided by manufacturer: 250kbps, O-QPSK modulation.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description	Manufacturer	Model	Serial Number	FCC ID/ DoC		
AC/DC Adapter(EUT)	NetBit	NBC25A120210VU	-	Doc		
Switch	Netgear	FS108	1D417A3N0386A	Doc		
Switching Adapter	Netgear	DSA-9R-05 AUS	-	Doc		
Laptop	HP	EliteBook 740	-	DoC		
AC/DC Adapter(Laptop)	HP	HSTNN-DA40	-	DoC		
Monitor	SCEPTRE	E248W-1920R	J07F248CCD8002	Doc		
AC/DC Adapter (Monitor)	BSY	BSYF120250U W	-	Doc		
USB Flash Drive	SanDisk	SDCZ60-016G	-	Doc		
TV	Sharp	LC-43LB601U	MZVI4YA008695	Doc		
I/O CABLES (CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	Two Prong	Un-shielded	1	EUT to AC Mains
2	Antenna	1	RF	Un-shielded	0.2	To spectrum analyzer
I/O CABLES (RADIATED TEST AND AC POWER LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	Barrel	Un-shielded	1	EUT to AC/DC adapter Mains
2	USB	1	Type A	Un-shielded	0	USB to EUT
3	Coaxial	1	Coaxial	Shielded	More than 3	EUT to TV
4	AC	1	Two Prong	Un-shielded	1.5	TV to AC mains
5	RJ45	1	RJ45	Un-shielded	More than 3	EUT to Ethernet Switch
6	AC	1	Two Prong	Un-shielded	1	Ethernet switch to AC Mains
7	HDMI	1	HDMI	Un-shielded	1	EUT to Monitor
8	DC	1	Two Prong	Un-shielded	2.5	Monitor to AC/DC adapter Mains


CONDUCTED TEST SETUP DIAGRAM

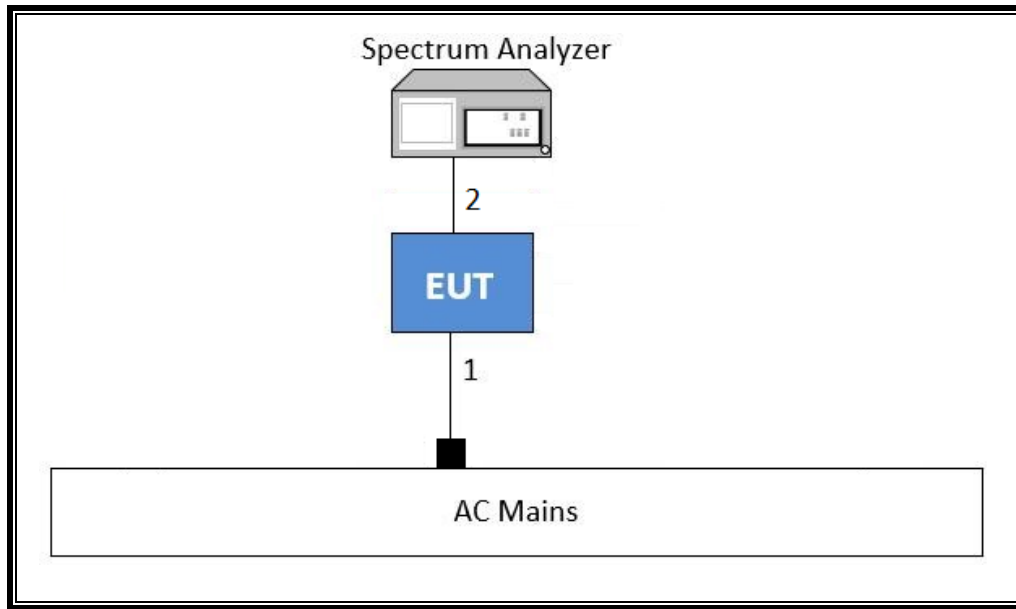

TEST SETUP

Upon power up the EUT, the Zigbee radio will be exercised.

RADIATED TEST AND AC POWER LINE CONDUCTED TEST SETUP DIAGRAM

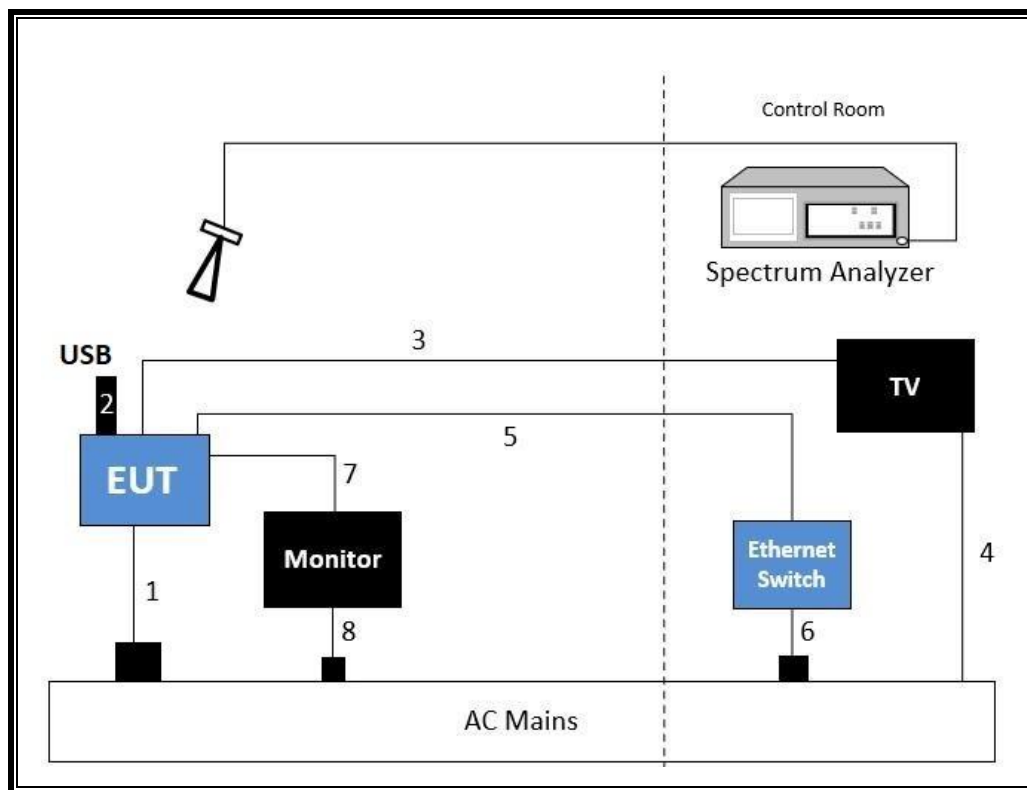

TEST SETUP

The EUT is connected to support equipment and AC powered. Upon power up the EUT, the Zigbee radio will be exercised. Power cycle to switch the test mode.

7. MEASUREMENT METHOD

On Time and Duty Cycle: ANSI C63.10 Section 11.6.

6 dB BW: ANSI C63.10 Section 11.8.1

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Section 11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Section 11.10.2. Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Section -11.11

Radiated emissions restricted frequency bands: ANSI C63.10 Section -11.12.1

Conducted emissions in restricted frequency bands: ANSI C63.10 Section -11.12.2

Band-edge: ANSI C63.10 Section 6.10

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	PRE0184970 (174373)	12/2/2021	12/2/2020
Amplifier, 10KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310N	T300	3/2/2022	3/2/2021
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	170647	12/29/2021	12/29/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	5/26/2021	5/26/2020
Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	PRE0180571	4/14/2021	4/14/2020
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179376	2/21/2022	2/21/2021
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO METRICS	EM-6871	PRE0179466	5/27/2021	5/27/2020
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO METRICS	EM-6872	PRE0179468	5/27/2021	5/27/2020
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	9/24/2021	9/24/2020
Rf Amplifier, 18-26.5GHz, 60dB gain	AMPLICAL	AMP18G26.5-60	PRE0181238	6/7/2021	6/7/2020
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight Technologies Inc	E4446A	T123	1/22/2022	1/22/2021
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	T143	*2/26/2021	2/26/2020
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	T1269	1/25/2022	1/25/2021
AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
LISN	Fischer Custom Communications, Inc	FCC-LISN-50/250-25-2-01-480V	PRE0186446	1/20/2022	1/20/2021
LISN	Fischer Custom Communications, Inc	FCC-LISN-50/250-25-2	T24	1/20/2022	1/20/2021
EMI TEST RECEIVER	Rohde & Schwarz	ESR	T1436	2/19/2022	2/19/2021
Transient Limiter	COM-POWER	LIT-930A	T1457	1/20/2022	1/20/2021
Test Software List					
Description	Manufacturer	Model	Version		
Radiated Software	UL	UL EMC	Rev 9.5, April 30, 2020, Oct 21, 2019		
Antenna Port Software	UL	UL RF	AP 2021.1.19		
AC Line Conducted Software	UL	UL EMC	Rev 9.5, July 07, 2020		

*Test performed within calibration period.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
ZIGBEE	0.057	0.057	1.000	100.00	0.00	0.010

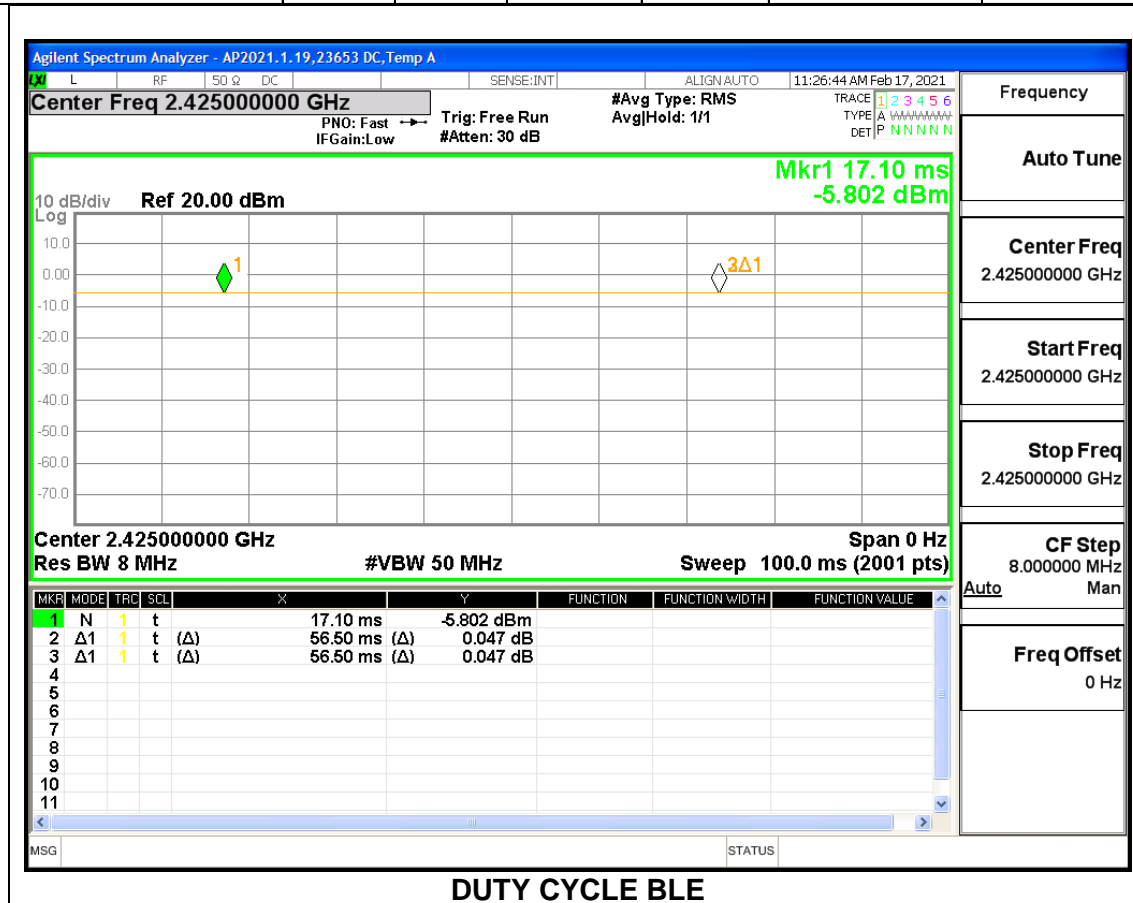




9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2425	2.5752
Middle	2450	2.5778
High	2475	2.5741

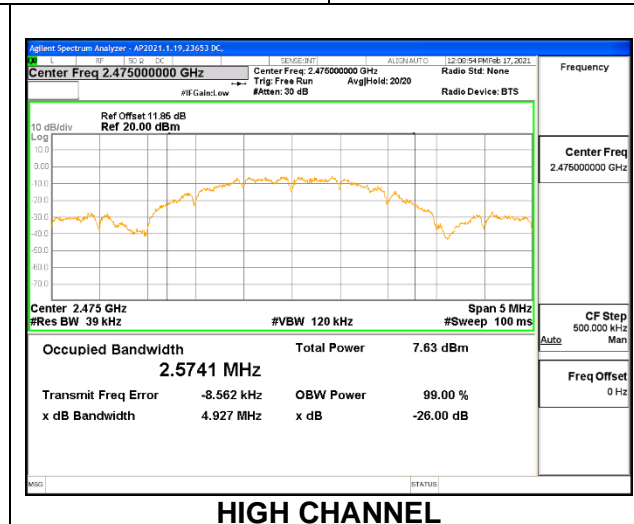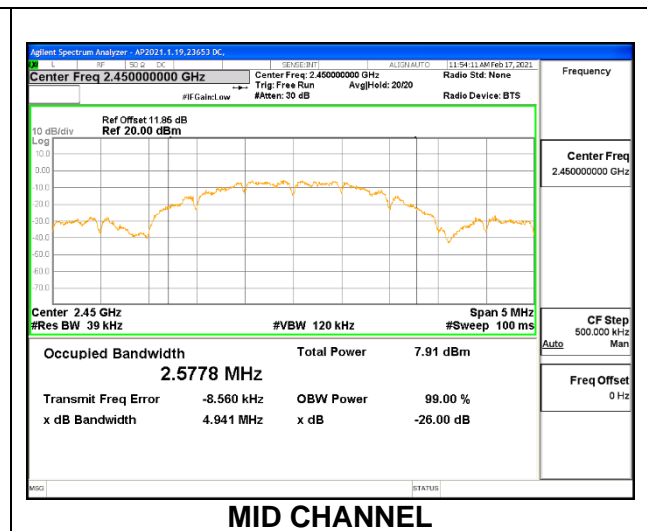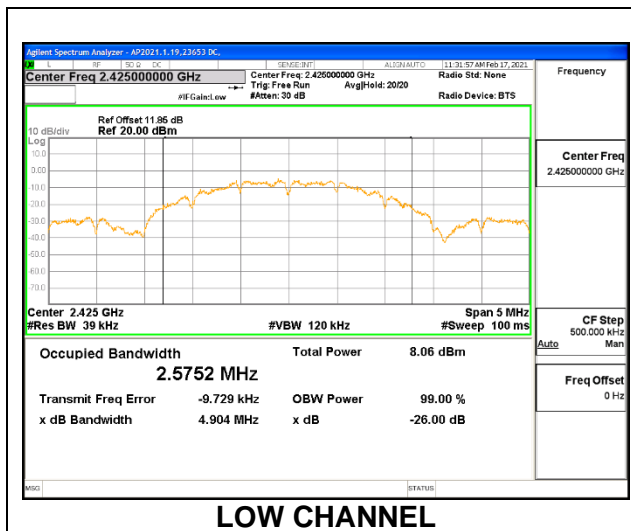

9.3. 6 dB BANDWIDTH


LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2425	1.610	0.5
Middle	2450	1.590	0.5
High	2475	1.640	0.5

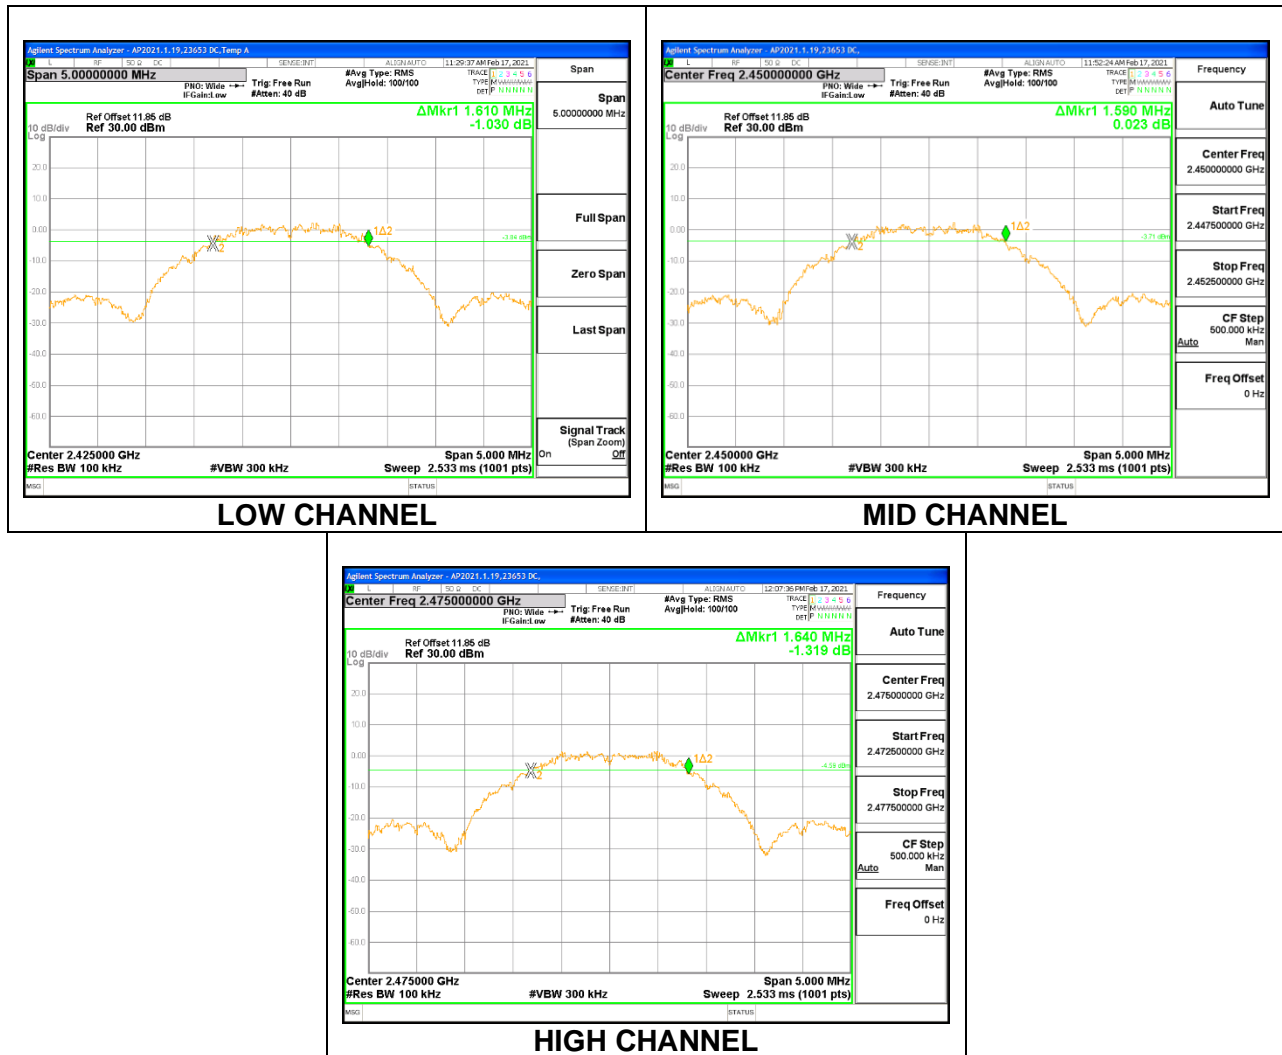

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from the power meter.

RESULTS

Tested By:	20756 CW
Date:	2/17/2021

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2425	5.71	30	-24.290
Middle	2450	5.60	30	-24.400
High	2475	5.37	30	-24.630

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

Tested By:	20756 CW
Date:	2/17/2021

Channel	Frequency (MHz)	AV power (dBm)
Low	2425	5.43
Middle	2450	5.29
High	2475	5.09

9.6. POWER SPECTRAL DENSITY


LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2425	-9.543	8	-17.54
Middle	2450	-9.884	8	-17.88
High	2475	-9.443	8	-17.44

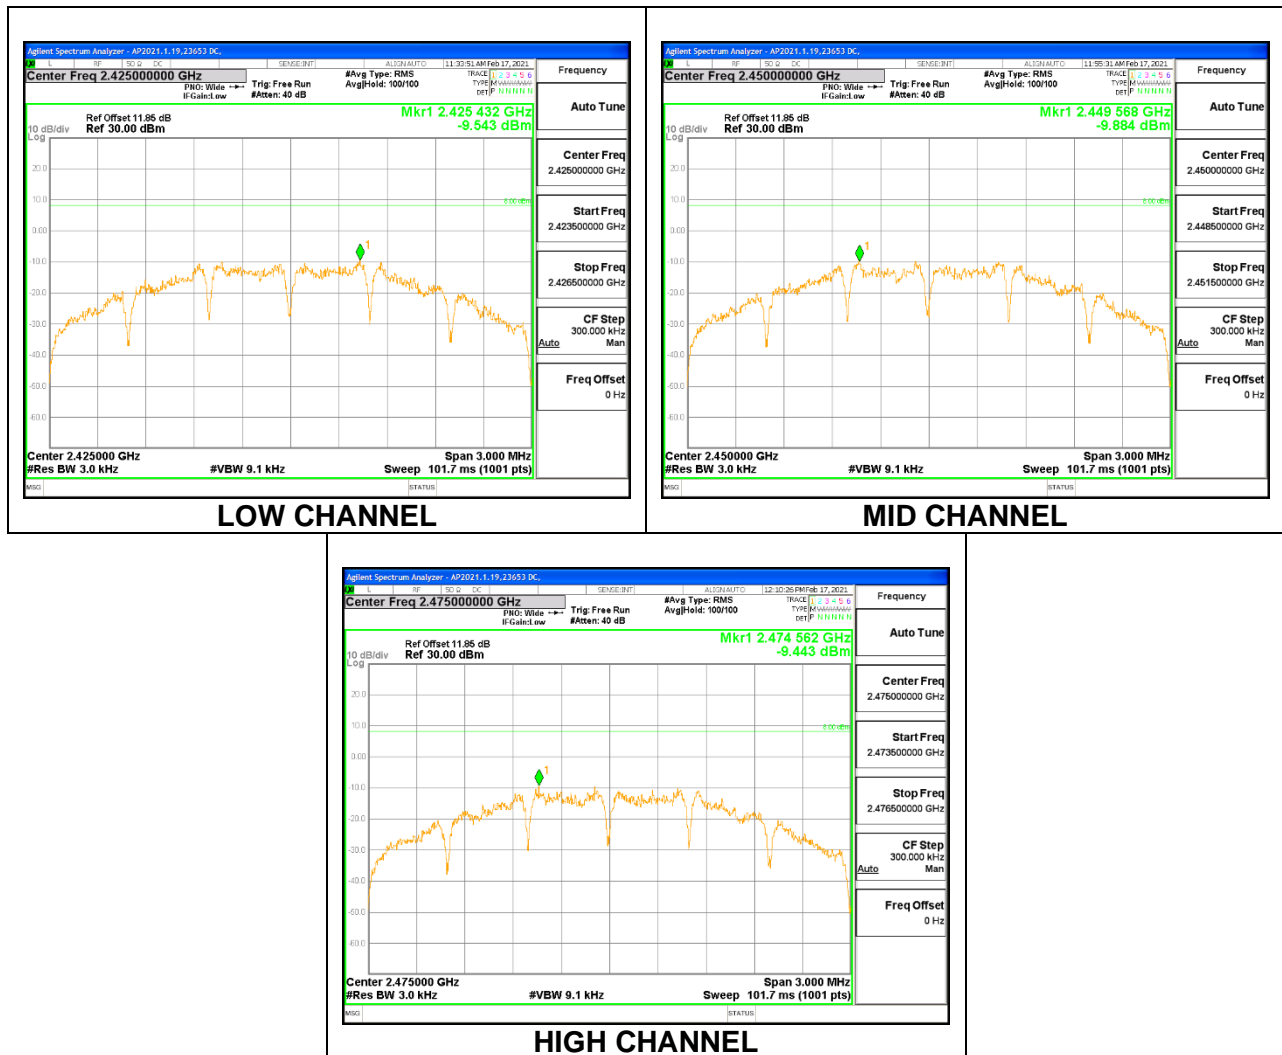

9.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS


FCC §15.247 (d)

Output power was measured based on the use of a peak measurement; therefore, the required attenuation is 20 dBc.


RESULTS




LOW CHANNEL BANDEDGE

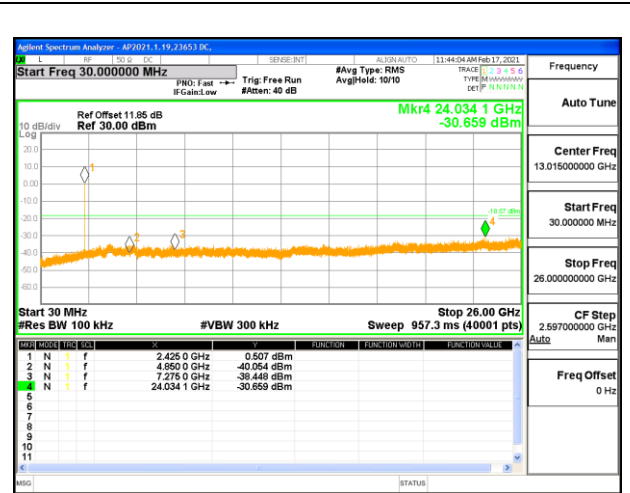


OUT-OF-BAND LOW CHANNEL

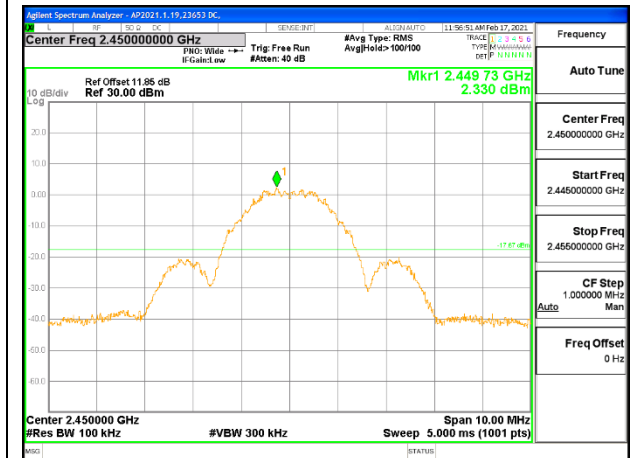


IN-BAND REFERENCE LEVEL

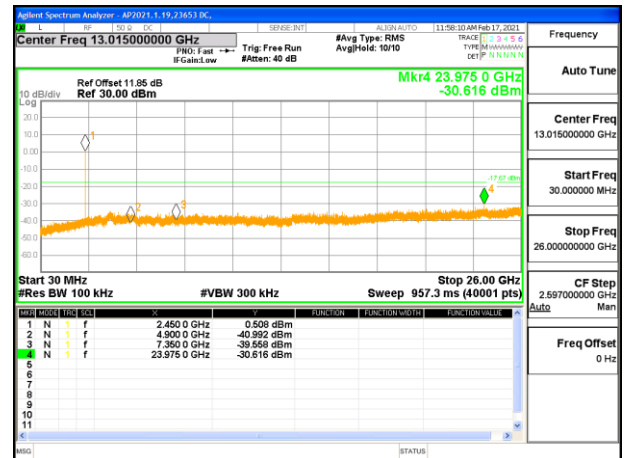

OUT-OF-BAND MID CHANNEL

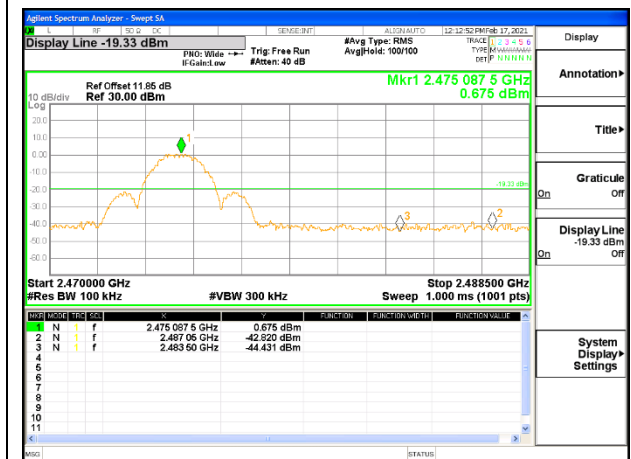

HIGH CHANNEL BANDEDGE

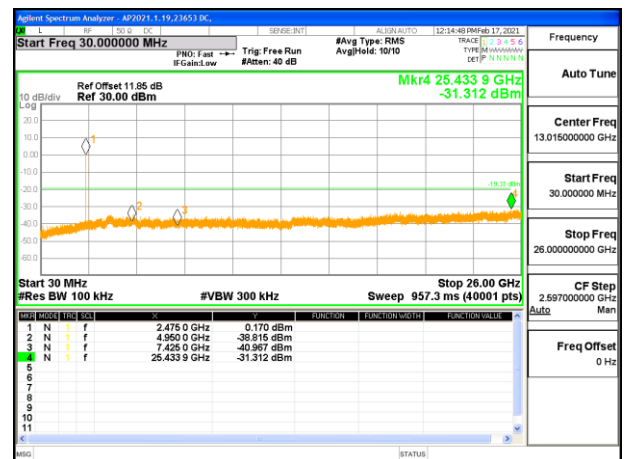

OUT-OF-BAND HIGH CHANNEL

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only. Blue color trace on plots: Parallel orientation. Green color trace on plots: Perpendicular orientation.

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst-case test result.


KDB 558074 D01 15.247 Meas Guidance v05r02

Use of a duty cycle correction factor (DCCF) is permitted for calculating average radiated field strength emission levels for an FHSS device in 15.247. This DCCF can be applied when the field strength limit (e.g., within a Government Restricted band) and the conditions specified in Section 15.35(c) can be satisfied. The average radiated field strength is calculated by subtracting the DCCF from the maximum radiated field strength level as determined through measurement. The maximum radiated field strength level represents the worst-case (maximum amplitude) RMS measurement of the emission(s) during continuous transmission (i.e., not including any time intervals during which the transmitter is off or is transmitting at a reduced power level). It is also acceptable to apply the DCCF to a measurement performed with a peak detector instead of the specified RMS power averaging detector. Note that Section 15.35(c) specifies that the DCCF shall represent the worst-case (greatest duty cycle) over any 100 msec transmission period.

10.2. TRANSMITTER ABOVE 1 GHz

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

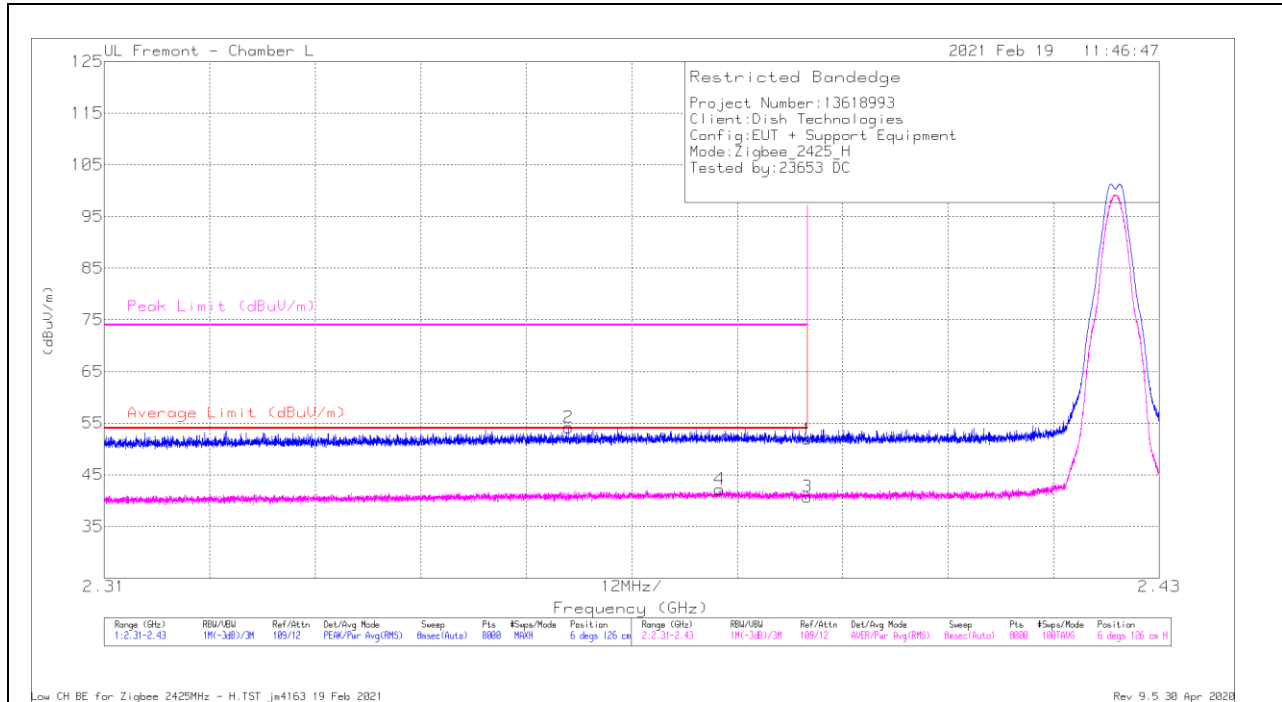

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbW/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	33.1	Pk	31.9	-13.1	51.9	-	-	74	-22.1	6	126	H
2	* 2.36282	35.56	Pk	31.7	-13.1	54.16	-	-	74	-19.84	6	126	H
3	* 2.38999	21.95	RMS	31.9	-13.1	40.75	54	-13.25	-	-	6	126	H
4	* 2.38	23.38	RMS	31.8	-13	42.18	54	-11.82	-	-	6	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

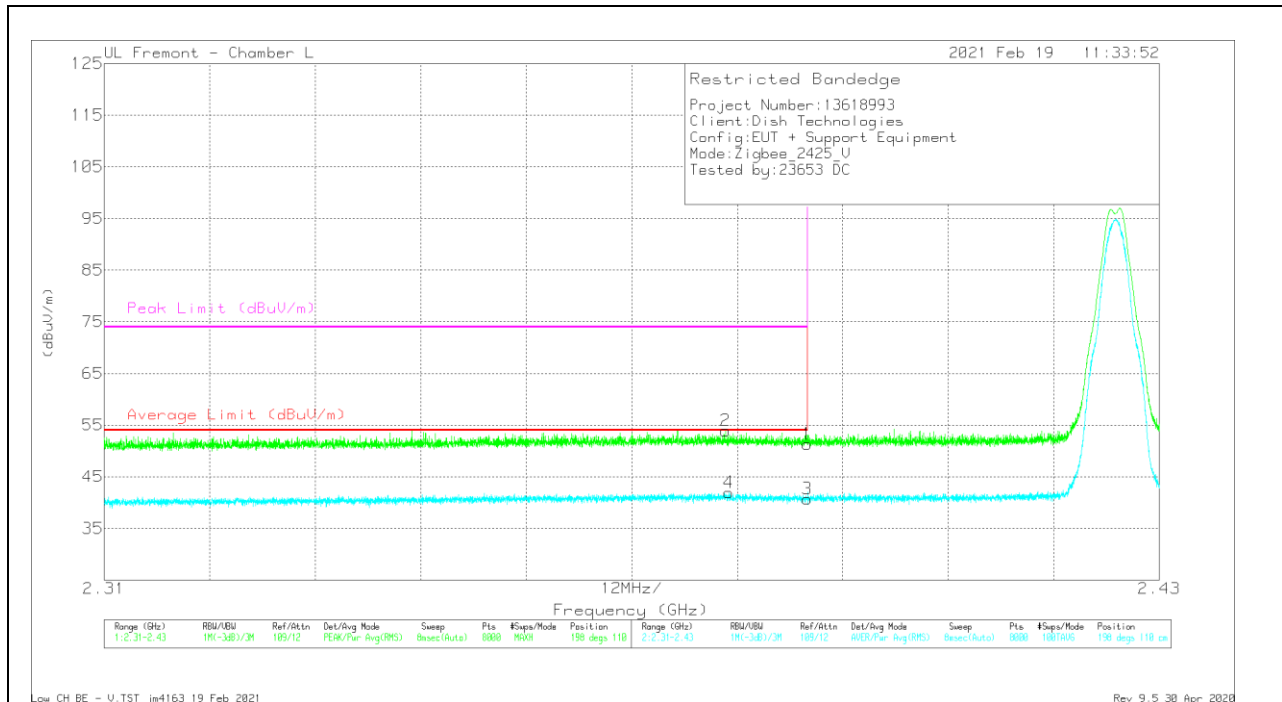


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbW/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	32.54	Pk	31.9	-13.1	51.34	-	-	74	-22.66	198	110	V
2	* 2.38067	35.13	Pk	31.8	-13	53.93	-	-	74	-20.07	198	110	V
3	* 2.38999	21.91	RMS	31.9	-13.1	40.71	54	-13.29	-	-	198	110	V
4	* 2.38102	23.12	RMS	31.8	-13	41.92	54	-12.08	-	-	198	110	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

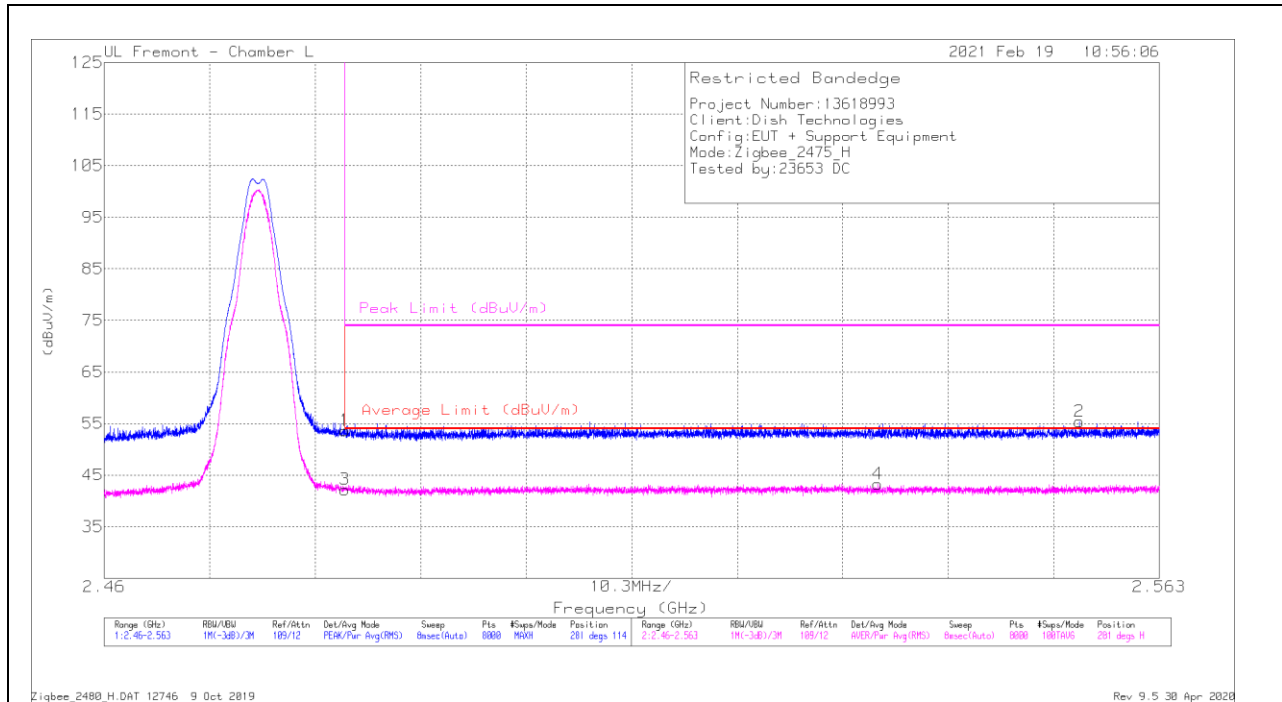

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Filtz/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	34.24	Pk	32.3	-12.9	53.64	-	-	74	-20.36	281	114	H
2	2.5552	35.68	Pk	32.3	-12.6	55.38	-	-	74	-18.62	281	114	H
3	* 2.4835	22.82	RMS	32.3	-12.9	42.22	54	-11.78	-	-	281	114	H
4	2.5355	23.67	RMS	32.3	-12.7	43.27	54	-10.73	-	-	281	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

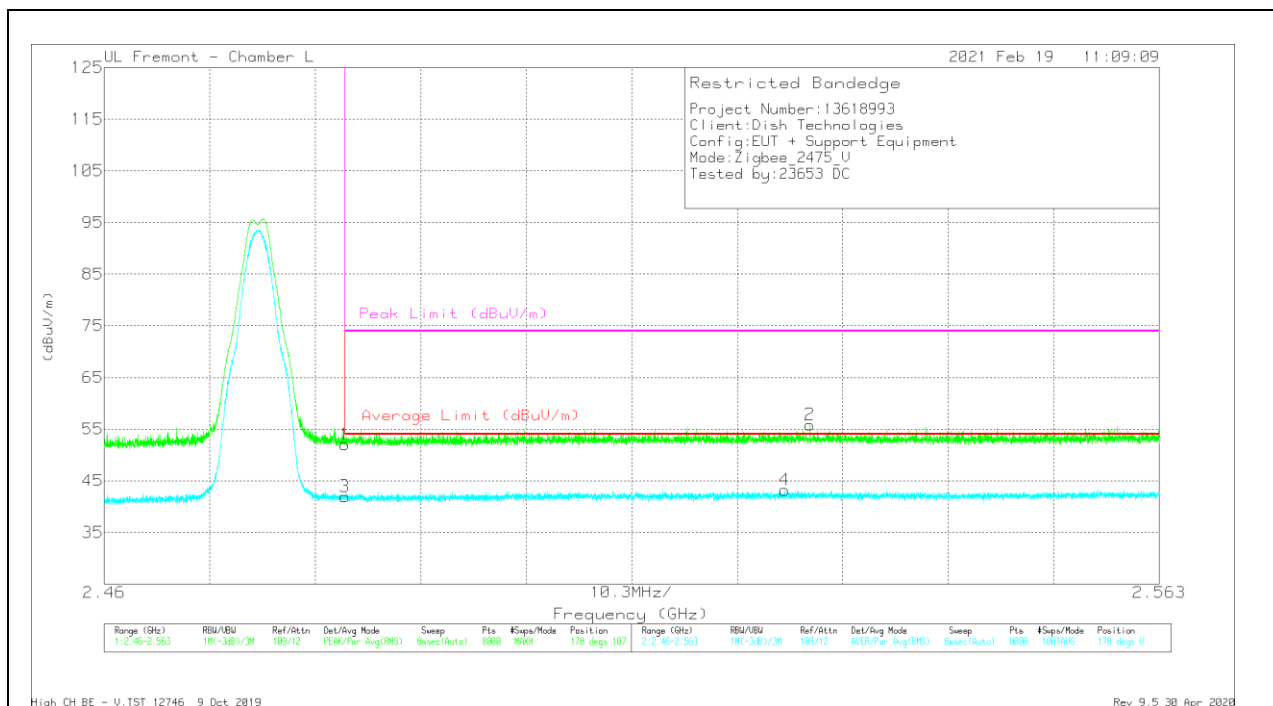


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/CbI/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	32.6	Pk	32.3	-12.9	52	-	-	74	-22	178	107	V
2	2.5289	36.14	PK	32.4	-12.7	55.84	-	-	74	-18.16	178	107	V
3	* 2.4835	22.52	RMS	32.3	-12.9	41.92	54	-12.08	-	-	178	107	V
4	2.52642	23.51	RMS	32.4	-12.7	43.21	54	-10.79	-	-	178	107	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

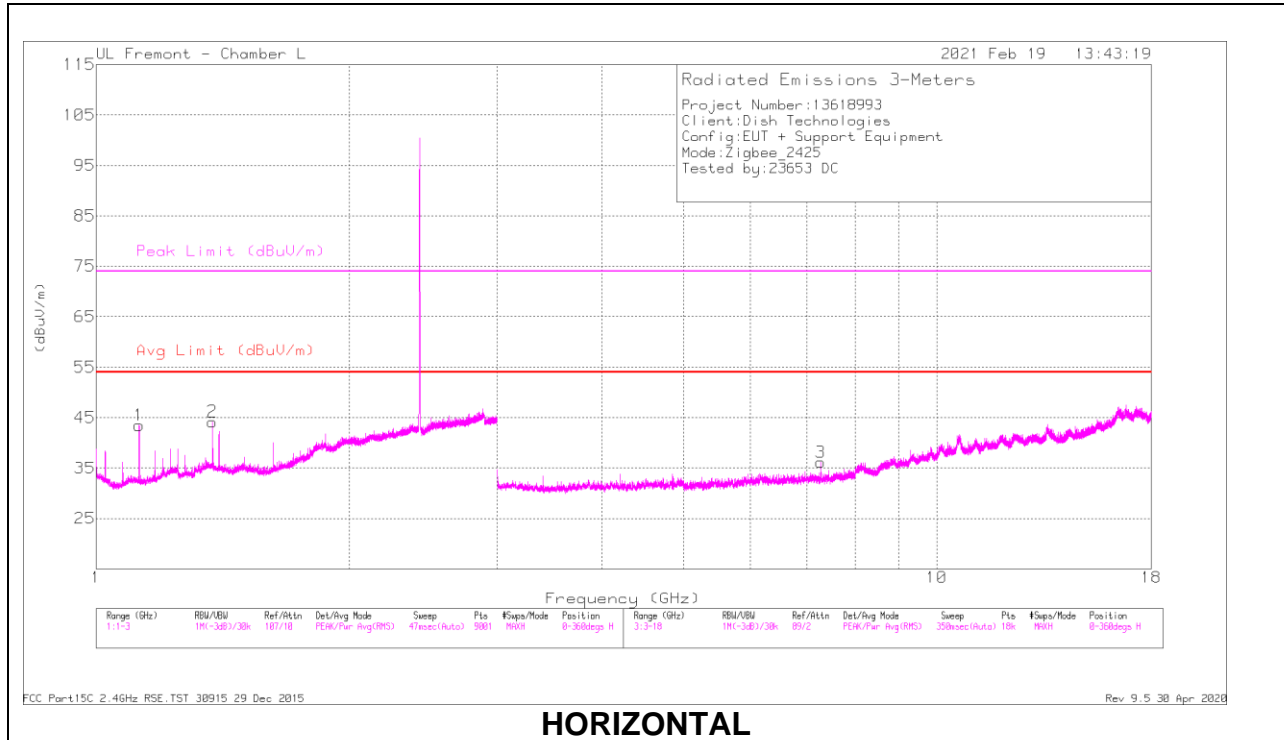

HORIZONTAL

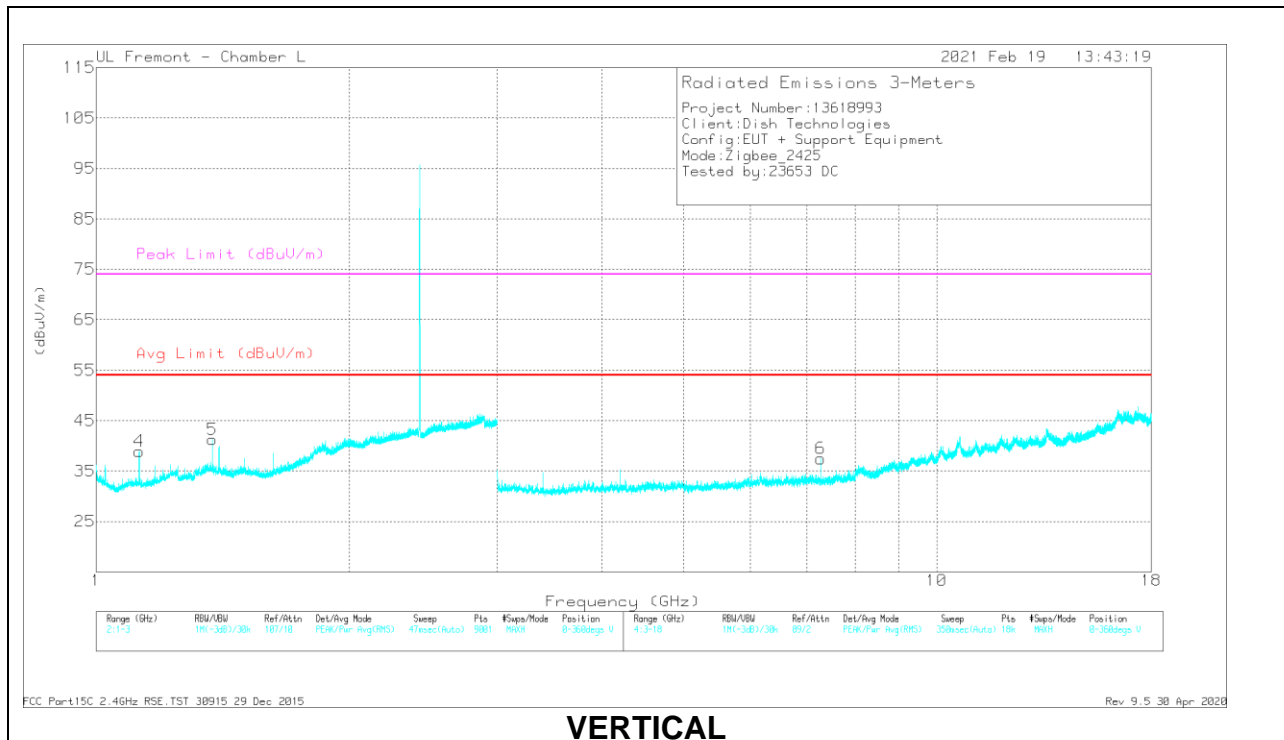

VERTICAL

Radiated Emissions


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.1249	37.57	PK2	27.3	-17.5	47.37	-	-	74	-26.63	196	109	H
	* 1.125	31.86	MAv1	27.3	-17.5	41.66	54	-12.34	-	-	196	109	H
2	* 1.37503	37.28	PK2	29.2	-16.6	49.88	-	-	74	-24.12	311	270	H
	* 1.37499	30.77	MAv1	29.2	-16.6	43.37	54	-10.63	-	-	311	270	H
4	* 1.125	34.37	PK2	27.3	-17.5	44.17	-	-	74	-29.83	174	148	V
	* 1.12501	27.93	MAv1	27.3	-17.5	37.73	54	-16.27	-	-	174	148	V
5	* 1.37486	32.96	PK2	29.2	-16.6	45.56	-	-	74	-28.44	195	101	V
	* 1.37506	24.85	MAv1	29.2	-16.6	37.45	54	-16.55	-	-	195	101	V
3	* 7.27507	33.98	PK2	35.5	-23.9	45.58	-	-	74	-28.42	352	398	H
	* 7.27412	23.77	MAv1	35.5	-23.9	35.37	54	-18.63	-	-	352	398	H
6	* 7.27645	31.66	PK2	35.5	-23.9	43.26	-	-	74	-30.74	174	107	V
	* 7.27641	22.77	MAv1	35.5	-23.9	34.37	54	-19.63	-	-	174	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

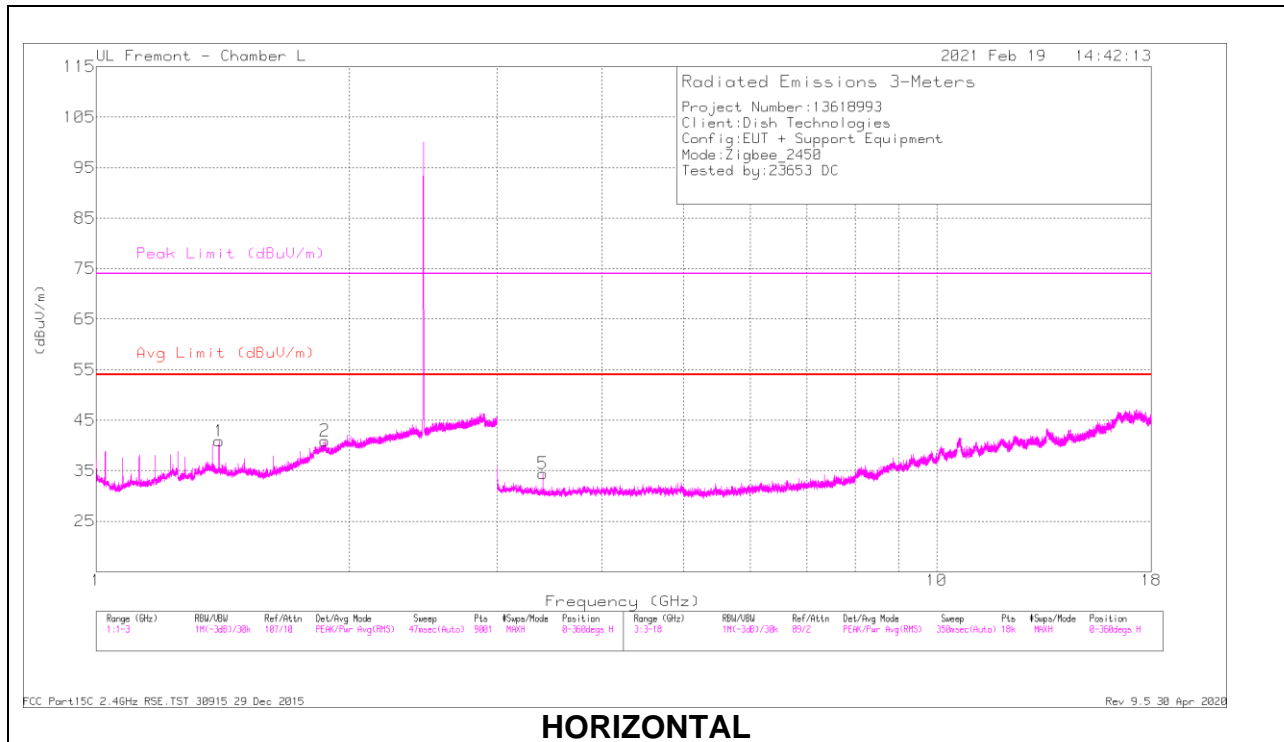

HORIZONTAL

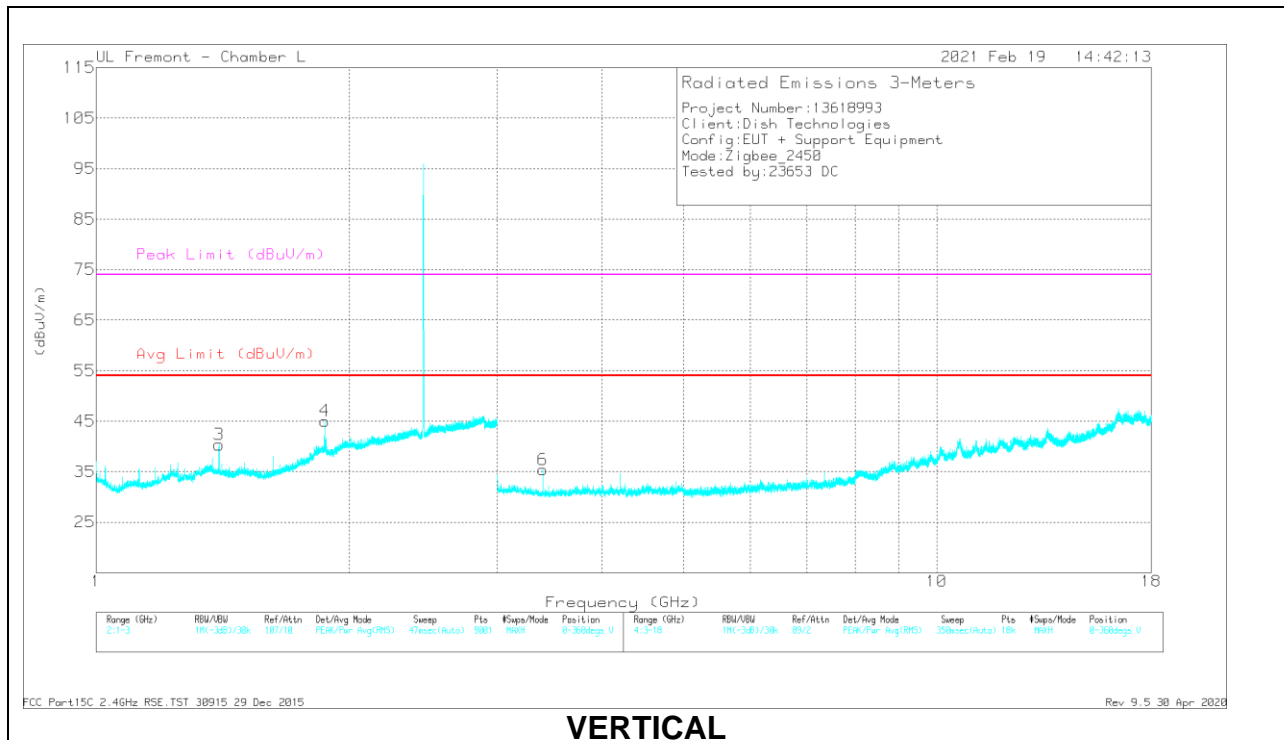


VERTICAL

Radiated Emissions


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.40005	34.64	PK2	28.7	-16.5	46.84	-	-	74	-27.16	273	166	H
	* 1.40001	28.76	MAv1	28.7	-16.5	40.96	54	-13.04	-	-	273	166	H
2	1.87186	32.72	PK2	30.7	-14.6	48.82	-	-	-	-	242	204	H
	1.87099	21.11	MAv1	30.7	-14.7	37.11	-	-	-	-	242	204	H
3	* 1.39999	33.59	PK2	28.7	-16.5	45.79	-	-	74	-28.21	241	147	V
	* 1.4	25.65	MAv1	28.7	-16.5	37.85	54	-16.15	-	-	241	147	V
4	1.8712	34.82	PK2	30.7	-14.6	50.92	-	-	-	-	166	176	V
	1.8719	20.63	MAv1	30.7	-14.6	36.73	-	-	-	-	166	176	V
5	3.39997	37.69	PK2	32.6	-28.6	41.69	-	-	-	-	50	146	H
	3.39999	30.34	MAv1	32.6	-28.6	34.34	-	-	-	-	50	146	H
6	3.40006	37.88	PK2	32.6	-28.6	41.88	-	-	-	-	44	105	V
	3.40001	30.27	MAv1	32.6	-28.6	34.27	-	-	-	-	44	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

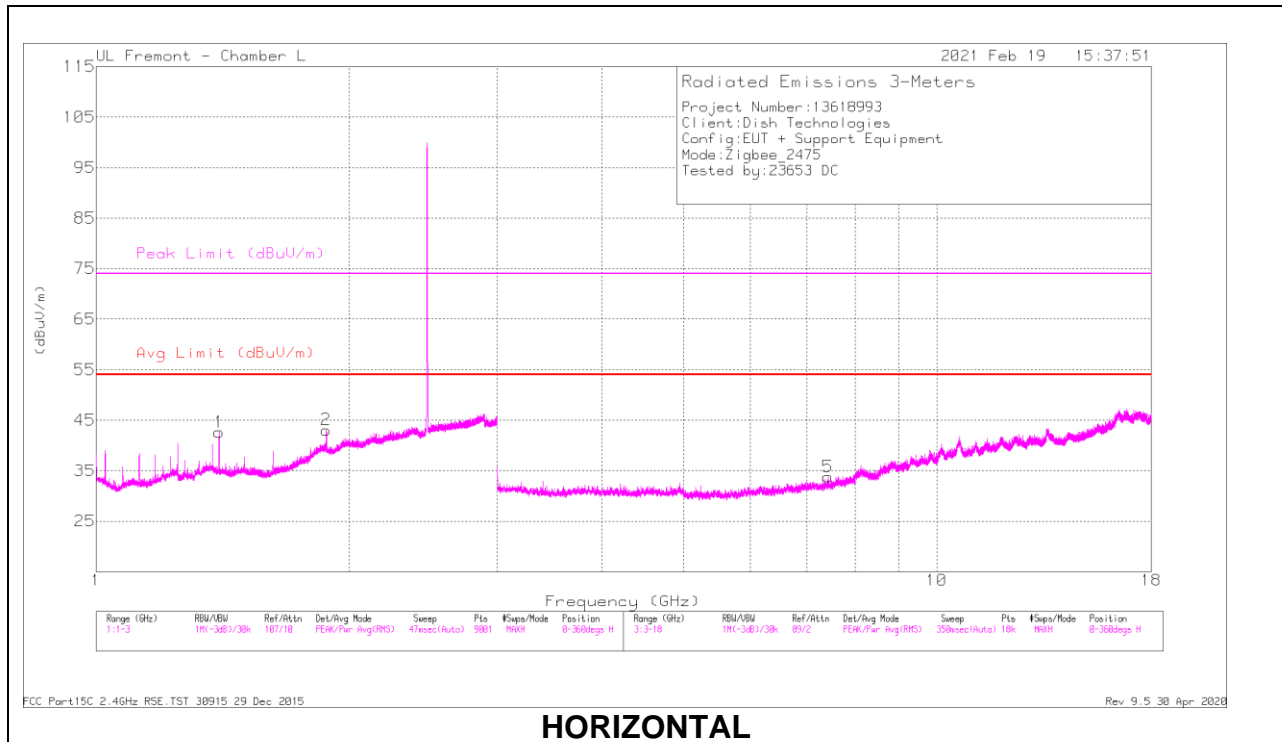

HORIZONTAL

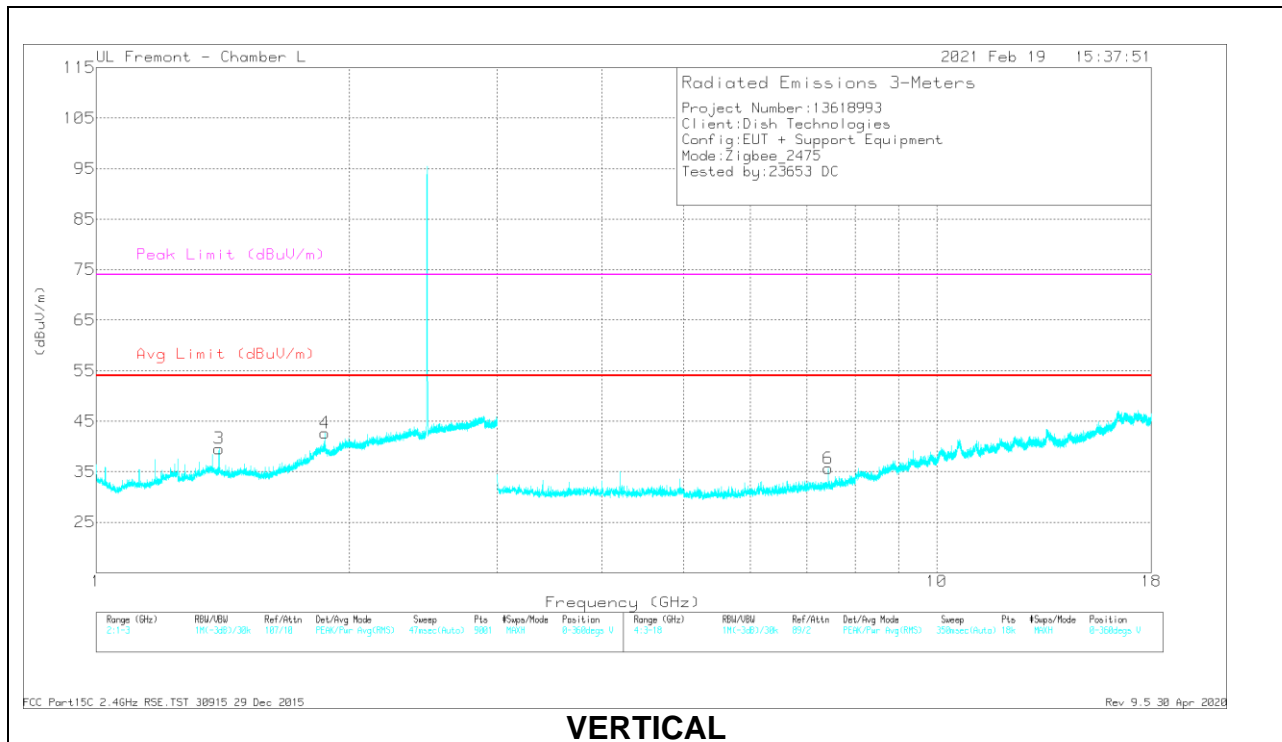

VERTICAL


Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.40007	35.23	PK2	28.7	-16.5	47.43	-	-	74	-26.57	269	267	H
	* 1.4	30.32	MAv1	28.7	-16.5	42.52	54	-11.48	-	-	269	267	H
2	1.87942	30.64	PK2	30.6	-14.6	46.64	-	-	-	-	213	242	H
	1.87915	19.71	MAv1	30.6	-14.6	35.71	-	-	-	-	213	242	H
3	* 1.39994	33.34	PK2	28.7	-16.5	45.54	-	-	74	-28.46	192	173	V
	* 1.40004	26.55	MAv1	28.7	-16.5	38.75	54	-15.25	-	-	192	173	V
4	1.87165	31.17	PK2	30.7	-14.6	47.27	-	-	-	-	192	211	V
	1.87029	21.19	MAv1	30.7	-14.7	37.19	-	-	-	-	192	211	V
5	* 7.42408	32.92	PK2	35.5	-23.3	45.12	-	-	74	-28.88	356	388	H
	* 7.42361	22.69	MAv1	35.5	-23.3	34.89	54	-19.11	-	-	356	388	H
6	* 7.4274	29.08	PK2	35.5	-23.3	41.28	-	-	74	-32.72	232	264	V
	* 7.42542	18.97	MAv1	35.5	-23.3	31.17	54	-22.83	-	-	232	264	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

10.3. WORST CASE BELOW 30MHz

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

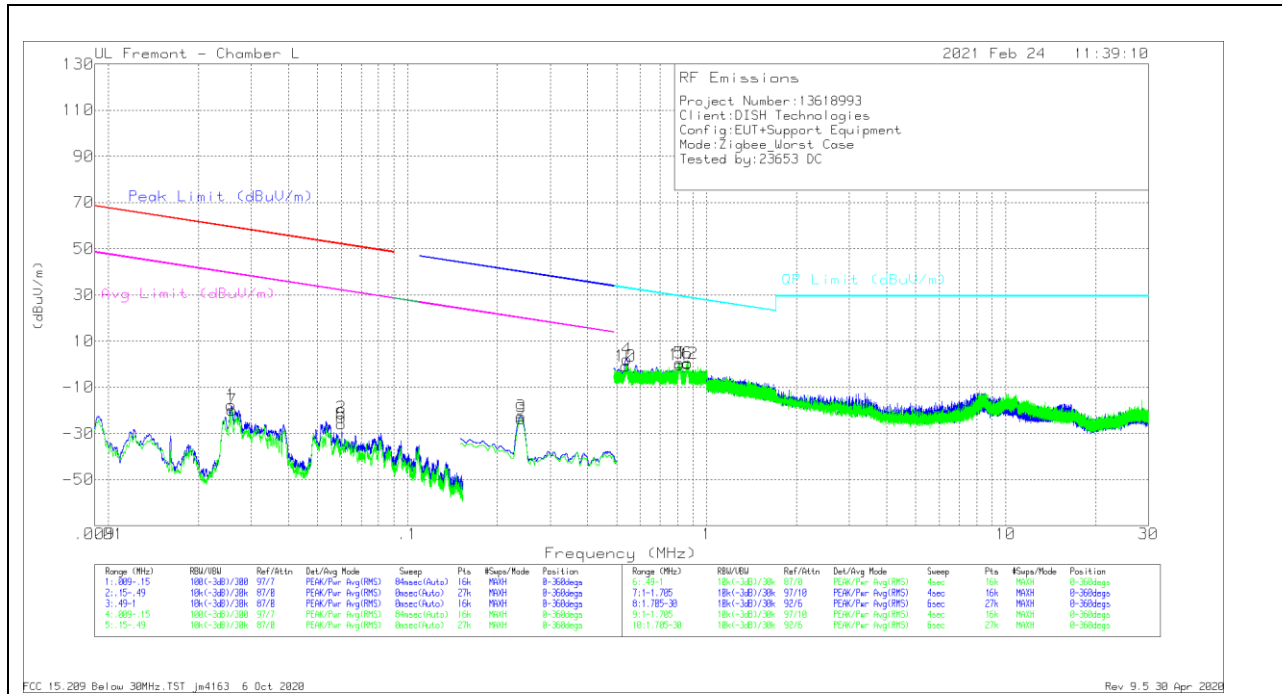

Below 30MHz Data


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (ACF)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.02576	36.38	Pk	58.4	-32.4	-80	-17.62	59.37	-76.99	39.37	-56.99	-	-	-	-	0-360
2	.06012	32.94	Pk	56.2	-32.4	-80	-23.26	52	-75.26	32	-55.26	-	-	-	-	0-360
3	.2395	33.48	Pk	56.3	-32.3	-80	-22.52	-	-	-	-	40.03	-62.55	20.03	-42.55	0-360
7	.02591	34.05	Pk	58.4	-32.4	-80	-19.95	59.32	-79.27	39.32	-59.27	-	-	-	-	0-360
8	.06014	30.41	Pk	56.2	-32.4	-80	-25.79	52	-77.79	32	-57.79	-	-	-	-	0-360
9	.23958	32.21	Pk	56.3	-32.3	-80	-23.79	-	-	-	-	40.03	-63.82	20.03	-43.82	0-360

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (ACF)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
4	.54136	18.22	Pk	56.2	-32.2	-40	2.22	32.94	-30.72	0-360
5	.81053	16.33	Pk	56.3	-32.2	-40	.43	29.44	-29.01	0-360
6	.86304	16.34	Pk	56.3	-32.2	-40	.44	28.9	-28.46	0-360
10	.53704	15.25	Pk	56.2	-32.2	-40	-.75	33.01	-33.76	0-360
11	.81067	15.72	Pk	56.3	-32.2	-40	-.18	29.44	-29.62	0-360
12	.86309	16.09	Pk	56.3	-32.2	-40	.19	28.9	-28.71	0-360


Pk - Peak detector

10.4. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

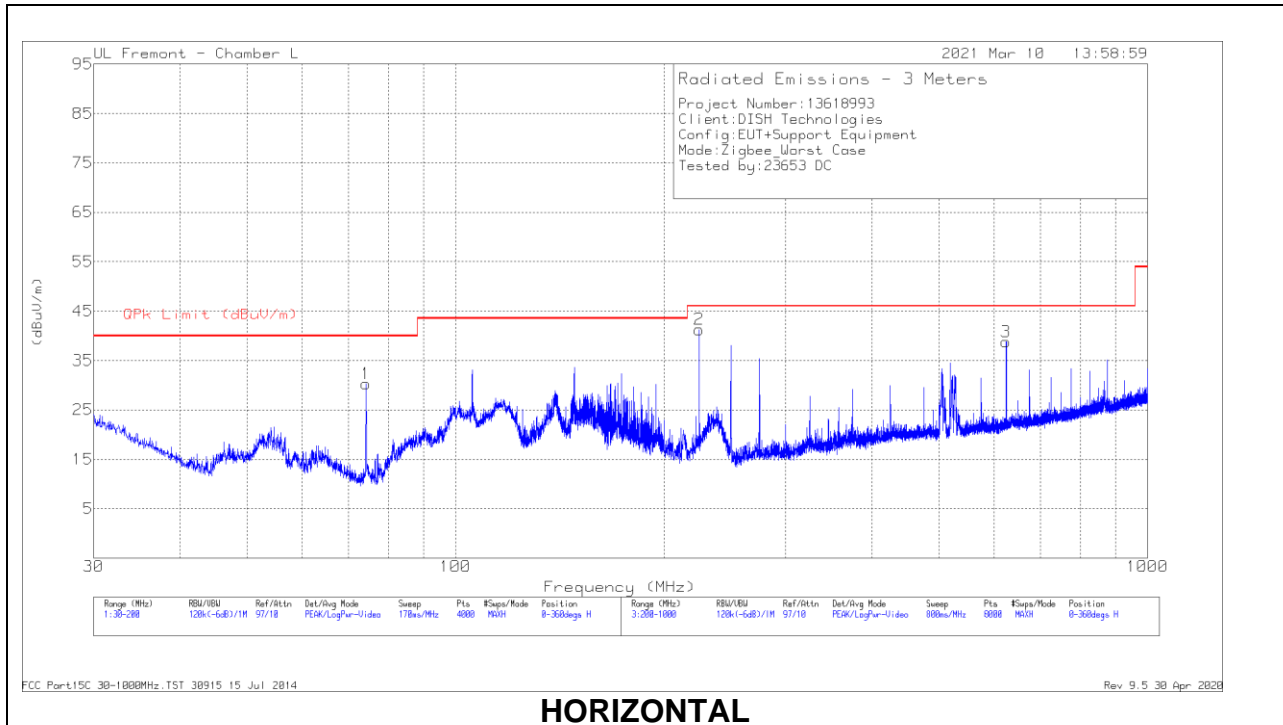

HORIZONTAL

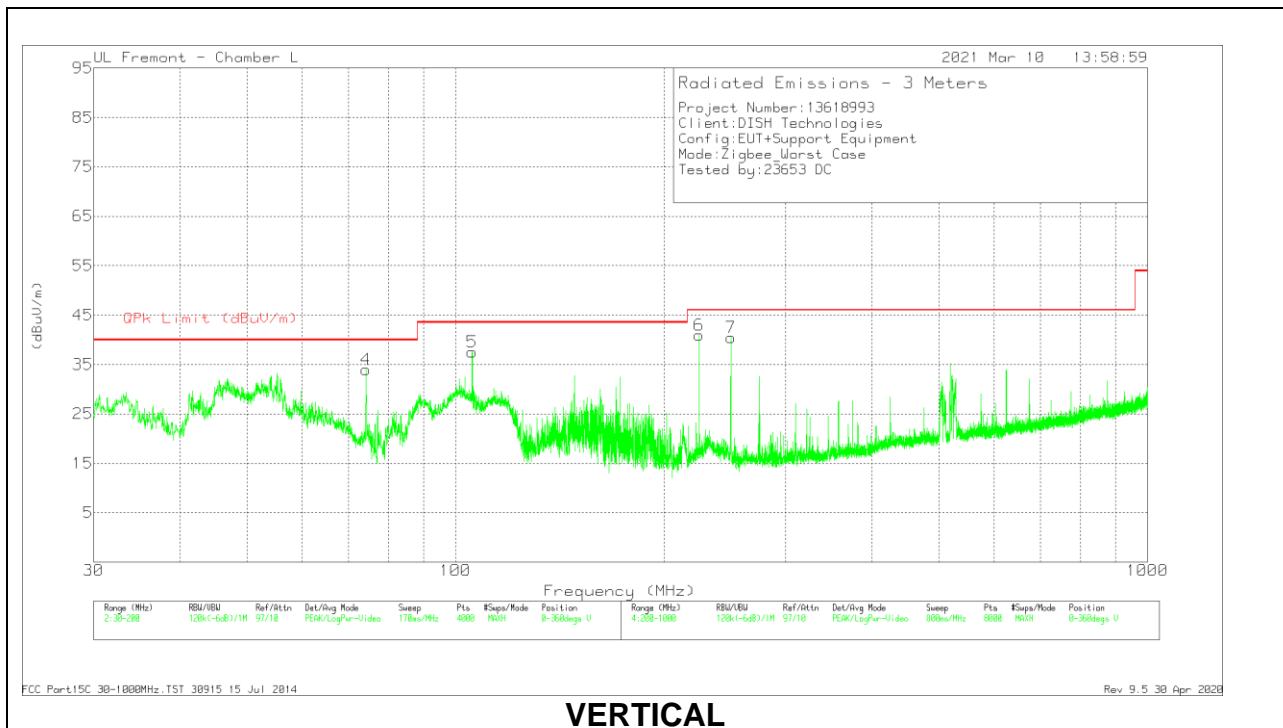

VERTICAL

Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 174373 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 74.2502	42.03	Pk	14	-31	25.03	40	-14.97	29	264	H
	* 74.2502	40.61	Qp	14	-31	23.61	40	-16.39	29	264	H
4	* 74.2531	51.6	Pk	14	-31	34.6	40	-5.4	140	102	V
	* 74.2531	48.71	Qp	14	-31	31.71	40	-8.29	140	102	V
5	105.7512	52.27	Pk	17.6	-30.7	39.17	43.52	-4.35	156	105	V
	105.7512	49.45	Qp	17.6	-30.7	36.35	43.52	-7.17	156	105	V
2	225.0034	53.8	Pk	16.7	-30	40.5	46.02	-5.52	146	154	H
	225.0034	52.96	Qp	16.7	-30	39.66	46.02	-6.36	146	154	H
3	625.0036	38.32	Pk	25.1	-28.5	34.92	46.02	-11.1	3	148	H
	625.0036	36.58	Qp	25.1	-28.5	33.18	46.02	-12.84	3	148	H
6	224.9986	54.59	Pk	16.7	-30	41.29	46.02	-4.73	209	101	V
	224.9986	53.96	Qp	16.7	-30	40.66	46.02	-5.36	209	101	V
7	* 249.9888	53.86	Pk	17.3	-29.9	41.26	46.02	-4.76	289	102	V
	* 249.9888	52.87	Qp	17.3	-29.9	40.27	46.02	-5.75	289	102	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10.5. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

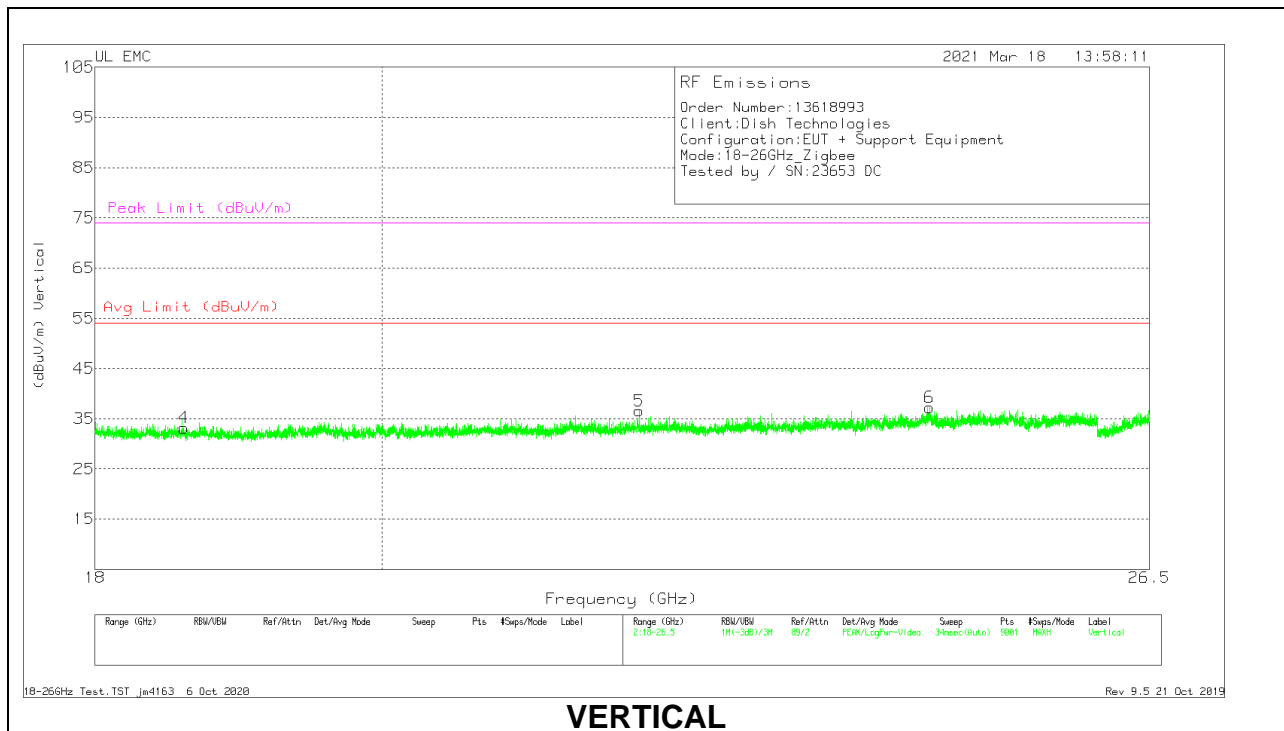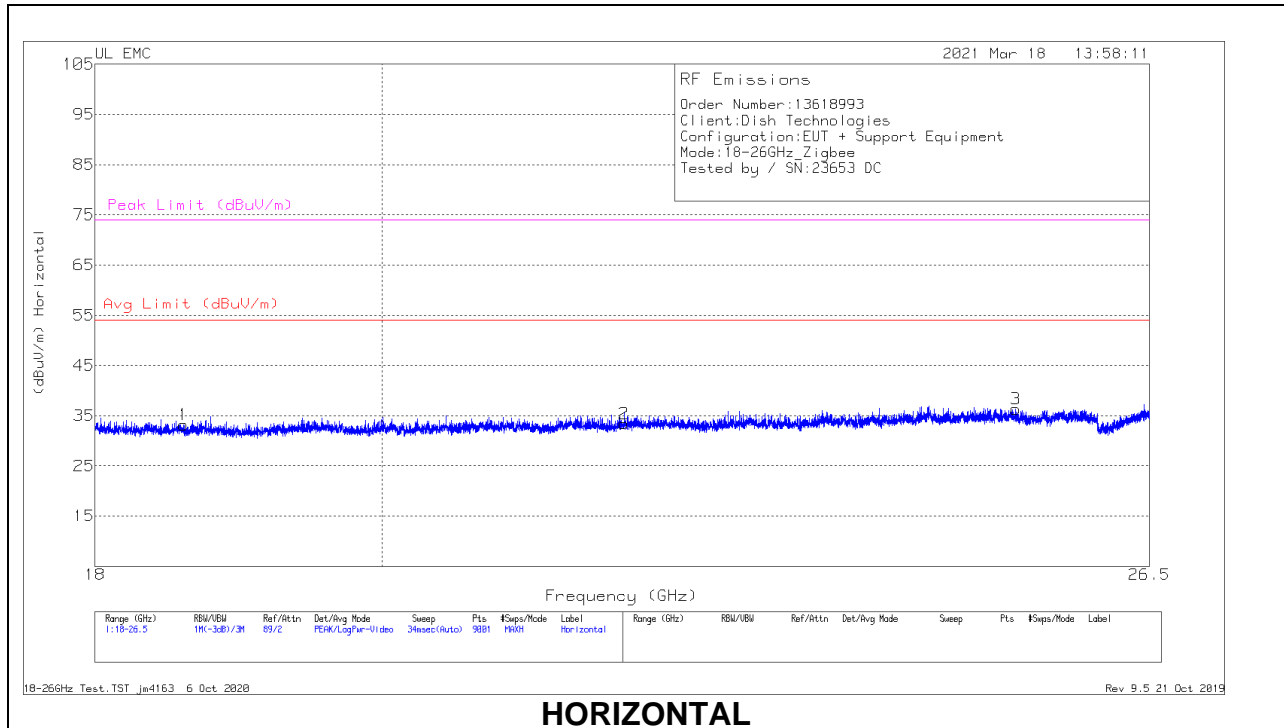

18 – 26GHz DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T447 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.59406	69.2	Pk	32.4	-58.9	-9.5	33.2	54	-20.8	74	-40.8
2	21.85333	67.21	Pk	33.3	-57.6	-9.5	33.41	54	-20.59	74	-40.59
3	25.23161	66.84	Pk	34.6	-55.6	-9.5	36.34	54	-17.66	74	-37.66
4	18.595	69.19	Pk	32.4	-58.9	-9.5	33.19	54	-20.81	74	-40.81
5	21.97611	70.46	Pk	33.4	-57.8	-9.5	36.56	54	-17.44	74	-37.44
6	24.44583	68.43	Pk	34.3	-56	-9.5	37.23	54	-16.77	74	-36.77

Pk - Peak detector


10.6. SPURIOUS EMISSIONS FOR CO-LOCATION

TEST-CASE CONDITIONS

Mode	Frequency (MHz)
BT GFSK	2441
Zigbee	2450

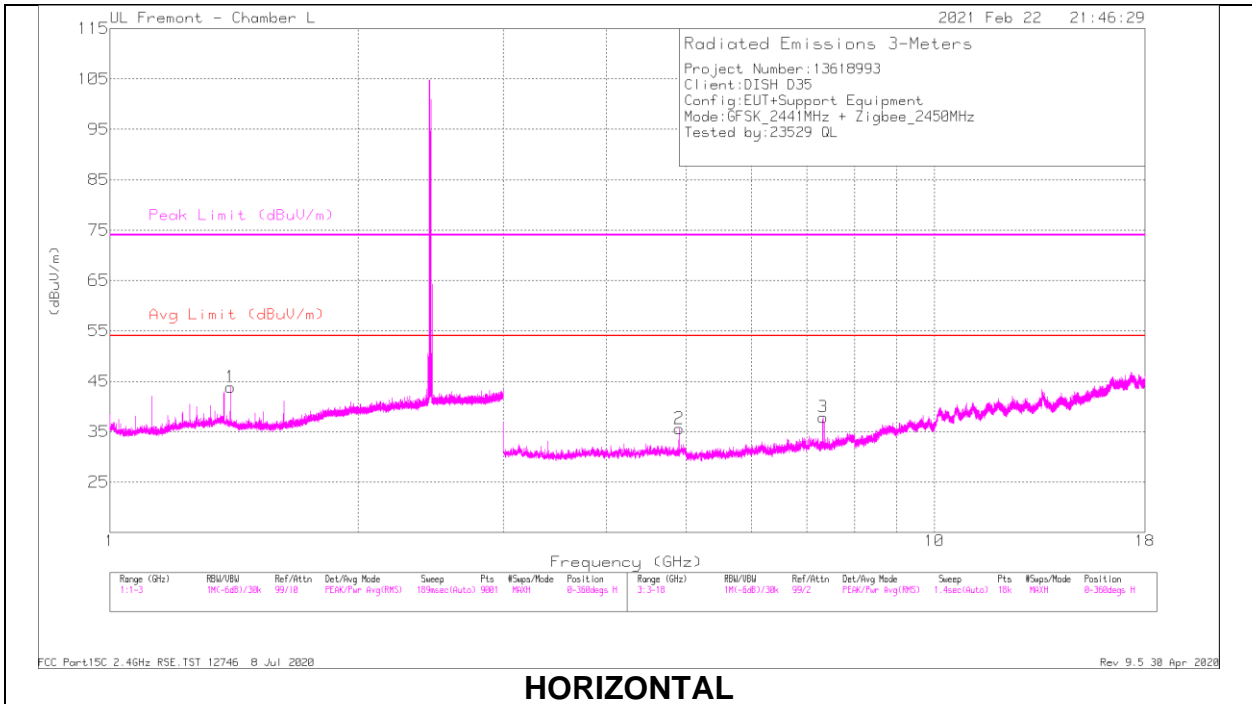

HORIZONTAL

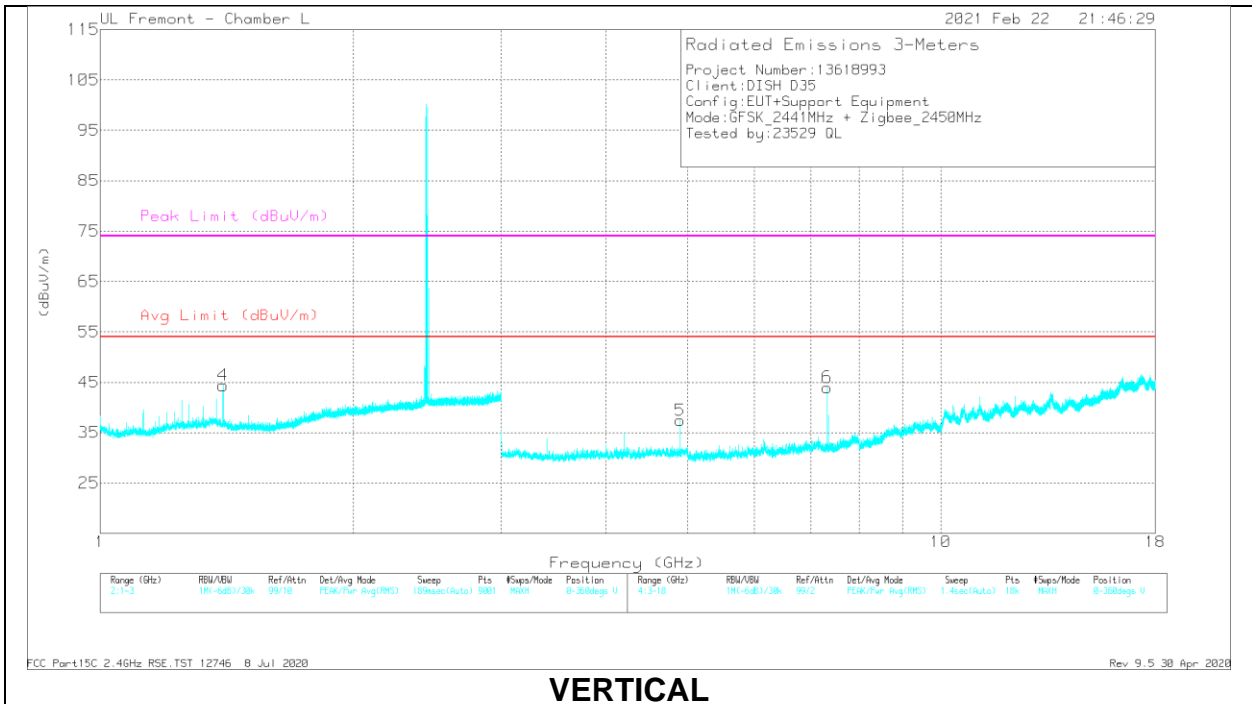

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.40005	43.24	PKFH	28.7	-23.4	48.54	-	-	74	-25.46	290	182	H
	* 1.40001	35.29	VA1T	28.7	-23.4	40.59	54	-13.41	-	-	290	182	H
4	* 1.39981	43.92	PKFH	28.7	-23.4	49.22	-	-	74	-24.78	71	277	V
	* 1.39999	35.7	VA1T	28.7	-23.4	41	54	-13	-	-	71	277	V
2	* 4.9	35.95	PKFH	34.1	-26.9	43.15	-	-	74	-30.85	307	106	H
	* 4.90001	26.95	VA1T	34.1	-26.9	34.15	54	-19.85	-	-	307	106	H
3	* 7.32287	38.09	PKFH	35.5	-23.5	50.09	-	-	74	-23.91	220	105	H
	* 7.32296	30.41	VA1T	35.5	-23.5	42.41	54	-11.59	-	-	220	105	H
5	* 4.89987	36.57	PKFH	34.1	-26.9	43.77	-	-	74	-30.23	162	138	V
	* 4.9	29.25	VA1T	34.1	-26.9	36.45	54	-17.55	-	-	162	138	V
6	* 7.32246	40.55	PKFH	35.5	-23.5	52.55	-	-	74	-21.45	67	101	V
	* 7.32295	34.56	VA1T	35.5	-23.5	46.56	54	-7.44	-	-	67	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


LINE 1 RESULTS

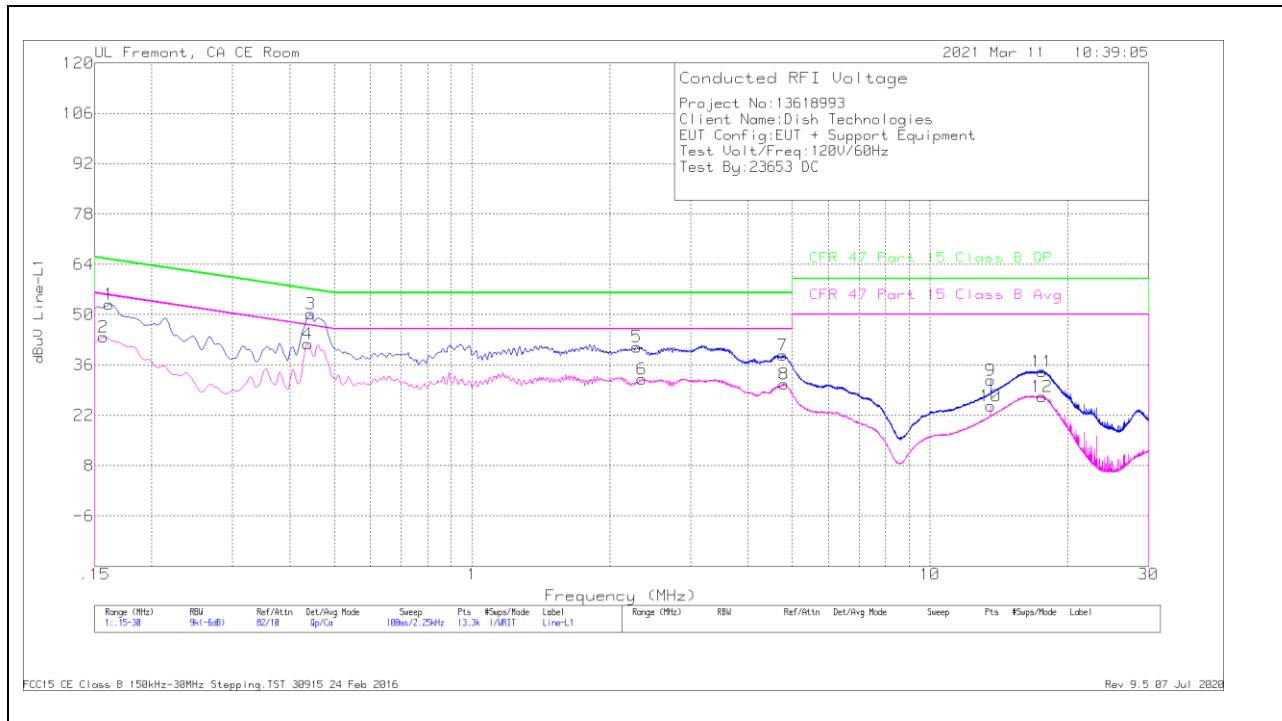

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE018644 6 L1	LC Cables C1&C3 dB	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.16125	42.76	Qp	0	0	10.1	52.86	65.4	-12.54	-	-
2	.15675	33.57	Ca	.1	0	10.1	43.77	-	-	55.63	-11.86
3	.44475	40.13	Qp	0	0	10.1	50.23	56.97	-6.74	-	-
4	.438	31.77	Ca	0	0	10.1	41.87	-	-	47.1	-5.23
5	2.2875	30.89	Qp	0	.1	10.1	41.09	56	-14.91	-	-
6	2.35275	21.85	Ca	0	.1	10.1	32.05	-	-	46	-13.95
7	4.77375	28.37	Qp	0	.1	10.2	38.67	56	-17.33	-	-
8	4.80525	20.42	Ca	0	.1	10.2	30.72	-	-	46	-15.28
9	13.56	21.18	Qp	.1	.2	10.2	31.68	60	-28.32	-	-
10	13.56	14.13	Ca	.1	.2	10.2	24.63	-	-	50	-25.37
11	17.58413	23.76	Qp	0	.2	10.3	34.26	60	-25.74	-	-
12	17.57175	16.76	Ca	0	.2	10.3	27.26	-	-	50	-22.74

Qp - Quasi-Peak detector
 Ca - CISPR average detection

LINE 2 RESULTS

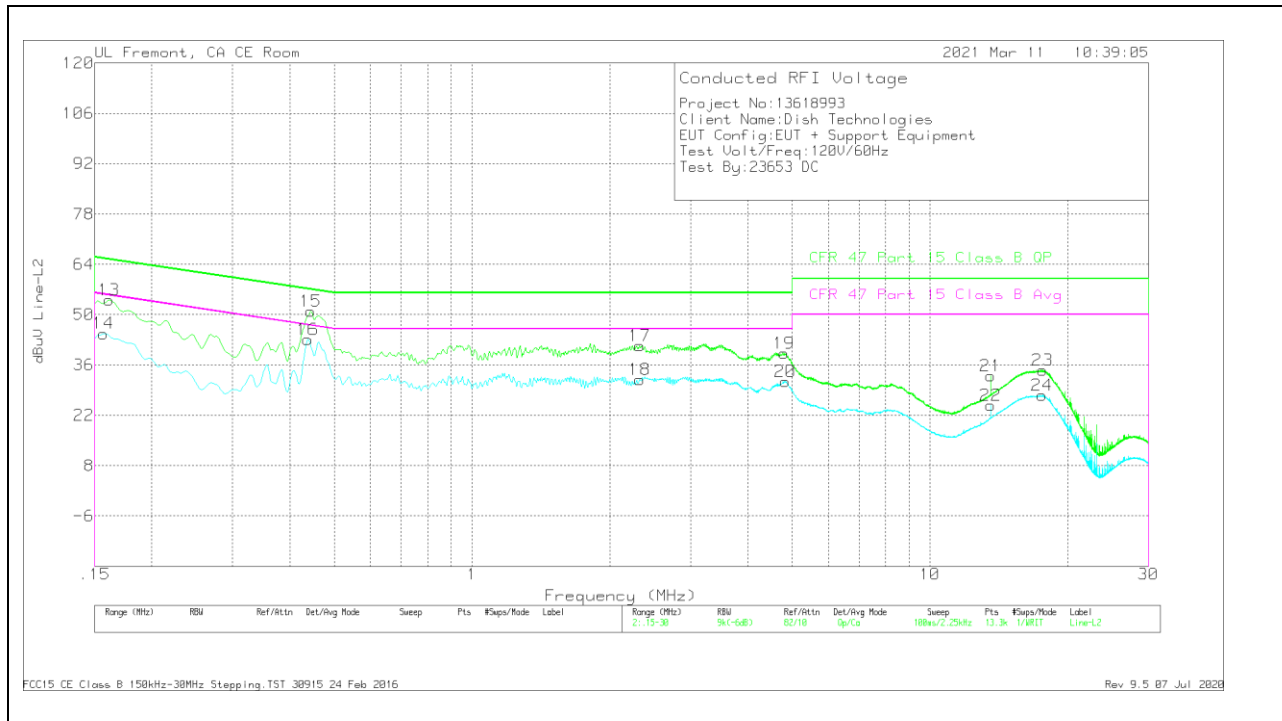

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	PRE018644 6 L2	LC Cables C2&C3 dB	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.16125	43.93	Qp	0	0	10.1	54.03	65.4	-11.37	-	-
14	.15675	34.66	Ca	0	0	10.1	44.76	-	-	55.63	-10.87
15	.44475	40.87	Qp	0	0	10.1	50.97	56.97	-6	-	-
16	.438	33.02	Ca	0	0	10.1	43.12	-	-	47.1	-3.98
17	2.3235	31.13	Qp	0	.1	10.1	41.33	56	-14.67	-	-
18	2.3235	21.76	Ca	0	.1	10.1	31.96	-	-	46	-14.04
19	4.7985	28.95	Qp	0	.1	10.2	39.25	56	-16.75	-	-
20	4.83	21.12	Ca	0	.1	10.2	31.42	-	-	46	-14.58
21	13.56	22.41	Qp	.1	.2	10.2	32.91	60	-27.09	-	-
22	13.56	14.35	Ca	.1	.2	10.2	24.85	-	-	50	-25.15
23	17.62688	24.07	Qp	0	.2	10.3	34.57	60	-25.43	-	-
24	17.57175	17.03	Ca	0	.2	10.3	27.53	-	-	50	-22.47

Qp - Quasi-Peak detector
 Ca - CISPR average detection