

**CETECOM™**

**CETECOM ICT Services**  
consulting - testing - certification >>>

## TEST REPORT

Test report no.: 1-1248/16-01-05-A



Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

**CETECOM ICT Services GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

### Applicant

**Sennheiser electronic GmbH & Co. KG**  
Am Labor 1  
30900 Wedemark / GERMANY  
Phone: +49 5130 600-0  
Fax: +49 5130 600-574  
Contact: Marco Happ  
e-mail: [marco.happ@sennheiser.com](mailto:marco.happ@sennheiser.com)  
Phone: +49 5130 600-2621

### Manufacturer

**Sennheiser electronic GmbH & Co. KG**  
Am Labor 1  
30900 Wedemark / GERMANY

### Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices  
RSS - 247 Issue 1 Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** Wireless conference system  
**Model name:** ADN-W C1 / ADN-W D1  
**FCC ID:** DMOADNWD  
**IC:** 2099A-ADNWD  
**Frequency:** UNII band 5150 MHz to 5850 MHz  
**Technology tested:** Proprietary wireless audio transmission system  
**Antenna:** 2 integrated antennas  
**Power supply:** 7.4 V DC by battery  
**Temperature range:** +5°C to +45°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Marco Bertolino  
Lab Manager  
Radio Communications & EMC

### Test performed:

Andreas Luckenbill  
Lab Manager  
Radio Communications & EMC

**1 Table of contents**

|         |                                                             |     |
|---------|-------------------------------------------------------------|-----|
| 1       | Table of contents .....                                     | 2   |
| 2       | General information .....                                   | 3   |
| 2.1     | Notes and disclaimer .....                                  | 3   |
| 2.2     | Application details .....                                   | 3   |
| 3       | Test standard/s and references .....                        | 3   |
| 4       | Test environment .....                                      | 5   |
| 5       | Test item .....                                             | 5   |
| 5.1     | General description .....                                   | 5   |
| 5.2     | Additional information .....                                | 5   |
| 6       | Test laboratories sub-contracted .....                      | 5   |
| 7       | Description of the test setup .....                         | 6   |
| 7.1     | Shielded semi anechoic chamber .....                        | 7   |
| 7.2     | Shielded fully anechoic chamber .....                       | 8   |
| 7.3     | Radiated measurements > 18 GHz .....                        | 9   |
| 7.4     | AC conducted .....                                          | 10  |
| 7.5     | Conducted measurements .....                                | 11  |
| 7.6     | Shielded fully anechoic chamber .....                       | 12  |
| 8       | Sequence of testing .....                                   | 13  |
| 8.1     | Sequence of testing radiated spurious 9 kHz to 30 MHz ..... | 13  |
| 8.2     | Sequence of testing radiated spurious 30 MHz to 1 GHz ..... | 14  |
| 8.3     | Sequence of testing radiated spurious 1 GHz to 18 GHz ..... | 15  |
| 8.4     | Sequence of testing radiated spurious above 18 GHz .....    | 16  |
| 9       | Measurement uncertainty .....                               | 17  |
| 10      | Summary of measurement results .....                        | 18  |
| 11      | Additional comments .....                                   | 19  |
| 12      | Measurement results .....                                   | 20  |
| 12.1    | Gain .....                                                  | 20  |
| 12.2    | Duty cycle .....                                            | 26  |
| 12.3    | Maximum output power .....                                  | 27  |
| 12.3.1  | Maximum output power conducted - FCC .....                  | 27  |
| 12.3.2  | Maximum output power conducted - IC .....                   | 37  |
| 12.4    | Power spectral density .....                                | 47  |
| 12.4.1  | Power spectral density - FCC .....                          | 47  |
| 12.4.2  | Power spectral density - IC .....                           | 53  |
| 12.5    | Spectrum bandwidth – 26 dB bandwidth .....                  | 59  |
| 12.6    | Occupied bandwidth – 99% emission bandwidth .....           | 69  |
| 12.7    | Band edge compliance radiated .....                         | 79  |
| 12.8    | TX spurious emissions radiated .....                        | 83  |
| 12.9    | RX spurious emissions radiated .....                        | 134 |
| 12.10   | Spurious emissions radiated < 30 MHz .....                  | 139 |
| 12.11   | Spurious emissions conducted < 30 MHz .....                 | 148 |
| Annex A | Document history .....                                      | 150 |
| Annex B | Further information .....                                   | 150 |
| Annex C | Accreditation Certificate .....                             | 151 |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-1248/16-01-05 and dated 2016-06-23.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2016-04-20 |
| Date of receipt of test item:      | 2016-05-13 |
| Start of test:                     | 2016-05-13 |
| End of test:                       | 2016-06-16 |
| Person(s) present during the test: | -/-        |

## 3 Test standard/s and references

| Test standard     | Date     | Description                                                                                                                    |
|-------------------|----------|--------------------------------------------------------------------------------------------------------------------------------|
| 47 CFR Part 15    | -/-      | Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices                                      |
| RSS - 247 Issue 1 | May 2015 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices |

| <b>Guidance</b>      | <b>Version</b> | <b>Description</b>                                                                                                                                                  |
|----------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UNII: KDB 789033 D02 | v01r02         | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E                                            |
| ANSI C63.4-2014      | -/-            | American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz |
| ANSI C63.10-2013     | -/-            | American national standard of procedures for compliance testing of unlicensed wireless devices                                                                      |
| KDB 662911 D01       | V02r01         | Emissions Testing of Transmitters with Multiple Outputs in the Same Band                                                                                            |

#### 4 Test environment

|                           |   |                  |                                       |
|---------------------------|---|------------------|---------------------------------------|
| Temperature               | : | T <sub>nom</sub> | +22 °C during room temperature tests  |
|                           |   | T <sub>max</sub> | +45 °C during high temperature tests  |
|                           |   | T <sub>min</sub> | +5 °C during low temperature tests    |
| Relative humidity content | : |                  | 55 %                                  |
| Barometric pressure       | : |                  | not relevant for this kind of testing |
| Power supply              | : | V <sub>nom</sub> | 7.4 V DC by battery                   |
|                           |   | V <sub>max</sub> | 7.5 V                                 |
|                           |   | V <sub>min</sub> | 6.2 V                                 |

#### 5 Test item

##### 5.1 General description

|                            |   |                                                                                       |
|----------------------------|---|---------------------------------------------------------------------------------------|
| Kind of test item          | : | Wireless conference system                                                            |
| Type identification        | : | ADN-W C1 / ADN-W D1                                                                   |
| HMN                        | : | -/-                                                                                   |
| PMN                        | : | ADN-W C1 / ADN-W D1                                                                   |
| HVIN                       | : | ADN-W C1 / ADN-W D1                                                                   |
| FVIN                       | : | 1.2.0.6                                                                               |
| S/N serial number          | : | 1134101209, 1113100063, 1134101207, 1113100710                                        |
| HW hardware status         | : | FPGA : 2_8_5_prod2/ D1w_LX45_PROD_TX_279.bin                                          |
| SW software status         | : | ADNW_TERMINAL.EXE from 16.11.2012; APP:001120                                         |
| Frequency band             | : | UNII band 5150 MHz to 5850 MHz<br>(lowest channel 5180 MHz; highest channel 5825 MHz) |
| Type of radio transmission | : | OFDM                                                                                  |
| Use of frequency spectrum  | : |                                                                                       |
| Type of modulation         | : | QPSK with coding rate 1/2                                                             |
| Antenna                    | : | 2 integrated antennas                                                                 |
| Power supply               | : | 7.4 V DC by battery                                                                   |
| Temperature range          | : | +5°C to +45°C                                                                         |

##### 5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report:

1-1248/16-01-06\_AnnexA  
1-1248/16-01-06\_AnnexB  
1-1248/16-01-06\_AnnexD

#### 6 Test laboratories sub-contracted

None

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

### **Agenda:** Kind of Calibration

|      |                                            |     |                                                      |
|------|--------------------------------------------|-----|------------------------------------------------------|
| k    | calibration / calibrated                   | EK  | limited calibration                                  |
| ne   | not required (k, ev, izw, zw not required) | zw  | cyclical maintenance (external cyclical maintenance) |
| ev   | periodic self verification                 | izw | internal cyclical maintenance                        |
| Ve   | long-term stability recognized             | g   | blocked for accredited testing                       |
| v/k! | Attention: extended calibration interval   |     |                                                      |
| NK!  | Attention: not calibrated                  | *)  | next calibration ordered / currently in progress     |

### 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

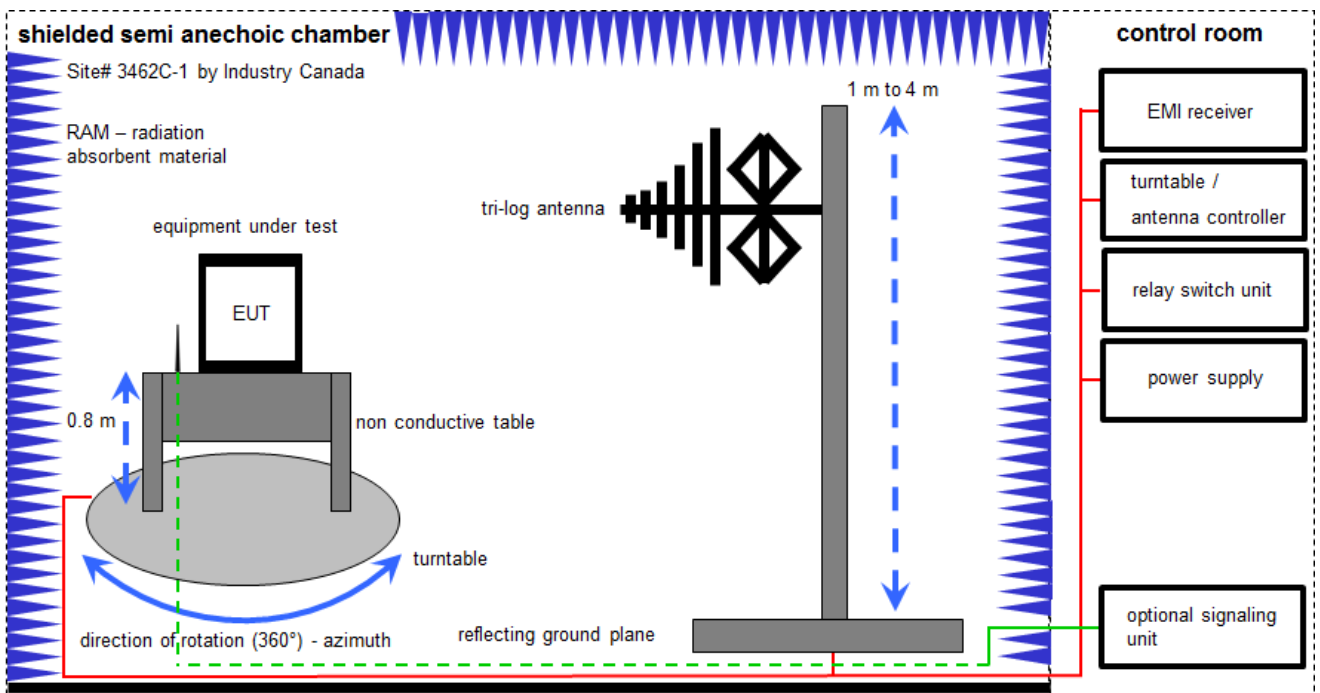

Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

**Equipment table:**

| No. | Lab / Item | Equipment                                    | Type       | Manufacturer | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|----------------------------------------------|------------|--------------|------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | Switch-Unit                                  | 3488A      | HP           | 2719A14505 | 300000368       | ev                  | -/-              | -/-              |
| 2   | A          | EMI Test Receiver                            | ESCI 3     | R&S          | 100083     | 300003312       | k                   | 08.03.2016       | 08.03.2017       |
| 3   | A          | Antenna Tower                                | Model 2175 | ETS-Lindgren | 64762      | 300003745       | izw                 | -/-              | -/-              |
| 4   | A          | Positioning Controller                       | Model 2090 | ETS-Lindgren | 64672      | 300003746       | izw                 | -/-              | -/-              |
| 5   | A          | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163   | Schwarzbeck  | 295        | 300003787       | k                   | 25.04.2016       | 25.04.2018       |
| 6   | A          | Spectrum-Analyzer                            | FSU26      | R&S          | 200809     | 300003874       | k                   | 29.01.2016       | 29.01.2017       |

## 7.2 Shielded fully anechoic chamber

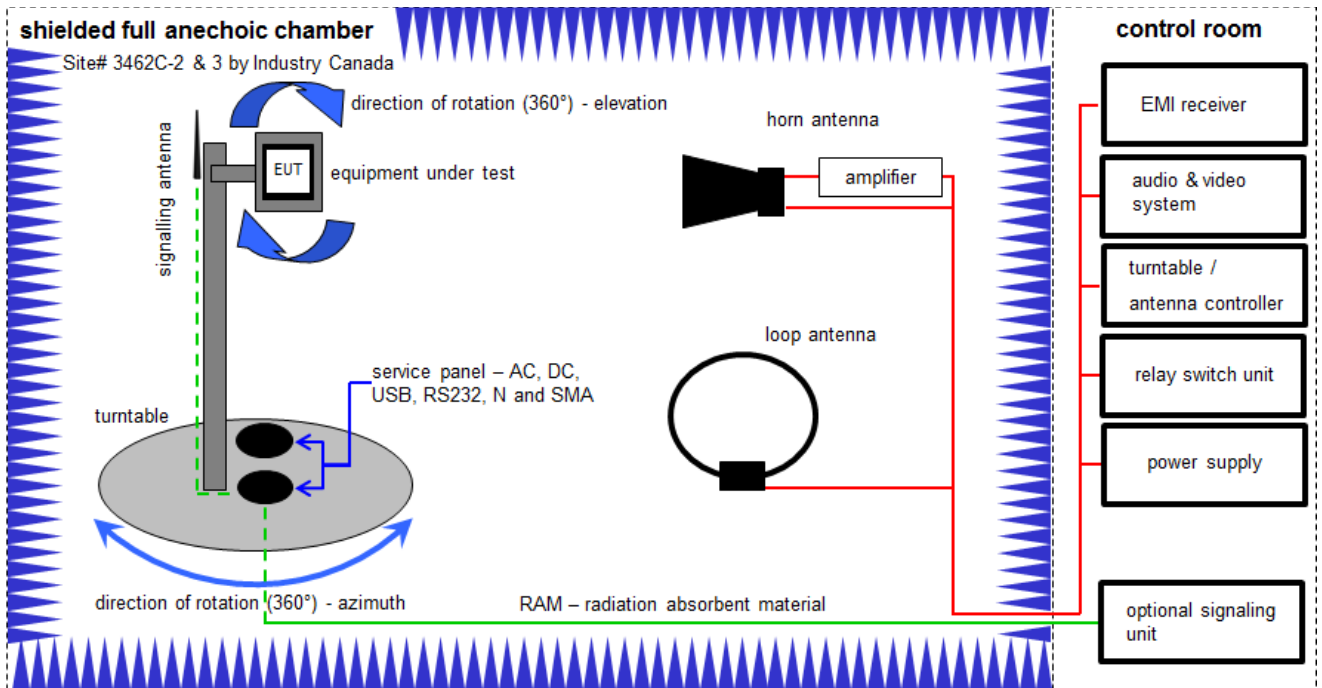

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

### Equipment table:

| No. | Lab / Item | Equipment                                      | Type                | Manufacturer         | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|------------------------------------------------|---------------------|----------------------|------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115                | EMCO                 | 8812-3088  | 300001032       | vKI!                | 20.05.2015       | 20.05.2017       |
| 2   | A, B       | Anechoic chamber                               | FAC 3/5m            | MWB / TDK            | 87400/02   | 300000996       | ev                  | -/-              | -/-              |
| 3   | A, B       | Switch / Control Unit                          | 3488A               | HP                   | *          | 300000199       | ne                  | -/-              | -/-              |
| 4   | B          | Active Loop Antenna 10 kHz to 30 MHz           | 6502                | EMCO/2               | 8905-2342  | 300000256       | k                   | 24.06.2015       | 24.06.2017       |
| 5   | A          | Amplifier                                      | js42-00502650-28-5a | Parzich GMBH         | 928979     | 300003143       | ne                  | -/-              | -/-              |
| 6   | A          | Highpass Filter                                | WHKX7.0/18G-8SS     | Wainwright           | 18         | 300003789       | ne                  | -/-              | -/-              |
| 7   | A, B       | 4U RF Switch Platform                          | L4491A              | Agilent Technologies | MY50000037 | 300004509       | ne                  | -/-              | -/-              |
| 8   | A, B       | EMI Test Receiver 9kHz-26,5GHz                 | ESR26               | R&S                  | 101376     | 300005063       | k                   | 04.09.2015       | 04.09.2016       |



### 7.3 Radiated measurements > 18 GHz

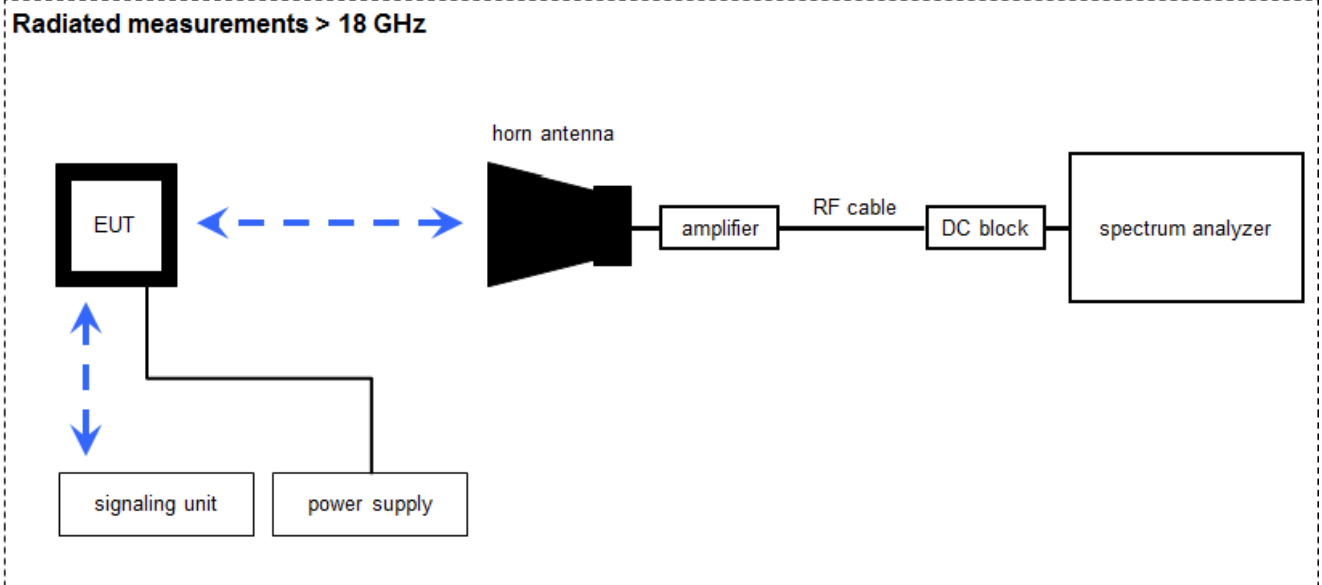

Measurement distance: horn antenna 50 cm

$$FS = U_R + CA + AF$$

(FS-field strength;  $U_R$ -voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

**Equipment table:**

| No. | Lab / Item | Equipment                               | Type                | Manufacturer   | Serial No.       | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|-----------------------------------------|---------------------|----------------|------------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | Std. Gain Horn Antenna 18.0 to 26.5 GHz | 638                 | Narda          | 8402             | 300000486       | k                   | 10.09.2015       | 10.09.2017       |
| 2   | A          | Amplifier 2-40 GHz                      | JS32-02004000-57-5P | MITEQ          | 1777200          | 300004541       | ev                  | -/-              | -/-              |
| 3   | A          | Signal Analyzer 40 GHz                  | FSV40               | R&S            | 101042           | 300004517       | k                   | 21.01.2016       | 21.01.2017       |
| 4   | A          | DC-Blocker 0.1-40 GHz                   | 8141A               | Inmet          | Batch no. 606844 | 400001185       | ev                  | -/-              | -/-              |
| 5   | A          | RF-Cable                                | ST18/SMAm/SMAm/48   | Huber & Suhner | Batch no. 600918 | 400001182       | ev                  | -/-              | -/-              |
| 6   | A          | RF-Cable                                | ST18/SMAm/SMm/48    | Huber & Suhner | Batch no. 127377 | 400001183       | ev                  | -/-              | -/-              |

**7.4 AC conducted**

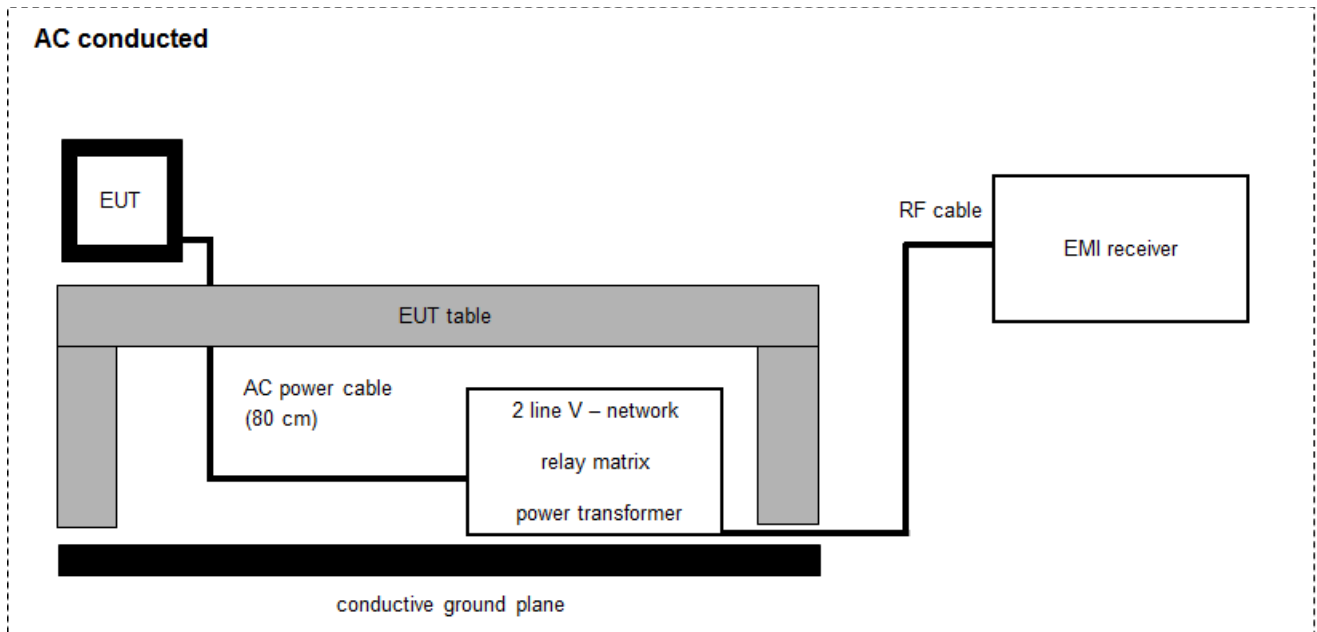

$FS = UR + CF + VC$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:


$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$

**Equipment table:**

| No. | Lab / Item | Equipment                                 | Type         | Manufacturer           | Serial No.           | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|-------------------------------------------|--------------|------------------------|----------------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | Two-line V-Network (LISN) 9 kHz to 30 MHz | ESH3-Z5      | R&S                    | 892475/017           | 300002209       | k                   | 17.06.2014       | 17.06.2016       |
| 2   | A          | MXE EMI Receiver 20 Hz to 26,5 GHz        | N9038A       | Agilent Technologies   | MY51210197           | 300004405       | k                   | 06.03.2015       | 06.03.2016       |
| 3   | A          | software                                  | SPS_PHE 1.4f | Spitzenberger & Spiess | B5981; 5D1081; B5979 | 300000210       | ne                  | -/-              | -/-              |

## 7.5 Conducted measurements

### Conducted measurements normal conditions

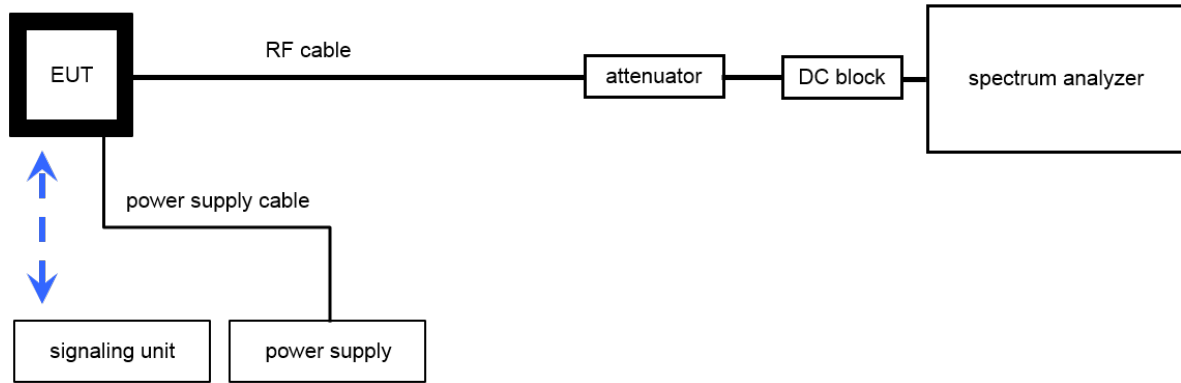

OP = AV + CA  
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:


OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

**Equipment table:**

| No. | Lab / Item | Equipment                         | Type                                  | Manufacturer              | Serial No.       | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|-----------------------------------|---------------------------------------|---------------------------|------------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | Signal Analyzer 40 GHz            | FSV40                                 | R&S                       | 101042           | 300004517       | k                   | 21.01.2016       | 21.01.2017       |
| 2   | A          | PC-WLAN Tester                    | Intel Core i3 3220/3,3 GHz, Prozessor | R&S                       | 2V2403033A45 23  | 300004589       | ne                  | -/-              | -/-              |
| 3   | A          | Teststand                         | Teststand Custom Sequence Editor      | National Instruments GmbH | 2V2403033A45 23  | 300004590       | ne                  | -/-              | -/-              |
| 4   | A          | RF-Cable                          | ST18/SMAM/SMAM/60                     | Huber & Suhner            | Batch no. 606844 | 400001181       | ev                  | -/-              | -/-              |
| 5   | A          | DC-Blocker 0.1-40 GHz             | 8141A                                 | Inmet                     | Batch no. 606844 | 400001185       | ev                  | -/-              | -/-              |
| 6   | A          | Coax Attenuator 10 dB 2W 0-40 GHz | MCL BW-K10-2W44+                      | Mini Circuits             | Batch no. 606844 | 400001186       | ev                  | -/-              | -/-              |

## 7.6 Shielded fully anechoic chamber

### OTA – over the air performance

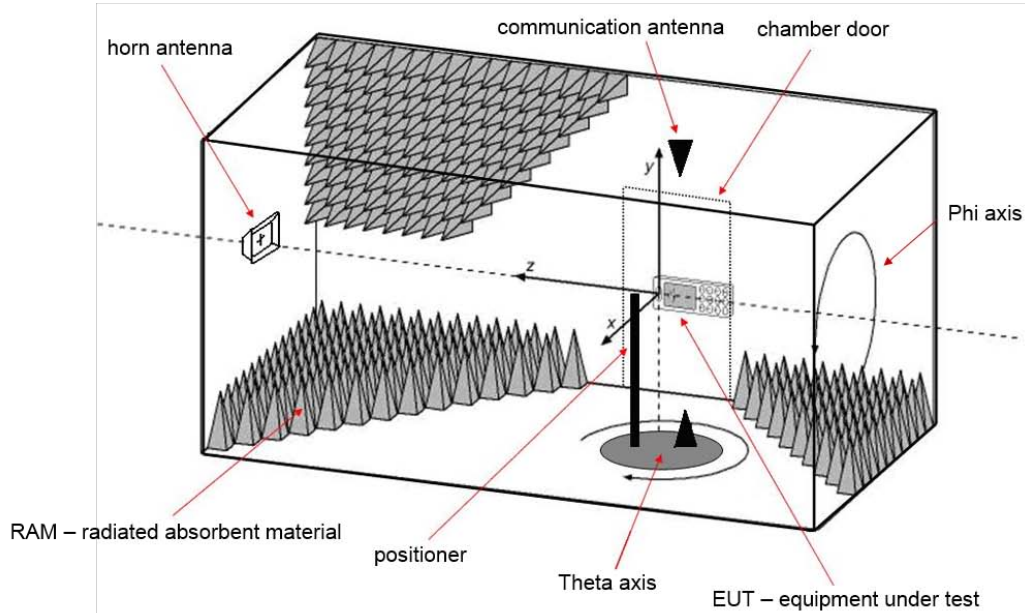

### Equipment table:

| No. | Lab / Item | Equipment                                | Type                                 | Manufacturer         | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|------------------------------------------|--------------------------------------|----------------------|------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | Step Attenuator 0 ...139.9 dB            | RSP                                  | R&S                  | 860712002  | 400000079       | NK!                 | 16.01.2013       | -/-              |
| 2   | A          | Splitter                                 | 15542                                | Mini Circuits        | 15542      | 400000086       | ev                  | -/-              | -/-              |
| 3   | A          | Splitter                                 | 42000                                | Anaren               | 4730       | 400000085       | ev                  | -/-              | -/-              |
| 4   | A          | Switch Unit                              | TS-RSP                               | R&S                  | 100155     | 300003281       | ev                  | -/-              | -/-              |
| 5   | A          | HF-Cable                                 | blau kabel - grün am Stecker         | Huber & Suhner       | diverse    | 400000083       | ne                  | -/-              | -/-              |
| 6   | A          | Hygro-Thermometer                        | -/-, 5-45 C, 20-100 rF               | Thies Clima          | -/-        | 400000089       | ev                  | 07.09.2015       | 07.09.2017       |
| 7   | A          | CTIA-Chamber                             | CTIA-Chamber AMS 8500                | ETS-Lindgren Finland | -/-        | 300003327       | ne                  | -/-              | -/-              |
| 8   | A          | CTIA-Chamber - Camera System             | CTIA-Chamber - Camera System         | ETS-Lindgren Finland | -/-        | 300003327       | ne                  | -/-              | -/-              |
| 9   | A          | CTIA-Chamber - Audio System              | CTIA-Chamber - Audio System          | ETS-Lindgren Finland | -/-        | 300003327       | ne                  | -/-              | -/-              |
| 10  | A          | CTIA-Chamber - Feed Through Hatch        | CTIA-Chamber - Feed Through Hatch    | ETS-Lindgren Finland | -/-        | 300003327       | ne                  | -/-              | -/-              |
| 11  | A          | CTIA-Chamber - Positioning Equipment     | CTIA-Chamber - Positioning Equipment | EMCO/2               | -/-        | 300003328       | ne                  | -/-              | -/-              |
| 12  | A          | CTIA-Chamber - Software                  | CTIA-Chamber - Software              | EMCO/2               | -/-        | 300003328       | ne                  | -/-              | -/-              |
| 13  | A          | CTIA-Chamber - Antenna                   | 3164-04                              | EMCO/2               | 00041915   | 300003328       | ne                  | -/-              | -/-              |
| 14  | A          | CTIA-Chamber - Systemintegration         | CTIA-Chamber - Systemintegration     | EMCO/2               | 00041915   | 300003328       | ne                  | -/-              | -/-              |
| 15  | A          | Cable SMA-Connector 15m                  | KK-MF141-15                          | Huber & Suhner       | 00041915   | 400000090       | ne                  | -/-              | -/-              |
| 16  | A          | Limiting Amplifier (Microwave Amplifier) | LA 02-801                            | JCA Technology       | 101        | 300003341       | ne                  | -/-              | -/-              |
| 17  | A          | Spectrum Analyzer 9kHz - 30 GHz          | FSP30                                | R&S                  | 100623     | 300003464       | Ve                  | 29.01.2015       | 29.01.2017       |

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 8.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.



## 9 Measurement uncertainty

| Measurement uncertainty                                  |                                     |
|----------------------------------------------------------|-------------------------------------|
| Test case                                                | Uncertainty                         |
| Antenna gain                                             | ± 3 dB                              |
| Power spectral density                                   | ± 1.5 dB                            |
| DTS bandwidth                                            | ± 100 kHz (depends on the used RBW) |
| Occupied bandwidth                                       | ± 100 kHz (depends on the used RBW) |
| Maximum output power                                     | ± 1.5 dB                            |
| Detailed spurious emissions @ the band edge - conducted  | ± 1.5 dB                            |
| Band edge compliance radiated                            | ± 3 dB                              |
| Spurious emissions conducted                             | ± 3 dB                              |
| Spurious emissions radiated below 30 MHz                 | ± 3 dB                              |
| Spurious emissions radiated 30 MHz to 1 GHz              | ± 3 dB                              |
| Spurious emissions radiated 1 GHz to 12.75 GHz           | ± 3.7 dB                            |
| Spurious emissions radiated above 12.75 GHz              | ± 4.5 dB                            |
| Spurious emissions conducted below 30 MHz (AC conducted) | ± 2.6 dB                            |

## 10 Summary of measurement results

|                                     |                                                                                                                          |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | No deviations from the technical specifications were ascertained                                                         |
| <input type="checkbox"/>            | There were deviations from the technical specifications ascertained                                                      |
| <input checked="" type="checkbox"/> | This test report is only a partial test report.<br>The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description                     | Verdict   | Date       | Remark |
|---------------|---------------------------------|-----------|------------|--------|
| RF-Testing    | CFR Part 15<br>RSS 247, Issue 1 | see table | 2016-11-16 | -/-    |

| Test specification clause                                                                                      | Test case                                       | Temperature conditions | Power source voltages | C                                   | NC                       | NA                       | NP                                  | Remark                                  |
|----------------------------------------------------------------------------------------------------------------|-------------------------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|-------------------------------------|-----------------------------------------|
| -/-                                                                                                            | Gain                                            | Nominal                | Nominal               | -/-                                 |                          |                          |                                     | -/-                                     |
| U-NII Part 15                                                                                                  | Duty cycle                                      | Nominal                | Nominal               | -/-                                 |                          |                          |                                     | -/-                                     |
| §15.407(a)<br>RSS - 247 (6.2.1) (1)<br>RSS - 247 (6.2.2) (1)<br>RSS - 247 (6.2.3) (1)<br>RSS - 247 (6.2.4) (1) | Maximum output power (conducted & radiated)     | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| §15.407(a)<br>RSS - 247 (6.2.1) (1)<br>RSS - 247 (6.2.2) (1)<br>RSS - 247 (6.2.3) (1)<br>RSS - 247 (6.2.4) (1) | Power spectral density                          | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| §15.407(a)                                                                                                     | Spectrum bandwidth<br>26dB bandwidth            | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| RSS Gen clause 6.6                                                                                             | Spectrum bandwidth<br>99% bandwidth             | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| §15.205<br>RSS - 247 (6.2.1) (2)<br>RSS - 247 (6.2.2) (2)<br>RSS - 247 (6.2.3) (2)<br>RSS - 247 (6.2.4) (2)    | Band edge compliance radiated                   | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| §15.407(b)<br>RSS - 247 (6.2.1) (2)<br>RSS - 247 (6.2.2) (2)<br>RSS - 247 (6.2.3) (2)<br>RSS - 247 (6.2.4) (2) | TX spurious emissions radiated                  | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| §15.109<br>RSS-Gen                                                                                             | RX spurious emissions radiated                  | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| §15.209(a)<br>RSS-Gen                                                                                          | Spurious emissions radiated < 30 MHz            | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| §15.107(a)<br>§15.207                                                                                          | Spurious emissions conducted emissions < 30 MHz | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-                                     |
| §15.407 (h)                                                                                                    | TPC & DFS                                       | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | see CETECOM test report 1-1248/16-01-02 |

**Note:** C = Compliant; NC = Not Compliant; NA = Not Applicable; NP = Not Performed

**11 Additional comments**

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:  No test mode available.

Special software is used.  
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

Operating mode 1 (single antenna)

- *Equipment with 1 antenna,*
- *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
- *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*

Operating mode 2 (multiple antennas, no beamforming)

- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*

Operating mode 3 (multiple antennas, with beamforming)

- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming. In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

The devices has three identical external antennas. Two TRX antennas and one RX only antenna for DFS detection.

## 12 Measurement results

### 12.1 Gain

#### Description:

Measurement of the maximum output power conducted and radiated

#### Measurement:

| Measurement parameter    |                                       |
|--------------------------|---------------------------------------|
| Detector:                | Peak                                  |
| Sweep time:              | 5s                                    |
| Resolution bandwidth:    | 3 MHz                                 |
| Video bandwidth:         | 8 MHz / 10 MHz                        |
| Span:                    | See complete signal!                  |
| Trace-Mode:              | Max Hold                              |
| Test setup:              | See chapter 7.2 – A, 7.5 – A, 7.6 – A |
| Measurement uncertainty: | See chapter 9                         |

#### Limits:

| Antenna Gain  |
|---------------|
| Maximum 6 dBi |

**Results: band 1 + band 2**

| <b>OFDM</b><br>Band 5150 MHz to 5350 MHz | <b>Gain</b>        |     |                     |
|------------------------------------------|--------------------|-----|---------------------|
| Channel                                  | Lowest<br>5180 MHz | -/- | Highest<br>5320 MHz |
| Gain                                     | 4.87               | -/- | 4.83                |

**Results: band 3**


| <b>OFDM</b><br>Band 5470 MHz to 5725 MHz | <b>Gain</b>        |                    |                     |
|------------------------------------------|--------------------|--------------------|---------------------|
| Channel                                  | Lowest<br>5500 MHz | Middle<br>5600 MHz | Highest<br>5700 MHz |
| Gain                                     | 3.73               | 2.79               | 2.85                |

**Results: band 4**


| <b>OFDM</b><br>Band 5725 MHz to 5850 MHz | <b>Gain</b>        |                    |                     |
|------------------------------------------|--------------------|--------------------|---------------------|
| Channel                                  | Lowest<br>5745 MHz | Middle<br>5785 MHz | Highest<br>5825 MHz |
| Gain                                     | 7.1                | 5.9                | 6.0                 |

**Plots:**


**Plot 1:** Antenna 1 diagram, 5240 MHz (vertical & horizontal – vectorial summation) – all values are in dBm

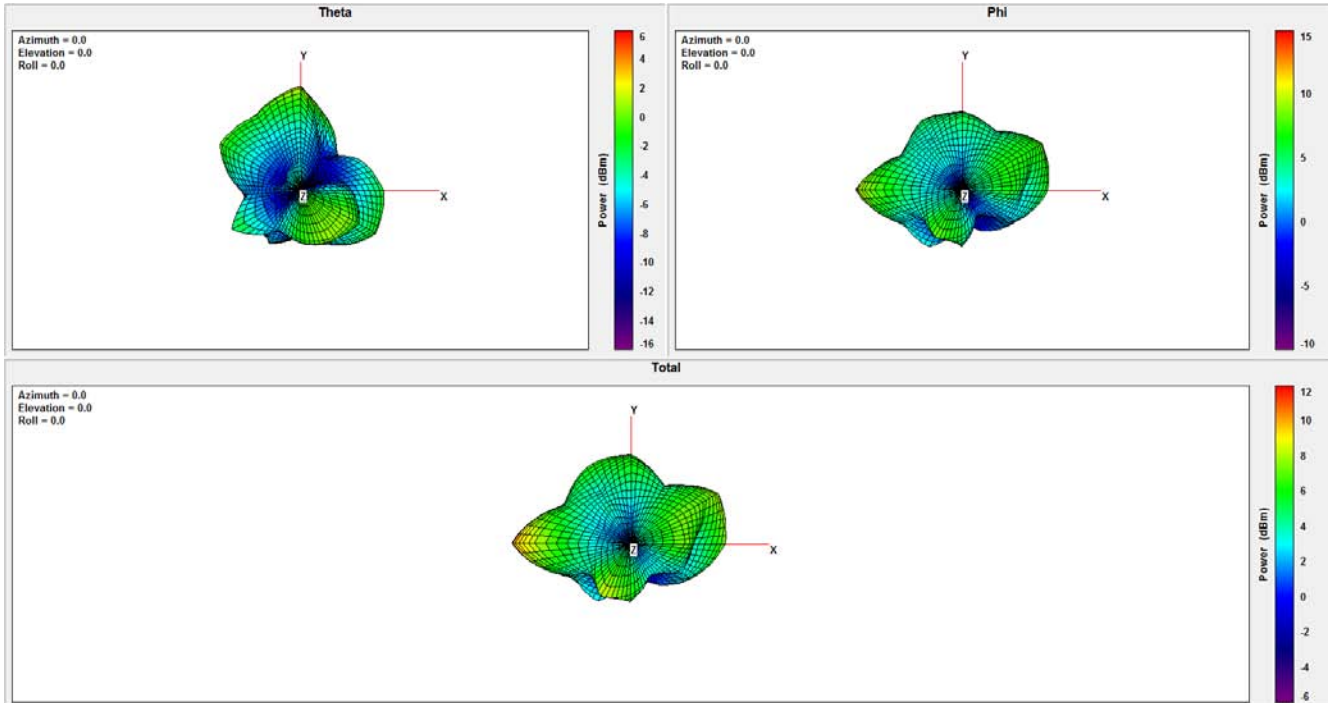


**Plot 2:** Antenna 2 diagram, 5240 MHz (vertical & horizontal – vectorial summation) – all values are in dBm

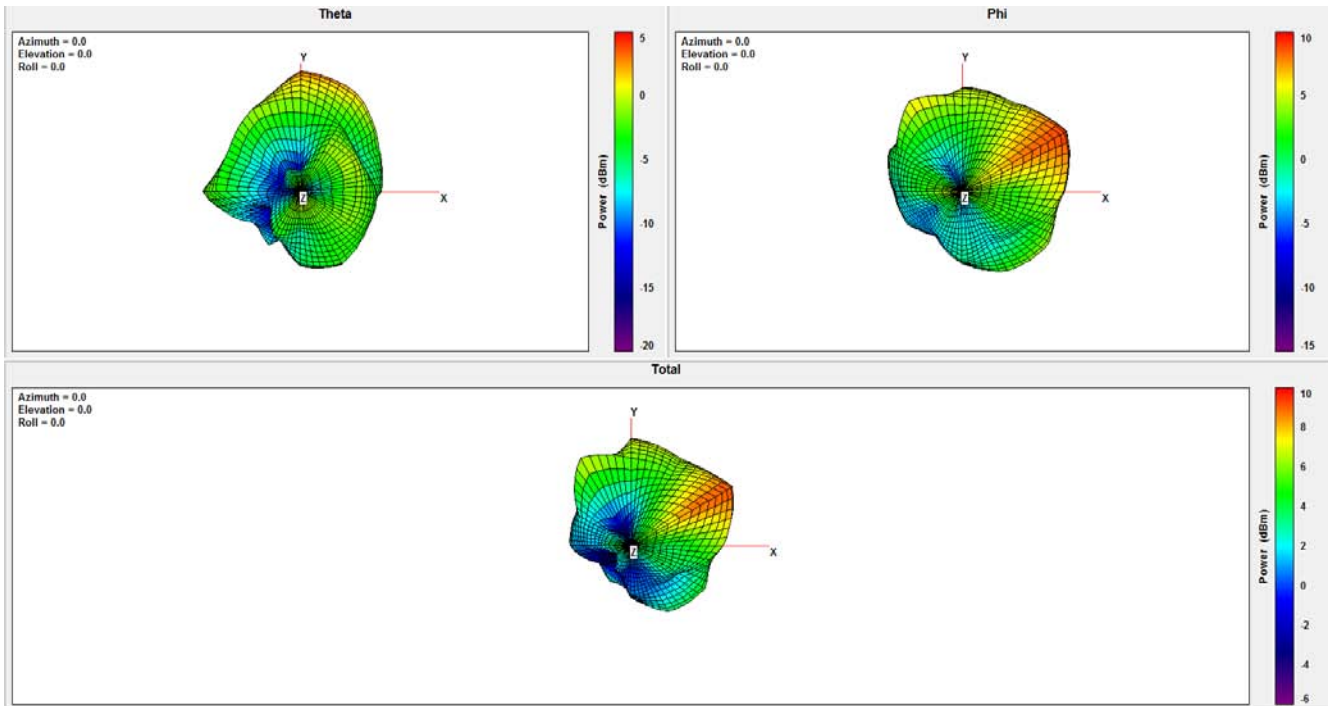

**Plot 3:** Antenna 1 diagram, 5600 MHz (vertical & horizontal – vectorial summation) – all values are in dBm

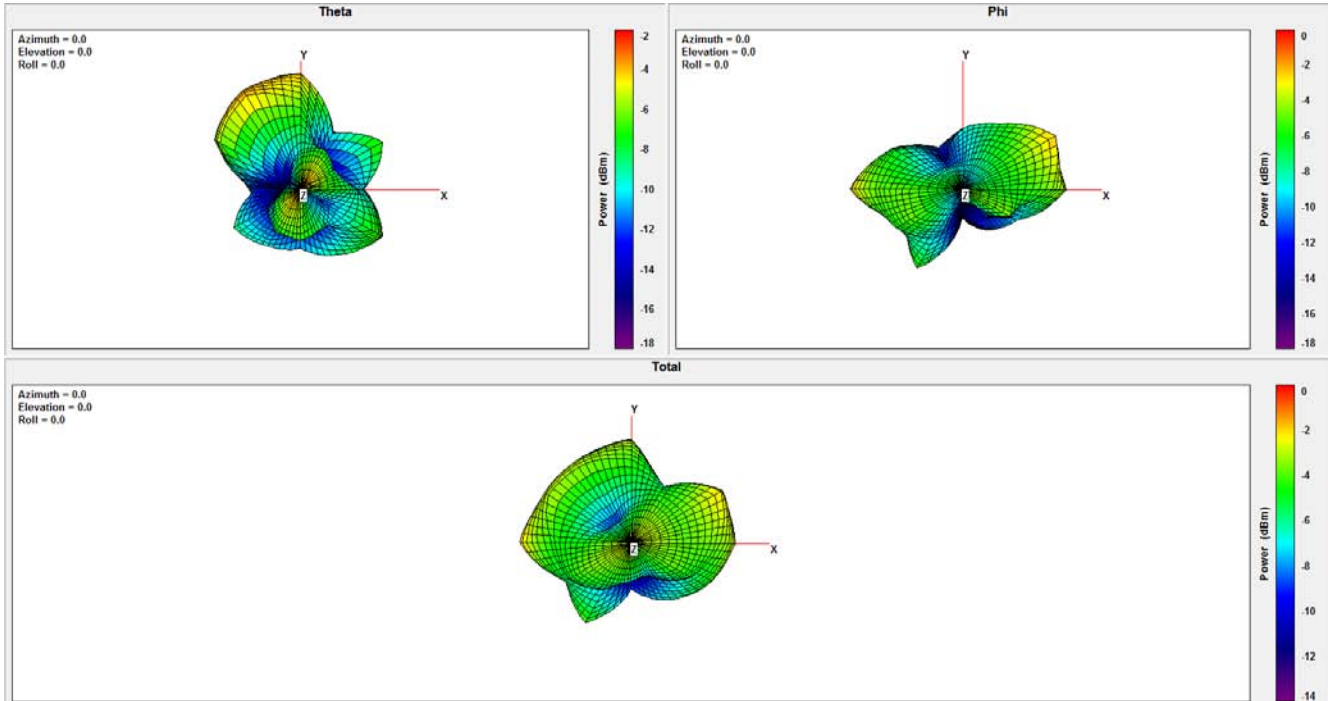


**Plot 4:** Antenna 2 diagram, 5600 MHz (vertical & horizontal – vectorial summation) – all values are in dBm

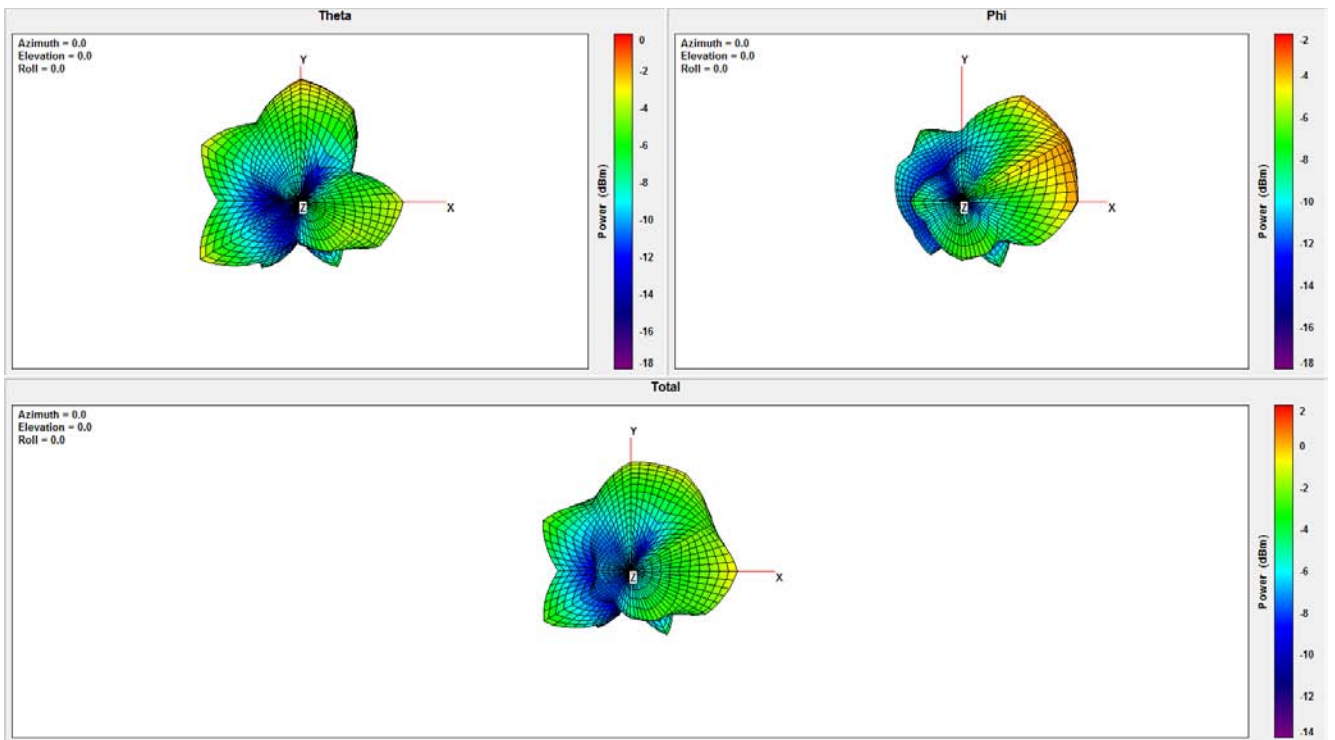


**Plots: band 4 OFDM**

**Plot 1: TX mode, 5745 MHz**

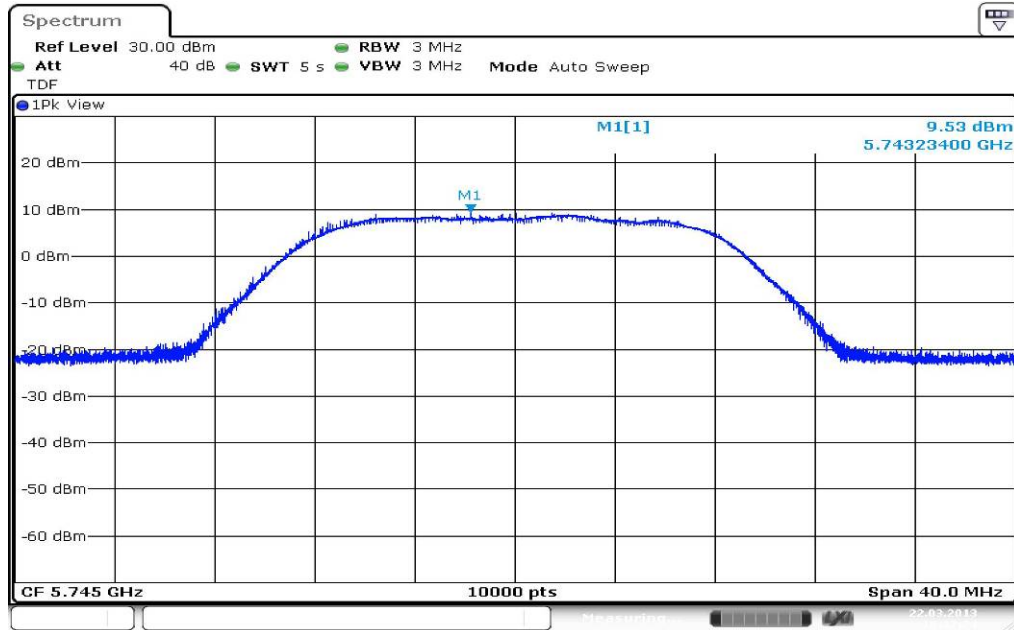

Date: 22.MAR.2013 10:37:24


**Plot 2: TX mode, 5785 MHz**

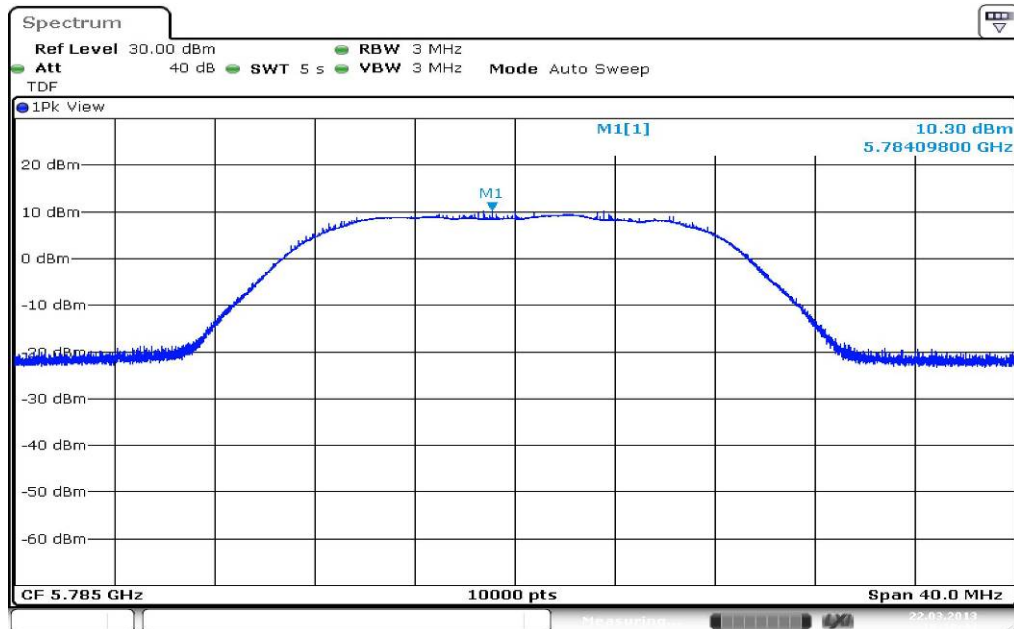

Date: 22.MAR.2013 10:38:44



Plot 3: TX mode, 5825 MHz

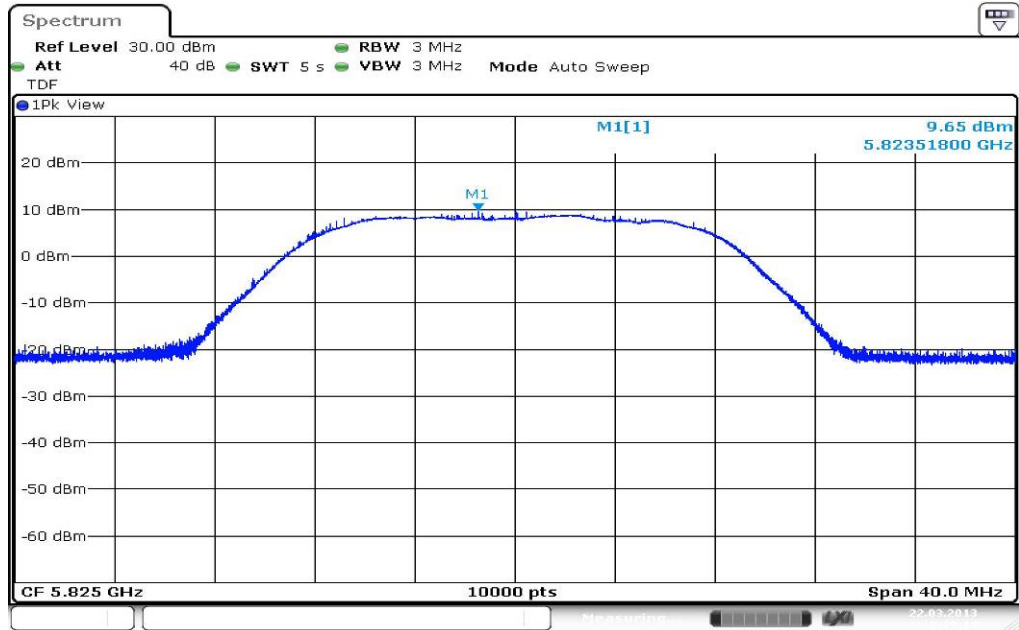

Date: 22.MAR.2013 10:39:14


## 12.2 Duty cycle

### Measurement:

| Measurement parameter    |                                     |
|--------------------------|-------------------------------------|
| Detector:                | Peak                                |
| Sweep time:              | Auto                                |
| Resolution bandwidth:    | 10 MHz                              |
| Video bandwidth:         | 10 MHz                              |
| Span:                    | Zero                                |
| Trace-Mode:              | Video trigger / view / single sweep |
| Test setup:              | See chapter 7.5 – A                 |
| Measurement uncertainty: | See chapter 9                       |

### Plots:

Plot 1: duty cycle of the transmitter – OFDM

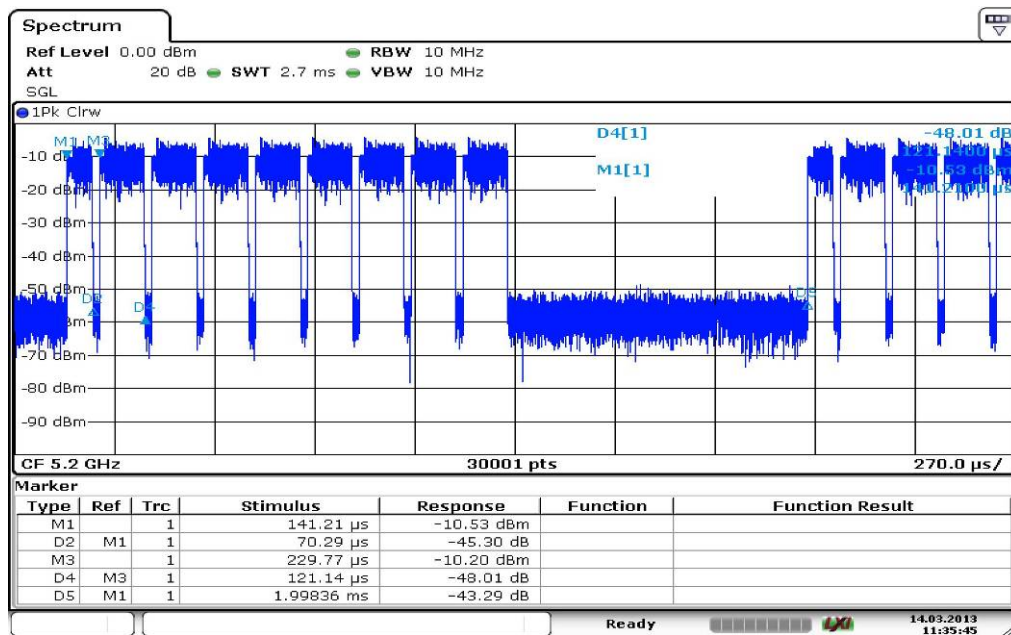

Date: 14.MAR.2013 11:35:46

### Results:

- Burst No. 1 = 70 μs
- Burst No. 2 = 121.14 μs → 8 burst @ 121.14 μs = 969.12 μs
- T<sub>on time</sub> = 969.12 μs + 70 μs = 1.03912 ms
- T<sub>complete time</sub> = 1.99836 ms
- Duty cycle = 52 % → 2.84 dB (duty cycle correction factor)

### 12.3 Maximum output power

#### 12.3.1 Maximum output power conducted - FCC

**Description:**

Measurement of the maximum output power conducted

**Measurement:**

| Measurement parameter    |                                                              |
|--------------------------|--------------------------------------------------------------|
| Detector:                | RMS                                                          |
| Sweep time:              | $\geq 10 * (\text{swp points}) * (\text{total on/off time})$ |
| Resolution bandwidth:    | 1 MHz                                                        |
| Video bandwidth:         | $\geq 3$ MHz                                                 |
| Span:                    | > EBW                                                        |
| Trace-Mode:              | Max hold                                                     |
| Analyzer function        | Band power / channel power<br>Interval > 26 dB EBW           |
| Test setup:              | See chapter 7.5 – A                                          |
| Measurement uncertainty: | See chapter 9                                                |

**Limits:**

| Radiated output power               | Conducted output power for mobile equipment                                                                                                                                                                                  |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conducted power + 6dBi antenna gain | 250mW 5.150-5.250 GHz<br>The lesser one of<br>250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz<br>250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz<br>(where Bandwidth is the 26dB Bandwidth [MHz])<br>1W 5.725-5.85 GHz |
| Limit 7.1 dBi                       | 0.776 W 5.725-5.85 GHz                                                                                                                                                                                                       |

**Result:** OFDM / ANT1


| OFDM / ANT1                     | Maximum output power conducted [dBm] |                    |                     |
|---------------------------------|--------------------------------------|--------------------|---------------------|
| Channel                         | Lowest<br>5180 MHz                   | -/-                | Highest<br>5320 MHz |
| including duty cycle correction | 10.2                                 | -/-                | 9.9                 |
| Channel                         | Lowest<br>5500 MHz                   | Middle<br>5600 MHz | Highest<br>5700 MHz |
| including duty cycle correction | 10.7                                 | 11.0               | 10.4                |
| Channel                         | Lowest<br>5745 MHz                   | Middle<br>5785 MHz | Highest<br>5825 MHz |
| including duty cycle correction | 9.8                                  | 10.6               | 9.8                 |

**Result:** OFDM / ANT2

| OFDM / ANT2                     | Maximum output power conducted [dBm] |                    |                     |
|---------------------------------|--------------------------------------|--------------------|---------------------|
| Channel                         | Lowest<br>5180 MHz                   | -/-                | Highest<br>5320 MHz |
| including duty cycle correction | 8.9                                  | -/-                | 9.5                 |
| Channel                         | Lowest<br>5500 MHz                   | Middle<br>5600 MHz | Highest<br>5700 MHz |
| including duty cycle correction | 11.1                                 | 11.3               | 10.3                |
| Channel                         | Lowest<br>5745 MHz                   | Middle<br>5785 MHz | Highest<br>5825 MHz |
| including duty cycle correction | 9.4                                  | 10.2               | 9.6                 |


**Plots: OFDM / ANT1**

**Plot 1: 5180 MHz**

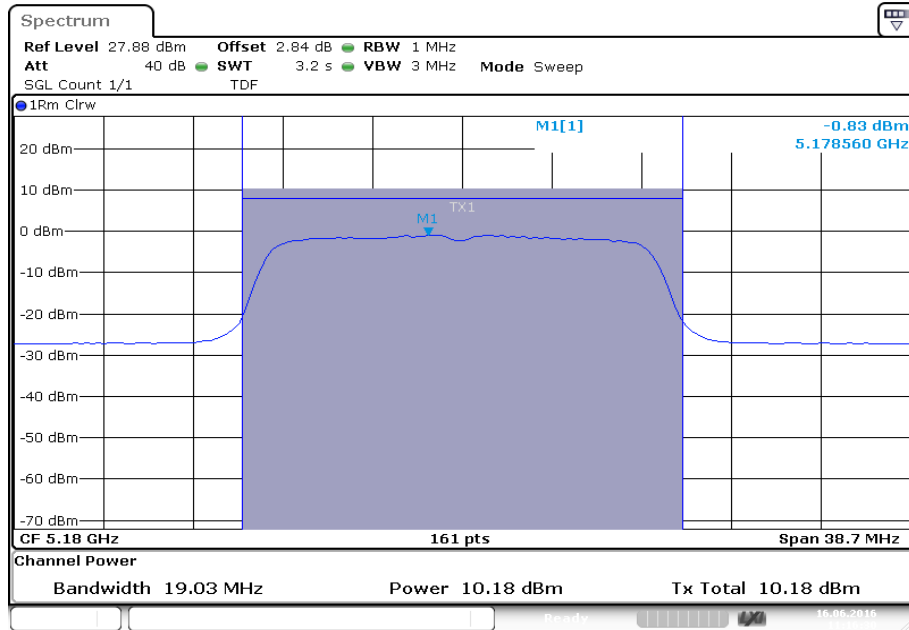


Date: 16.JUN.2016 11:16:31

**Plot 2: 5320 MHz**

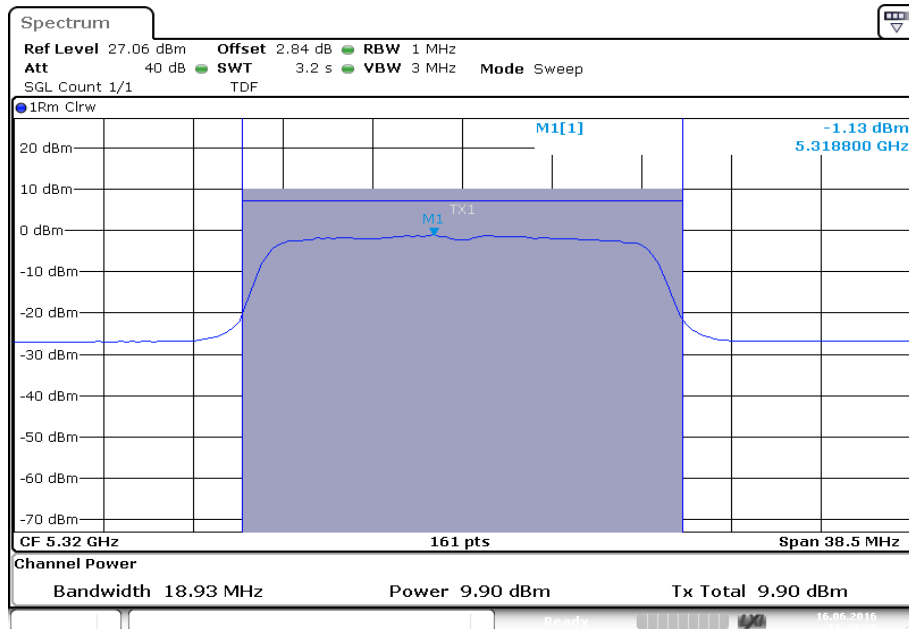


Date: 16.JUN.2016 11:20:28


Plot 3: 5500 MHz

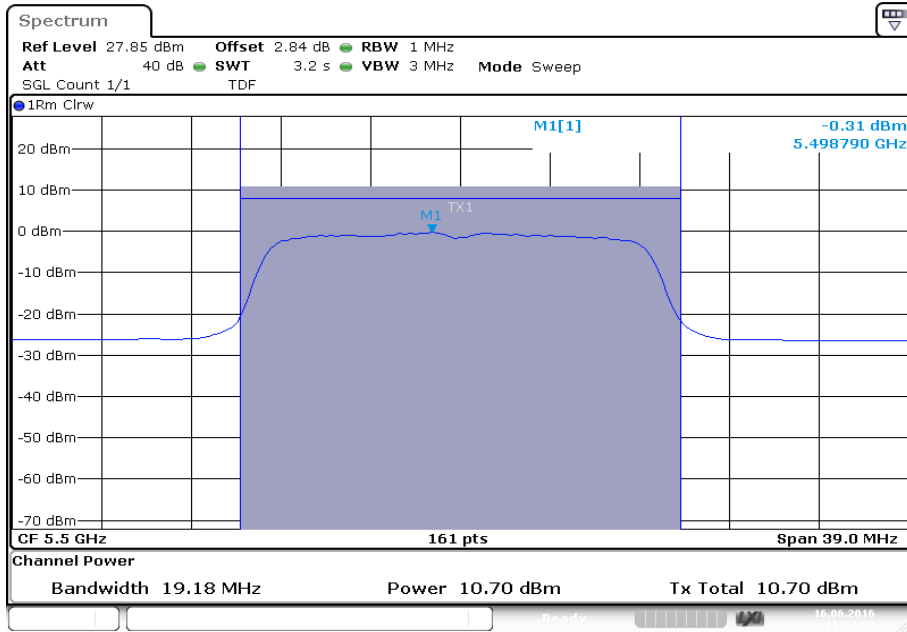

Plot 4: 5600 MHz

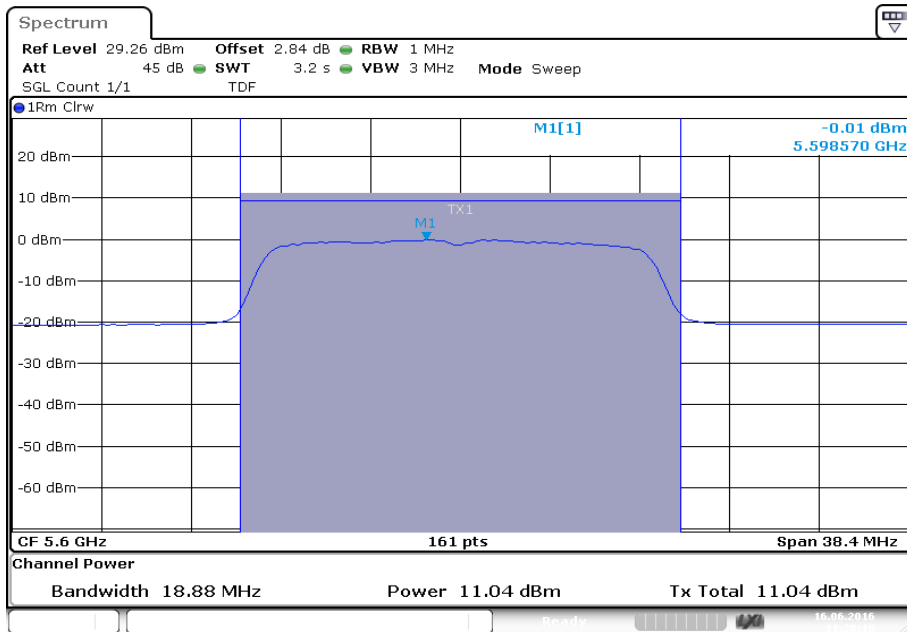


Plot 5: 5700 MHz

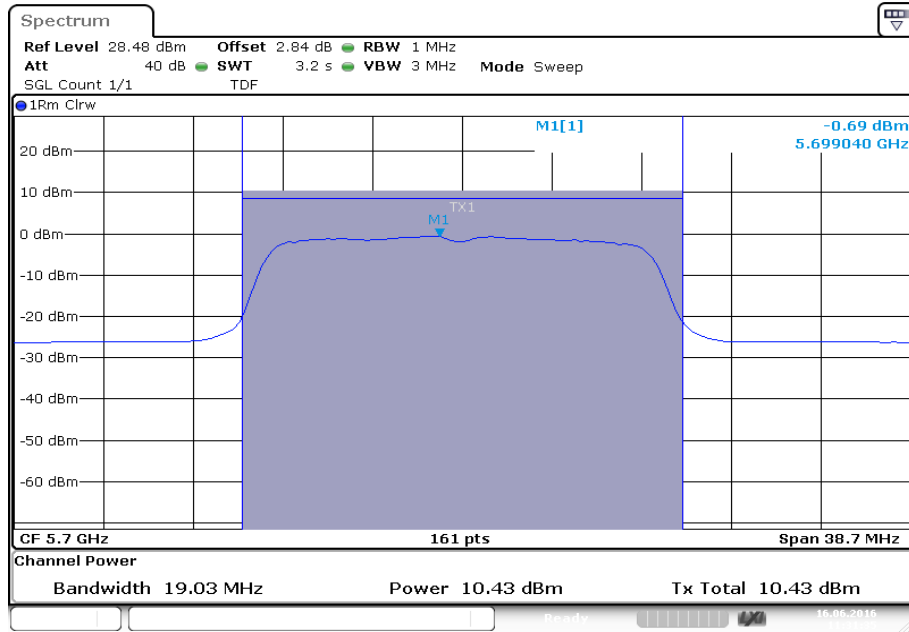


Date: 16.JUN.2016 11:31:35

Plot 6: 5745 MHz

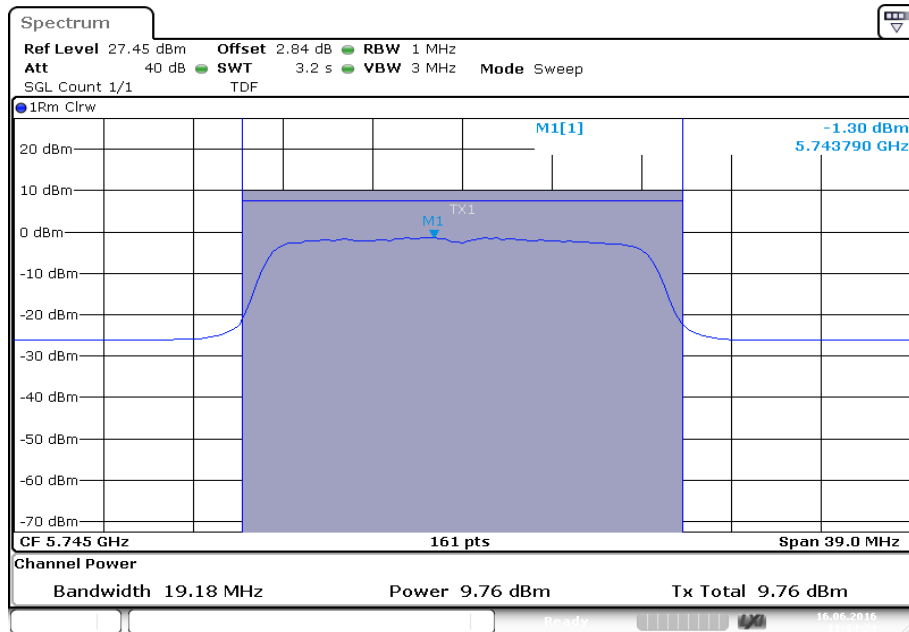


Date: 16.JUN.2016 11:34:23

Plot 7: 5785 MHz

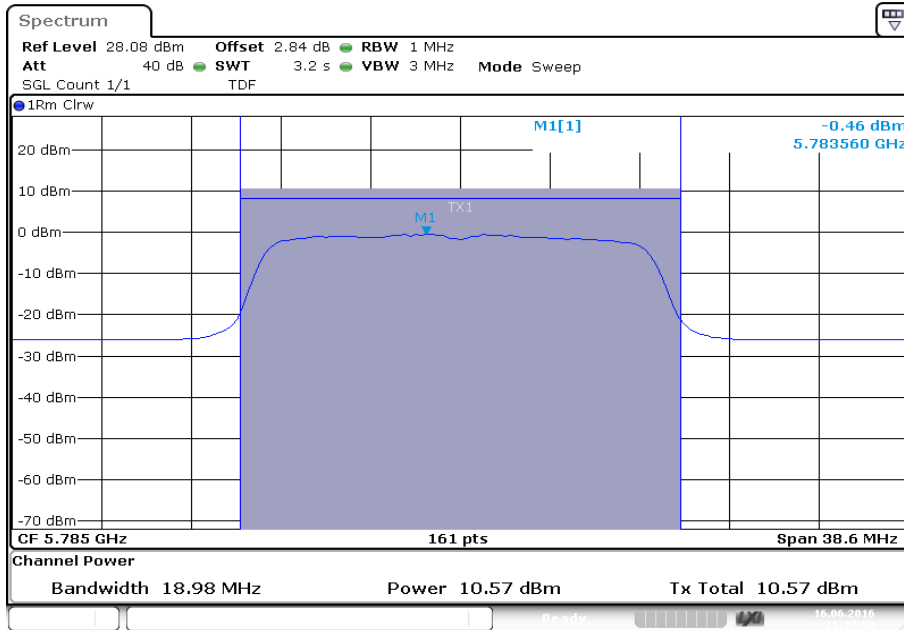

Date: 16.JUN.2016 11:37:50

Plot 8: 5825 MHz

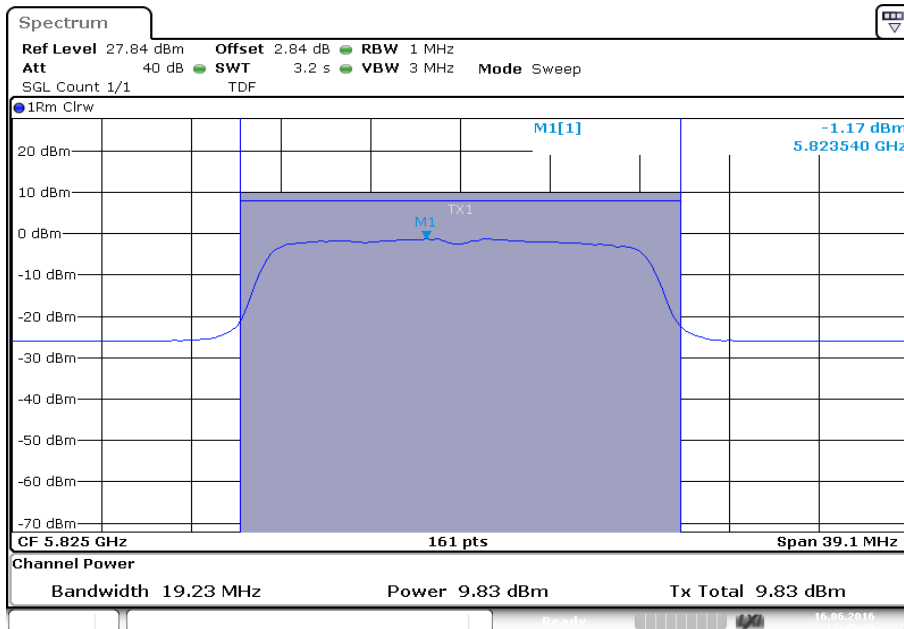


Date: 16.JUN.2016 11:45:49




**Plots: OFDM / ANT2**

**Plot 1: 5180 MHz**

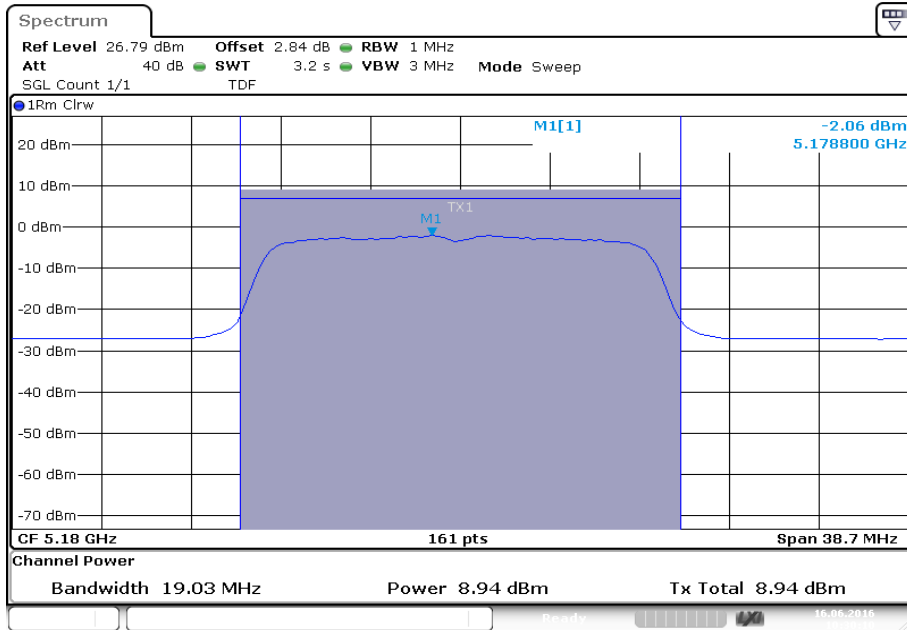


Date: 16.JUN.2016 10:30:10

**Plot 2: 5320 MHz**

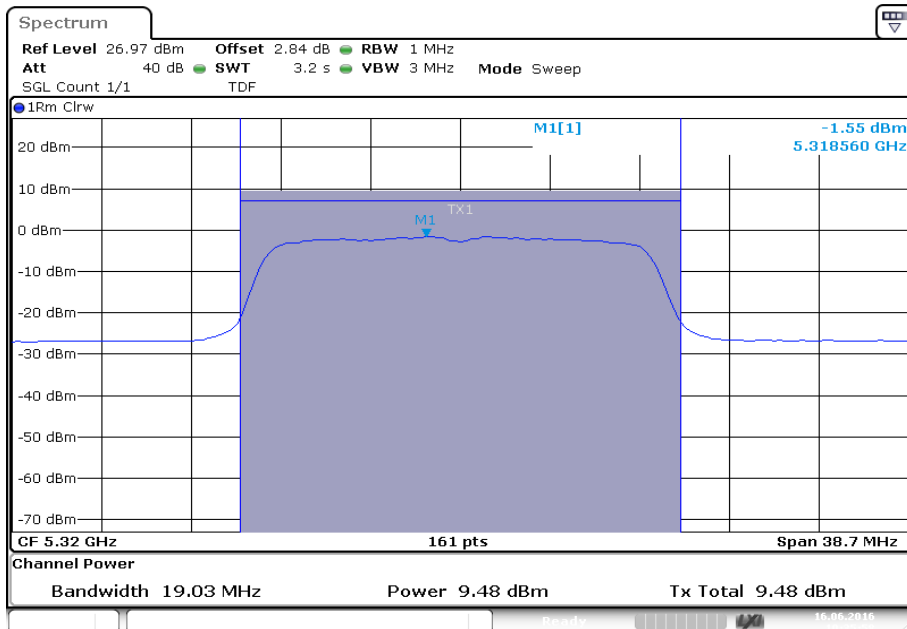


Date: 16.JUN.2016 10:35:58

Plot 3: 5500 MHz

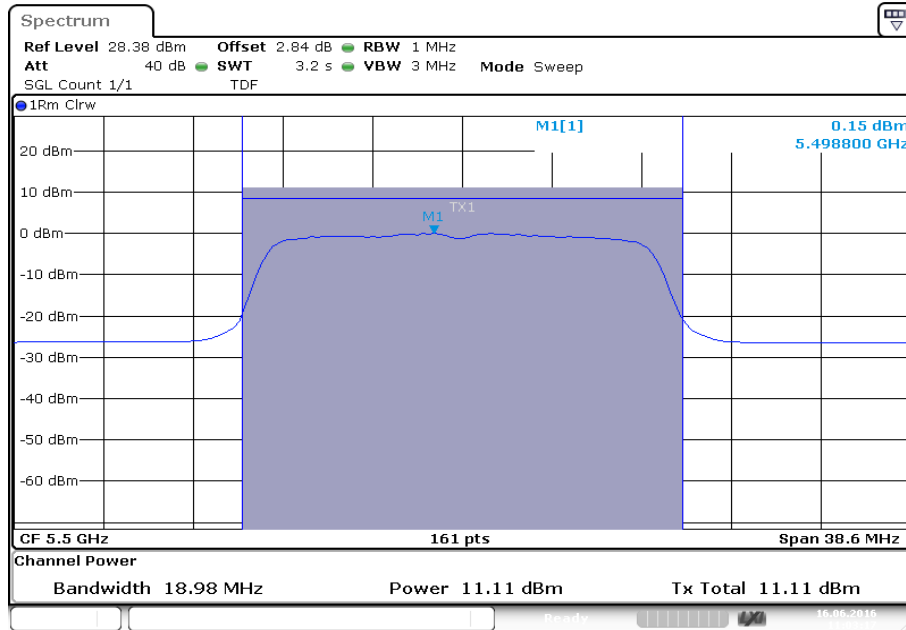


Date: 16.JUN.2016 11:03:17

Plot 4: 5600 MHz

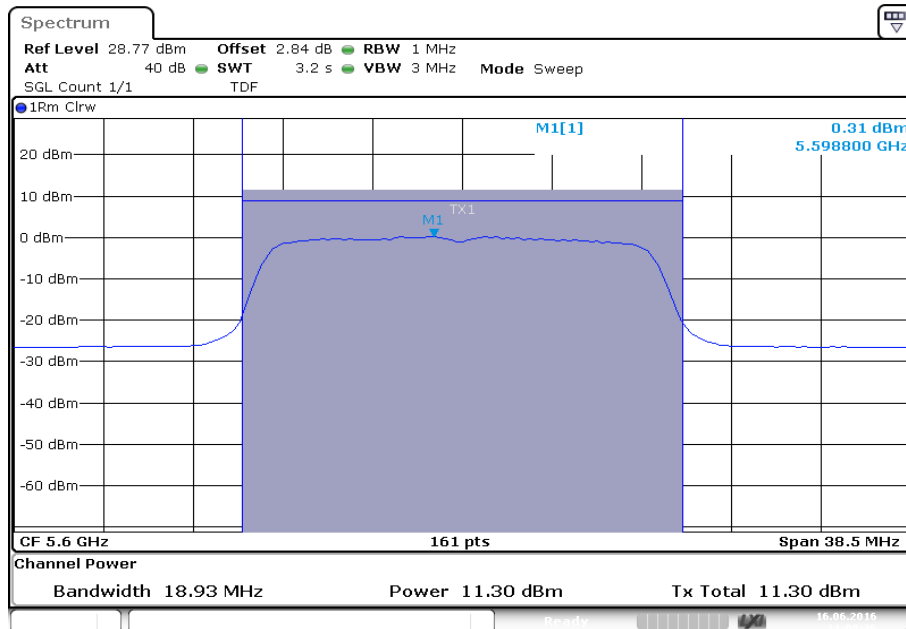


Date: 16.JUN.2016 11:08:36

Plot 5: 5700 MHz

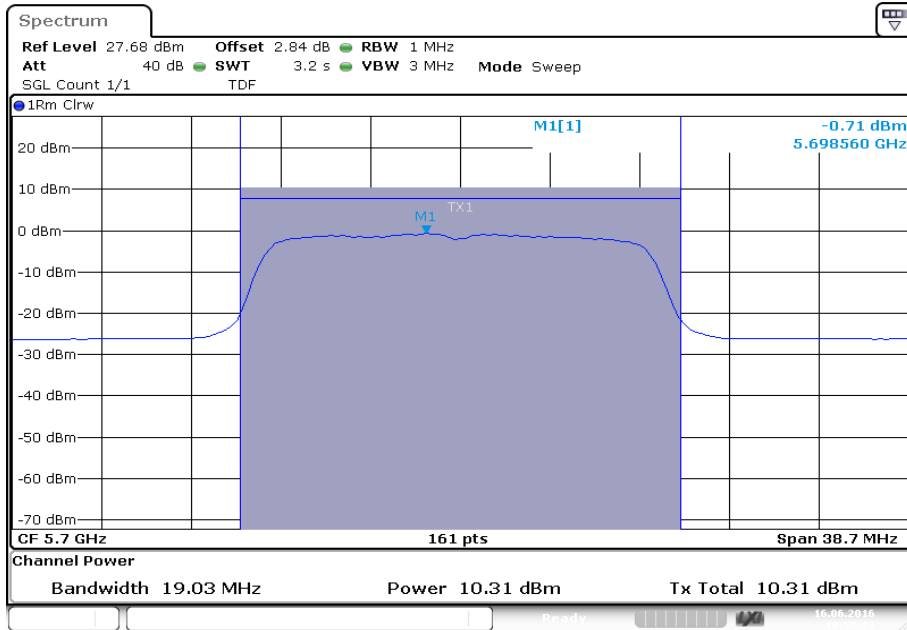


Date: 16.JUN.2016 10:50:23

Plot 6: 5745 MHz

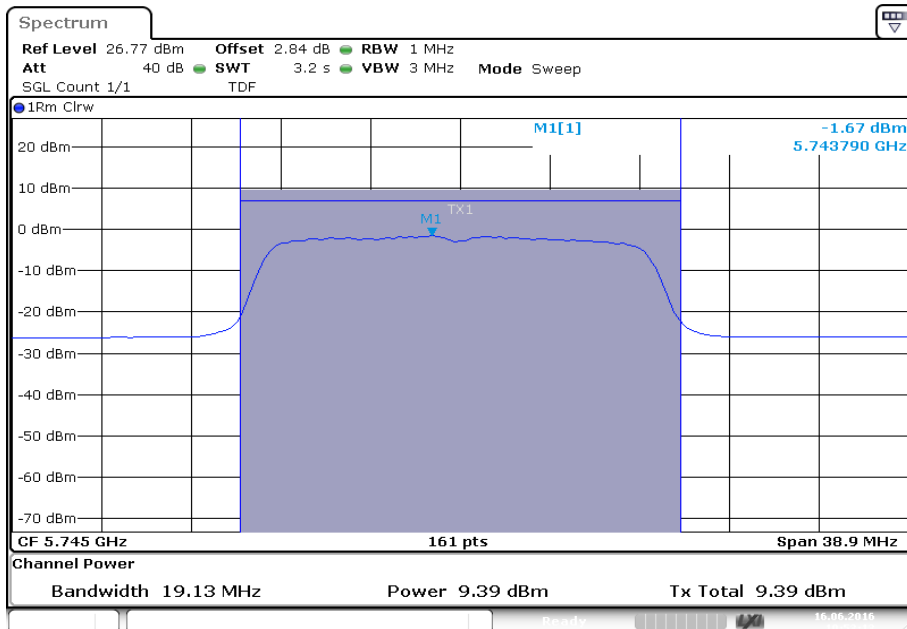


Date: 16.JUN.2016 10:53:13

Plot 7: 5785 MHz

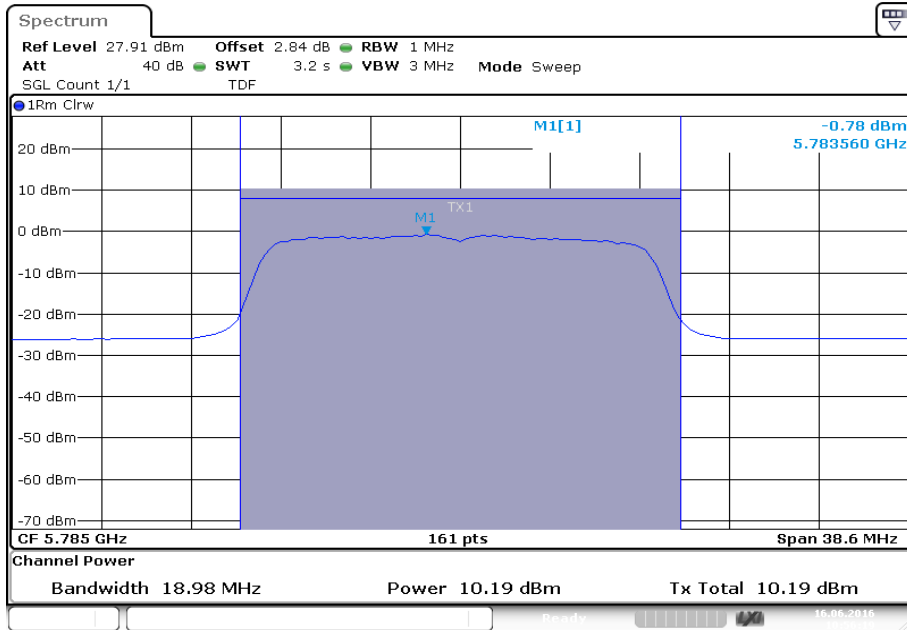

Date: 16.JUN.2016 10:56:19

Plot 8: 5825 MHz

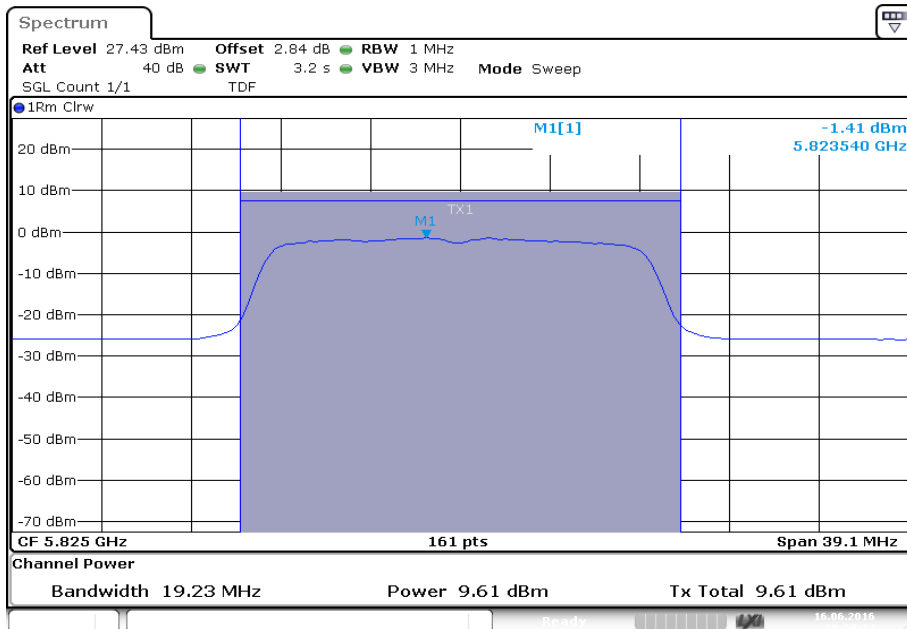

Date: 16.JUN.2016 10:59:24

### 12.3.2 Maximum output power conducted - IC

**Description:**

Measurement of the maximum output power conducted + radiated

**Measurement:**

| Measurement parameter    |                                                              |
|--------------------------|--------------------------------------------------------------|
| Detector:                | RMS                                                          |
| Sweep time:              | $\geq 10 * (\text{swp points}) * (\text{total on/off time})$ |
| Resolution bandwidth:    | 1 MHz                                                        |
| Video bandwidth:         | $\geq 3$ MHz                                                 |
| Span:                    | > EBW                                                        |
| Trace-Mode:              | Max hold                                                     |
| Analyzer function        | Band power / channel power<br>Interval > 99% OBW             |
| Test setup:              | See chapter 7.5 – A                                          |
| Measurement uncertainty: | See chapter 9                                                |

**Limits:**

| Radiated output power                                                                                                                                                                                                                                                                   | Conducted output power for mobile equipment                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The lesser one of<br>200 mW or 10 dBm + 10 log Bandwidth 5.150-5.250 GHz<br>1 W or 17 dBm + 10 log Bandwidth 5.250-5.350 GHz<br>1 W or 17 dBm + 10 log Bandwidth 5.470-5.725 GHz<br>(where Bandwidth is the 99% Bandwidth [MHz])<br>Conducted power + 6dBi antenna gain 5.725-5.825 GHz | The lesser one of<br>250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz<br>250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz<br>(where Bandwidth is the 99% Bandwidth [MHz])<br>1W 5.725-5.825 GHz |

**Result:** OFDM / ANT1


| OFDM / ANT1                     | Maximum output power conducted [dBm] |                    |                     |
|---------------------------------|--------------------------------------|--------------------|---------------------|
|                                 | Lowest<br>5180 MHz                   | -/-                | Highest<br>5320 MHz |
| Channel                         |                                      |                    |                     |
| including duty cycle correction | 16.2                                 | -/-                | 9.9                 |
| OFDM / ANT1                     | Lowest<br>5500 MHz                   | Middle<br>5600 MHz | Highest<br>5700 MHz |
|                                 | Channel                              |                    |                     |
| including duty cycle correction | 10.7                                 | 11.0               | 10.4                |
| OFDM / ANT1                     | Lowest<br>5745 MHz                   | Middle<br>5785 MHz | Highest<br>5825 MHz |
|                                 | Channel                              |                    |                     |
| including duty cycle correction | 9.7                                  | 10.5               | 9.8                 |

**Result:** OFDM / ANT2

| OFDM / ANT2                     | Maximum output power conducted [dBm] |                    |                     |
|---------------------------------|--------------------------------------|--------------------|---------------------|
|                                 | Lowest<br>5180 MHz                   | -/-                | Highest<br>5320 MHz |
| Channel                         |                                      |                    |                     |
| including duty cycle correction | 13.8                                 | -/-                | 9.4                 |
| OFDM / ANT2                     | Lowest<br>5500 MHz                   | Middle<br>5600 MHz | Highest<br>5700 MHz |
|                                 | Channel                              |                    |                     |
| including duty cycle correction | 11.1                                 | 11.2               | 10.3                |
| OFDM / ANT2                     | Lowest<br>5745 MHz                   | Middle<br>5785 MHz | Highest<br>5825 MHz |
|                                 | Channel                              |                    |                     |
| including duty cycle correction | 9.4                                  | 10.1               | 9.6                 |


**Plots: OFDM / ANT1**

**Plot 1: 5180 MHz**

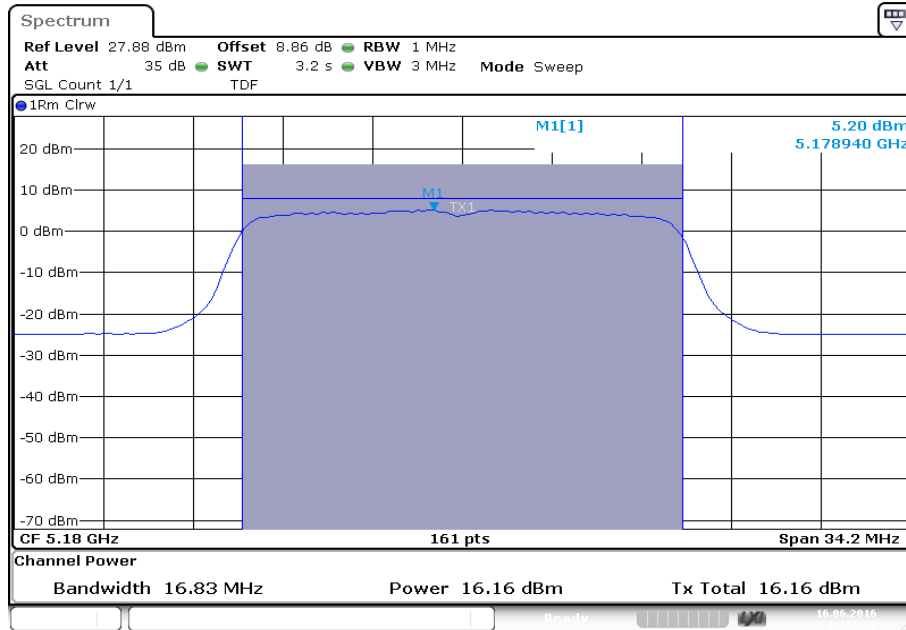


Date: 16.JUN.2016 11:16:38

**Plot 2: 5320 MHz**

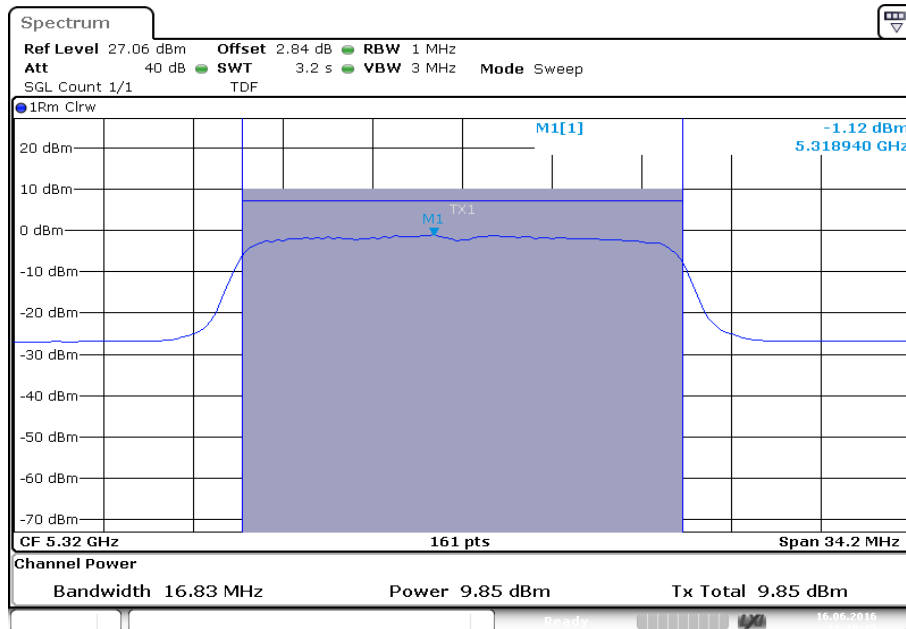


Date: 16.JUN.2016 11:20:35

Plot 3: 5500 MHz

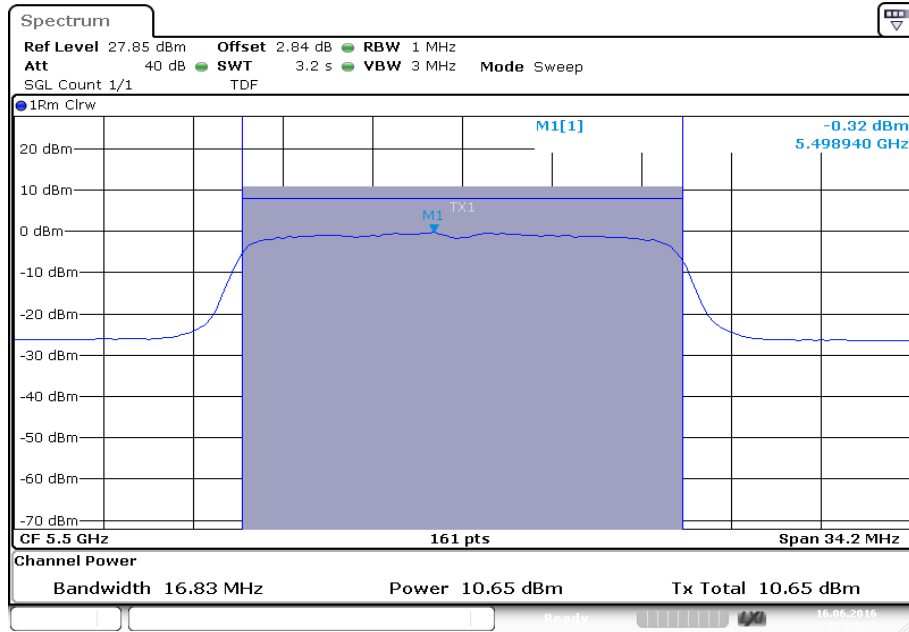

Date: 16.JUN.2016 11:24:38


Plot 4: 5600 MHz

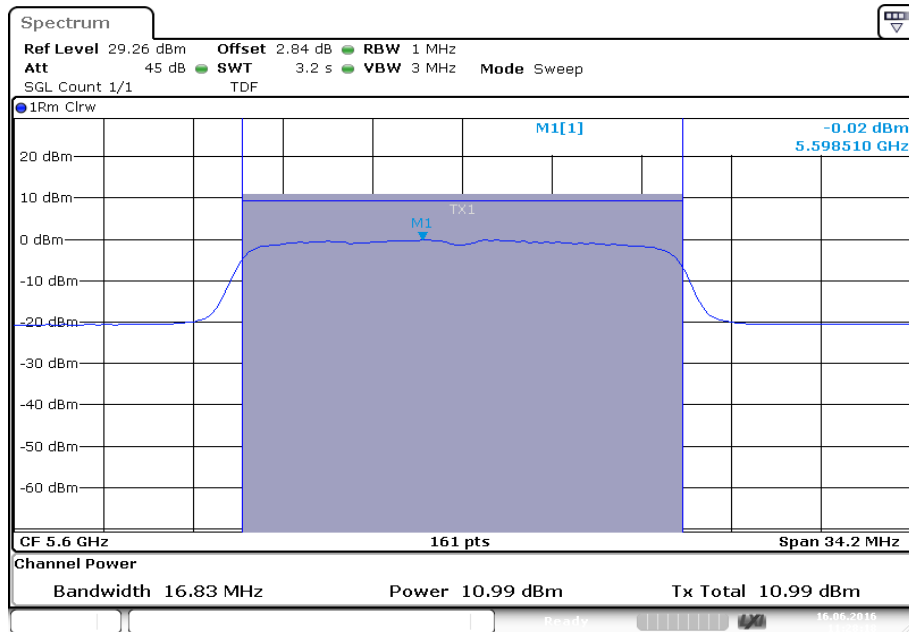

Date: 16.JUN.2016 11:28:18




Plot 5: 5700 MHz

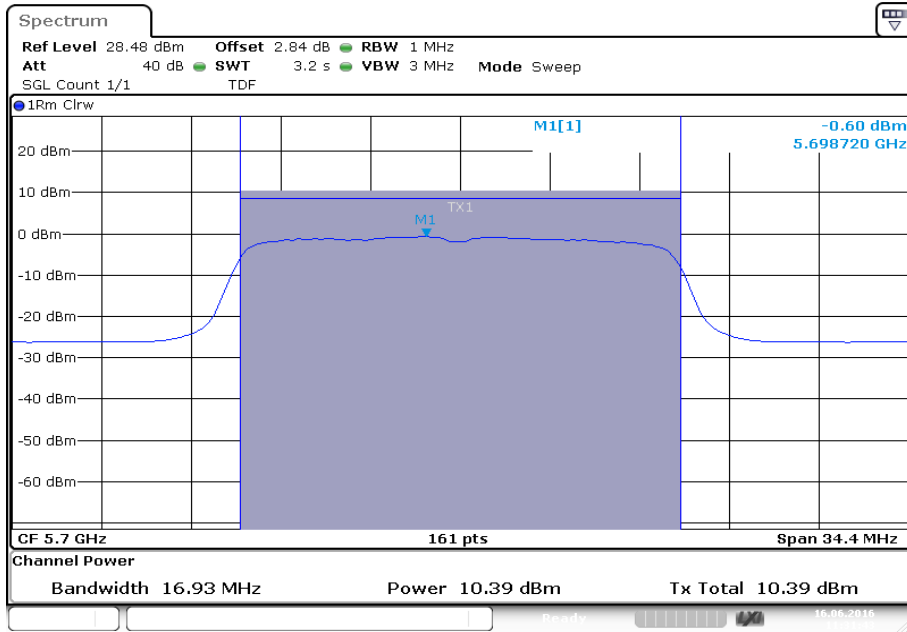


Date: 16.JUN.2016 11:31:43

Plot 6: 5745 MHz

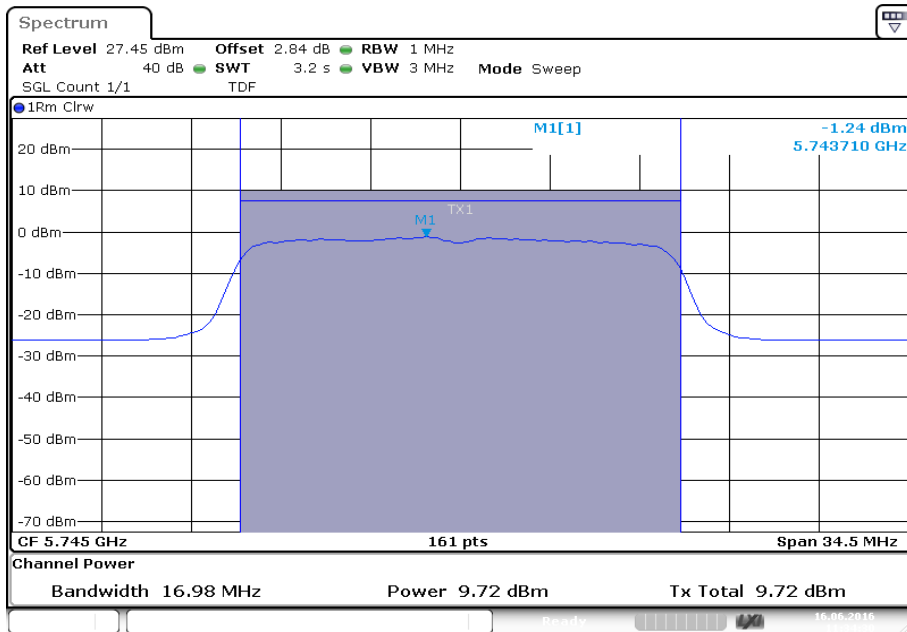


Date: 16.JUN.2016 11:34:31

Plot 7: 5785 MHz

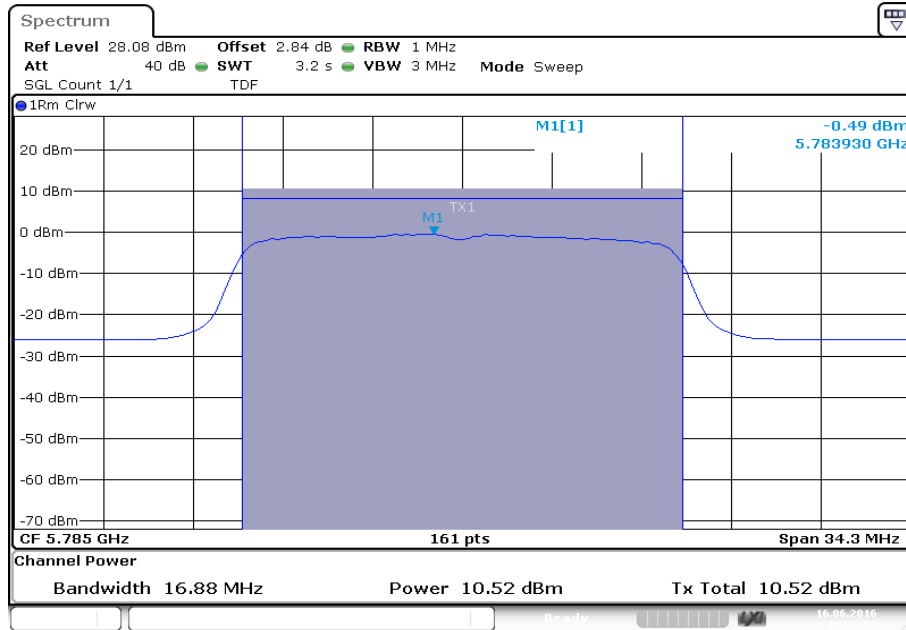

Date: 16.JUN.2016 11:37:58


Plot 8: 5825 MHz

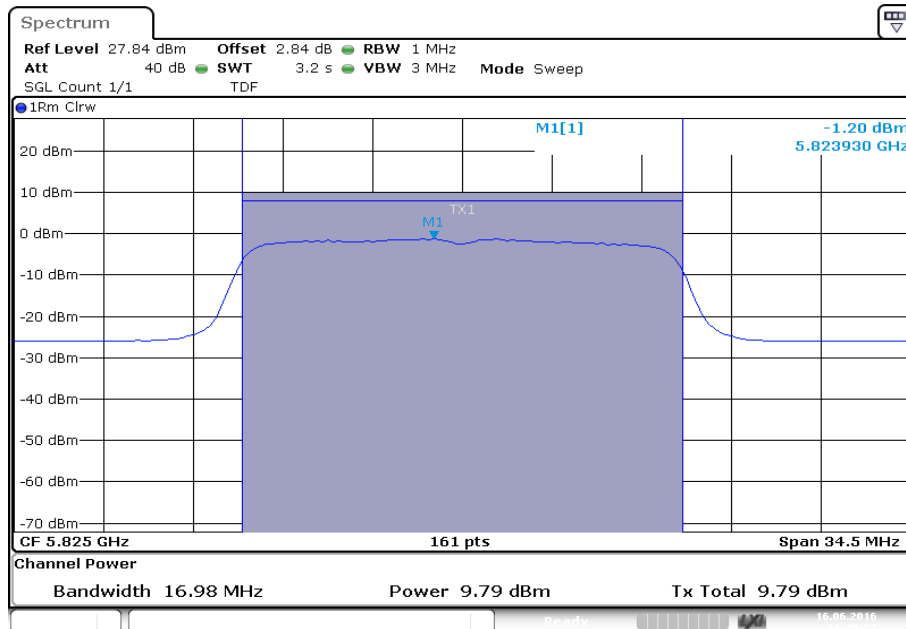

Date: 16.JUN.2016 11:45:57


**Plots: OFDM / ANT2**

**Plot 1: 5180 MHz**

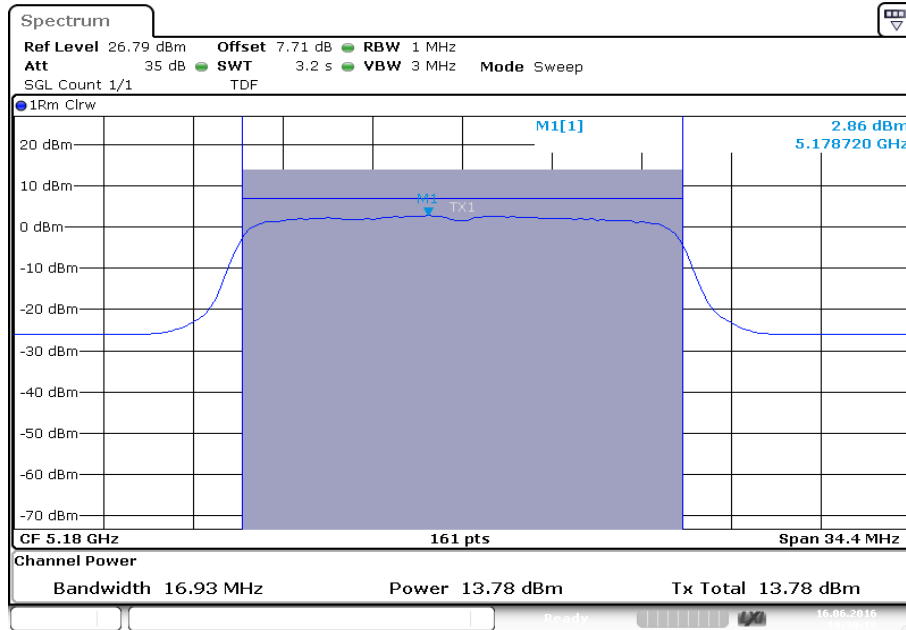


Date: 16.JUN.2016 10:30:19

**Plot 2: 5320 MHz**

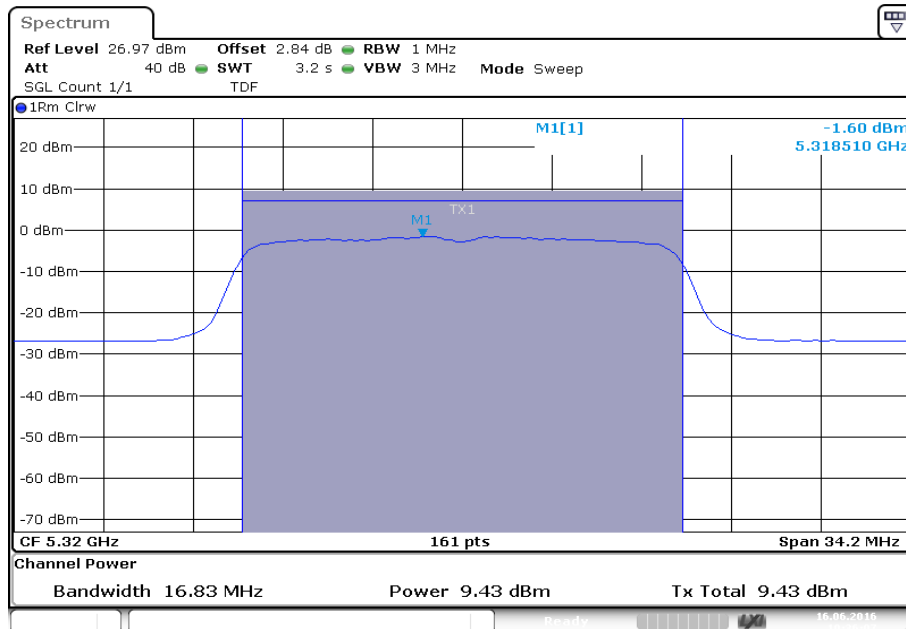


Date: 16.JUN.2016 10:36:07

Plot 3: 5500 MHz

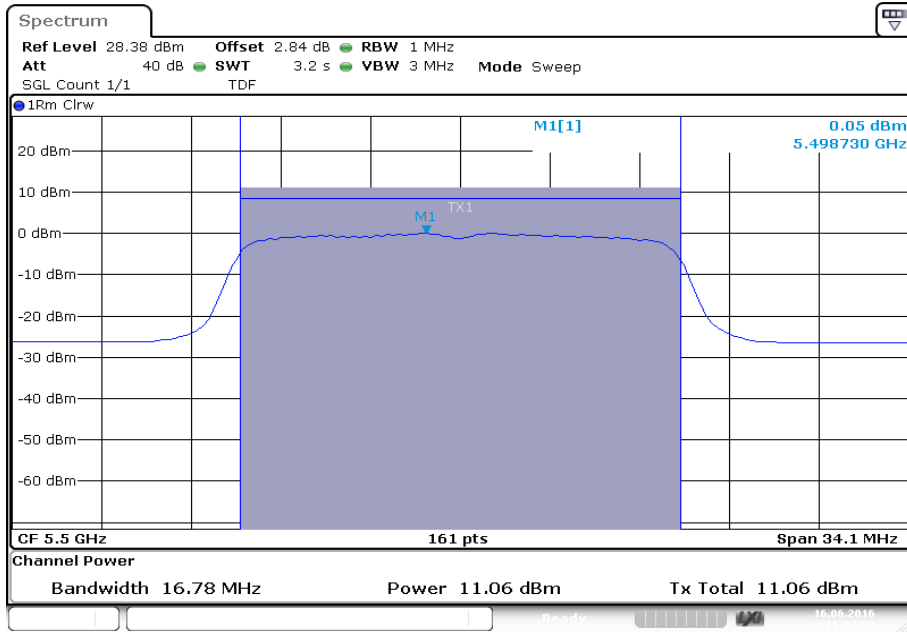


Date: 16.JUN.2016 11:03:25

Plot 4: 5600 MHz

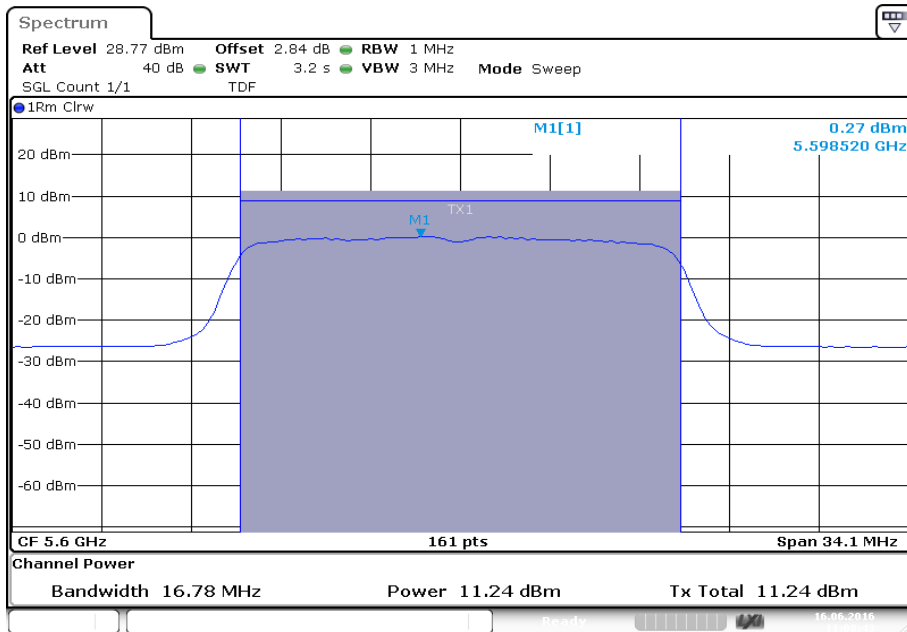


Date: 16.JUN.2016 11:08:43

Plot 5: 5700 MHz

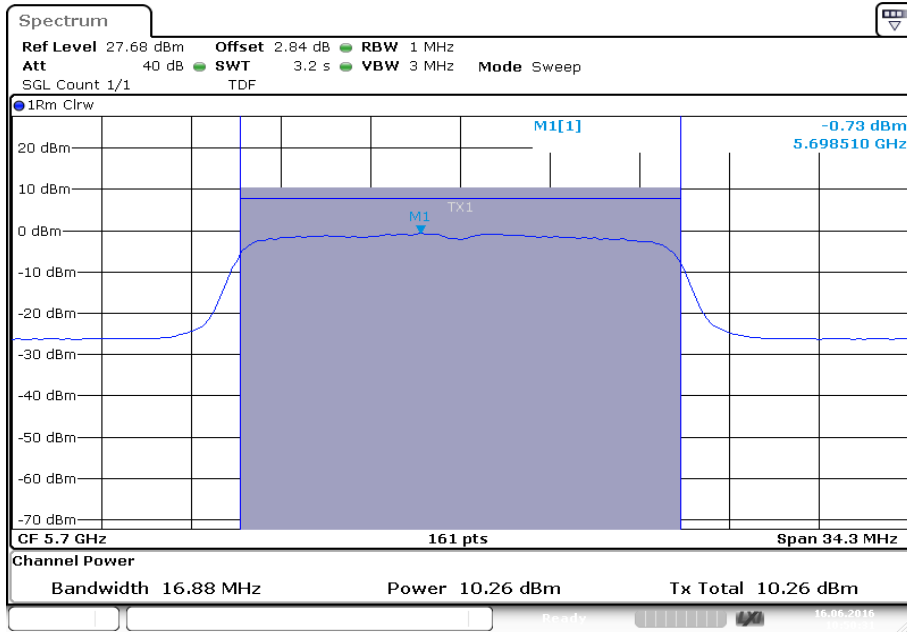


Date: 16.JUN.2016 10:50:31

Plot 6: 5745 MHz

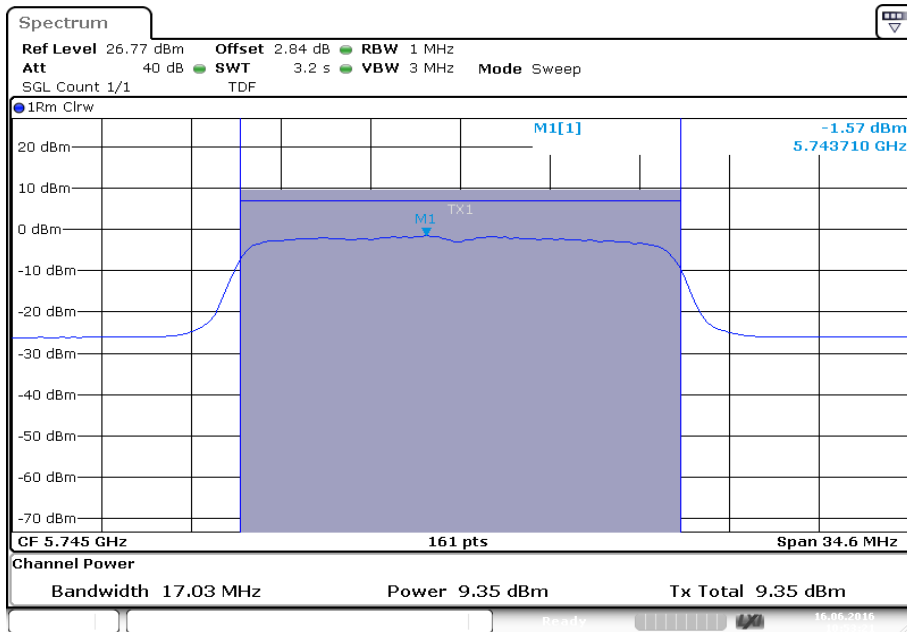


Date: 16.JUN.2016 10:53:21

Plot 7: 5785 MHz

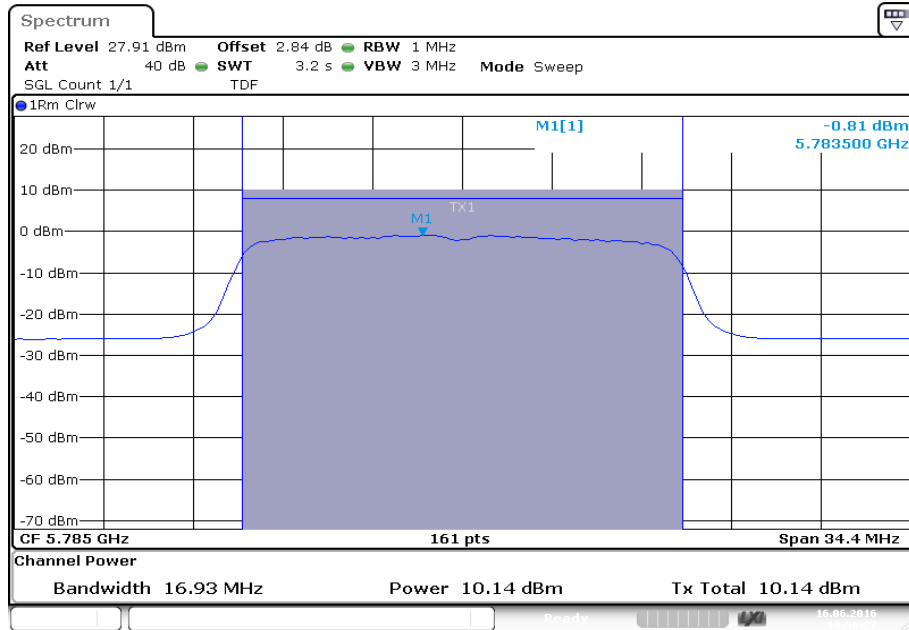

Date: 16.JUN.2016 10:56:27

Plot 8: 5825 MHz

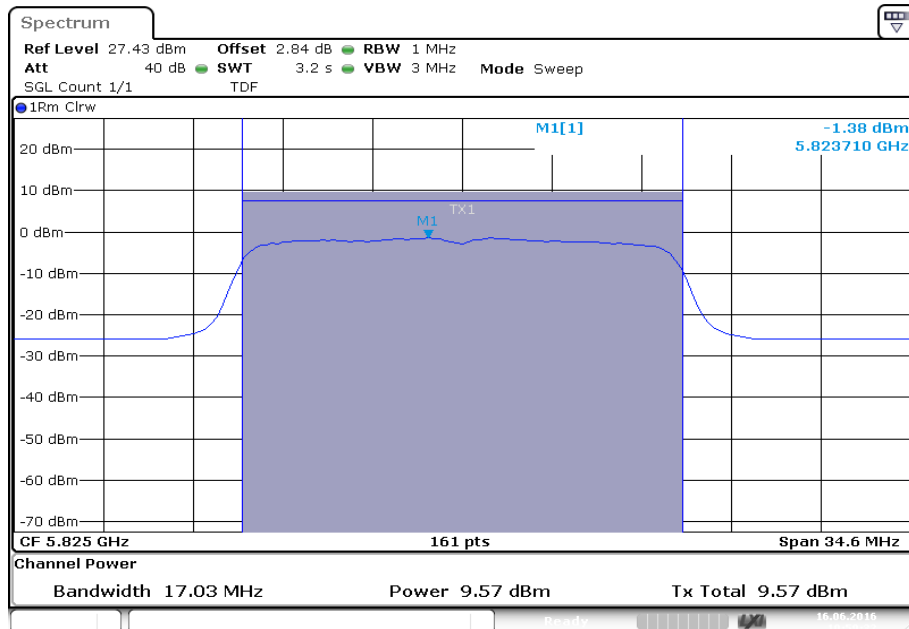

Date: 16.JUN.2016 10:59:32

## 12.4 Power spectral density

### 12.4.1 Power spectral density - FCC

#### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

#### Measurement:

| Measurement parameter    |                                                              |
|--------------------------|--------------------------------------------------------------|
| Detector:                | RMS                                                          |
| Sweep time:              | $\geq 10 * (\text{swp points}) * (\text{total on/off time})$ |
| Resolution bandwidth:    | 1 MHz (500 kHz for 5.8 GHz band)                             |
| Video bandwidth:         | $\geq 3 * \text{RBW}$                                        |
| Span:                    | $> \text{EBW}$                                               |
| Trace-Mode:              | Max hold                                                     |
| Test setup:              | See chapter 7.5 – A                                          |
| Measurement uncertainty: | See chapter 9                                                |

#### Limits:

| Power Spectral Density                                                                    |
|-------------------------------------------------------------------------------------------|
| power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5150 – 5250 MHz)   |
| power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5250 – 5350 MHz)   |
| power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5470 – 5725 MHz)   |
| power spectral density conducted $\leq 30$ dBm in any 500 kHz band (band 5725 – 5850 MHz) |

**Result: OFDM / ANT1**

| OFDM / ANT1                     | Power Spectral density [dBm/MHz] |                    |                     |
|---------------------------------|----------------------------------|--------------------|---------------------|
|                                 | Lowest<br>5180 MHz               | -/-                | Highest<br>5320 MHz |
| Channel                         |                                  |                    |                     |
| including duty cycle correction | -0.83                            | -/-                | -1.13               |
| OFDM / ANT1                     | Lowest<br>5500 MHz               | Middle<br>5600 MHz | Highest<br>5700 MHz |
|                                 |                                  |                    |                     |
| Channel                         |                                  |                    |                     |
| including duty cycle correction | -0.31                            | -0.01              | -0.69               |
| OFDM / ANT1                     | Lowest<br>5745 MHz               | Middle<br>5785 MHz | Highest<br>5825 MHz |
|                                 |                                  |                    |                     |
| Channel                         |                                  |                    |                     |
| including duty cycle correction | -3.97                            | -3.25              | -3.99               |


**Result: OFDM / ANT2**

| OFDM / ANT2                     | Power Spectral density [dBm/MHz] |                    |                     |
|---------------------------------|----------------------------------|--------------------|---------------------|
|                                 | Lowest<br>5180 MHz               | -/-                | Highest<br>5320 MHz |
| Channel                         |                                  |                    |                     |
| including duty cycle correction | -2.06                            | -/-                | -1.55               |
| OFDM / ANT2                     | Lowest<br>5500 MHz               | Middle<br>5600 MHz | Highest<br>5700 MHz |
|                                 |                                  |                    |                     |
| Channel                         |                                  |                    |                     |
| including duty cycle correction | 0.15                             | 0.31               | -0.71               |
| OFDM / ANT2                     | Lowest<br>5745 MHz               | Middle<br>5785 MHz | Highest<br>5825 MHz |
|                                 |                                  |                    |                     |
| Channel                         |                                  |                    |                     |
| including duty cycle correction | -4.33                            | -3.53              | -4.19               |




**Plots: OFDM / ANT1**

**Plot 1: 5745 MHz**

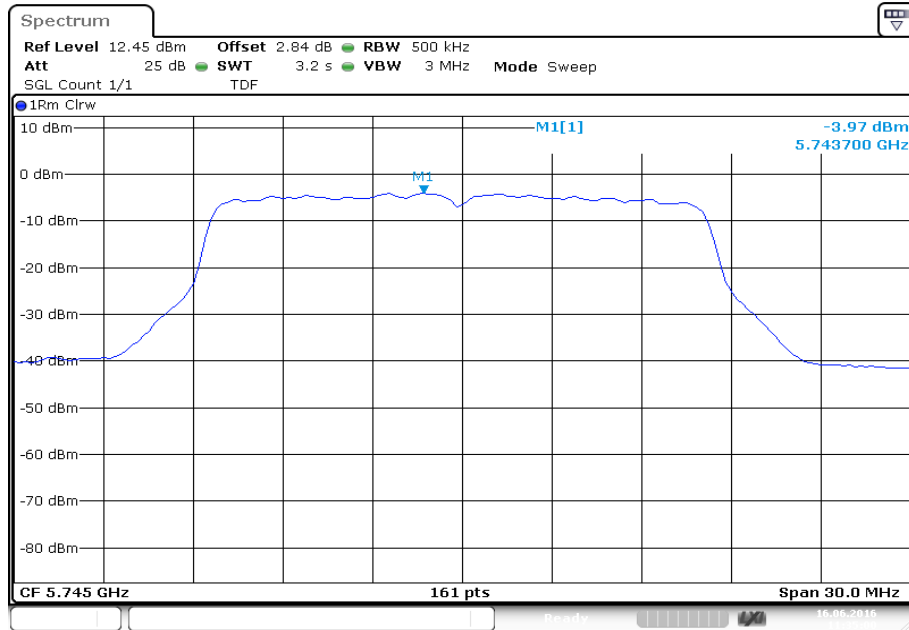


Date: 16.JUN.2016 11:35:00

**Plot 2: 5785 MHz**

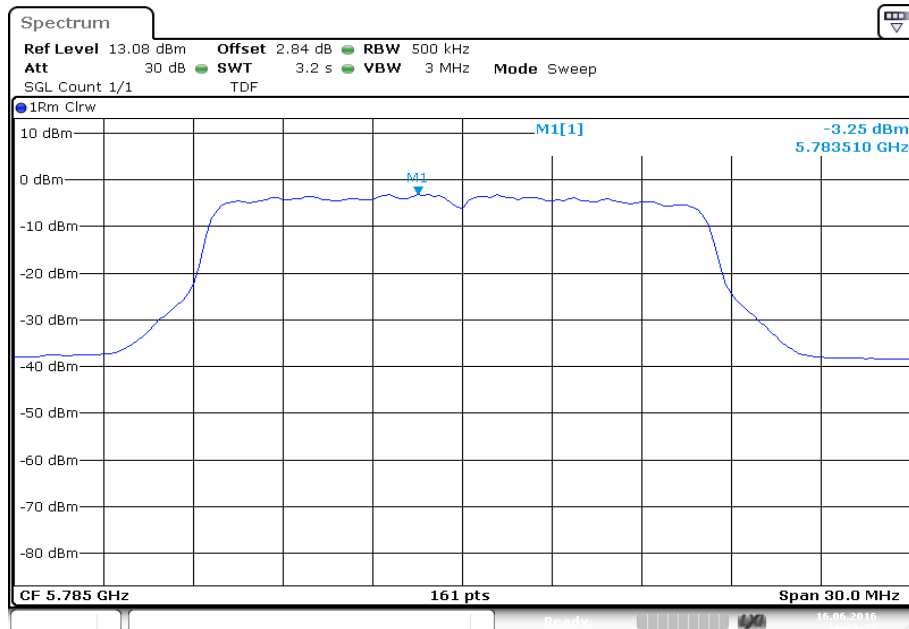

Date: 16.JUN.2016 11:38:27


Plot 3: 5825 MHz

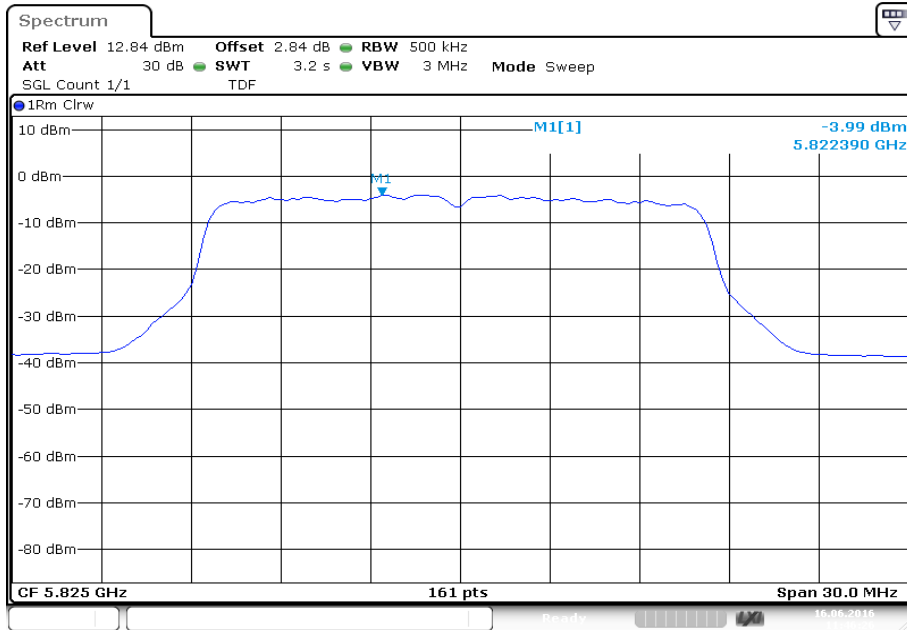

Date: 16.JUN.2016 11:46:26


**Plots: OFDM / ANT2**

**Plot 1: 5745 MHz**

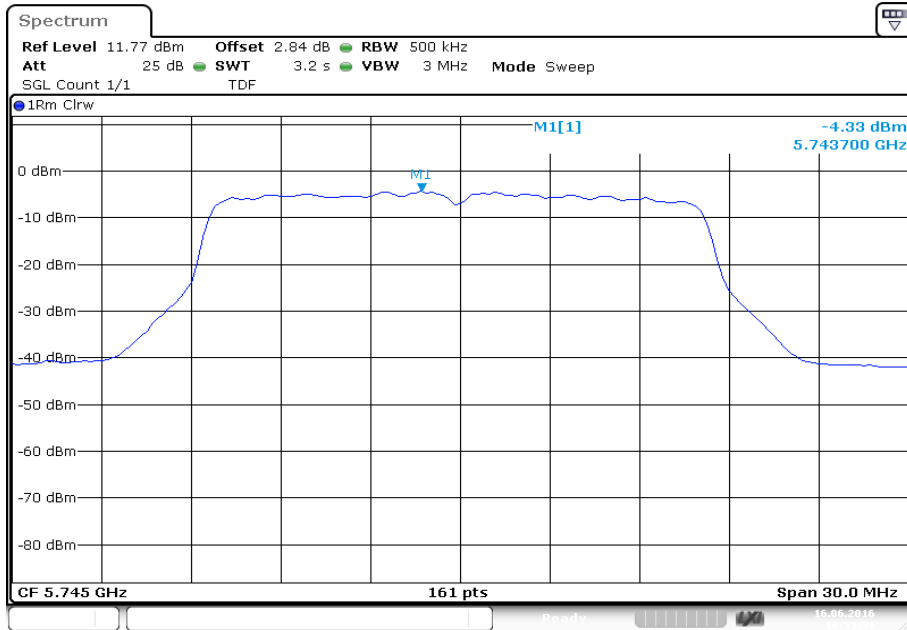


Date: 16.JUN.2016 10:53:51

**Plot 2: 5785 MHz**

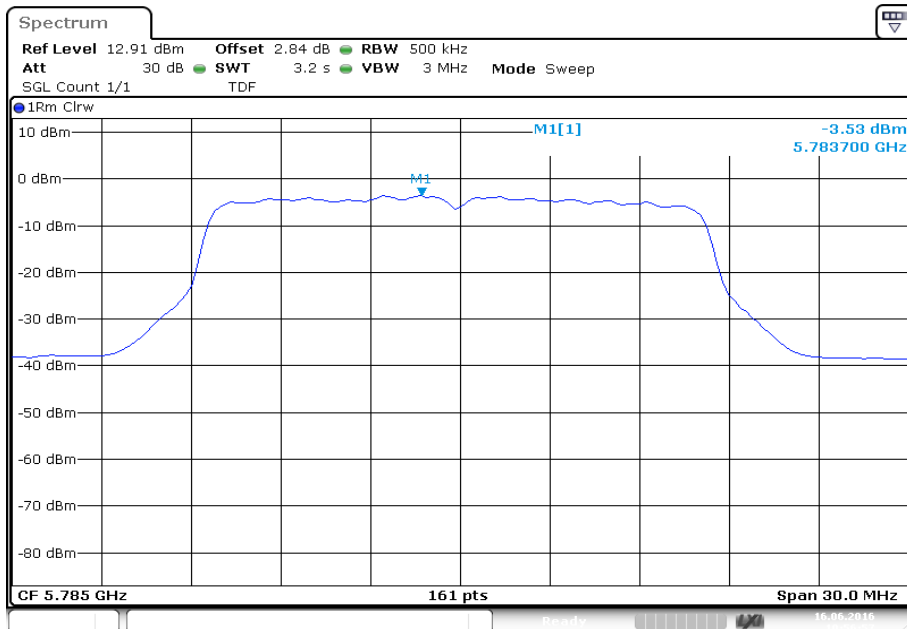

Date: 16.JUN.2016 10:56:57

Plot 3: 5825 MHz

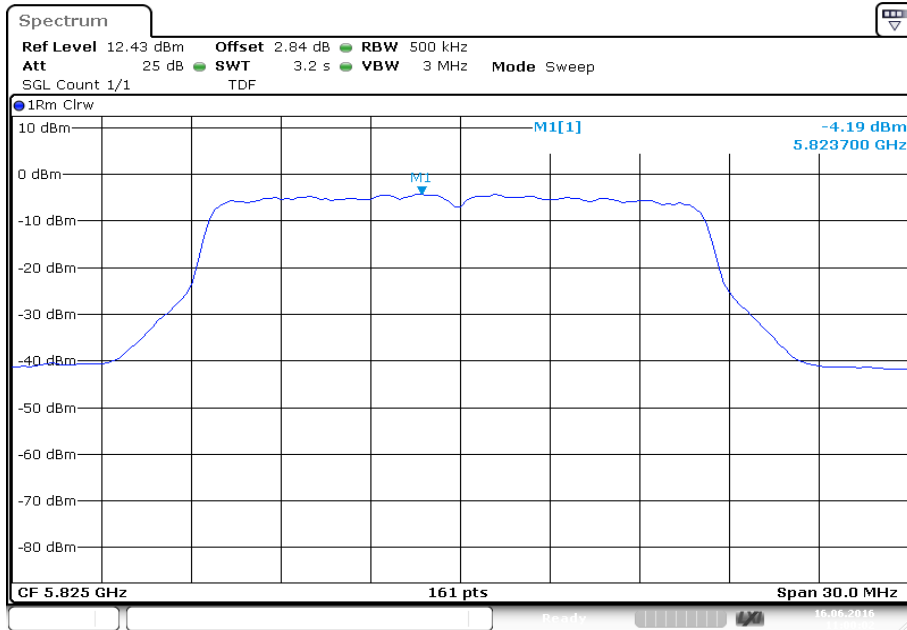

Date: 16.JUN.2016 11:00:02

## 12.4.2 Power spectral density - IC

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

### Measurement:

| Measurement parameter    |                                                                      |
|--------------------------|----------------------------------------------------------------------|
| Detector:                | RMS                                                                  |
| Sweep time:              | $\geq 10 \cdot (\text{swp points}) \cdot (\text{total on/off time})$ |
| Resolution bandwidth:    | 1 MHz (500 kHz for 5.8 GHz band)                                     |
| Video bandwidth:         | $\geq 3 \cdot \text{RBW}$                                            |
| Span:                    | $> \text{EBW}$                                                       |
| Trace-Mode:              | Max hold                                                             |
| Test setup:              | See chapter 7.5 – A                                                  |
| Measurement uncertainty: | See chapter 9                                                        |

### Limits:

| Power Spectral Density                                                                    |
|-------------------------------------------------------------------------------------------|
| power spectral density e.i.r.p. $\leq 10$ dBm in any 1 MHz band (band 5150 – 5250 MHz)    |
| power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5250 – 5350 MHz)   |
| power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5470 – 5725 MHz)   |
| power spectral density conducted $\leq 30$ dBm in any 500 kHz band (band 5725 – 5850 MHz) |

**Result: OFDM / ANT1**


| OFDM / ANT1                     | Power Spectral density [dBm/MHz] |                    |                     |
|---------------------------------|----------------------------------|--------------------|---------------------|
| Channel                         | Lowest<br>5180 MHz               | -/-                | Highest<br>5320 MHz |
| including duty cycle correction | 5.20                             | -/-                | -1.12               |
| Channel                         | Lowest<br>5500 MHz               | Middle<br>5600 MHz | Highest<br>5700 MHz |
| including duty cycle correction | -0.32                            | -0.02              | -0.60               |
| Channel                         | Lowest<br>5745 MHz               | Middle<br>5785 MHz | Highest<br>5825 MHz |
| including duty cycle correction | -4.11                            | -3.25              | -3.90               |

**Result: OFDM / ANT2**

| OFDM / ANT2                     | Power Spectral density [dBm/MHz] |                    |                     |
|---------------------------------|----------------------------------|--------------------|---------------------|
| Channel                         | Lowest<br>5180 MHz               | -/-                | Highest<br>5320 MHz |
| including duty cycle correction | 2.886                            | -/-                | -1.60               |
| Channel                         | Lowest<br>5500 MHz               | Middle<br>5600 MHz | Highest<br>5700 MHz |
| including duty cycle correction | 0.05                             | 0.27               | -0.73               |
| Channel                         | Lowest<br>5745 MHz               | Middle<br>5785 MHz | Highest<br>5825 MHz |
| including duty cycle correction | -4.41                            | -3.64              | -4.26               |


**Plots: OFDM / ANT1**

**Plot 1: 5745 MHz**

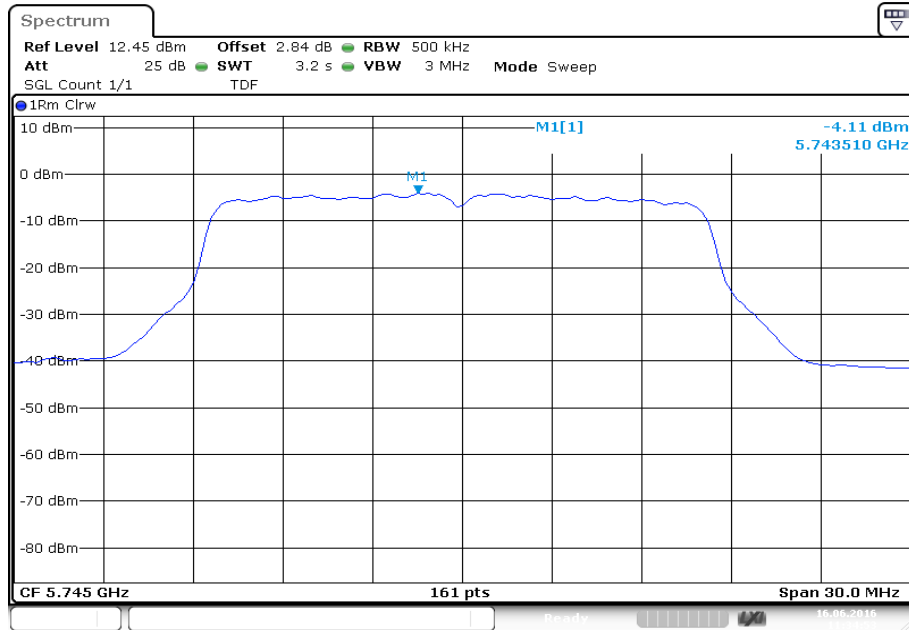


Date: 16.JUN.2016 11:34:53

**Plot 2: 5785 MHz**

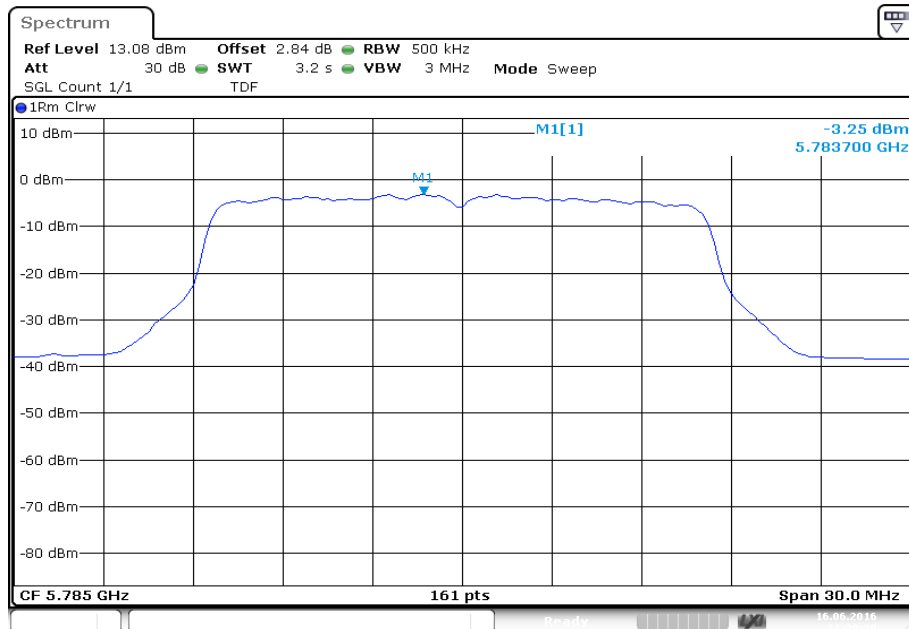

Date: 16.JUN.2016 11:38:20


Plot 3: 5825 MHz

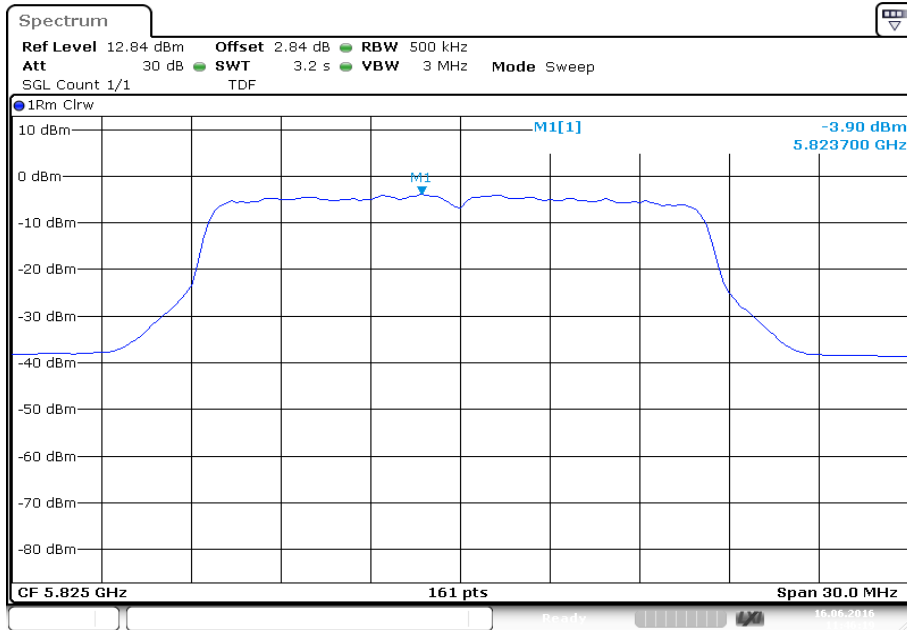




**Plots: OFDM / ANT2**

**Plot 1: 5745 MHz**

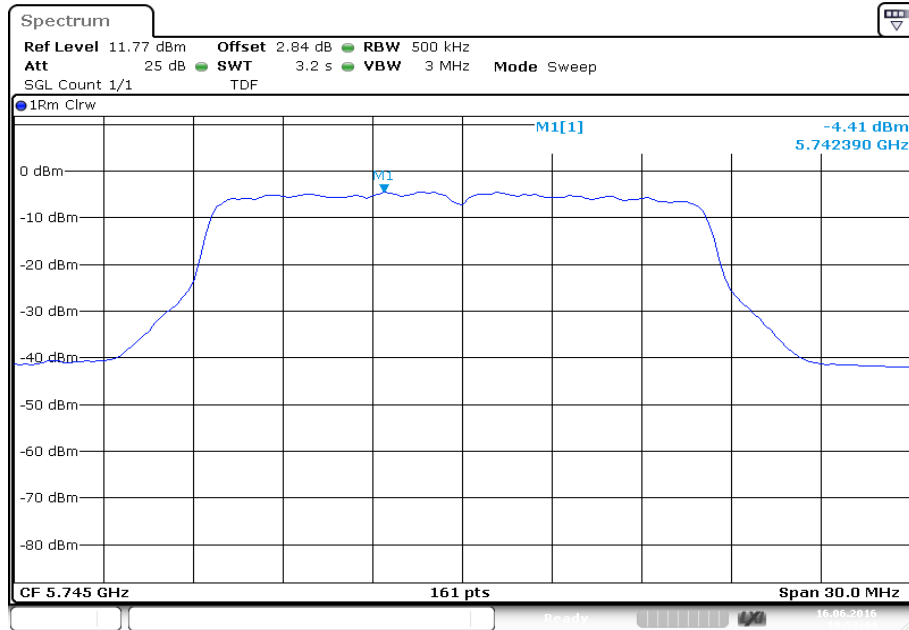


Date: 16.JUN.2016 10:53:44

**Plot 2: 5785 MHz**

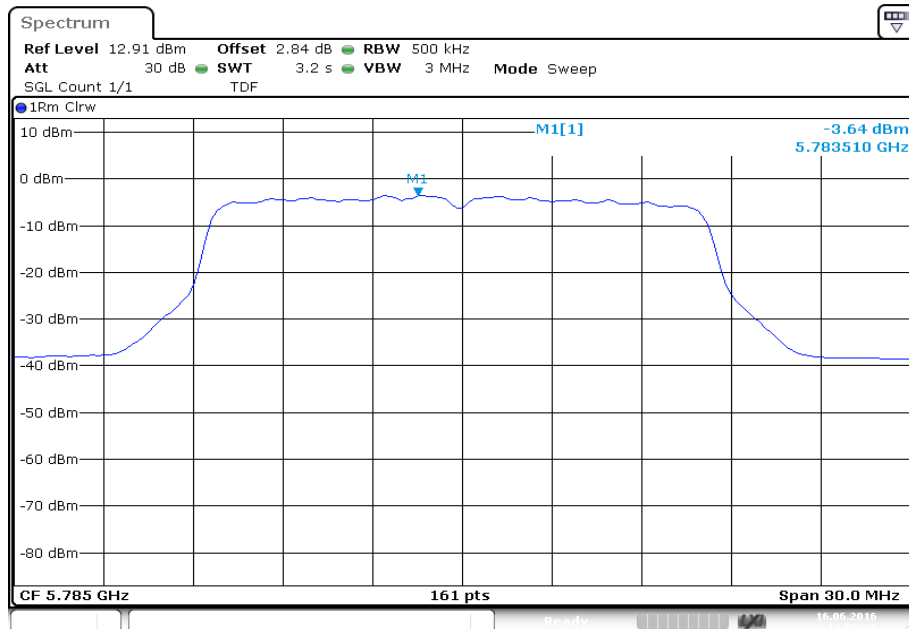

Date: 16.JUN.2016 10:56:49

Plot 3: 5825 MHz

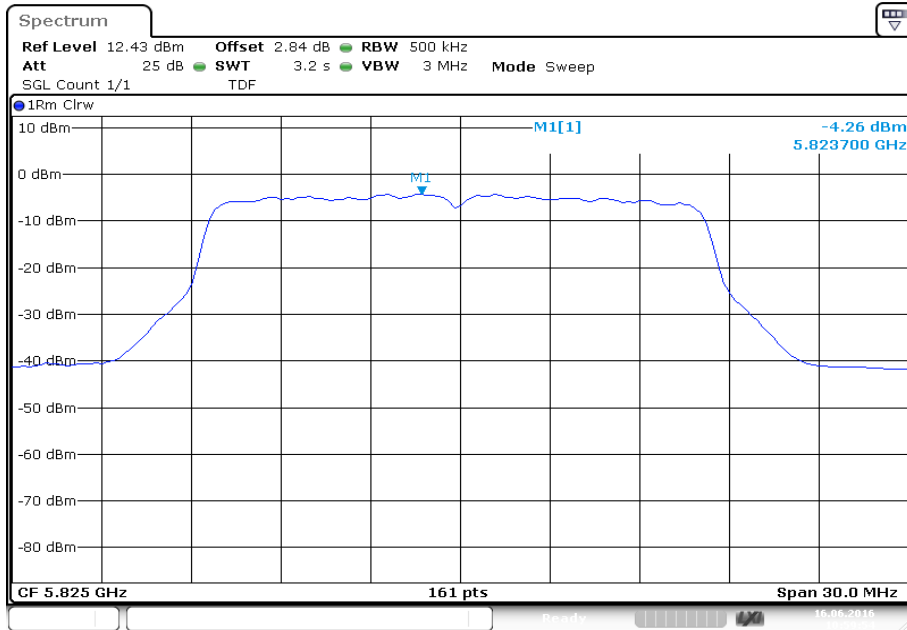

Date: 16.JUN.2016 10:59:54

**12.5 Spectrum bandwidth – 26 dB bandwidth****Description:**

Measurement of the 26 dB bandwidth of the modulated signal.

**Measurement:**

| Measurement parameter    |                     |
|--------------------------|---------------------|
| Detector:                | Peak                |
| Sweep time:              | Auto                |
| Resolution bandwidth:    | 1% EBW              |
| Video bandwidth:         | ≥ RBW               |
| Span:                    | > complete signal!  |
| Trace-Mode:              | Max hold            |
| Test setup:              | See chapter 7.5 – A |
| Measurement uncertainty: | See chapter 9       |

**Limits:**

| Spectrum Bandwidth – 26 dB Bandwidth |
|--------------------------------------|
| -/-                                  |

**Result:** OFDM / ANT 1


| OFDM / ANT1 | 26 dB BANDWIDTH [MHz] |                    |                     |
|-------------|-----------------------|--------------------|---------------------|
| Channel     | Lowest<br>5180 MHz    | -/-                | Highest<br>5320 MHz |
|             | 21.23                 | -/-                | 21.13               |
| Channel     | Lowest<br>5500 MHz    | Middle<br>5600 MHz | Highest<br>5700 MHz |
|             | 21.18                 | 21.08              | 21.13               |
| Channel     | Lowest<br>5745 MHz    | Middle<br>5785 MHz | Highest<br>5825 MHz |
|             | 21.18                 | 20.78              | 21.58               |

**Result:** OFDM / ANT 2


| OFDM / ANT2 | 26 dB BANDWIDTH [MHz] |                    |                     |
|-------------|-----------------------|--------------------|---------------------|
| Channel     | Lowest<br>5180 MHz    | -/-                | Highest<br>5320 MHz |
|             | 21.58                 | -/-                | 21.38               |
| Channel     | Lowest<br>5500 MHz    | Middle<br>5600 MHz | Highest<br>5700 MHz |
|             | 20.93                 | 20.98              | 21.33               |
| Channel     | Lowest<br>5745 MHz    | Middle<br>5785 MHz | Highest<br>5825 MHz |
|             | 21.68                 | 21.28              | 21.43               |

**Plots:** OFDM / ANT 1


**Plot 1:** 5180 MHz

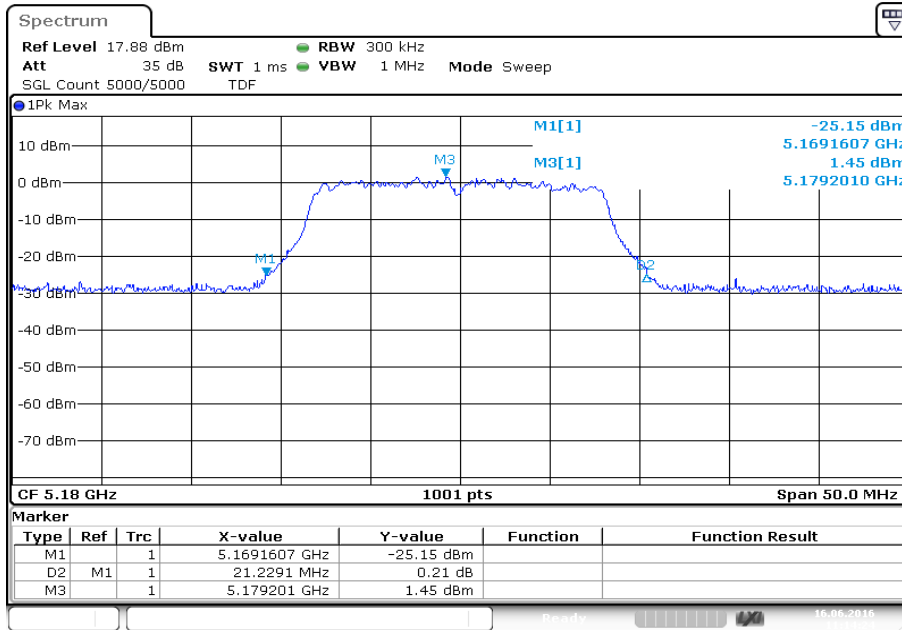

**Plot 2:** 5320 MHz

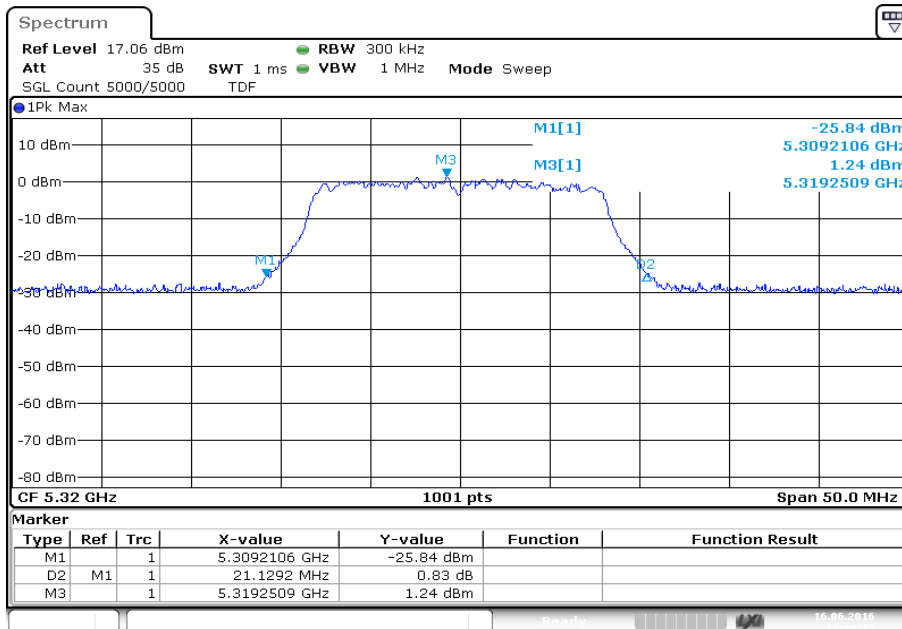


Plot 3: 5500 MHz

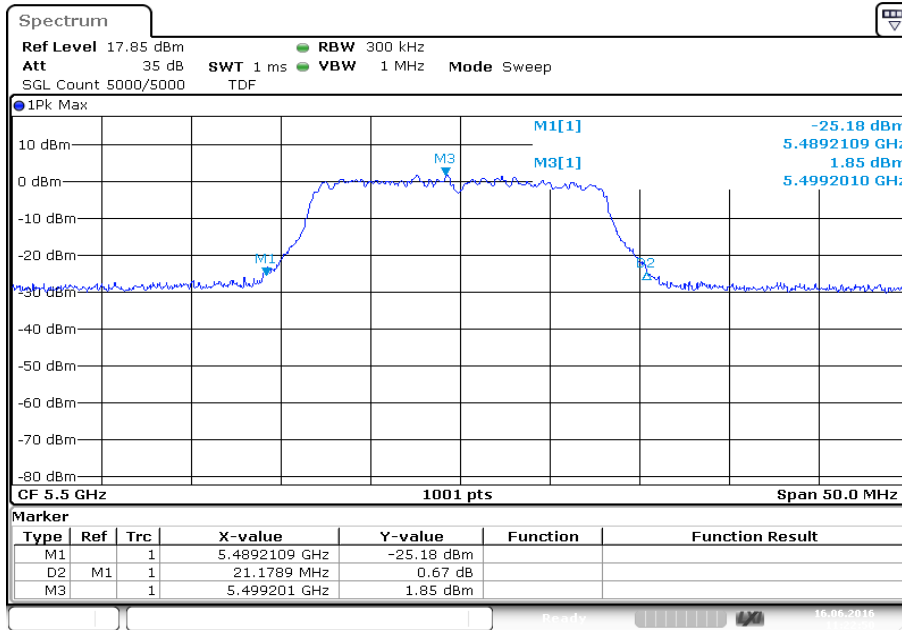


Date: 16.JUN.2016 11:22:50

Plot 4: 5600 MHz

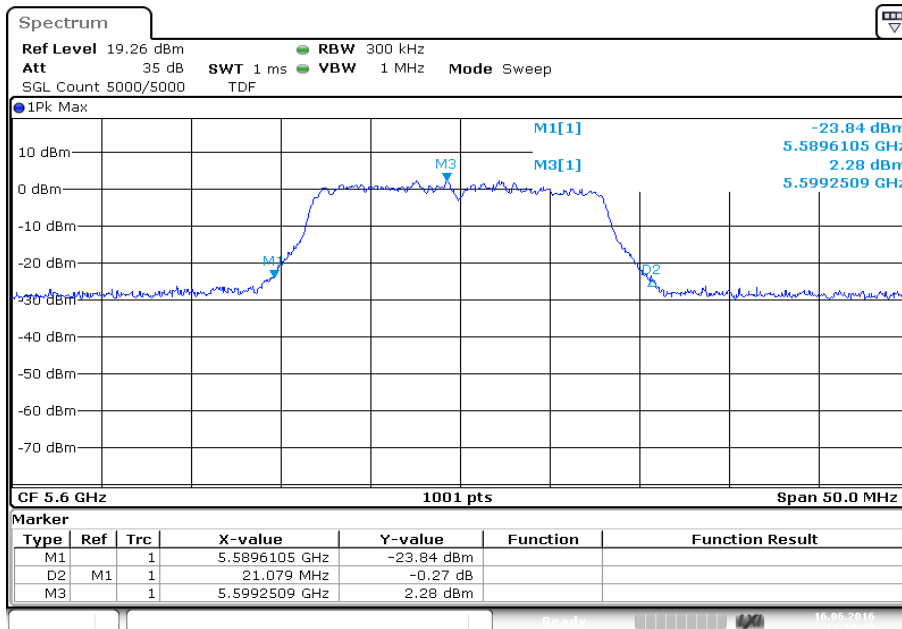


Date: 16.JUN.2016 11:26:39

Plot 5: 5700 MHz

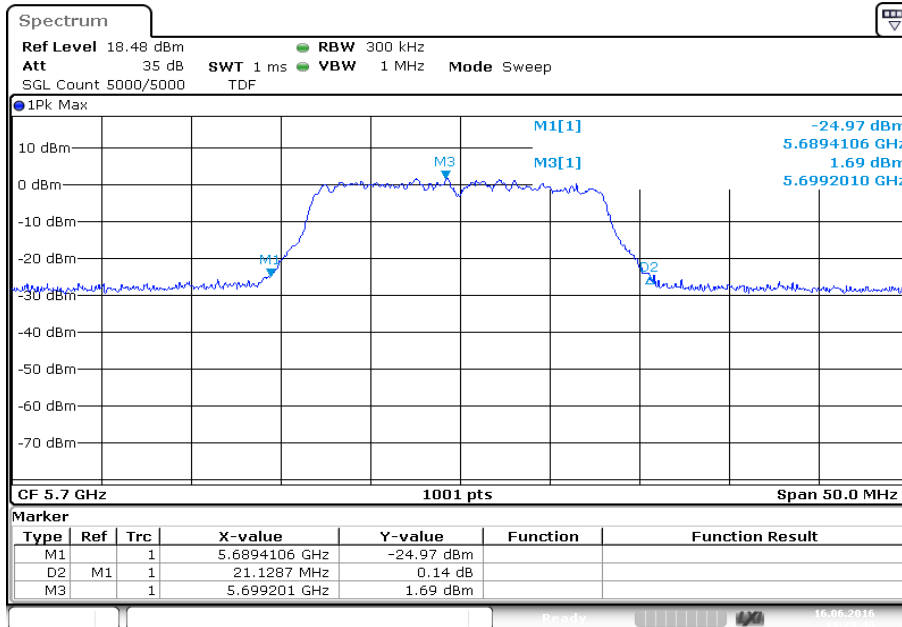


Date: 16.JUN.2016 11:29:40

Plot 6: 5745 MHz

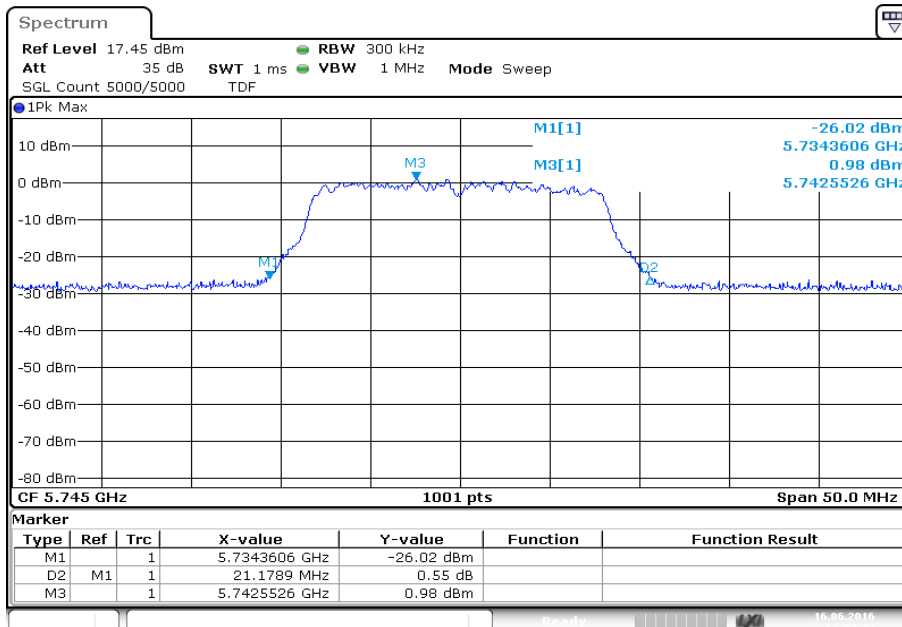


Date: 16.JUN.2016 11:32:43

Plot 7: 5785 MHz

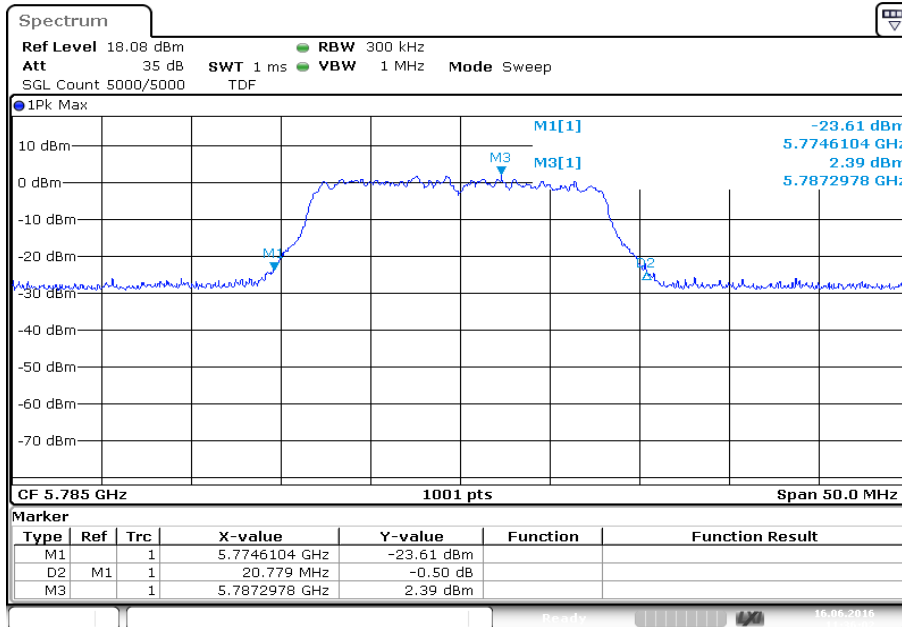

Date: 16.JUN.2016 11:36:02

Plot 8: 5825 MHz

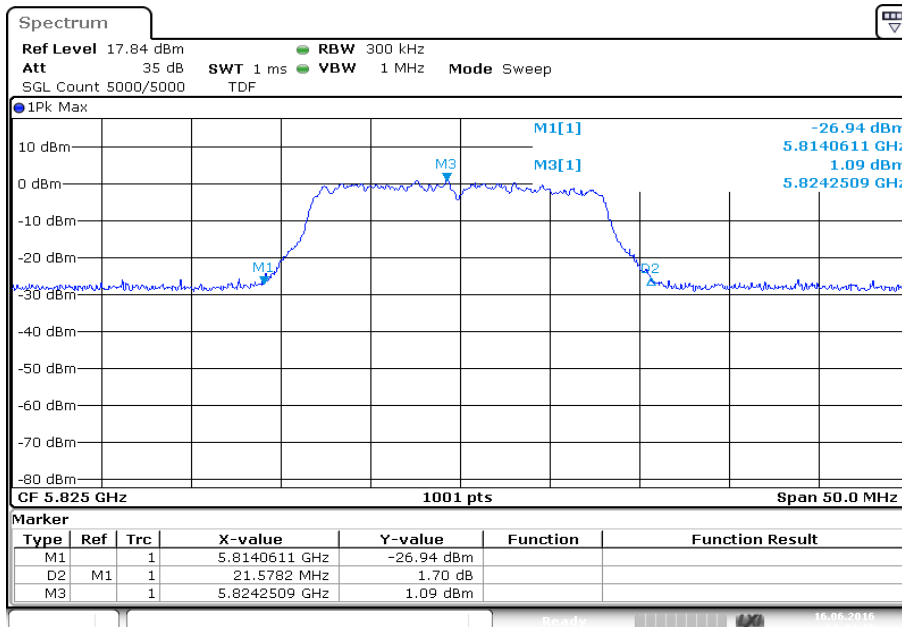


Date: 16.JUN.2016 11:44:16




**Plots:** OFDM / ANT 2

**Plot 1:** 5180 MHz

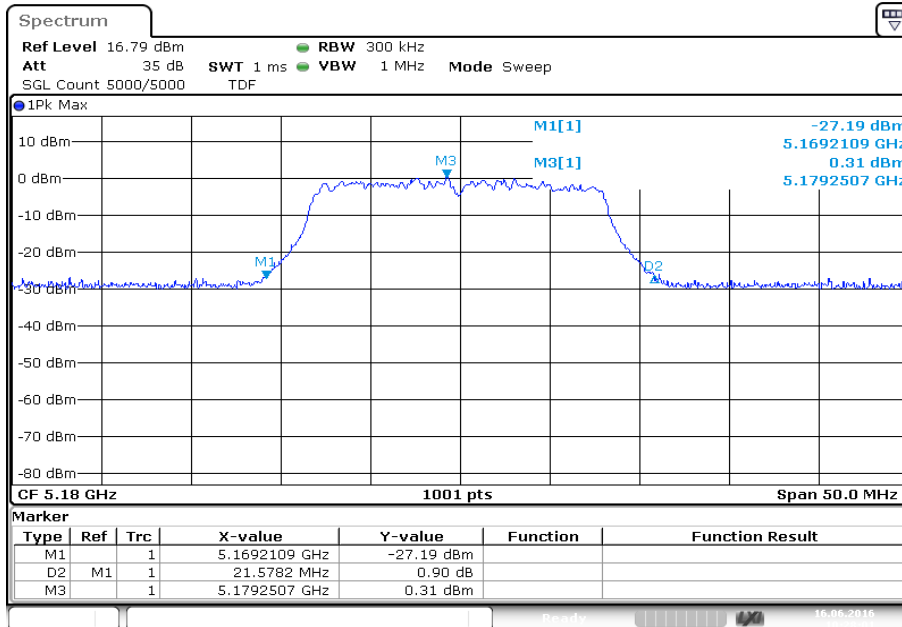


Date: 16.JUN.2016 10:28:02

**Plot 2:** 5320 MHz

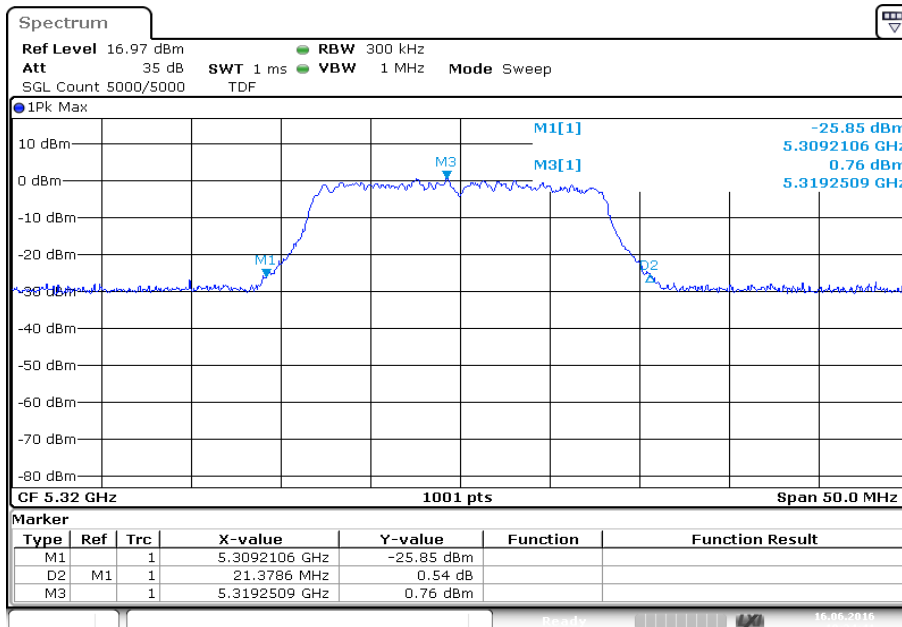


Date: 16.JUN.2016 10:34:41

Plot 3: 5500 MHz

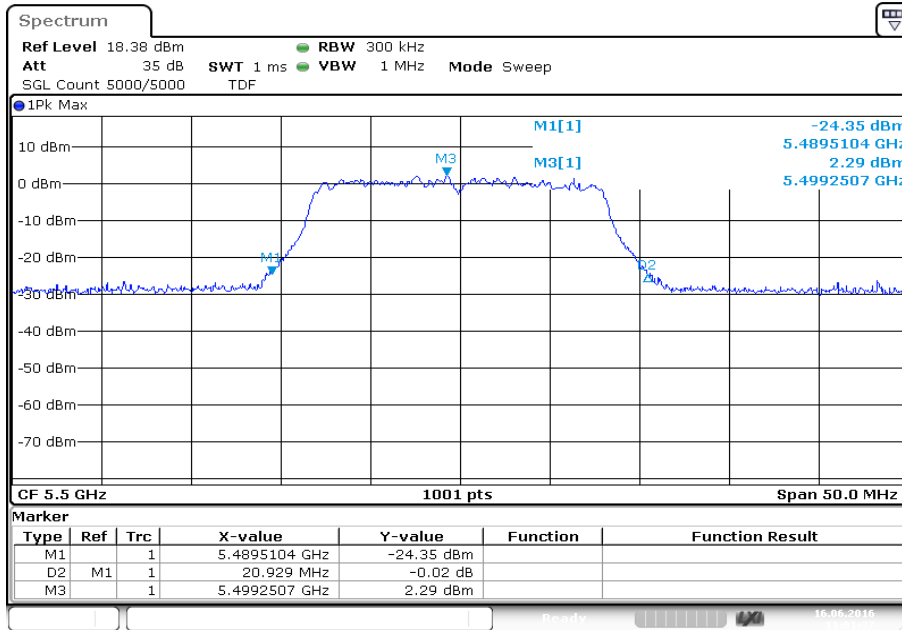


Date: 16.JUN.2016 11:01:37

Plot 4: 5600 MHz

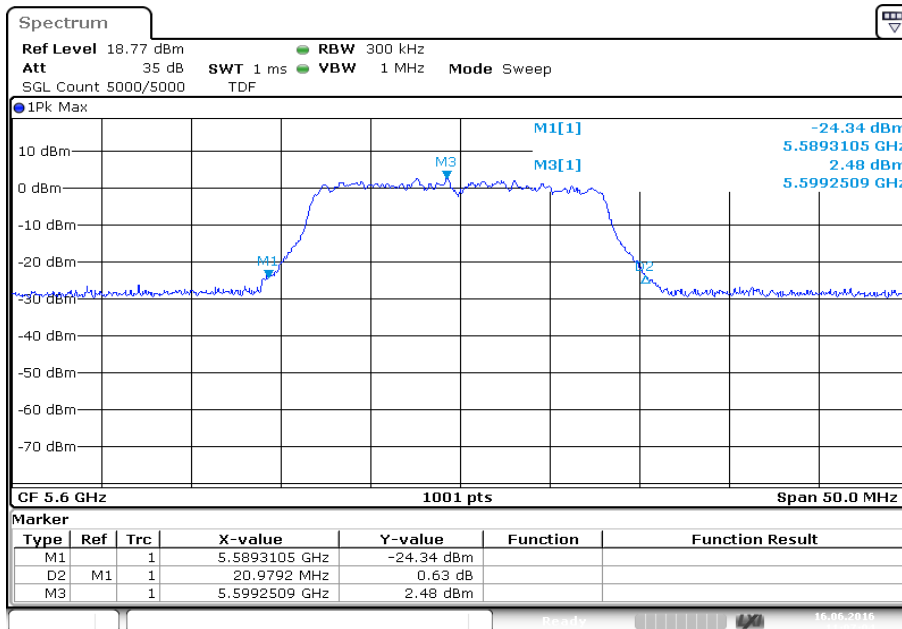


Date: 16.JUN.2016 11:07:04

Plot 5: 5700 MHz

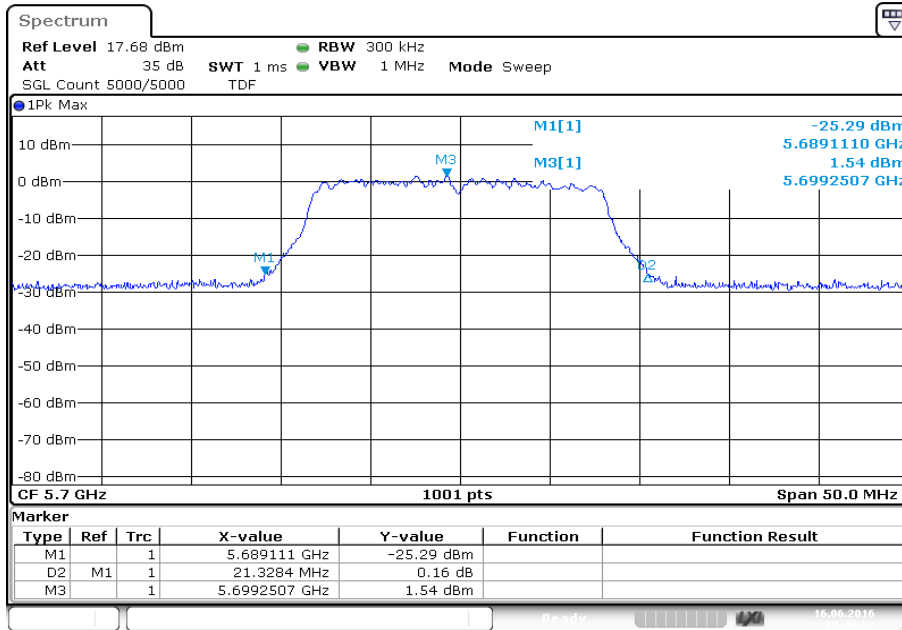


Date: 16.JUN.2016 10:48:27

Plot 6: 5745 MHz

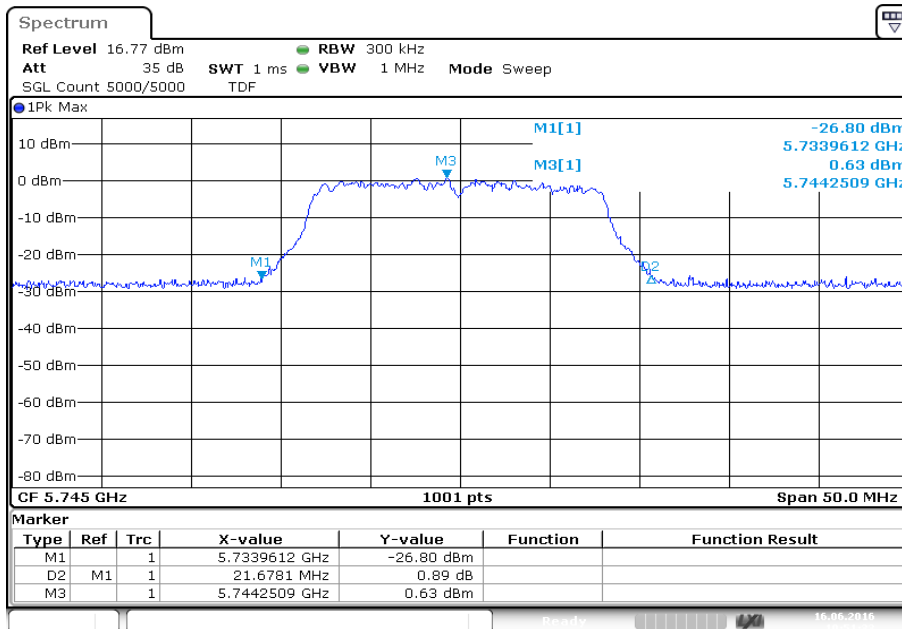


Date: 16.JUN.2016 10:51:33

Plot 7: 5785 MHz

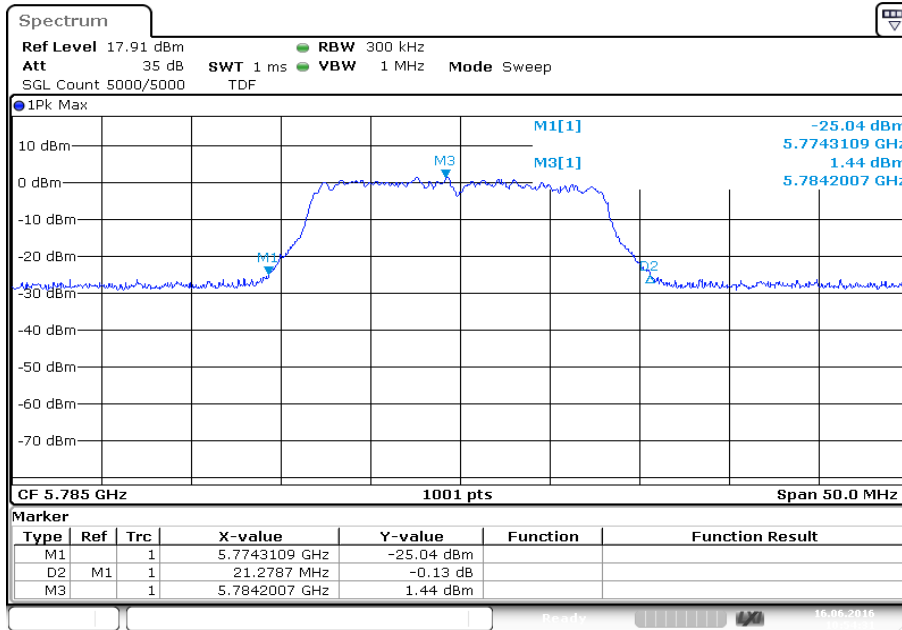

Plot 8: 5825 MHz

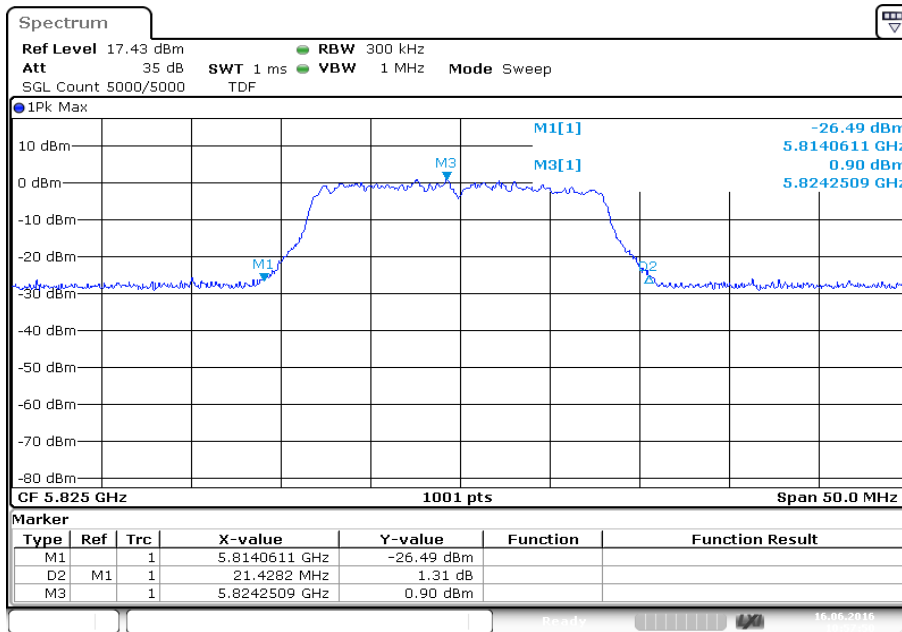

## 12.6 Occupied bandwidth – 99% emission bandwidth

**Description:**

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

**Measurement:**

| Measurement parameter    |                                                                                 |
|--------------------------|---------------------------------------------------------------------------------|
| Detector:                | Peak                                                                            |
| Sweep time:              | Auto                                                                            |
| Resolution bandwidth:    | 300 kHz                                                                         |
| Video bandwidth:         | 1 MHz                                                                           |
| Span:                    | 50 MHz                                                                          |
| Measurement procedure:   | Measurement of the 99% bandwidth using the integration function of the analyzer |
| Trace-Mode:              | Max hold (allow trace to stabilize)                                             |
| Test setup:              | See chapter 7.5 – A                                                             |
| Measurement uncertainty: | See chapter 9                                                                   |

**Usage:**

| -/-                                         | IC |
|---------------------------------------------|----|
| Occupied Bandwidth – 99% emission bandwidth |    |
| OBW is necessary for Emission Designator    |    |

**Result:** OFDM / ANT 1


| OFDM / ANT1 | 99% BANDWIDTH [kHz] |                    |                     |
|-------------|---------------------|--------------------|---------------------|
| Channel     | Lowest<br>5180 MHz  | -/-                | Highest<br>5320 MHz |
|             | 16833               | -/-                | 16833               |
| Channel     | Lowest<br>5500 MHz  | Middle<br>5600 MHz | Highest<br>5700 MHz |
|             | 16833               | 16833              | 16933               |
| Channel     | Lowest<br>5745 MHz  | Middle<br>5785 MHz | Highest<br>5825 MHz |
|             | 16983               | 16883              | 16983               |

**Result:** OFDM / ANT 2


| OFDM / ANT2 | 99% BANDWIDTH [kHz] |                    |                     |
|-------------|---------------------|--------------------|---------------------|
| Channel     | Lowest<br>5180 MHz  | -/-                | Highest<br>5320 MHz |
|             | 16933               | -/-                | 16833               |
| Channel     | Lowest<br>5500 MHz  | Middle<br>5600 MHz | Highest<br>5700 MHz |
|             | 16783               | 16783              | 16883               |
| Channel     | Lowest<br>5745 MHz  | Middle<br>5785 MHz | Highest<br>5825 MHz |
|             | 17033               | 16933              | 17033               |

**Plots:** OFDM / ANT 1


**Plot 1:** 5180 MHz

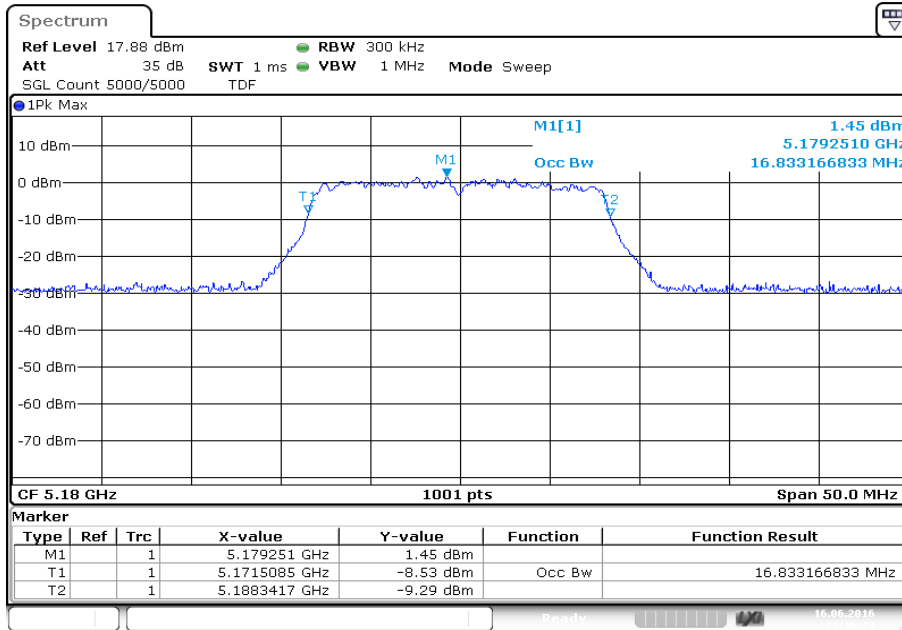

**Plot 2:** 5320 MHz

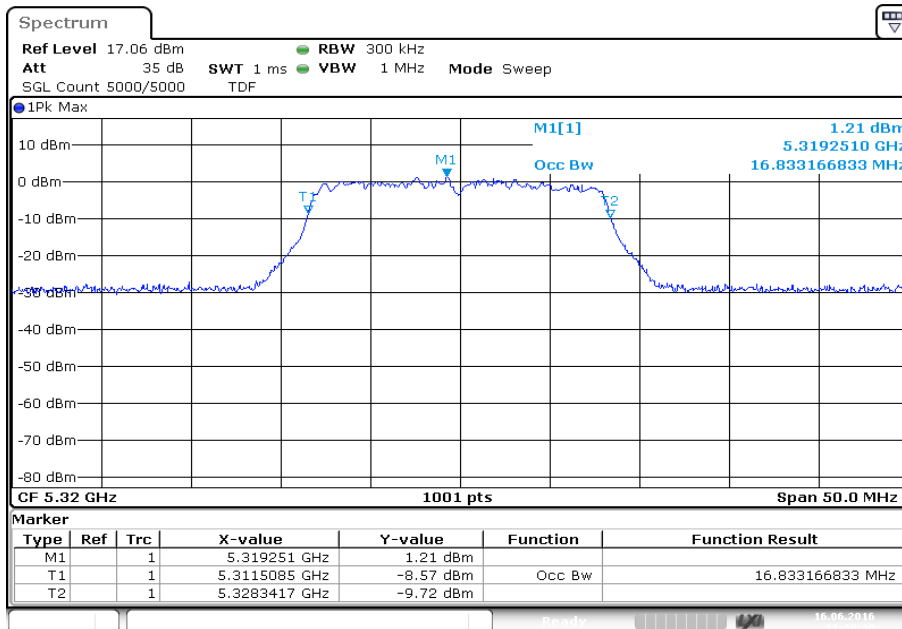


Plot 3: 5500 MHz

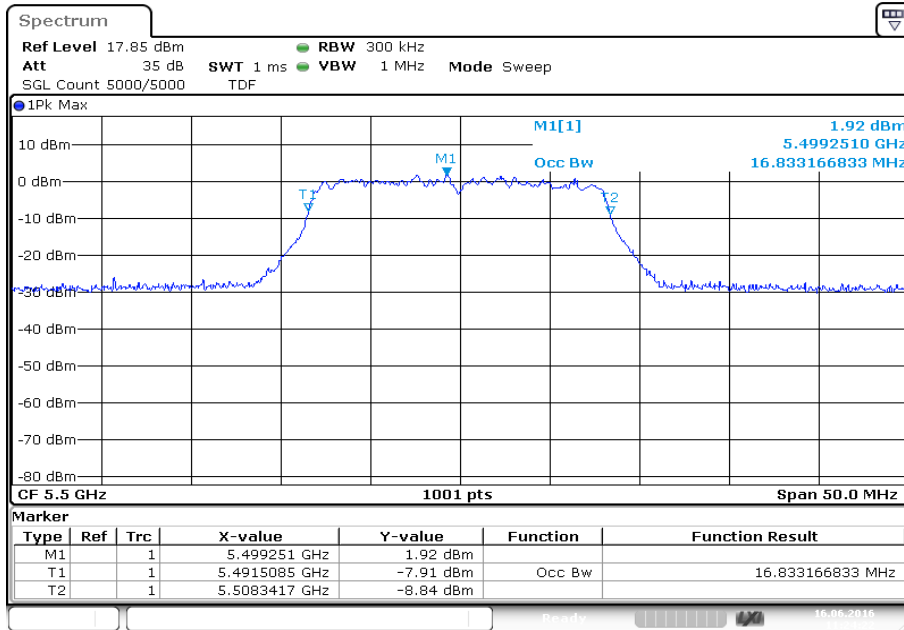

Date: 16.JUN.2016 11:24:22


Plot 4: 5600 MHz

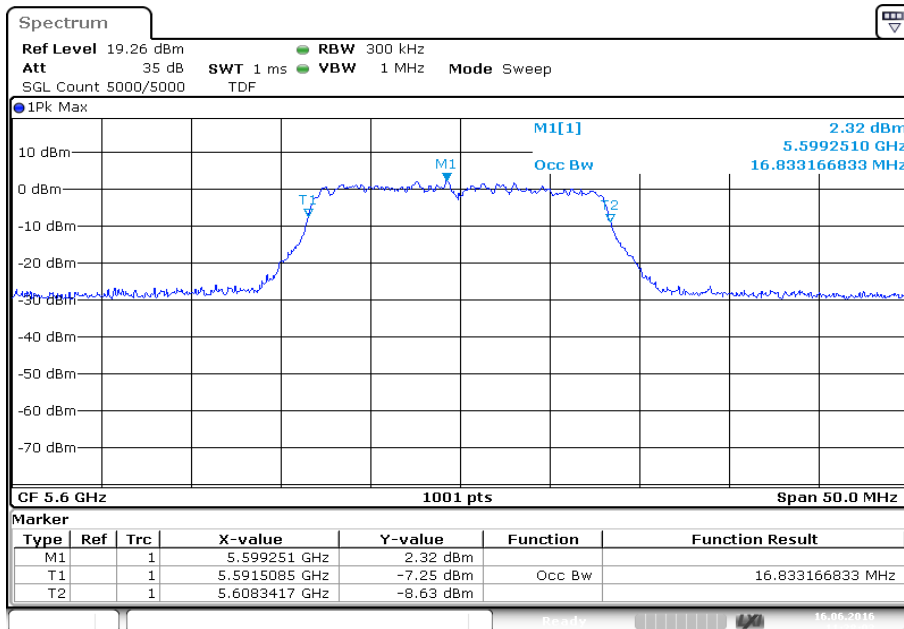


Date: 16.JUN.2016 11:28:03




Plot 5: 5700 MHz

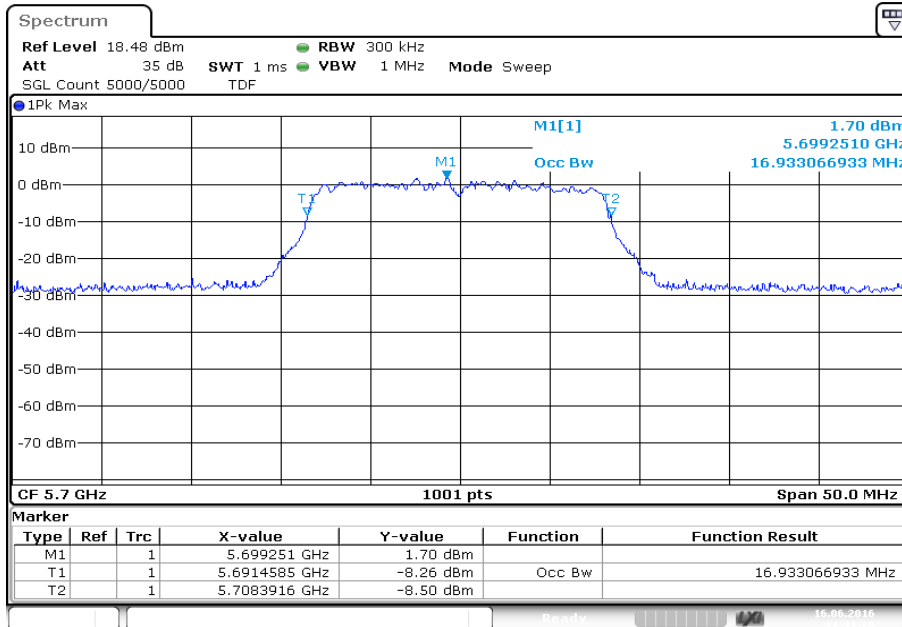

Plot 6: 5745 MHz

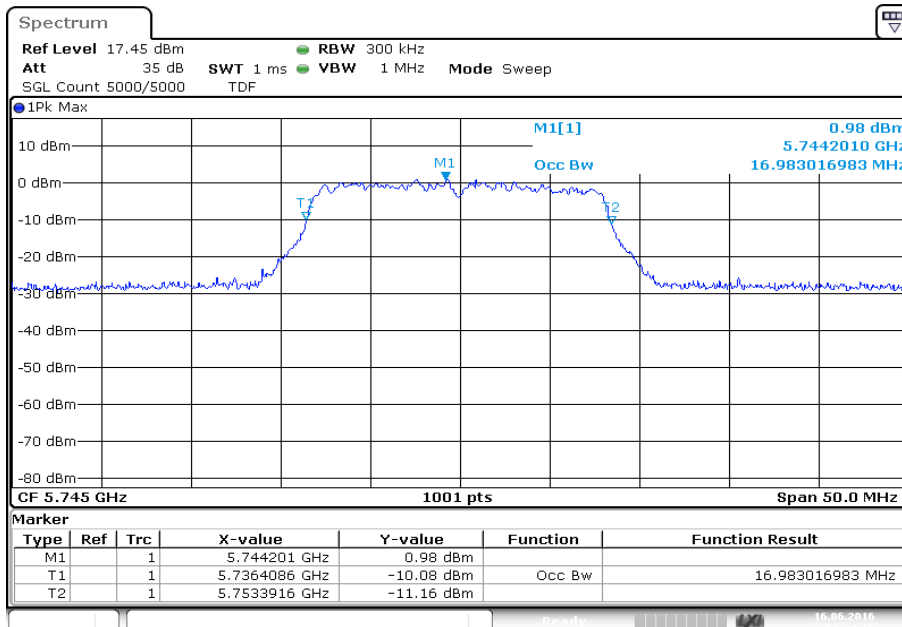


Plot 7: 5785 MHz

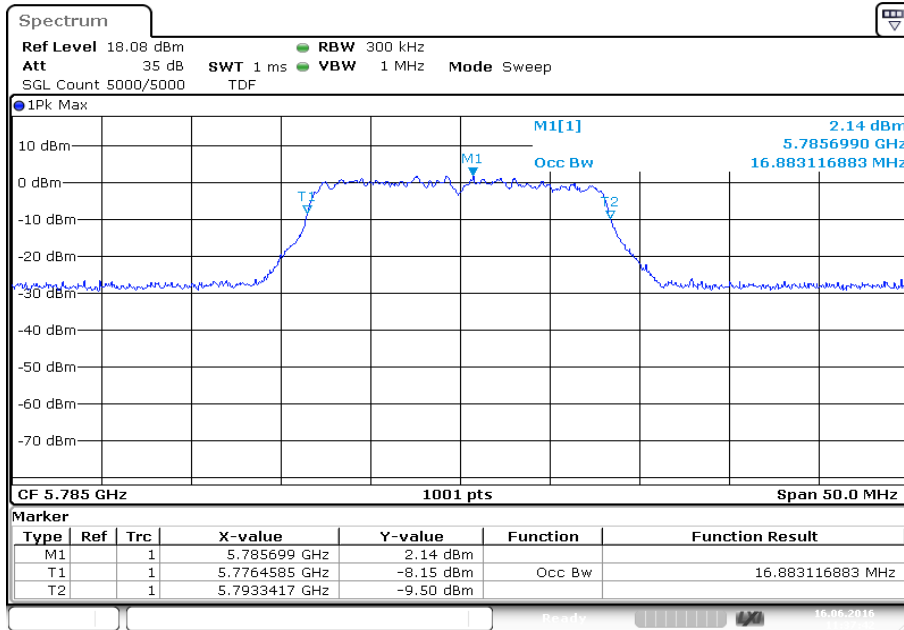

Date: 16.JUN.2016 11:37:42


Plot 8: 5825 MHz

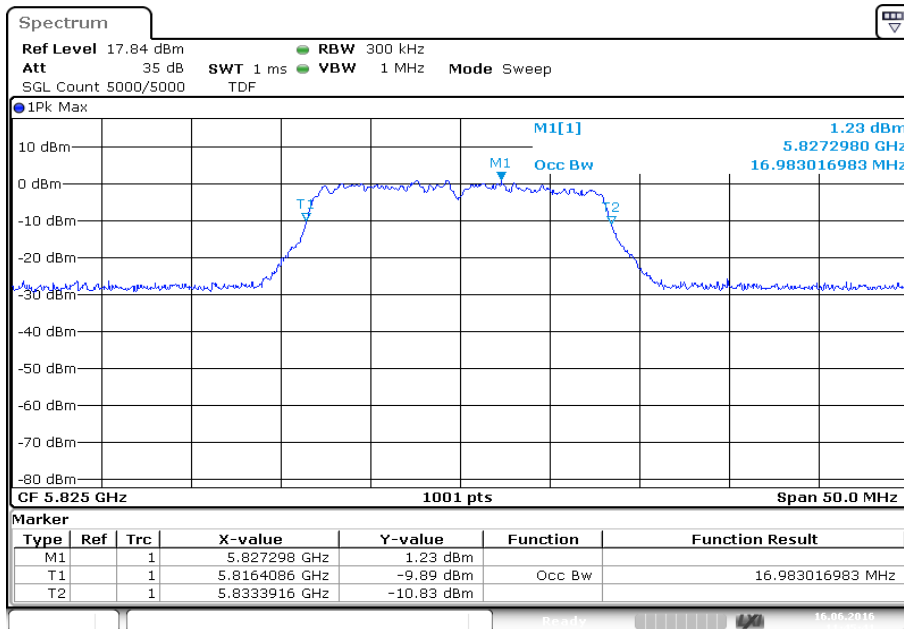


Date: 16.JUN.2016 11:45:41

**Plots:** OFDM / ANT 2


**Plot 1:** 5180 MHz

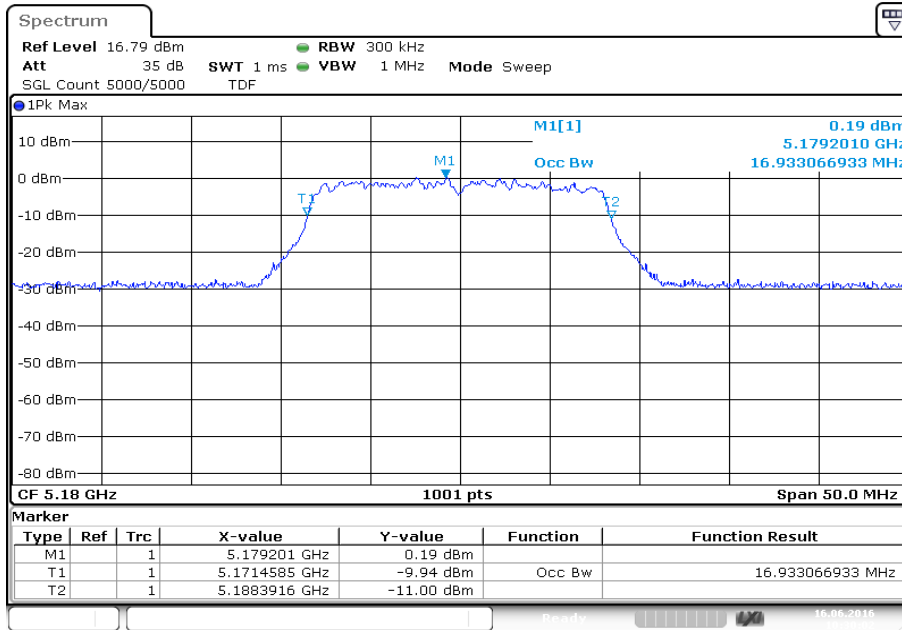

**Plot 2:** 5320 MHz

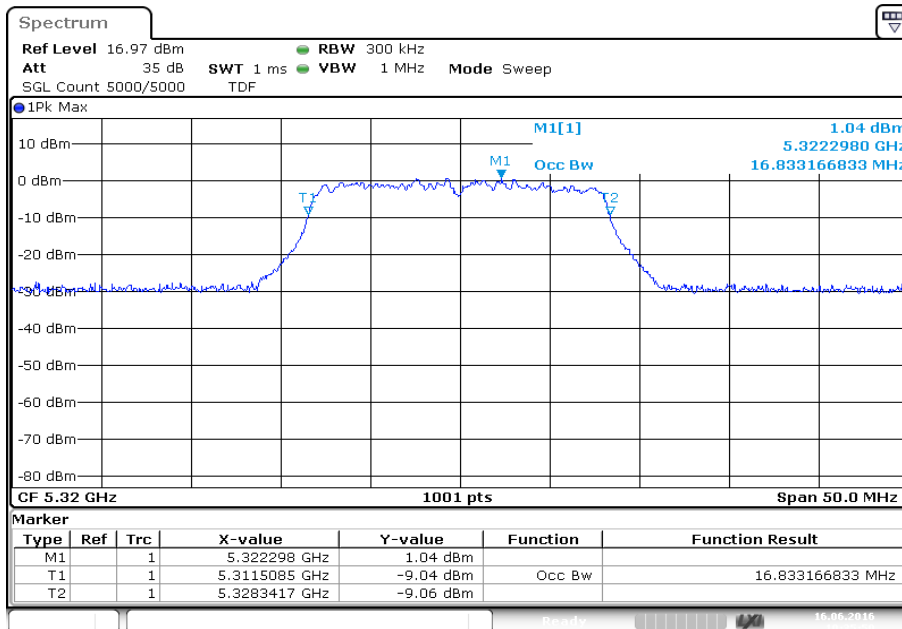


Plot 3: 5500 MHz

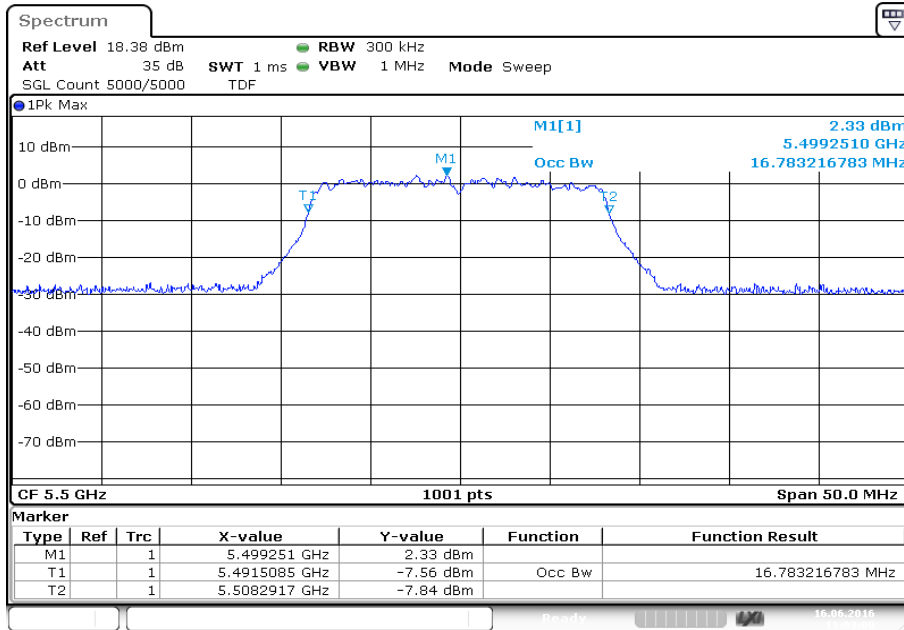


Date: 16.JUN.2016 11:03:09

Plot 4: 5600 MHz

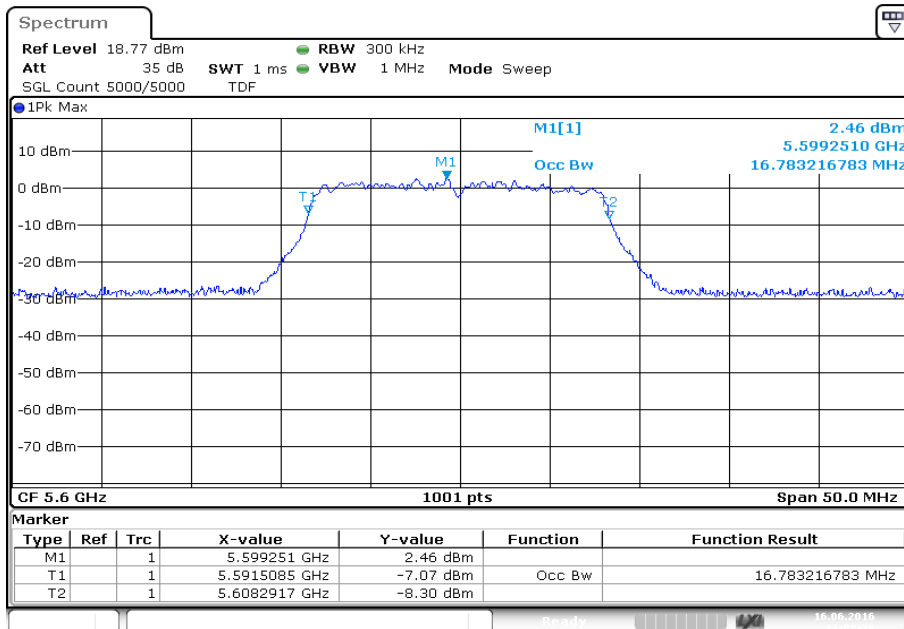


Date: 16.JUN.2016 11:08:28


Plot 5: 5700 MHz

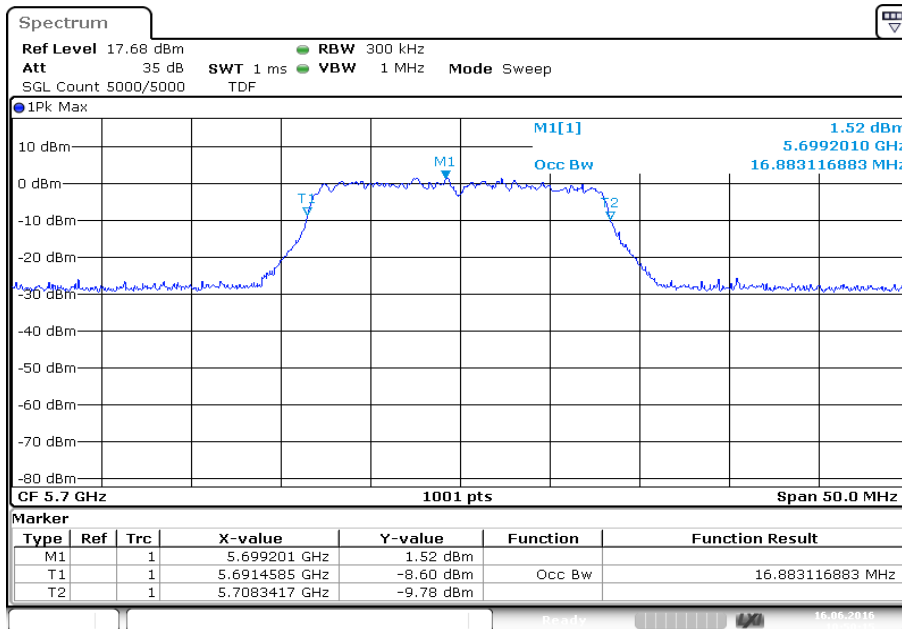

Plot 6: 5745 MHz

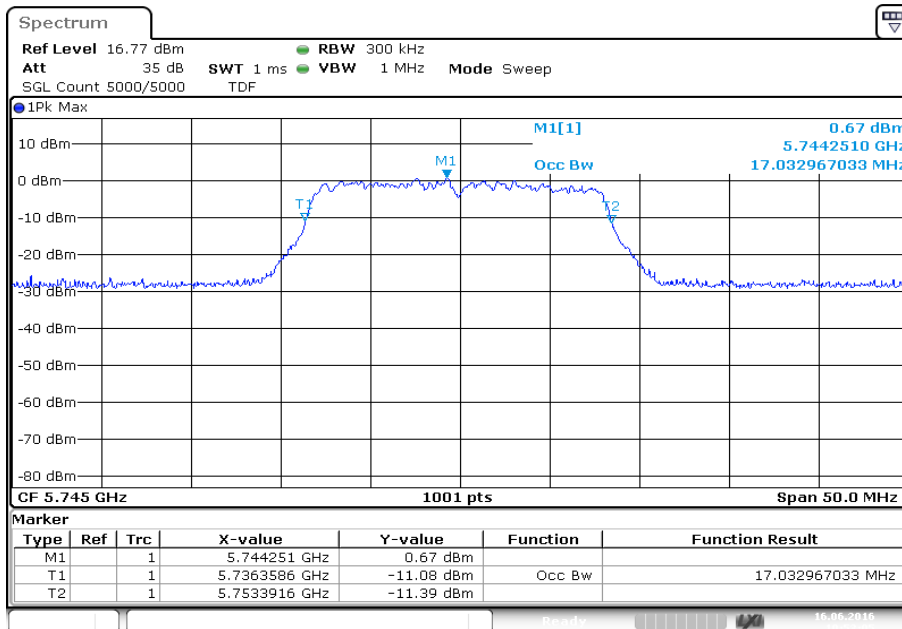


Plot 7: 5785 MHz

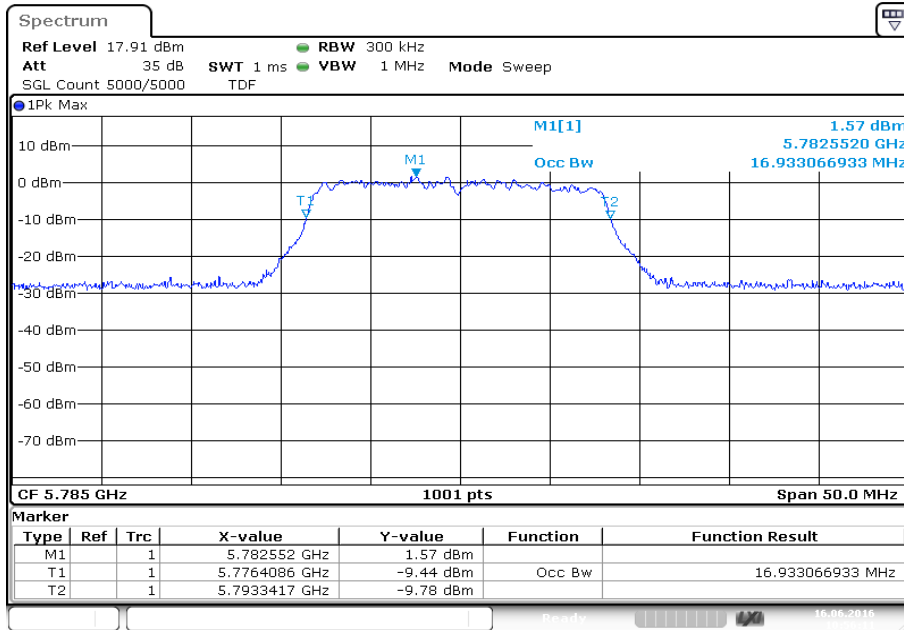

Date: 16.JUN.2016 10:56:11

Plot 8: 5825 MHz

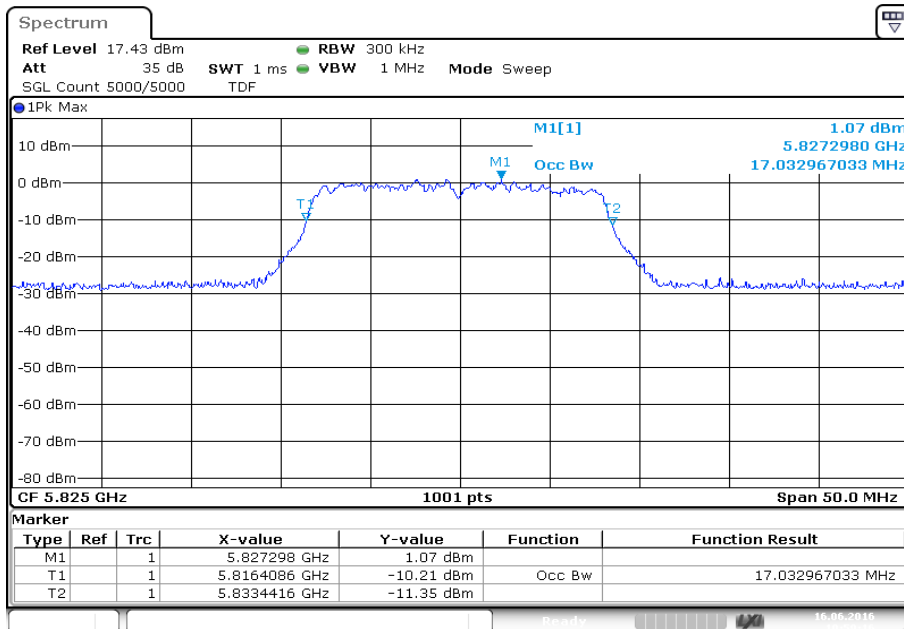

Date: 16.JUN.2016 10:59:16

## 12.7 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3m.

### Measurement:

| Measurement parameter    |                     |
|--------------------------|---------------------|
| Detector:                | Peak / RMS          |
| Sweep time:              | Auto                |
| Resolution bandwidth:    | 1 MHz               |
| Video bandwidth:         | 10 Hz / 1 MHz       |
| Span:                    | See plots!          |
| Trace-Mode:              | Max Hold            |
| Test setup:              | See chapter 7.2 – A |
| Measurement uncertainty: | See chapter 9       |

### Limits:


| Band Edge Compliance Radiated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).</p> |
| <p>74 dB<math>\mu</math>V/m PEAK<br/>54 dB<math>\mu</math>V/m AVG</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

### Result:


| Scenario  | Band Edge Compliance Radiated [dB $\mu$ V/m]                                        |
|-----------|-------------------------------------------------------------------------------------|
| band edge | <p>&lt; 74 dB<math>\mu</math>V/m (Peak)<br/>&lt; 54 dB<math>\mu</math>V/m (AVG)</p> |

**Plots:**

**Plot 1:** lower band edge, vertical & horizontal polarization (ANT1), channel 36

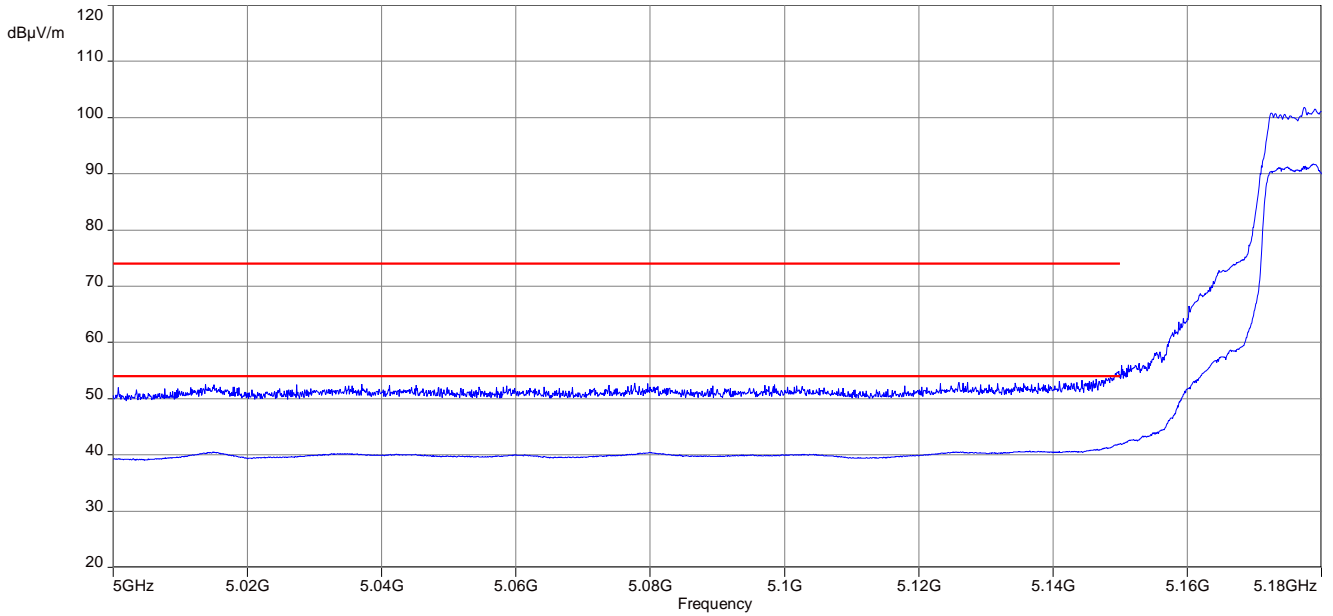


**Plot 2:** upper band edge, vertical & horizontal polarization (ANT1), channel 64

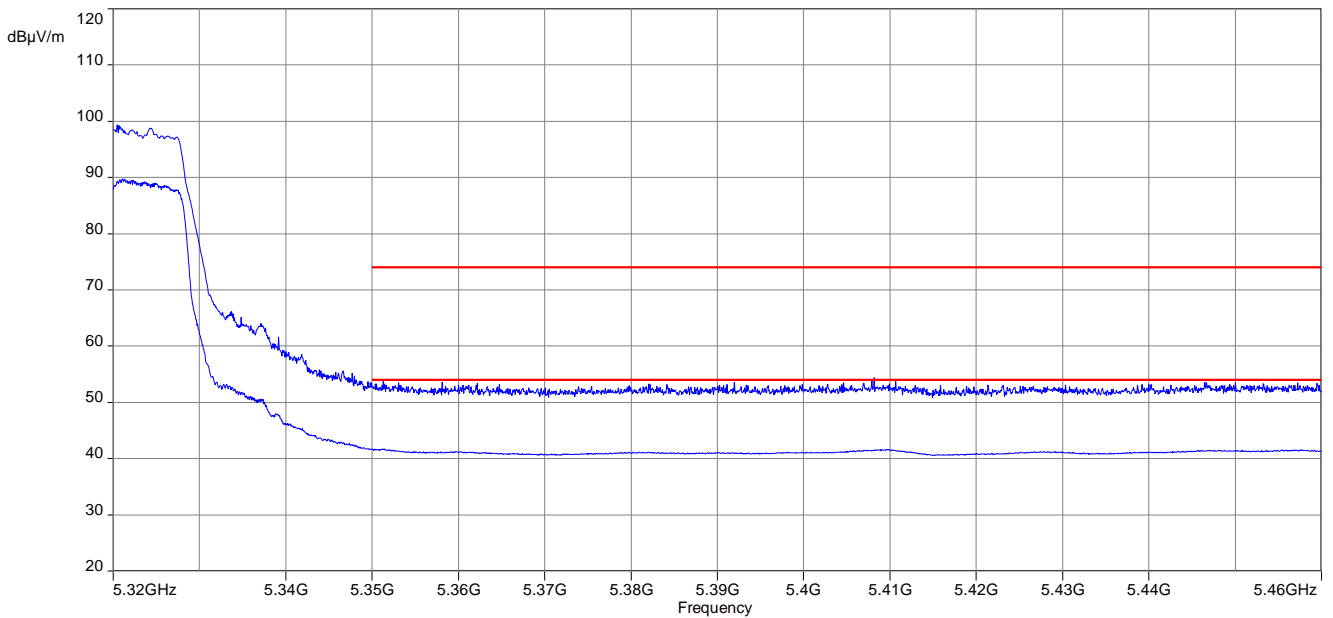





**Plot 3:** lower band edge, vertical & horizontal polarization (ANT1), channel 100

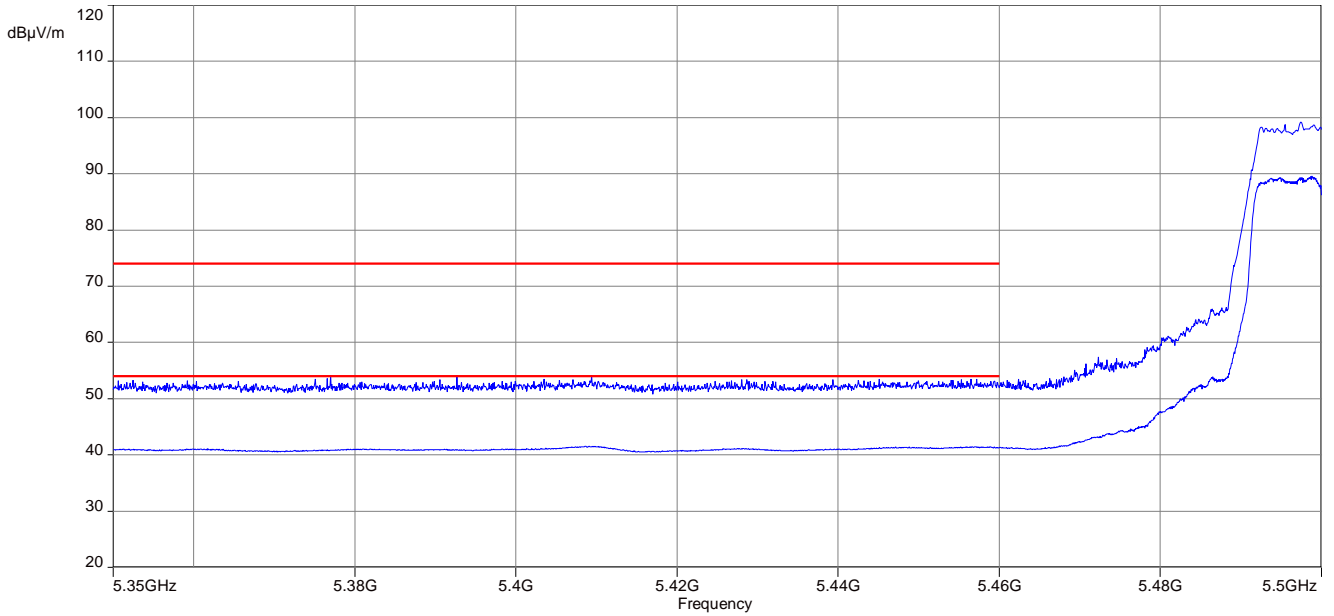


**Plot 4:** lower band edge, vertical & horizontal polarization (ANT2), channel 36

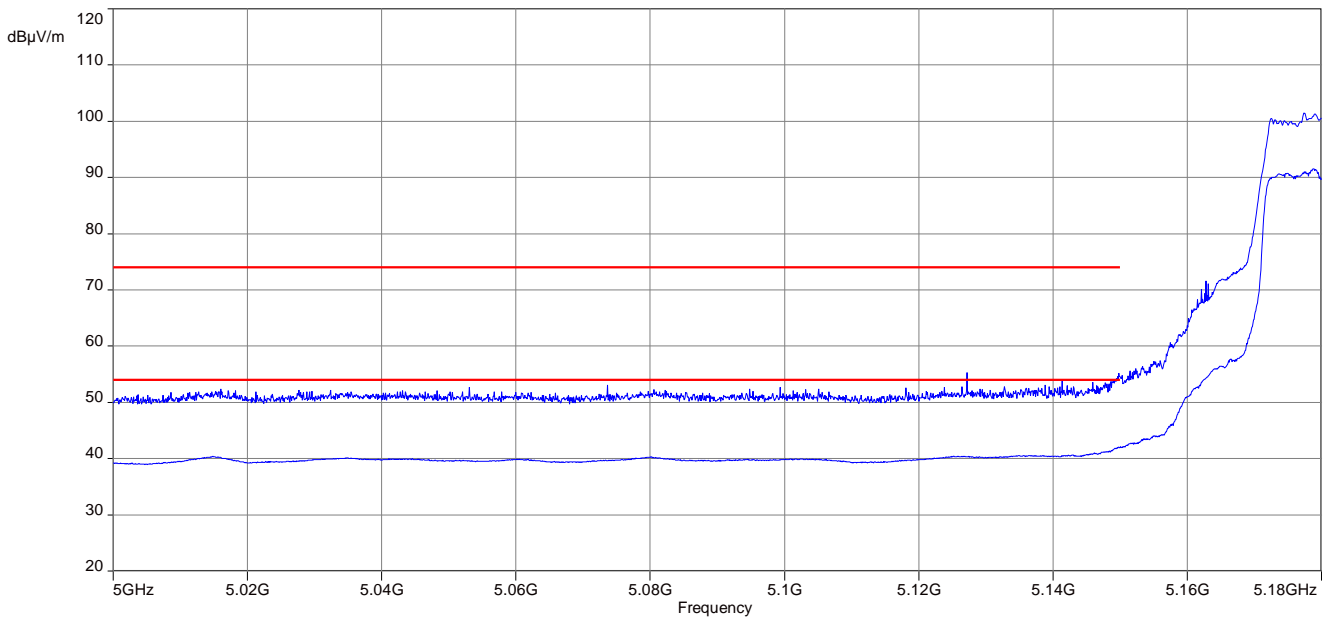

**Plot 5:** upper band edge, vertical & horizontal polarization (ANT2), channel 64

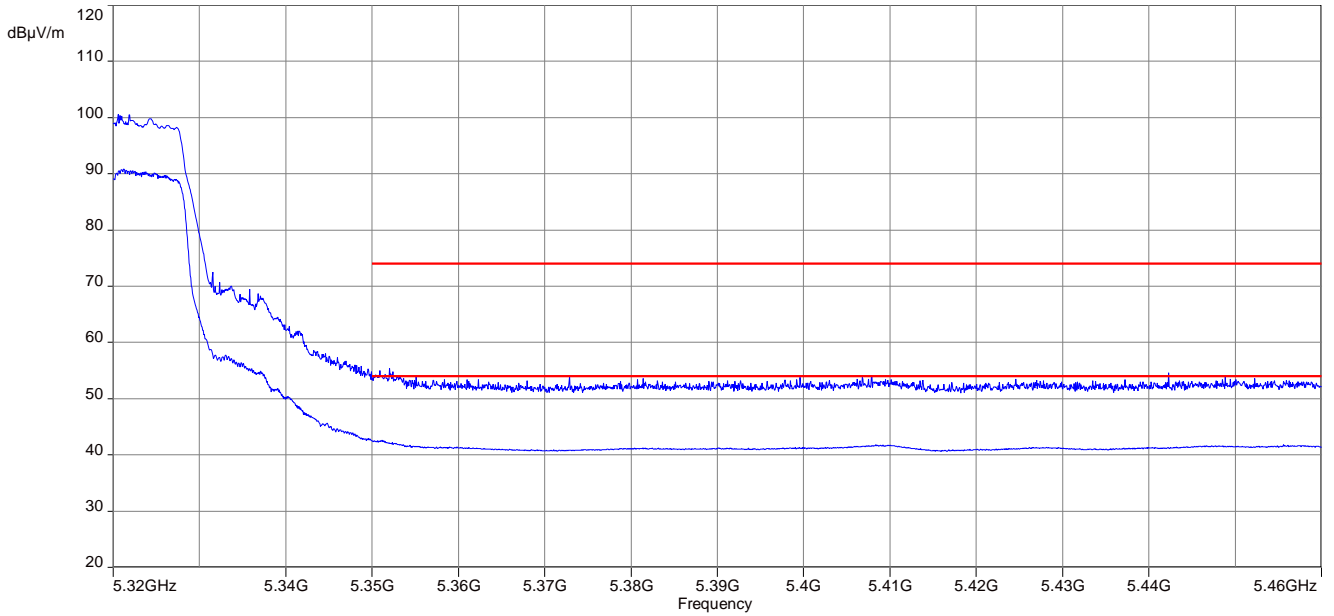

**Plot 6:** lower band edge, vertical & horizontal polarization (ANT2), channel 100

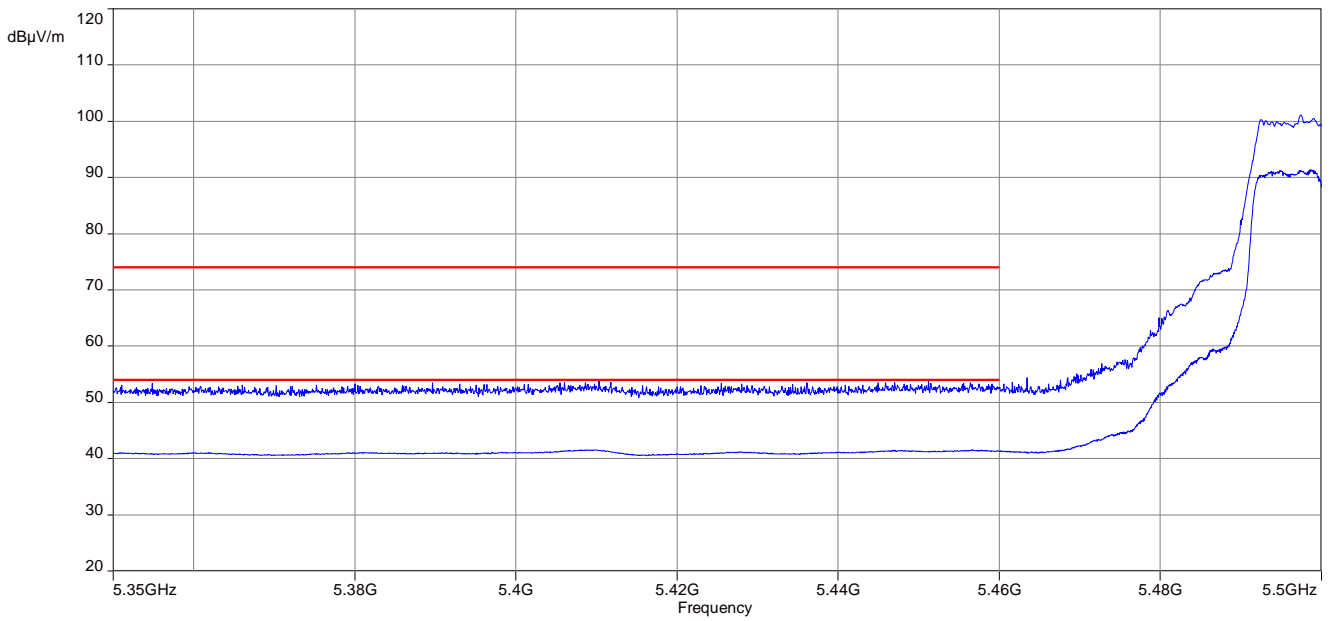

## 12.8 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

### Measurement:

| Measurement parameter    |                                                                                           |
|--------------------------|-------------------------------------------------------------------------------------------|
| Detector:                | Quasi Peak below 1 GHz<br>(alternative Peak)<br><br>Peak above 1 GHz / RMS                |
| Sweep time:              | Auto                                                                                      |
| Resolution bandwidth:    | F < 1 GHz: 100 kHz<br>F > 1 GHz: 1 MHz                                                    |
| Video bandwidth:         | F < 1 GHz: 100 kHz<br>F > 1 GHz: ≥ 3 MHz / 1 MHz                                          |
| Span:                    | 30 MHz to 40 GHz                                                                          |
| Trace-Mode:              | Max Hold / Average with 100 counts +<br>20 log (1 / X) for duty cycle lower than<br>100 % |
| Test setup:              | See chapter 7.1 – A, 7.2 – A, 7.3 - A                                                     |
| Measurement uncertainty: | See chapter 9                                                                             |

### Limits:

| TX Spurious Emissions Radiated |                               |                      |
|--------------------------------|-------------------------------|----------------------|
| §15.209                        |                               |                      |
| Frequency (MHz)                | Field Strength (dB $\mu$ V/m) | Measurement distance |
| 30 - 88                        | 30.0                          | 10                   |
| 88 – 216                       | 33.5                          | 10                   |
| 216 – 960                      | 36.0                          | 10                   |
| Above 960                      | 54.0                          | 3                    |
| §15.407                        |                               |                      |
| Outside the restricted bands!  | -27 dBm / MHz                 |                      |

**Results:** OFDM / ANT 1

| TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm         |          |                         |                                                             |          |                         |                                                             |          |                         |
|-------------------------------------------------------------|----------|-------------------------|-------------------------------------------------------------|----------|-------------------------|-------------------------------------------------------------|----------|-------------------------|
| OFDM ANT 1                                                  |          |                         |                                                             |          |                         |                                                             |          |                         |
| Lowest<br>5180 MHz                                          |          |                         | -/-                                                         |          |                         | Highest<br>5320 MHz                                         |          |                         |
| F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] | F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] | F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] |
| All detected emissions are more than 10 dB below the limit. |          |                         | All detected emissions are more than 10 dB below the limit. |          |                         | All detected emissions are more than 10 dB below the limit. |          |                         |
|                                                             |          |                         |                                                             |          |                         |                                                             |          |                         |

| TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm         |          |                         |                                                             |          |                         |                                                             |          |                         |
|-------------------------------------------------------------|----------|-------------------------|-------------------------------------------------------------|----------|-------------------------|-------------------------------------------------------------|----------|-------------------------|
| OFDM ANT 1                                                  |          |                         |                                                             |          |                         |                                                             |          |                         |
| Lowest<br>5500 MHz                                          |          |                         | Middle<br>5600 MHz                                          |          |                         | Highest<br>5700 MHz                                         |          |                         |
| F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] | F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] | F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] |
| All detected emissions are more than 10 dB below the limit. |          |                         | All detected emissions are more than 10 dB below the limit. |          |                         | All detected emissions are more than 10 dB below the limit. |          |                         |
|                                                             |          |                         |                                                             |          |                         |                                                             |          |                         |

| TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm         |          |                         |                                                             |          |                         |                                                             |          |                         |
|-------------------------------------------------------------|----------|-------------------------|-------------------------------------------------------------|----------|-------------------------|-------------------------------------------------------------|----------|-------------------------|
| OFDM ANT 1                                                  |          |                         |                                                             |          |                         |                                                             |          |                         |
| Lowest<br>5745 MHz                                          |          |                         | Middle<br>5785 MHz                                          |          |                         | Highest<br>5825 MHz                                         |          |                         |
| F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] | F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] | F [MHz]                                                     | Detector | Level<br>[dB $\mu$ V/m] |
| All detected emissions are more than 10 dB below the limit. |          |                         | All detected emissions are more than 10 dB below the limit. |          |                         | All detected emissions are more than 10 dB below the limit. |          |                         |
|                                                             |          |                         |                                                             |          |                         |                                                             |          |                         |

**Results:** OFDM / ANT 2


| TX Spurious Emissions Radiated [dBµV/m] / dBm               |          |                   |                                                             |          |                   |                                                             |          |                   |
|-------------------------------------------------------------|----------|-------------------|-------------------------------------------------------------|----------|-------------------|-------------------------------------------------------------|----------|-------------------|
| OFDM ANT 2                                                  |          |                   |                                                             |          |                   |                                                             |          |                   |
| Lowest<br>5180 MHz                                          |          |                   | -/-                                                         |          |                   | Highest<br>5320 MHz                                         |          |                   |
| F [MHz]                                                     | Detector | Level<br>[dBµV/m] | F [MHz]                                                     | Detector | Level<br>[dBµV/m] | F [MHz]                                                     | Detector | Level<br>[dBµV/m] |
| All detected emissions are more than 10 dB below the limit. |          |                   | All detected emissions are more than 10 dB below the limit. |          |                   | All detected emissions are more than 10 dB below the limit. |          |                   |
|                                                             |          |                   |                                                             |          |                   |                                                             |          |                   |

| TX Spurious Emissions Radiated [dBµV/m] / dBm               |          |                   |                                                             |          |                   |                                                             |          |                   |
|-------------------------------------------------------------|----------|-------------------|-------------------------------------------------------------|----------|-------------------|-------------------------------------------------------------|----------|-------------------|
| OFDM ANT 2                                                  |          |                   |                                                             |          |                   |                                                             |          |                   |
| Lowest<br>5500 MHz                                          |          |                   | Middle<br>5600 MHz                                          |          |                   | Highest<br>5700 MHz                                         |          |                   |
| F [MHz]                                                     | Detector | Level<br>[dBµV/m] | F [MHz]                                                     | Detector | Level<br>[dBµV/m] | F [MHz]                                                     | Detector | Level<br>[dBµV/m] |
| All detected emissions are more than 10 dB below the limit. |          |                   | All detected emissions are more than 10 dB below the limit. |          |                   | All detected emissions are more than 10 dB below the limit. |          |                   |
|                                                             |          |                   |                                                             |          |                   |                                                             |          |                   |

| TX Spurious Emissions Radiated [dBµV/m] / dBm               |          |                   |                                                             |          |                   |                                                             |          |                   |
|-------------------------------------------------------------|----------|-------------------|-------------------------------------------------------------|----------|-------------------|-------------------------------------------------------------|----------|-------------------|
| OFDM ANT 2                                                  |          |                   |                                                             |          |                   |                                                             |          |                   |
| Lowest<br>5745 MHz                                          |          |                   | Middle<br>5785 MHz                                          |          |                   | Highest<br>5825 MHz                                         |          |                   |
| F [MHz]                                                     | Detector | Level<br>[dBµV/m] | F [MHz]                                                     | Detector | Level<br>[dBµV/m] | F [MHz]                                                     | Detector | Level<br>[dBµV/m] |
| All detected emissions are more than 10 dB below the limit. |          |                   | All detected emissions are more than 10 dB below the limit. |          |                   | All detected emissions are more than 10 dB below the limit. |          |                   |
|                                                             |          |                   |                                                             |          |                   |                                                             |          |                   |

**Plots:** OFDM / ANT 1


**Plot 1:** 30 MHz to 1 GHz, 5180 MHz, vertical & horizontal polarization

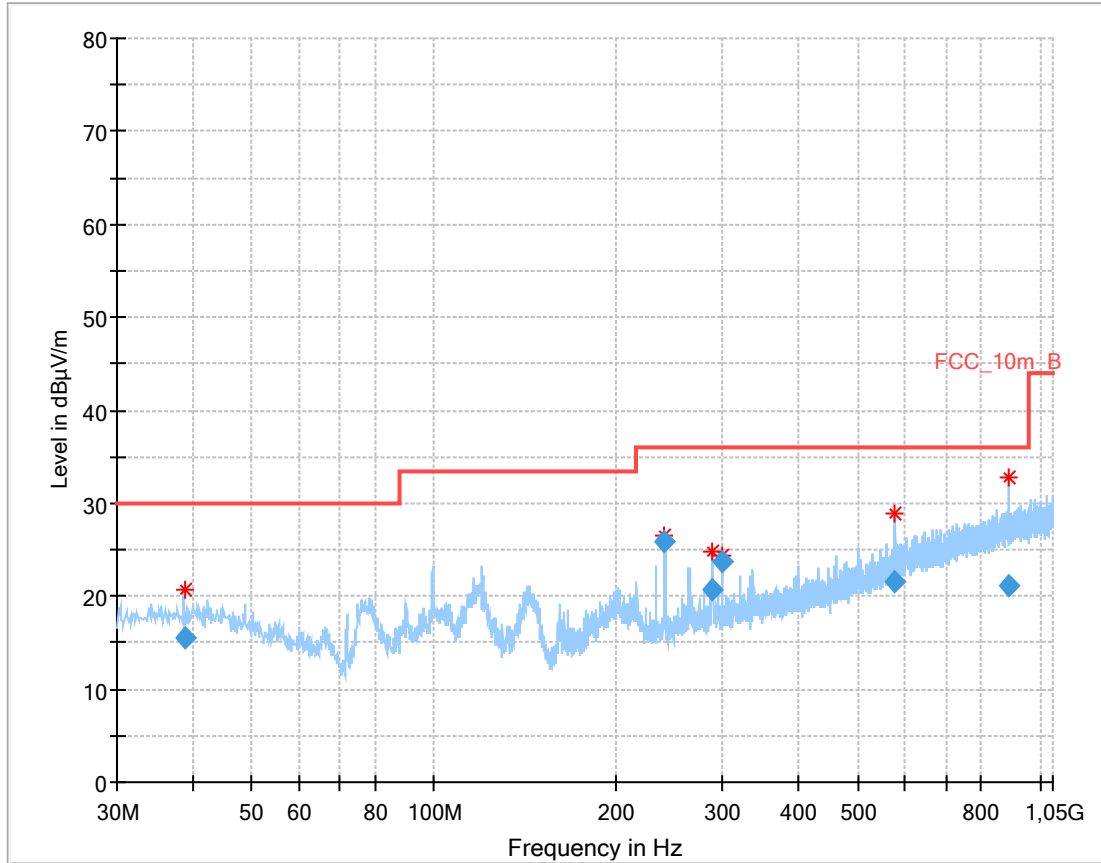


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 38.716650       | 15.58              | 30.00          | 14.42       | 1000.0          | 120.000         | 185.0       | V   | 175.0         | 14.0       |
| 239.994600      | 25.93              | 36.00          | 10.07       | 1000.0          | 120.000         | 179.0       | H   | 270.0         | 13.0       |
| 287.571600      | 20.80              | 36.00          | 15.20       | 1000.0          | 120.000         | 101.0       | V   | 175.0         | 14.2       |
| 299.307750      | 23.82              | 36.00          | 12.18       | 1000.0          | 120.000         | 98.0        | V   | 4.0           | 14.4       |
| 577.208400      | 21.65              | 36.00          | 14.35       | 1000.0          | 120.000         | 101.0       | H   | 344.0         | 20.1       |
| 890.772750      | 21.08              | 36.00          | 14.92       | 1000.0          | 120.000         | 101.0       | V   | 322.0         | 24.0       |


**Plot 2:** 1 GHz to 18 GHz, 5180 MHz, vertical & horizontal polarization

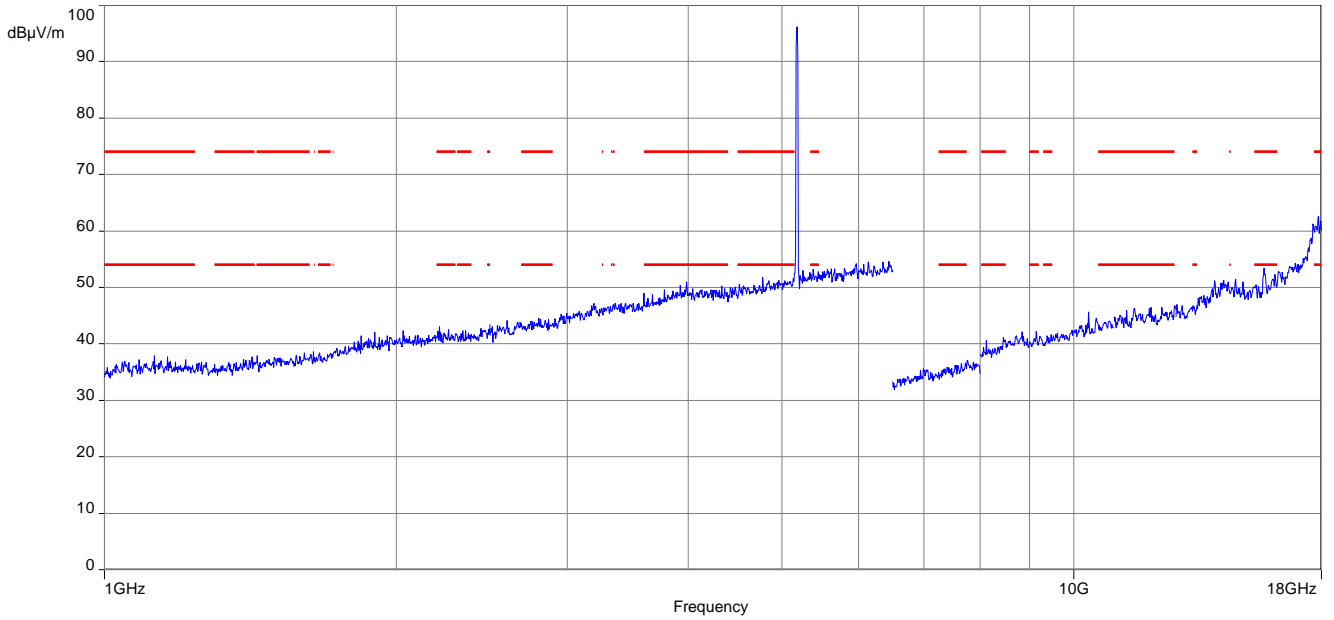


**Plot 3:** 17.7 GHz to 18 GHz, 5180 MHz, zoomed

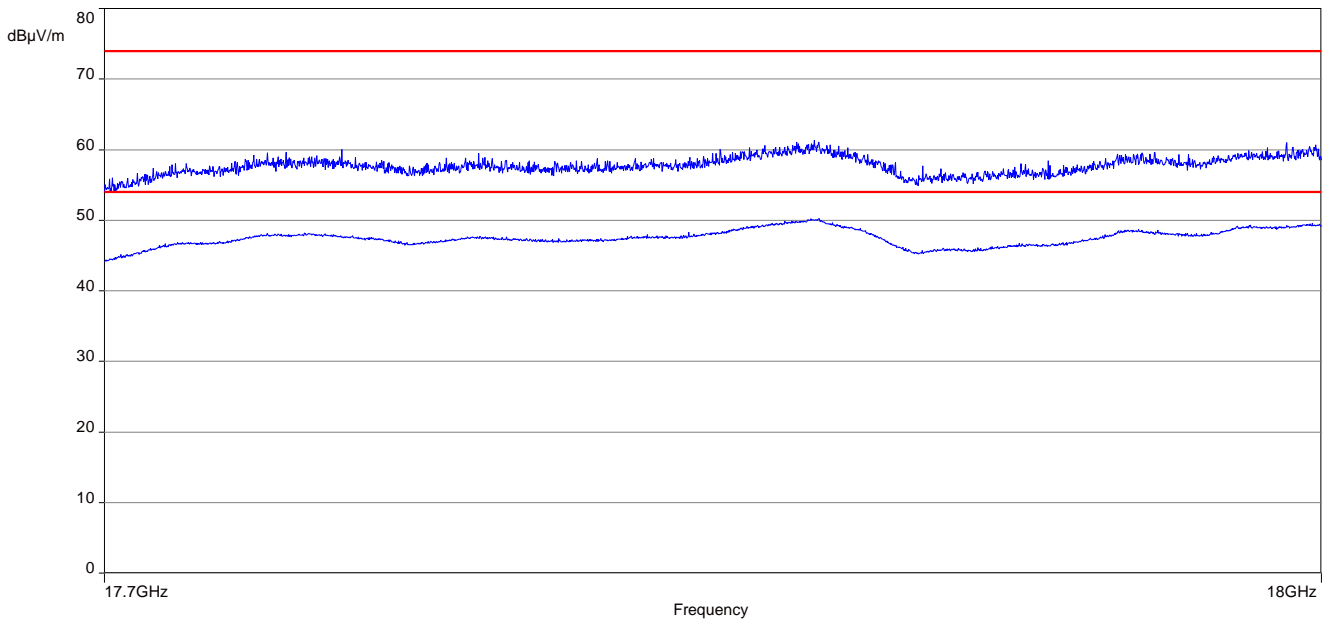

Plot 4: 18 GHz to 26 GHz, 5180 MHz, vertical & horizontal polarization

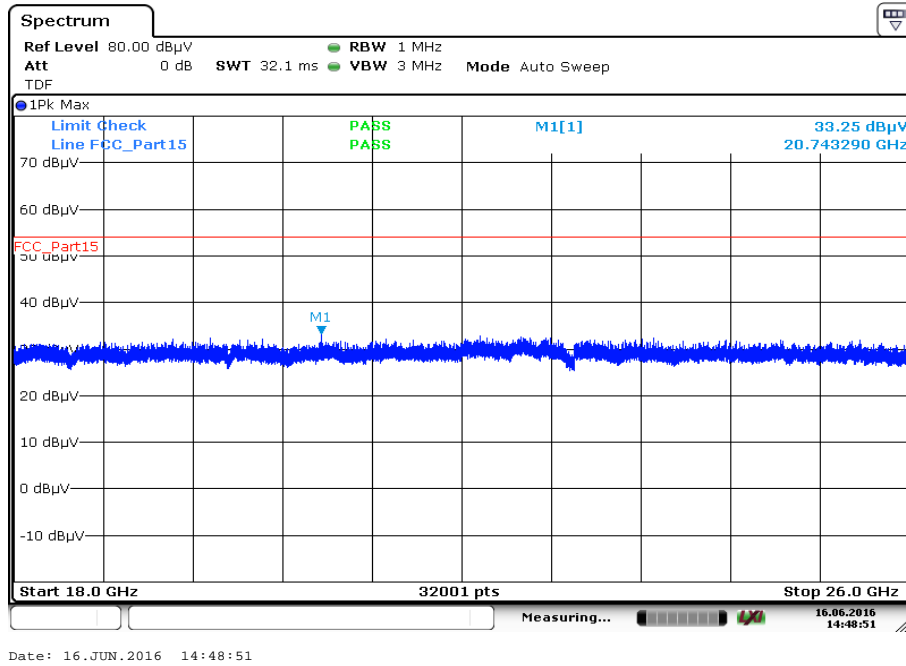


Plot 5: 26 GHz to 40 GHz, 5180 MHz, vertical & horizontal polarization

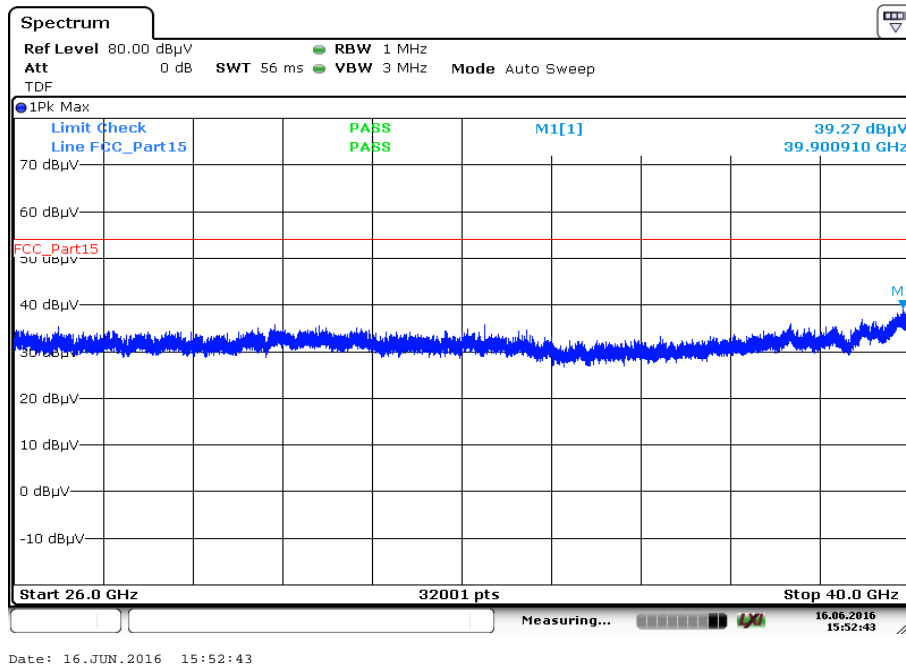




**Plot 6:** 30 MHz to 1 GHz, 5320 MHz, vertical & horizontal polarization

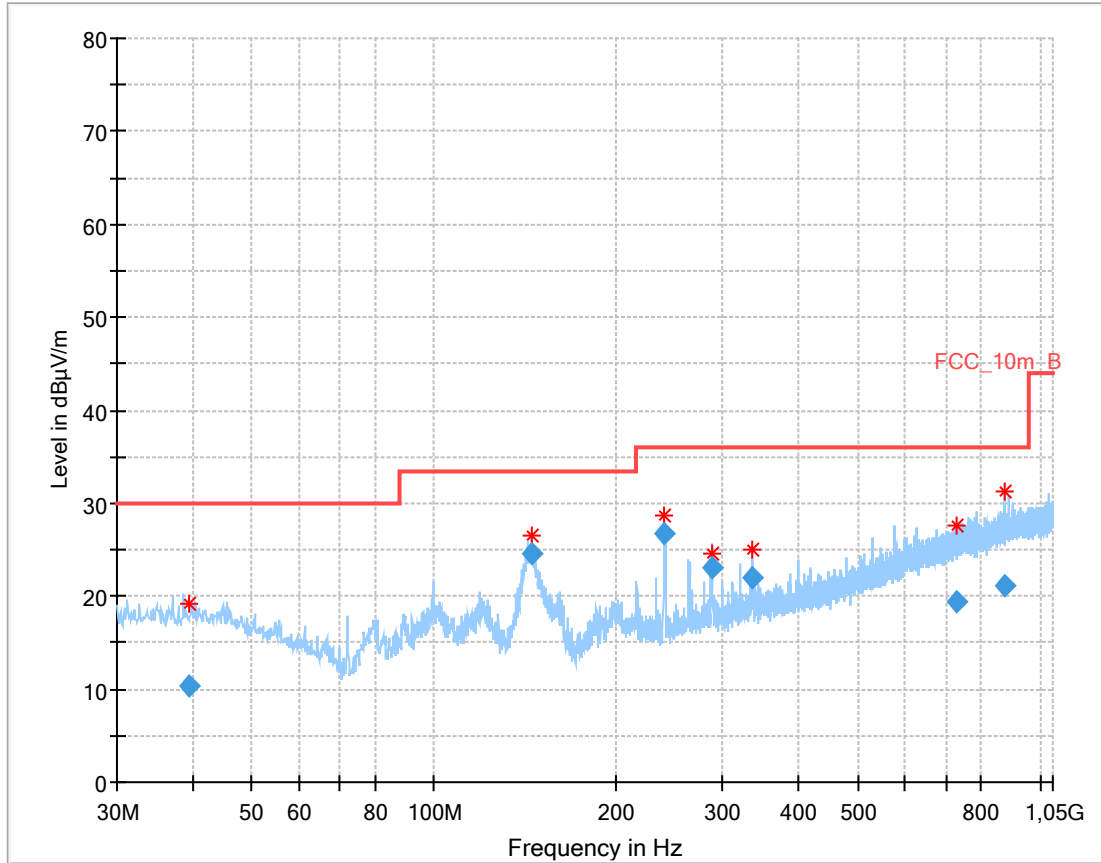


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 39.397650       | 10.31              | 30.00          | 19.69       | 1000.0          | 120.000         | 101.0       | H   | 329.0         | 14.0       |
| 145.362000      | 24.65              | 33.50          | 8.85        | 1000.0          | 120.000         | 101.0       | V   | 222.0         | 8.8        |
| 240.195000      | 26.64              | 36.00          | 9.36        | 1000.0          | 120.000         | 98.0        | V   | 351.0         | 13.1       |
| 287.861100      | 23.00              | 36.00          | 13.00       | 1000.0          | 120.000         | 98.0        | V   | 344.0         | 14.2       |
| 336.347250      | 22.06              | 36.00          | 13.94       | 1000.0          | 120.000         | 98.0        | V   | 4.0           | 15.6       |
| 729.008550      | 19.35              | 36.00          | 16.65       | 1000.0          | 120.000         | 179.0       | H   | 75.0          | 22.2       |
| 875.171850      | 21.15              | 36.00          | 14.85       | 1000.0          | 120.000         | 185.0       | V   | 64.0          | 23.8       |


**Plot 7:** 1 GHz to 18 GHz, 5320 MHz, vertical & horizontal polarization

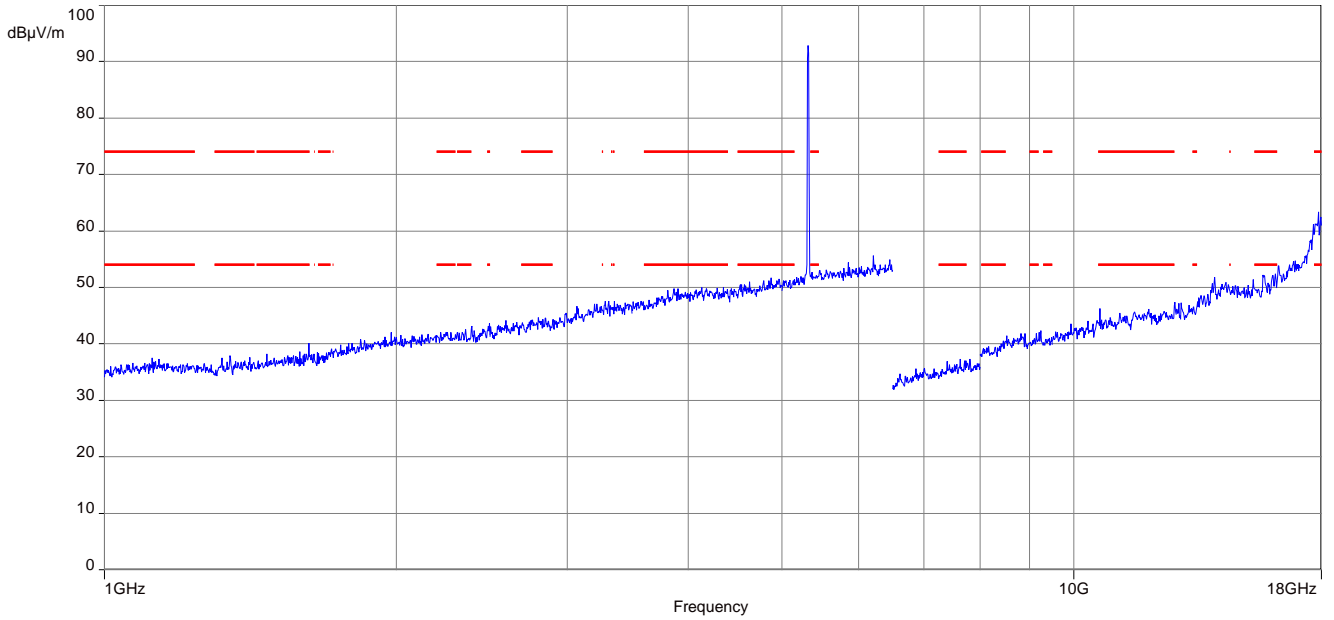


**Plot 8:** 17.7 GHz to 18 GHz, 5320 MHz, zoomed

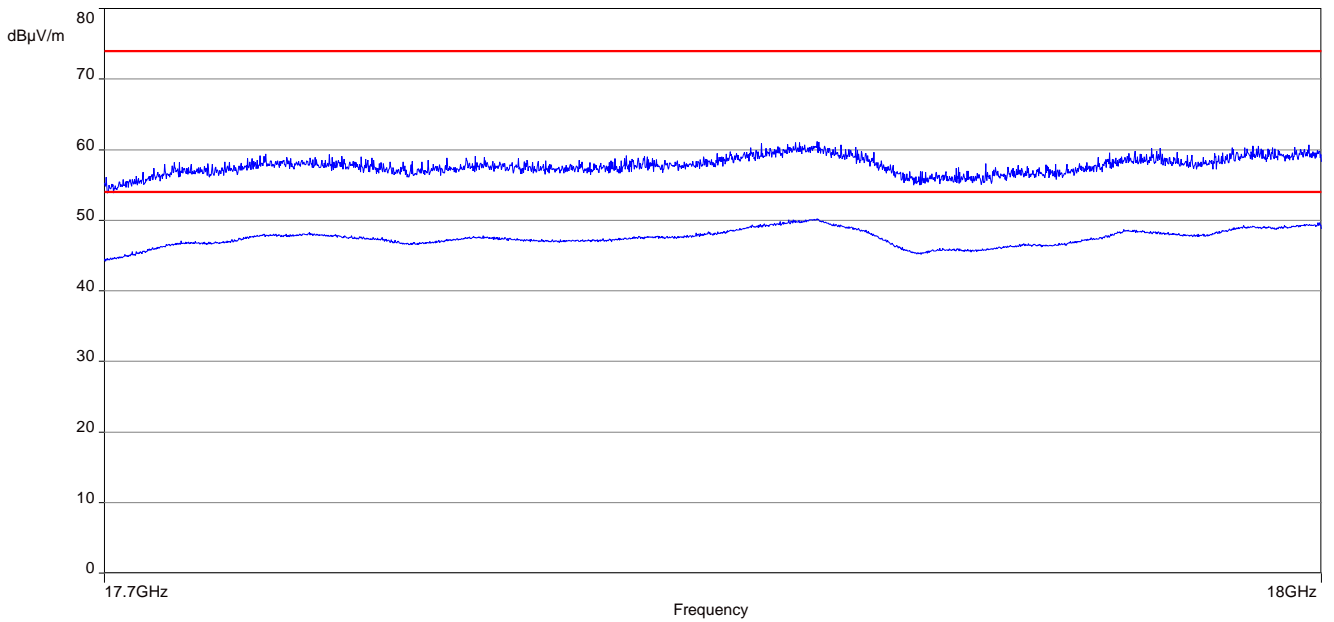


**Plot 9:** 18 GHz to 26 GHz, 5320 MHz, vertical & horizontal polarization

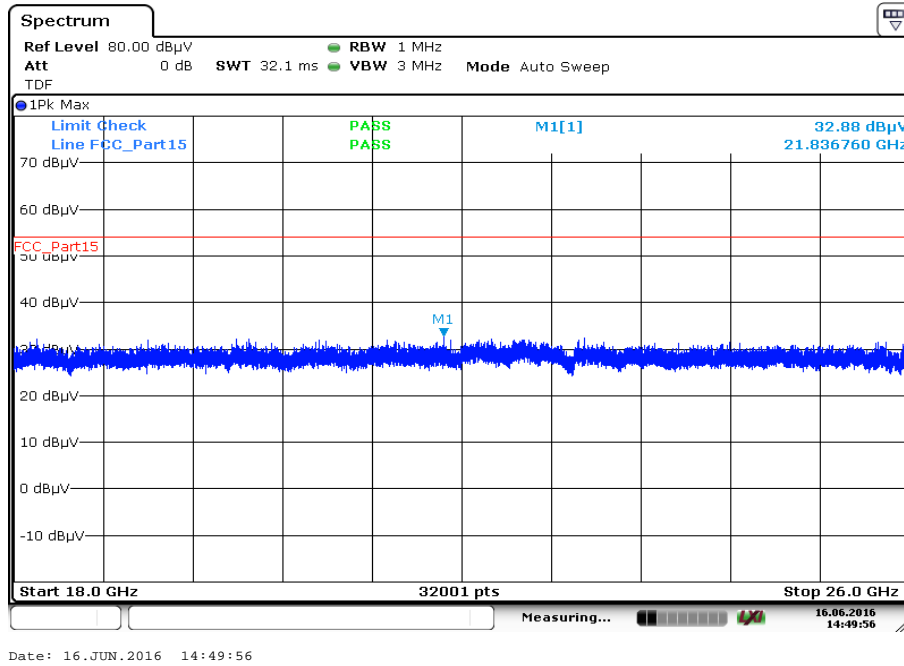

**Plot 10:** 26 GHz to 40 GHz, 5320 MHz, vertical & horizontal polarization

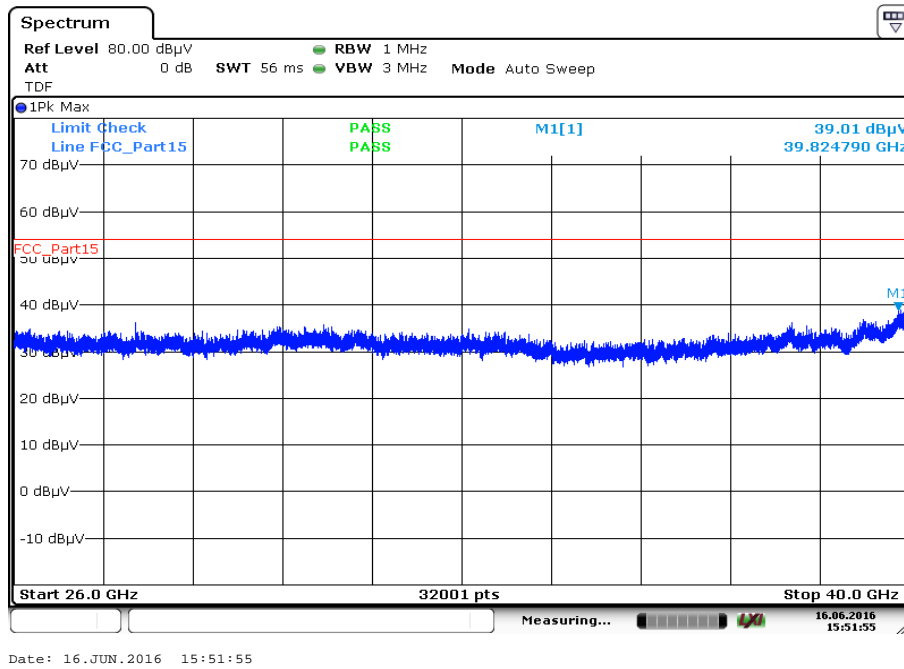


Plot 11: 30 MHz to 1 GHz, 5500 MHz, vertical & horizontal polarization

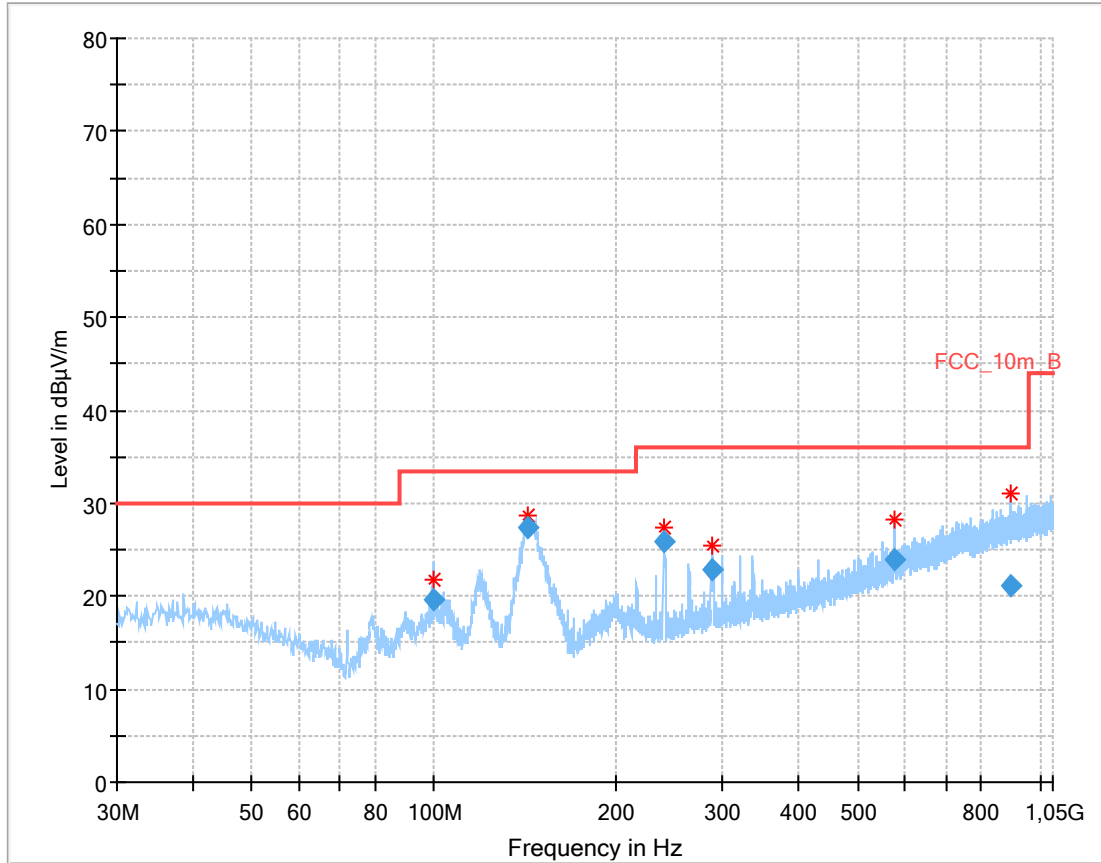


Final\_Result:

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 99.762000       | 19.53              | 33.50          | 13.97       | 1000.0          | 120.000         | 101.0       | V   | 281.0         | 12.1       |
| 143.178300      | 27.29              | 33.50          | 6.21        | 1000.0          | 120.000         | 98.0        | V   | 281.0         | 8.8        |
| 239.967450      | 25.97              | 36.00          | 10.03       | 1000.0          | 120.000         | 98.0        | V   | 353.0         | 13.0       |
| 287.819700      | 22.76              | 36.00          | 13.24       | 1000.0          | 120.000         | 98.0        | V   | 353.0         | 14.2       |
| 575.911050      | 23.98              | 36.00          | 12.02       | 1000.0          | 120.000         | 185.0       | H   | 353.0         | 20.0       |
| 895.170900      | 21.06              | 36.00          | 14.94       | 1000.0          | 120.000         | 185.0       | H   | 57.0          | 24.0       |


**Plot 12:** 1 GHz to 18 GHz, 5500 MHz, vertical & horizontal polarization

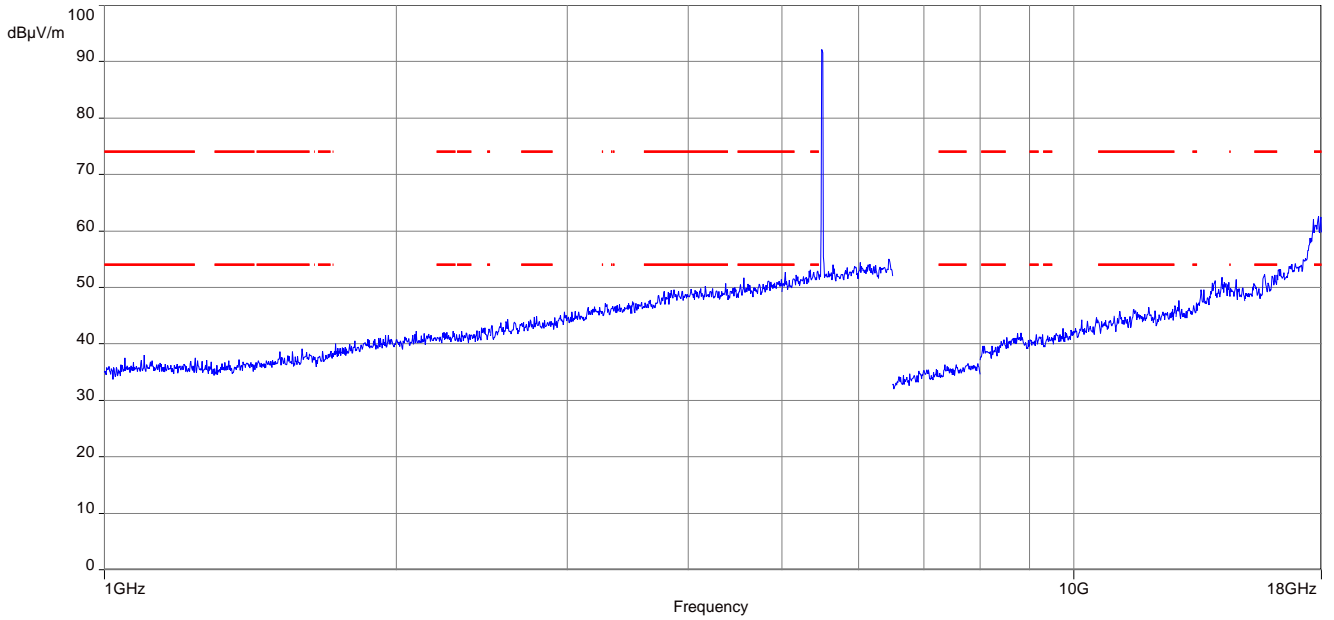


**Plot 13:** 17.7 GHz to 18 GHz, 5500 MHz, zoomed

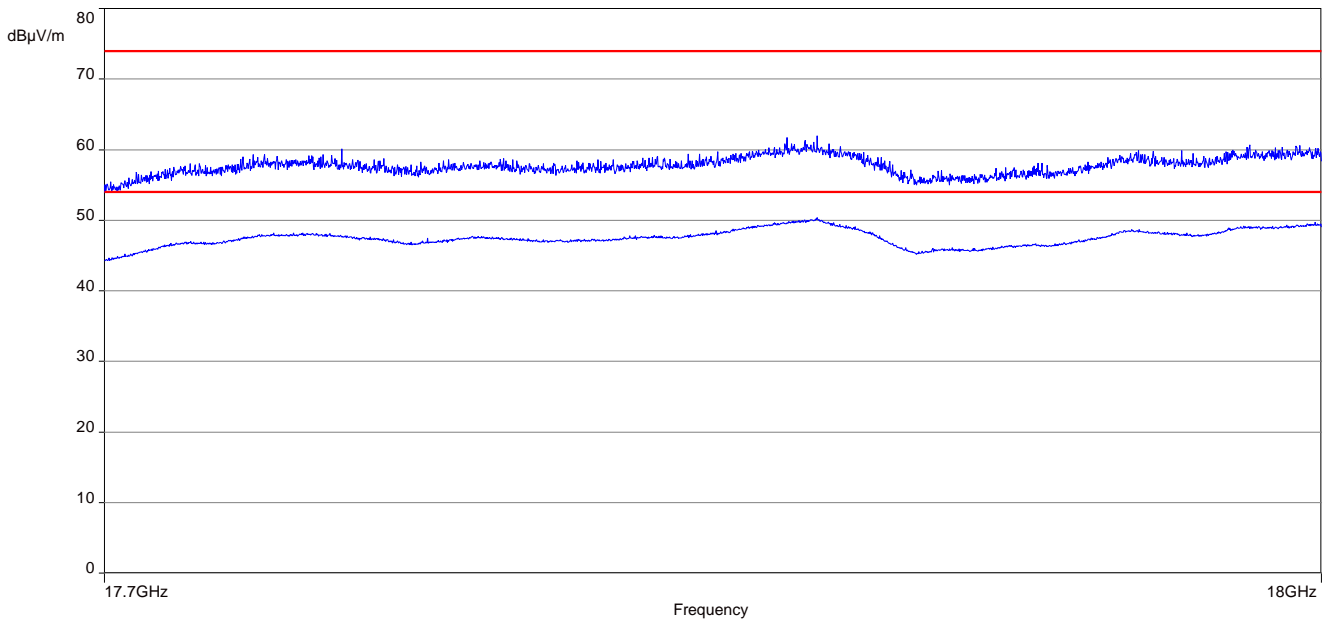


Plot 14: 18 GHz to 26 GHz, 5500 MHz, vertical & horizontal polarization

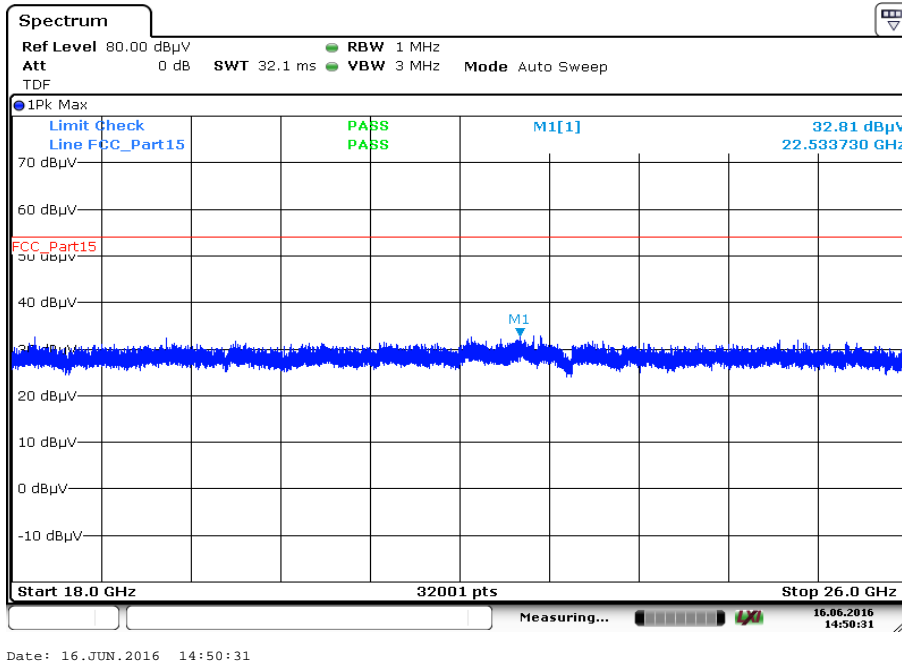

Plot 15: 26 GHz to 40 GHz, 5500 MHz, vertical & horizontal polarization

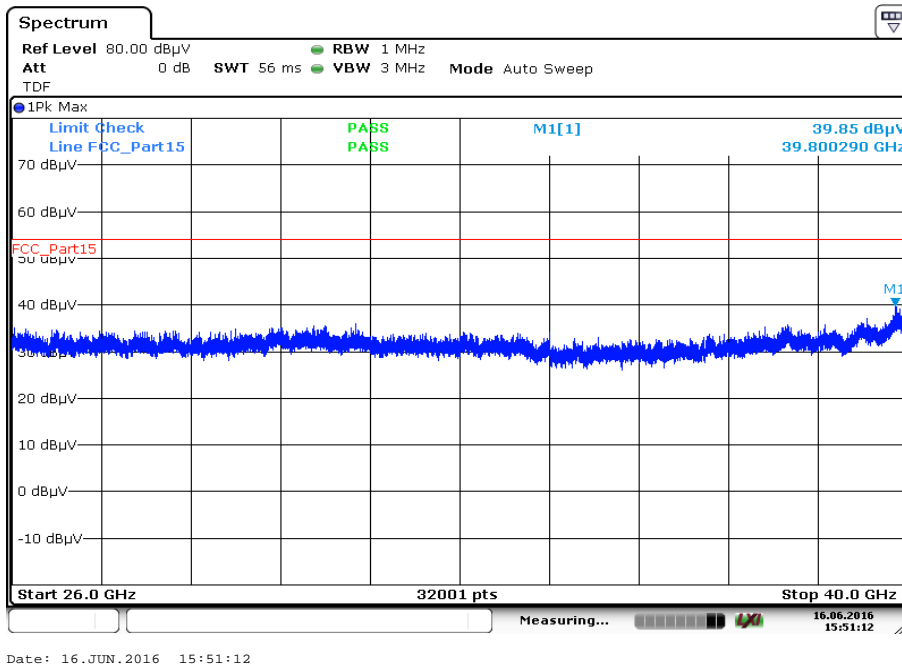


**Plot 16:** 30 MHz to 1 GHz, 5600 MHz, vertical & horizontal polarization

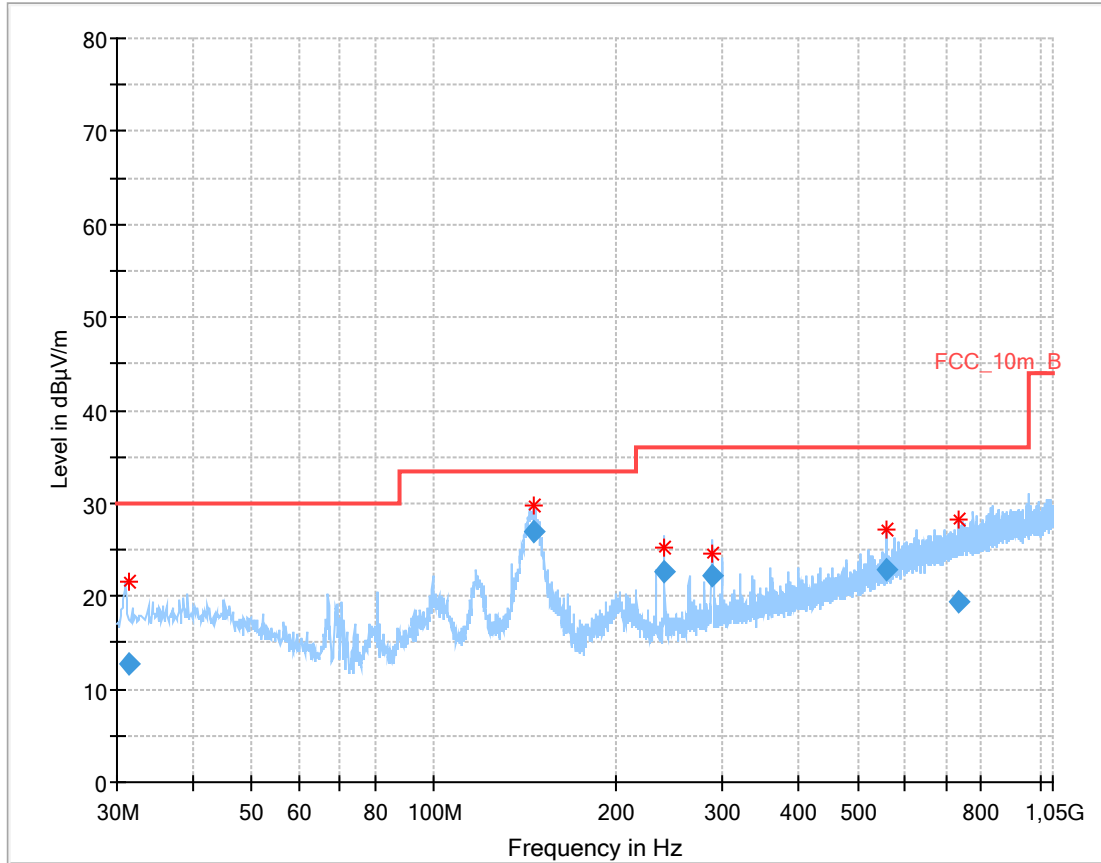


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 31.300200       | 12.63              | 30.00          | 17.37       | 1000.0          | 120.000         | 101.0       | V   | 250.0         | 13.5       |
| 145.782450      | 27.00              | 33.50          | 6.50        | 1000.0          | 120.000         | 98.0        | V   | 238.0         | 8.8        |
| 240.061800      | 22.56              | 36.00          | 13.44       | 1000.0          | 120.000         | 98.0        | V   | 345.0         | 13.0       |
| 286.997400      | 22.13              | 36.00          | 13.87       | 1000.0          | 120.000         | 98.0        | V   | 331.0         | 14.2       |
| 560.015850      | 22.92              | 36.00          | 13.08       | 1000.0          | 120.000         | 101.0       | H   | 11.0          | 19.6       |
| 732.980400      | 19.39              | 36.00          | 16.61       | 1000.0          | 120.000         | 185.0       | H   | 250.0         | 22.3       |

**Plot 17:** 1 GHz to 18 GHz, 5600 MHz, vertical & horizontal polarization

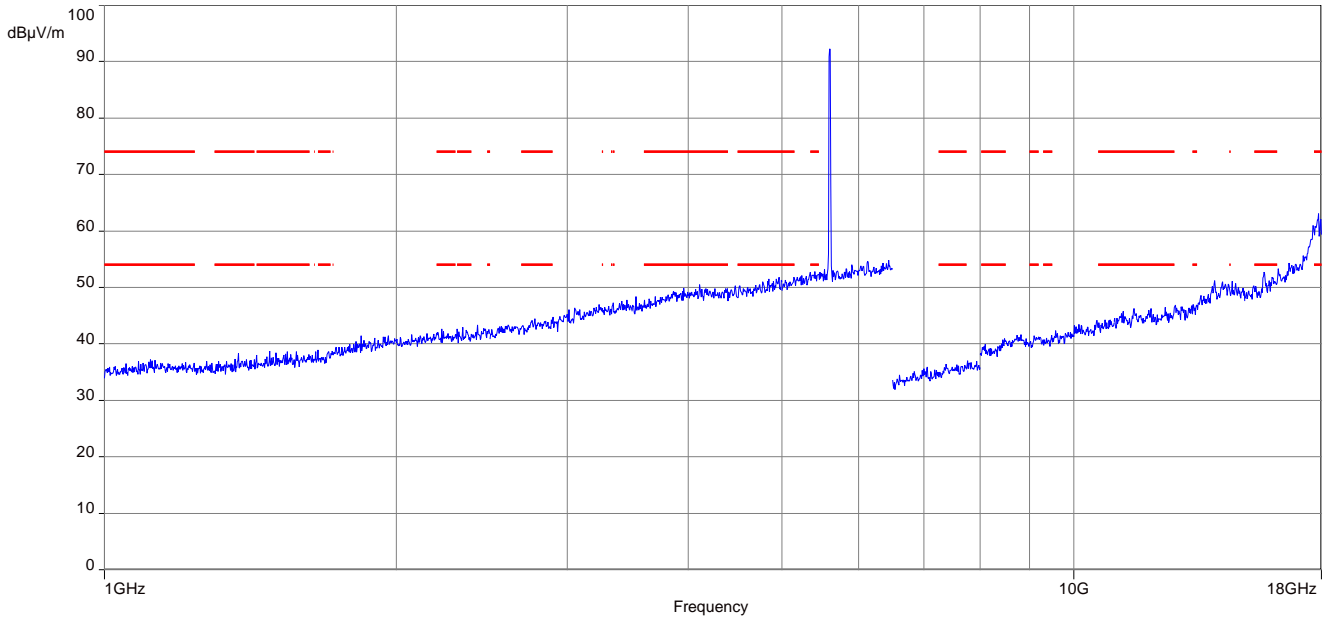


**Plot 18:** 17.7 GHz to 18 GHz, 5600 MHz, zoomed

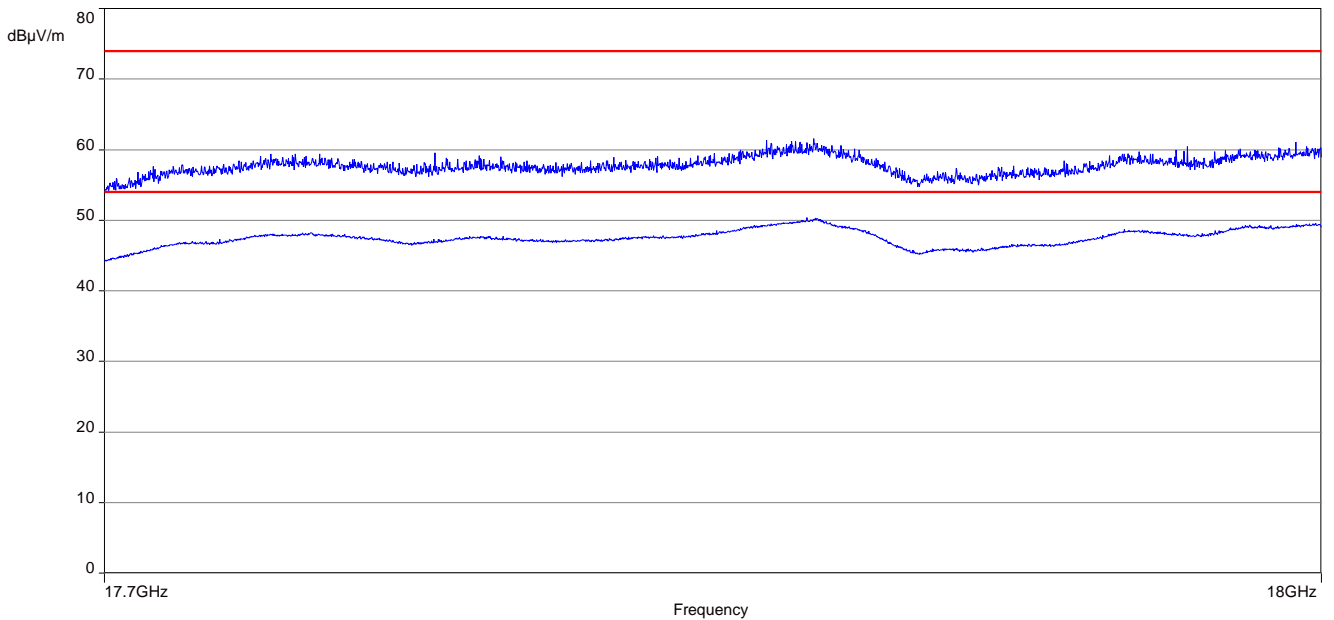




Plot 19: 18 GHz to 26 GHz, 5600 MHz, vertical & horizontal polarization

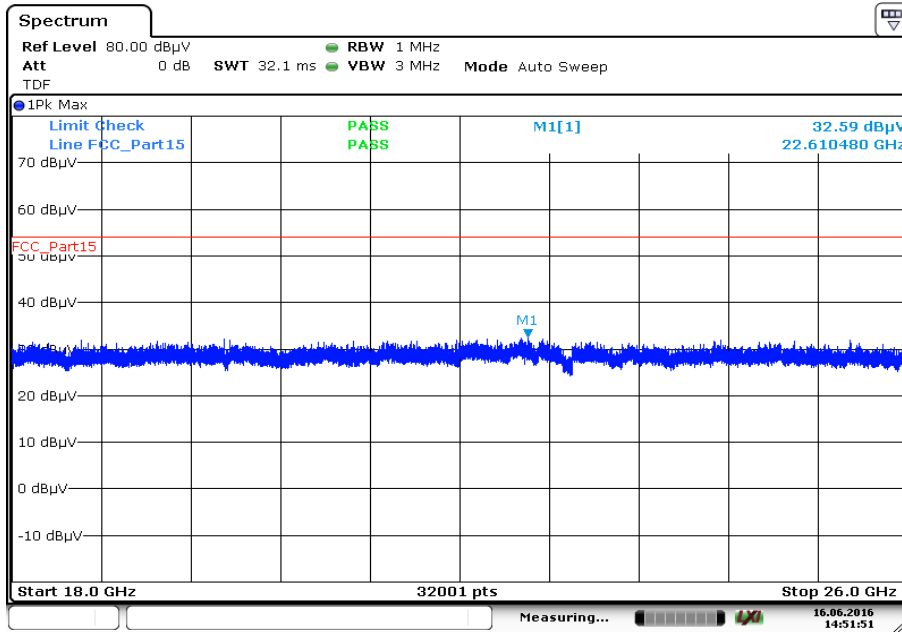


Date: 16.JUN.2016 14:51:51

Plot 20: 26 GHz to 40 GHz, 5600 MHz, vertical & horizontal polarization

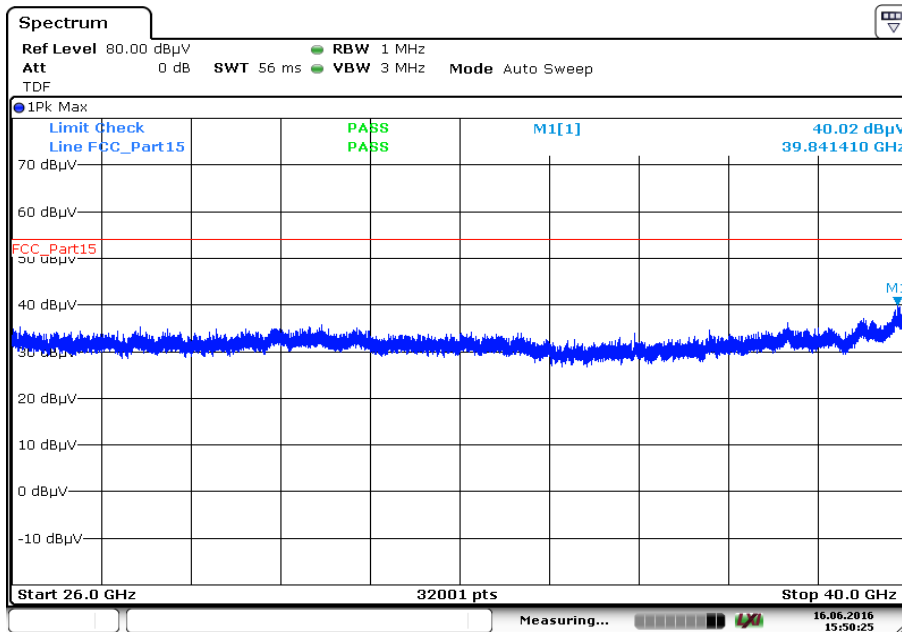

Date: 16.JUN.2016 15:50:25


**Plot 21:** 30 MHz to 1 GHz, 5700 MHz, vertical & horizontal polarization

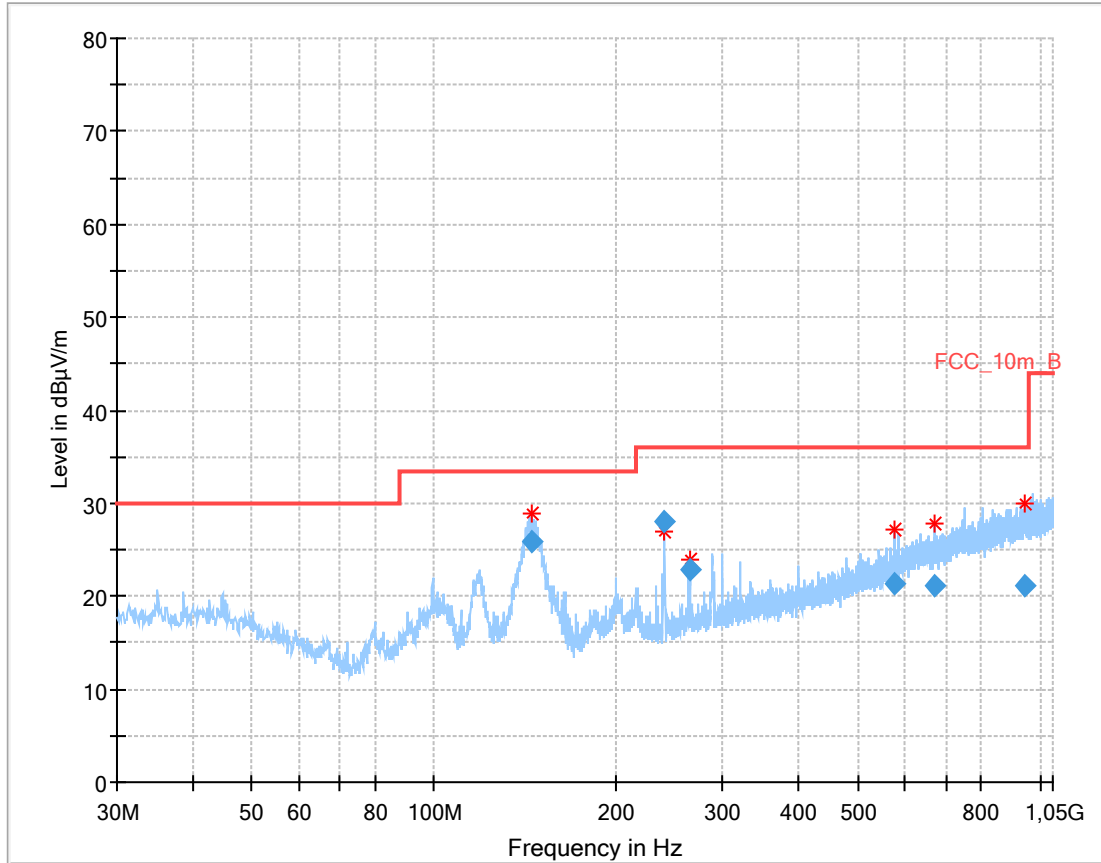


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 145.434900      | 25.87              | 33.50          | 7.63        | 1000.0          | 120.000         | 98.0        | V   | 241.0         | 8.8        |
| 240.408300      | 27.93              | 36.00          | 8.07        | 1000.0          | 120.000         | 185.0       | H   | 266.0         | 13.1       |
| 264.167700      | 22.94              | 36.00          | 13.06       | 1000.0          | 120.000         | 185.0       | H   | 282.0         | 13.7       |
| 574.577400      | 21.28              | 36.00          | 14.72       | 1000.0          | 120.000         | 101.0       | H   | 232.0         | 20.0       |
| 671.918400      | 21.11              | 36.00          | 14.89       | 1000.0          | 120.000         | 101.0       | H   | 12.0          | 21.3       |
| 944.858550      | 21.17              | 36.00          | 14.83       | 1000.0          | 120.000         | 185.0       | V   | 226.0         | 24.2       |


**Plot 22:** 1 GHz to 18 GHz, 5700 MHz, vertical & horizontal polarization

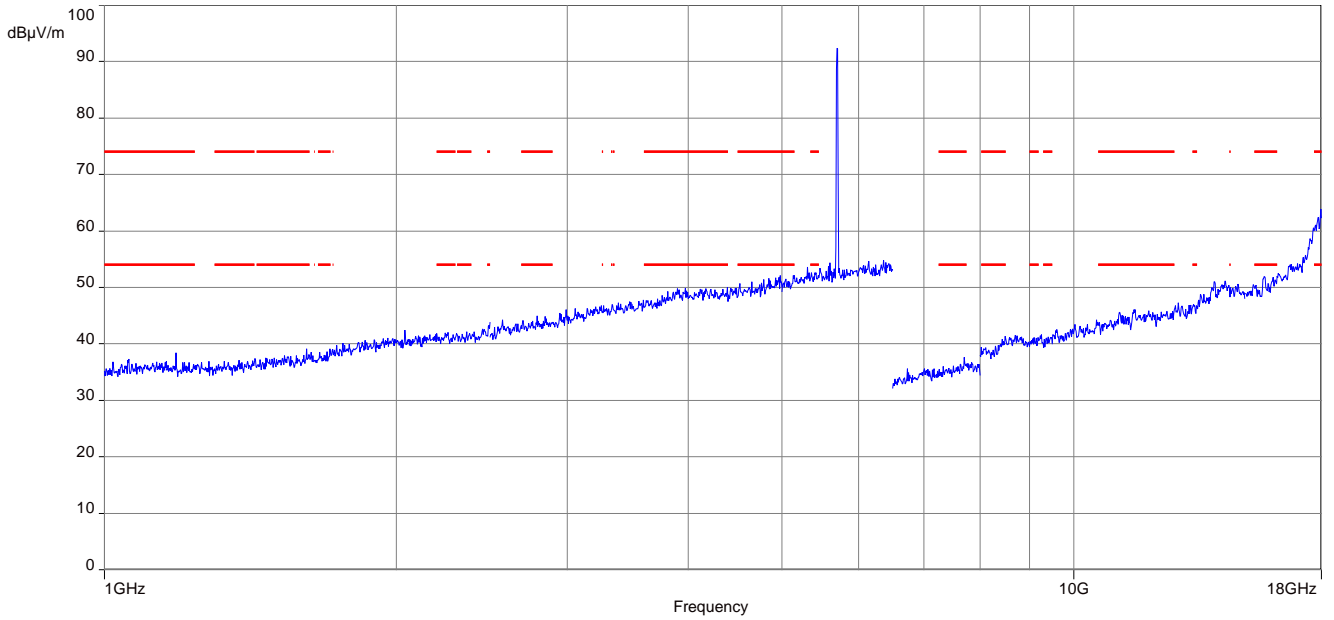

**Plot 23:** 17.7 GHz to 18 GHz, 5700 MHz, zoomed

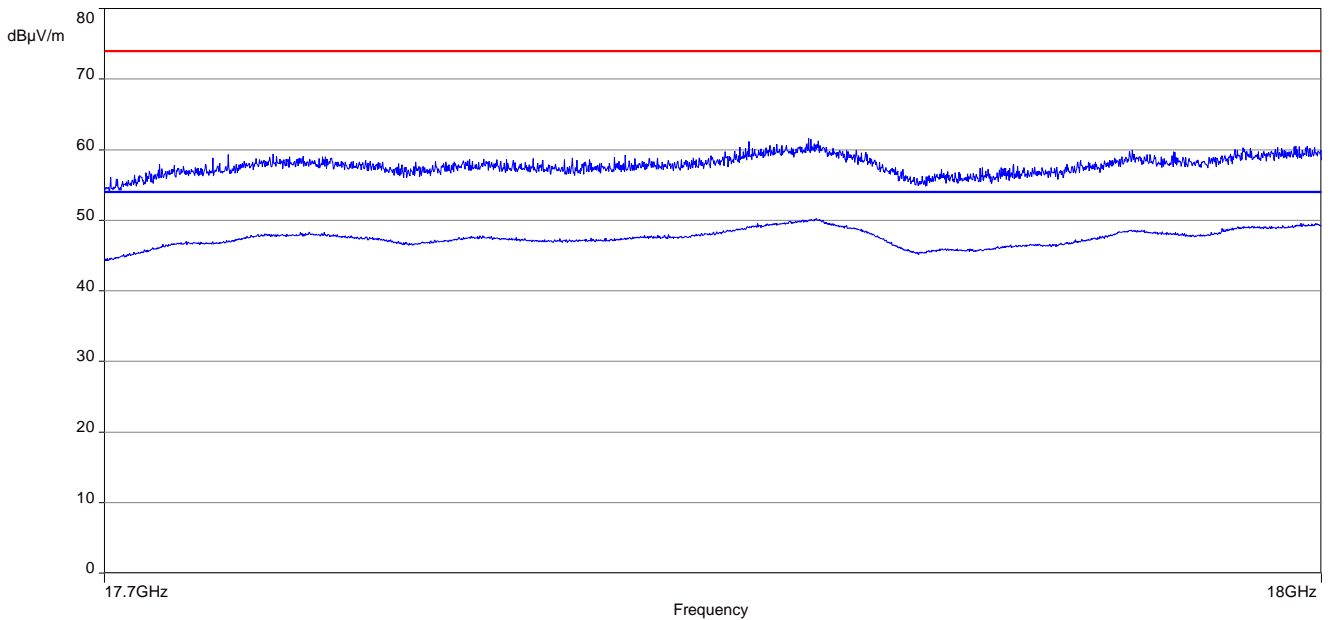


Plot 24: 18 GHz to 26 GHz, 5700 MHz, vertical & horizontal polarization

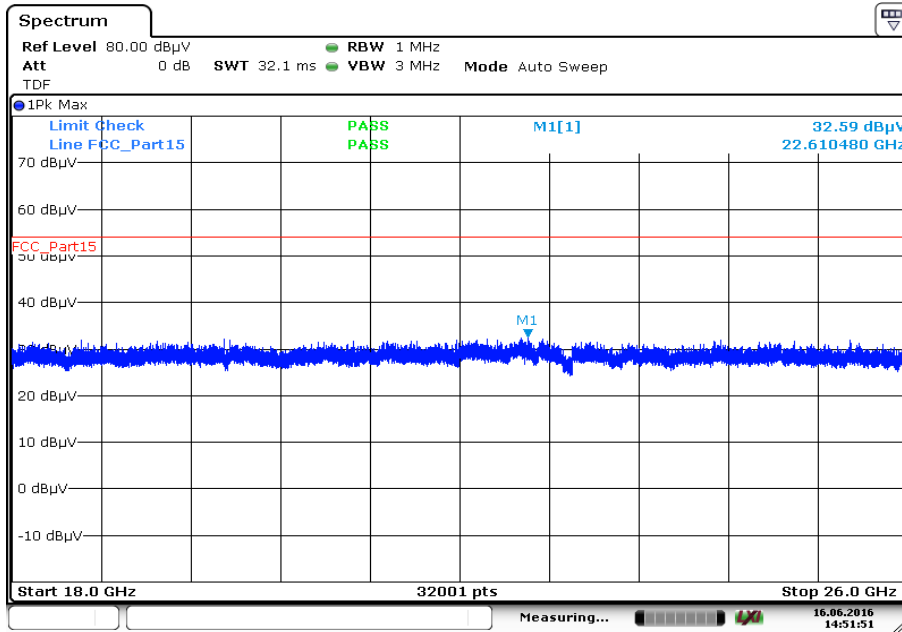


Date: 16.JUN.2016 14:51:51

Plot 25: 26 GHz to 40 GHz, 5700 MHz, vertical & horizontal polarization

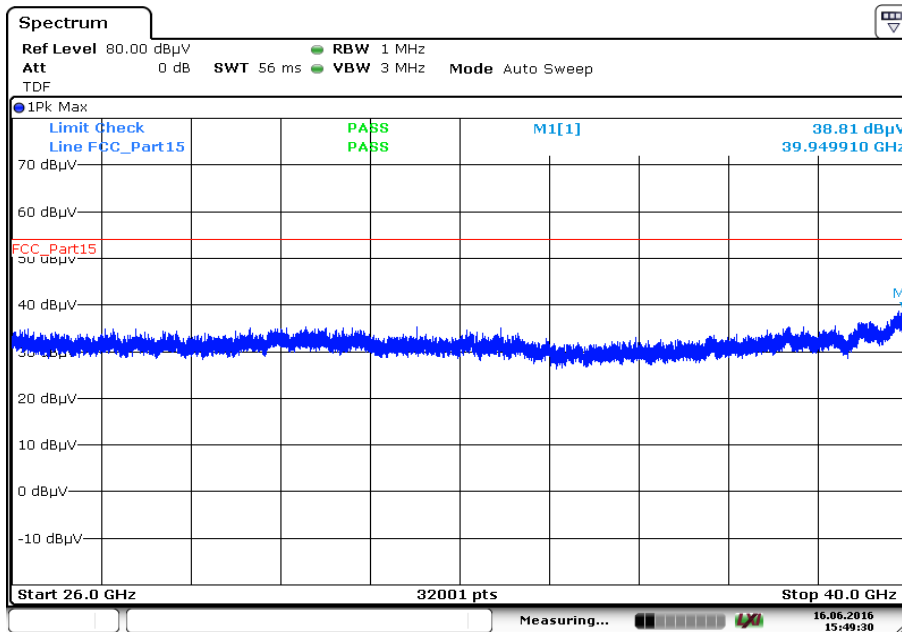

Date: 16.JUN.2016 15:49:30


**Plot 26:** 30 MHz to 1 GHz, 5745 MHz, vertical & horizontal polarization

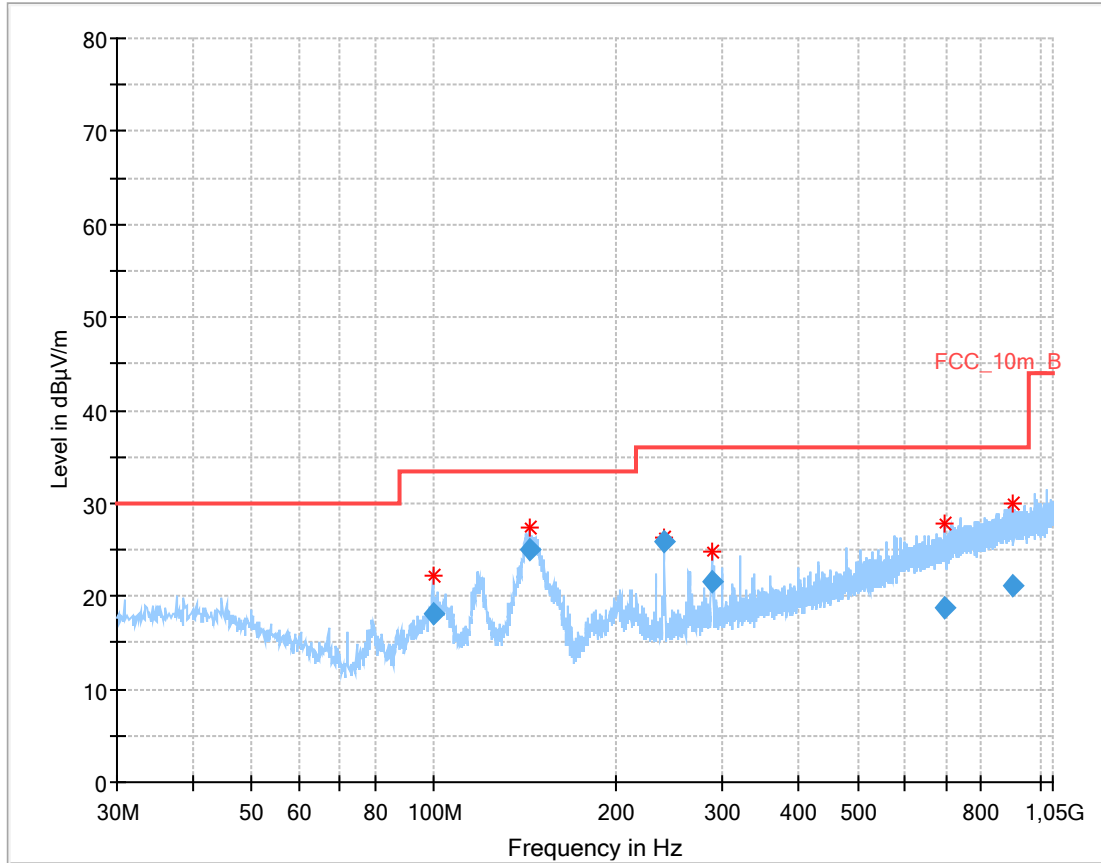


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 99.796650       | 18.01              | 33.50          | 15.49       | 1000.0          | 120.000         | 101.0       | V   | 261.0         | 12.1       |
| 143.847750      | 24.98              | 33.50          | 8.52        | 1000.0          | 120.000         | 98.0        | V   | 269.0         | 8.8        |
| 239.637300      | 25.88              | 36.00          | 10.12       | 1000.0          | 120.000         | 185.0       | H   | 250.0         | 13.0       |
| 287.186850      | 21.64              | 36.00          | 14.36       | 1000.0          | 120.000         | 98.0        | V   | 0.0           | 14.2       |
| 697.643850      | 18.68              | 36.00          | 17.32       | 1000.0          | 120.000         | 185.0       | V   | 141.0         | 21.5       |
| 902.327100      | 21.14              | 36.00          | 14.86       | 1000.0          | 120.000         | 179.0       | H   | 200.0         | 24.1       |


**Plot 27:** 1 GHz to 18 GHz, 5745 MHz, vertical & horizontal polarization

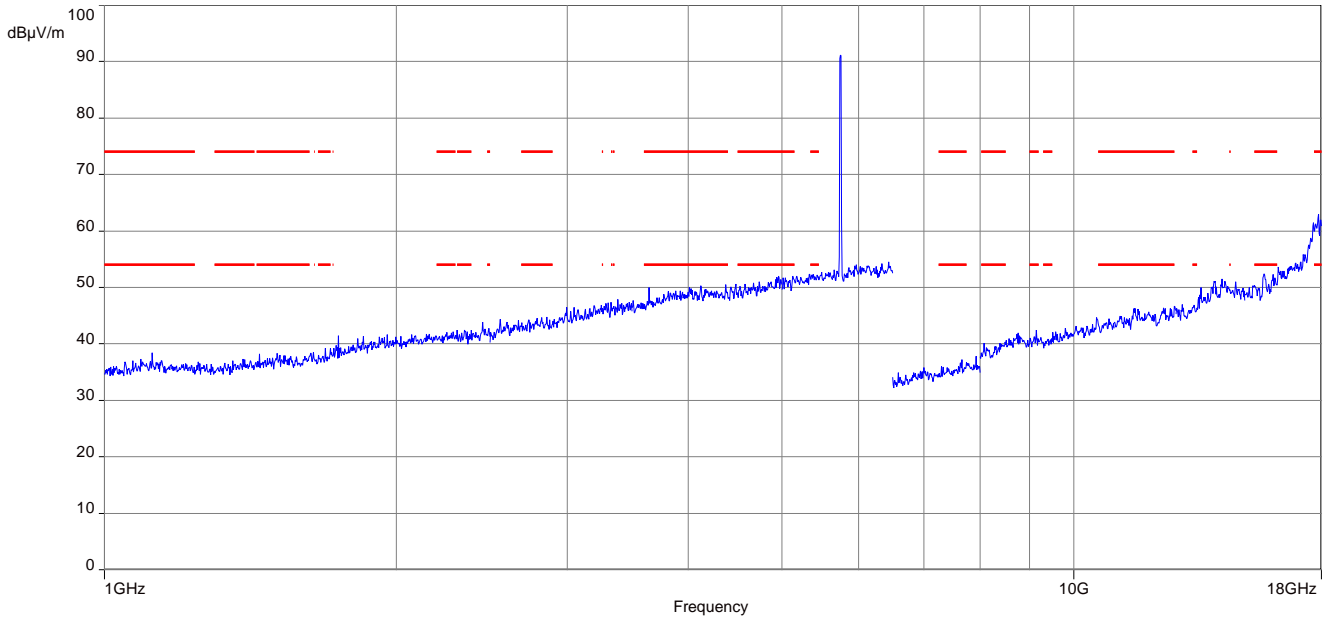

**Plot 28:** 17.7 GHz to 18 GHz, 5745 MHz, zoomed

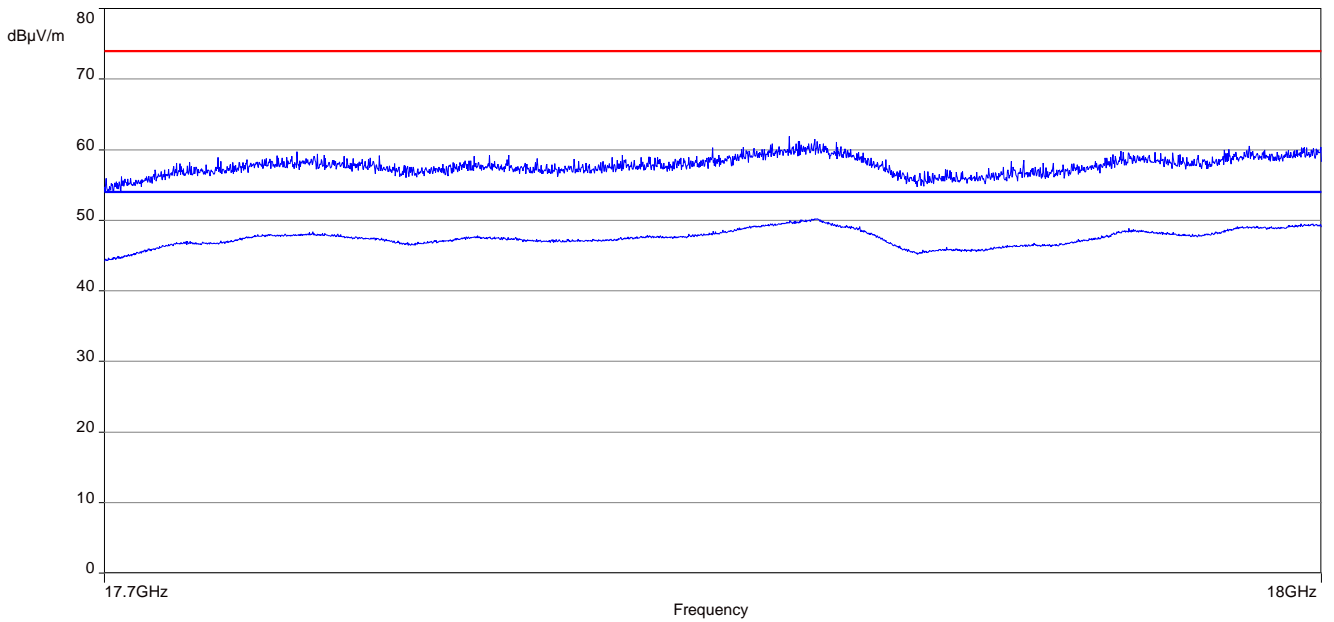


Plot 29: 18 GHz to 26 GHz, 5745 MHz, vertical & horizontal polarization

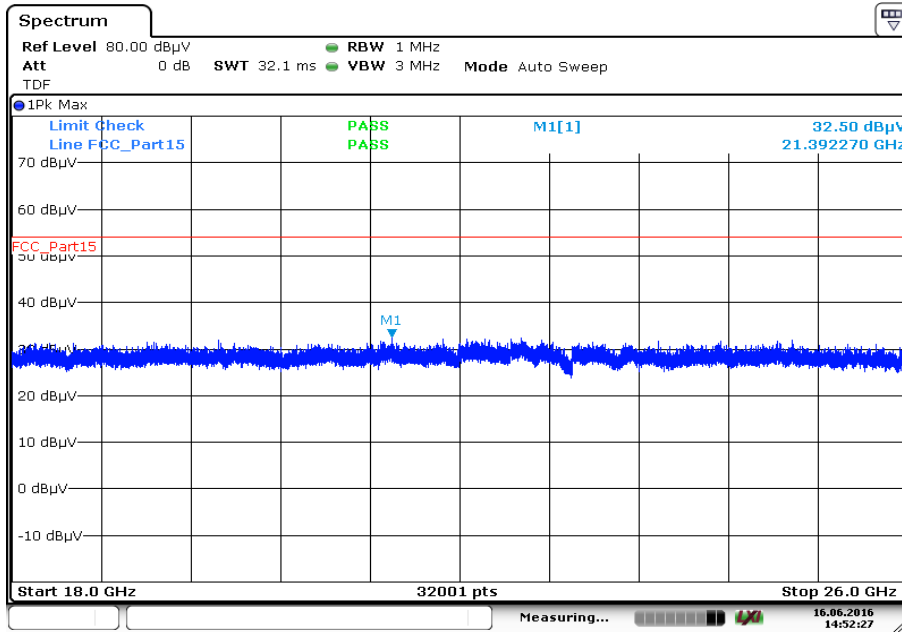


Date: 16.JUN.2016 14:52:27

Plot 30: 26 GHz to 40 GHz, 5745 MHz, vertical & horizontal polarization

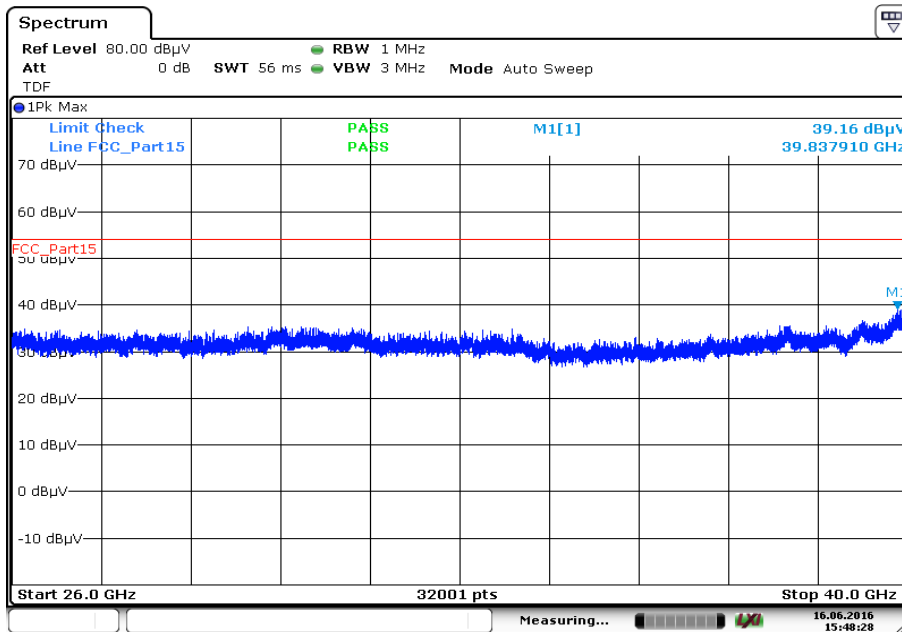

Date: 16.JUN.2016 15:48:28

**Plot 31:** 30 MHz to 1 GHz, 5785 MHz, vertical & horizontal polarization

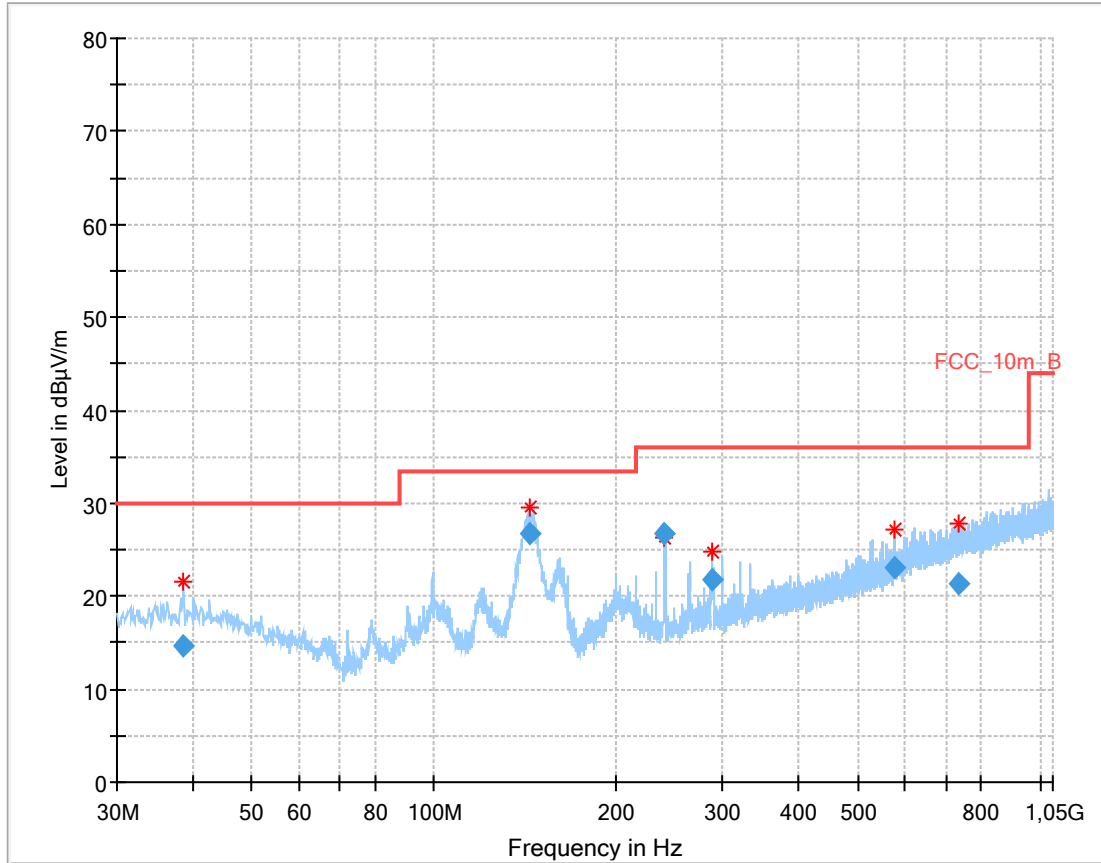


**Final\_Result:**


| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 38.680650       | 14.64              | 30.00          | 15.36       | 1000.0          | 120.000         | 179.0       | V   | 172.0         | 14.0       |
| 143.505000      | 26.65              | 33.50          | 6.85        | 1000.0          | 120.000         | 98.0        | V   | 303.0         | 8.8        |
| 239.859900      | 26.70              | 36.00          | 9.30        | 1000.0          | 120.000         | 180.0       | H   | 272.0         | 13.0       |
| 287.632500      | 21.79              | 36.00          | 14.21       | 1000.0          | 120.000         | 98.0        | V   | 288.0         | 14.2       |
| 576.456150      | 23.17              | 36.00          | 12.83       | 1000.0          | 120.000         | 185.0       | H   | 180.0         | 20.1       |
| 734.248950      | 21.42              | 36.00          | 14.58       | 1000.0          | 120.000         | 98.0        | H   | 91.0          | 22.3       |




**Plot 32:** 1 GHz to 18 GHz, 5785 MHz, vertical & horizontal polarization

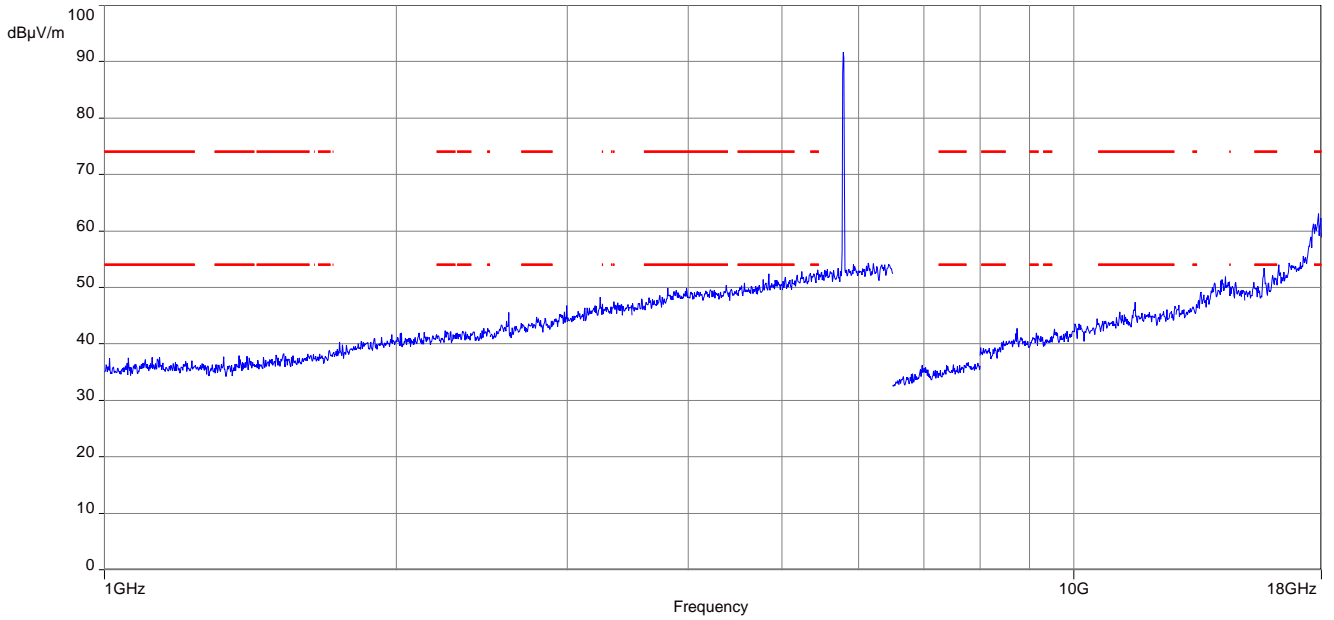

**Plot 33:** 17.7 GHz to 18 GHz, 5785 MHz, zoomed

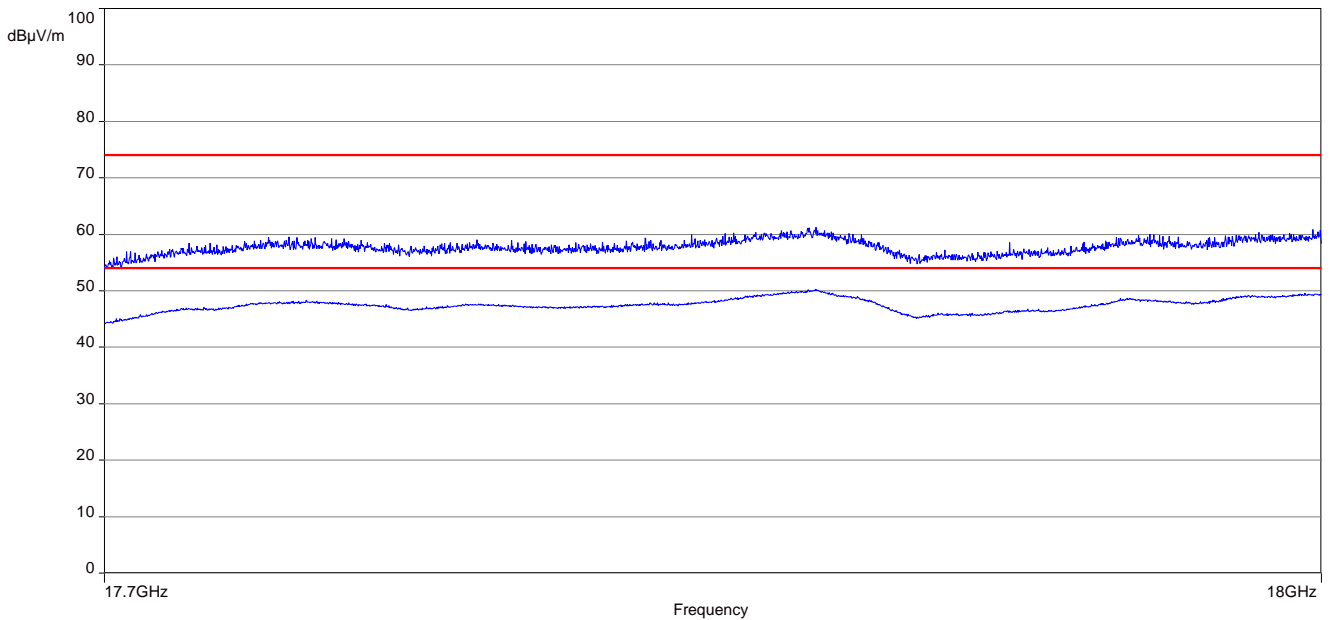


Plot 34: 18 GHz to 26 GHz, 5785 MHz, vertical & horizontal polarization

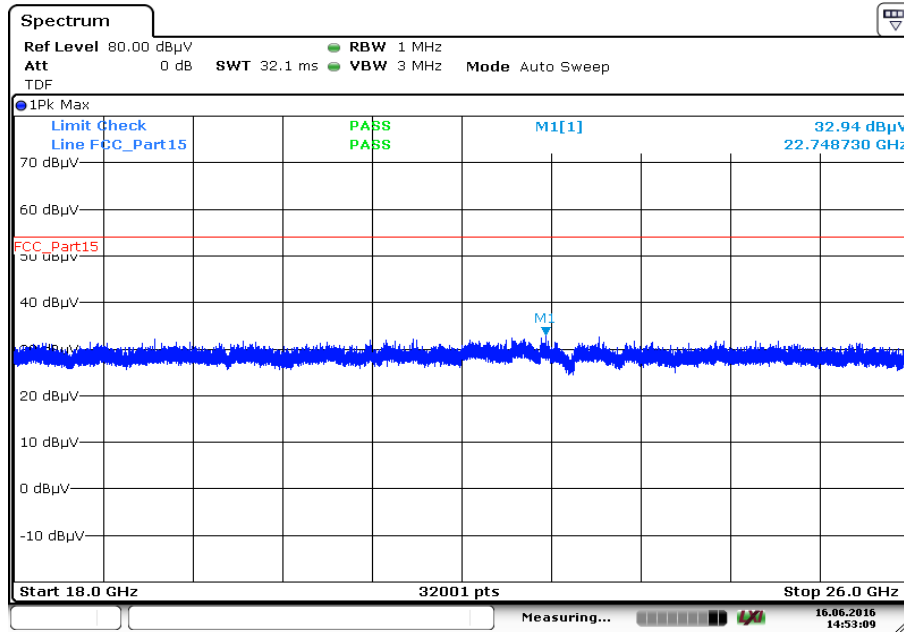


Date: 16.JUN.2016 14:53:09

Plot 35: 26 GHz to 40 GHz, 5785 MHz, vertical & horizontal polarization

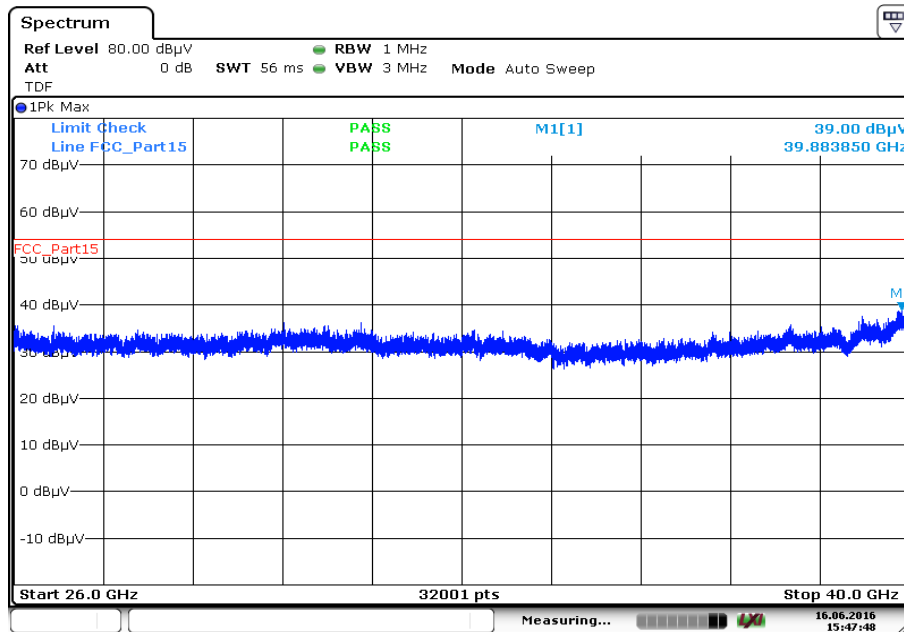

Date: 16.JUN.2016 15:47:48


**Plot 36:** 30 MHz to 1 GHz, 5825 MHz, vertical & horizontal polarization

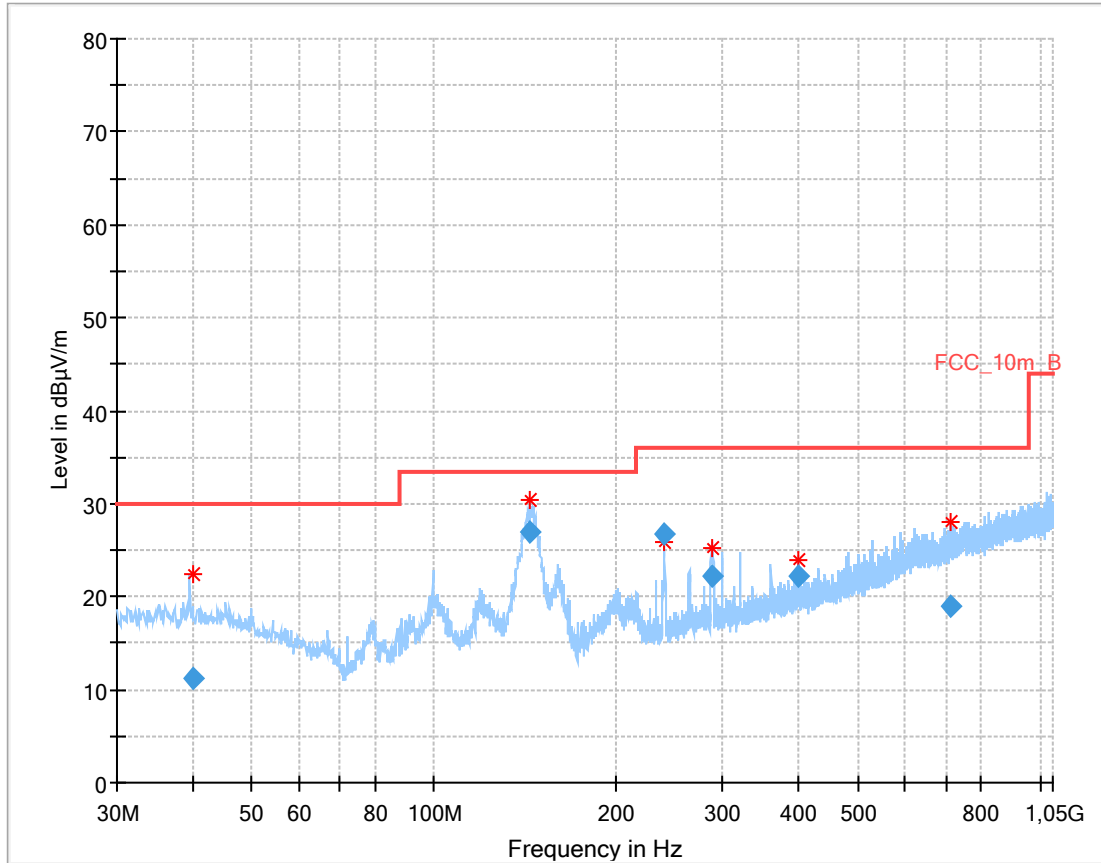


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 40.030350       | 11.16              | 30.00          | 18.84       | 1000.0          | 120.000         | 98.0        | V   | 151.0         | 14.0       |
| 143.897700      | 26.98              | 33.50          | 6.52        | 1000.0          | 120.000         | 179.0       | V   | 281.0         | 8.8        |
| 240.041850      | 26.82              | 36.00          | 9.18        | 1000.0          | 120.000         | 179.0       | H   | 266.0         | 13.0       |
| 286.923750      | 22.19              | 36.00          | 13.81       | 1000.0          | 120.000         | 98.0        | V   | 335.0         | 14.2       |
| 400.013850      | 22.13              | 36.00          | 13.87       | 1000.0          | 120.000         | 185.0       | H   | 105.0         | 16.9       |
| 712.193550      | 18.99              | 36.00          | 17.01       | 1000.0          | 120.000         | 178.0       | H   | 301.0         | 21.8       |


**Plot 37:** 1 GHz to 18 GHz, 5825 MHz, vertical & horizontal polarization

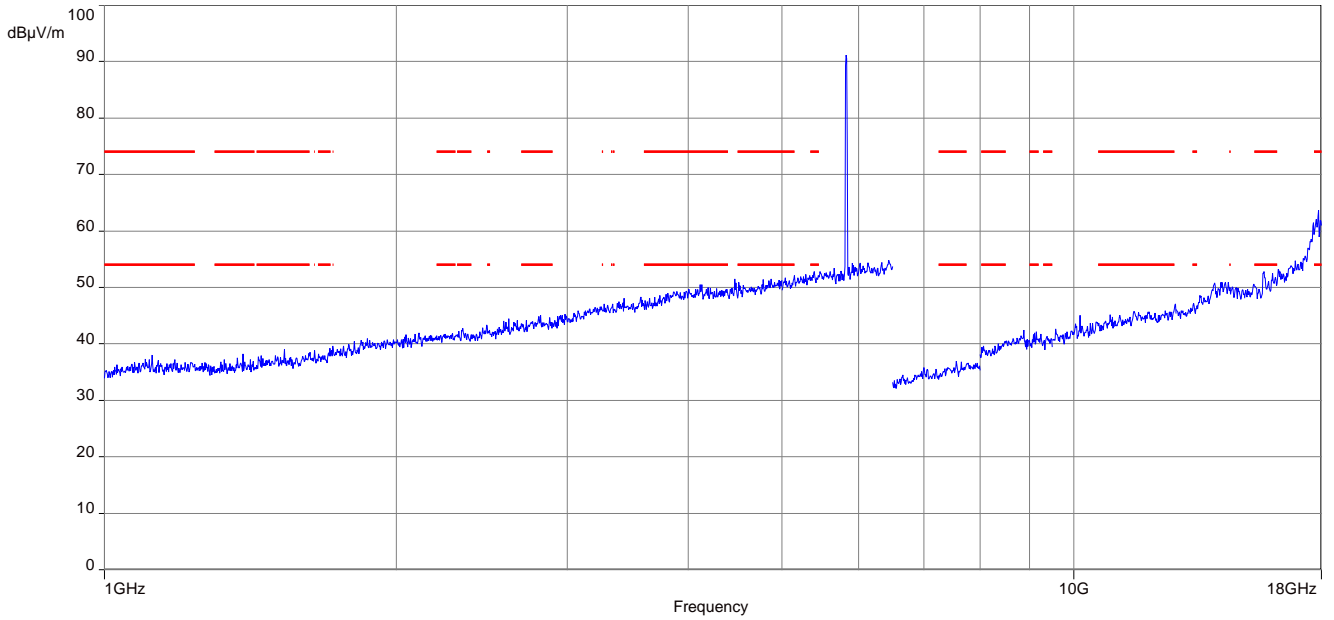

**Plot 38:** 17.7 GHz to 18 GHz, 5825 MHz, zoomed

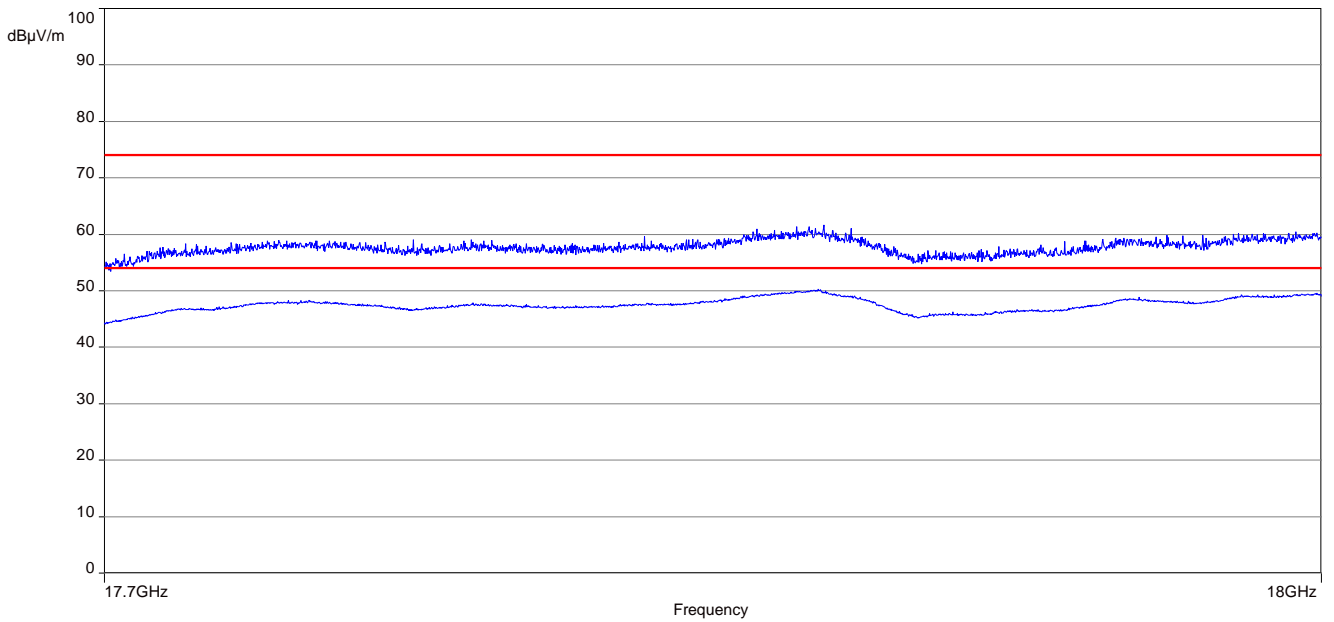


Plot 39: 18 GHz to 26 GHz, 5825 MHz, vertical & horizontal polarization

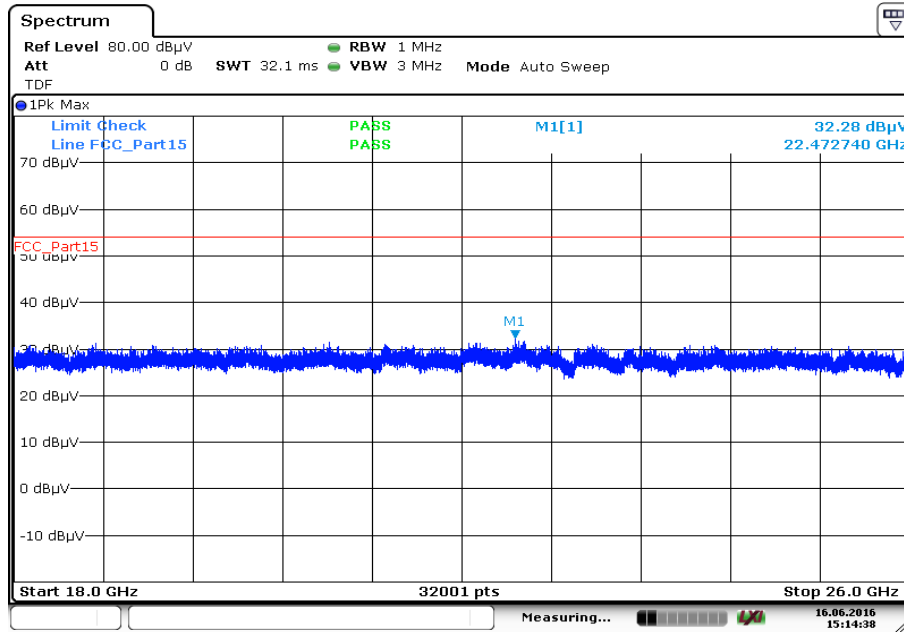

Date: 16.JUN.2016 15:14:38


Plot 40: 26 GHz to 40 GHz, 5825 MHz, vertical & horizontal polarization

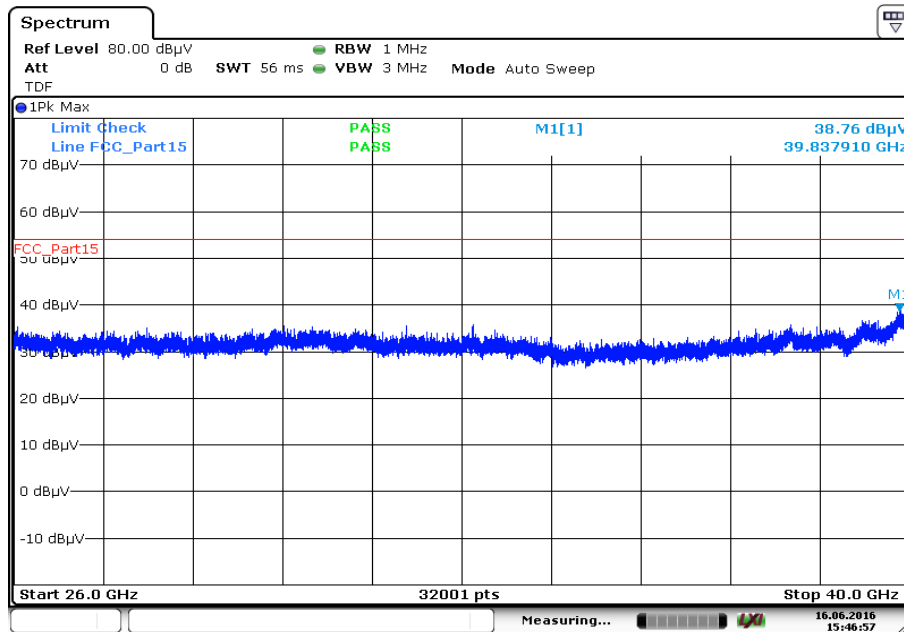

Date: 16.JUN.2016 15:46:57

**Plots:** OFDM / ANT 2


**Plot 1:** 30 MHz to 1 GHz, 5180 MHz, vertical & horizontal polarization

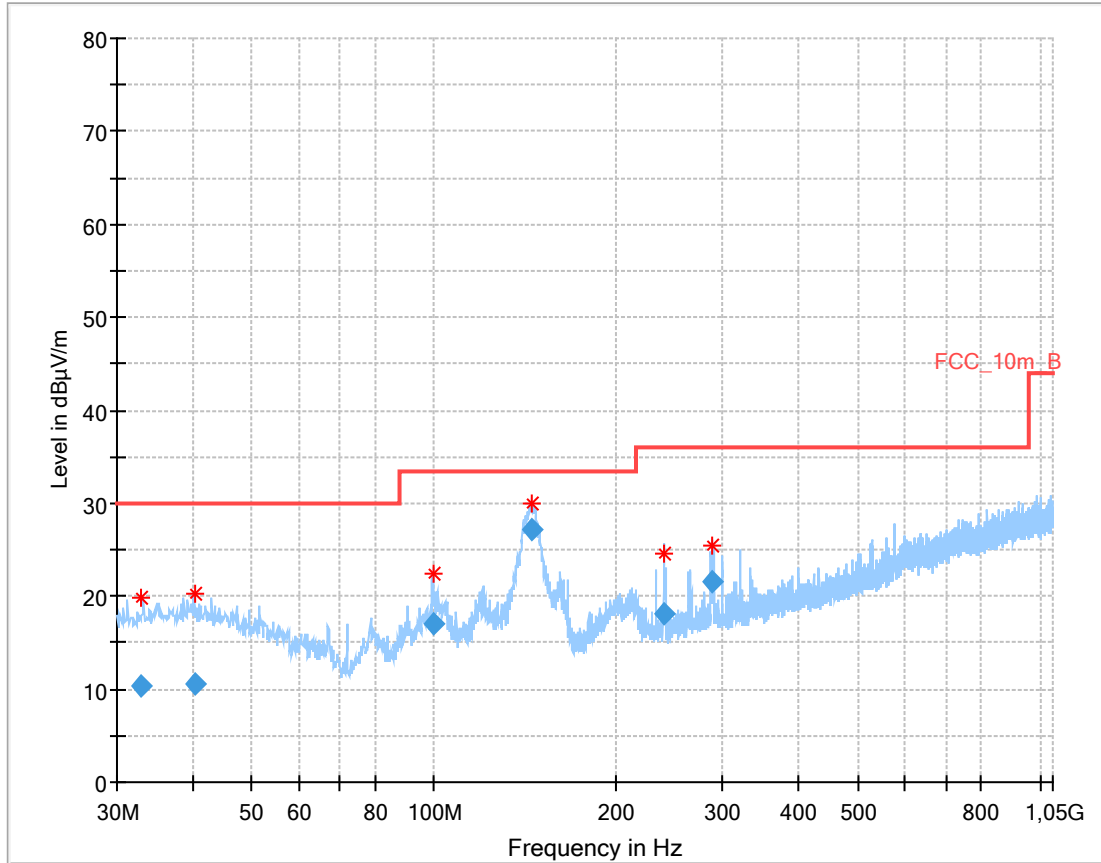


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 32.980050       | 10.42              | 30.00          | 19.58       | 1000.0          | 120.000         | 179.0       | V   | 350.0         | 13.6       |
| 40.448850       | 10.63              | 30.00          | 19.37       | 1000.0          | 120.000         | 185.0       | H   | 0.0           | 14.0       |
| 99.638850       | 17.00              | 33.50          | 16.50       | 1000.0          | 120.000         | 98.0        | V   | 303.0         | 12.1       |
| 145.022100      | 27.24              | 33.50          | 6.26        | 1000.0          | 120.000         | 98.0        | V   | 264.0         | 8.8        |
| 239.891250      | 18.17              | 36.00          | 17.83       | 1000.0          | 120.000         | 98.0        | V   | 342.0         | 13.0       |
| 287.432850      | 21.67              | 36.00          | 14.33       | 1000.0          | 120.000         | 98.0        | V   | 323.0         | 14.2       |


**Plot 2:** 1 GHz to 18 GHz, 5180 MHz, vertical & horizontal polarization

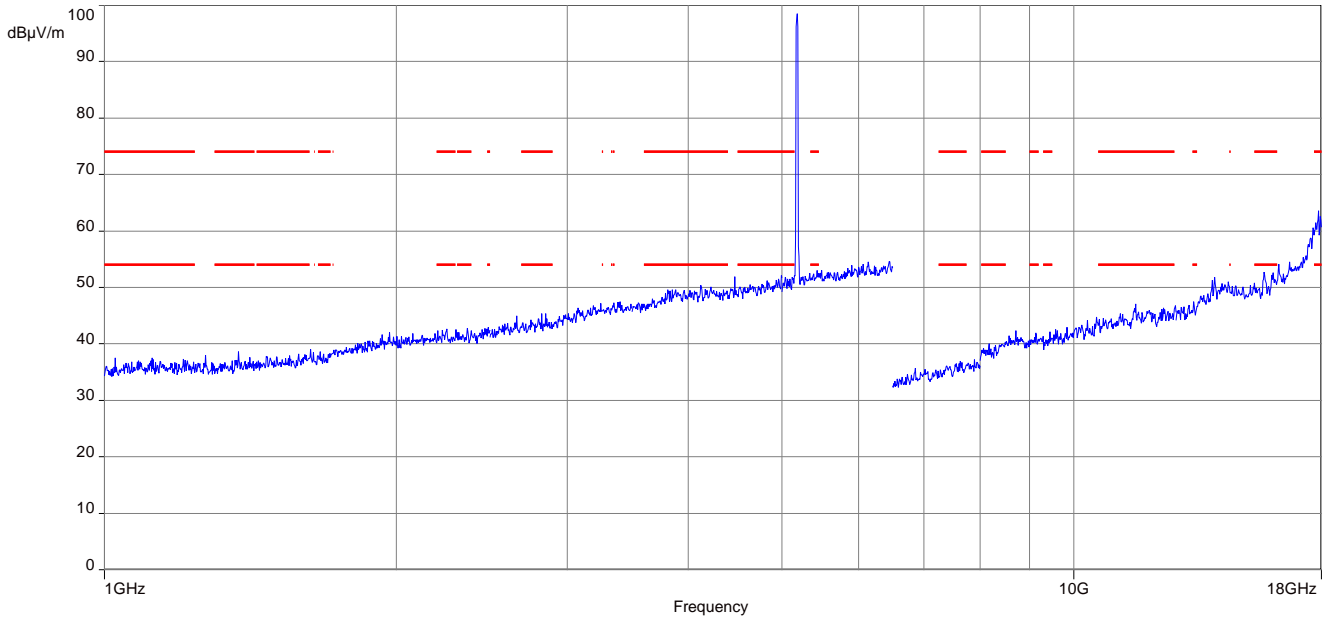


**Plot 3:** 17.7 GHz to 18 GHz, 5180 MHz, zoomed

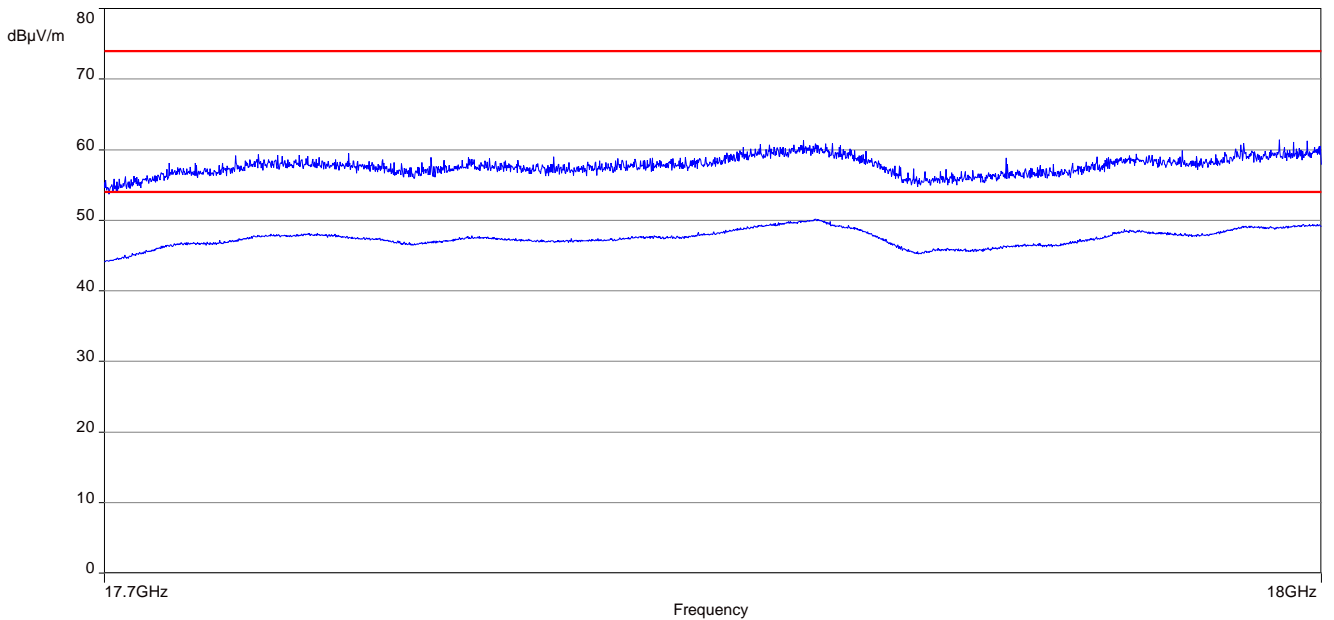

Plot 4: 18 GHz to 26 GHz, 5180 MHz, vertical & horizontal polarization

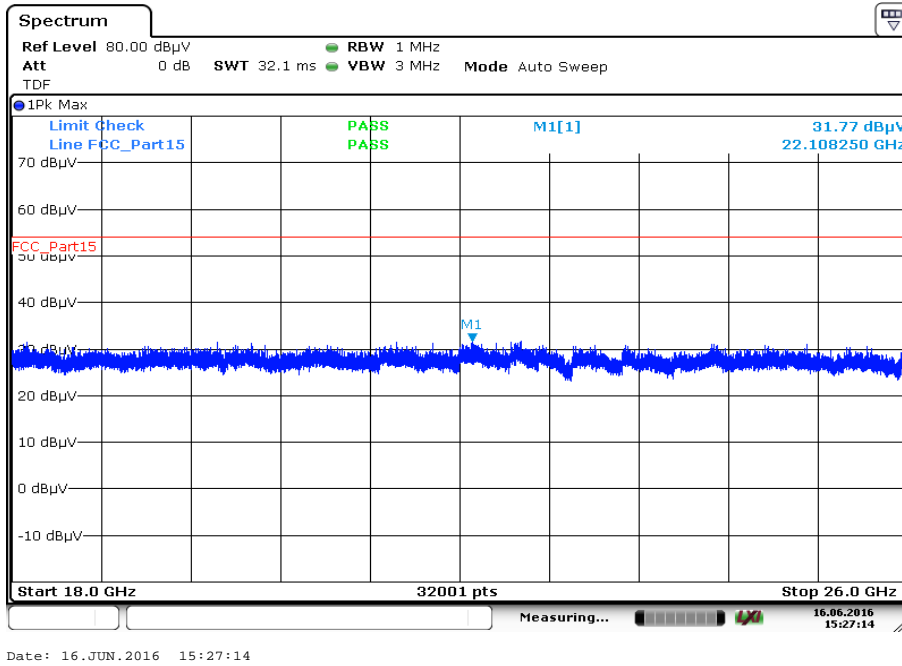


Plot 5: 26 GHz to 40 GHz, 5180 MHz, vertical & horizontal polarization

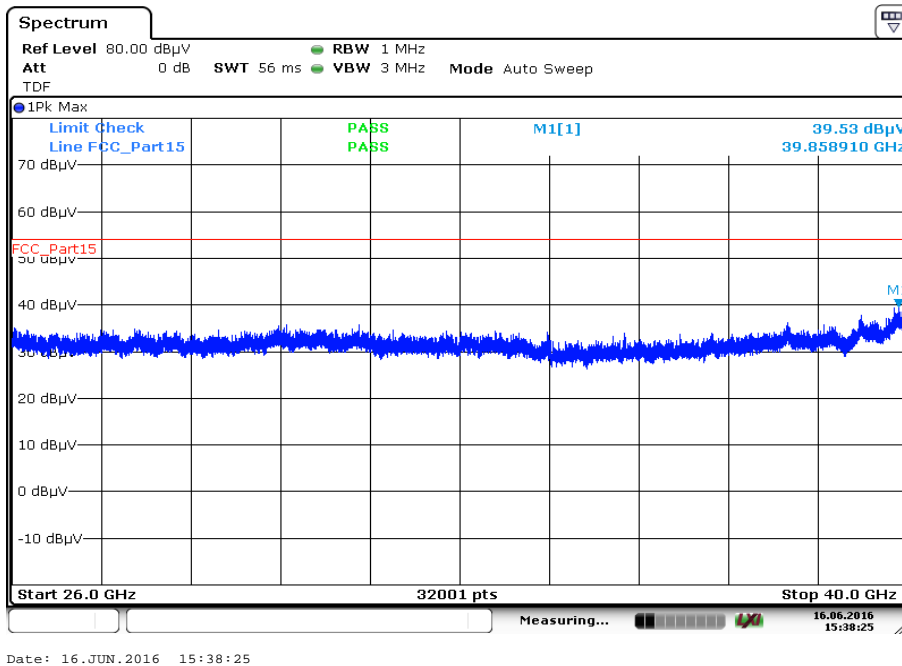




**Plot 6:** 30 MHz to 1 GHz, 5320 MHz, vertical & horizontal polarization

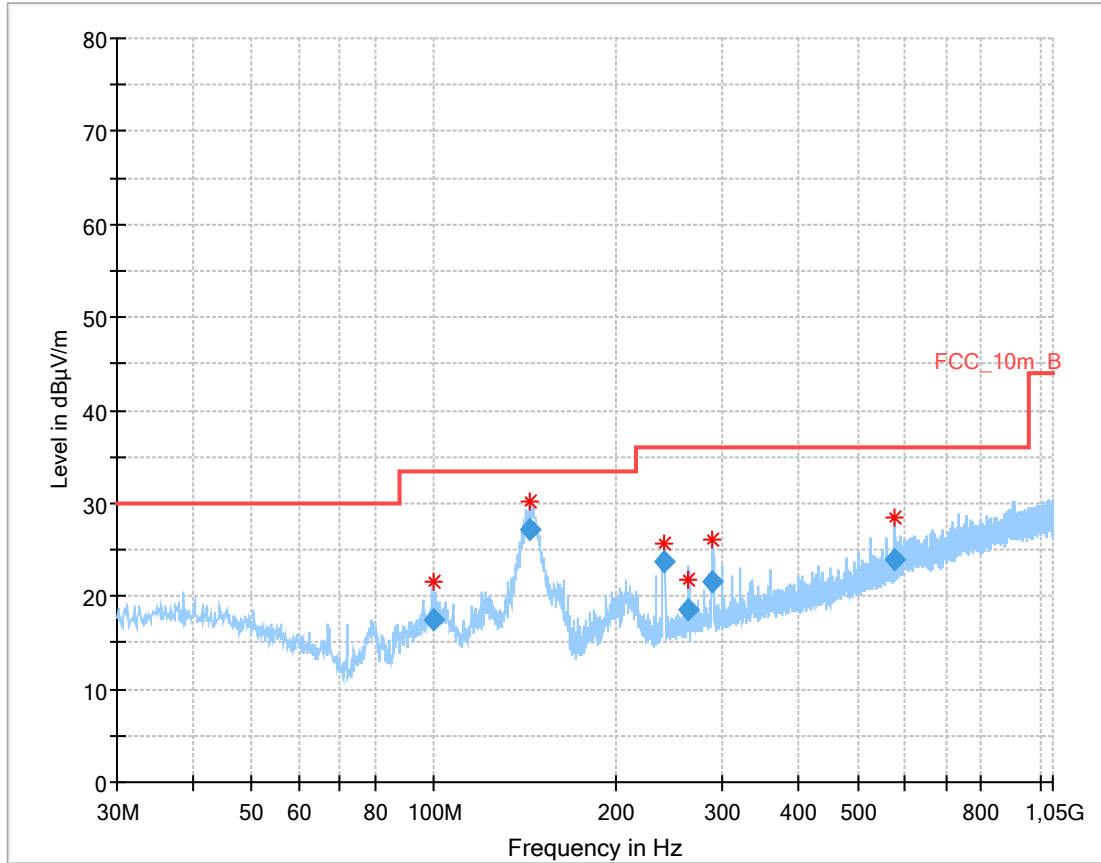


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 99.613050       | 17.55              | 33.50          | 15.95       | 1000.0          | 120.000         | 101.0       | V   | 307.0         | 12.1       |
| 143.934600      | 27.27              | 33.50          | 6.23        | 1000.0          | 120.000         | 98.0        | V   | 270.0         | 8.8        |
| 239.689650      | 23.64              | 36.00          | 12.36       | 1000.0          | 120.000         | 180.0       | H   | 270.0         | 13.0       |
| 263.537400      | 18.63              | 36.00          | 17.37       | 1000.0          | 120.000         | 101.0       | V   | 334.0         | 13.7       |
| 287.965350      | 21.63              | 36.00          | 14.37       | 1000.0          | 120.000         | 98.0        | V   | 196.0         | 14.2       |
| 575.062350      | 23.91              | 36.00          | 12.09       | 1000.0          | 120.000         | 185.0       | H   | 165.0         | 20.0       |


**Plot 7:** 1 GHz to 18 GHz, 5320 MHz, vertical & horizontal polarization

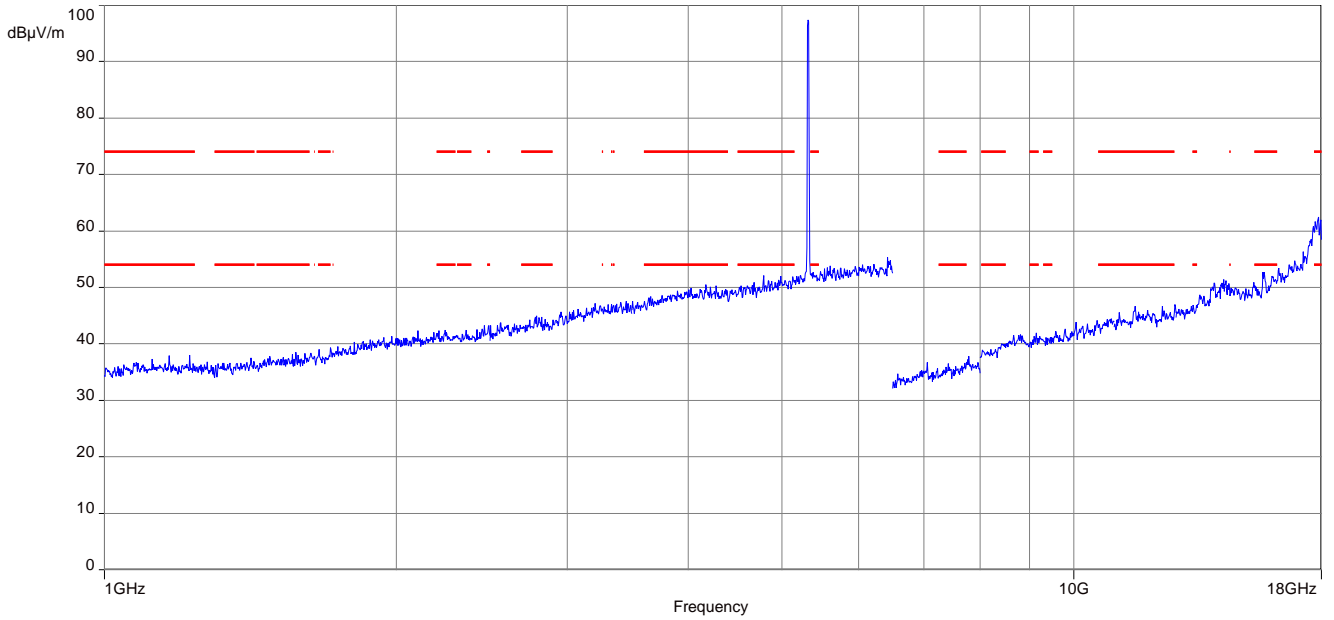

**Plot 8:** 17.7 GHz to 18 GHz, 5320 MHz, zoomed

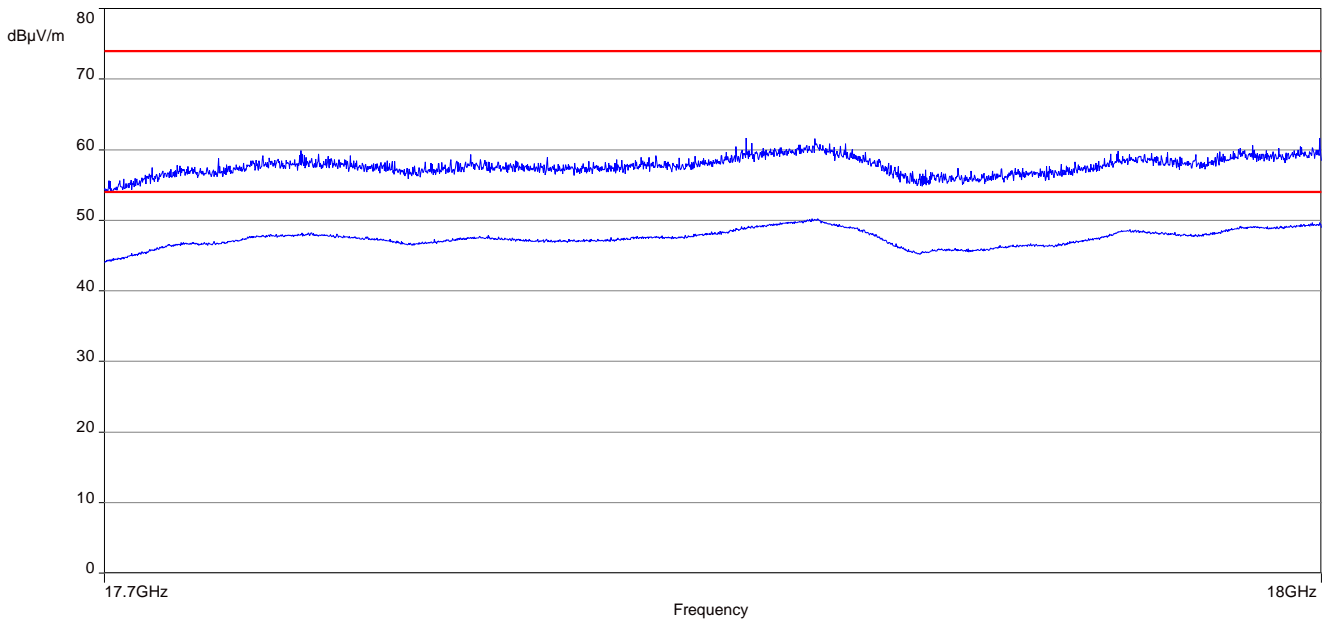


**Plot 9:** 18 GHz to 26 GHz, 5320 MHz, vertical & horizontal polarization

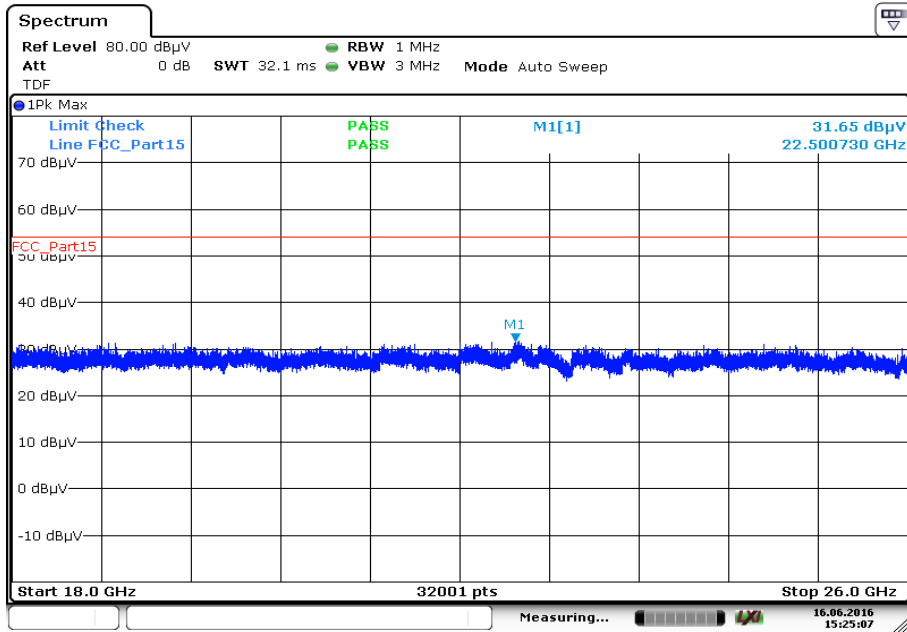


Date: 16.JUN.2016 15:25:07

**Plot 10:** 26 GHz to 40 GHz, 5320 MHz, vertical & horizontal polarization

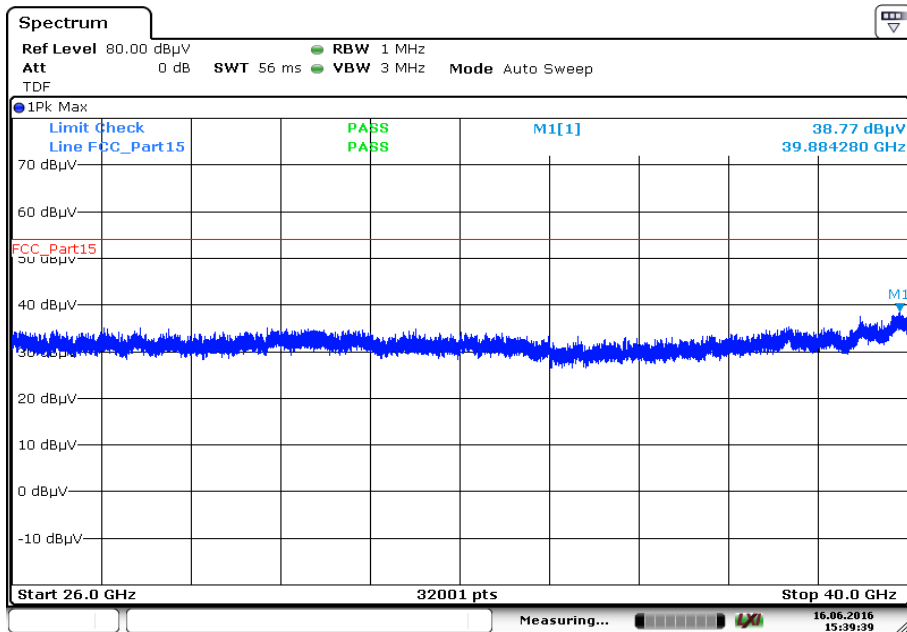

Date: 16.JUN.2016 15:39:39


Plot 11: 30 MHz to 1 GHz, 5500 MHz, vertical & horizontal polarization

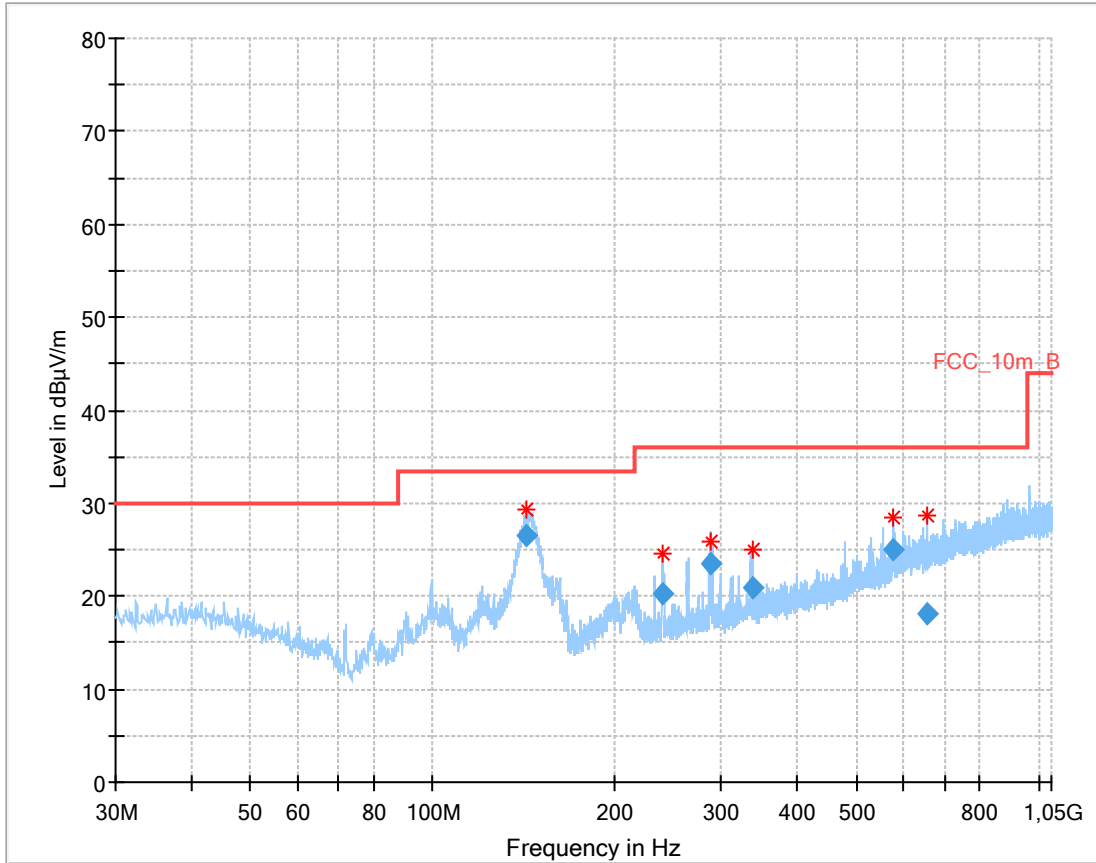


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 143.165250      | 26.59              | 33.50          | 6.91        | 1000.0          | 120.000         | 98.0        | V   | 207.0         | 8.8        |
| 239.954550      | 20.36              | 36.00          | 15.64       | 1000.0          | 120.000         | 98.0        | V   | 345.0         | 13.0       |
| 287.507700      | 23.52              | 36.00          | 12.48       | 1000.0          | 120.000         | 98.0        | V   | 1.0           | 14.2       |
| 336.515250      | 20.97              | 36.00          | 15.03       | 1000.0          | 120.000         | 98.0        | V   | 8.0           | 15.6       |
| 576.060150      | 24.95              | 36.00          | 11.05       | 1000.0          | 120.000         | 101.0       | H   | 167.0         | 20.0       |
| 654.555900      | 18.17              | 36.00          | 17.83       | 1000.0          | 120.000         | 185.0       | V   | 282.0         | 21.2       |


**Plot 12:** 1 GHz to 18 GHz, 5500 MHz, vertical & horizontal polarization

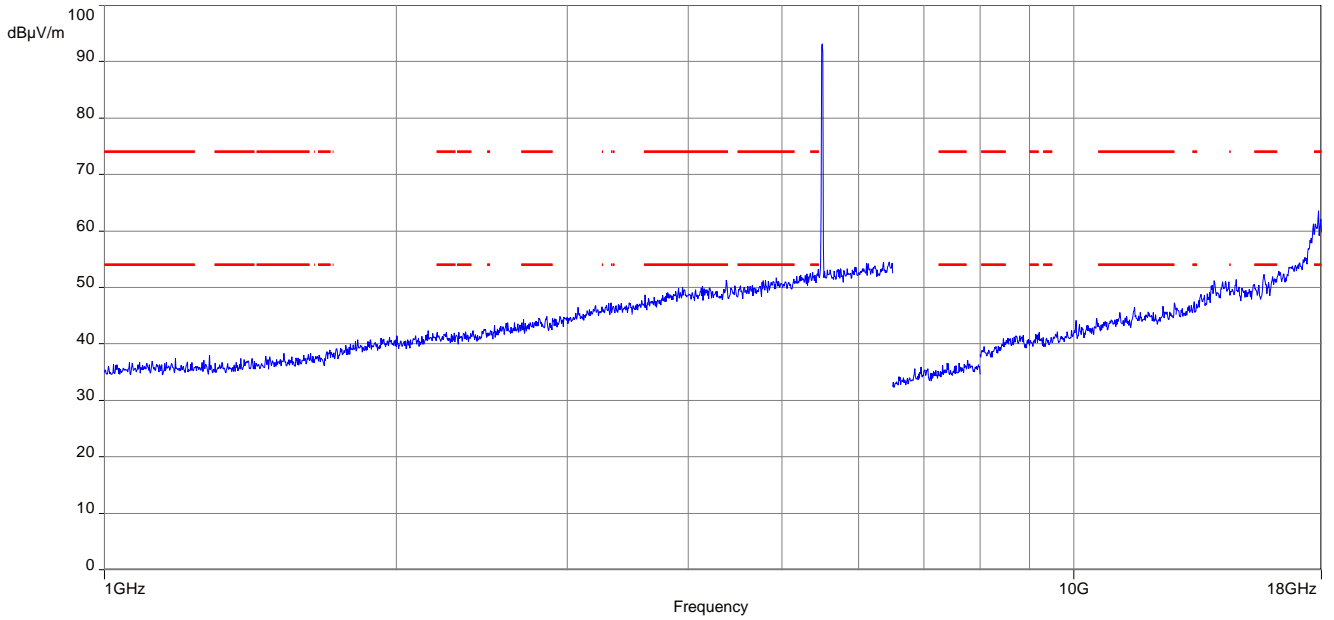

**Plot 13:** 17.7 GHz to 18 GHz, 5500 MHz, zoomed

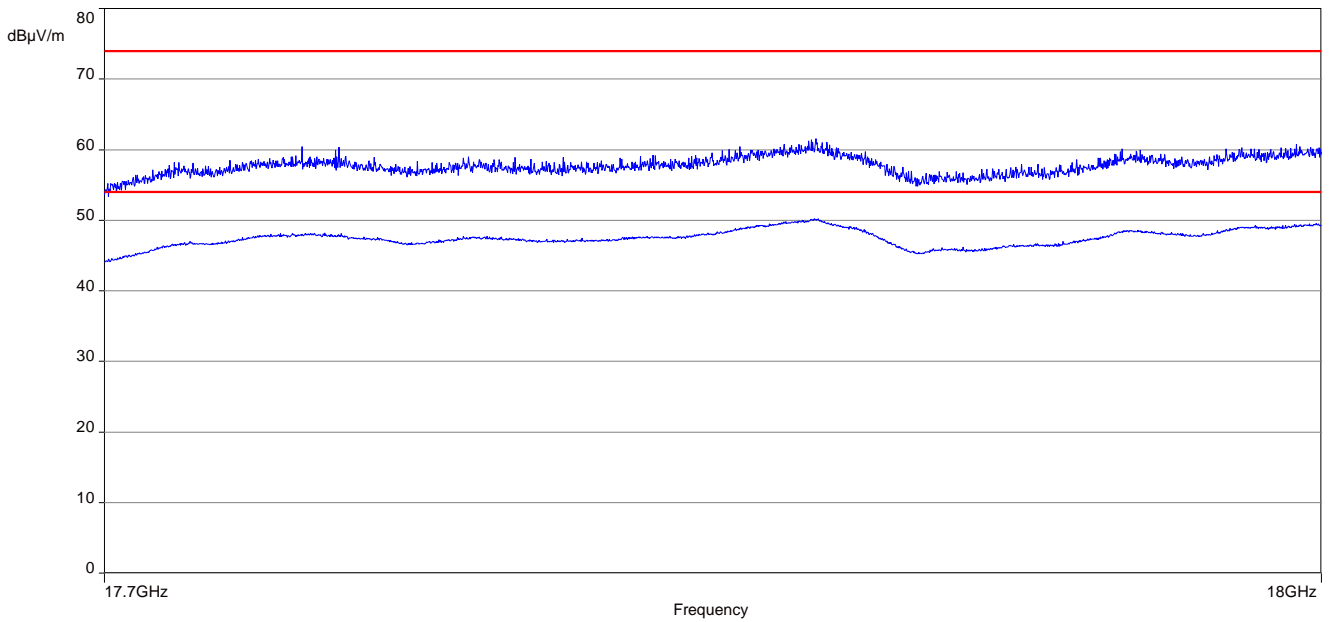


Plot 14: 18 GHz to 26 GHz, 5500 MHz, vertical & horizontal polarization

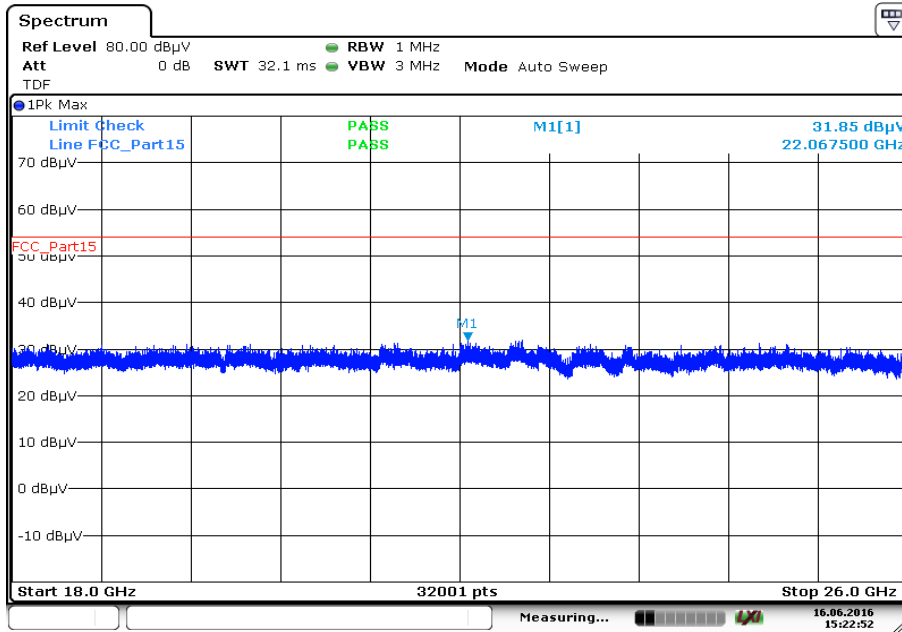


Date: 16.JUN.2016 15:22:52

Plot 15: 26 GHz to 40 GHz, 5500 MHz, vertical & horizontal polarization

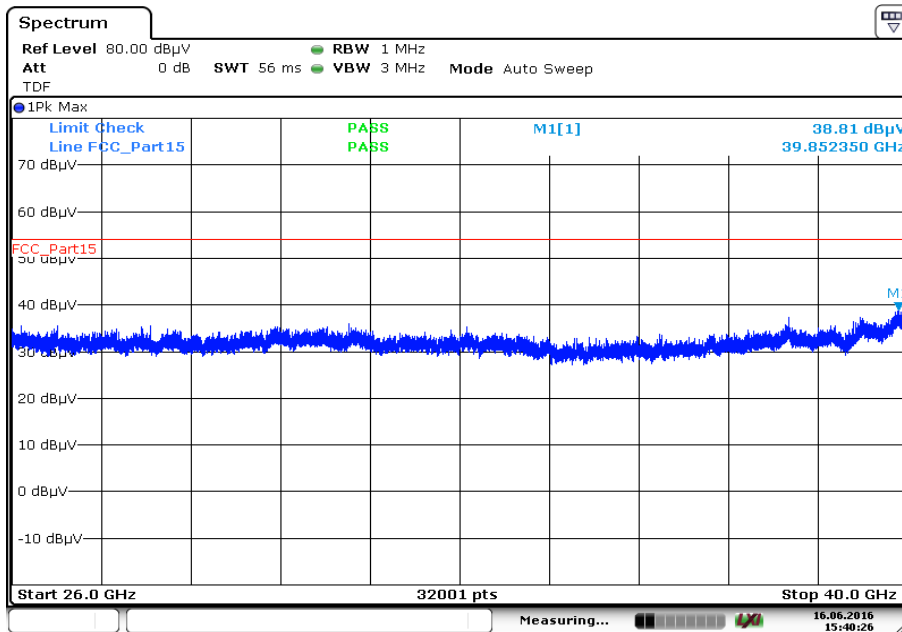

Date: 16.JUN.2016 15:40:26


Plot 16: 30 MHz to 1 GHz, 5600 MHz, vertical & horizontal polarization

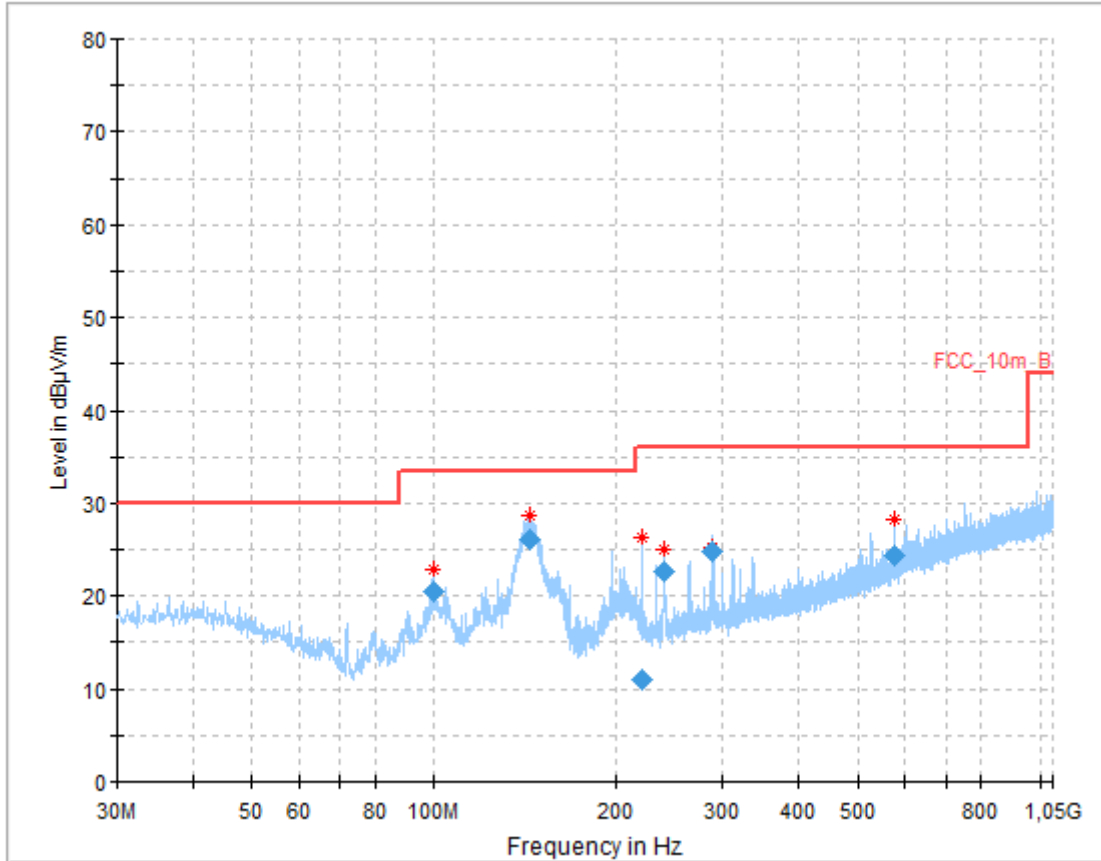


Final\_Result:

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 99.765150       | 20.43              | 33.50          | 13.07       | 1000.0          | 120.000         | 98.0        | V   | 289.0         | 12.1       |
| 143.473650      | 26.11              | 33.50          | 7.39        | 1000.0          | 120.000         | 98.0        | V   | 269.0         | 8.8        |
| 220.444500      | 11.10              | 36.00          | 24.90       | 1000.0          | 120.000         | 98.0        | V   | 277.0         | 12.4       |
| 240.249300      | 22.57              | 36.00          | 13.43       | 1000.0          | 120.000         | 98.0        | V   | 340.0         | 13.1       |
| 288.181500      | 24.85              | 36.00          | 11.15       | 1000.0          | 120.000         | 98.0        | V   | 351.0         | 14.2       |
| 575.123100      | 24.26              | 36.00          | 11.74       | 1000.0          | 120.000         | 101.0       | H   | 173.0         | 20.0       |

**Plot 17:** 1 GHz to 18 GHz, 5600 MHz, vertical & horizontal polarization

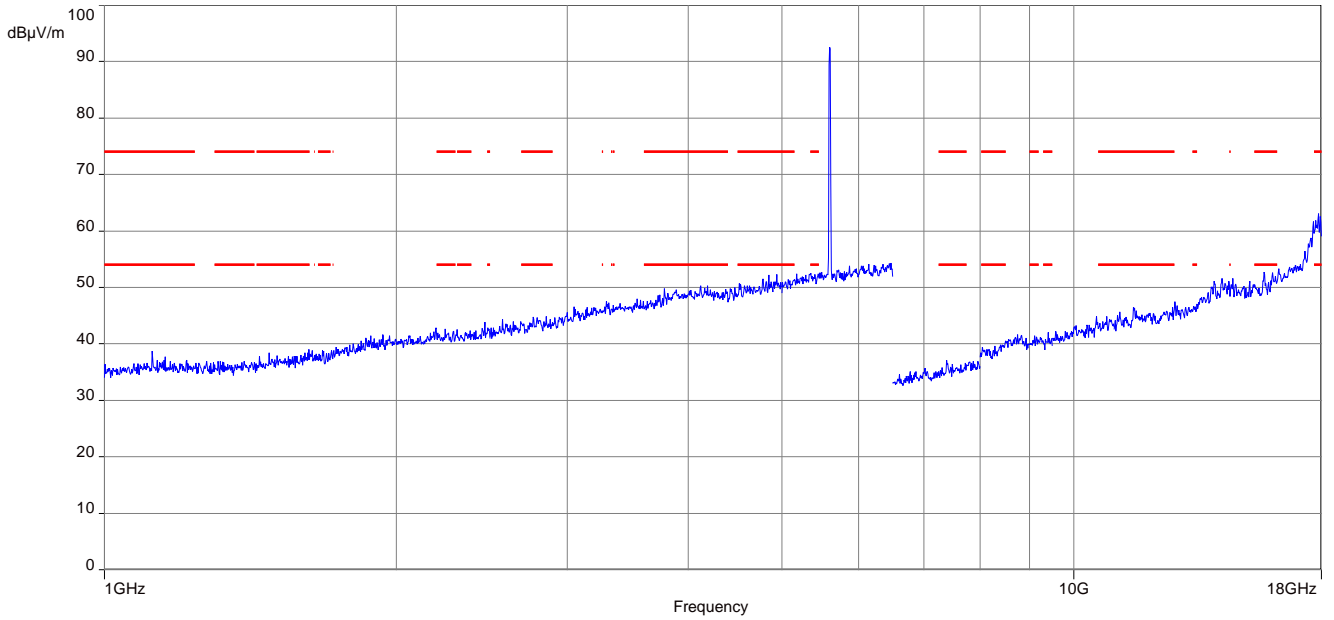


**Plot 18:** 17.7 GHz to 18 GHz, 5600 MHz, zoomed

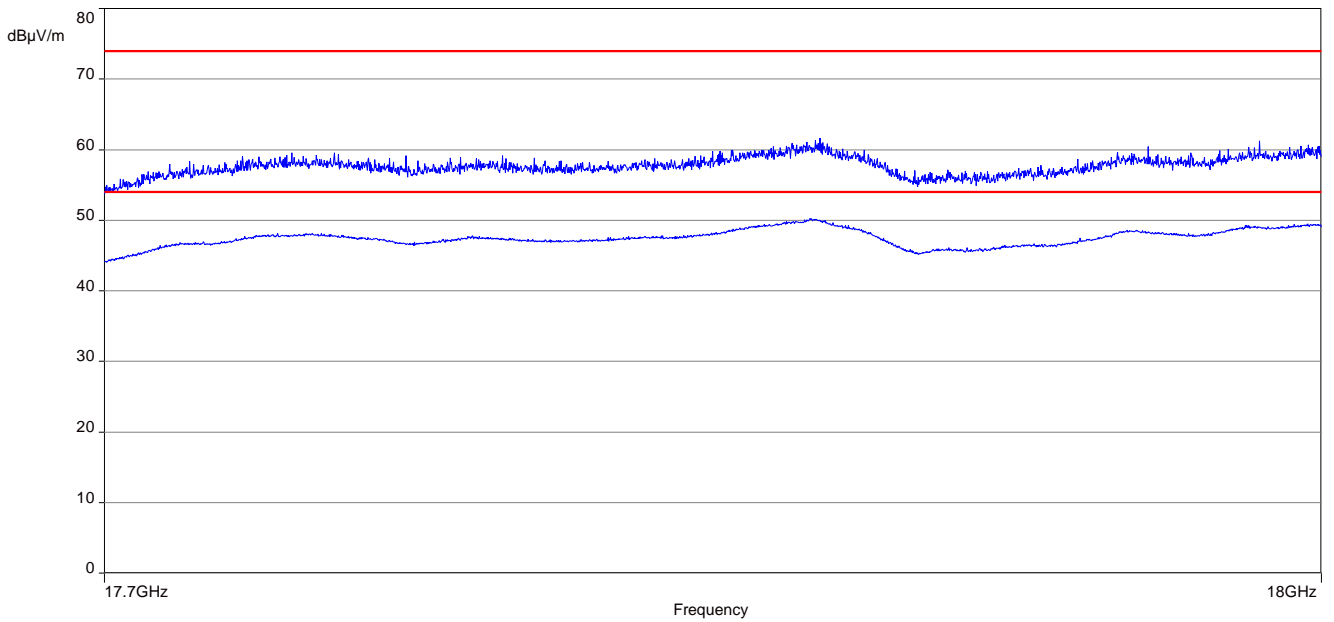




Plot 19: 18 GHz to 26 GHz, 5600 MHz, vertical & horizontal polarization

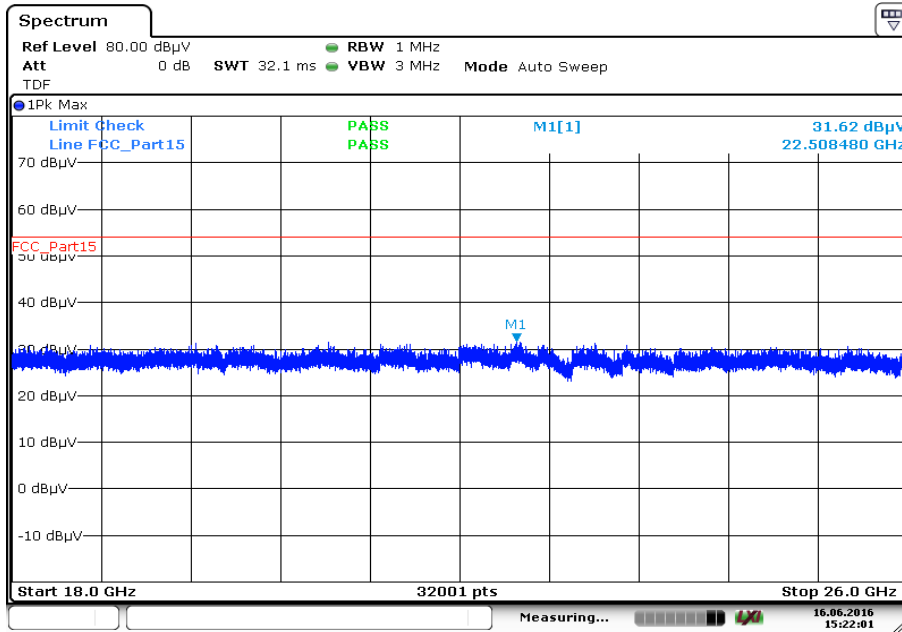


Date: 16.JUN.2016 15:22:01

Plot 20: 26 GHz to 40 GHz, 5600 MHz, vertical & horizontal polarization

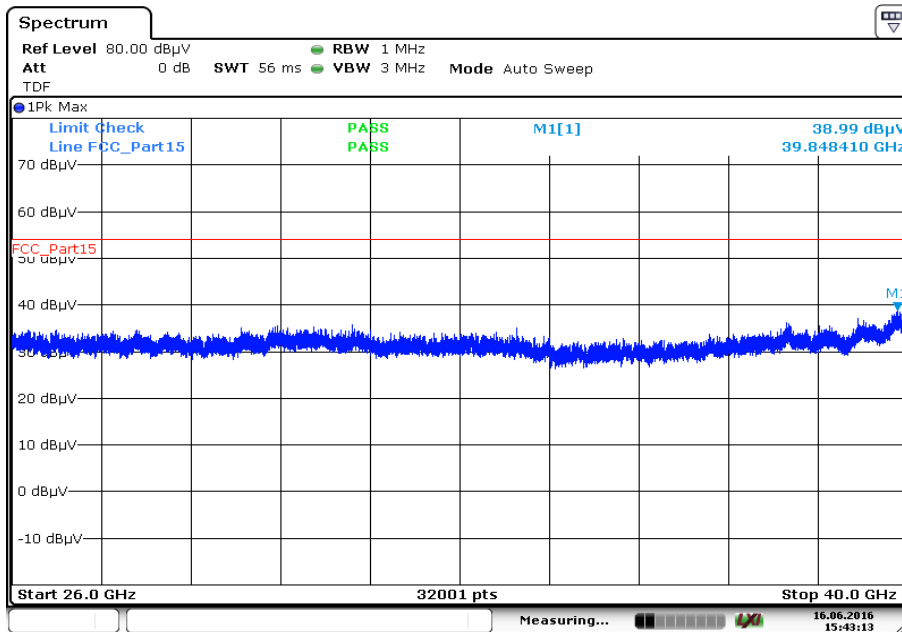

Date: 16.JUN.2016 15:43:13


**Plot 21:** 30 MHz to 1 GHz, 5700 MHz, vertical & horizontal polarization

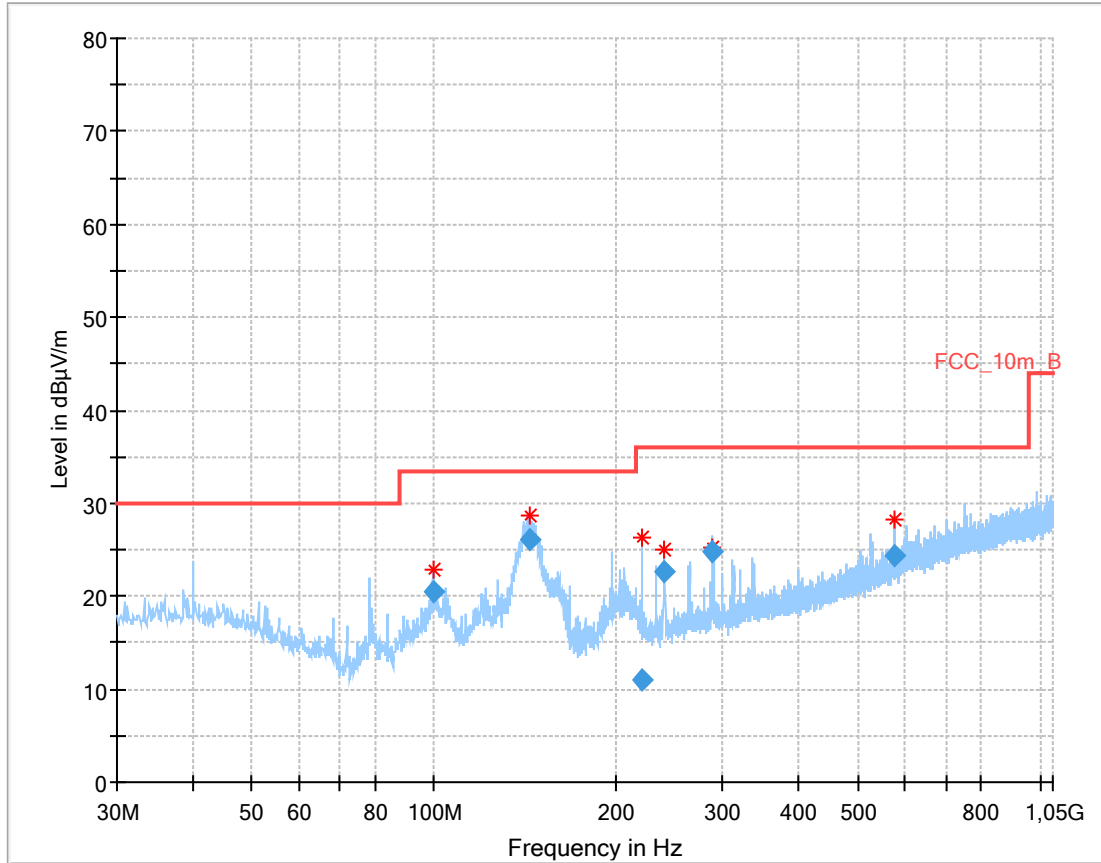


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 99.765150       | 20.43              | 33.50          | 13.07       | 1000.0          | 120.000         | 98.0        | V   | 289.0         | 12.1       |
| 143.473650      | 26.11              | 33.50          | 7.39        | 1000.0          | 120.000         | 98.0        | V   | 269.0         | 8.8        |
| 220.444500      | 11.10              | 36.00          | 24.90       | 1000.0          | 120.000         | 98.0        | V   | 277.0         | 12.4       |
| 240.249300      | 22.57              | 36.00          | 13.43       | 1000.0          | 120.000         | 98.0        | V   | 340.0         | 13.1       |
| 288.181500      | 24.85              | 36.00          | 11.15       | 1000.0          | 120.000         | 98.0        | V   | 351.0         | 14.2       |
| 575.123100      | 24.26              | 36.00          | 11.74       | 1000.0          | 120.000         | 101.0       | H   | 173.0         | 20.0       |


**Plot 22:** 1 GHz to 18 GHz, 5700 MHz, vertical & horizontal polarization

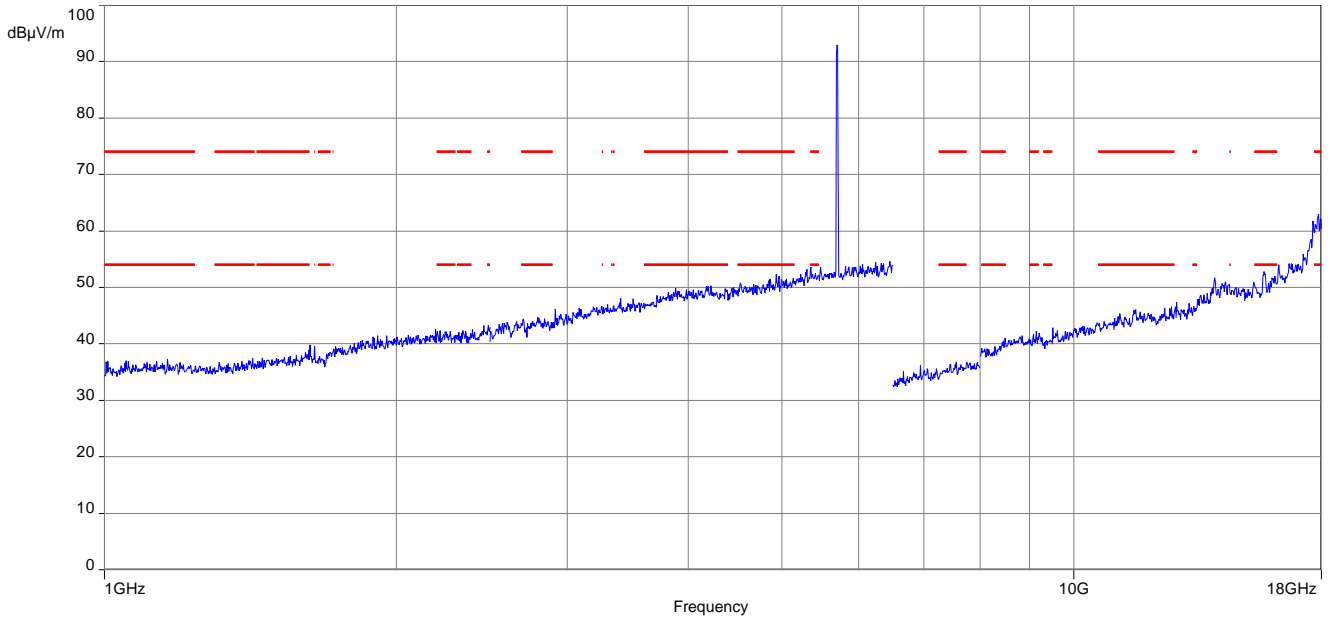


**Plot 23:** 17.7 GHz to 18 GHz, 5700 MHz, zoomed

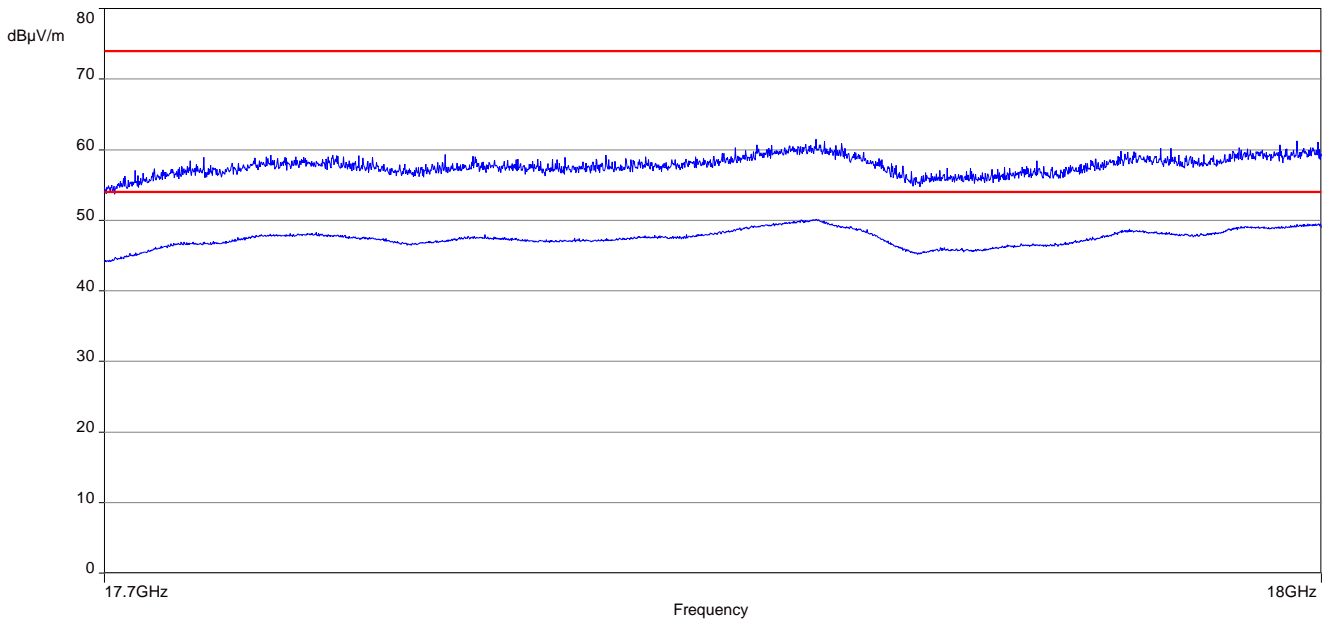


Plot 24: 18 GHz to 26 GHz, 5700 MHz, vertical & horizontal polarization

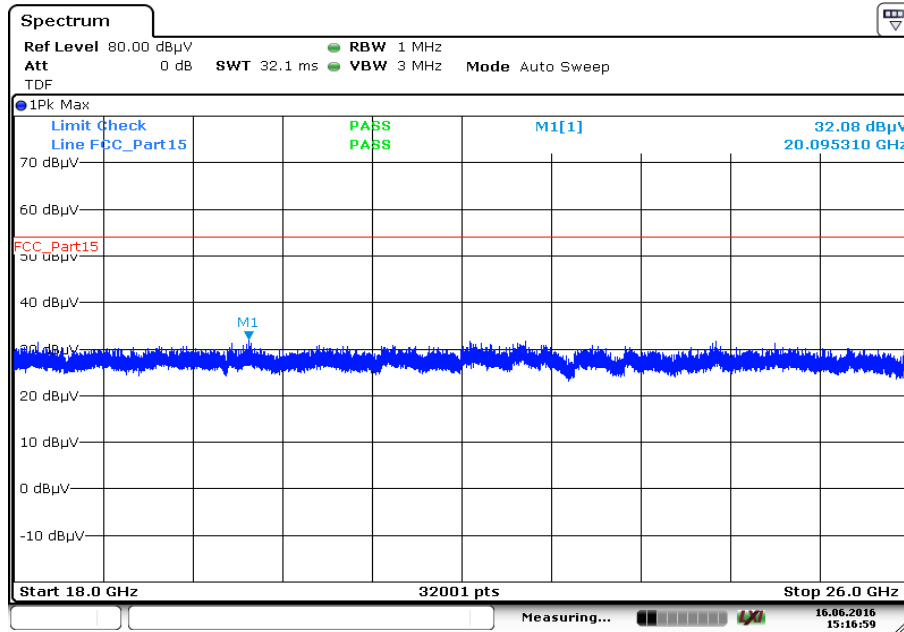

Plot 25: 26 GHz to 40 GHz, 5700 MHz, vertical & horizontal polarization

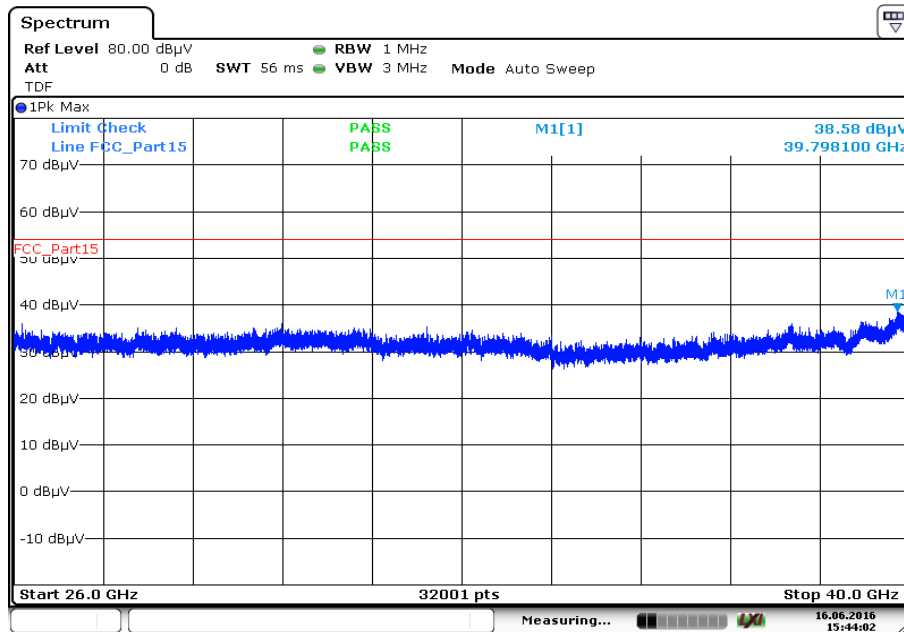


**Plot 26:** 30 MHz to 1 GHz, 5745 MHz, vertical & horizontal polarization

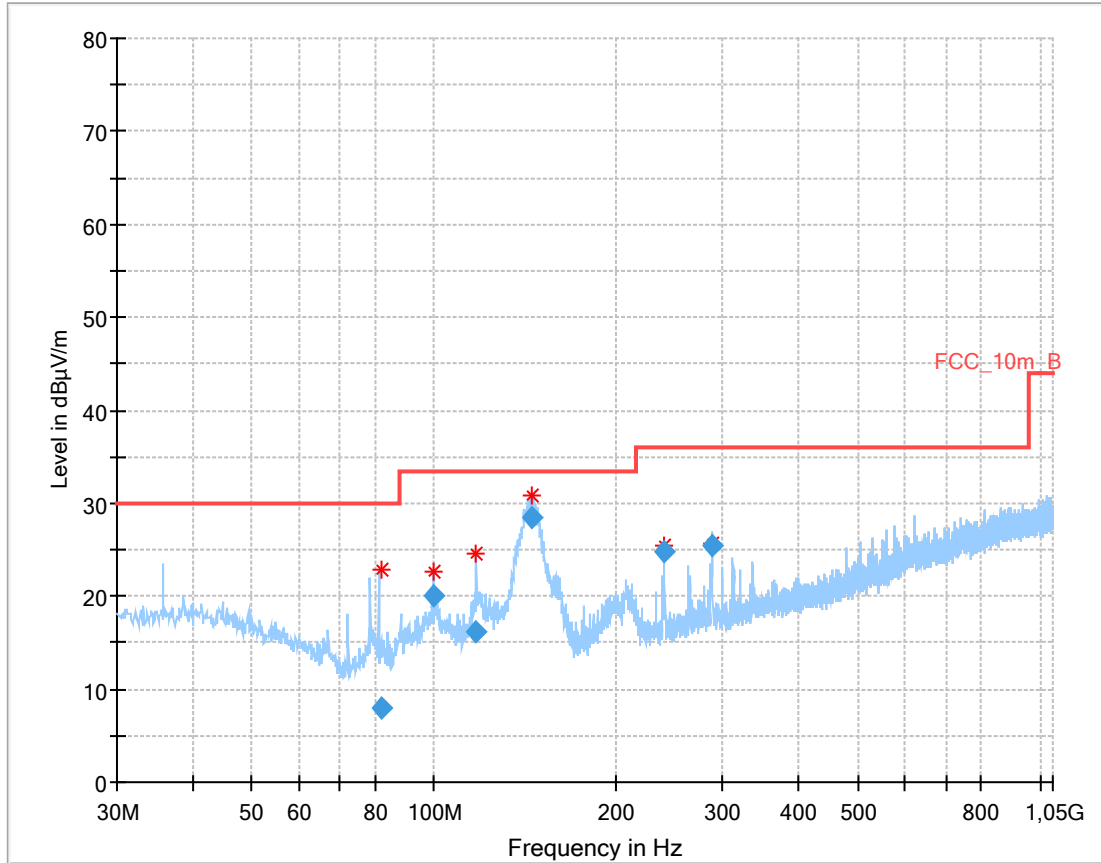


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 81.715950       | 8.04               | 30.00          | 21.96       | 1000.0          | 120.000         | 180.0       | V   | 274.0         | 8.5        |
| 99.761700       | 20.07              | 33.50          | 13.43       | 1000.0          | 120.000         | 98.0        | V   | 286.0         | 12.1       |
| 117.430200      | 16.15              | 33.50          | 17.35       | 1000.0          | 120.000         | 98.0        | V   | 286.0         | 10.4       |
| 144.685800      | 28.46              | 33.50          | 5.04        | 1000.0          | 120.000         | 98.0        | V   | 196.0         | 8.8        |
| 240.005100      | 24.81              | 36.00          | 11.19       | 1000.0          | 120.000         | 98.0        | V   | 351.0         | 13.0       |
| 287.572200      | 25.44              | 36.00          | 10.56       | 1000.0          | 120.000         | 98.0        | V   | 351.0         | 14.2       |


**Plot 27:** 1 GHz to 18 GHz, 5745 MHz, vertical & horizontal polarization

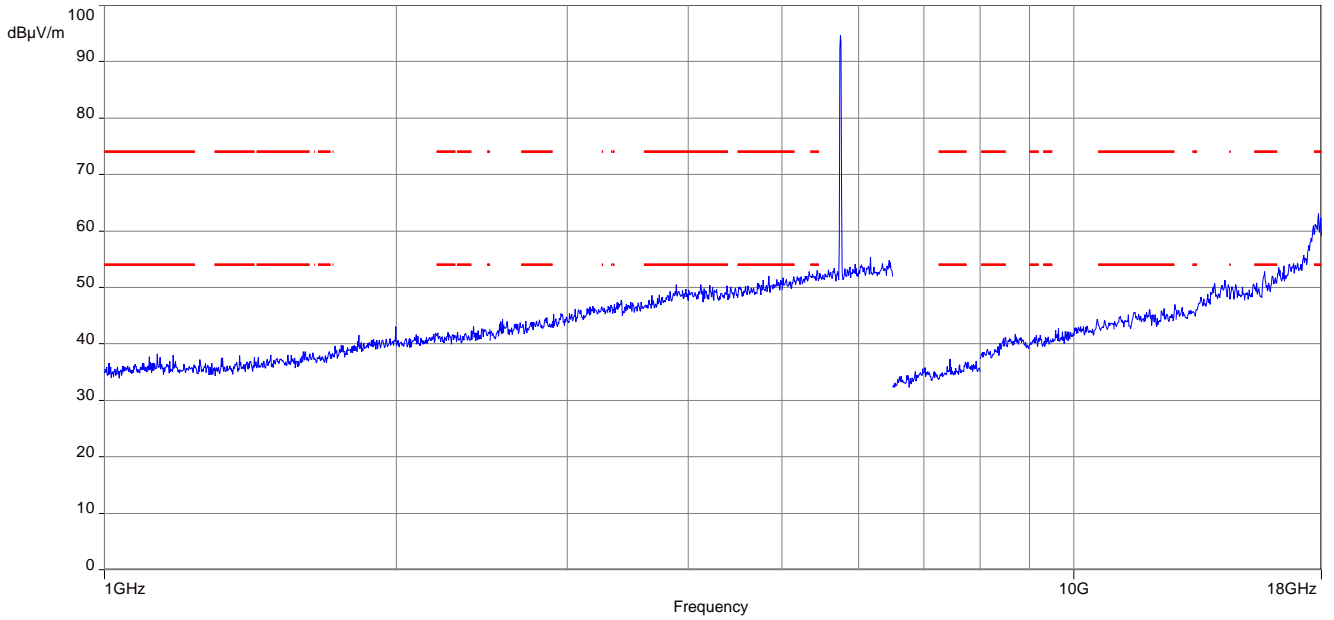


**Plot 28:** 17.7 GHz to 18 GHz, 5745 MHz, zoomed

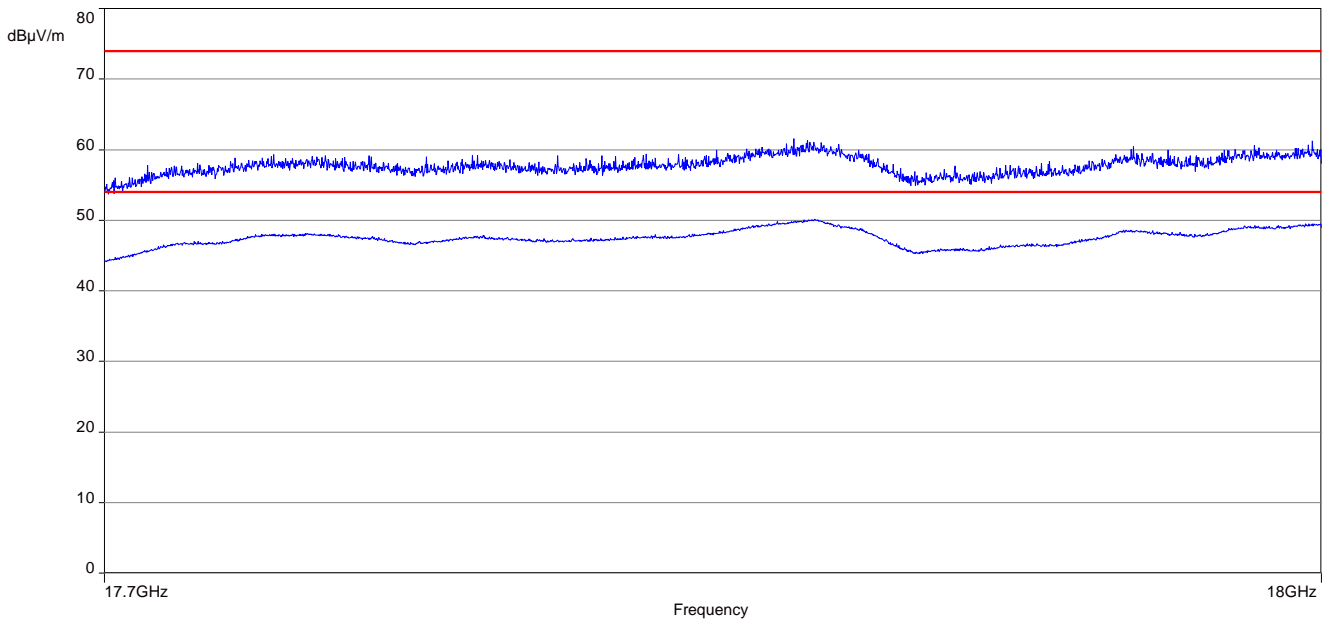


Plot 29: 18 GHz to 26 GHz, 5745 MHz, vertical & horizontal polarization

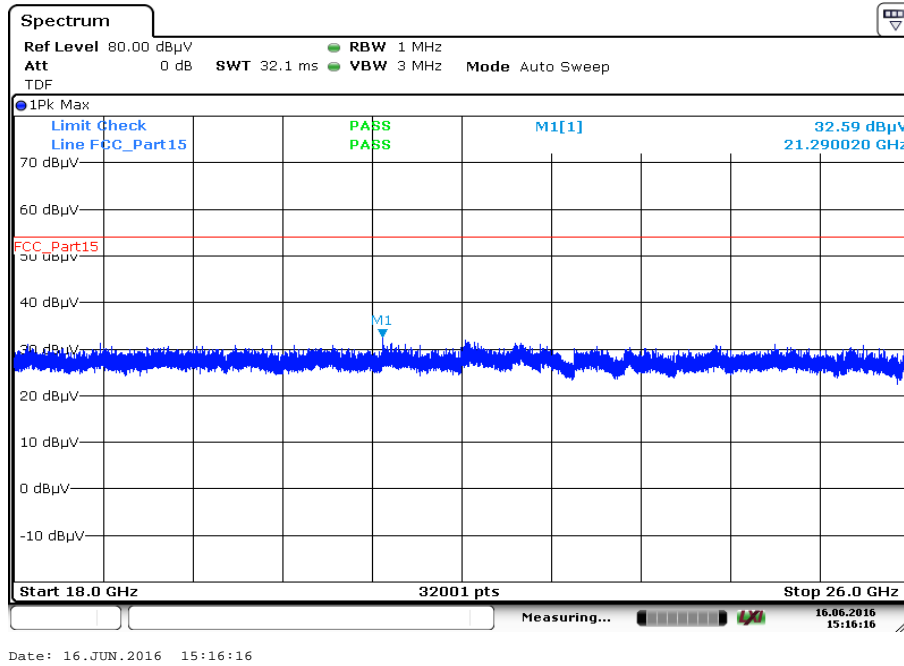

Plot 30: 26 GHz to 40 GHz, 5745 MHz, vertical & horizontal polarization

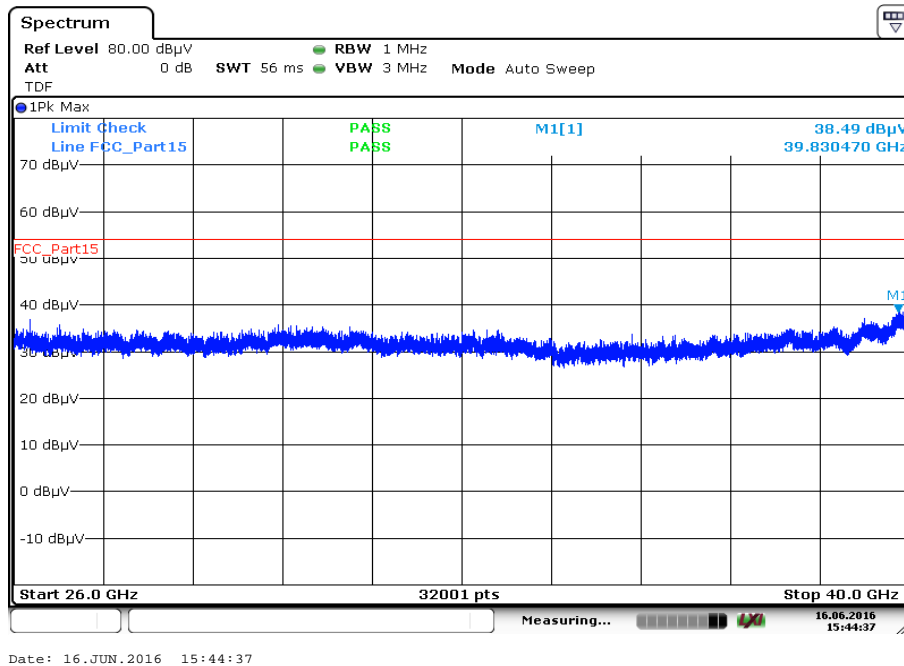

Plot 31: 30 MHz to 1 GHz, 5785 MHz, vertical & horizontal polarization

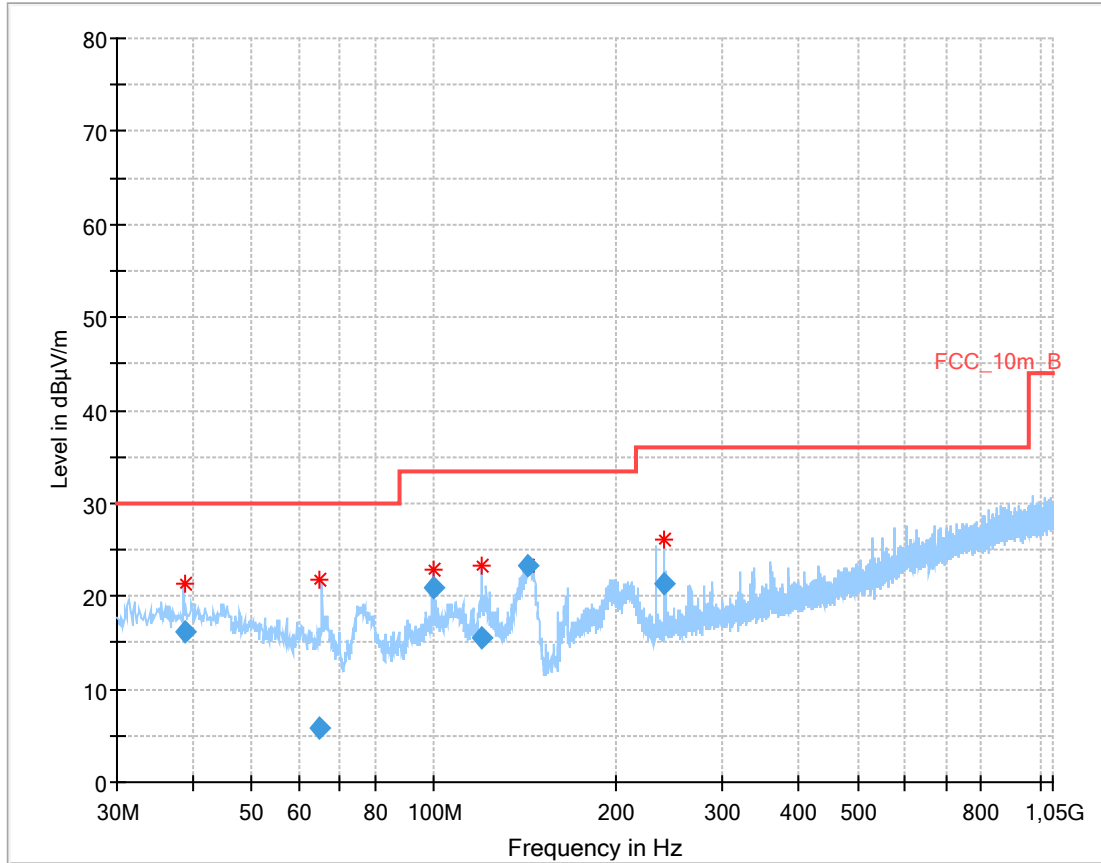


Final\_Result:


| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 38.715600       | 16.08              | 30.00          | 13.92       | 1000.0          | 120.000         | 101.0       | V   | 122.0         | 14.0       |
| 64.888650       | 5.89               | 30.00          | 24.11       | 1000.0          | 120.000         | 104.0       | H   | 349.0         | 9.5        |
| 99.621300       | 20.82              | 33.50          | 12.68       | 1000.0          | 120.000         | 101.0       | V   | 318.0         | 12.1       |
| 120.022500      | 15.48              | 33.50          | 18.02       | 1000.0          | 120.000         | 98.0        | V   | 251.0         | 10.2       |
| 143.267700      | 23.36              | 33.50          | 10.14       | 1000.0          | 120.000         | 98.0        | V   | 234.0         | 8.8        |
| 239.898300      | 21.35              | 36.00          | 14.65       | 1000.0          | 120.000         | 98.0        | V   | 296.0         | 13.0       |




**Plot 32:** 1 GHz to 18 GHz, 5785 MHz, vertical & horizontal polarization

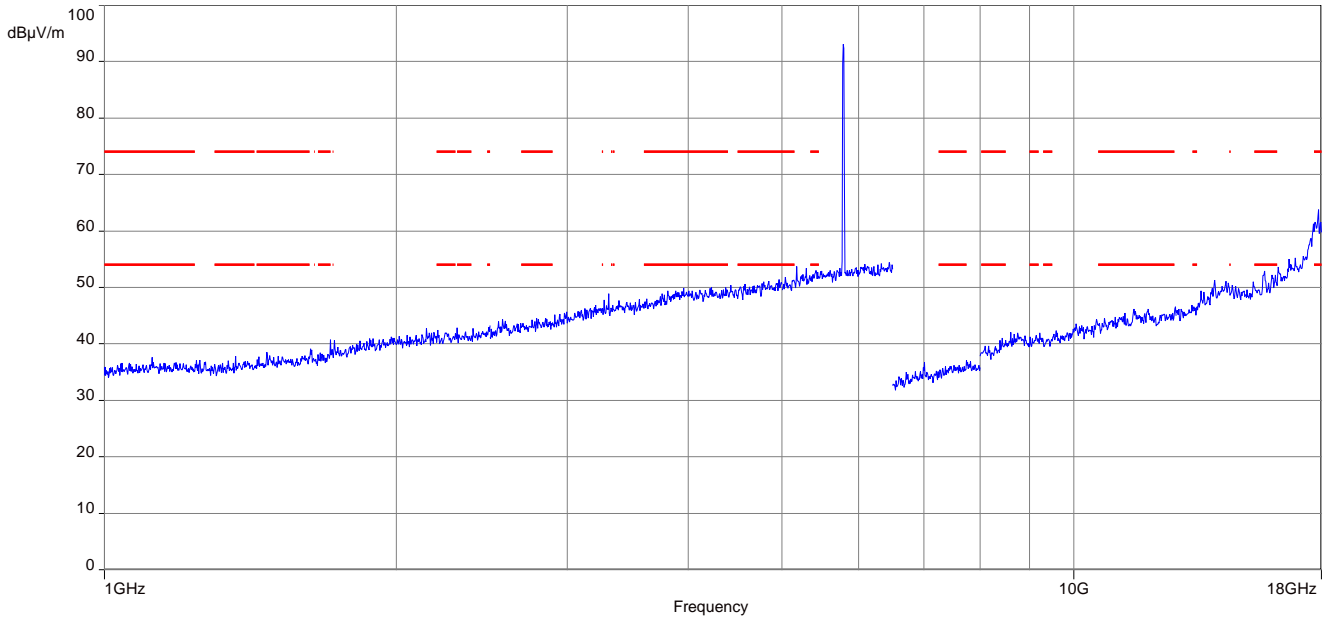

**Plot 33:** 17.7 GHz to 18 GHz, 5785 MHz, zoomed

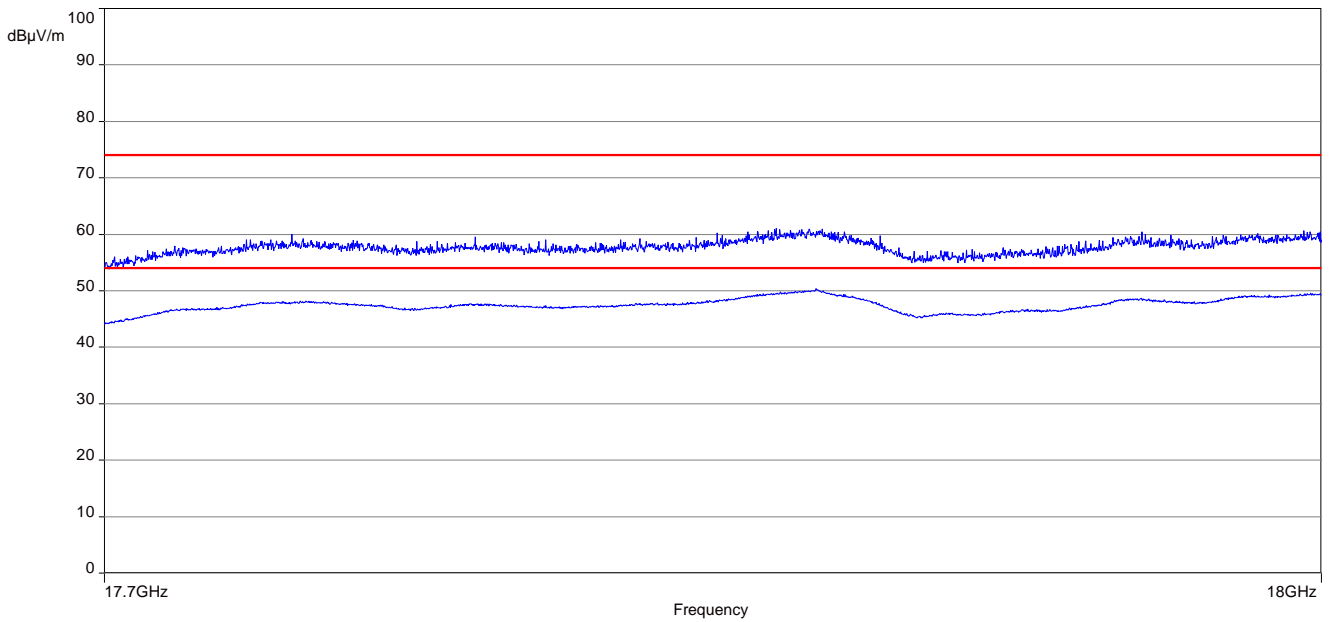


Plot 34: 18 GHz to 26 GHz, 5785 MHz, vertical & horizontal polarization

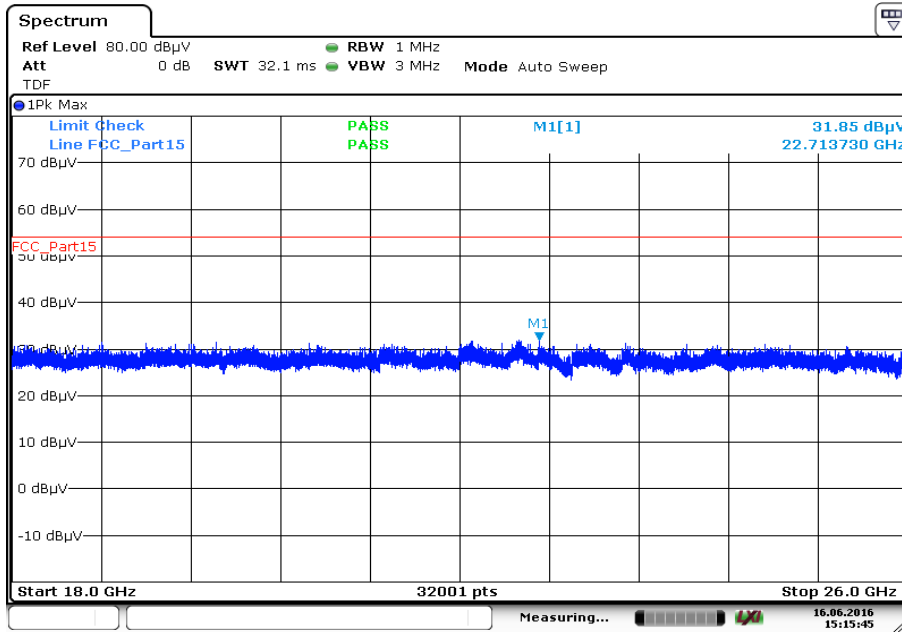


Date: 16.JUN.2016 15:15:45

Plot 35: 26 GHz to 40 GHz, 5785 MHz, vertical & horizontal polarization

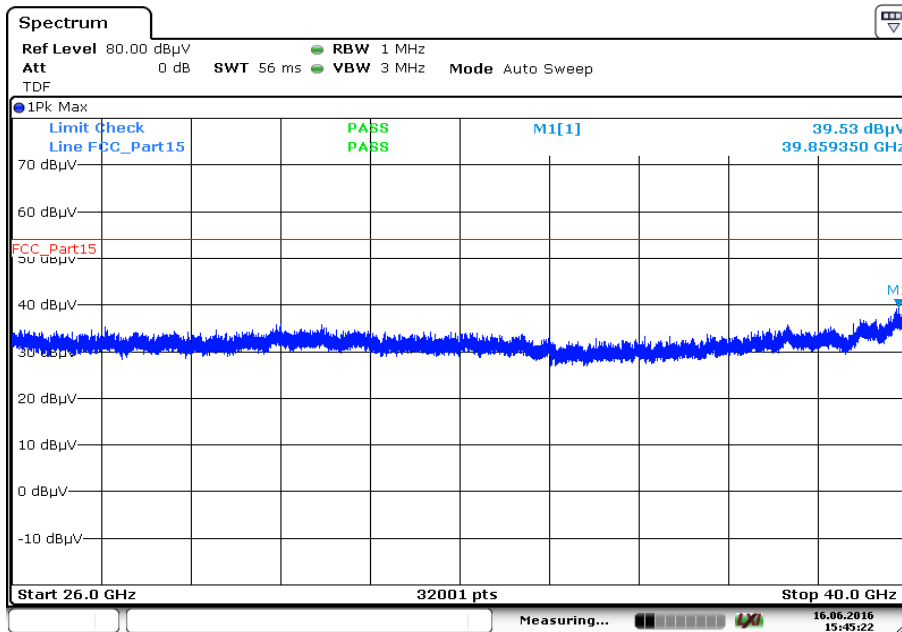

Date: 16.JUN.2016 15:45:22


**Plot 36:** 30 MHz to 1 GHz, 5825 MHz, vertical & horizontal polarization

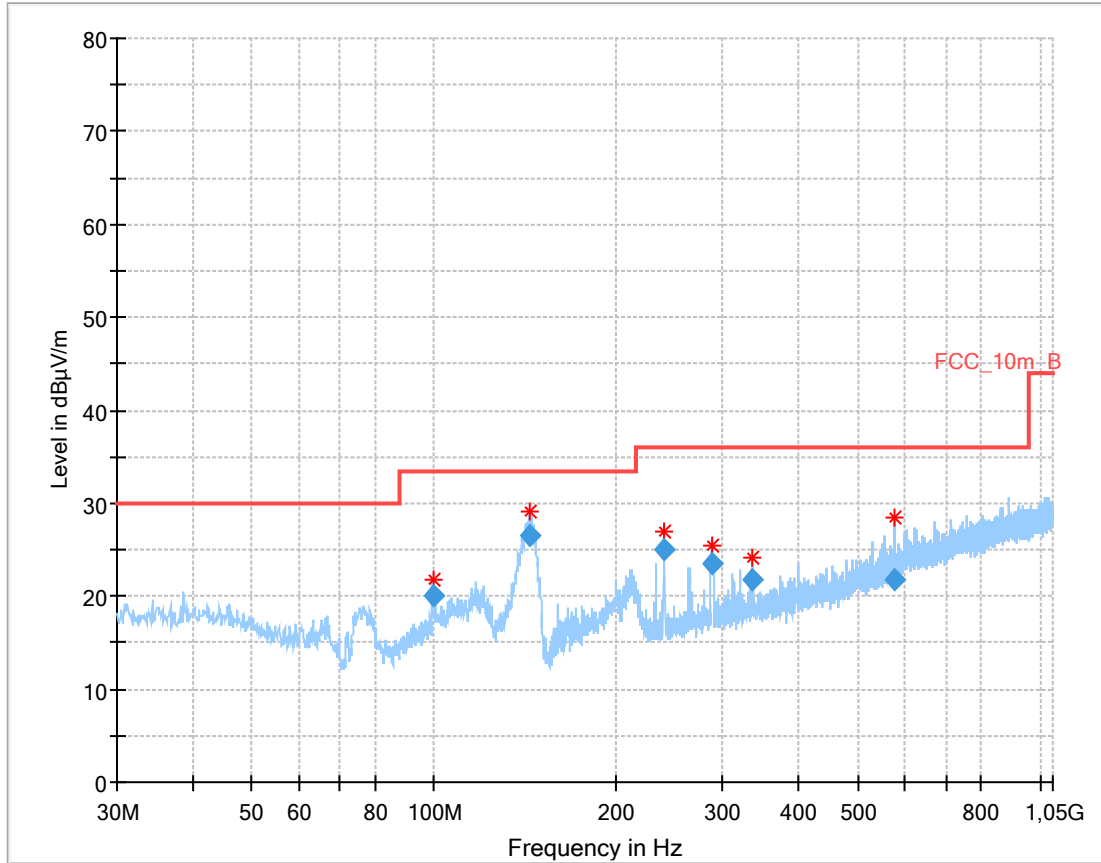


**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 99.729450       | 20.03              | 33.50          | 13.47       | 1000.0          | 120.000         | 98.0        | V   | 308.0         | 12.1       |
| 143.992050      | 26.59              | 33.50          | 6.91        | 1000.0          | 120.000         | 98.0        | V   | 218.0         | 8.8        |
| 239.963250      | 24.95              | 36.00          | 11.05       | 1000.0          | 120.000         | 98.0        | V   | 348.0         | 13.0       |
| 288.001950      | 23.42              | 36.00          | 12.58       | 1000.0          | 120.000         | 98.0        | V   | 190.0         | 14.2       |
| 335.772900      | 21.87              | 36.00          | 14.13       | 1000.0          | 120.000         | 98.0        | V   | 16.0          | 15.6       |
| 576.870750      | 21.75              | 36.00          | 14.25       | 1000.0          | 120.000         | 101.0       | H   | 328.0         | 20.1       |


**Plot 37:** 1 GHz to 18 GHz, 5825 MHz, vertical & horizontal polarization

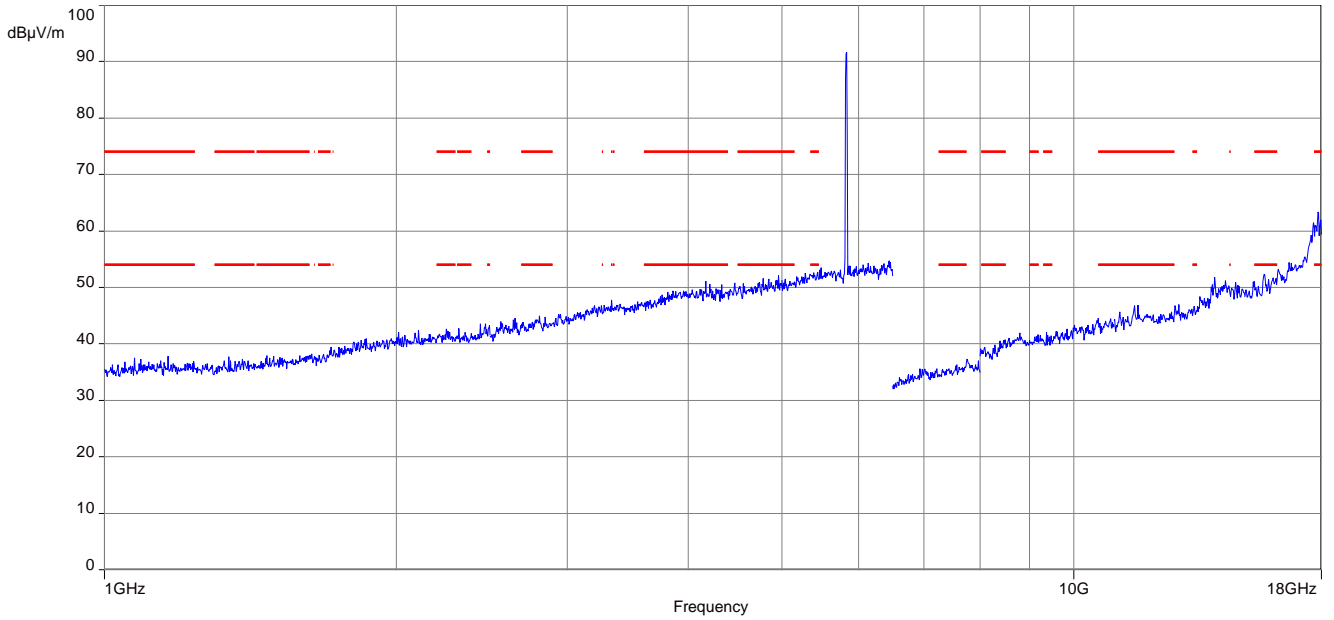


**Plot 38:** 17.7 GHz to 18 GHz, 5825 MHz, zoomed

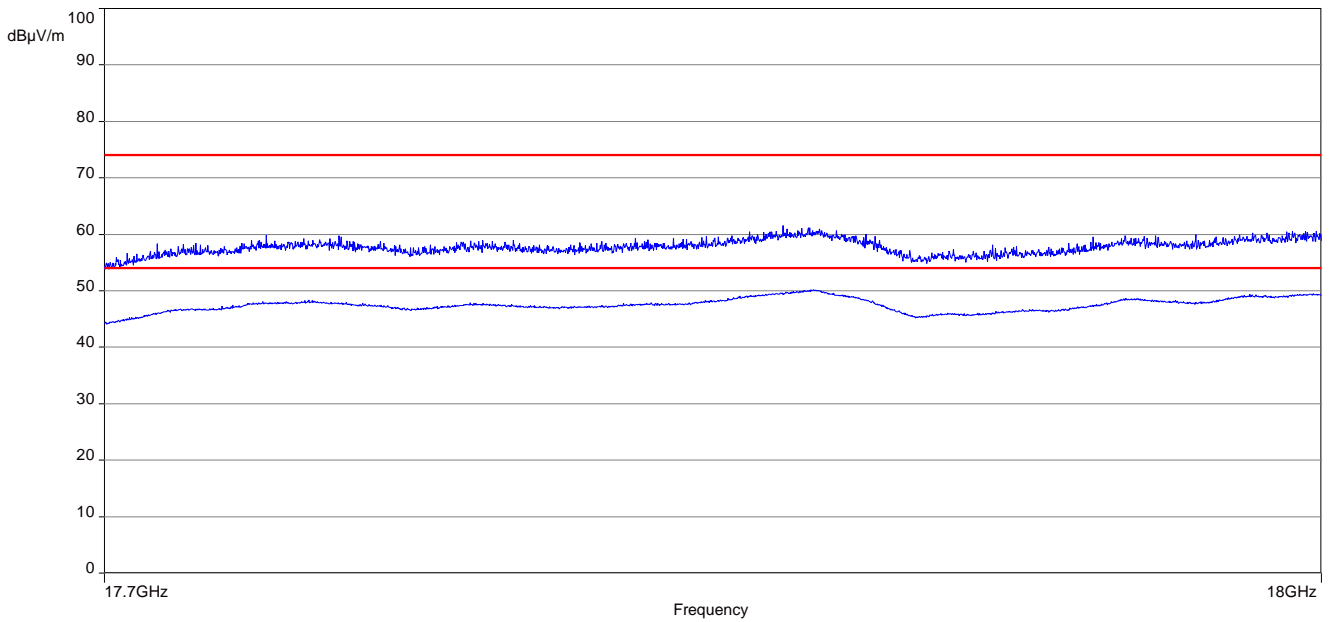

Plot 39: 18 GHz to 26 GHz, 5825 MHz, vertical & horizontal polarization

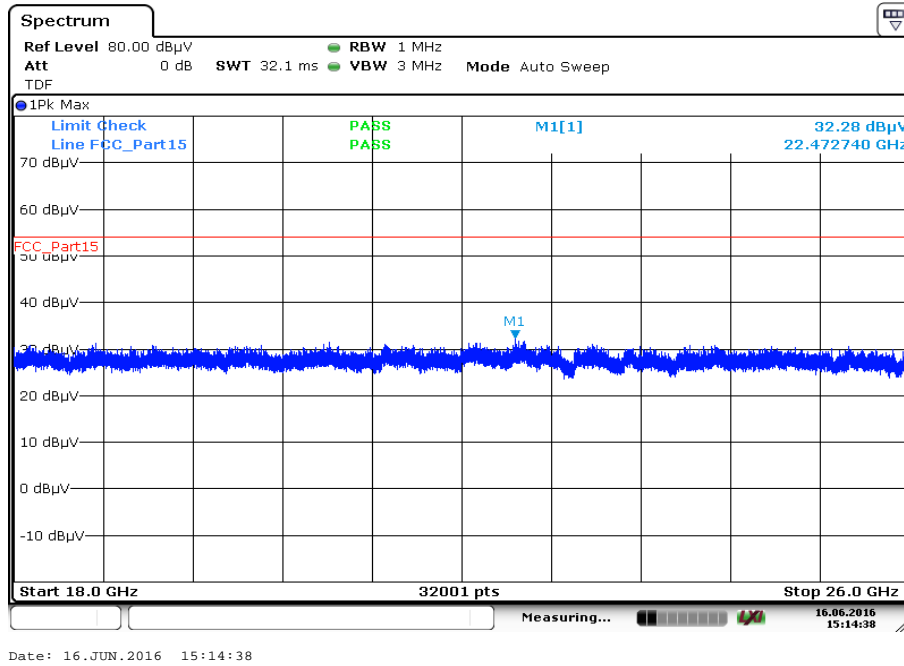

Plot 40: 26 GHz to 40 GHz, 5825 MHz, vertical & horizontal polarization

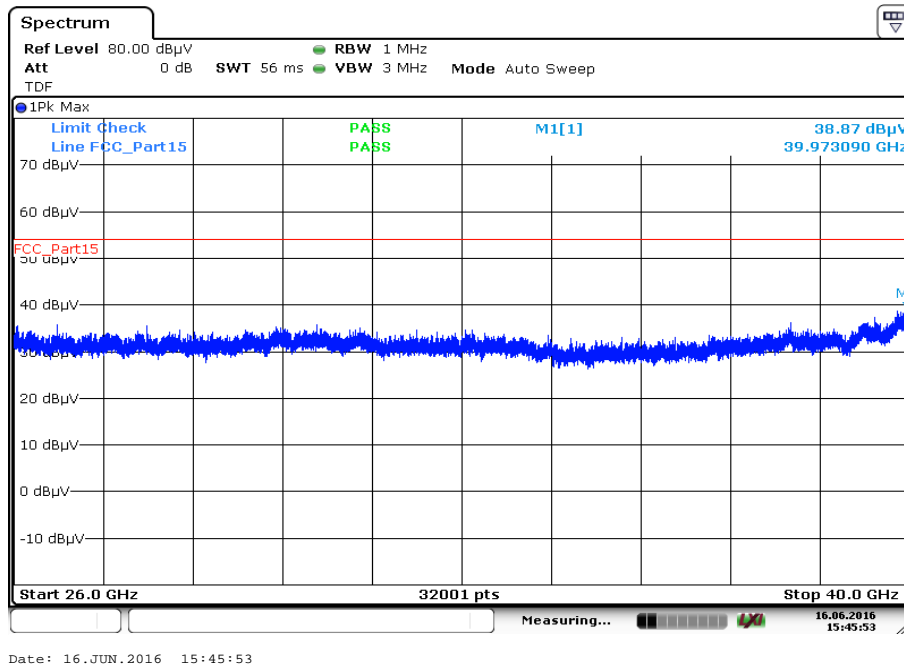

## 12.9 RX spurious emissions radiated

**Description:**

Measurement of the radiated spurious emissions in idle/receive mode.

**Measurement:**

| Measurement parameter    |                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------|
| Detector:                | Quasi Peak below 1 GHz (alternative Peak)<br>Peak above 1 GHz / RMS                 |
| Sweep time:              | Auto                                                                                |
| Resolution bandwidth:    | F < 1 GHz: 100 kHz<br>F > 1 GHz: 1 MHz                                              |
| Video bandwidth:         | F < 1 GHz: 100 kHz<br>F > 1 GHz: ≥ 3 MHz / 10 Hz                                    |
| Span:                    | 30 MHz to 40 GHz                                                                    |
| Trace-Mode:              | Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 % |
| Test setup:              | See chapter 7.1 – A, 7.2 – A, 7.3 – A                                               |
| Measurement uncertainty: | See chapter 9                                                                       |

**Limits:**

| RX Spurious Emissions Radiated |                         |                      |
|--------------------------------|-------------------------|----------------------|
| Frequency (MHz)                | Field Strength (dBµV/m) | Measurement distance |
| 30 - 88                        | 30.0                    | 10                   |
| 88 – 216                       | 33.5                    | 10                   |
| 216 – 960                      | 36.0                    | 10                   |
| Above 960                      | 54.0                    | 3                    |


**Results:**

| RX Spurious Emissions Radiated [dBµV/m]                     |          |                |
|-------------------------------------------------------------|----------|----------------|
| F [MHz]                                                     | Detector | Level [dBµV/m] |
| All detected emissions are more than 10 dB below the limit. |          |                |
|                                                             |          |                |
|                                                             |          |                |


**Note:** The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

**Plots: RX / Idle – mode**

**Plot 1:** 9 kHz to 30 MHz, vertical & horizontal polarization

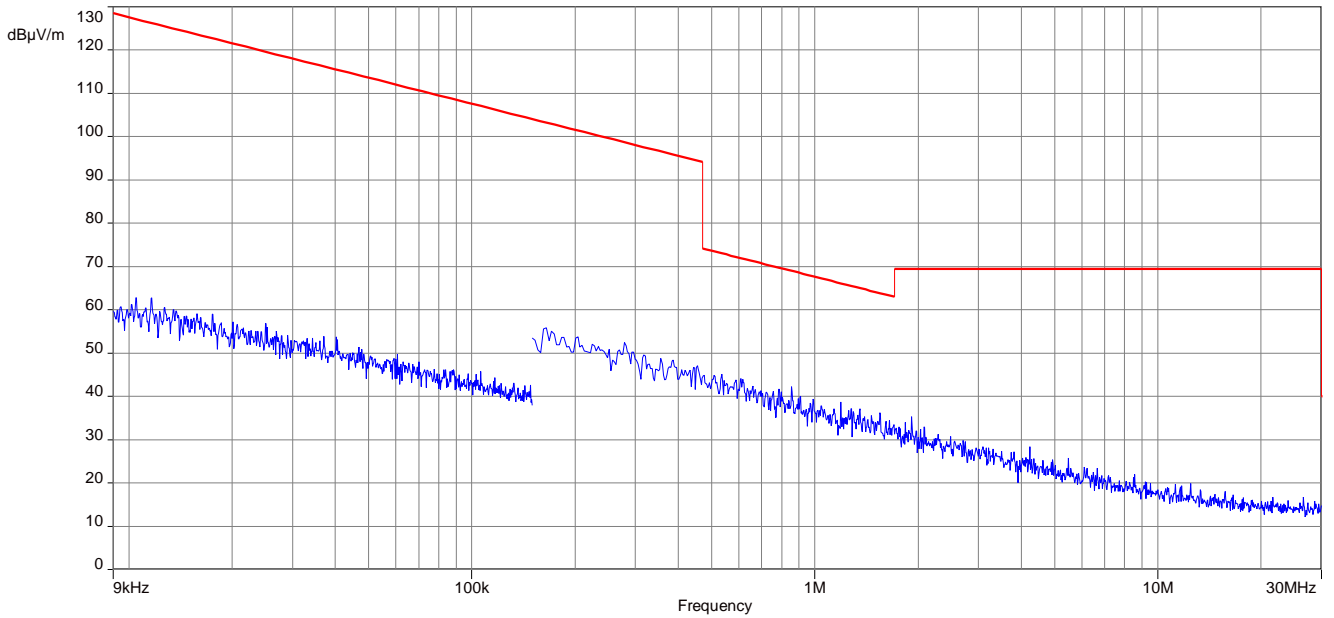

**Plot 2:** 30 MHz to 1 GHz, vertical & horizontal polarization

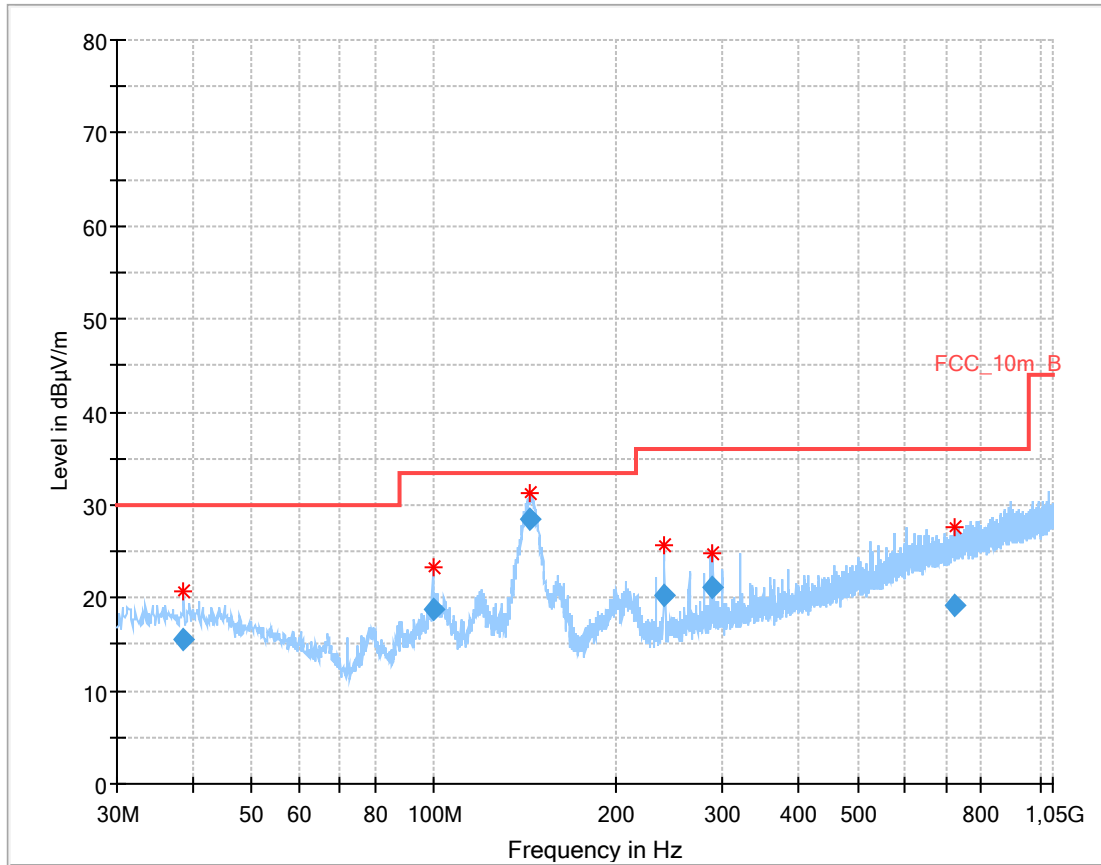


**Final\_Result:**


| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 38.675400       | 15.43              | 30.00          | 14.57       | 1000.0          | 120.000         | 101.0       | V   | 199.0         | 14.0       |
| 99.768300       | 18.84              | 33.50          | 14.66       | 1000.0          | 120.000         | 98.0        | V   | 273.0         | 12.1       |
| 144.164400      | 28.42              | 33.50          | 5.08        | 1000.0          | 120.000         | 98.0        | V   | 261.0         | 8.8        |
| 240.028650      | 20.32              | 36.00          | 15.68       | 1000.0          | 120.000         | 98.0        | V   | 9.0           | 13.0       |
| 287.904450      | 21.12              | 36.00          | 14.88       | 1000.0          | 120.000         | 98.0        | V   | 172.0         | 14.2       |
| 723.181650      | 19.20              | 36.00          | 16.80       | 1000.0          | 120.000         | 185.0       | V   | 38.0          | 22.1       |



**Plot 3:** 1 GHz to 12.75 GHz, vertical & horizontal polarization

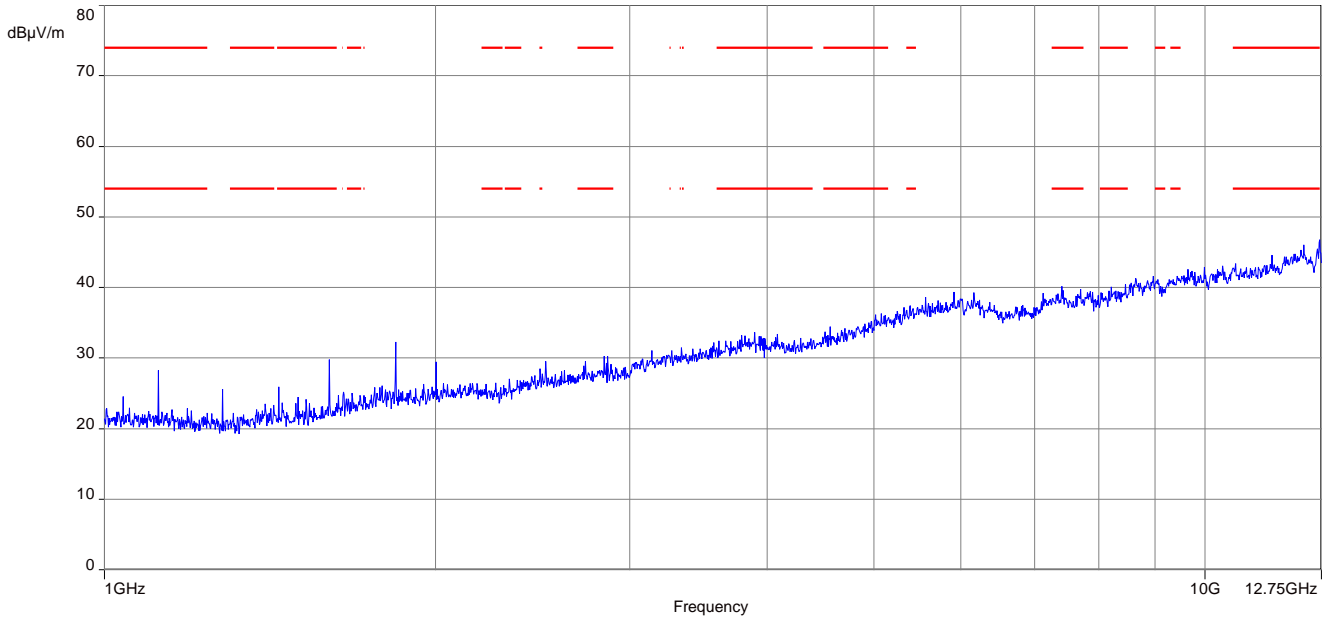


**Plot 4:** 12.75 GHz to 18 GHz, vertical & horizontal polarization

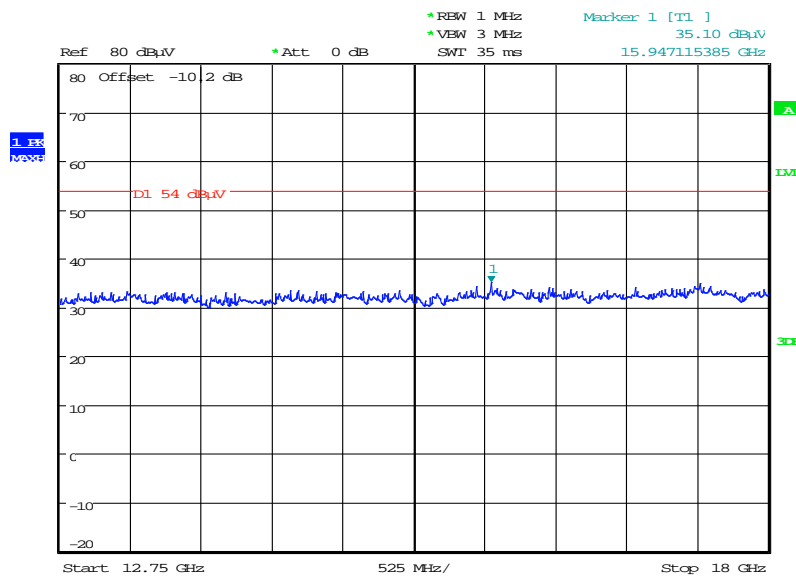


Date: 20.MAR.2013 10:53:28

Plot 5: 18 GHz to 26 GHz, vertical & horizontal polarization

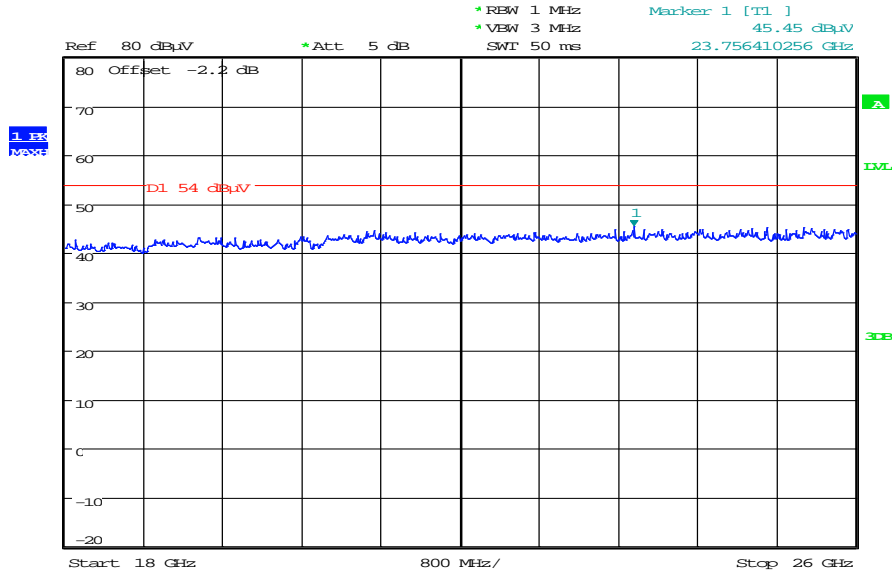

Date: 20.MAR.2013 10:51:54

Plot 6: 26 GHz to 40 GHz, vertical & horizontal polarization

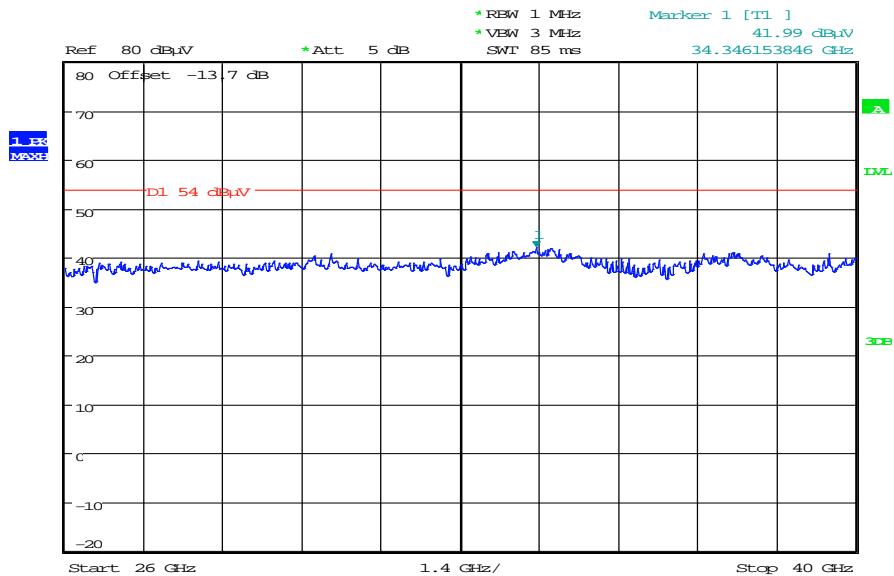

Date: 20.MAR.2013 10:47:29

## 12.10 Spurious emissions radiated < 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode and receive mode below 30 MHz. The EUT is set first to middle channel. This measurement is representative for all channels and modes. If critical peaks are found the lowest channel and the highest channel will be measured too. Then the EUT is set to receive or idle mode. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

### Measurement:

| Measurement parameter    |                                            |
|--------------------------|--------------------------------------------|
| Detector:                | Peak / Quasi Peak                          |
| Sweep time:              | Auto                                       |
| Video bandwidth:         | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Resolution bandwidth:    | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                    | 9 kHz to 30 MHz                            |
| Trace-Mode:              | Max Hold                                   |
| Test setup:              | See chapter 7.2 – B                        |
| Measurement uncertainty: | See chapter 9                              |

### Limits:

| Spurious Emissions Radiated < 30 MHz |                               |                      |
|--------------------------------------|-------------------------------|----------------------|
| Frequency (MHz)                      | Field Strength (dB $\mu$ V/m) | Measurement distance |
| 0.009 – 0.490                        | 2400/F(kHz)                   | 300                  |
| 0.490 – 1.705                        | 24000/F(kHz)                  | 30                   |
| 1.705 – 30.0                         | 30                            | 30                   |


### Results:

| Spurious Emissions Radiated < 30 MHz [dB $\mu$ V/m]         |          |                      |
|-------------------------------------------------------------|----------|----------------------|
| F [MHz]                                                     | Detector | Level [dB $\mu$ V/m] |
| All detected emissions are more than 10 dB below the limit. |          |                      |
|                                                             |          |                      |
|                                                             |          |                      |


**Note:** The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

**Plots:** ODFM / ANT1


**Plot 1:** 9 kHz to 30 MHz, 5180 MHz, TX mode

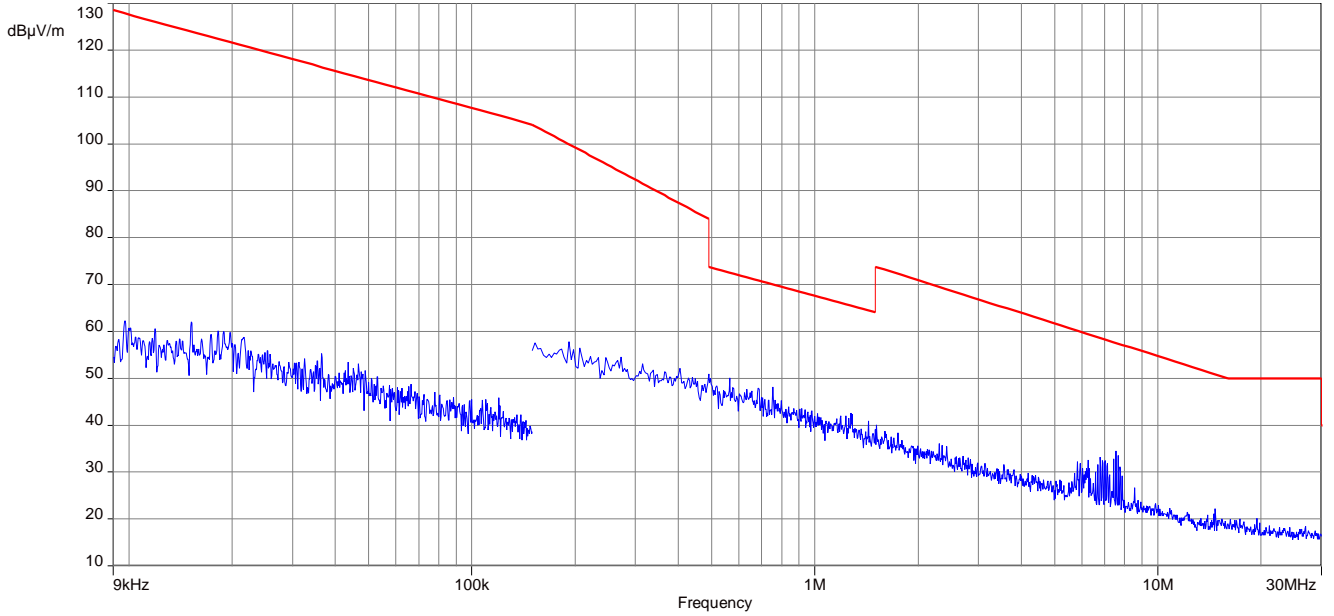


**Plot 2:** 9 kHz to 30 MHz, 5320 MHz, TX mode

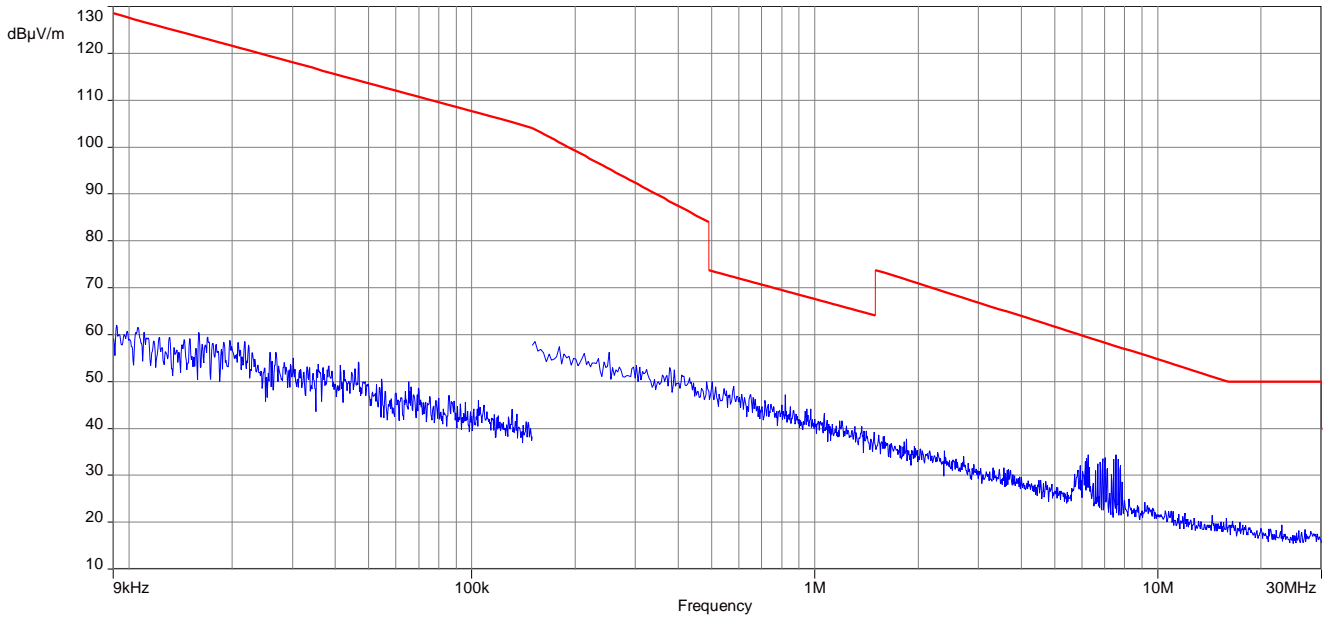


**Plot 3:** 9 kHz to 30 MHz, 5500 MHz, TX mode

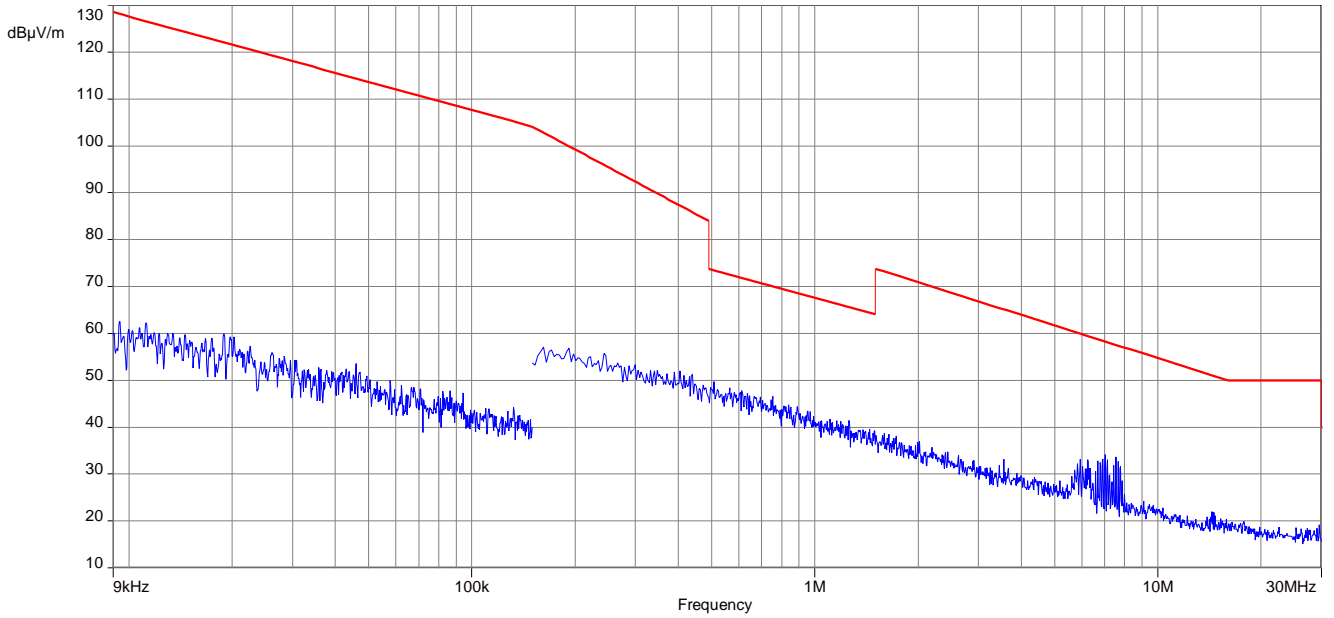


**Plot 4:** 9 kHz to 30 MHz, 5600 MHz, TX mode

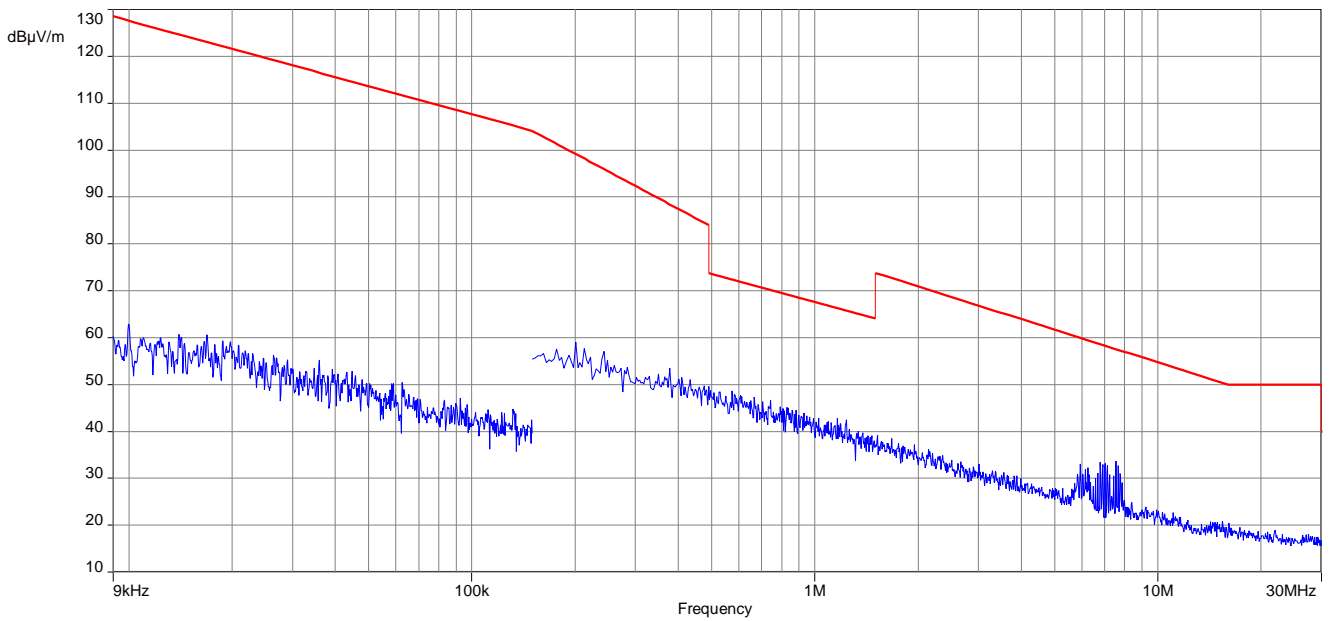


**Plot 5:** 9 kHz to 30 MHz, 5700 MHz, TX mode

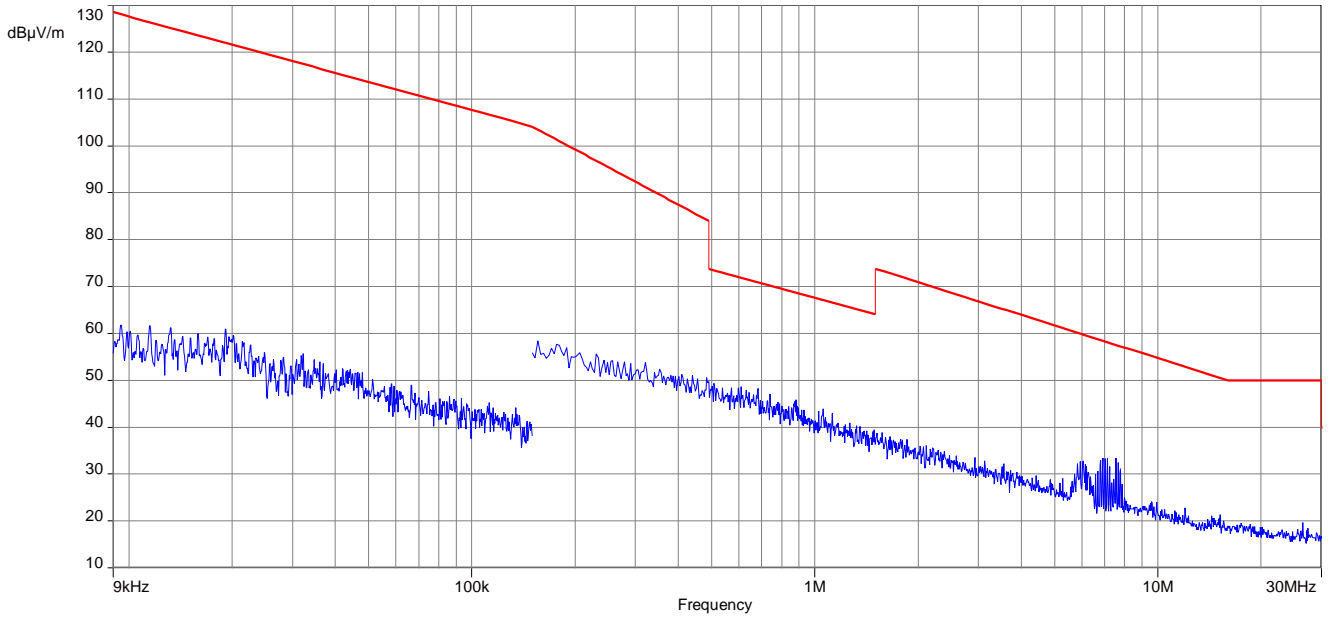


**Plot 6:** 9 kHz to 30 MHz, 5745 MHz, TX mode

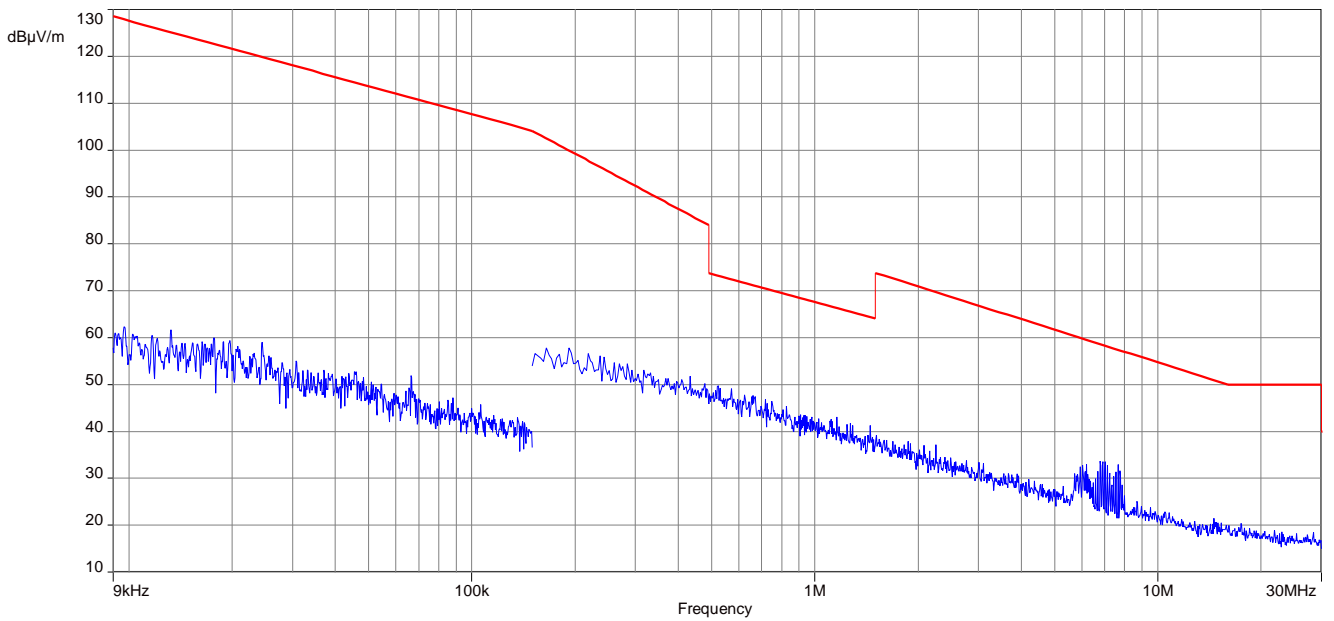

**Plot 7:** 9 kHz to 30 MHz, 5785 MHz, TX mode

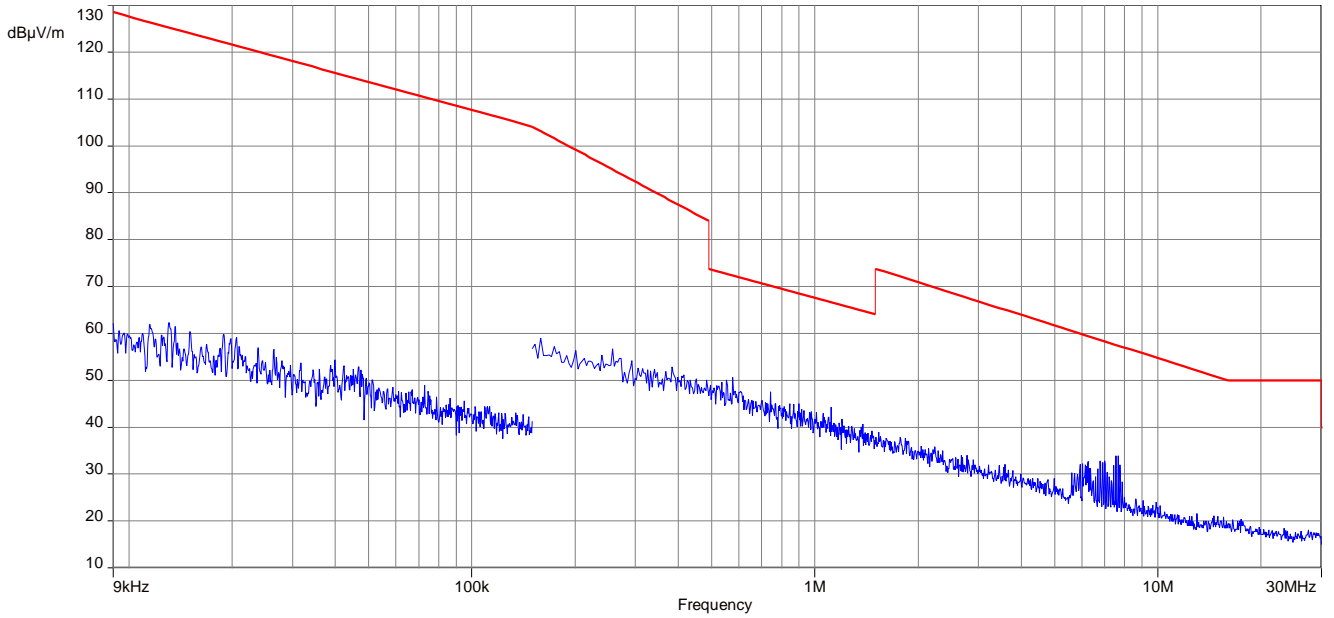


**Plot 8:** 9 kHz to 30 MHz, 5825 MHz, TX mode

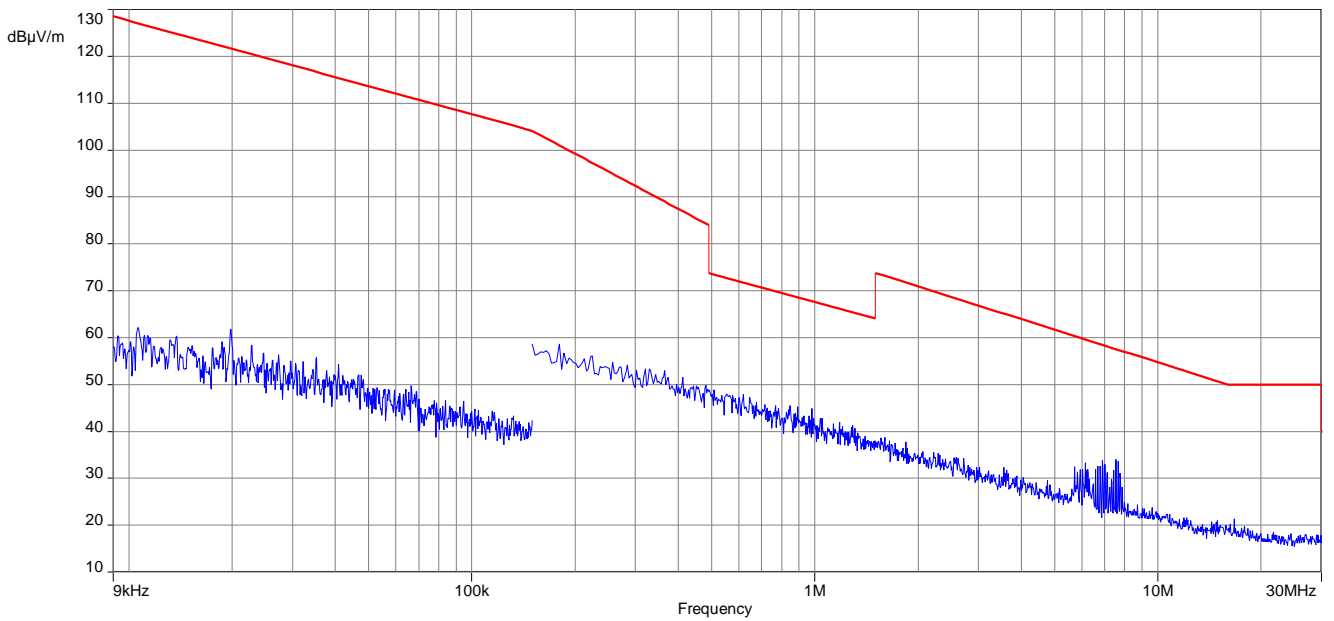


**Plots:** ODFM / ANT2

**Plot 9:** 9 kHz to 30 MHz, 5180 MHz, TX mode

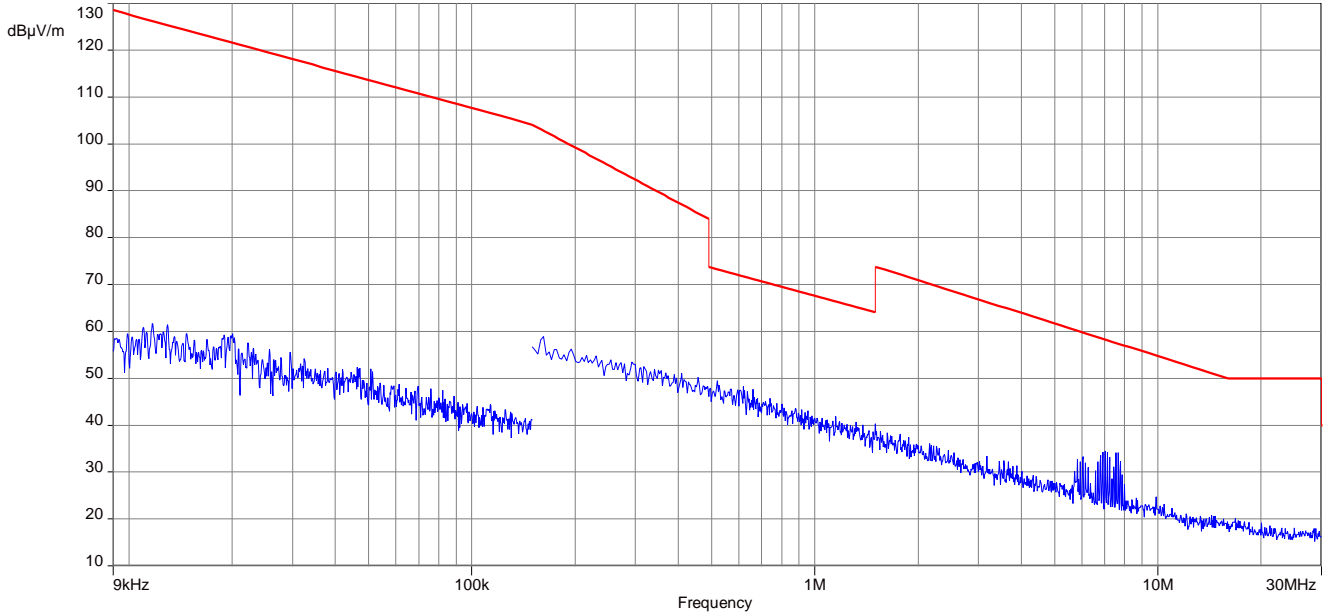


**Plot 10:** 9 kHz to 30 MHz, 5320 MHz, TX mode

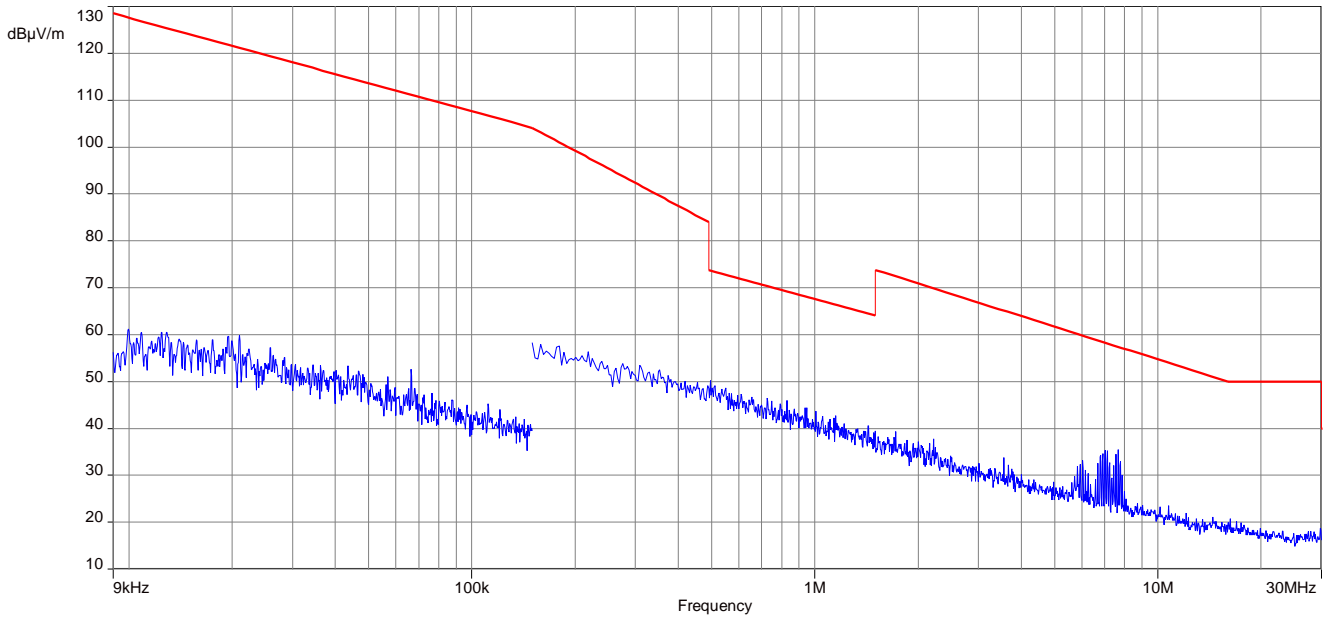





Plot 11: 9 kHz to 30 MHz, 5500 MHz, TX mode

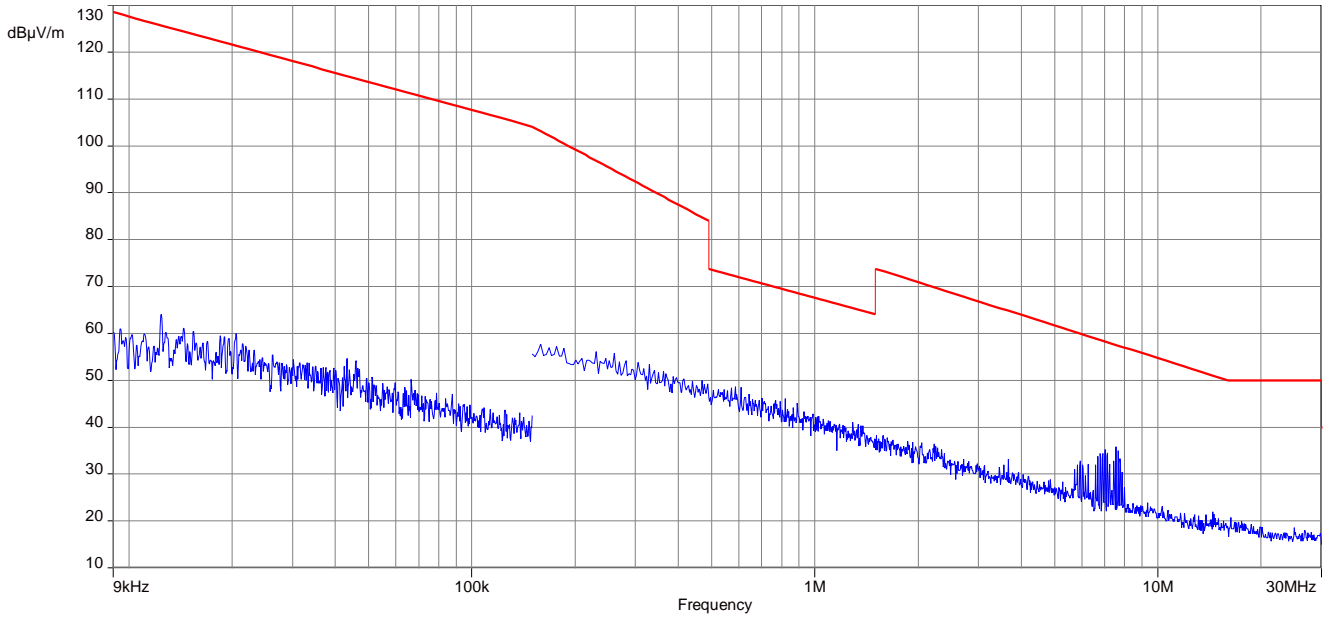


Plot 12: 9 kHz to 30 MHz, 5600 MHz, TX mode

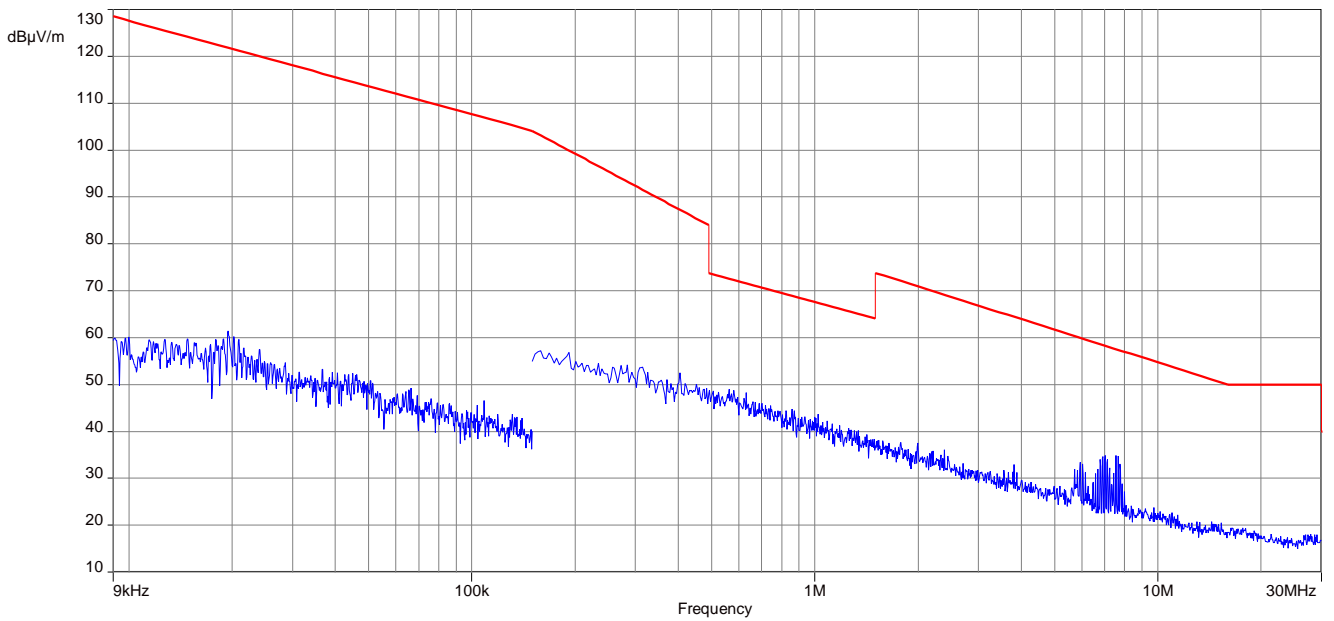


**Plot 13:** 9 kHz to 30 MHz, 5700 MHz, TX mode

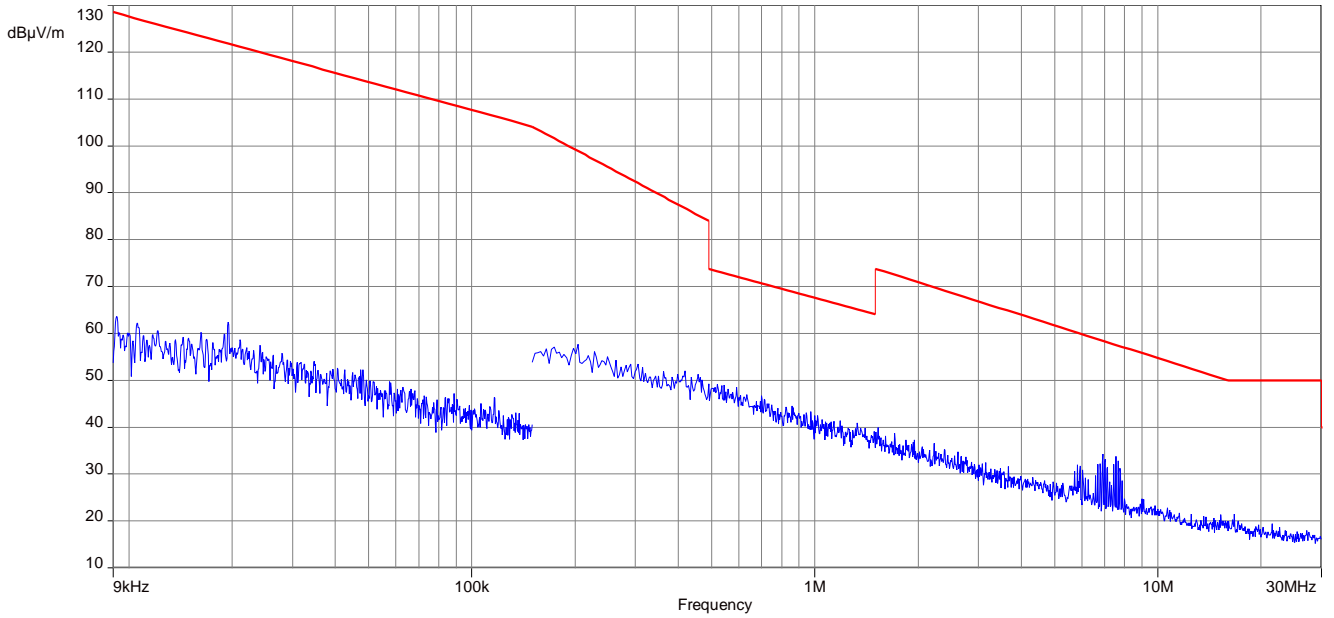


**Plot 14:** 9 kHz to 30 MHz, 5745 MHz, TX mode

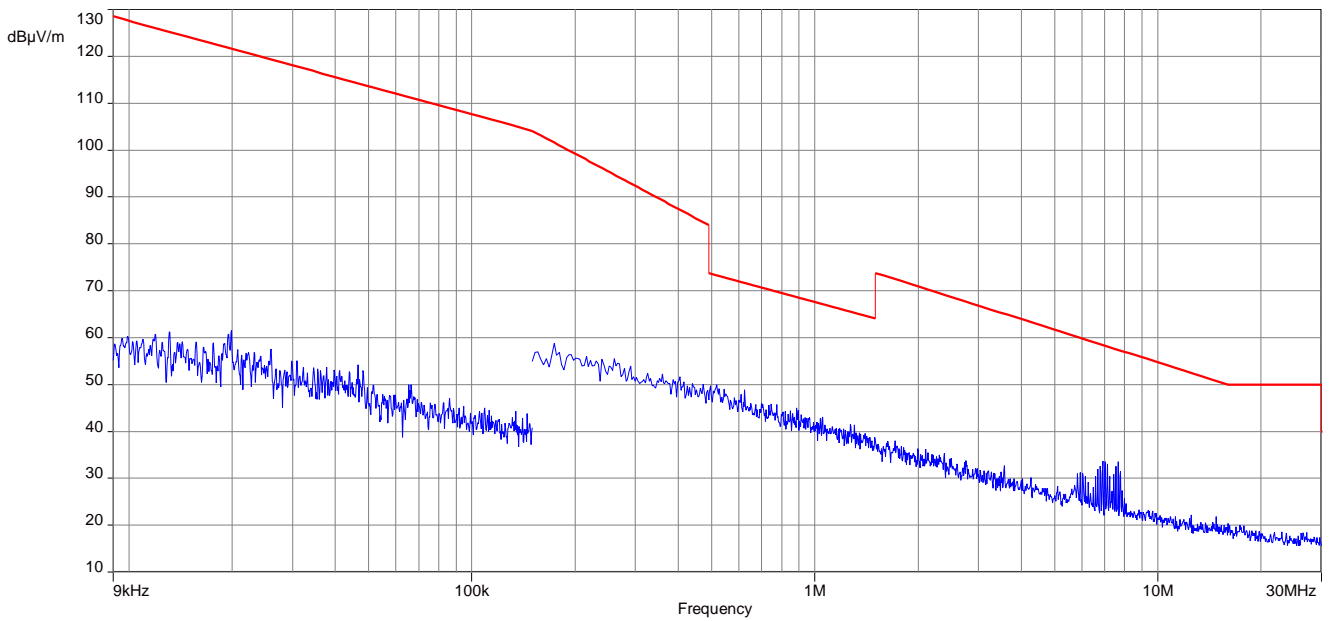

**Plot 15:** 9 kHz to 30 MHz, 5785 MHz, TX mode

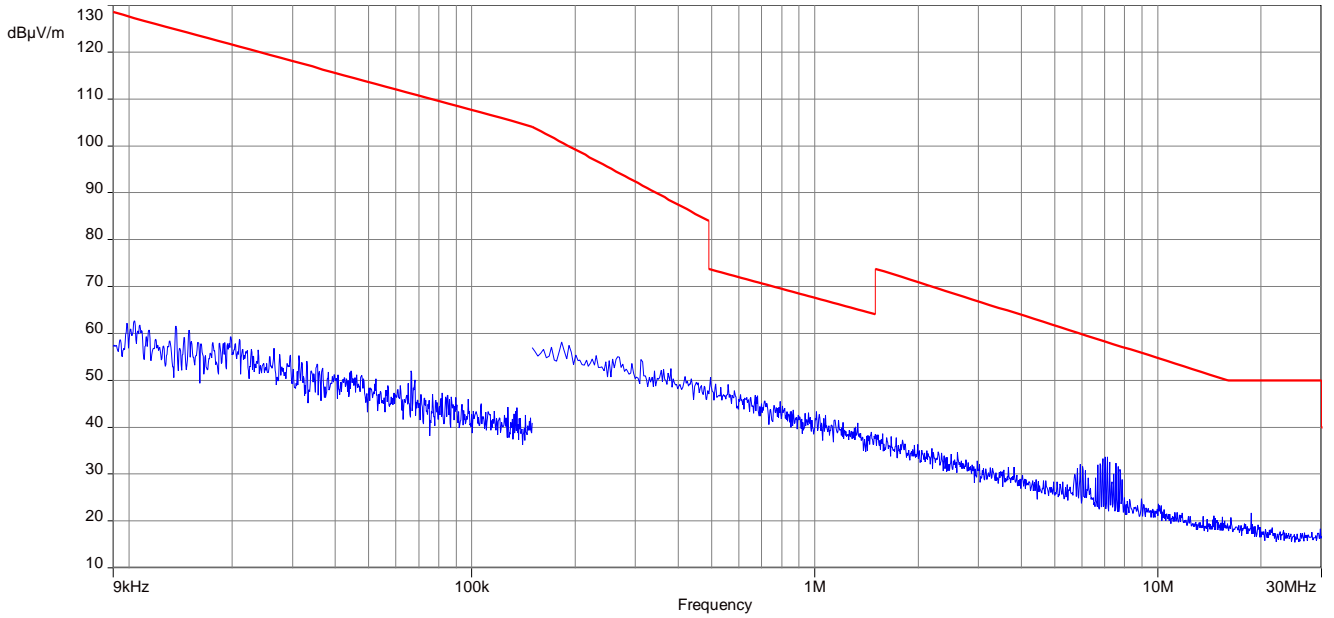

**Plot 16:** 9 kHz to 30 MHz, 5825 MHz, TX mode

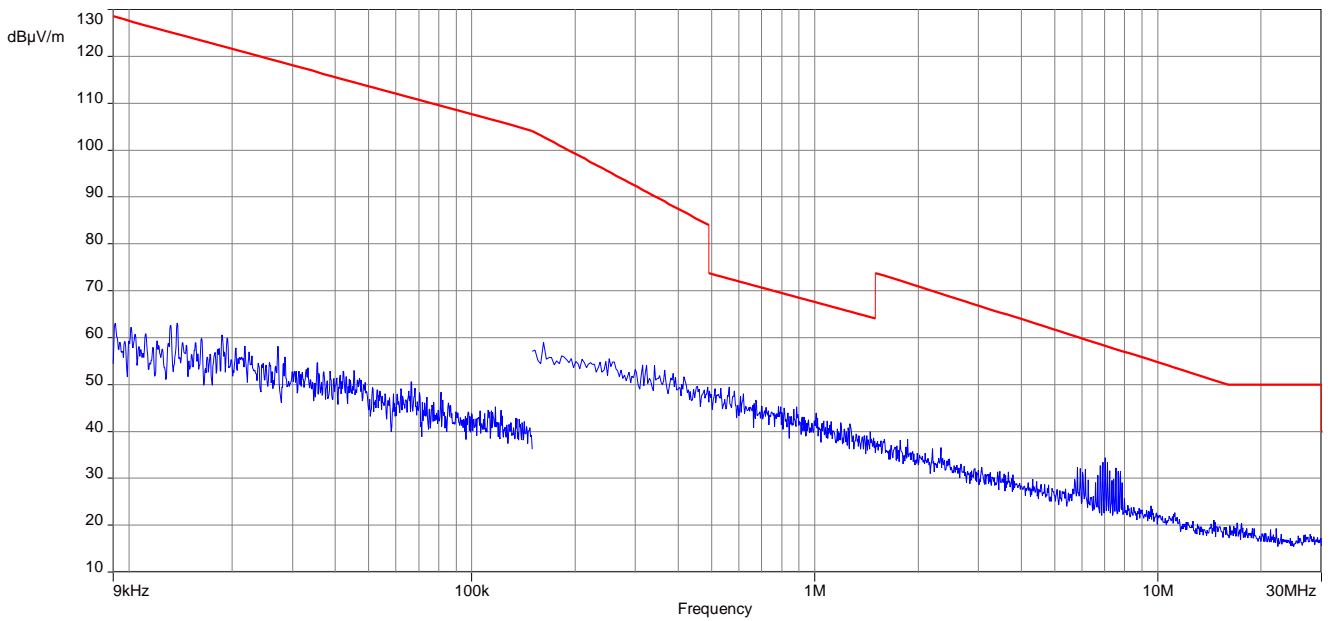

## 12.11 Spurious emissions conducted < 30 MHz

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel. If critical peaks are found the lowest channel and the highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

### Measurement:

| Measurement parameter    |                             |
|--------------------------|-----------------------------|
| Detector:                | Peak - Quasi Peak / Average |
| Sweep time:              | Auto                        |
| Video bandwidth:         | F > 150 kHz: 9 kHz          |
| Resolution bandwidth:    | F > 150 kHz: 100 kHz        |
| Span:                    | 150 kHz to 30 MHz           |
| Trace-Mode:              | Max Hold                    |
| Test setup:              | See chapter 7.4 – A         |
| Measurement uncertainty: | See chapter 9               |

### Limits:

| Spurious Emissions Conducted < 30 MHz |                     |                  |
|---------------------------------------|---------------------|------------------|
| Frequency (MHz)                       | Quasi-Peak (dBµV/m) | Average (dBµV/m) |
| 0.15 – 0.5                            | 66 to 56*           | 56 to 46*        |
| 0.5 – 5                               | 56                  | 46               |
| 5 – 30.0                              | 60                  | 50               |


\*Decreases with the logarithm of the frequency

### Results:


| Spurious Emissions Conducted < 30 MHz [dBµV/m]              |          |                |
|-------------------------------------------------------------|----------|----------------|
| F [MHz]                                                     | Detector | Level [dBµV/m] |
| All detected emissions are more than 10 dB below the limit. |          |                |
|                                                             |          |                |
|                                                             |          |                |

**Plots:**

**Plot 1:** 150 kHz to 30 MHz / phase Line, TX mode, power supply NT 12-50C

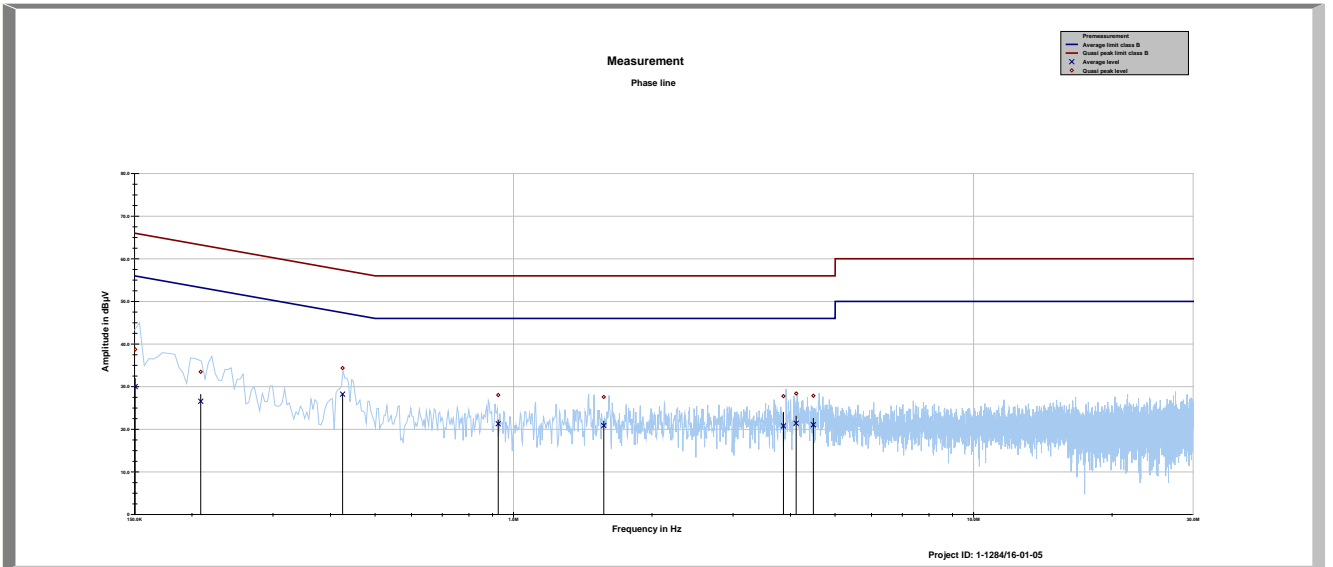

**Plot 2:** 150 kHz to 30 MHz / neutral Line, TX mode, power supply NT 12-50C

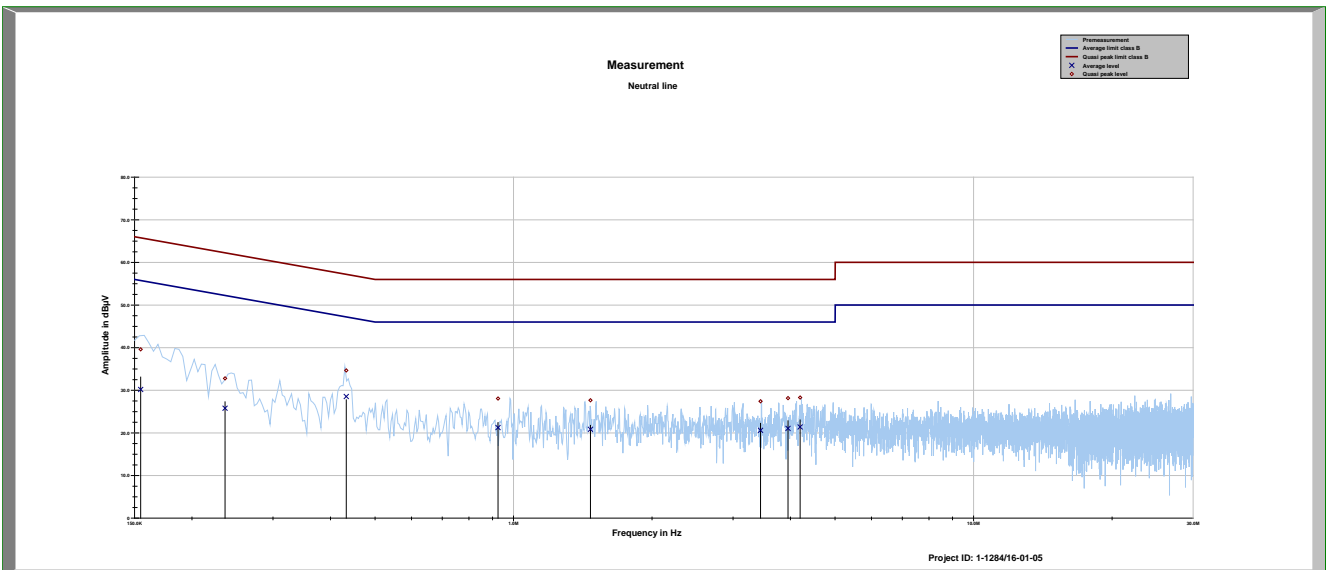

## Annex A Document history

| Version | Applied changes                                 | Date of release |
|---------|-------------------------------------------------|-----------------|
|         | Initial release                                 | 2016-06-23      |
| -A      | Editorial changes (FCC ID / IC ID / HVIN / PMN) | 2016-11-16      |

## Annex B Further information

### Glossary

|          |   |                                                |
|----------|---|------------------------------------------------|
| AVG      | - | Average                                        |
| DUT      | - | Device under test                              |
| EMC      | - | Electromagnetic Compatibility                  |
| EN       | - | European Standard                              |
| EUT      | - | Equipment under test                           |
| ETSI     | - | European Telecommunications Standard Institute |
| FCC      | - | Federal Communication Commission               |
| FCC ID   | - | Company Identifier at FCC                      |
| HW       | - | Hardware                                       |
| IC       | - | Industry Canada                                |
| Inv. No. | - | Inventory number                               |
| N/A      | - | Not applicable                                 |
| PP       | - | Positive peak                                  |
| QP       | - | Quasi peak                                     |
| S/N      | - | Serial number                                  |
| SW       | - | Software                                       |
| PMN      | - | Product marketing name                         |
| HMN      | - | Host marketing name                            |
| HVIN     | - | Hardware version identification number         |
| FVIN     | - | Firmware version identification number         |

**Annex C Accreditation Certificate**

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Beliehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
 Unterzeichnerin der Multilateralen Abkommen  
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

**Akkreditierung**



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CETECOM ICT Services GmbH**  
 Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

- Funk
- Mobilfunk (GSM / DCS) + OTA
- Elektromagnetische Verträglichkeit (EMV)
- Produktsicherheit
- SAR / EMF
- Umwelt
- Smart Card Technology
- Bluetooth®
- Automotive
- Wi-Fi-Services
- Kanadische Anforderungen
- US-Anforderungen
- Akustik
- Near Field Communication (NFC)

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 04.05.2016 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.

Registrierungsnummer der Urkunde: **D-PL-12076-01-01**

Frankfurt, 04.05.2016

Siehe Hinweis auf der Rückseite

*RSE*  
 Im Auftrag Dr.-Ing. (FH) Ralf Egner  
 Abteilungsleiter

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
 Spittelmarkt 10  
 10117 Berlin

Standort Frankfurt am Main  
 Europa-Allee 52  
 60327 Frankfurt am Main

Standort Braunschweig  
 Bundesallee 100  
 38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
 EA: [www.european-accrreditation.org](http://www.european-accrreditation.org)  
 ILAC: [www.ilac.org](http://www.ilac.org)  
 IAF: [www.iaf.nu](http://www.iaf.nu)

**Note:**

The current certificate including annex may be received from CETECOM ICT Services GmbH on request.